



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street,
Bao'an District, Shenzhen, China

TEST REPORT FCC Rules and Regulations Part PART 15.249

Report Reference No.....: CTA25062500802

FCC ID.....: 2BN8K-8510T

Compiled by

(position+printed name+signature) . : File administrators Zoey Cao

Supervised by

(position+printed name+signature) . : Project Engineer Ace Chai

Approved by

(position+printed name+signature) . : RF Manager Eric Wang

Date of issue: Jul. 30, 2025

Testing Laboratory Name.....: Shenzhen CTA Testing Technology Co., Ltd.

Address: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community,
Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Shanghai Yuanjie Electronic Equipment Co., Ltd.

Address: Room 307, Building #C, 180 South Changjiang Road, Baoshan District,
Shanghai, China

Standard.....: FCC Rules and Regulations Part PART 15.249

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Tour Guide System

Trade Mark.....: N/A

Manufacturer: Shanghai Yuanjie Electronic Equipment Co., Ltd.

Model/Type reference: 8510T

Listed Models: 3510T, 6510T, 7510T, 9510T

Modulation: FM

Frequency: 902.25-927.73MHz

Ratings: DC 3.7V From battery and DC 5.0V From external circuit

Result.....: PASS

TEST REPORT

Equipment under Test : Tour Guide System

Model /Type : 8510T

Listed Models : 3510T, 6510T, 7510T, 9510T

Model difference : The PCB board, circuit, structure and internal of these models are the same, Only model number and colour is different for these model.

Applicant : **Shanghai Yuanjie Electronic Equipment Co., Ltd.**

Address : Room 307, Building #C, 180 South Changjiang Road, Baoshan District, Shanghai, China

Manufacturer : **Shanghai Yuanjie Electronic Equipment Co., Ltd.**

Address : Room 307, Building #C, 180 South Changjiang Road, Baoshan District, Shanghai, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1.	<u>..TEST STANDARDS</u>	<u>4</u>
2.	<u>..SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment Under Test	5
2.4.	Short description of the Equipment under Test (EUT)	5
2.5.	EUT configuration	5
2.6.	EUT operation mode	5
2.7.	Block Diagram of Test Setup	6
2.8.	Modifications	6
3.	<u>..TEST ENVIRONMENT</u>	<u>7</u>
3.1.	TEST FACILITY	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Summary of measurement results	7
3.5.	Statement of the measurement uncertainty	8
3.6.	Equipments Used during the Test	8
4.	<u>..TEST CONDITIONS AND RESULTS</u>	<u>10</u>
4.1.	AC Power Conducted Emission	10
4.2.	Radiated Emission and Band Edges	13
4.3.	20dB bandwidth	23
4.4.	Antenna Requirement	25
5.	<u>..TEST SETUP PHOTOS OF THE EUT</u>	<u>26</u>
6.	<u>PHOTOS OF THE EUT</u>	<u>26</u>

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.249: Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

ANSI C63.10:2013 : American National Standard for Testing Unlicensed Wireless Devices

ANSI C63.4: 2014: –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz
Range of 9 kHz to 40GHz

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Jun. 25 2025
Testing commenced on	:	Jun. 25 2025
Testing concluded on	:	Jul. 30, 2025

2.2. Product Description

Name of EUT	Tour Guide System
Model Number	8510T
Power supply	DC 3.7V From battery and DC 5.0V From external circuit
Sample ID:	CTA250625008-1#(Engineer sample) CTA250625008-2#(Normal sample)
Operation frequency:	902.25-927.73MHz
Modulation:	FM
Antenna Type:	Spring antenna
Antenna Gain:	0.00dBi

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 3.7V From battery and DC 5.0V From external circuit

2.4. Short description of the Equipment under Test (EUT)

This is a Tour Guide System.

For more details, refer to the user's manual of the EUT.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

☐ Adapter information (Auxiliary test supplied by test Lab)		Model: EP-TA20CBC Input: AC 100-240V 50/60Hz Output: DC 5V 2A
--	--	---

2.6. EUT operation mode

The Applicant provides test software to control the EUT for staying in continuous transmitting and receiving mode for testing. There is 50 channels provided to the EUT. Channel Low, Mid, High was selected to test

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	902.25	26	915.25
02	902.77	27	915.77
03	903.29	28	916.29
04	903.81	29	916.81
05	904.33	30	917.33
06	904.85	31	917.85


07	905.37	32	918.37
08	905.89	33	918.89
09	906.41	34	919.41
10	906.93	35	919.93
11	907.45	36	920.45
12	907.97	37	920.97
13	908.49	38	921.49
14	909.01	39	922.01
15	909.53	40	922.53
16	910.05	41	923.05
17	910.57	42	923.57
18	911.09	43	924.09
19	911.61	44	924.61
20	912.13	45	925.13
21	912.65	46	925.65
22	913.17	47	926.17
23	913.69	48	926.69
24	914.21	49	927.21
25	914.73	50	927.73

Testing Frequency:

Channel	Frequency(MHz)
Low	902.25
Mid	914.73
High	927.73

2.7. Block Diagram of Test Setup

Conducted Test/ Radiated Test/ RF Conducted Test

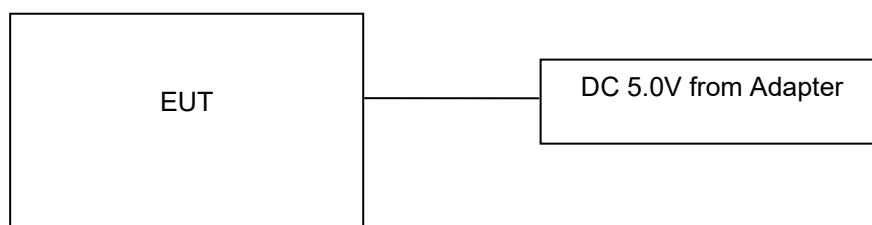

2.8. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. TEST FACILITY

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

Industry Canada Registration Number. Is: 27890 CAB identifier: CN0127

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	25 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	25 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

3.4. Summary of measurement results

FCC PART 15.249		
FCC Part 15.249(a)	Field Strength of Fundamental	PASS
FCC Part 15.209	Spurious Emission	PASS
FCC Part 15.209	Band edge	PASS
FCC Part 15.215(c)	20dB bandwidth	PASS
FCC Part 15.207	Conducted Emission	PASS
FCC Part 15.203	Antenna Requirement	PASS

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01" Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen CTA Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTA Testing Technology Co., Ltd. :

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	9KHz~30MHz	3.02 dB	(1)
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Output Peak power	30MHz~18GHz	0.55 dB	(1)
Power spectral density	/	0.57 dB	(1)
Spectrum bandwidth	/	1.1%	(1)
Radiated spurious emission (30MHz-1GHz)	30~1000MHz	4.10 dB	(1)
Radiated spurious emission (1GHz-18GHz)	1~18GHz	4.32 dB	(1)
Radiated spurious emission (18GHz-40GHz)	18-40GHz	5.54 dB	(1)
Time	/	±2%	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	CTA-308	2024/08/03	2025/08/02
LISN	R&S	ENV216	CTA-314	2024/08/03	2025/08/02
EMI Test Receiver	R&S	ESPI	CTA-307	2024/08/03	2025/08/02
EMI Test Receiver	R&S	ESCI	CTA-306	2024/08/03	2025/08/02
Spectrum Analyzer	Agilent	N9020A	CTA-301	2024/08/03	2025/08/02
Spectrum Analyzer	R&S	FSU	CTA-337	2024/08/03	2025/08/02
Vector Signal generator	Agilent	N5182A	CTA-305	2024/08/03	2025/08/02
Analog Signal Generator	R&S	SML03	CTA-304	2024/08/03	2025/08/02
Universal Radio Communication	CMW500	R&S	CTA-302	2024/08/03	2025/08/02
Temperature and humidity meter	Chigo	ZG-7020	CTA-326	2024/08/03	2025/08/02
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	CTA-310	2023/10/17	2026/10/16
Horn Antenna	Schwarzbeck	BBHA 9120D	CTA-309	2023/10/13	2026/10/12
Loop Antenna	Zhinan	ZN30900C	CTA-311	2023/10/17	2026/10/16
Broadband Horn Antenna	A-INFOMW	LB-180500H-2.4F	CTA-336	2023/09/13	2026/09/12
Amplifier	Schwarzbeck	BBV 9745	CTA-312	2024/08/03	2025/08/02

Amplifier	Taiwan chengyi	EMC051845B	CTA-313	2024/08/03	2025/08/02
Directional coupler	NARDA	4226-10	CTA-303	2024/08/03	2025/08/02
High-Pass Filter	XingBo	XBLBQ-GTA18	CTA-402	2024/08/03	2025/08/02
High-Pass Filter	XingBo	XBLBQ-GTA27	CTA-403	2024/08/03	2025/08/02
Automated filter bank	Tonscend	JS0806-F	CTA-404	2024/08/03	2025/08/02
Power Sensor	Agilent	U2021XA	CTA-405	2024/08/03	2025/08/02
Amplifier	Schwarzbeck	BBV9719	CTA-406	2024/08/03	2025/08/02
Spectrum analyzer	R&S	FSV40-N	CTA-344	2025/05/17	2026/05/16
Power Meter	R&S	NRVS	CTA-354	2024/08/03	2025/08/02

Test Equipment	Manufacturer	Model No.	Version number	Calibration Date	Calibration Due Date
EMI Test Software	Tonscend	TS@JS32-RE	5.0.0.2	N/A	N/A
EMI Test Software	Tonscend	TS@JS32-CE	5.0.0.1	N/A	N/A
RF Test Software	Tonscend	TS@JS1120-3	3.1.65	N/A	N/A
RF Test Software	Tonscend	TS@JS1120	3.1.46	N/A	N/A

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :


Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

1. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:


Power supply:	DC 5.0V From Adapter AC 120V/60Hz	Polarization	L
---------------	--------------------------------------	--------------	---

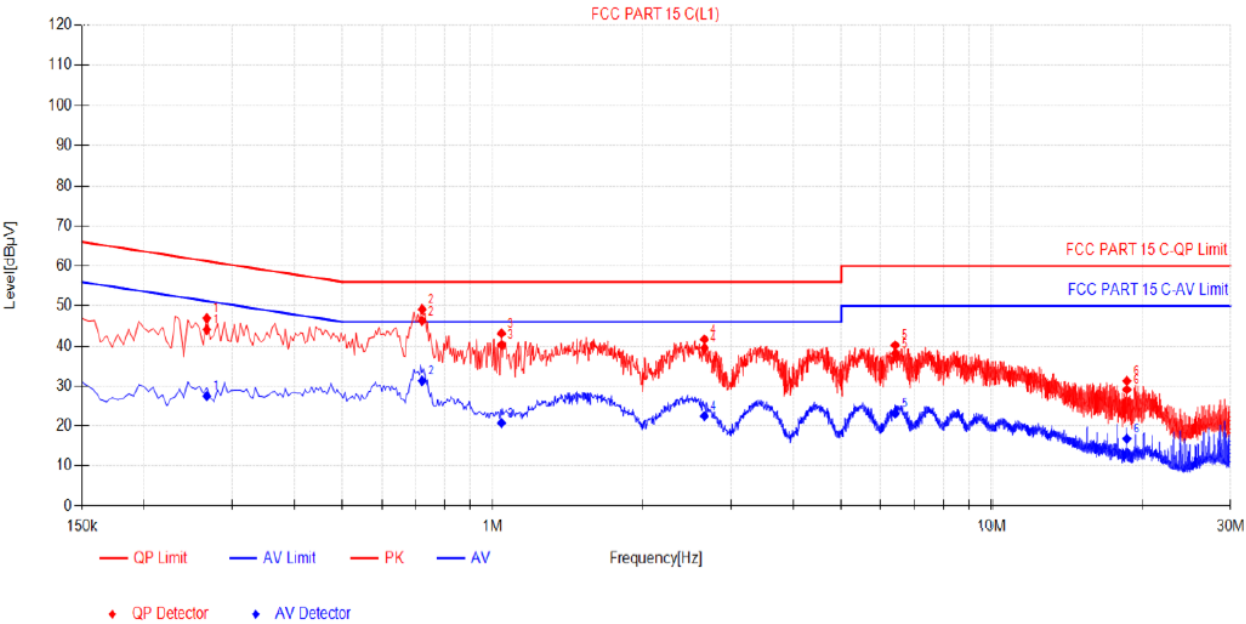

Final Data List											
NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.267	9.94	34.13	44.07	61.21	17.14	17.53	27.47	51.21	23.74	PASS
2	0.7215	9.92	36.35	46.27	56.00	9.73	21.37	31.29	46.00	14.71	PASS
3	1.041	9.91	30.34	40.25	56.00	15.75	10.79	20.70	46.00	25.30	PASS
4	2.6565	10.08	29.40	39.48	56.00	16.52	12.38	22.46	46.00	23.54	PASS
5	6.4095	10.21	27.90	38.11	60.00	21.89	12.90	23.11	50.00	26.89	PASS
6	18.5955	10.39	18.70	29.09	60.00	30.91	6.44	16.83	50.00	33.17	PASS

Note:1).QP Value (dBμV)= QP Reading (dBμV)+ Factor (dB)
2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)
3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)
4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

Power supply:	DC 5.0V From Adapter AC 120V/60Hz	Polarization	N
---------------	--------------------------------------	--------------	---

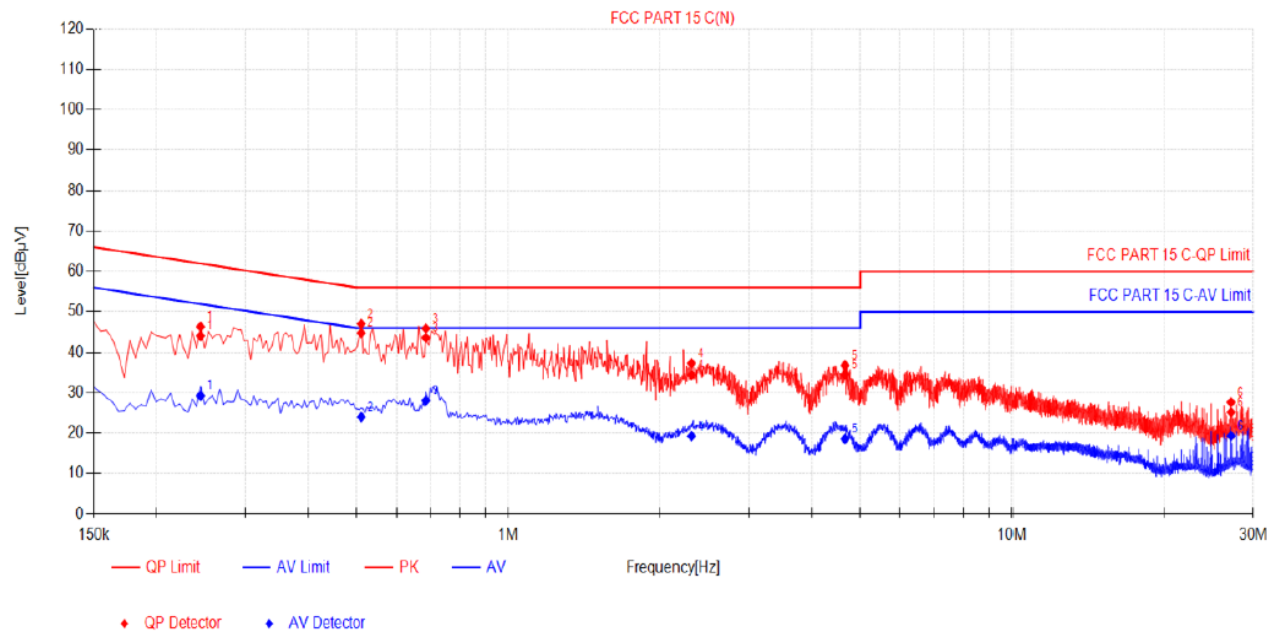

Final Data List


NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBµV]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.2445	10.01	34.03	44.04	61.94	17.90	19.22	29.23	51.94	22.71	PASS
2	0.51	10.02	34.74	44.76	56.00	11.24	13.95	23.97	46.00	22.03	PASS
3	0.6855	10.07	33.53	43.60	56.00	12.40	18.01	28.08	46.00	17.92	PASS
4	2.31	10.14	24.24	34.38	56.00	21.62	9.12	19.26	46.00	26.74	PASS
5	4.6635	10.09	24.45	34.54	56.00	21.46	8.46	18.55	46.00	27.45	PASS
6	27.1185	10.76	14.40	25.16	60.00	34.84	8.55	19.31	50.00	30.69	PASS

Note:1).QP Value (dBµV)= QP Reading (dBµV)+ Factor (dB)
2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)
3). QPMargin(dB) = QP Limit (dBµV) - QP Value (dBµV)
4). AVMargin(dB) = AV Limit (dBµV) - AV Value (dBµV)


4.2. Radiated Emission and Band Edges

TEST CONFIGURATION

Frequency range 9 KHz – 30MHz

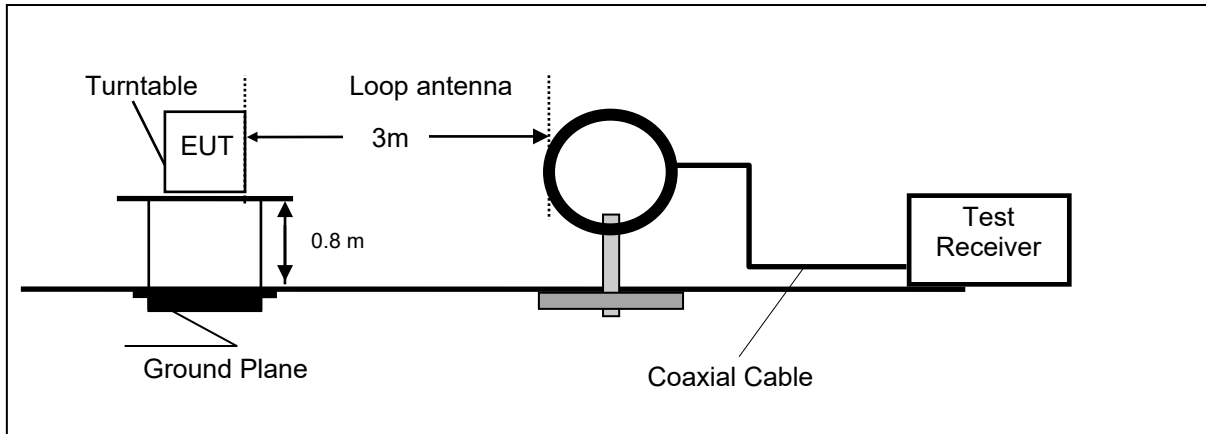


Frequency range 30MHz – 1000MHz

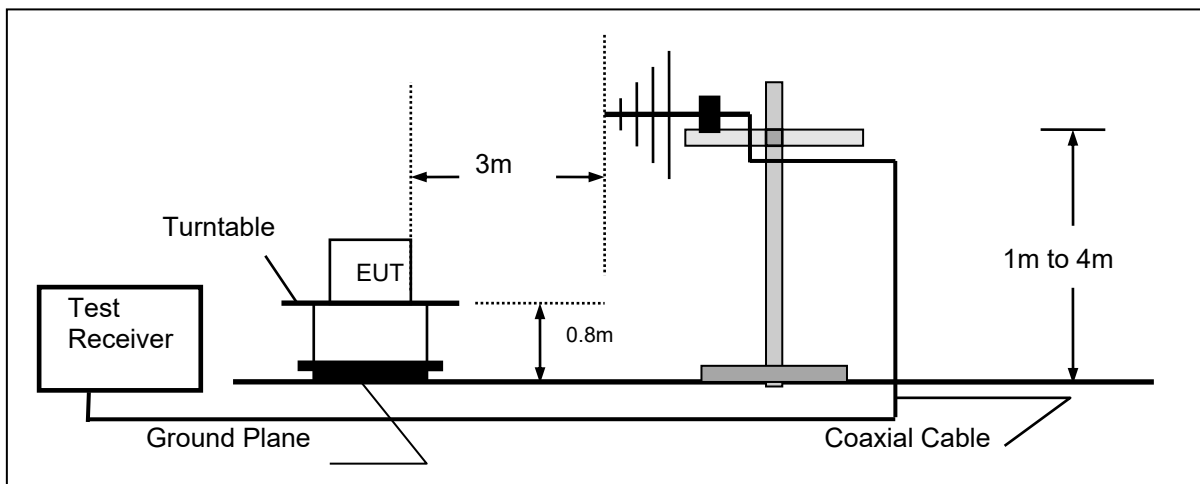

Frequency range above 1GHz-25GHz



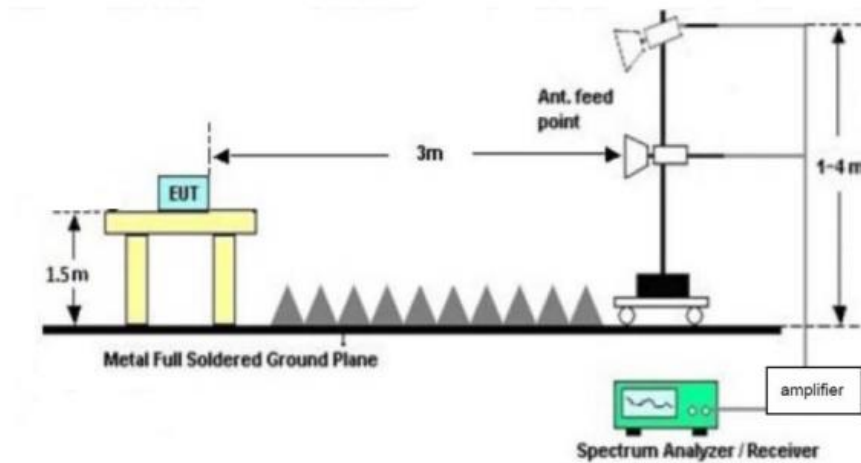

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 26MHz and maximum operation frequency was 1910MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$Transd=AF +CL-AG$$

RADIATION LIMIT

According 15.249, the field strength of emissions from intentional radiators operated within 2400MHz-2483.5 MHz shall not exceed 94dBμV/m (50mV/m):

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


TEST RESULTS

Remark:


1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Low:

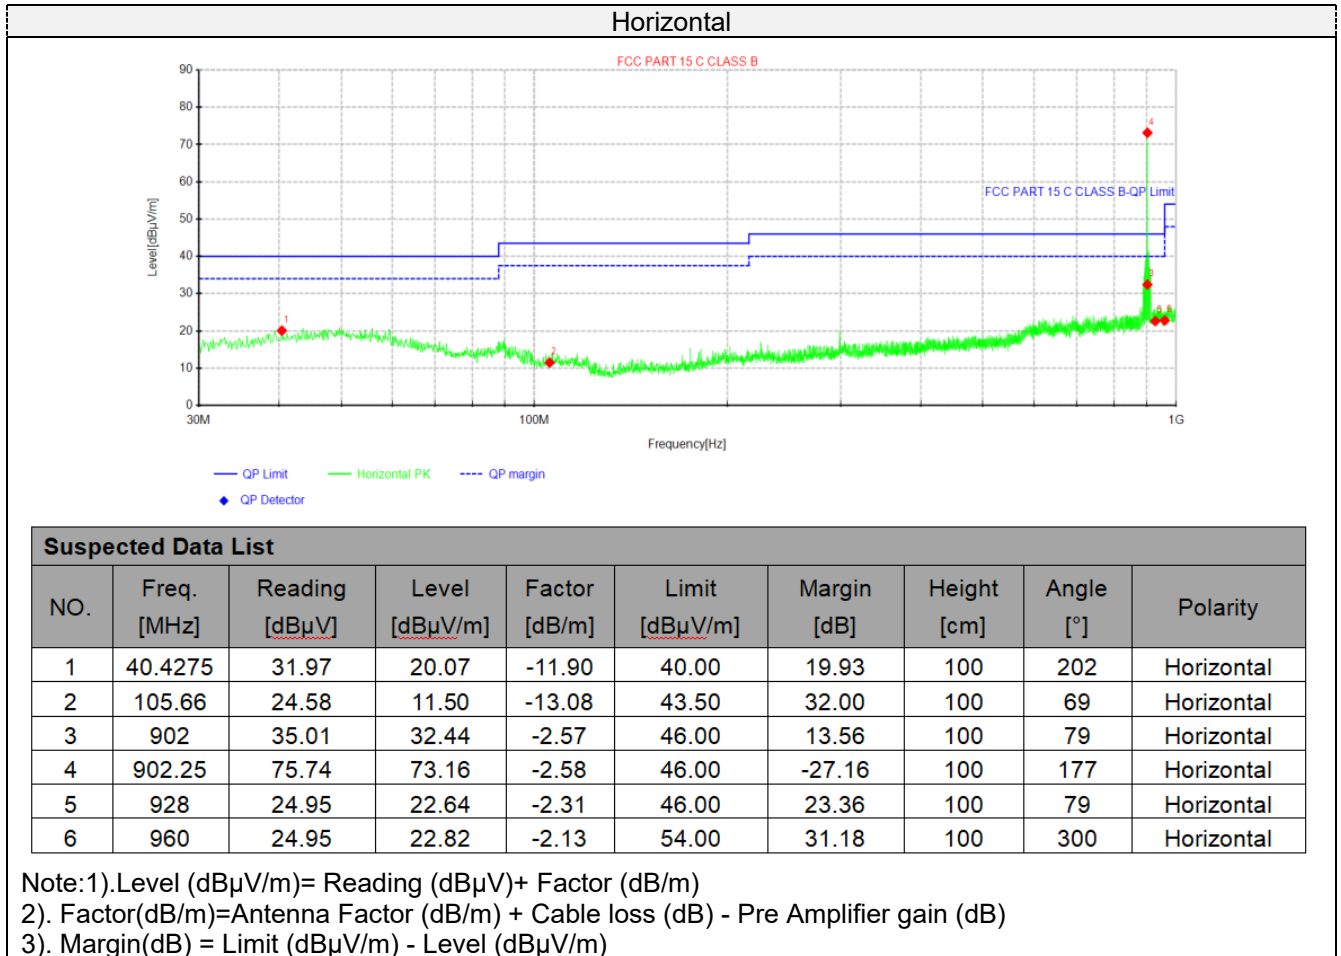

Vertical

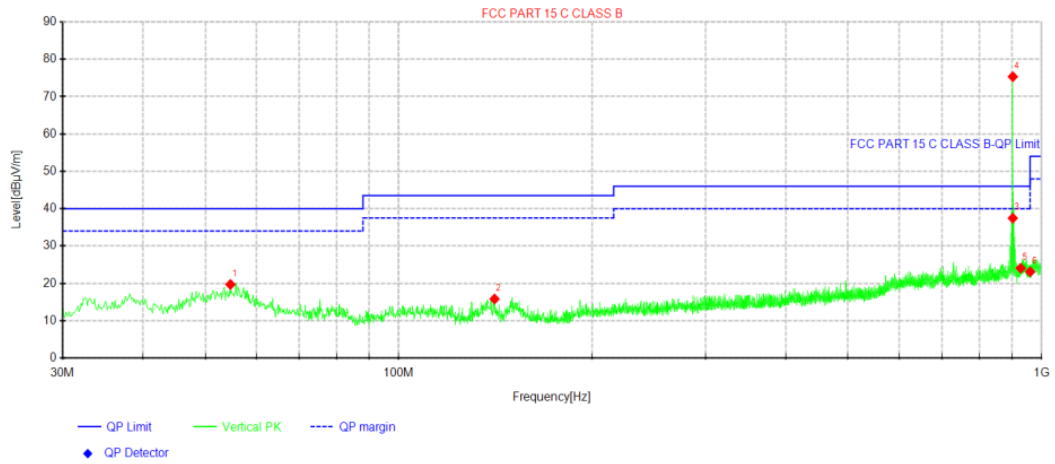

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	54.735	31.25	19.72	-11.53	40.00	20.28	100	216	Vertical
2	140.943	31.44	15.83	-15.61	43.50	27.67	100	240	Vertical
3	902	40.03	37.46	-2.57	46.00	8.54	100	0	Vertical
4	902.25	77.93	75.35	-2.58	46.00	-29.35	100	357	Vertical
5	928	26.39	24.08	-2.31	46.00	21.92	100	171	Vertical
6	960	25.24	23.11	-2.13	54.00	30.89	100	337	Vertical

Note: 1). Level (dBμV/m) = Reading (dBμV) + Factor (dB/m)


2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

Mid:

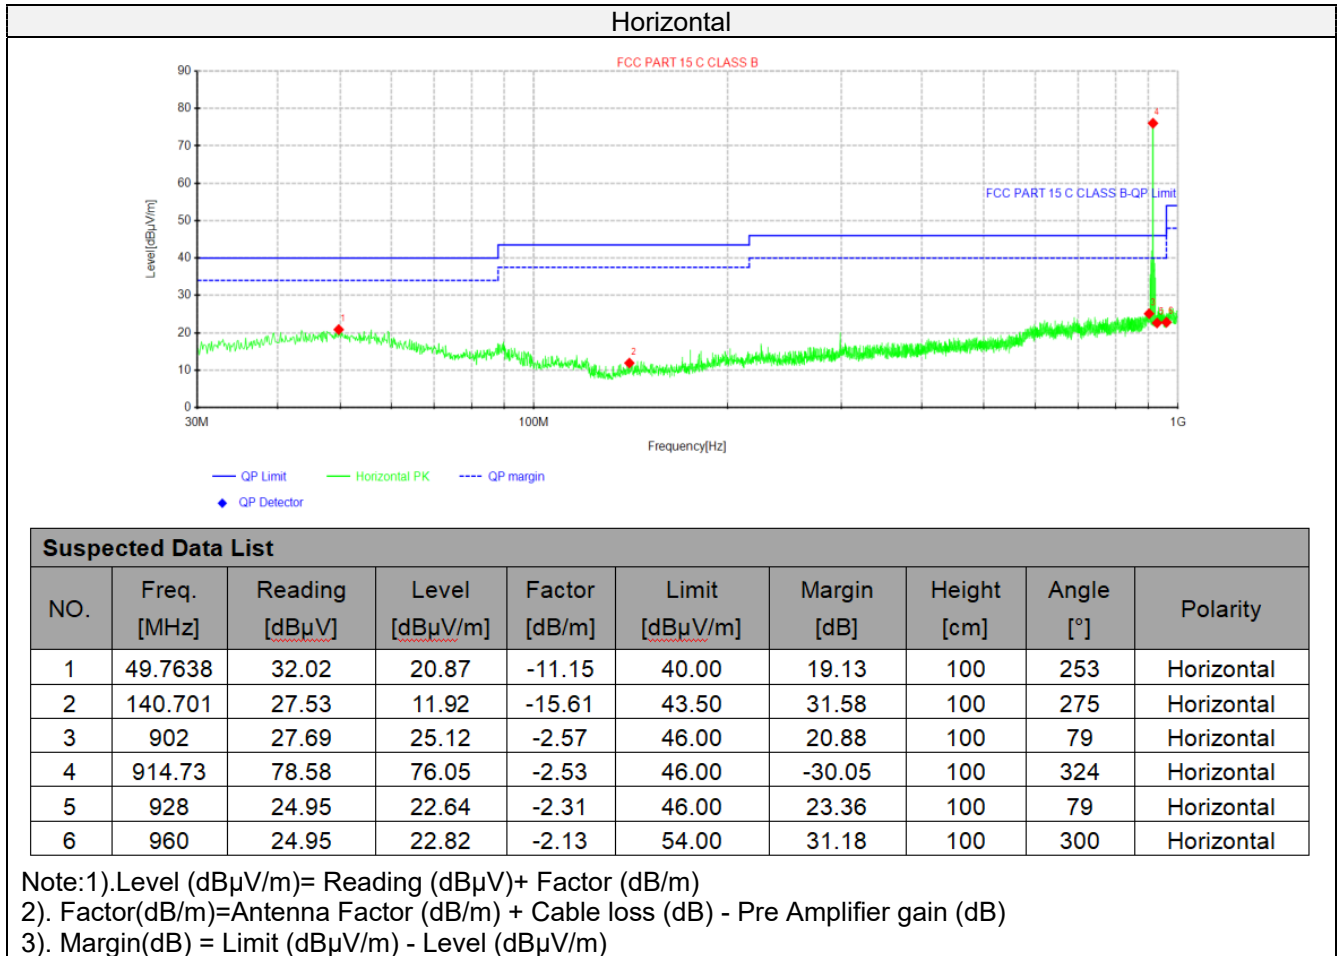

Vertical

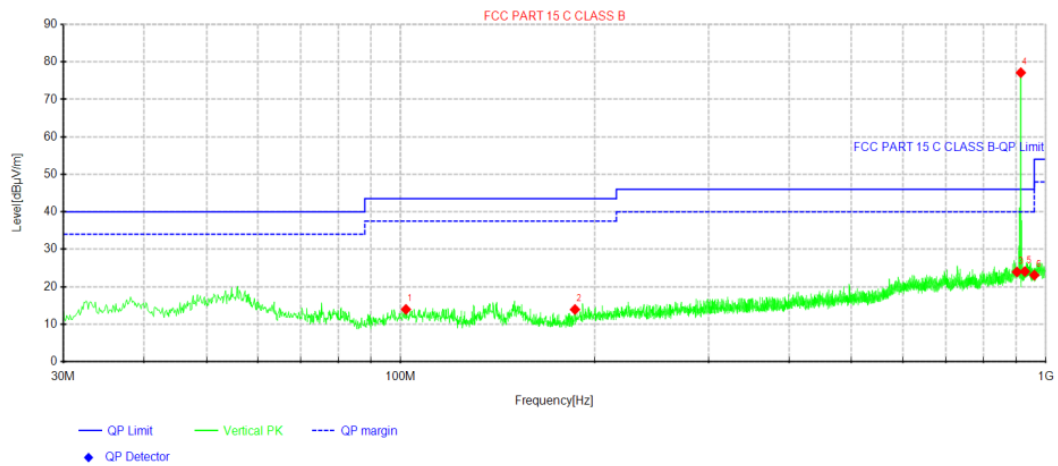

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	101.901	26.94	13.96	-12.98	43.50	29.54	100	0	Vertical
2	186.291	27.98	13.93	-14.05	43.50	29.57	100	349	Vertical
3	902	26.53	23.96	-2.57	46.00	22.04	100	0	Vertical
4	914.73	79.67	77.14	-2.53	46.00	-31.14	100	1	Vertical
5	928	26.39	24.08	-2.31	46.00	21.92	100	171	Vertical
6	960	25.24	23.11	-2.13	54.00	30.89	100	337	Vertical

Note:1).Level (dBμV/m)= Reading (dBμV)+ Factor (dB/m)


2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBμV/m) - Level (dBμV/m)

High:

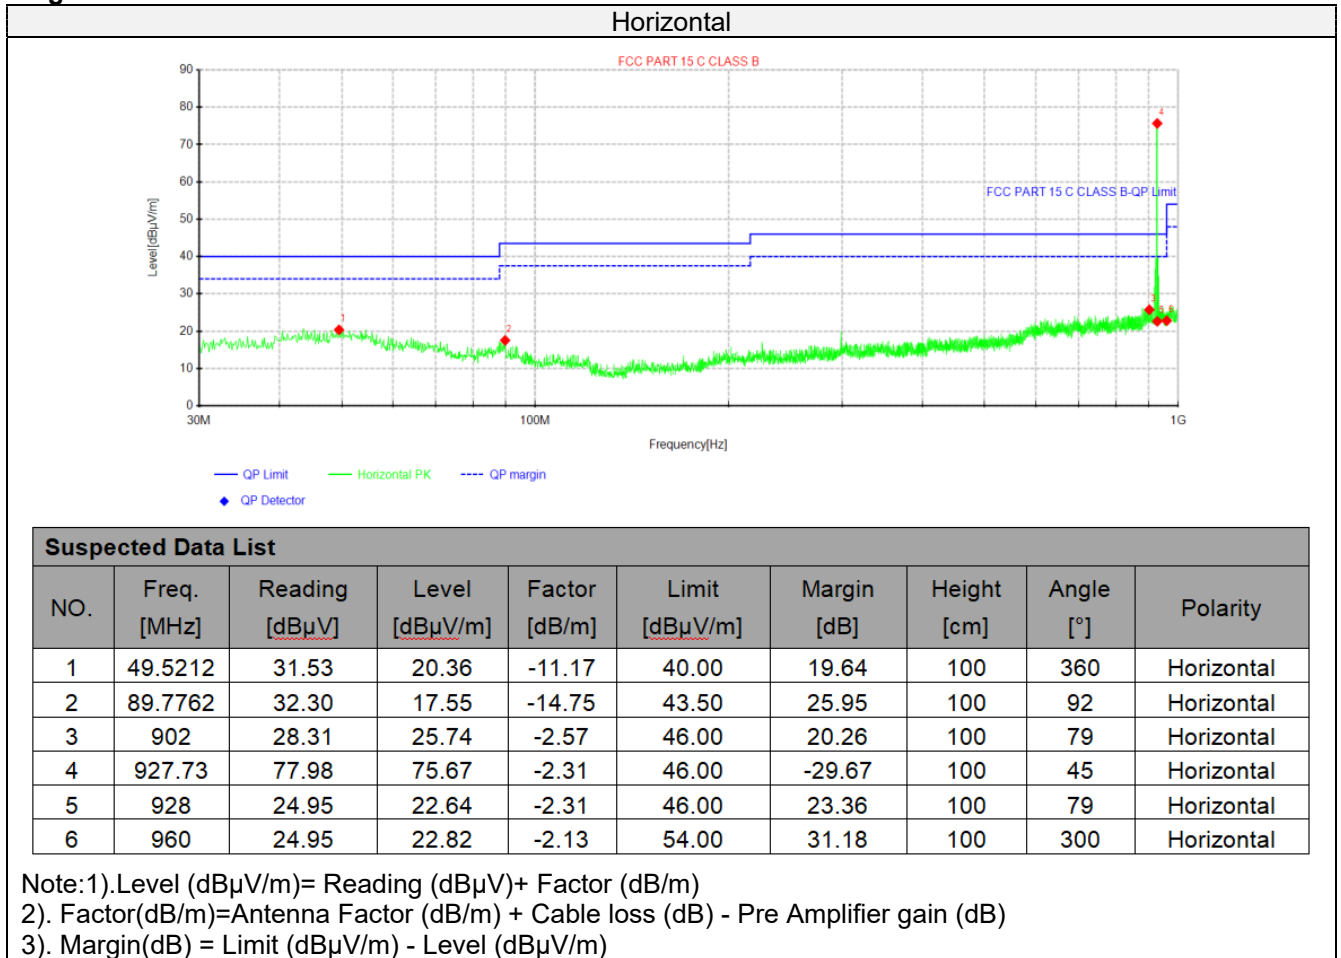

Vertical

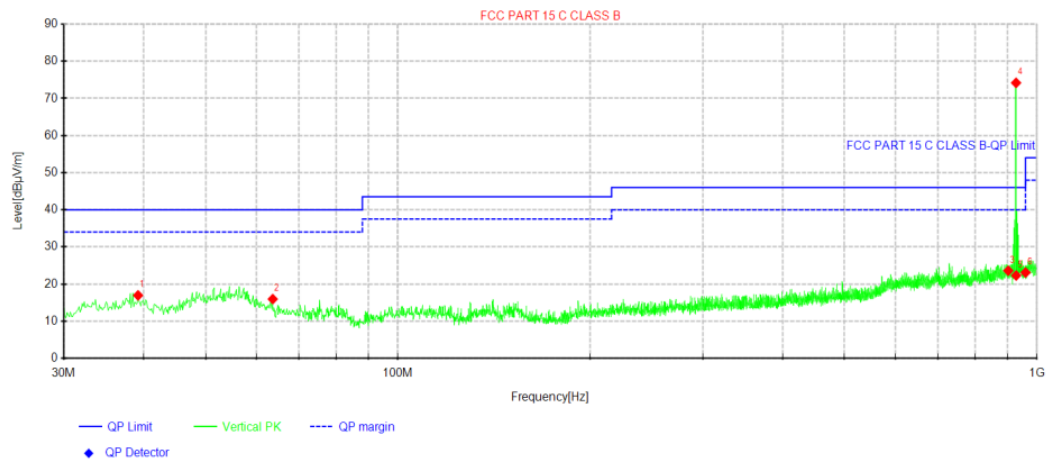

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	39.215	29.19	16.96	-12.23	40.00	23.04	100	31	Vertical
2	63.7075	29.62	15.96	-13.66	40.00	24.04	100	206	Vertical
3	902	26.17	23.60	-2.57	46.00	22.40	100	0	Vertical
4	927.73	76.50	74.19	-2.31	46.00	-28.19	100	75	Vertical
5	928	24.62	22.31	-2.31	46.00	23.69	100	171	Vertical
6	960	25.24	23.11	-2.13	54.00	30.89	100	337	Vertical

Note: 1). Level (dBμV/m) = Reading (dBμV) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

For 1GHz to 25GHz

GFSK (above 1GHz)**Low:**

Frequency(MHz):			902.25		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1804.50	59.27	PK	74.00	14.73	71.54	25.46	3.6	41.33	-12.27
1804.50	41.24	AV	54.00	12.76	53.51	25.46	3.6	41.33	-12.27
2706.75	49.88	PK	74.00	24.12	59.04	28.32	5.12	42.6	-9.16
2706.75	40.09	AV	54.00	13.91	49.25	28.32	5.12	42.6	-9.16

Frequency(MHz):			902.25		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1804.50	57.24	PK	74.00	16.76	69.51	25.46	3.6	41.33	-12.27
1804.50	39.82	AV	54.00	14.18	52.09	25.46	3.6	41.33	-12.27
2706.75	48.39	PK	74.00	25.61	57.55	28.32	5.12	42.6	-9.16
2706.75	38.34	AV	54.00	15.66	47.50	28.32	5.12	42.6	-9.16

Mid:

Frequency(MHz):			914.73		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1829.46	58.93	PK	74.00	15.07	71.21	25.45	3.6	41.33	-12.28
1829.46	42.58	AV	54.00	11.42	54.86	25.45	3.6	41.33	-12.28
2744.19	49.94	PK	74.00	24.06	59.11	28.3	5.12	42.59	-9.17
2744.19	39.89	AV	54.00	14.11	49.06	28.3	5.12	42.59	-9.17

Frequency(MHz):			914.73		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1829.46	56.46	PK	74.00	17.54	68.74	25.45	3.6	41.33	-12.28
1829.46	39.59	AV	54.00	14.41	51.87	25.45	3.6	41.33	-12.28
2744.19	48.12	PK	74.00	25.88	57.29	28.3	5.12	42.59	-9.17
2744.19	39.25	AV	54.00	14.75	48.42	28.3	5.12	42.59	-9.17


High:

Frequency(MHz):			927.73		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1855.46	58.31	PK	74.00	15.69	70.46	25.62	3.63	41.4	-12.15
1855.46	41.02	AV	54.00	12.98	53.17	25.62	3.63	41.4	-12.15
2783.19	49.93	PK	74.00	24.07	59.03	28.46	5.14	42.7	-9.1
2783.19	39.35	AV	54.00	14.65	48.45	28.46	5.14	42.7	-9.1

Frequency(MHz):			927.73		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1855.46	56.11	PK	74.00	17.89	68.26	25.62	3.63	41.4	-12.15
1855.46	40.45	AV	54.00	13.55	52.60	25.62	3.63	41.4	-12.15
2783.19	48.32	PK	74.00	25.68	57.42	28.46	5.14	42.7	-9.1
2783.19	38.81	AV	54.00	15.19	47.91	28.46	5.14	42.7	-9.1

4.3. 20dB bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 10KHz RBW and 30KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Occupied Bandwidth is defined as the average power emitted out-of-band below its lower frequency limit or above the upper frequency limit is each equal to 0.5% of the total average power of a given emission.

LIMIT


N/A

TEST RESULTS


Modulation	Channel	20dB bandwidth (kHz)	Result
FM	Low	278.8	Pass
	Mid	279.0	
	High	278.8	

Note: 1.The test results including the cable loss.


FM Modulation

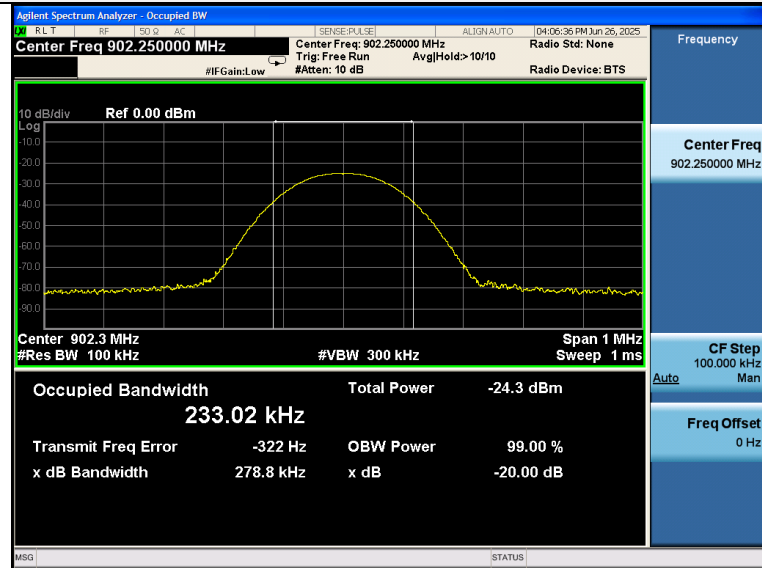

Low

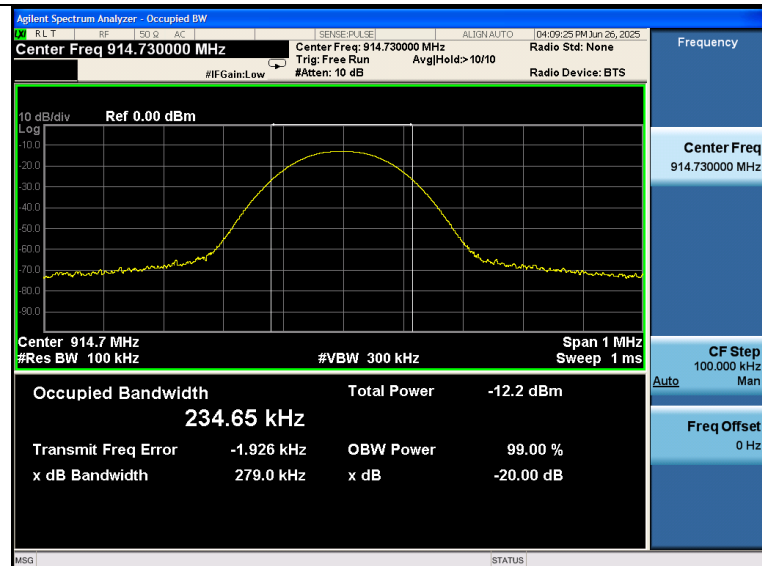

Mid

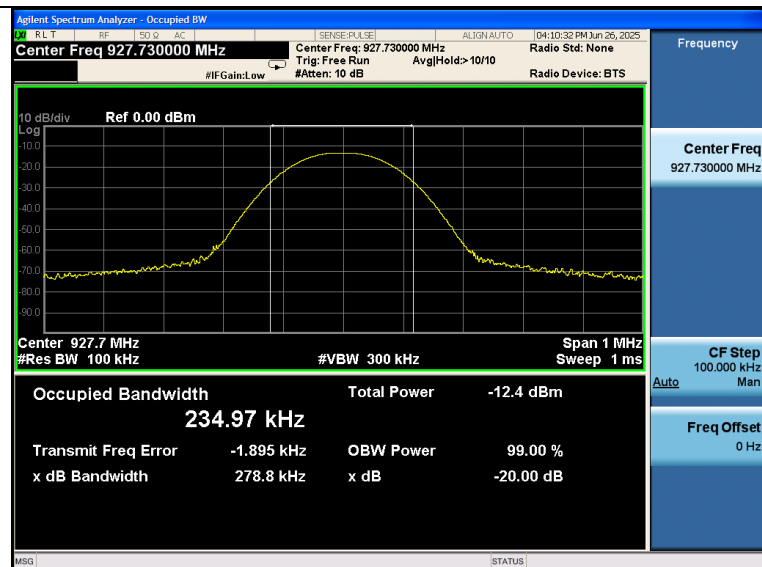

High

4.4. Antenna Requirement

Standard Applicable

According to RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Information

The directional gains of antenna used for transmitting is 0.00dBi, and the antenna is connect to PCB board and no consideration of replacement. Please see EUT photo for details.

5. Test Setup Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

6. Photos of the EUT

Please refer to separated files for External Photos & Internal Photos of the EUT.

.....**End of Report**.....