

# **SAR Test Report**

Report No.: AGC16919250401FH01

FCC ID : 2BN8ZN888

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: 4G Global Walkie-Talkie

**BRAND NAME** : UQHUQH

MODEL NAME N888, N111, N222, N333, N555, N666, N777, N999, N6800, N6886,

N8998

**APPLICANT**: Guangzhou Lingtong Electronic Technology Co., Ltd.

**DATE OF ISSUE** : May 07, 2025

IEEE Std. 1528:2013

**STANDARD(S)** : FCC 47 CFR Part 2§2.1093

IEEE Std C95.1 ™-2019

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.



Page 2 of 124

## Report Revise Record

| Report Version | Revise Time | Issued Date  | Valid Version | Notes           |
|----------------|-------------|--------------|---------------|-----------------|
| V1.0           | 1           | May 07, 2025 | Valid         | Initial Release |




Page 3 of 124

| Test Report                  |  |  |  |  |  |
|------------------------------|--|--|--|--|--|
| Applicant Name               | Guangzhou Lingtong Electronic Technology Co., Ltd.                             |  |  |  |  |
| Applicant Address            | Room 1401-01-A106, No. 623 Yueken Road, Tianhe District, Guangzhou City, China |  |  |  |  |
| Manufacturer Name            | Guangzhou Lingtong Electronic Technology Co., Ltd.                             |  |  |  |  |
| Manufacturer Address         | Room 1401-01-A106, No. 623 Yueken Road, Tianhe District, Guangzhou City, China |  |  |  |  |
| Factory Name                 | Guangzhou Lingtong Electronic Technology Co., Ltd.                             |  |  |  |  |
| Factory Address              | Room 1401-01-A106, No. 623 Yueken Road, Tianhe District, Guangzhou City, China |  |  |  |  |
| Product Designation          | 4G Global Walkie-Talkie  |  |  |  |  |
| Brand Name                   | UQHUQH   |  |  |  |  |
| Model Name                   | N888   |  |  |  |  |
| Series Model Names           | N111, N222, N333, N555, N666, N777, N999, N6800, N6886, N8998                  |  |  |  |  |
| Different Description        | All the same except the model name is different                                |  |  |  |  |
| EUT Voltage                  | DC 3.7V  |  |  |  |  |
| Applicable Standard          | IEEE Std. 1528:2013<br>FCC 47 CFR Part 2§2.1093<br>IEEE Std C95.1 ™-2019       |  |  |  |  |
| Date of receipt of test item | Apr. 02, 2025  |  |  |  |  |
| Test Date                    | Apr. 13, 2025 to Apr. 19, 2025   |  |  |  |  |
| Report Template              | AGCRT-US-4G/SAR (2021-04-20)   |  |  |  |  |

Note: The results of testing in this report apply to the product/system which was tested only.

| Prepared By | Pro Mary                       | r            |
|-------------|--------------------------------|--------------|
|             | Bibo Zhang (Project Engineer)  | May 07, 2025 |
|             | Jank 6                         | ù            |
| Reviewed By | Jack Gui (Reviewer)            | May 07, 2025 |
|             | Angole                         | ا            |
| Approved By | Angela Li (Authorized Officer) | May 07, 2025 |

to be share





## **TABLE OF CONTENTS**

| 1. SUMMARY OF MAXIMUM SAR VALUE   | 5   |
|---|-----|
| 2. GENERAL INFORMATION  | 6   |
| 2.1. EUT DESCRIPTION  | 6   |
| 3. SAR MEASUREMENT SYSTEM   | 7   |
| 3.1. THE SATIMO SYSTEM USED FOR PERFORMING COMPLIANCE TESTS CONSISTS OF FOLLOWING ITEMS | 8   |
| 3.3. ROBOT  | 9   |
| 4. SAR MEASUREMENT PROCEDURE  | 11  |
| 4.1. SPECIFIC ABSORPTION RATE (SAR)   | 12  |
| 5. TISSUE SIMULATING LIQUID   | 15  |
| 5.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID                                    | 16  |
| 6. SAR SYSTEM CHECK PROCEDURE   | 19  |
| 6.1. SAR SYSTEM CHECK PROCEDURES  |     |
| 7. EUT TEST POSITION  | 22  |
| 7.1. Body Worn Position   | 22  |
| 8. SAR EXPOSURE LIMITS  | 23  |
| 9. TEST FACILITY  |     |
| 10. TEST EQUIPMENT LIST   |     |
| 11. MEASUREMENT UNCERTAINTY   | 26  |
| 12. CONDUCTED POWER MEASUREMENT   | 29  |
| 13. TEST RESULTS  |     |
| 13.1. SAR Test Results Summary  |     |
| APPENDIX A. SAR SYSTEM CHECK DATA   |     |
| APPENDIX B. SAR MEASUREMENT DATA  |     |
| APPENDIX C. TEST SETUP PHOTOGRAPHS  |     |
| APPENDIX D. CALIBRATION DATA  | 123 |



Page 5 of 124

## 1. SUMMARY OF MAXIMUM SAR VALUE

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

|                         | Highest Report      |                    |                       |
|-------------------------|---------------------|--------------------|-----------------------|
| Frequency Band          | Back Touch with all | Face Up (with 25mm | SAR Test Limit (W/kg) |
|                         | accessories         | separation)        |                       |
| LTE Band 2              | 0.413               | 0.446              |                       |
| LTE Band 4              | 0.315               | 0.190              |                       |
| LTE Band 5              | 0.278               | 0.147              |                       |
| LTE Band 7              | 0.237               | 0.629              |                       |
| LTE Band 12             | 0.111               | 0.082              |                       |
| LTE Band 13             | 0.246               | 0.168              | 1.6                   |
| LTE Band 17             | 0.253               | 0.157              | 1.0                   |
| LTE Band 38             | 0.114               | 0.213              |                       |
| LTE Band 40-Lower Side  | 0.085               | 0.123              |                       |
| LTE Band 40- Upper Side | 0.087               | 0.126              |                       |
| LTE Band 41             | 0.111               | 0.203              |                       |
| LTE Band 66             | 0.390               | 0.232              |                       |
| SAR Test Result         |                     | PASS               |                       |

This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/kg) specified in IEEE Std. 1528:2013; FCC 47CFR § 2.1093; IEEE/ANSI C95.1:2019 and the following specific FCC Test Procedures:

- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 648474 D04 Handset SAR v01r03
- KDB 865664 D01 SAR Measurement 100MHz to 6GHz v01r04
- KDB 941225 D05 SAR for LTE Devices v02r05



Page 6 of 124

## 2. GENERAL INFORMATION

2.1. EUT Description

| Z. I. LO I Description                  |   |
|---|---|
| General Information                     |   |
| Product Designation                     | 4G Global Walkie-Talkie   |
| Test Model                              | N888  |
| Sample ID                               | 250401182   |
| Hardware Version                        | V1.0  |
| Software Version                        | V1.0  |
| Device Category                         | Portable  |
| RF Exposure Environment                 | Uncontrolled  |
| Antenna Type                            | Internal  |
| LTE                                     |   |
|   | ☑ FDD Band 2 ☑ FDD Band 4 ☑ FDD Band 5 ☑ FDD Band 7                                   |
| Support Band                            | oxtimes FDD Band 12 $oxtimes$ FDD Band 13 $oxtimes$ FDD Band 17 $oxtimes$ FDD Band 25 |
| опрот вана                              | ☐ FDD Band 26 ☒ TDD Band 38 ☒ TDD Band 40 ☒ TDD Band 41                               |
|   | ⊠ FDD Band 66 □ FDD Band 71 (U.S. Bands)  |
|   | Band 2:1850-1910MHz; Band 4:1710-1755MHz;Band 5:824-849MHz;                           |
| TX Frequency Range                      | Band 7:2500-2570MHz; Band 12:699-716MHz; Band 13: 777-787MHz;                         |
|   | Band 17: 704-716MHz; Band 38: 2570-2620 MHz; Band                                     |
|   | 40:2305-2320&2345-2360MHz; Band 41:2496-2690MHz; Band 66:1700-1780MHz;                |
|   | Band 2:1930-1990MHz; Band 4:2110-2155MHz; Band 5:869-894MHz;                          |
| RX Frequency Range                      | Band 7:2620-2690MHz; Band 12: 729-746 MHz; Band 13: 746-756MHz;                       |
| . , ,                                   | Band 17: 734-746 MHz; Band 38: 2570-2620 MHz; Band                                    |
| To a found late.                        | 40:2305-2320&2345-2360MHz; Band 41:2496-2690MHz; Band 66:2110-2200MHz;                |
| Type of modulation                      | QPSK, 16QAM   |
|   | Band 2:1.33dBi, Band 4:1.51dBi, Band 5:1.22dBi, Band 7:0.78dBi                        |
| Antenna Gain                            | Band 12:1.20dBi, Band 13:1.20dBi, Band 17:1.20dBi, Band 38:0.94dBi                    |
|   | Band 40:1.27dBi, Band 41:1.03dBi, Band 66:1.01dBi;                                    |
|   | Band 2: 22.62dBm; Band 4: 22.47dBm; Band 5: 21.64dBm; Band 7:22.35dBm;                |
| Max. Average Power                      | Band 12: 22.34dBm; Band 13: 22.01dBm; Band 17: 22.09dBm; Band 38:                     |
| G                                       | 21.64dBm; LTE-Band 40(Lower Side): 23.45dBm; LTE-Band 40 (Upper Side):                |
| • | 22.81dBm; Band 41: 21.89dBm; Band 66: 22.45dBm;                                       |
| Accessories                             |   |
| Datte                                   | Brand name: N/A   |
| Battery                                 | Model No.: N888   |
|   | Voltage and Capacitance: 3.7 V & 3000mAh  |
| Earphone                                | Brand name: N/A   |
| •                                       | Model No.: N/A  |

Note:1.CMU200 can measure the average power and Peak power at the same time

2. The sample used for testing is end product.

3. The test sample has no any deviation to the test method of standard mentioned in page 1.


| Product | Туре |                       |  |  |  |
|---------|------|-----------------------|--|--|--|
| Product |      | ☐ Identical Prototype |  |  |  |






## 3. SAR MEASUREMENT SYSTEM

## 3.1. The SATIMO system used for performing compliance tests consists of following items

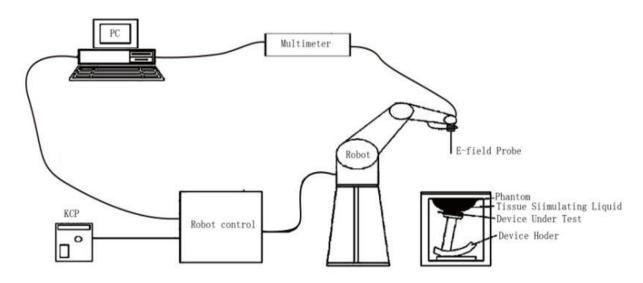

The COMOSAR system for performing compliance tests consists of the following items:

- The PC. It controls most of the bench devices and stores measurement data. A computer running WinXP and the Opensar software.
- The E-Field probe. The probe is a 3-axis system made of 3 distinct dipoles. Each dipole returns a voltage in function of the ambient electric field.
- The Keithley multimeter measures each probe dipole voltages.
- The SAM phantom simulates a human head. The measurement of the electric field is made inside the phantom.
- The liquids simulate the dielectric properties of the human head tissues.
- The network emulator controls the mobile phone under test.
- The validation dipoles are used to measure a reference SAR. They are used to periodically check the bench to make sure that there is no drift of the system characteristics over time.
- •The phantom, the device holder and other accessories according to the targeted measurement.





## 3.2. COMOSAR E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SATIMO. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SATIMO conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528 and relevant KDB files.) The calibration data are in Appendix D.

Isotropic E-Field Probe Specification

| 100ti opio E i ioia i | Probe Specification   |                     |
|-----------------------|---|---------------------|
| Model                 | SSE2  |                     |
| Manufacture           | MVG   |                     |
| Identification No.    | 2023-EPGO-414   |                     |
| Frequency             | 0.15GHz-7.5GHz<br>Linearity:±0.08dB(0.15GHz-7.5GHz)   |                     |
| Dynamic Range         | 0.01W/kg-100W/kg<br>Linearity:±0.08dB   |                     |
| Dimensions            | Overall length:330mm Length of individual dipoles:2mm Maximum external diameter:8mm Probe Tip external diameter:2.5mm Distance between dipoles/ probe extremity:1mm |                     |
| Application           | High precision dosimetric measureme (e.g., very strong gradient fields). Only compliance testing for frequencies up 30%.  | probe which enables |

## 3.3. Robot

The COMOSAR system uses the KUKA robot from SATIMO SA (France). For the 6-axis controller COMOSAR system, the KUKA robot controller version from SATIMO is used.

The XL robot series have many features that are important for our application:

High precision (repeatability 0.02 mm)

High reliability (industrial design)

Jerk-free straight movements

Low ELF interference (the closed metallic

construction shields against motor control fields)

6-axis controller



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






## 3.4. Video Positioning System

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.





## 3.5. Device Holder

The COMOSAR device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles. The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity

 $\epsilon r$  =3 and loss tangent  $\delta$  = 0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.







## 3.6. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

Left head Right head Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.



Page 11 of 124

## 4. SAR MEASUREMENT PROCEDURE

## 4.1. Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and occupational/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element(dv) of given mass density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR can be obtained using either of the following equations:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c_h \frac{dT}{dt}\Big|_{t=0}$$

Where

SAR is the specific absorption rate in watts per kilogram;
E is the r.m.s. value of the electric field strength in the tissue in volts per meter;
σ is the conductivity of the tissue in siemens per metre;
ρ is the density of the tissue in kilograms per cubic metre;

c<sub>h</sub> is the heat capacity of the tissue in joules per kilogram and Kelvin;

 $\frac{dT}{dt}$  | t=0 is the initial time derivative of temperature in the tissue in kelvins per second



Page 12 of 124

## 4.2. SAR Measurement Procedure

## Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface is 2.7mm This distance cannot be smaller than the distance os sensor calibration points to probe tip as `defined in the probe properties,

## Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in SATIMO software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in db) is specified in the standards for compliance testing. For example, a 2db range is required in IEEE Standard 1528 standards, whereby 3db is a requirement when compliance is assessed in accordance with the ARIB standard (Japan) If one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximum are detected, the number of Zoom Scan has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100MHz to 6GHz

|  | ≤ 3 GHz  | > 3 GHz   |
|--|--|---|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 ± 1 mm   | ½·δ·ln(2) ± 0.5 mm  |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | 30° ± 1°   | 20° ± 1°  |
|  | ≤ 2 GHz: ≤ 15 mm<br>2 – 3 GHz: ≤ 12 mm   | 3 – 4 GHz: ≤ 12 mm<br>4 – 6 GHz: ≤ 10 mm  |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                            | When the x or y dimension of measurement plane orientation the measurement resolution is x or y dimension of the test of measurement point on the test | on, is smaller than the above,<br>must be ≤ the corresponding<br>levice with at least one |

## Step 3: Zoom Scan

Zoom Scan are used to assess the peak spatial SAR value within a cubic average volume containing 1g abd 10g of simulated tissue. The Zoom Scan measures points(refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1g and 10g and displays these values next to the job's label.



Page 13 of 124

## Zoom Scan Parameters extracted from KDB865664 d01 SAR Measurement 100MHz to 6GHz

| Maximum zoom scan spatial resolution: Δx <sub>Zoom</sub> , Δy <sub>Zoom</sub> |  |  | $\leq$ 2 GHz: $\leq$ 8 mm<br>2 - 3 GHz: $\leq$ 5 mm* | 3 – 4 GHz: ≤ 5 mm*<br>4 – 6 GHz: ≤ 4 mm*                       |
|---|--|--|--|--|
| Maximum zoom scan<br>spatial resolution,<br>normal to phantom<br>surface      | uniform grid: Δz <sub>Zoom</sub> (n)   |  | ≤ 5 mm   | 3 – 4 GHz: ≤ 4 mm<br>4 – 5 GHz: ≤ 3 mm<br>5 – 6 GHz: ≤ 2 mm    |
|   | $\begin{array}{c} \Delta z_{Z00m}(1)\text{: between} \\ 1^{st} \text{ two points closest} \\ \text{to phantom surface} \\ \\ \Delta z_{Z00m}(n>1)\text{:} \\ \text{between subsequent} \\ \text{points} \end{array}$ |  | ≤ 4 mm   | 3 – 4 GHz: ≤ 3 mm<br>4 – 5 GHz: ≤ 2.5 mm<br>5 – 6 GHz: ≤ 2 mm  |
|   |  |  | $\leq 1.5 \cdot \Delta z_{Zoom}(n\text{-}1)$         |  |
| Minimum zoom scan<br>volume   | x, y, z  |  | ≥ 30 mm  | 3 – 4 GHz: ≥ 28 mm<br>4 – 5 GHz: ≥ 25 mm<br>5 – 6 GHz: ≥ 22 mm |

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

## Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the same settings. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

<sup>\*</sup> When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.



Page 14 of 124

## 4.3. RF Exposure Conditions

Test Configuration and setting:

The EUT is a 4G Global Walkie-Talkie. It supports LTE technology.

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator were established by air link. The distance between the EUT and the antenna is larger than 50cm, and the output power radiated from the emulator antenna is at least 30db smaller than the output power of EUT.

Antenna Location: (the back view)

# 98mm Section 116mm WWAN Antenna EUT Left Edge 116mm

**EUT Bottom Edge** 

**EUT Right Edge** 



Page 15 of 124

## 5. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in 5.2

5.1. The composition of the tissue simulating liquid

| Ingredient (% Weight) Frequency (MHz) | Water  | Nacl  | Polysorbate 20 | DGBE   | 1,2<br>Propanediol | Triton<br>X-100 |
|---------------------------------------|--------|-------|----------------|--------|--------------------|-----------------|
| 750 Head                              | 35     | 2     | 0.0            | 0.0    | 63                 | 0.0             |
| 835 Head                              | 50.36  | 1.25  | 48.39          | 0.0    | 0.0                | 0.0             |
| 1750 Head                             | 52.64  | 0.36  | 0.0            | 47     | 0.0                | 0.0             |
| 1900 Head                             | 54.9   | 0.18  | 0.0            | 44.92  | 0.0                | 0.0             |
| 2300 Head                             | 62.82  | 0.51  | 0.0            | 36.67  | 0.0                | 0.0             |
| 2600 Head                             | 55.242 | 0.306 | 0              | 44.452 | 0                  | 0               |



Page 16 of 124

## 5.2. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in IEEE 1528.

| Target Frequency | he   | ad      | body |         |
|------------------|------|---------|------|---------|
| (MHz)            | εr   | σ (S/m) | εr   | σ (S/m) |
| 300              | 45.3 | 0.87    | 45.3 | 0.87    |
| 450              | 43.5 | 0.87    | 43.5 | 0.87    |
| 750              | 41.9 | 0.89    | 41.9 | 0.89    |
| 835              | 41.5 | 0.90    | 41.5 | 0.90    |
| 900              | 41.5 | 0.97    | 41.5 | 0.97    |
| 915              | 41.5 | 1.01    | 41.5 | 1.01    |
| 1450             | 40.5 | 1.20    | 40.5 | 1.20    |
| 1610             | 40.3 | 1.29    | 40.3 | 1.29    |
| 1750             | 40.1 | 1.37    | 40.1 | 1.37    |
| 1800 – 2000      | 40.0 | 1.40    | 40.0 | 1.40    |
| 2300             | 39.5 | 1.67    | 39.5 | 1.67    |
| 2450             | 39.2 | 1.80    | 39.2 | 1.80    |
| 2600             | 39.0 | 1.96    | 39.0 | 1.96    |
| 3000             | 38.5 | 2.40    | 38.5 | 2.40    |

( $\epsilon r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho$  = 1000 kg/m<sup>3</sup>



Page 17 of 124

## 5.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using SATIMO Dielectric Probe Kit and R&S Network Analyzer ZVL6.

| DICICCUIC | TODE INLANA                             | TRACTICIWOTH / Haryzer ZVLo. |                            |              |                  |  |  |  |  |
|-----------|---|------------------------------|----------------------------|--------------|------------------|--|--|--|--|
|           | Tissue Stimulant Measurement for 750MHz |                              |                            |              |                  |  |  |  |  |
|           | Fr.                                     | Dielectric Par               | ameters (±5%)              | Tissue       |                  |  |  |  |  |
|           | (MHz)                                   | εr 41.9 (39.805-43.995)      | δ[s/m] 0.89(0.8455-0.9345) | Temp<br>[°C] | Test time        |  |  |  |  |
| Head      | 707.5                                   | 43.06                        | 0.88                       |              | Apr. 13,         |  |  |  |  |
| 11000     | 710                                     | 43.06<br>42.66               | 0.89                       | 20.9         |                  |  |  |  |  |
|           | 750                                     | 42.14                        | 0.91                       | 20.9         | Apr. 13,<br>2025 |  |  |  |  |
|           | 782                                     | 41.30                        | 0.92                       |              |                  |  |  |  |  |

| Tissue Stimulant Measurement for 835MHz |       |                         |                          |              |           |  |  |  |
|---|-------|-------------------------|--------------------------|--------------|-----------|--|--|--|
|   | Fr.   | Dielectric Par          | Tissue                   |              |           |  |  |  |
| Head                                    | (MHz) | εr 41.5 (39.425-43.575) | δ[s/m] 0.90(0.855-0.945) | Temp<br>[°C] | Test time |  |  |  |
|   | 835   | 40.52                   | 0.89                     | 20.8         | Apr. 14,  |  |  |  |
|   | 836.5 | 39.86                   | 0.91                     | 20.0         | 2025      |  |  |  |

|      | Tissue Stimulant Measurement for 1750MHz |                         |                          |              |                  |  |  |  |  |
|------|--|-------------------------|--------------------------|--------------|------------------|--|--|--|--|
|      | Fr.                                      | Dielectric Par          | Tissue                   |              |                  |  |  |  |  |
|      | (MHz)                                    | εr 40.1 (38.095-42.105) | δ[s/m]1.37(1.3015-1.439) | Temp<br>[°C] | Test time        |  |  |  |  |
| Head | 1732.5                                   | 40.83                   | 1.32                     |              | A                |  |  |  |  |
|      | 1750                                     | 39.32                   | 1.34                     | 21.1         | Apr. 19,<br>2025 |  |  |  |  |
|      | 1755                                     | 38.92                   | 1.35                     |              | 2020             |  |  |  |  |

|      | Tissue Stimulant Measurement for 1900MHz |                      |                       |              |           |  |  |  |
|------|--|----------------------|-----------------------|--------------|-----------|--|--|--|
| Head | Fr.                                      | Dielectric Par       | Tissue                |              |           |  |  |  |
|      | (MHz)                                    | εr40.00(38.00-42.00) | δ[s/m]1.40(1.33-1.47) | Temp<br>[ºC] | Test time |  |  |  |
|      | 1880                                     | 41.68                | 1.35                  | 20.7         | Apr. 18,  |  |  |  |
|      | 1900                                     | 41.28                | 1.37                  | 20.7         | 2025      |  |  |  |



Page 18 of 124

|       | Tissue Stimulant Measurement for 2300MHz |                            |                               |              |                  |  |  |  |  |
|-------|--|----------------------------|-------------------------------|--------------|------------------|--|--|--|--|
|       | Fr.                                      | Dielectric Par             | ameters (±5%)                 | Tissue       |                  |  |  |  |  |
| Lload | (MHz)                                    | εr 39.5<br>(37.525-41.475) | δ[s/m]1.67<br>(1.5865-1.7535) | Temp<br>[°C] | Test time        |  |  |  |  |
| Head  | 2300                                     | 38.92                      | 1.66                          |              | A = = 40         |  |  |  |  |
|       | 2310                                     | 38.42                      | 1.68                          | 20.5         | Apr. 16,<br>2025 |  |  |  |  |
|       | 2355                                     | 38.04                      | 1.71                          |              | 2025             |  |  |  |  |

|      | Tissue Stimulant Measurement for 2600MHz |                   |                       |              |                  |  |  |  |
|------|--|-------------------|-----------------------|--------------|------------------|--|--|--|
|      | Fr.                                      | Dielectric Par    | Tissue                | <b>-</b>     |                  |  |  |  |
|      | (MHz)                                    | εr39(37.05-40.95) | δ[s/m]1.96(1.86-2.06) | Temp<br>[°C] | Test time        |  |  |  |
| Head | 2535                                     | 40.13             | 1.86                  |              |                  |  |  |  |
|      | 2593                                     | 39.81             | 1.88                  | 20.9         | Apr. 15,         |  |  |  |
|      | 2595                                     | 39.27             | 1.91                  | 20.9         | Apr. 15,<br>2025 |  |  |  |
|      | 2600                                     | 38.74             | 1.93                  |              |                  |  |  |  |



Page 19 of 124


## SAR SYSTEM CHECK PROCEDURE

## 6.1. SAR System Check Procedures

SAR system check is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

Each SATIMO system is equipped with one or more system check kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system check setup is shown as below.

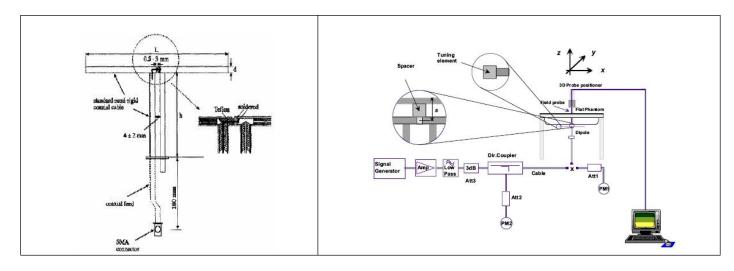




Page 20 of 124

## 6.2. SAR System Check

## 6.2.1. Dipoles



The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of IEEE. the table below provides details for the mechanical and electrical Specifications for the dipoles.

| Frequency | L (mm) | h (mm) | d (mm) |
|-----------|--------|--------|--------|
| 750MHz    | 176    | 100    | 6.35   |
| 835MHz    | 161.0  | 89.8   | 3.6    |
| 1800MHz   | 71.6   | 41.7   | 3.6    |
| 1900MHz   | 68     | 39.5   | 3.6    |
| 2300MHz   | 55.5   | 32.6   | 3.6    |
| 2600MHz   | 48.5   | 28.8   | 3.6    |



Page 21 of 124

## 6.2.2. System Check Result

System Performance Check at 750MHz&835MHz &1800MHz &1900MHz &2300MHz &2600MHz for Head Validation Kit: SN 22/16 DIP 0G750-417& SN 15/16 DIP 0G835-399& SN 46/11 DIP 1G800-186& SN 29/15 DIP 1G900-389& SN 22/16 DIP 2G300-412& SN 22/16 DIP 2G600-407

| Frequency<br>[MHz] | Target<br>Value(W/kg) |       | Reference Result<br>(± 10%) |               | Tested<br>Value(W/kg) |       | Tissue<br>Temp. | Test time     |
|--------------------|-----------------------|-------|-----------------------------|---------------|-----------------------|-------|-----------------|---------------|
| [IVIITZ]           | 1g                    | 10g   | 1g                          | 10g           | 1g                    | 10g   | [°C]            |               |
| 750                | 8.33                  | 5.44  | 7.497-9.163                 | 4.896-5.984   | 8.07                  | 5.78  | 20.9            | Apr. 13, 2025 |
| 835                | 9.67                  | 6.14  | 8.703-10.637                | 5.526-6.754   | 10.00                 | 6.50  | 20.8            | Apr. 14, 2025 |
| 1800               | 37.76                 | 19.60 | 33.984-41.536               | 17.640-21.560 | 40.45                 | 20.15 | 21.1            | Apr. 19, 2025 |
| 1900               | 41.26                 | 20.86 | 37.134-45.386               | 18.774-22.946 | 39.76                 | 19.99 | 20.7            | Apr. 18, 2025 |
| 2300               | 50.12                 | 23.16 | 45.108-55.132               | 20.844-25.476 | 54.01                 | 23.52 | 20.5            | Apr. 16, 2025 |
| 2600               | 54.94                 | 23.77 | 49.446-60.434               | 21.393-26.147 | 53.22                 | 23.37 | 20.9            | Apr. 15, 2025 |

Note:

<sup>(1)</sup> We use a CW signal of 18dBm for system check, and then all SAR value are normalized to 1W forward power. The result must be within  $\pm 10\%$  of target value.





Page 22 of 124

## 7. EUT TEST POSITION

## 7.1. Body Worn Position

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to **25mm** while used in front of face, and body back touch with all accessories.







Page 23 of 124

## 8. SAR EXPOSURE LIMITS

Limits for General Population/Uncontrolled Exposure (W/kg)

| Type Exposure                                       | Uncontrolled Environment Limit (W/kg) |
|---|---------------------------------------|
| Spatial Peak SAR (1g cube tissue for brain or body) | 1.60                                  |
| Spatial Average SAR (Whole body)                    | 0.08                                  |
| Spatial Peak SAR (Limbs)                            | 4.0                                   |



Page 24 of 124

## 9. TEST FACILITY

| Test Site                         | Attestation of Global Compliance (Shenzhen) Co., Ltd   |
|-----------------------------------|--|
| Location                          | 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| Designation Number                | CN1259   |
| FCC Test Firm Registration Number | 975832   |
| A2LA Cert. No.                    | 5054.02  |
| Description                       | Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA  |



Page 25 of 124

## 10. TEST EQUIPMENT LIST

| Equipment description                                   | Manufacturer/<br>Model   | Identification No.        | Software version | Current calibration date    | Next calibration date       |
|---|--------------------------|---------------------------|------------------|-----------------------------|-----------------------------|
| SAR Probe   | MVG                      | 2023-EPGO-414             | N/A              | Apr. 30, 2024               | Apr. 29, 2025               |
| Phantom   | SATIMO                   | SN_4511_SAM90             | N/A              | Validated. No cal required. | Validated. No cal required. |
| Liquid  | SATIMO                   | N/A                       | N/A              | Validated. No cal required. | Validated. No cal required. |
| Comm Tester   | Agilent-8960             | GB46200384                | N/A              | May 28, 2024                | May 27, 2025                |
| Comm Tester   | R&S- CMW500              | 121209                    | V3.7.40          | May 23, 2024                | May 22, 2025                |
| Multimeter  | Keithley 2000            | 4114939                   | N/A              | May 24, 2024                | May 23, 2025                |
| SAR Software  | MVG-OpenSAR              | N/A                       | V5.3.15.8        | N/A                         | N/A                         |
| Dipole  | SATIMO SID750            | SN 22/16 DIP<br>0G750-417 | N/A-             | Apr. 28, 2022               | Apr. 27, 2025               |
| Dipole  | SATIMO SID835            | SN 15/16 DIP<br>0G835-399 | N/A              | Apr. 28, 2022               | Apr. 27, 2025               |
| Dipole  | SATIMO SID1800           | SN 46/11 DIP<br>1G800-186 | N/A              | Apr. 28, 2022               | Apr. 27, 2025               |
| Dipole  | SATIMO SID1900           | SN 29/15 DIP<br>1G900-389 | N/A              | Apr. 28, 2022               | Apr. 27, 2025               |
| Dipole  | SATIMO SID2300           | SN 22/16 DIP<br>2G300-412 | N/A              | Apr. 28, 2022               | Apr. 27, 2025               |
| Dipole  | SATIMO SID2600           | SN 22/16 DIP<br>2G600-407 | N/A              | Apr. 28, 2022               | Apr. 27, 2025               |
| Signal Generator  | Agilent-E4438C           | US41461365                | V5.03            | May 24, 2024                | May 23, 2025                |
| EXA Signal<br>Analyzer                                  | Agilent / N9010A         | MY53470504                | N/A              | May 28, 2024                | May 27, 2025                |
| Network Analyzer  | Rhode & Schwarz<br>ZVL6  | SN101443                  | 3.2              | Jul. 24, 2024               | Jul. 23, 2025               |
| Attenuator  | Warison<br>/WATT-6SR1211 | S/N:WRJ34AYM2F1           | N/A              | June 06, 2024               | June 05, 2025               |
| Attenuator  | Mini-circuits / VAT-10+  | 31405                     | N/A              | June 06, 2024               | June 05, 2025               |
| Amplifier   | AS0104-55_55             | 1004793                   | N/A              | N/A                         | N/A                         |
| Directional<br>Couple                                   | Werlatone/ C5571-10      | SN99463                   | N/A              | Feb. 01, 2024               | Jan. 31, 2026               |
| Directional<br>Couple                                   | Werlatone/<br>C6026-10   | SN99482                   | N/A              | Feb. 01, 2024               | Jan. 31, 2026               |
| Power Sensor  | NRP-Z21                  | 104604                    | N/A              | May 24, 2024                | May 23, 2025                |
| Power Sensor  | NRP-Z23                  | 100323                    | N/A              | Jun. 05, 2024               | Jun. 04, 2025               |
| Power Viewer  | R&S                      | V2.3.1.0                  | N/A              | N/A                         | N/A                         |
| Calibration<br>standard parts for<br>network sub - port | R&S/ ZV-Z132             | N/A                       | V2.3.1.0         | Nov. 08, 2024               | Nov. 07, 2025               |
| Thermometer   | DigiMate/TP677           | 3811930452                | N/A              | June 06, 2024               | June 05, 2025               |

Note: Per KDB 865664 Dipole SAR Validation, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:


- 1. There is no physical damage on the dipole;
- 2. System validation with specific dipole is within 10% of calibrated value;
- 3. Return-loss is within 20% of calibrated measurement;
- 4. Impedance is within  $5\Omega$  of calibrated measurement.



Page 26 of 124

## 11. MEASUREMENT UNCERTAINTY

| 11. MEASUREMENT   | (            | SATIMO Und    | certainty-     |            |              |          |                |                 |    |
|---|--------------|---------------|----------------|------------|--------------|----------|----------------|-----------------|----|
| M   | easurement ι |               |                | veraged ov | /er 1 gram / | 10 gram. | 4 11           | 40 11:          |    |
| Uncertainty Component   | Sec.         | Tol<br>(+- %) | Prob.<br>Dist. | Div.       | Ci (1g)      | Ci (10g) | 1g Ui<br>(+-%) | 10g Ui<br>(+-%) | vi |
| Measurement System  |              |               |                |            |              |          |                |                 |    |
| Probe calibration   | E.2.1        | 7.000         | N              | 1          | 1            | 1        | 7.000          | 7.000           | ∞  |
| Axial Isotropy  | E.2.2        | 0.090         | R              | $\sqrt{3}$ | √0.5         | √0.5     | 0.037          | 0.037           | ∞  |
| Hemispherical Isotropy  | E.2.2        | 0.090         | R              | $\sqrt{3}$ | √0.5         | √0.5     | 0.037          | 0.037           | ∞  |
| Boundary effect   | E.2.3        | 1.000         | R              | $\sqrt{3}$ | 1            | 1        | 0.577          | 0.577           | ×  |
| Linearity   | E.2.4        | 0.890         | R              | $\sqrt{3}$ | 1            | 1        | 0.514          | 0.514           | ∞  |
| System detection limits   | E.2.4        | 1.000         | R              | $\sqrt{3}$ | 1            | 1        | 0.577          | 0.577           | ∞  |
| Modulation response   | E2.5         | 3.000         | R              | $\sqrt{3}$ | 1            | 1        | 1.732          | 1.732           | ∞  |
| Readout Electronics   | E.2.6        | 0.021         | N              | 1          | 1            | 1        | 0.021          | 0.021           | ∞  |
| Response Time   | E.2.7        | 0.000         | R              | $\sqrt{3}$ | 1            | 1        | 0.000          | 0.000           | ∞  |
| Integration Time  | E.2.8        | 1.400         | R              | $\sqrt{3}$ | 1            | 1        | 0.808          | 0.808           | ∞  |
| RF ambient conditions-Noise   | E.6.1        | 3.000         | R              | $\sqrt{3}$ | 1            | 1        | 1.732          | 1.732           | ∞  |
| RF ambient conditions-reflections   | E.6.1        | 3.000         | R              | $\sqrt{3}$ | 1            | 1        | 1.732          | 1.732           | ∞  |
| Probe positioner mechanical tolerance   | E.6.2        | 1.400         | R              | $\sqrt{3}$ | 1            | 1        | 0.808          | 0.808           | ∞  |
| Probe positioning with respect to phantom shell                                   | E.6.3        | 1.400         | R              | $\sqrt{3}$ | 1            | 1        | 0.808          | 0.808           | ∞  |
| Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation | E.5          | 2.300         | R              | $\sqrt{3}$ | 1            | 1        | 1.328          | 1.328           | ∞  |
| Test sample Related   |              |               |                |            |              |          |                |                 |    |
| Test sample positioning   | E.4.2        | 2.6           | N              | 1          | 1            | 1        | 2.600          | 2.600           | ∞  |
| Device holder uncertainty   | E.4.1        | 3             | N              | 1          | 1            | 1        | 3.000          | 3.000           | ∞  |
| Output power variation—SAR drift measurement                                      | E.2.9        | 5             | R              | $\sqrt{3}$ | 1            | 1        | 2.887          | 2.887           | ∞  |
| SAR scaling   | E.6.5        | 5             | R              | $\sqrt{3}$ | 1            | 1        | 2.887          | 2.887           | ∞  |
| Phantom and tissue parameter  | 'S           |               | •              |            | •            |          |                |                 |    |
| Phantom shell<br>uncertainty—shape, thickness,<br>and permittivity                | E.3.1        | 4             | R              | √3         | 1            | 1        | 2.309          | 2.309           | ∞  |
| Uncertainty in SAR correction for deviations in permittivity and conductivity     | E.3.2        | 1.9           | N              | 1          | 1            | 0.84     | 1.900          | 1.596           | ∞  |
| Liquid conductivity measurement   | E.3.3        | 4             | R              | $\sqrt{3}$ | 0.78         | 0.71     | 3.120          | 2.840           | ∞  |
| Liquid permittivity measurement   | E.3.3        | 5             | N              | 1          | 0.78         | 0.71     | 1.150          | 1.300           | М  |
| Liquid conductivity—temperature uncertainty                                       | E.3.4        | 2.5           | R              | $\sqrt{3}$ | 0.23         | 0.26     | 1.126          | 1.025           | ∞  |
| Liquid permittivity—temperature uncertainty                                       | E.3.4        | 2.5           | N              | 1          | 0.23         | 0.26     | 0.332          | 0.375           | М  |
| Combined Standard Uncertainty   |              |               | RSS            |            |              |          | 10.526         | 10.341          |    |
| Expanded Uncertainty (95% Confidence interval)                                    |              |               | K=2            |            |              |          | 21.052         | 20.682          |    |





| System  |         | ATIMO Und     |                |            | O-414<br>over 1 gran | n / 10 aram |                |                 |     |
|---|---------|---------------|----------------|------------|----------------------|-------------|----------------|-----------------|-----|
| Uncertainty Component   | Sec.    | Tol<br>(+- %) | Prob.<br>Dist. | Div.       | Ci (1g)              | Ci (10g)    | 1g Ui<br>(+-%) | 10g Ui<br>(+-%) | vi  |
| Measurement System  | T       |               | I              | I .        | Ι.                   |             | T              | T               |     |
| Probe calibration   | E.2.1   | 7.000         | N              | 1          | 1                    | 1           | 7.000          | 7.000           | ∞   |
| Axial Isotropy  | E.2.2   | 0.090         | R              | $\sqrt{3}$ | 1                    | 1           | 0.052          | 0.052           | ∞   |
| Hemispherical Isotropy  | E.2.2   | 0.090         | R              | $\sqrt{3}$ | 0                    | 0           | 0.000          | 0.000           | ∞   |
| Boundary effect   | E.2.3   | 1.000         | R              | $\sqrt{3}$ | 1                    | 1           | 0.577          | 0.577           | ∞   |
| Linearity   | E.2.4   | 0.890         | R              | $\sqrt{3}$ | 1                    | 1           | 0.514          | 0.514           | ∞   |
| System detection limits   | E.2.4   | 1.0           | R              | $\sqrt{3}$ | 1                    | 1           | 0.58           | 0.58            | ∞   |
| Modulation response   | E2.5    | 3.0           | R              | $\sqrt{3}$ | 0                    | 0           | 0.00           | 0.00            | ∞   |
| Readout Electronics   | E.2.6   | 0.021         | N              | 1          | 1                    | 1           | 0.021          | 0.021           | ∞   |
| Response Time   | E.2.7   | 0.0           | R              | $\sqrt{3}$ | 0                    | 0           | 0.00           | 0.00            | ∞   |
| Integration Time  | E.2.8   | 1.4           | R              | $\sqrt{3}$ | 0                    | 0           | 0.00           | 0.00            | 8   |
| RF ambient conditions-Noise   | E.6.1   | 3.0           | R              | $\sqrt{3}$ | 1                    | 1           | 1.73           | 1.73            | ∞   |
| RF ambient conditions-reflections   | E.6.1   | 3.0           | R              | $\sqrt{3}$ | 1                    | 1           | 1.73           | 1.73            | ∞   |
| Probe positioner mechanical tolerance   | E.6.2   | 1.4           | R              | $\sqrt{3}$ | 1                    | 1           | 0.81           | 0.81            | 000 |
| Probe positioning with respect to phantom shell                                   | E.6.3   | 1.4           | R              | $\sqrt{3}$ | 1                    | 1           | 0.81           | 0.81            | 00  |
| Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation | E.5     | 2.3           | R              | $\sqrt{3}$ | 1                    | 1           | 1.33           | 1.33            | 8   |
| System validation source  |         |               |                |            |                      |             |                |                 |     |
| Deviation of experimental dipole from numerical dipole                            | E.6.4   | 5.0           | N              | 1          | 1                    | 1           | 5.00           | 5.00            | o   |
| Input power and SAR drift measurement   | 8,6.6.4 | 5.0           | R              | $\sqrt{3}$ | 1                    | 1           | 2.89           | 2.89            | o   |
| Dipole axis to liquid distance  | 8,E.6.6 | 2.0           | R              | $\sqrt{3}$ | 1                    | 1           | 1.15           | 1.15            | oc  |
| Phantom and set-up  |         |               |                |            |                      |             |                |                 |     |
| Phantom shell uncertainty—shape, thickness, and permittivity                      | E.3.1   | 4.0           | R              | $\sqrt{3}$ | 1                    | 1           | 2.31           | 2.31            | o   |
| Uncertainty in SAR correction for deviations in permittivity and conductivity     | E.3.2   | 1.9           | N              | 1          | 1                    | 0.84        | 1.90           | 1.60            | œ   |
| Liquid conductivity (temperature uncertainty)                                     | E.3.3   | 2.5           | R              | $\sqrt{3}$ | 0.78                 | 0.71        | 1.13           | 1.02            | 000 |
| Liquid conductivity (measured)  | E.3.3   | 4             | N              | 1          | 0.78                 | 0.71        | 3.12           | 2.84            | N   |
| Liquid permittivity (temperature uncertainty)                                     | E.3.4   | 2.5           | R              | $\sqrt{3}$ | 0.23                 | 0.26        | 0.33           | 0.38            | o   |
| Liquid permittivity (measured)  | E.3.4   | 5             | N              | 1          | 0.23                 | 0.26        | 1.15           | 1.30            | N   |
| Combined Standard Uncertainty   |         |               | RSS            |            |                      |             | 10.459         | 10.272          |     |
| Expanded Uncertainty (95% Confidence interval)                                    |         |               | K=2            |            |                      |             | 20.917         | 20.545          |     |



Page 28 of 124

| Sy  | System Check ( | SATIMO Und<br>uncertainty f |                |            |         | 10 gram. |                |                 |          |
|---|----------------|-----------------------------|----------------|------------|---------|----------|----------------|-----------------|----------|
| Uncertainty Component   | Sec.           | Tol<br>(+- %)               | Prob.<br>Dist. | Div.       | Ci (1g) | Ci (10g) | 1g Ui<br>(+-%) | 10g Ui<br>(+-%) | vi       |
| Measurement System  |                | , , , ,                     |                | 1          | 1       |          | ( ,0)          | , , , ,         |          |
| Probe calibration drift   | E.2.1.3        | 0.500                       | N              | 1          | 1       | 1        | 0.50           | 0.50            | ∞        |
| Axial Isotropy  | E.2.2          | 0.090                       | R              | $\sqrt{3}$ | 0       | 0        | 0.00           | 0.00            | ∞        |
| Hemispherical Isotropy  | E.2.2          | 0.090                       | R              | $\sqrt{3}$ | 0       | 0        | 0.00           | 0.00            | ∞        |
| Boundary effect   | E.2.3          | 1.000                       | R              | $\sqrt{3}$ | 0       | 0        | 0.00           | 0.00            | ∞        |
| Linearity   | E.2.4          | 0.890                       | R              | $\sqrt{3}$ | 0       | 0        | 0.00           | 0.00            | ∞        |
| System detection limits   | E.2.4          | 1.0                         | R              | $\sqrt{3}$ | 0       | 0        | 0.00           | 0.00            | ×        |
| Modulation response   | E2.5           | 3.0                         | R              | $\sqrt{3}$ | 0       | 0        | 0.00           | 0.00            | ×        |
| Readout Electronics   | E.2.6          | 0.021                       | N              | 1          | 0       | 0        | 0.00           | 0.00            | ∞        |
| Response Time   | E.2.7          | 0                           | R              | $\sqrt{3}$ | 0       | 0        | 0.00           | 0.00            | ×        |
| Integration Time  | E.2.8          | 1.4                         | R              | $\sqrt{3}$ | 0       | 0        | 0.00           | 0.00            | ×        |
| RF ambient conditions-Noise   | E.6.1          | 3.0                         | R              | $\sqrt{3}$ | 0       | 0        | 0.00           | 0.00            | ∞        |
| RF ambient conditions-reflections   | E.6.1          | 3.0                         | R              | $\sqrt{3}$ | 0       | 0        | 0.00           | 0.00            | ∞        |
| Probe positioner mechanical tolerance   | E.6.2          | 1.4                         | R              | $\sqrt{3}$ | 1       | 1        | 0.81           | 0.81            | ∞        |
| Probe positioning with respect to phantom shell                                   | E.6.3          | 1.4                         | R              | $\sqrt{3}$ | 1       | 1        | 0.81           | 0.81            | ∞        |
| Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation | E.5            | 2.3                         | R              | $\sqrt{3}$ | 0       | 0        | 0.00           | 0.00            | ∞        |
| System check source (dipole)  |                |                             |                |            |         |          |                |                 |          |
| Deviation of experimental dipoles   | E.6.4          | 2.0                         | N              | 1          | 1       | 1        | 2.00           | 2.00            | ∞        |
| Input power and SAR drift measurement   | 8,6.6.4        | 5.0                         | R              | $\sqrt{3}$ | 1       | 1        | 2.89           | 2.89            | ∞        |
| Dipole axis to liquid distance  | 8,E.6.6        | 2.0                         | R              | $\sqrt{3}$ | 1       | 1        | 1.15           | 1.15            | $\infty$ |
| Phantom and tissue parameter  | rs             |                             |                |            |         |          |                |                 |          |
| Phantom shell uncertainty—shape, thickness, and permittivity                      | E.3.1          | 4                           | R              | $\sqrt{3}$ | 1       | 1        | 2.31           | 2.31            | ∞        |
| Uncertainty in SAR correction for deviations in permittivity and conductivity     | E.3.2          | 1.9                         | N              | 1          | 1       | 0.84     | 1.90           | 1.60            | ∞        |
| Liquid conductivity measurement   | E.3.3          | 4                           | R              | $\sqrt{3}$ | 0.78    | 0.71     | 3.12           | 2.84            | ∞        |
| Liquid permittivity measurement   | E.3.3          | 5                           | N              | 1          | 0.78    | 0.71     | 1.15           | 1.30            | М        |
| Liquid conductivity—temperature uncertainty                                       | E.3.4          | 2.5                         | R              | $\sqrt{3}$ | 0.23    | 0.26     | 1.13           | 1.02            | ∞        |
| Liquid permittivity—temperature uncertainty                                       | E.3.4          | 2.5                         | N              | 1          | 0.23    | 0.26     | 0.33           | 0.38            | М        |
| Combined Standard<br>Uncertainty  |                |                             | RSS            |            |         |          | 5.562          | 5.203           |          |
| Expanded Uncertainty (95% Confidence interval)                                    |                |                             | K=2            |            |         |          | 11.124         | 10.406          |          |



Page 29 of 124

## 12. CONDUCTED POWER MEASUREMENT

## LTE (TDD) Considerations

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band 40-Lower Side, 40- Upper Side, 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

|                  | Norm                         | al cyclic prefix i                   | n downlink                             | Ex                      | tended cyclic prefix           | in downlink                      |
|------------------|------------------------------|--------------------------------------|--|-------------------------|--------------------------------|----------------------------------|
| Special subframe | DwPTS                        | Up                                   | PTS                                    | DwPTS                   | Up                             | PTS                              |
| configuration    |                              | Normal<br>cyclic prefix<br>in uplink | Extended<br>cyclic prefix<br>in uplink |                         | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| 0                | $6592 \cdot T_{\rm s}$       |                                      |  | $7680 \cdot T_{\rm s}$  |                                |                                  |
| 1                | $19760 \cdot T_{\rm s}$      |                                      | 20480                                  |                         | $2192 \cdot T_{\rm s}$         | $2560 \cdot T_{\rm s}$           |
| 2                | 21952· <i>T</i> <sub>s</sub> | $2192 \cdot T_{\rm s}$               | $2560 \cdot T_{\rm s}$                 | 23040·T <sub>s</sub>    | 2192 · I <sub>S</sub>          | 2300 · 1 <sub>s</sub>            |
| 3                | 24144·T <sub>s</sub>         |                                      |  | 25600·T <sub>s</sub>    |                                |                                  |
| 4                | 26336·T <sub>s</sub>         |                                      |  | $7680 \cdot T_{\rm s}$  |                                |                                  |
| 5                | $6592 \cdot T_{\rm s}$       |                                      |  | 20480·T <sub>s</sub>    | $4384 \cdot T_s$               | 5120 · T <sub>s</sub>            |
| 6                | 19760 · T <sub>s</sub>       |                                      |  | 23040·T <sub>s</sub>    | 4384 · 1 <sub>s</sub>          | 3120 · 1 <sub>s</sub>            |
| 7                | 21952· <i>T</i> <sub>s</sub> | $4384 \cdot T_{\rm s}$               | $5120 \cdot T_{\rm s}$                 | $12800 \cdot T_{\rm s}$ |                                |                                  |
| 8                | 24144·T <sub>s</sub>         |                                      |  | -                       | -                              | -                                |
| 9                | $13168 \cdot T_{\rm s}$      |                                      |  | -                       | -                              | -                                |

Table 4.2-2: Uplink-downlink configurations

| Uplink-downlink |                          |   |   |   |   | Subframe number |   |   |   |   |   |  |  |  |  |
|-----------------|--------------------------|---|---|---|---|-----------------|---|---|---|---|---|--|--|--|--|
| configuration   | Switch-point periodicity | 0 | 1 | 2 | 3 | 4               | 5 | 6 | 7 | 8 | 9 |  |  |  |  |
| 0               | 5 ms                     | D | S | U | U | J               | D | S | U | U | U |  |  |  |  |
| 1               | 5 ms                     | D | S | U | U | D               | D | S | U | U | D |  |  |  |  |
| 2               | 5 ms                     | D | S | U | D | D               | D | S | U | D | D |  |  |  |  |
| 3               | 10 ms                    | D | S | U | U | C               | D | D | D | D | D |  |  |  |  |
| 4               | 10 ms                    | D | S | U | U | D               | D | D | D | D | D |  |  |  |  |
| 5               | 10 ms                    | D | S | U | D | D               | D | D | D | D | D |  |  |  |  |
| 6               | 5 ms                     | D | S | U | U | J               | D | S | U | U | D |  |  |  |  |



Page 30 of 124

## **Calculated Duty Cycle**

| Uplink-                | Downlink-to-                        |   |   |   | Su | bframe | e Num | ber |   |   |   | Calculated    |
|------------------------|-------------------------------------|---|---|---|----|--------|-------|-----|---|---|---|---------------|
| Downlink Configuration | Uplink Switch-<br>point Periodicity | 0 | 1 | 2 | 3  | 4      | 5     | 6   | 7 | 8 | 9 | Duty Cycle(%) |
| 0                      | 5ms                                 | D | S | U | U  | U      | D     | S   | U | J | J | 63.33         |
| 1                      | 5ms                                 | D | S | U | U  | D      | D     | S   | U | U | D | 43.33         |
| 2                      | 5ms                                 | D | S | U | D  | D      | D     | S   | U | D | D | 23.33         |
| 3                      | 10ms                                | D | S | U | U  | U      | D     | D   | D | D | D | 31.67         |
| 4                      | 10ms                                | D | S | U | U  | D      | D     | D   | D | D | D | 21.67         |
| 5                      | 10ms                                | D | S | U | D  | D      | D     | D   | D | D | D | 11.67         |
| 6                      | 5ms                                 | D | S | U | U  | U      | D     | S   | U | U | D | 53.33         |

**Note:** Calculated Duty Cycle = Extended cyclic prefix in uplink x (Ts) x # of S + # of U Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0: Calculated Duty Cycle =  $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$  where

 $Ts = 1/(15000 \times 2048)$  seconds



Page 31 of 124

## LTE Band

|            |               | Conducte | ed Power                         | of LTE Band 2(d                      | Bm)  |   |  |
|------------|---------------|----------|----------------------------------|--------------------------------------|--|---|--|
| 5 1 111    |               |          | RB                               | T (MDD                               | Channel  | Channel   | Channel  |
| Bandwidth  | Modulation    | RB size  | offset                           | Target MPR                           | 18607  | 18900   | 19193  |
|            |               |          | 0                                | 0                                    | 21.53  | 21.94   | 22.32  |
|            |               | 1        | 3                                | 0                                    | 21.55  | 21.94   | 21.96  |
|            |               |          | 5                                | 0                                    | 21.49  | 22.01   | 21.78  |
|            | QPSK          |          | 0                                | 0                                    | 21.51  | 21.89   | 22.06  |
|            |               | 3        | 2                                | 0                                    | 21.49  | 21.90   | 22.15  |
|            |               |          | 3                                | 0                                    | 21.42  | 21.93   | 21.83  |
| 4 48411-   |               | 6        | 0                                | 1                                    | 20.45  | 20.89   | 20.93  |
| 1.4MHz     |               |          | 0                                | 1                                    | 20.44  | 20.72   | 20.98  |
|            |               | 1        | 3                                | 1                                    | 20.47  | 20.86   | 20.71  |
|            |               |          | 5                                | 1                                    | 20.42  | 20.89   | 20.64  |
| 16QAM      | 16QAM         |          | 0                                | 1                                    | 20.28  | 20.74   | 20.89  |
|            |               | 3        | 2                                | 1                                    | 20.27  |   | 20.98  |
|            |               |          | 3                                | 1                                    | 20.23  | 20.79   | 20.64  |
|            |               | 6        | 0                                | 2                                    | 19.49  | 19.76   | 19.97  |
| Bandwidth  | Modulation    | RB size  | RB                               | Target MPR                           | Channel  | Channel   | Channel  |
| Danawiatii | Wiodulation   | IVD SIZE | offset                           | raiget wirk                          | 18615  | 18900   | 19185  |
|            |               |          | 0                                | 0                                    | 21.52  | 21.89   | 22.39  |
|            |               | 1        | 7                                | 0                                    | 21.49  | 22.04   | 22.19  |
|            |               |          | 14                               | 0                                    | 21.32  | 22.06   | 21.34  |
|            | QPSK          | SK       |                                  |                                      |  |   |  |
|            |               |          | 0                                | 1                                    | 20.49  | 20.86   | 21.32  |
|            | QPSK          | 8        | 0 4                              |                                      |  | 20.86<br>20.87  |  |
|            | QPSK          | 8        |                                  | 1                                    | 20.49  |   | 21.32  |
| 3M∐-2      | QPSK          | 8<br>15  | 4                                | 1                                    | 20.49<br>20.50   | 20.87   | 21.32<br>21.31   |
| 3MHz       | QPSK          |          | 7                                | 1<br>1<br>1                          | 20.49<br>20.50<br>20.44  | 20.87<br>20.98  | 21.32<br>21.31<br>20.79  |
| 3MHz       | QPSK          |          | 4<br>7<br>0                      | 1<br>1<br>1<br>1                     | 20.49<br>20.50<br>20.44<br>20.50                                     | 20.87<br>20.98<br>20.81                                     | 21.32<br>21.31<br>20.79<br>21.06                                     |
| 3MHz       | QPSK          | 15       | 4<br>7<br>0                      | 1<br>1<br>1<br>1                     | 20.49<br>20.50<br>20.44<br>20.50<br>20.49                            | 20.87<br>20.98<br>20.81<br>20.80                            | 21.32<br>21.31<br>20.79<br>21.06<br>21.07                            |
| 3MHz       | QPSK<br>16QAM | 15       | 4<br>7<br>0<br>0<br>7            | 1<br>1<br>1<br>1<br>1                | 20.49<br>20.50<br>20.44<br>20.50<br>20.49<br>20.55                   | 20.87<br>20.98<br>20.81<br>20.80<br>20.88                   | 21.32<br>21.31<br>20.79<br>21.06<br>21.07<br>21.05                   |
| 3MHz       |               | 15       | 4<br>7<br>0<br>0<br>7<br>14      | 1<br>1<br>1<br>1<br>1<br>1           | 20.49<br>20.50<br>20.44<br>20.50<br>20.49<br>20.55<br>20.40          | 20.87<br>20.98<br>20.81<br>20.80<br>20.88<br>20.90          | 21.32<br>21.31<br>20.79<br>21.06<br>21.07<br>21.05<br>20.29          |
| 3MHz       |               | 15       | 4<br>7<br>0<br>0<br>7<br>14<br>0 | 1<br>1<br>1<br>1<br>1<br>1<br>1<br>2 | 20.49<br>20.50<br>20.44<br>20.50<br>20.49<br>20.55<br>20.40<br>19.45 | 20.87<br>20.98<br>20.81<br>20.80<br>20.88<br>20.90<br>19.91 | 21.32<br>21.31<br>20.79<br>21.06<br>21.07<br>21.05<br>20.29<br>20.31 |



Page 32 of 124

|             |             | Conducte | ed Power | of LTE Band 2(d | Bm)     |         |         |
|-------------|-------------|----------|----------|-----------------|---------|---------|---------|
| B J. Lift   |             | DD .:    | RB       | T 1 MDD         | Channel | Channel | Channel |
| Bandwidth   | Modulation  | RB size  | offset   | Target MPR      | 18625   | 18900   | 19175   |
|             |             |          | 0        | 0               | 21.72   | 22.00   | 22.28   |
|             |             | 1        | 13       | 0               | 21.62   | 21.98   | 22.62   |
|             |             |          | 24       | 0               | 21.66   | 22.14   | 21.53   |
|             | QPSK        |          | 0        | 1               | 20.36   | 20.85   | 21.30   |
|             |             | 12       | 6        | 1               | 20.38   | 20.86   | 21.28   |
|             |             |          | 13       | 1               | 20.40   | 20.98   | 21.06   |
| EMILI-      |             | 25       | 0        | 1               | 20.30   | 20.84   | 21.21   |
| 5MHz        |             |          | 0        | 1               | 20.60   | 21.04   | 21.08   |
|             |             | 1        | 13       | 1               | 20.50   | 21.09   | 21.39   |
|             |             |          | 24       | 1               | 20.60   | 21.20   | 20.57   |
|             | 16QAM       |          | 0        | 2               | 19.37   | 19.95   | 20.20   |
|             |             | 12       | 6        | 2               | 19.38   | 19.95   | 20.19   |
|             |             |          | 13       | 2               | 19.35   | 20.07   | 20.16   |
|             |             | 25       | 0        | 2               | 19.27   | 19.83   | 20.28   |
| Bandwidth   | Modulation  | RB size  | RB       | Target MPR      | Channel | Channel | Channel |
| Balluwiutii | Wiodulation | KD SIZE  | offset   | Target WPK      | 18650   | 18900   | 19150   |
|             |             |          | 0        | 0               | 21.56   | 21.97   | 21.48   |
|             |             | 1        | 25       | 0               | 21.57   | 21.95   | 21.91   |
|             |             |          | 49       | 0               | 21.82   | 22.11   | 21.94   |
|             | QPSK        |          | 0        | 1               | 20.16   | 20.75   | 20.58   |
|             |             | 25       | 13       | 1               | 20.20   | 20.74   | 20.54   |
|             |             |          | 25       | 1               | 20.46   | 20.88   | 20.95   |
| 10MU-       |             | 50       | 0        | 1               | 20.36   | 20.68   | 21.14   |
| 10MHz       |             |          | 0        | 1               | 20.64   | 20.86   | 20.48   |
|             |             | 1        | 25       | 1               | 20.58   | 20.98   | 20.99   |
|             |             |          | 49       | 1               | 20.69   | 21.13   | 20.97   |
|             | 16QAM       |          | 0        | 2               | 19.18   | 19.76   | 19.55   |
|             |             | 25       | 13       | 2               | 19.20   | 19.74   | 19.52   |
|             |             |          | 25       | 2               | 19.46   | 19.97   | 19.96   |
|             |             | 50       | 0        | 2               | 20.84   | 20.45   | 20.27   |



Page 33 of 124

|              |            | Conducte | ed Power | of LTE Band 2(d | Bm)     |         |         |
|--------------|------------|----------|----------|-----------------|---------|---------|---------|
| Don duvidála | Madulation | DD oi-s  | RB       | Toward MDD      | Channel | Channel | Channel |
| Bandwidth    | Modulation | RB size  | offset   | Target MPR      | 18675   | 18900   | 19125   |
|              |            |          | 0        | 0               | 21.44   | 21.10   | 21.03   |
|              |            | 1        | 38       | 0               | 21.61   | 21.43   | 21.14   |
|              |            |          | 74       | 0               | 21.29   | 21.58   | 21.71   |
|              | QPSK       |          | 0        | 1               | 20.54   | 20.18   | 20.70   |
|              |            | 36       | 18       | 1               | 20.50   | 20.27   | 20.77   |
|              |            |          | 39       | 1               | 20.57   | 20.17   | 20.83   |
| 15MHz        |            | 75       | 0        | 1               | 20.55   | 20.41   | 20.79   |
| ISMITZ       |            |          | 0        | 1               | 20.54   | 20.10   | 19.90   |
|              |            | 1        | 38       | 1               | 20.65   | 20.46   | 20.26   |
|              |            |          | 74       | 1               | 20.38   | 20.87   | 20.59   |
|              | 16QAM      |          | 0        | 2               | 20.52   | 20.16   | 20.79   |
|              |            | 36       | 18       | 2               | 20.59   | 20.21   | 20.72   |
|              |            |          | 39       | 2               | 20.57   | 20.28   | 20.80   |
|              |            | 75       | 0        | 2               | 20.55   | 20.36   | 20.88   |
| Bandwidth    | Modulation | RB size  | RB       | Target MPR      | Channel | Channel | Channel |
| Banawiani    | Woddiation | IND SIZE | offset   | rarget wir ix   | 18700   | 18900   | 19100   |
|              |            |          | 0        | 0               | 21.47   | 21.12   | 21.15   |
|              |            | 1        | 50       | 0               | 21.56   | 21.36   | 21.17   |
|              |            |          | 99       | 0               | 21.44   | 21.29   | 21.72   |
|              | QPSK       |          | 0        | 1               | 20.32   | 20.15   | 19.87   |
|              |            | 50       | 25       | 1               | 20.17   | 20.11   | 19.97   |
|              |            |          | 50       | 1               | 20.12   | 20.42   | 20.46   |
| 20MHz        |            | 100      | 0        | 1               | 20.45   | 20.09   | 20.52   |
| 20111112     |            |          | 0        | 1               | 20.40   | 20.04   | 20.03   |
|              |            | 1        | 50       | 1               | 20.54   | 20.47   | 20.09   |
|              |            |          | 99       | 1               | 20.35   | 20.26   | 20.54   |
|              | 16QAM      |          | 0        | 2               | 20.74   | 20.66   | 20.41   |
|              |            | 50       | 25       | 2               | 20.42   | 20.05   | 20.74   |
|              |            |          | 50       | 2               | 20.31   | 20.35   | 20.91   |
|              |            | 100      | 0        | 2               | 20.19   | 20.52   | 20.82   |





|              |            | Conducte | ed Power          | of LTE Band 4(d | Bm)     |         |         |
|--------------|------------|----------|-------------------|-----------------|---------|---------|---------|
| Danish dalah |            | DD -:    | RB                | Toward MDD      | Channel | Channel | Channel |
| Bandwidth    | Modulation | RB size  | offset Target MPR | 19957           | 20175   | 20393   |         |
|              |            |          | 0                 | 0               | 22.03   | 22.00   | 21.64   |
|              |            | 1        | 3                 | 0               | 22.02   | 22.02   | 21.57   |
|              |            |          | 5                 | 0               | 22.02   | 22.03   | 21.59   |
|              | QPSK       |          | 0                 | 0               | 22.07   | 21.99   | 21.52   |
|              |            | 3        | 2                 | 0               | 22.14   | 22.04   | 21.60   |
|              |            |          | 3                 | 0               | 22.02   | 22.03   | 21.61   |
| 1.4MHz       |            | 6        | 0                 | 1               | 21.17   | 21.11   | 20.55   |
| 1.411172     |            |          | 0                 | 1               | 20.77   | 20.94   | 20.46   |
|              |            | 1        | 3                 | 1               | 20.79   | 21.02   | 20.50   |
|              |            |          | 5                 | 1               | 20.84   | 20.97   | 20.53   |
|              | 16QAM      |          | 0                 | 1               | 20.83   | 20.90   | 20.43   |
|              |            | 3        | 2                 | 1               | 20.89   | 20.90   | 20.42   |
|              |            |          | 3                 | 1               | 20.89   | 20.92   | 20.53   |
|              |            | 6        | 0                 | 2               | 20.16   | 20.13   | 19.47   |
| Bandwidth    | Modulation | RB size  | RB                | Target MPR      | Channel | Channel | Channel |
| Ballawiatii  | Woddiation | ND SIZE  | offset            | Target WFK      | 19965   | 20175   | 20385   |
|              |            |          | 0                 | 0               | 22.27   | 21.94   | 21.87   |
|              |            | 1        | 7                 | 0               | 22.31   | 22.15   | 21.89   |
|              |            |          | 14                | 0               | 22.15   | 22.06   | 21.74   |
|              | QPSK       |          | 0                 | 1               | 21.28   | 21.05   | 20.81   |
|              |            | 8        | 4                 | 1               | 21.28   | 21.07   | 20.83   |
|              |            |          | 7                 | 1               | 21.29   | 21.15   | 20.82   |
| 3MHz         |            | 15       | 0                 | 1               | 21.31   | 21.12   | 20.79   |
| SWIFIZ       |            |          | 0                 | 1               | 21.26   | 20.86   | 20.62   |
|              | 16QAM      | 1        | 7                 | 1               | 21.36   | 21.05   | 20.70   |
|              |            |          | 14                | 1               | 21.22   | 20.96   | 20.60   |
|              |            |          | 0                 | 2               | 20.33   | 20.10   | 19.83   |
|              |            | 8        | 4                 | 2               | 20.33   | 20.12   | 19.83   |
|              |            |          | 7                 | 2               | 20.38   | 20.20   | 19.82   |
|              |            | 15       | 0                 | 2               | 20.34   | 20.07   | 19.74   |



Page 35 of 124

|             |            | Conducte | ed Power | of LTE Band 4(d | Bm)     |         |         |
|-------------|------------|----------|----------|-----------------|---------|---------|---------|
| Donada dela | Madulatian | DD ei-e  | RB       | Toward MDD      | Channel | Channel | Channel |
| Bandwidth   | Modulation | RB size  | offset   | Target MPR      | 19975   | 20175   | 20375   |
|             |            |          | 0        | 0               | 22.41   | 21.95   | 22.01   |
|             |            | 1        | 13       | 0               | 22.35   | 22.15   | 21.91   |
|             |            |          | 24       | 0               | 22.23   | 22.03   | 21.87   |
|             | QPSK       |          | 0        | 1               | 21.22   | 20.98   | 20.84   |
|             |            | 12       | 6        | 1               | 21.26   | 20.99   | 20.85   |
|             |            |          | 13       | 1               | 21.25   | 21.12   | 20.75   |
| 5MHz        |            | 25       | 0        | 1               | 21.27   | 21.06   | 20.78   |
| SWIFIZ      |            |          | 0        | 1               | 21.32   | 21.02   | 20.85   |
|             |            | 1        | 13       | 1               | 21.36   | 21.36   | 20.87   |
|             |            |          | 24       | 1               | 21.22   | 21.17   | 20.85   |
|             | 16QAM      |          | 0        | 2               | 20.22   | 20.06   | 19.94   |
|             |            | 12       | 6        | 2               | 20.26   | 20.07   | 19.94   |
|             |            |          | 13       | 2               | 20.29   | 20.20   | 19.88   |
|             |            | 25       | 0        | 2               | 20.28   | 20.06   | 19.92   |
| Bandwidth   | Modulation | RB size  | RB       | Target MPR      | Channel | Channel | Channel |
| Barrawiani  | modulation | TKB GIZO | offset   | - Targot IIII T | 20000   | 20175   | 20350   |
|             |            |          | 0        | 0               | 21.93   | 21.60   | 21.85   |
|             |            | 1        | 25       | 0               | 21.76   | 21.77   | 21.72   |
|             |            |          | 49       | 0               | 21.75   | 21.73   | 21.67   |
|             | QPSK       |          | 0        | 1               | 20.71   | 20.41   | 20.45   |
|             |            | 25       | 13       | 1               | 20.73   | 20.49   | 20.53   |
|             |            |          | 25       | 1               | 20.63   | 20.71   | 20.42   |
| 10MHz       |            | 50       | 0        | 1               | 20.68   | 20.57   | 20.50   |
| 10.31112    |            |          | 0        | 1               | 20.75   | 20.30   | 20.45   |
|             |            | 1        | 25       | 1               | 20.74   | 20.59   | 20.43   |
|             |            |          | 49       | 1               | 20.67   | 20.54   | 20.32   |
|             | 16QAM      |          | 0        | 2               | 19.73   | 19.58   | 19.62   |
|             |            | 25       | 13       | 2               | 19.72   | 19.56   | 19.60   |
|             |            |          | 25       | 2               | 19.62   | 19.78   | 19.57   |
|             |            | 50       | 0        | 2               | 19.78   | 19.68   | 19.59   |



Page 36 of 124

|           |            | Conducte | ed Power | of LTE Band 4(d | Bm)     |         |         |
|-----------|------------|----------|----------|-----------------|---------|---------|---------|
|           |            |          | RB       |                 | Channel | Channel | Channel |
| Bandwidth | Modulation | RB size  | offset   | Target MPR      | 20025   | 20175   | 20325   |
|           |            |          | 0        | 0               | 22.34   | 21.78   | 21.90   |
|           |            | 1        | 38       | 0               | 22.22   | 22.10   | 21.87   |
|           |            |          | 74       | 0               | 22.11   | 21.98   | 21.76   |
|           | QPSK       |          | 0        | 1               | 21.19   | 20.86   | 20.83   |
|           |            | 36       | 18       | 1               | 21.17   | 20.87   | 20.80   |
|           |            |          | 39       | 1               | 21.16   | 20.95   | 20.87   |
| 45841-    |            | 75       | 0        | 1               | 21.16   | 20.93   | 20.85   |
| 15MHz     |            |          | 0        | 1               | 21.35   | 20.83   | 20.89   |
|           |            | 1        | 38       | 1               | 21.35   | 21.09   | 20.91   |
|           |            |          | 74       | 1               | 21.17   | 21.04   | 20.80   |
|           | 16QAM      |          | 0        | 2               | 21.17   | 20.88   | 20.82   |
|           |            | 36       | 18       | 2               | 21.17   | 20.96   | 20.88   |
|           |            |          | 39       | 2               | 21.16   | 20.94   | 20.86   |
|           |            | 75       | 0        | 2               | 19.98   | 19.86   | 19.95   |
| Bandwidth | Modulation | RB size  | RB       | Torget MDD      | Channel | Channel | Channel |
| Bandwidth | wodulation | RD SIZE  | offset   | Target MPR      | 20050   | 20175   | 20300   |
|           |            | 4        | 0        | 0               | 21.84   | 21.86   | 21.97   |
|           |            | 1        | 50       | 0               | 22.12   | 22.42   | 22.40   |
|           |            |          | 99       | 0               | 22.11   | 22.47   | 22.21   |
|           | QPSK       |          | 0        | 1               | 21.05   | 21.10   | 21.30   |
|           |            | 50       | 25       | 1               | 21.04   | 21.02   | 21.32   |
|           |            |          | 50       | 1               | 21.10   | 21.11   | 21.18   |
| 201411-   |            | 100      | 0        | 1               | 21.12   | 21.03   | 21.16   |
| 20MHz     |            |          | 0        | 1               | 20.84   | 21.85   | 20.72   |
|           |            | 1        | 50       | 1               | 21.70   | 21.87   | 21.42   |
|           | 16QAM      |          | 99       | 1               | 21.09   | 21.81   | 20.94   |
|           |            |          | 0        | 2               | 20.13   | 20.16   | 20.41   |
|           |            | 50       | 25       | 2               | 20.13   | 20.17   | 20.42   |
|           |            |          | 50       | 2               | 20.23   | 20.36   | 20.35   |
|           |            | 100      | 0        | 2               | 20.22   | 20.15   | 20.22   |



Page 37 of 124

|             |            | Conducte | ed Power | of LTE Band 5(d | Bm)     |         |         |
|-------------|------------|----------|----------|-----------------|---------|---------|---------|
| Dan de dala | Madelatian | DD -:    | RB       | Townst MDD      | Channel | Channel | Channel |
| Bandwidth   | Modulation | RB size  | offset   | Target MPR      | 20407   | 20525   | 20643   |
|             |            |          | 0        | 0               | 20.96   | 21.28   | 20.51   |
|             |            | 1        | 3        | 0               | 20.92   | 21.16   | 20.29   |
|             |            |          | 5        | 0               | 20.85   | 21.17   | 20.13   |
|             | QPSK       |          | 0        | 0               | 20.81   | 21.16   | 20.21   |
|             |            | 3        | 2        | 0               | 20.79   | 21.16   | 20.18   |
|             |            |          | 3        | 0               | 20.86   | 21.11   | 20.08   |
| 1.4MHz      |            | 6        | 0        | 1               | 19.86   | 20.26   | 19.29   |
| 1.4111172   |            |          | 0        | 1               | 19.81   | 20.26   | 19.49   |
|             |            | 1        | 3        | 1               | 19.80   | 20.26   | 19.41   |
|             |            |          | 5        | 1               | 19.71   | 20.21   | 19.22   |
|             | 16QAM      |          | 0        | 1               | 19.70   | 20.08   | 19.13   |
|             |            | 3        | 2        | 1               | 19.68   | 20.07   | 19.10   |
|             |            |          | 3        | 1               | 19.72   | 20.14   | 19.08   |
|             |            | 6        | 0        | 2               | 18.97   | 19.40   | 18.50   |
| Bandwidth   | Modulation | RB size  | RB       | Target MPR      | Channel | Channel | Channel |
| Bandwidth   | Woddiation | IND SIZE | offset   | raiget wii ix   | 20415   | 20525   | 20635   |
|             |            |          | 0        | 0               | 20.70   | 21.17   | 20.48   |
|             |            | 1        | 7        | 0               | 20.83   | 21.29   | 20.27   |
|             |            |          | 14       | 0               | 20.72   | 21.20   | 20.12   |
|             | QPSK       |          | 0        | 1               | 19.86   | 20.26   | 19.37   |
|             |            | 8        | 4        | 1               | 19.87   | 20.26   | 19.39   |
|             |            |          | 7        | 1               | 19.91   | 20.32   | 19.35   |
| 3MHz        |            | 15       | 0        | 1               | 19.92   | 20.30   | 19.41   |
| OIVII IZ    |            |          | 0        | 1               | 19.83   | 20.10   | 19.41   |
|             | 16QAM      | 1        | 7        | 1               | 19.90   | 20.21   | 19.36   |
|             |            |          | 14       | 1               | 19.82   | 20.12   | 19.20   |
|             |            |          | 0        | 2               | 19.02   | 19.40   | 18.57   |
|             |            | 8        | 4        | 2               | 19.03   | 19.40   | 18.57   |
|             |            |          | 7        | 2               | 19.06   | 19.46   | 18.55   |
|             |            | 15       | 0        | 2               | 19.06   | 19.34   | 18.61   |



Page 38 of 124

|             |            | Conducte | ed Power | of LTE Band 5(d | Bm)     |         |         |
|-------------|------------|----------|----------|-----------------|---------|---------|---------|
| Donada dela | Madulatian | DD ains  | RB       | Toward MDD      | Channel | Channel | Channel |
| Bandwidth   | Modulation | RB size  | offset   | Target MPR      | 20425   | 20525   | 20625   |
|             |            |          | 0        | 0               | 20.94   | 21.22   | 21.01   |
|             |            | 1        | 13       | 0               | 20.96   | 21.36   | 20.37   |
|             |            |          | 24       | 0               | 20.79   | 21.08   | 20.23   |
|             | QPSK       |          | 0        | 1               | 19.86   | 20.20   | 19.50   |
|             |            | 12       | 6        | 1               | 19.86   | 20.20   | 19.52   |
|             |            |          | 13       | 1               | 19.94   | 20.23   | 19.36   |
| 5MHz        |            | 25       | 0        | 1               | 19.96   | 20.27   | 19.38   |
| SIVITIZ     |            |          | 0        | 1               | 20.05   | 20.15   | 19.93   |
|             |            | 1        | 13       | 1               | 20.14   | 20.34   | 19.49   |
|             | 16QAM      |          | 24       | 1               | 19.95   | 20.11   | 19.27   |
|             |            |          | 0        | 2               | 19.04   | 19.34   | 18.66   |
|             |            | 12       | 6        | 2               | 19.07   | 19.34   | 18.66   |
|             |            |          | 13       | 2               | 19.11   | 19.38   | 18.58   |
|             |            | 25       | 0        | 2               | 19.05   | 19.42   | 18.54   |
| Bandwidth   | Modulation | RB size  | RB       | Target MPR      | Channel | Channel | Channel |
| Banawiani   | Woddiation | IND SIZE | offset   | raiget wii ix   | 20450   | 20525   | 20600   |
|             |            |          | 0        | 0               | 20.81   | 21.47   | 21.64   |
|             |            | 1        | 25       | 0               | 20.90   | 21.57   | 21.41   |
|             |            |          | 49       | 0               | 21.06   | 21.50   | 20.87   |
|             | QPSK       |          | 0        | 1               | 19.79   | 20.30   | 20.38   |
|             |            | 25       | 13       | 1               | 19.80   | 20.34   | 20.38   |
|             |            |          | 25       | 1               | 19.83   | 20.38   | 19.90   |
| 10MHz       |            | 50       | 0        | 1               | 19.89   | 20.33   | 20.11   |
| 10111112    |            |          | 0        | 1               | 19.95   | 20.26   | 20.45   |
|             | 16QAM      | 1        | 25       | 1               | 20.02   | 20.49   | 20.40   |
|             |            |          | 49       | 1               | 20.21   | 20.39   | 19.81   |
|             |            |          | 0        | 2               | 18.90   | 19.49   | 19.51   |
|             |            | 25       | 13       | 2               | 18.89   | 19.46   | 19.53   |
|             |            |          | 25       | 2               | 19.02   | 19.50   | 19.02   |
|             |            | 50       | 0        | 2               | 20.36   | 20.41   | 20.17   |




Page 39 of 124

|                      |             | Cond    | lucted Power | r of LTE Ba | and 7 (dBm) |         |         |
|----------------------|-------------|---------|--------------|-------------|-------------|---------|---------|
| <b>5</b> 1 1 1 1 1 1 |             | ·       | RB           | Target      | Channel     | Channel | Channel |
| Bandwidth            | Modulation  | RB size | offset       | MPR         | 20775       | 21100   | 21425   |
|                      |             |         | 0            | 0           | 20.96       | 21.69   | 21.55   |
|                      |             | 1       | 12           | 0           | 21.07       | 21.40   | 21.58   |
|                      |             |         | 24           | 0           | 20.71       | 21.26   | 21.60   |
|                      | QPSK        |         | 0            | 1           | 20.06       | 20.41   | 20.63   |
|                      |             | 12      | 6            | 1           | 20.11       | 20.46   | 20.62   |
|                      |             |         | 13           | 1           | 19.96       | 20.26   | 20.67   |
| 5MHz                 |             | 25      | 0            | 1           | 20.05       | 20.27   | 20.57   |
| ЭІИІПZ               |             |         | 0            | 1           | 20.19       | 20.64   | 20.59   |
|                      |             | 1       | 12           | 1           | 20.28       | 20.43   | 20.66   |
|                      | 16QAM       |         | 24           | 1           | 19.94       | 20.25   | 20.74   |
|                      |             |         | 0            | 2           | 19.29       | 19.61   | 19.72   |
|                      |             | 12      | 6            | 2           | 19.33       | 19.60   | 19.71   |
|                      |             |         | 13           | 2           | 19.25       | 19.40   | 19.82   |
|                      |             | 25      | 0            | 2           | 19.22       | 19.51   | 19.68   |
| Bandwidth            | Modulation  | RB size | RB           | Target      | Channel     | Channel | Channel |
| Danuwiuiii           | Wiodulation | KD SIZE | offset       | MPR         | 20800       | 21100   | 21400   |
|                      |             |         | 0            | 0           | 20.55       | 21.99   | 21.43   |
|                      |             | 1       | 24           | 0           | 20.73       | 21.33   | 21.60   |
|                      |             |         | 49           | 0           | 20.86       | 20.93   | 21.48   |
|                      | QPSK        |         | 0            | 1           | 19.43       | 20.68   | 20.85   |
|                      |             | 25      | 12           | 1           | 19.49       | 20.68   | 20.84   |
|                      |             |         | 25           | 1           | 19.94       | 20.09   | 20.63   |
| 40MU~                |             | 50      | 0            | 1           | 19.82       | 20.16   | 20.75   |
| 10MHz                |             |         | 0            | 1           | 19.73       | 21.05   | 20.46   |
|                      |             | 1       | 24           | 1           | 19.99       | 20.45   | 20.81   |
|                      |             | 49      | 1            | 20.08       | 20.15       | 20.68   |         |
|                      | 16QAM       |         | 0            | 2           | 18.67       | 19.73   | 19.95   |
|                      |             | 25      | 12           | 2           | 18.68       | 19.71   | 20.05   |
|                      |             |         | 25           | 2           | 19.16       | 19.19   | 19.75   |
|                      |             | 50      | 0            | 2           | 20.13       | 20.22   | 20.35   |



Page 40 of 124

|            |            | Co      | nducted Pov | ver of LTE | Band 7 (dBm) |         |         |
|------------|------------|---------|-------------|------------|--------------|---------|---------|
|            |            |         | RB          | Target     | Channel      | Channel | Channel |
| Bandwidth  | Modulation | RB size | offset      | MPR        | 20825        | 21100   | 21375   |
|            |            |         | 0           | 0          | 20.49        | 22.35   | 20.87   |
|            |            | 1       | 37          | 0          | 20.82        | 21.29   | 21.73   |
|            |            |         | 74          | 0          | 21.33        | 20.73   | 21.53   |
|            | QPSK       |         | 0           | 1          | 20.13        | 20.12   | 20.99   |
|            |            | 37      | 16          | 1          | 20.10        | 20.13   | 21.04   |
|            |            |         | 35          | 1          | 20.12        | 20.10   | 21.02   |
| 45MU-      |            | 75      | 0           | 1          | 20.11        | 20.17   | 20.99   |
| 15MHz      |            |         |             | 0          | 1            | 19.65   | 21.40   |
|            |            | 1       | 37          | 1          | 20.03        | 20.45   | 21.01   |
|            |            |         | 74          | 1          | 20.53        | 19.84   | 20.78   |
|            | 16QAM      |         | 0           | 2          | 20.12        | 20.15   | 20.98   |
|            |            | 37      | 16          | 2          | 20.09        | 20.11   | 21.00   |
|            |            |         | 35          | 2          | 20.11        | 20.18   | 21.00   |
|            |            | 75      | 0           | 2          | 20.48        | 20.82   | 20.55   |
| Bandwidth  | Modulation | RB size | RB          | Target     | Channel      | Channel | Channel |
| Danuwiulii | Modulation | KD SIZE | offset      | MPR        | 20850        | 21100   | 21350   |
|            |            |         | 0           | 0          | 21.65        | 21.92   | 21.60   |
|            |            | 1       | 49          | 0          | 21.94        | 21.99   | 21.29   |
|            |            |         | 99          | 0          | 21.71        | 21.95   | 21.90   |
|            | QPSK       |         | 0           | 1          | 20.79        | 20.98   | 20.39   |
|            |            | 50      | 25          | 1          | 20.76        | 21.06   | 20.43   |
|            |            |         | 49          | 1          | 20.81        | 20.96   | 20.56   |
| 20MHz      |            | 100     | 0           | 1          | 20.77        | 20.98   | 20.53   |
| ZUIVITZ    |            |         | 0           | 1          | 20.57        | 21.47   | 20.51   |
|            |            | 1       | 49          | 1          | 20.86        | 21.67   | 20.08   |
|            |            |         | 99          | 1          | 20.83        | 21.35   | 20.56   |
|            | 16QAM      |         | 0           | 2          | 19.74        | 20.02   | 19.45   |
|            |            | 50      | 25          | 2          | 19.83        | 20.01   | 19.54   |
|            |            |         | 49          | 2          | 19.87        | 20.05   | 19.69   |
|            |            | 100     | 0           | 2          | 19.80        | 20.01   | 19.66   |






|              |             | Conducte | d Power o | of LTE Band 12(c | dBm)    |         |         |
|--------------|-------------|----------|-----------|------------------|---------|---------|---------|
| Domesti alth | Modulation  | DD size  | RB        | Toward MDD       | Channel | Channel | Channel |
| Bandwidth    | Wiodulation | RB size  | offset    | Target MPR       | 23017   | 23095   | 23173   |
|              |             |          | 0         | 0                | 21.81   | 21.44   | 20.78   |
|              |             | 1        | 3         | 0                | 22.04   | 21.28   | 20.39   |
|              |             |          | 5         | 0                | 22.20   | 21.29   | 20.07   |
|              | QPSK        |          | 0         | 0                | 21.93   | 21.31   | 20.58   |
|              |             | 3        | 2         | 0                | 21.92   | 21.31   | 20.59   |
|              |             |          | 3         | 0                | 22.09   | 21.28   | 20.16   |
| 1.4MHz       |             | 6        | 0         | 1                | 21.06   | 20.44   | 19.59   |
| 1.4111172    |             |          | 0         | 1                | 20.75   | 20.31   | 19.84   |
|              |             | 1        | 3         | 1                | 21.04   | 20.26   | 19.54   |
|              |             |          | 5         | 1                | 21.12   | 20.20   | 19.14   |
|              | 16QAM       |          | 0         | 1                | 20.90   | 20.25   | 19.55   |
|              |             | 3        | 2         | 1                | 20.88   | 20.25   | 19.55   |
|              |             |          | 3         | 1                | 21.02   | 20.23   | 19.16   |
|              |             | 6        | 0         | 2                | 20.10   | 19.57   | 18.80   |
| Bandwidth    | Modulation  | RB size  | RB        | Target MPR       | Channel | Channel | Channel |
| Balluwidtii  | Wiodulation | ND SIZE  | offset    | Target WFK       | 23025   | 23095   | 23165   |
|              |             |          | 0         | 0                | 21.76   | 21.46   | 21.65   |
|              |             | 1        | 7         | 0                | 22.14   | 21.35   | 21.00   |
|              |             |          | 14        | 0                | 21.93   | 21.41   | 20.11   |
|              | QPSK        |          | 0         | 1                | 21.11   | 20.47   | 20.51   |
|              |             | 8        | 4         | 1                | 21.11   | 20.48   | 20.55   |
|              |             |          | 7         | 1                | 21.18   | 20.48   | 19.89   |
| 3MHz         |             | 15       | 0         | 1                | 21.17   | 20.48   | 20.20   |
| SIVITIZ      |             |          | 0         | 1                | 20.84   | 20.36   | 20.59   |
|              |             | 1        | 7         | 1                | 21.18   | 20.30   | 19.92   |
|              |             |          | 14        | 1                | 21.05   | 20.40   | 19.08   |
|              | 16QAM       |          | 0         | 2                | 20.28   | 19.63   | 19.67   |
|              |             | 8        | 4         | 2                | 20.27   | 19.64   | 19.69   |
|              |             |          | 7         | 2                | 20.40   | 19.63   | 19.04   |
|              |             | 15       | 0         | 2                | 20.32   | 19.53   | 19.34   |




Page 42 of 124

|           |            | Conducte | d Power o | of LTE Band 12(d | dBm)    |         |         |
|-----------|------------|----------|-----------|------------------|---------|---------|---------|
| Barri 199 |            | DD .:    | RB        | T 1 MDD          | Channel | Channel | Channel |
| Bandwidth | Modulation | RB size  | offset    | Target MPR       | 23035   | 23095   | 23155   |
|           |            |          | 0         | 0                | 21.97   | 21.43   | 22.34   |
|           |            | 1        | 13        | 0                | 22.14   | 21.36   | 21.55   |
|           |            |          | 24        | 0                | 21.79   | 21.83   | 20.40   |
|           | QPSK       |          | 0         | 1                | 21.12   | 20.48   | 21.08   |
|           |            | 12       | 6         | 1                | 21.13   | 20.50   | 21.12   |
|           |            |          | 13        | 1                | 21.05   | 20.59   | 20.08   |
| EMIL.     |            | 25       | 0         | 1                | 21.06   | 20.49   | 20.60   |
| 5MHz      |            |          | 0         | 1                | 20.92   | 20.64   | 21.27   |
|           |            | 1        | 13        | 1                | 21.18   | 20.56   | 20.67   |
|           | 16QAM      |          | 24        | 1                | 20.79   | 21.01   | 19.40   |
|           |            |          | 0         | 2                | 20.26   | 19.66   | 20.25   |
|           |            | 12       | 6         | 2                | 20.26   | 19.67   | 20.23   |
|           |            |          | 13        | 2                | 20.16   | 19.75   | 19.35   |
|           |            | 25       | 0         | 2                | 20.20   | 19.58   | 19.75   |
| Bandwidth | Modulation | RB size  | RB        | Target MPR       | Channel | Channel | Channel |
| Bandwidth | Woddiation | IND SIZE | offset    | rarget wir it    | 23060   | 23095   | 23130   |
|           |            |          | 0         | 0                | 22.11   | 21.99   | 21.45   |
|           |            | 1        | 25        | 0                | 21.68   | 21.31   | 22.19   |
|           |            |          | 49        | 0                | 21.39   | 22.23   | 20.88   |
|           | QPSK       |          | 0         | 1                | 20.96   | 20.52   | 20.46   |
|           |            | 25       | 13        | 1                | 20.96   | 20.51   | 20.48   |
|           |            |          | 25        | 1                | 20.49   | 20.71   | 20.81   |
| 10MHz     |            | 50       | 0         | 1                | 20.69   | 20.52   | 20.63   |
| IONITZ    |            |          | 0         | 1                | 20.85   | 20.88   | 20.60   |
|           | 16QAM      | 1        | 25        | 1                | 20.62   | 20.37   | 21.33   |
|           |            |          | 49        | 1                | 20.38   | 21.17   | 19.88   |
|           |            |          | 0         | 2                | 20.09   | 19.65   | 19.56   |
|           |            | 25       | 13        | 2                | 20.08   | 19.64   | 19.56   |
|           |            |          | 25        | 2                | 19.62   | 19.83   | 19.91   |
|           |            | 50       | 0         | 2                | 20.79   | 20.81   | 20.92   |






|               |               | Conducte      | d Power o                                 | of LTE Band 13(c                          | IBm)    |   |         |  |
|---------------|---------------|---------------|---|---|---------|---|---------|--|
|               |               |               | RB  | _ ,                                       | Channel | Channel   | Channel |  |
| Bandwidth     | Modulation    | RB size       | offset                                    | Target MPR                                | 23205   | 23230   | 23255   |  |
|               |               |               | 0   | 0   | 20.87   | 21.91   | 20.68   |  |
|               |               | 1             | 13  | 0   | 22.01   | 20.83   | 20.27   |  |
|               |               |               | 24  | 0   | 21.09   | 20.13   | 20.42   |  |
|               | QPSK          |               | 0   | 1   | 20.31   | 20.40   | 19.21   |  |
|               |               | 12            | 6   | 1   | 20.37   | 20.43   | 19.24   |  |
|               |               |               | 13  | 1   | 20.59   | 19.36   | 19.29   |  |
| 5MHz          |               | 25            | 0   | 1   | 20.52   | 19.82   | 19.30   |  |
| SIVITIZ       |               |               | 0   | 1   | 19.78   | 20.95   | 19.74   |  |
|               |               | 1             | 13  | 1   | 20.93   | 19.74   | 19.34   |  |
|               |               |               | 24  | 1   | 20.05   | 19.09   | 19.47   |  |
|               | 16QAM         |               | 0   | 2   | 19.32   | 19.55   | 18.45   |  |
|               |               | 12            | 6   | 2   | 19.37   | 19.56   | 18.46   |  |
|               |               |               | 13  | 2   | 19.69   | 18.49   | 18.55   |  |
|               |               | 25            | 0   | 2   | 19.62   | 18.98   | 18.43   |  |
| Bandwidth     | Modulation    | RB size       | RB  | Target MPR                                |         | Channel   |         |  |
| Danawiatii    | Woddiation    | ND 3126       | offset                                    | rarget wir ix                             | 23230   |   |         |  |
|               |               |               | 0   | 0   |         | 21.47   |         |  |
|               |               |               |   |   | 21.54   |   |         |  |
|               |               | 1             | 25  | 0   |         | 21.54   |         |  |
|               |               | 1             | 25<br>49                                  | 0   |         | 21.54   |         |  |
|               | QPSK          | 1             |   |   |         |   |         |  |
|               | QPSK          | 25            | 49  | 0   |         | 21.26   |         |  |
|               | QPSK          |               | 49<br>0                                   | 0   |         | 21.26<br>20.89  |         |  |
| <b>10M</b> □- | QPSK          |               | 49<br>0<br>13                             | 0<br>1<br>1                               |         | 21.26<br>20.89<br>20.88   |         |  |
| 10MHz         | QPSK          | 25            | 49<br>0<br>13<br>25                       | 0<br>1<br>1<br>1                          |         | 21.26<br>20.89<br>20.88<br>19.93  |         |  |
| 10MHz         | QPSK          | 25            | 49<br>0<br>13<br>25<br>0                  | 0<br>1<br>1<br>1<br>1                     |         | 21.26<br>20.89<br>20.88<br>19.93<br>21.26                                     |         |  |
| 10MHz         | QPSK          | 25<br>50      | 49<br>0<br>13<br>25<br>0                  | 0<br>1<br>1<br>1<br>1                     |         | 21.26<br>20.89<br>20.88<br>19.93<br>21.26<br>20.40                            |         |  |
| 10MHz         | QPSK<br>16QAM | 25<br>50      | 49<br>0<br>13<br>25<br>0<br>0<br>25       | 0<br>1<br>1<br>1<br>1<br>1                |         | 21.26<br>20.89<br>20.88<br>19.93<br>21.26<br>20.40<br>20.37                   |         |  |
| 10MHz         |               | 25<br>50      | 49<br>0<br>13<br>25<br>0<br>0<br>25<br>49 | 0<br>1<br>1<br>1<br>1<br>1<br>1           |         | 21.26<br>20.89<br>20.88<br>19.93<br>21.26<br>20.40<br>20.37<br>20.06          |         |  |
| 10MHz         |               | 25<br>50<br>1 | 49<br>0<br>13<br>25<br>0<br>0<br>25<br>49 | 0<br>1<br>1<br>1<br>1<br>1<br>1<br>1<br>2 |         | 21.26<br>20.89<br>20.88<br>19.93<br>21.26<br>20.40<br>20.37<br>20.06<br>19.96 |         |  |





|             |             | Conducte | d Power o | of LTE Band 17(c | IBm)    |         |         |
|-------------|-------------|----------|-----------|------------------|---------|---------|---------|
| D I         |             | DD .:    | RB        | To and MDD       | Channel | Channel | Channel |
| Bandwidth   | Modulation  | RB size  | offset    | Target MPR       | 23755   | 23790   | 23825   |
|             |             |          | 0         | 0                | 21.55   | 21.35   | 22.06   |
|             |             | 1        | 13        | 0                | 21.46   | 21.72   | 21.83   |
|             |             |          | 24        | 0                | 21.38   | 22.09   | 20.81   |
|             | QPSK        |          | 0         | 1                | 20.35   | 20.30   | 20.91   |
|             |             | 12       | 6         | 1                | 20.35   | 20.30   | 20.94   |
|             |             |          | 13        | 1                | 20.26   | 20.76   | 20.37   |
| EMIL-       |             | 25       | 0         | 1                | 20.33   | 20.39   | 20.75   |
| 5MHz        |             |          | 0         | 1                | 20.66   | 20.17   | 20.97   |
|             |             | 1        | 13        | 1                | 20.51   | 20.55   | 20.81   |
|             |             |          | 24        | 1                | 20.42   | 21.04   | 19.86   |
|             | 16QAM       |          | 0         | 2                | 19.41   | 19.38   | 19.98   |
|             |             | 12       | 6         | 2                | 19.40   | 19.37   | 19.99   |
|             |             |          | 13        | 2                | 19.36   | 19.84   | 19.37   |
|             |             | 25       | 0         | 2                | 19.30   | 19.48   | 19.73   |
| Bandwidth   | Modulation  | RB size  | RB        | Target MPR       | Channel | Channel | Channel |
| Balluwidtii | Wiodulation | ND SIZE  | offset    | Target WFK       | 23780   | 23790   | 23800   |
|             |             |          | 0         | 0                | 21.35   | 21.17   | 21.25   |
|             |             | 1        | 25        | 0                | 21.47   | 21.62   | 21.90   |
|             |             |          | 49        | 0                | 21.61   | 21.20   | 20.72   |
|             | QPSK        |          | 0         | 1                | 20.10   | 20.11   | 20.24   |
|             |             | 25       | 13        | 1                | 20.10   | 20.12   | 20.27   |
|             |             |          | 25        | 1                | 20.59   | 20.62   | 20.54   |
| 10MHz       |             | 50       | 0         | 1                | 21.84   | 21.89   | 21.97   |
| IOWINZ      |             |          | 0         | 1                | 20.46   | 20.13   | 20.04   |
|             |             | 1        | 25        | 1                | 20.42   | 20.47   | 20.63   |
|             |             |          | 49        | 1                | 20.79   | 20.19   | 19.53   |
|             | 16QAM       |          | 0         | 2                | 19.13   | 19.13   | 19.28   |
|             |             | 25       | 13        | 2                | 19.13   | 19.14   | 19.29   |
|             |             |          | 25        | 2                | 19.57   | 19.66   | 19.62   |
|             |             | 50       | 0         | 2                | 20.85   | 20.88   | 20.98   |






|            |             | Cond    | ucted Power | of LTE Ba | and 38 (dBm) |         |         |
|------------|-------------|---------|-------------|-----------|--------------|---------|---------|
| David Side |             | DD .: . | RB          | Target    | Channel      | Channel | Channel |
| Bandwidth  | Modulation  | RB size | offset      | MPR       | 37775        | 38000   | 38225   |
|            |             |         | 0           | 0         | 19.73        | 19.91   | 20.12   |
|            |             | 1       | 12          | 0         | 19.89        | 20.00   | 20.32   |
|            |             |         | 24          | 0         | 19.83        | 19.99   | 20.33   |
|            | QPSK        |         | 0           | 1         | 18.80        | 18.84   | 19.22   |
|            |             | 12      | 6           | 1         | 18.79        | 18.84   | 19.22   |
|            |             |         | 13          | 1         | 18.77        | 19.00   | 19.30   |
| 5MHz       |             | 25      | 0           | 1         | 18.85        | 18.92   | 19.26   |
| эмпг       |             |         | 0           | 1         | 19.07        | 18.92   | 19.58   |
|            |             | 1       | 12          | 1         | 19.23        | 19.09   | 19.76   |
|            |             |         | 24          | 1         | 19.20        | 18.99   | 19.72   |
|            | 16QAM       |         | 0           | 2         | 17.78        | 17.84   | 18.23   |
|            |             | 12      | 6           | 2         | 17.77        | 17.88   | 18.23   |
|            |             |         | 13          | 2         | 17.83        | 17.99   | 18.31   |
|            |             | 25      | 0           | 2         | 17.85        | 17.92   | 18.30   |
| Bandwidth  | Modulation  | RB size | RB          | Target    | Channel      | Channel | Channel |
| Bandwidth  | Wiodulation | ND SIZE | offset      | MPR       | 37800        | 38000   | 38200   |
|            |             |         | 0           | 0         | 20.23        | 20.25   | 20.42   |
|            |             | 1       | 24          | 0         | 20.36        | 20.36   | 20.54   |
|            |             |         | 49          | 0         | 20.35        | 20.33   | 20.58   |
|            | QPSK        |         | 0           | 1         | 19.14        | 19.10   | 19.28   |
|            |             | 25      | 12          | 1         | 19.15        | 19.11   | 19.28   |
|            |             |         | 25          | 1         | 19.16        | 19.22   | 19.39   |
| 10MHz      |             | 50      | 0           | 1         | 20.46        | 20.30   | 20.56   |
| ΙΟΙΝΙΠΖ    |             |         | 0           | 1         | 19.44        | 18.92   | 19.33   |
|            |             | 1 [     | 24          | 1         | 19.59        | 19.00   | 19.50   |
|            |             |         | 49          | 1         | 19.58        | 19.01   | 19.54   |
|            | 16QAM       |         | 0           | 2         | 18.21        | 18.14   | 18.45   |
|            |             | 25      | 12          | 2         | 18.21        | 18.14   | 18.46   |
|            |             |         | 25          | 2         | 18.23        | 18.30   | 18.56   |
|            |             | 50      | 0           | 2         | 19.58        | 19.42   | 19.59   |



Page 46 of 124

|           |            | Col     | nducted Pow | er of LTE E | Band 38 (dBm) |         |         |
|-----------|------------|---------|-------------|-------------|---------------|---------|---------|
|           |            |         | RB          | Target      | Channel       | Channel | Channel |
| Bandwidth | Modulation | RB size | offset      | MPR         | 37825         | 38000   | 38175   |
|           |            |         | 0           | 0           | 20.28         | 20.28   | 20.45   |
|           |            | 1       | 38          | 0           | 20.38         | 20.49   | 20.62   |
|           |            |         | 74          | 0           | 20.32         | 20.52   | 20.73   |
|           | QPSK       |         | 0           | 1           | 19.37         | 19.31   | 19.44   |
|           |            | 37      | 18          | 1           | 19.36         | 19.31   | 19.44   |
|           |            |         | 37          | 1           | 19.35         | 19.31   | 19.44   |
| 45MU-     |            | 75      | 0           | 1           | 20.36         | 20.26   | 20.32   |
| 15MHz     |            |         |             | 0           | 1             | 19.55   | 19.12   |
|           |            | 1       | 38          | 1           | 19.61         | 19.30   | 19.54   |
|           |            |         | 74          | 1           | 19.65         | 19.27   | 19.70   |
|           | 16QAM      |         | 0           | 2           | 19.36         | 19.31   | 19.44   |
|           |            | 37      | 18          | 2           | 19.35         | 19.31   | 19.44   |
|           |            |         | 37          | 2           | 19.35         | 19.31   | 19.44   |
|           |            | 75      | 0           | 2           | 19.59         | 19.28   | 19.32   |
| Bandwidth | Modulation | RB size | RB          | Target      | Channel       | Channel | Channel |
| Danuwium  | Wodulation | KD SIZE | offset      | MPR         | 37850         | 38000   | 38150   |
|           |            |         | 0           | 0           | 21.27         | 21.07   | 20.90   |
|           |            | 1       | 49          | 0           | 21.64         | 21.22   | 21.27   |
|           |            |         | 99          | 0           | 21.10         | 21.08   | 20.97   |
|           | QPSK       |         | 0           | 1           | 20.27         | 20.10   | 20.11   |
|           |            | 50      | 25          | 1           | 20.29         | 20.11   | 20.03   |
|           |            |         | 49          | 1           | 20.16         | 20.13   | 20.27   |
| 20MHz     |            | 100     | 0           | 1           | 20.22         | 20.13   | 20.13   |
| ZVIVII IZ |            |         | 0           | 1           | 20.88         | 20.05   | 19.81   |
|           |            | 1       | 49          | 1           | 21.13         | 20.07   | 20.22   |
|           |            |         | 99          | 1           | 20.66         | 20.30   | 19.90   |
|           | 16QAM      |         | 0           | 2           | 19.45         | 19.31   | 19.15   |
|           |            | 50      | 25          | 2           | 19.46         | 19.31   | 19.15   |
|           |            |         | 49          | 2           | 19.33         | 19.34   | 19.30   |
|           |            | 100     | 0           | 2           | 19.37         | 19.19   | 19.11   |





|            | Av         | g. Output Po | wer of LTE Bar | nd 40(dBm) -Lowe | er Side |         |
|------------|------------|--------------|----------------|------------------|---------|---------|
|            |            |              | RB             | Channel          | Channel | Channel |
| Bandwidth  | Modulation | RB size      | offset         | 38725            | 38750   | 38775   |
|            |            |              | 0              | 23.34            | 23.23   | 23.13   |
|            |            | 1            | 12             | 23.45            | 22.99   | 22.43   |
|            |            |              | 24             | 22.92            | 22.95   | 23.31   |
|            | QPSK       |              | 0              | 19.62            | 20.35   | 20.16   |
|            |            | 12           | 6              | 20.73            | 20.97   | 20.88   |
|            |            |              | 13             | 20.23            | 20.51   | 20.76   |
| 5MHz       |            | 25           | 0              | 21.01            | 20.83   | 20.94   |
| SIVITZ     |            |              | 0              | 22.01            | 23.05   | 21.26   |
|            |            | 1            | 12             | 21.75            | 21.21   | 21.93   |
|            |            |              | 24             | 22.36            | 22.09   | 22.72   |
|            | 16QAM      |              | 0              | 18.98            | 20.94   | 18.37   |
|            |            | 12           | 6              | 19.31            | 18.80   | 20.05   |
|            |            |              | 13             | 19.56            | 20.04   | 18.14   |
|            |            | 25           | 0              | 20.57            | 20.23   | 20.47   |
| Bandwidth  | Modulation | RB size      | RB             | Channel          |         |         |
| Danawiatii | Woddiation | IND SIZE     | offset         |                  | 38750   |         |
|            |            |              | 0              | 22.84            |         |         |
|            |            | 1            | 24             |                  | 22.67   |         |
|            |            |              | 49             |                  | 22.84   |         |
|            | QPSK       |              | 0              |                  | 20.27   |         |
|            |            | 25           | 12             |                  | 20.53   |         |
|            |            |              | 25             |                  | 21.55   |         |
| 10MHz      |            | 50           | 0              |                  | 18.25   |         |
| 10141112   |            |              | 0              |                  | 22.47   |         |
|            |            | 1            | 24             |                  | 21.34   |         |
|            |            |              | 49             |                  | 21.89   |         |
|            | 16QAM      |              | 0              |                  | 19.65   |         |
|            |            | 25           | 12             |                  | 20.61   |         |
|            |            |              | 25             |                  | 19.69   |         |
|            |            | 50           | 0              |                  | 18.17   |         |




Page 48 of 124

|               | Avg           | j. Output Pow | er of LTE Ban | d 40(dBm) -Uppe | r Side  |         |  |  |  |
|---------------|---------------|---------------|---------------|-----------------|---------|---------|--|--|--|
|               |               |               | RB            | Channel         | Channel | Channel |  |  |  |
| Bandwidth     | Modulation    | RB size       | offset        | 39175           | 39200   | 39225   |  |  |  |
|               |               |               | 0             | 22.56           | 22.67   | 22.81   |  |  |  |
|               |               | 1 [           | 12            | 22.19           | 22.57   | 21.83   |  |  |  |
|               |               |               | 24            | 21.79           | 21.45   | 22.68   |  |  |  |
|               | QPSK          |               | 0             | 20.14           | 21.11   | 20.66   |  |  |  |
|               |               | 12            | 6             | 20.07           | 20.97   | 20.94   |  |  |  |
|               |               |               | 13            | 20.49           | 20.44   | 19.68   |  |  |  |
| CMU-          |               | 25            | 0             | 18.83           | 20.75   | 20.14   |  |  |  |
| 5MHz          |               |               | 0             | 21.49           | 21.03   | 21.66   |  |  |  |
|               |               | 1             | 12            | 21.20           | 22.14   | 22.14   |  |  |  |
|               |               |               | 24            | 20.57           | 21.12   | 21.27   |  |  |  |
|               | 16QAM         |               | 0             | 19.51           | 19.77   | 20.01   |  |  |  |
|               |               | 12            | 6             | 19.65           | 19.78   | 19.60   |  |  |  |
|               |               |               | 13            | 19.69           | 19.71   | 18.08   |  |  |  |
|               |               | 25            | 0             | 20.30           | 19.31   | 20.24   |  |  |  |
| Dan alvedalth | NA a dedata a | DD -:         | RB            |                 | Channel |         |  |  |  |
| Bandwidth     | Modulation    | RB size       | offset        |                 | 39200   |         |  |  |  |
|               |               |               | 0             |                 | 22.16   |         |  |  |  |
|               |               | 1 [           | 24            |                 | 21.56   |         |  |  |  |
|               |               |               | 49            |                 | 21.29   |         |  |  |  |
|               | QPSK          |               | 0             |                 | 19.99   |         |  |  |  |
|               |               | 25            | 12            |                 | 21.24   |         |  |  |  |
|               |               |               | 25            |                 | 19.38   |         |  |  |  |
| 400411-       |               | 50            | 0             |                 | 18.55   |         |  |  |  |
| 10MHz         |               |               | 0             |                 | 22.17   |         |  |  |  |
|               | 16QAM         | 1             | 24            |                 | 22.76   |         |  |  |  |
|               |               |               | 49            |                 | 20.94   |         |  |  |  |
|               |               |               | 0             |                 | 19.54   |         |  |  |  |
|               |               | 25            | 12            |                 | 19.90   |         |  |  |  |
|               |               |               | 25            |                 | 19.04   |         |  |  |  |
|               |               | 50            | 0             |                 | 17.52   |         |  |  |  |



Page 49 of 124

| Conducted Power of LTE Band 41(dBm) |            |         |        |        |         |         |         |  |  |  |  |
|-------------------------------------|------------|---------|--------|--------|---------|---------|---------|--|--|--|--|
|                                     |            |         | RB     | Target | Channel | Channel | Channel |  |  |  |  |
| Bandwidth                           | Modulation | RB size | offset | MPR    | 39675   | 40620   | 41565   |  |  |  |  |
|                                     |            |         | 0      | 0      | 20.91   | 20.22   | 20.76   |  |  |  |  |
|                                     |            | 1 1     | 12     | 0      | 21.02   | 20.33   | 20.75   |  |  |  |  |
|                                     |            |         | 24     | 0      | 20.96   | 20.30   | 20.60   |  |  |  |  |
|                                     | QPSK       |         | 0      | 1      | 19.64   | 19.28   | 19.72   |  |  |  |  |
|                                     |            | 12      | 6      | 1      | 19.72   | 19.29   | 19.73   |  |  |  |  |
|                                     |            |         | 13     | 1      | 19.72   | 19.33   | 19.65   |  |  |  |  |
| 5841I-                              |            | 25      | 0      | 1      | 19.66   | 19.32   | 19.69   |  |  |  |  |
| 5MHz                                |            |         | 0      | 1      | 19.70   | 19.60   | 19.94   |  |  |  |  |
|                                     |            | 1       | 12     | 1      | 19.75   | 19.78   | 19.87   |  |  |  |  |
|                                     |            |         | 24     | 1      | 19.78   | 19.69   | 19.75   |  |  |  |  |
|                                     | 16QAM      | 12      | 0      | 2      | 18.65   | 18.38   | 18.89   |  |  |  |  |
|                                     |            |         | 6      | 2      | 18.65   | 18.39   | 18.89   |  |  |  |  |
|                                     |            |         | 13     | 2      | 18.59   | 18.29   | 18.81   |  |  |  |  |
|                                     |            | 25      | 0      | 2      | 18.59   | 18.34   | 18.80   |  |  |  |  |
| Bandwidth                           | Madulation | RB size | RB     | Target | Channel | Channel | Channel |  |  |  |  |
| Danuwium                            | Modulation | KD SIZE | offset | MPR    | 39700   | 40620   | 41540   |  |  |  |  |
|                                     |            |         | 0      | 0      | 21.29   | 20.39   | 21.08   |  |  |  |  |
|                                     |            | 1       | 24     | 0      | 21.27   | 20.51   | 21.11   |  |  |  |  |
|                                     |            |         | 49     | 0      | 21.34   | 20.54   | 21.06   |  |  |  |  |
|                                     | QPSK       |         | 0      | 1      | 19.88   | 19.35   | 19.85   |  |  |  |  |
|                                     |            | 25      | 12     | 1      | 19.79   | 19.36   | 19.82   |  |  |  |  |
|                                     |            |         | 25     | 1      | 19.92   | 19.47   | 19.80   |  |  |  |  |
| 10MU-                               |            | 50      | 0      | 1      | 20.27   | 20.16   | 20.74   |  |  |  |  |
| 10MHz                               |            |         | 0      | 1      | 20.35   | 19.03   | 19.94   |  |  |  |  |
|                                     |            | 1 [     | 24     | 1      | 20.21   | 19.27   | 20.07   |  |  |  |  |
|                                     |            |         | 49     | 1      | 20.34   | 19.20   | 19.85   |  |  |  |  |
|                                     | 16QAM      |         | 0      | 2      | 18.91   | 18.40   | 19.03   |  |  |  |  |
|                                     |            | 25      | 12     | 2      | 18.91   | 18.40   | 19.00   |  |  |  |  |
|                                     |            |         | 25     | 2      | 18.90   | 18.48   | 18.92   |  |  |  |  |
|                                     |            | 50      | 0      | 2      | 19.34   | 19.34   | 19.67   |  |  |  |  |





| Conducted Power of LTE Band 41(dBm) |             |         |        |        |         |         |         |  |  |  |  |
|-------------------------------------|-------------|---------|--------|--------|---------|---------|---------|--|--|--|--|
|                                     |             |         | RB     | Target | Channel | Channel | Channel |  |  |  |  |
| Bandwidth                           | Modulation  | RB size | offset | MPR    | 39725   | 40620   | 41515   |  |  |  |  |
|                                     |             |         | 0      | 0      | 21.22   | 20.41   | 21.02   |  |  |  |  |
|                                     |             | 1       | 37     | 0      | 21.29   | 20.60   | 21.10   |  |  |  |  |
|                                     |             |         | 74     | 0      | 21.31   | 20.53   | 21.01   |  |  |  |  |
|                                     | QPSK        |         | 0      | 1      | 20.04   | 19.54   | 20.00   |  |  |  |  |
|                                     |             | 37      | 19     | 1      | 20.04   | 19.54   | 20.00   |  |  |  |  |
|                                     |             |         | 38     | 1      | 20.03   | 19.54   | 20.00   |  |  |  |  |
| 458811-                             |             | 75      | 0      | 1      | 20.15   | 20.17   | 20.74   |  |  |  |  |
| 15MHz                               |             |         | 0      | 1      | 20.24   | 19.40   | 20.23   |  |  |  |  |
|                                     |             | 1       | 37     | 1      | 20.29   | 19.65   | 20.32   |  |  |  |  |
|                                     |             |         | 74     | 1      | 20.30   | 19.57   | 20.15   |  |  |  |  |
|                                     | 16QAM       |         | 0      | 2      | 20.04   | 19.54   | 20.00   |  |  |  |  |
|                                     |             | 37      | 19     | 2      | 20.03   | 19.54   | 20.00   |  |  |  |  |
|                                     |             |         | 38     | 2      | 20.03   | 19.54   | 20.01   |  |  |  |  |
|                                     |             | 75      | 0      | 2      | 19.30   | 19.30   | 19.77   |  |  |  |  |
| Bandwidth                           | Modulation  | RB size | RB     | Target | Channel | Channel | Channel |  |  |  |  |
| Balluwiutii                         | Wiodulation | ND SIZE | offset | MPR    | 39750   | 40620   | 41490   |  |  |  |  |
|                                     |             |         | 0      | 0      | 21.27   | 21.52   | 21.70   |  |  |  |  |
|                                     |             | 1       | 49     | 0      | 21.82   | 21.46   | 21.81   |  |  |  |  |
|                                     |             |         | 99     | 0      | 21.57   | 21.34   | 21.89   |  |  |  |  |
|                                     | QPSK        |         | 0      | 1      | 20.32   | 20.51   | 20.92   |  |  |  |  |
|                                     |             | 50      | 25     | 1      | 20.33   | 20.42   | 20.87   |  |  |  |  |
|                                     |             |         | 50     | 1      | 20.46   | 20.35   | 20.95   |  |  |  |  |
| 20MU-                               |             | 100     | 0      | 1      | 20.38   | 20.32   | 20.99   |  |  |  |  |
| 20MHz                               |             |         | 0      | 1      | 20.89   | 20.73   | 20.77   |  |  |  |  |
|                                     |             | 1       | 49     | 1      | 21.26   | 20.69   | 21.04   |  |  |  |  |
|                                     |             |         | 99     | 1      | 20.95   | 20.19   | 20.47   |  |  |  |  |
|                                     | 16QAM       |         | 0      | 2      | 19.47   | 19.42   | 20.00   |  |  |  |  |
|                                     |             | 50      | 25     | 2      | 19.48   | 19.42   | 20.00   |  |  |  |  |
|                                     |             |         | 50     | 2      | 19.60   | 19.36   | 19.99   |  |  |  |  |
|                                     |             | 100     | 0      | 2      | 19.56   | 19.31   | 19.90   |  |  |  |  |



Page 51 of 124

| Conducted Power of LTE Band 66(dBm) |            |         |                             |                            |   |  |   |  |  |  |  |
|-------------------------------------|------------|---------|-----------------------------|----------------------------|---|--|---|--|--|--|--|
|                                     |            |         | RB                          |                            | Channel   | Channel  | Channel   |  |  |  |  |
| Bandwidth                           | Modulation | RB size | offset                      | Target MPR                 | 131979  | 132422   | 132665  |  |  |  |  |
|                                     |            |         | 0                           | 0                          | 21.50   | 21.44  | 20.77   |  |  |  |  |
|                                     |            | 1       | 2                           | 0                          | 21.57   | 21.52  | 20.69   |  |  |  |  |
|                                     |            |         | 5                           | 0                          | 21.69   | 21.55  | 20.64   |  |  |  |  |
|                                     | QPSK       |         | 0                           | 0                          | 21.70   | 21.43  | 20.64   |  |  |  |  |
|                                     |            | 3       | 1                           | 0                          | 21.77   | 21.42  | 20.65   |  |  |  |  |
|                                     |            |         | 3                           | 0                          | 21.74   | 21.52  | 20.62   |  |  |  |  |
| 4 48411-                            |            | 6       | 0                           | 1                          | 20.77   | 20.41  | 19.87   |  |  |  |  |
| 1.4MHz                              |            |         | 0                           | 1                          | 20.39   | 20.22  | 19.84   |  |  |  |  |
|                                     |            | 1       | 2                           | 1                          | 20.59   | 20.27  | 19.82   |  |  |  |  |
|                                     |            |         | 5                           | 1                          | 20.59   | 20.27  | 19.78   |  |  |  |  |
|                                     | 16QAM      |         | 0                           | 1                          | 20.55   | 20.19  | 19.67   |  |  |  |  |
|                                     |            | 3       | 1                           | 1                          | 20.56   | 20.23  | 19.64   |  |  |  |  |
|                                     |            |         | 3                           | 1                          | 20.68   | 20.30  | 19.65   |  |  |  |  |
|                                     |            | 6       | 0                           | 2                          | 19.77   | 19.59  | 18.98   |  |  |  |  |
| Bandwidth                           | Modulation | RB size | RB                          | Target MPR                 | Channel   | Channel  | Channel   |  |  |  |  |
| Banawiath                           | Woddiation | ND 3126 | offset                      | raiget wii ix              | 131987  | 132422   | 132657  |  |  |  |  |
|                                     |            |         | 0                           | 0                          | 22.17   | 21.81  | 20.84   |  |  |  |  |
|                                     |            | 1       | 8                           | 0                          | 22.23   | 21.96  | 20.76   |  |  |  |  |
|                                     |            |         | 14                          | 0                          | 22.10   | 21.82  | 20.59   |  |  |  |  |
|                                     | QPSK       |         | 0                           | 1                          | 21.24   | 20.76  | 19.85   |  |  |  |  |
|                                     | QPSK       | 8       |                             |                            |   |  |   |  |  |  |  |
|                                     |            | 8       | 4                           | 1                          | 21.25   | 20.78  | 19.87   |  |  |  |  |
|                                     |            | 8       | 4<br>7                      | 1                          |   | 20.78<br>20.89                                     |   |  |  |  |  |
| 3MH-2                               |            | 8<br>15 |                             |                            | 21.25   |  | 19.87   |  |  |  |  |
| 3MHz                                |            |         | 7                           | 1                          | 21.25<br>21.27  | 20.89  | 19.87<br>19.78  |  |  |  |  |
| 3МНz                                |            |         | 7                           | 1                          | 21.25<br>21.27<br>21.30                                     | 20.89<br>20.79                                     | 19.87<br>19.78<br>19.80                                     |  |  |  |  |
| 3MHz                                |            | 15      | 7<br>0<br>0                 | 1<br>1<br>1                | 21.25<br>21.27<br>21.30<br>21.19                            | 20.89<br>20.79<br>20.71                            | 19.87<br>19.78<br>19.80<br>19.62                            |  |  |  |  |
| 3MHz                                | 16QAM      | 15      | 7<br>0<br>0<br>8            | 1<br>1<br>1                | 21.25<br>21.27<br>21.30<br>21.19<br>21.34                   | 20.89<br>20.79<br>20.71<br>20.85                   | 19.87<br>19.78<br>19.80<br>19.62<br>19.74                   |  |  |  |  |
| ЗМН                                 | 16QAM      | 15      | 7<br>0<br>0<br>8<br>14      | 1<br>1<br>1<br>1           | 21.25<br>21.27<br>21.30<br>21.19<br>21.34<br>21.18          | 20.89<br>20.79<br>20.71<br>20.85<br>20.71          | 19.87<br>19.78<br>19.80<br>19.62<br>19.74<br>19.51          |  |  |  |  |
| 3MHz                                | 16QAM      | 15      | 7<br>0<br>0<br>8<br>14<br>0 | 1<br>1<br>1<br>1<br>1<br>2 | 21.25<br>21.27<br>21.30<br>21.19<br>21.34<br>21.18<br>20.43 | 20.89<br>20.79<br>20.71<br>20.85<br>20.71<br>19.89 | 19.87<br>19.78<br>19.80<br>19.62<br>19.74<br>19.51<br>18.99 |  |  |  |  |



Page 52 of 124

| Conducted Power of LTE Band 66(dBm) |               |          |        |               |         |         |         |  |  |  |  |
|-------------------------------------|---------------|----------|--------|---------------|---------|---------|---------|--|--|--|--|
| Dan de dala                         | NA - ded - di | DD -:    | RB     | Townst MDD    | Channel | Channel | Channel |  |  |  |  |
| Bandwidth                           | Modulation    | RB size  | offset | Target MPR    | 131997  | 132422  | 132647  |  |  |  |  |
|                                     |               |          | 0      | 0             | 22.36   | 21.70   | 20.89   |  |  |  |  |
|                                     |               | 1        | 12     | 0             | 22.39   | 21.93   | 20.89   |  |  |  |  |
|                                     |               |          | 24     | 0             | 22.25   | 21.75   | 20.66   |  |  |  |  |
|                                     | QPSK          |          | 0      | 1             | 21.21   | 20.79   | 19.77   |  |  |  |  |
|                                     |               | 12       | 6      | 1             | 21.21   | 20.80   | 19.80   |  |  |  |  |
|                                     |               |          | 13     | 1             | 21.22   | 20.84   | 19.77   |  |  |  |  |
| 5MHz                                |               | 25       | 0      | 1             | 21.23   | 20.80   | 19.78   |  |  |  |  |
| SIVITIZ                             |               |          | 0      | 1             | 21.29   | 20.91   | 19.90   |  |  |  |  |
|                                     |               | 1        | 12     | 1             | 21.37   | 21.08   | 19.88   |  |  |  |  |
|                                     |               |          | 24     | 1             | 21.25   | 20.87   | 19.72   |  |  |  |  |
|                                     | 16QAM         |          | 0      | 2             | 20.34   | 19.91   | 18.93   |  |  |  |  |
|                                     |               | 12       | 6      | 2             | 20.34   | 19.92   | 18.94   |  |  |  |  |
|                                     |               |          | 13     | 2             | 20.34   | 20.01   | 18.91   |  |  |  |  |
|                                     |               | 25       | 0      | 2             | 20.34   | 19.93   | 18.98   |  |  |  |  |
| Bandwidth                           | Modulation    | RB size  | RB     | Target MPR    | Channel | Channel | Channel |  |  |  |  |
| Banawiani                           | Woddiation    | IND SIZE | offset | rarget wir ix | 132022  | 132422  | 132622  |  |  |  |  |
|                                     |               |          | 0      | 0             | 22.21   | 21.69   | 20.65   |  |  |  |  |
|                                     |               | 1        | 24     | 0             | 22.08   | 21.83   | 20.87   |  |  |  |  |
|                                     |               |          | 49     | 0             | 22.13   | 21.51   | 20.67   |  |  |  |  |
|                                     | QPSK          |          | 0      | 1             | 21.09   | 20.61   | 19.68   |  |  |  |  |
|                                     |               | 25       | 12     | 1             | 21.09   | 20.63   | 19.71   |  |  |  |  |
|                                     |               |          | 25     | 1             | 21.06   | 20.60   | 19.77   |  |  |  |  |
| 10MHz                               |               | 50       | 0      | 1             | 20.74   | 20.95   | 20.74   |  |  |  |  |
| 10111112                            |               |          | 0      | 1             | 21.24   | 20.59   | 19.55   |  |  |  |  |
|                                     |               | 1        | 24     | 1             | 21.22   | 20.72   | 19.74   |  |  |  |  |
|                                     |               |          | 49     | 1             | 21.23   | 20.45   | 19.55   |  |  |  |  |
|                                     | 16QAM         |          | 0      | 2             | 20.15   | 19.73   | 18.80   |  |  |  |  |
|                                     |               | 25       | 12     | 2             | 20.15   | 19.74   | 18.81   |  |  |  |  |
|                                     |               |          | 25     | 2             | 20.19   | 19.72   | 18.90   |  |  |  |  |
|                                     |               | 50       | 0      | 2             | 19.67   | 20.07   | 19.82   |  |  |  |  |



Page 53 of 124

| Conducted Power of LTE Band 66(dBm) |            |          |        |               |         |         |         |  |  |  |  |
|-------------------------------------|------------|----------|--------|---------------|---------|---------|---------|--|--|--|--|
| Decid 14th                          |            | DD .:    | RB     | T 1 MDD       | Channel | Channel | Channel |  |  |  |  |
| Bandwidth                           | Modulation | RB size  | offset | Target MPR    | 132047  | 132422  | 132597  |  |  |  |  |
|                                     |            |          | 0      | 0             | 22.19   | 21.59   | 21.12   |  |  |  |  |
|                                     |            | 1        | 38     | 0             | 22.15   | 21.78   | 20.94   |  |  |  |  |
|                                     |            |          | 74     | 0             | 21.95   | 21.57   | 20.75   |  |  |  |  |
|                                     | QPSK       |          | 0      | 1             | 21.18   | 20.69   | 19.87   |  |  |  |  |
|                                     |            | 38       | 18     | 1             | 21.17   | 20.69   | 19.86   |  |  |  |  |
|                                     |            |          | 37     | 1             | 21.16   | 20.70   | 19.86   |  |  |  |  |
| 15MHz                               |            | 75       | 0      | 1             | 20.83   | 20.88   | 20.82   |  |  |  |  |
| ISWITZ                              |            |          | 0      | 1             | 21.20   | 20.80   | 20.05   |  |  |  |  |
|                                     |            | 1        | 38     | 1             | 21.32   | 21.02   | 19.82   |  |  |  |  |
|                                     |            |          | 74     | 1             | 21.11   | 20.80   | 19.62   |  |  |  |  |
|                                     | 16QAM      |          | 0      | 2             | 21.17   | 20.69   | 19.87   |  |  |  |  |
|                                     |            | 38       | 18     | 2             | 21.16   | 20.69   | 19.86   |  |  |  |  |
|                                     |            |          | 37     | 2             | 21.16   | 20.70   | 19.86   |  |  |  |  |
|                                     |            | 75       | 0      | 2             | 19.80   | 19.92   | 19.74   |  |  |  |  |
| Bandwidth                           | Modulation | RB size  | RB     | Target MPR    | Channel | Channel | Channel |  |  |  |  |
| Bandwidth                           | Woddiation | IND SIZE | offset | raiget wii ix | 132072  | 132422  | 132572  |  |  |  |  |
|                                     |            |          | 0      | 0             | 21.77   | 21.83   | 21.68   |  |  |  |  |
|                                     |            | 1        | 49     | 0             | 22.05   | 22.45   | 21.73   |  |  |  |  |
|                                     |            |          | 99     | 0             | 21.76   | 22.38   | 21.80   |  |  |  |  |
|                                     | QPSK       |          | 0      | 1             | 20.74   | 20.87   | 20.81   |  |  |  |  |
|                                     |            | 50       | 25     | 1             | 20.74   | 21.05   | 20.86   |  |  |  |  |
|                                     |            |          | 50     | 1             | 20.91   | 21.13   | 20.90   |  |  |  |  |
| 20MHz                               |            | 100      | 0      | 1             | 20.88   | 20.94   | 20.82   |  |  |  |  |
| 20111112                            |            |          | 0      | 1             | 20.88   | 21.60   | 20.34   |  |  |  |  |
|                                     |            | 1        | 49     | 1             | 21.35   | 21.78   | 20.67   |  |  |  |  |
|                                     |            |          | 99     | 1             | 20.76   | 21.76   | 20.83   |  |  |  |  |
|                                     | 16QAM      |          | 0      | 2             | 19.96   | 20.03   | 19.96   |  |  |  |  |
|                                     |            | 50       | 25     | 2             | 19.82   | 19.98   | 20.07   |  |  |  |  |
|                                     |            |          | 50     | 2             | 19.84   | 20.07   | 19.99   |  |  |  |  |
|                                     |            | 100      | 0      | 2             | 19.76   | 20.04   | 19.90   |  |  |  |  |



Page 54 of 124

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3.3-1 of the 3GPP TS36.101.

Table 6.2.3.3-1 Maximum Power Reduction (MPR) for Power class3

| Modulation |        | Maximum F | Power Reduct | ion (MPR) for | Power[RB] |       | MPR(dB)  |
|------------|--------|-----------|--------------|---------------|-----------|-------|----------|
| Modulation | 1.4MHz | 3MHz      | 5MHz         | 10MHz         | 15MHz     | 20MHz | WIPK(UB) |
| QPSK       | >5     | >4        | >8           | >12           | >16       | >18   | ≤1       |
| 16QAM      | ≤5     | ≤4        | ≤8           | ≤12           | ≤16       | ≤18   | ≤1       |
| 16QAM      | >5     | >4        | >8           | >12           | >16       | >18   | ≤2       |

The allowed A-MPR values specified below in Table 6.2.4.3-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".3



Page 55 of 124

Table 6.2.4.3-1: Additional Maximum Power Reduction (A-MPR) / Spectrum Emission requirements

| Network         | Requirements               |                         | Channel                | Resources                            | •                          |
|-----------------|----------------------------|-------------------------|------------------------|--------------------------------------|----------------------------|
| Signaling value | (sub-clause)               | E-UTRA Band             | bandwidth<br>(MHz)     | Blocks<br>( <i>N</i> <sub>RB</sub> ) | A-MPR (dB)                 |
| NS_01           | 6.6.2.1.1                  | Table 5.2-1             | 1.4,3,5,10,15,20       | Table 5.4.2-1                        | N/A                        |
|                 |                            |                         | 3                      | >5                                   | ≤ 1                        |
|                 |                            | 2 4 40 22               | 5                      | >6                                   | ≤ 1                        |
| NS_03           | 6.6.2.2.3.1                | 2,4,10, 23,<br>25,35,36 | 10                     | >6                                   | ≤ 1                        |
|                 |                            | 25,55,56                | 15                     | >8                                   | ≤ 1                        |
|                 |                            |                         | 20                     | >10                                  | ≤ 1                        |
| NS_04           | 6.6.2.2.3.2                | 41                      | 5                      | >6                                   | ≤1                         |
| 113_04          | 0.0.2.2.3.2                | 41                      | 10, 15, 20             | Table 6                              | .2.4.3-4                   |
| NS_05           | 6.6.3.3.3.1                | 1                       | 10,15,20               | ≥ 50                                 | ≤ 1                        |
| NS_06           | 6.6.2.2.3.3                | 12, 13, 14, 17          | 1.4, 3, 5, 10          | Table 5.4.2-1                        | N/A                        |
| NS_07           | 6.6.2.2.3.3<br>6.6.3.3.3.2 | 13                      | 10                     | Table 6.2.4.3-2                      | Table 6.2.4.3-2            |
| NS_08           | 6.6.3.3.3.3                | 19                      | 10, 15                 | > 44                                 | ≤ 3                        |
| NS_09           | 6.6.3.3.3.4                | 21                      | 10, 15                 | > 40                                 | ≤1                         |
| _               |                            | 00                      | 45.00                  | > 55                                 | ≤2                         |
| NS_10           | 0.0004                     | 20                      | 15, 20                 | Table 6.2.4.3-3                      | Table 6.2.4.3-3            |
| NS_11           | 6.6.2.2.1<br>6.6.3.3.13    | 231                     | 1.4, 3, 5,<br>10,15,20 | Table 6.2.4.3-5                      | Table 6.2.4.3-5            |
| NS_12           | 6.6.3.3.5                  | 26                      | 1.4, 3, 5              | Table 6.2.4.3-6                      | Table 6.2.4.3-6            |
| NS_13           | 6.6.3.3.6                  | 26                      | 5                      | Table 6.2.4.3-7                      | Table 6.2.4.3-7            |
| NS_14           | 6.6.3.3.7                  | 26                      | 10, 15                 | Table 6.2.4.3-8                      | Table 6.2.4.3-8            |
| NS_15           | 6.6.3.3.8                  | 26                      | 1.4, 3, 5, 10, 15      | Table 6.2.4.3-9                      | Table 6.2.4.3-9,           |
| 110_10          | 0.0.3.3.0                  | 20                      | 1.4, 0, 0, 10, 10      | Table 6.2.4.3-10                     |                            |
| NS_16           | 6.6.3.3.9                  | 27                      | 3, 5, 10               |                                      | Table 6.2.4.3-12, 2.4.3-13 |
| NO 45           | 6.6.3.3.10                 | 28                      | 5, 10                  | Table 5.4.2-1                        | N/A                        |
| NS_17           | 6.6.3.3.11                 | 28                      | 5                      | ≥ 2                                  | ≤ 1                        |
| NS 18           |                            | -                       | 10, 15, 20             | <u> </u>                             | <u>≤ 4</u>                 |
| NS 19           |                            |                         | 10, 15, 20             | Table 6.2.4.3-15                     |                            |
| NS_20           |                            |                         | 5, 10, 15, 20          | Table 6.2.4.3-14                     |                            |
|                 |                            |                         | , -, -, -              |                                      |                            |
| NS_20           | -                          | -                       | -                      | -                                    | -                          |
| _               |                            | l                       | 1                      |                                      |                            |



Page 56 of 124

# 13. TEST RESULTS

# 13.1. SAR Test Results Summary

13.1.1. Test position and configuration

Face up SAR was performed with the device configured in the positions according to IEEE 1528-2013, Body-worn SAR was performed with the device 0cm from the phantom.

## 13.1.2. Operation Mode

- 1. Per KDB 447498 D01 v06 ,for each exposure position, if the highest 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional.
- 2. Per KDB 865664 D01 v01r04,for each frequency band, if the measured SAR is ≥ 0.8W/kg, testing for repeated SAR measurement is required, that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
  - (1) When the original highest measured SAR is  $\geq$ 0.8W/kg, repeat that measurement once.
  - (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is ≥1.45 W/kg.
  - (3) Perform a third repeated measurement only if the original, first and second repeated measurement is ≥ 1.5 W/kg and ratio of largest to smallest SAR for the original, first and second measurement is ≥ 1.20.
- 3. Per KDB 648474 D04 v01r03,when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤1.2W/kg, SAR testing with a headset connected is not required.
- 4. Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows: Maximum Scaling SAR =tested SAR (Max.) ×[maximum turn-up power (mw)/ maximum measurement output power(mw)]
- 5. Proximity sensor, just for avoiding the wrong operation in the phone screen when call, and has no influence on output power or SAR result
- 6. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1RB allocation using the RB offset and required test channel combination with highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- 7. Per KDB 941125 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
- 8. Per KDB 941125 D05v02r05. For QPSK with 100% RB allocation. SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1RB allocation and the highest reported SAR is >1.45 W/kg, the remaining required test channels must also be tested.
- 9. Per KDB 941125 D05v02r05. 16QAM output power for each RB allocation configuration is not 1/2 dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤1.45W/kg, Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
- 10. Per KDB 941125 D05v02r05. Smaller bandwidth output power for each RB allocation configuration is >not 1/2 dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤1.45W/kg. Per KDB 941125 D05v02r05, smaller bandwidth SAR testing is not required.



Page 57 of 124

# 13.1.3. Test Result

| SAR N  | MEASUR     | EMENT                                 |                     |                |          |          |                 |                |                      |                      |                   |               |        |
|--------|------------|---------------------------------------|---------------------|----------------|----------|----------|-----------------|----------------|----------------------|----------------------|-------------------|---------------|--------|
| Depth  | of Liquid  | (cm):>15                              |                     |                | Relative | Humidity | / (%): 56.4     |                |                      |                      |                   |               |        |
| Produ  | ct: 4G Glo | bal Walkie-Tal                        | kie                 |                |          |          |                 |                |                      |                      |                   |               |        |
| Test M | lode: LTE  | Band 2                                |                     |                |          |          |                 |                |                      |                      |                   |               |        |
| ВМ     |            |                                       | Test M              | ode            |          | Freq.    | Power           | SAR            | Max.<br>Tune         | Meas.                | Tune-up           | Scaled        | Limit  |
| MHz    | MOD        | Position                              | UL RB<br>Allocation | UL RB<br>START | Ch.      | (MHz)    | Drift<br>(<±5%) | (1g)<br>(W/kg) | up<br>Power<br>(dBm) | output<br>Power(dBm) | Scaling<br>factor | SAR<br>(W/kg) | (W/kg) |
| 20     | QPSK       | Back Touch<br>+Belt Clip +<br>headset | 1                   | 0              | 18900    | 1880     | -0.31           | 0.287          | 22.70                | 21.12                | 1.439             | 0.413         | 1.6    |
|        |            | Face up                               | 1                   | 0              | 18900    | 1880     | 0.12            | 0.310          | 22.70                | 21.12                | 1.439             | 0.446         | 1.6    |

#### Note:

· When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

| SAR N  | //EASURI                         | EMENT                                 |                     |                |          |          |                 |                |                |                      |                   |               |        |
|--------|----------------------------------|---------------------------------------|---------------------|----------------|----------|----------|-----------------|----------------|----------------|----------------------|-------------------|---------------|--------|
| Depth  | of Liquid                        | (cm):>15                              |                     |                | Relative | Humidity | (%): 59.3       |                |                |                      |                   |               |        |
| Produ  | Product: 4G Global Walkie-Talkie |                                       |                     |                |          |          |                 |                |                |                      |                   |               |        |
| Test M | lode: LTE                        | Band 4                                |                     |                |          |          |                 |                |                |                      |                   |               |        |
| ВМ     | MOD                              | Danisian                              | Test Mode           |                | Freq.    |          | Freq. Power     |                | Max.<br>Tuneup | Meas.                | Tune-up           | Scaled        | Limit  |
| MHz    | MOD                              | Position                              | UL RB<br>Allocation | UL RB<br>START | Ch.      | (MHz)    | Drift<br>(<±5%) | (1g)<br>(W/kg) | Power<br>(dBm) | output<br>Power(dBm) | Scaling<br>factor | SAR<br>(W/kg) | (W/kg) |
| 20     | QPSK                             | Back Touch<br>+Belt Clip +<br>headset | 1                   | 0              | 20175    | 1732.5   | -0.37           | 0.272          | 22.50          | 21.86                | 1.159             | 0.315         | 1.6    |
|        |                                  | Face up                               | 1                   | 0              | 20175    | 1732.5   | 0.04            | 0.164          | 22.50          | 21.86                | 1.159             | 0.190         | 1.6    |

#### Note:

· When the 1-g Reported SAR is  $\leq$  0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

| SAR I  | MEASUR     | EMENT                                 |                     |                |          |          |                |             |                |                 |                    |               |        |
|--------|------------|---------------------------------------|---------------------|----------------|----------|----------|----------------|-------------|----------------|-----------------|--------------------|---------------|--------|
| Depth  | of Liquid  | (cm):>15                              |                     |                | Relative | Humidity | (%): 60.2      |             |                |                 |                    |               |        |
| Produ  | ct: 4G Glo | obal Walkie-Ta                        | lkie                |                |          |          |                |             |                |                 |                    |               |        |
| Test M | lode: LTE  | Band 5                                |                     |                |          |          |                |             |                |                 |                    |               |        |
| вм     | MOD        | Position                              | Test M              | ode            | Ch.      | Freq.    | Power<br>Drift | SAR<br>(1g) | Max.<br>Tuneup | Meas.<br>output | Tune-up<br>Scaling | Scaled<br>SAR | Limit  |
| MHz    | WIOD       | Position                              | UL RB<br>Allocation | UL RB<br>START | CII.     | (MHz)    | (<±5%)         | (W/kg)      | Power<br>(dBm) | Power(dBm)      | factor             | (W/kg)        | (W/kg) |
| 10     | QPSK       | Back Touch<br>+Belt Clip +<br>headset | 1                   | 0              | 20525    | 836.5    | 0.19           | 0.264       | 21.70          | 21.47           | 1.054              | 0.278         | 1.6    |
|        |            | Face up                               | 1                   | 0              | 20525    | 836.5    | -0.10          | 0.139       | 21.70          | 21.47           | 1.054              | 0.147         | 1.6    |

# Note:

· When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.



Page 58 of 124

| SAR I  | /IEASUR    | EMENT                                 |                     |                |          |          |                |                |                |                      |                |               |        |
|--------|------------|---------------------------------------|---------------------|----------------|----------|----------|----------------|----------------|----------------|----------------------|----------------|---------------|--------|
| Depth  | of Liquid  | (cm):>15                              |                     |                | Relative | Humidity | (%): 59.4      |                |                |                      |                |               |        |
| Produ  | ct: 4G Glo | bal Walkie-Ta                         | lkie                |                |          |          |                |                |                |                      |                |               |        |
| Test M | lode: LTE  | Band 7                                |                     |                |          |          |                |                |                |                      |                |               |        |
| вм     | MOD        | Docition                              | Test M              | ode            | Ch.      | Freq.    | Power<br>Drift | SAR            | Max.<br>Tuneup | Meas.                | Tune-up        | •             | Limit  |
| MHz    | WIOD       | Position                              | UL RB<br>Allocation | UL RB<br>START | Cn.      | (MHz)    | (<±5%)         | (1g)<br>(W/kg) | Power<br>(dBm) | output<br>Power(dBm) | Scaling factor | SAR<br>(W/kg) | (W/kg) |
| 20     | QPSK       | Back Touch<br>+Belt Clip +<br>headset | 1                   | 0              | 21100    | 2535     | -0.25          | 0.207          | 22.50          | 21.92                | 1.143          | 0.237         | 1.6    |
|        |            | Face up                               | 1                   | 0              | 21100    | 2535     | 0.20           | 0.550          | 22.50          | 21.92                | 1.143          | 0.629         | 1.6    |

#### Note:

· When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

| SAR I  | MEASUR                           | EMENT                                 |                     |                |       |       |                |                |                |                      |                   |               |        |
|--|----------------------------------|---------------------------------------|---------------------|----------------|-------|-------|----------------|----------------|----------------|----------------------|-------------------|---------------|--------|
| Depth of Liquid (cm):>15 Relative Humidity (%): 54.1 |                                  |                                       |                     |                |       |       |                |                |                |                      |                   |               |        |
| Produ  | Product: 4G Global Walkie-Talkie |                                       |                     |                |       |       |                |                |                |                      |                   |               |        |
| Test M   | lode: LTE                        | Band 12                               |                     |                |       |       |                |                |                |                      |                   |               |        |
| ВМ   | MOD                              | Position                              | Test M              | ode            | O.b.  | Freq. | Power<br>Drift | SAR            | Max.<br>Tuneup | Meas.                | Tune-up           | Scaled<br>SAR | Limit  |
| MHz  | WIOD                             | Position                              | UL RB<br>Allocation | UL RB<br>START | Ch.   | (MHz) | (<±5%)         | (1g)<br>(W/kg) | Power<br>(dBm) | output<br>Power(dBm) | Scaling<br>factor | (W/kg)        | (W/kg) |
| 10   | QPSK                             | Back Touch<br>+Belt Clip +<br>headset | 1                   | 0              | 23095 | 707.5 | -0.63          | 0.101          | 22.40          | 21.99                | 1.099             | 0.111         | 1.6    |
|  |                                  | Face up                               | 1                   | 0              | 23095 | 707.5 | 0.93           | 0.075          | 22.40          | 21.99                | 1.099             | 0.082         | 1.6    |

#### Note:

· When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

| SAR I  | MEASUR                 | EMENT                                 |                     |                |          |          |                |                |                |                      |                    |               |        |
|--------|------------------------|---------------------------------------|---------------------|----------------|----------|----------|----------------|----------------|----------------|----------------------|--------------------|---------------|--------|
| Depth  | of Liquid              | (cm):>15                              |                     |                | Relative | Humidity | (%): 54.1      |                |                |                      |                    |               |        |
| Produ  | ct: 4G Glo             | obal Walkie-Tal                       | kie                 |                |          |          |                |                |                |                      |                    |               |        |
| Test M | Test Mode: LTE Band 13 |                                       |                     |                |          |          |                |                |                |                      |                    |               |        |
| вм     | MOD                    | Position                              | Test M              | ode            | Ch.      | Freq.    | Power<br>Drift | SAR<br>(1g)    | Max.<br>Tuneup | Meas.                | Tune-up<br>Scaling | Scaled<br>SAR | Limit  |
| MHz    | WIOD                   | Position                              | UL RB<br>Allocation | UL RB<br>START | CII.     | (MHz)    | (<±5%)         | (1g)<br>(W/kg) | Power<br>(dBm) | output<br>Power(dBm) | factor             | (W/kg)        | (W/kg) |
| 10     | QPSK                   | Back Touch<br>+Belt Clip +<br>headset | 1                   | 0              | 23230    | 782      | -0.37          | 0.213          | 22.10          | 21.47                | 1.156              | 0.246         | 1.6    |
|        |                        | Face up                               | 1                   | 0              | 23230    | 782      | 0.22           | 0.145          | 22.10          | 21.47                | 1.156              | 0.168         | 1.6    |

### Note:

· When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.



Report No.: AGC16919250401FH01 Page 59 of 124

| SAR I  | MEASUR     | EMENT                                 |                     |                |          |          |                 |                |                |                      |                   |               |        |
|--------|------------|---------------------------------------|---------------------|----------------|----------|----------|-----------------|----------------|----------------|----------------------|-------------------|---------------|--------|
| Depth  | of Liquid  | (cm):>15                              |                     |                | Relative | Humidity | / (%): 54.1     |                |                |                      |                   |               |        |
| Produ  | ct: 4G Glo | obal Walkie-Tal                       | kie                 |                |          |          |                 |                |                |                      |                   |               |        |
| Test M | lode: LTE  | E Band 17                             |                     |                |          |          |                 |                |                |                      |                   |               |        |
| ВМ     | MOD        | D M                                   | Test M              | ode            | O.       | Freq.    | Power           | SAR            | Max.<br>Tuneup | Meas.                | Tune-up           | Scaled        | Limit  |
| MHz    | MOD        | Position                              | UL RB<br>Allocation | UL RB<br>START | Ch.      | (MHz)    | Drift<br>(<±5%) | (1g)<br>(W/kg) | Power<br>(dBm) | output<br>Power(dBm) | Scaling<br>factor | SAR<br>(W/kg) | (W/kg) |
| 10     | QPSK       | Back Touch<br>+Belt Clip +<br>headset | 1                   | 0              | 23790    | 710      | 0.62            | 0.204          | 22.10          | 21.17                | 1.239             | 0.253         | 1.6    |
|        |            | Face up                               | 1                   | 0              | 23790    | 710      | -0.24           | 0.127          | 22.10          | 21.17                | 1.239             | 0.157         | 1.6    |

#### Note:

· When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

| SAR I                            | MEASURI   | EMENT                                 |                     |                |          |          |                 |                |                |                      |                   |        |        |
|----------------------------------|-----------|---------------------------------------|---------------------|----------------|----------|----------|-----------------|----------------|----------------|----------------------|-------------------|--------|--------|
| Depth                            | of Liquid | (cm):>15                              |                     |                | Relative | Humidity | (%): 59.4       |                |                |                      |                   |        |        |
| Product: 4G Global Walkie-Talkie |           |                                       |                     |                |          |          |                 |                |                |                      |                   |        |        |
| Test Mode: LTE Band 38           |           |                                       |                     |                |          |          |                 |                |                |                      |                   |        |        |
|                                  |           |                                       |                     |                |          | Tune-up  | Scaled<br>SAR   | Limit          |                |                      |                   |        |        |
| MHz                              | MOD       | Position                              | UL RB<br>Allocation | UL RB<br>START | Ch.      | (MHz)    | Drift<br>(<±5%) | (1g)<br>(W/kg) | Power<br>(dBm) | output<br>Power(dBm) | Scaling<br>factor | (W/kg) | (W/kg) |
| 20                               | QPSK      | Back Touch<br>+Belt Clip +<br>headset | 1                   | 0              | 38000    | 2595     | 0.15            | 0.099          | 21.70          | 21.07                | 1.156             | 0.114  | 1.6    |
|                                  |           | Face up                               | 1                   | 0              | 38000    | 2595     | -0.04           | 0.184          | 21.70          | 21.07                | 1.156             | 0.213  | 1.6    |

### Note:

· When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

| SAR I  | /IEASUR                          | EMENT                                 |                     |                |          |          |                |                |                |                      |                |               |        |
|--------|----------------------------------|---------------------------------------|---------------------|----------------|----------|----------|----------------|----------------|----------------|----------------------|----------------|---------------|--------|
| Depth  | of Liquid                        | (cm):>15                              |                     |                | Relative | Humidity | (%): 52.4      |                |                |                      |                |               |        |
| Produ  | ct: 4G Glo                       | bal Walkie-Tal                        | kie                 |                |          |          |                |                |                |                      |                |               |        |
| Test M | est Mode: LTE Band 40-Lower Side |                                       |                     |                |          |          |                |                |                |                      |                |               |        |
| BW     | MOD                              | Position                              | Test M              | ode            | Ch.      | Freq.    | Power<br>Drift | SAR            | Max.<br>Tuneup | Meas.                | Tune-up        | Scaled<br>SAR | Limit  |
| MHz    | IVIOD                            | Position                              | UL RB<br>Allocation | UL RB<br>START | CII.     | (MHz)    | (<±5%)         | (1g)<br>(W/kg) | Power<br>(dBm) | output<br>Power(dBm) | Scaling factor | (W/kg)        | (W/kg) |
| 10     | QPSK                             | Back Touch<br>+Belt Clip +<br>headset | 1                   | 0              | 38750    | 2310     | 0.09           | 0.073          | 23.50          | 22.84                | 1.164          | 0.085         | 1.6    |
|        |                                  | Face up                               | 1                   | 0              | 38750    | 2310     | -0.29          | 0.106          | 23.50          | 22.84                | 1.164          | 0.123         | 1.6    |

#### Note:

· When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.



Page 60 of 124

| SAR I  | MEASUR     | EMENT                                 |                     |                |          |           |                |                |                |                      |                |               |        |
|--------|------------|---------------------------------------|---------------------|----------------|----------|-----------|----------------|----------------|----------------|----------------------|----------------|---------------|--------|
| Depth  | of Liquid  | (cm):>15                              |                     |                | Relative | e Humidit | y (%): 52.4    |                |                |                      |                |               |        |
| Produ  | ct: 4G Glo | obal Walkie-Ta                        | lkie                |                |          |           |                |                |                |                      |                |               |        |
| Test M | lode: LTE  | Band 40- Upp                          | oer Side            |                |          |           |                |                |                |                      |                |               |        |
| BW     | MOD        | Position                              | Test M              | ode            | Ch.      | Freq.     | Power<br>Drift | SAR            | Max.<br>Tuneup | Meas.                | Tune-up        | Scaled        | Limit  |
| MHz    | WIOD       | Position                              | UL RB<br>Allocation | UL RB<br>START | Cn.      | (MHz)     | (<±5%)         | (1g)<br>(W/kg) | Power<br>(dBm) | output<br>Power(dBm) | Scaling factor | SAR<br>(W/kg) | (W/kg) |
| 10     | QPSK       | Back Touch<br>+Belt Clip +<br>headset | 1                   | 0              | 39200    | 2355      | -0.31          | 0.073          | 22.90          | 22.16                | 1.186          | 0.087         | 1.6    |
|        |            | Face up                               | 1                   | 0              | 39200    | 2355      | 0.23           | 0.106          | 22.90          | 22.16                | 1.186          | 0.126         | 1.6    |

#### Note:

<sup>·</sup> When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

| SAR I   | //EASUR    | EMENT                                 |                     |                |          |          |                 |                |                |                      |                   |               |        |
|---|------------|---------------------------------------|---------------------|----------------|----------|----------|-----------------|----------------|----------------|----------------------|-------------------|---------------|--------|
| Depth   | of Liquid  | (cm):>15                              |                     |                | Relative | Humidity | (%): 59.4       |                |                |                      |                   |               |        |
| Produ   | ct: 4G Glo | bal Walkie-Tal                        | kie                 |                |          |          |                 |                |                |                      |                   |               |        |
| Test Mode: LTE Band 41  |            |                                       |                     |                |          |          |                 |                |                |                      |                   |               |        |
| BW MOD Besition Test Mode Freq. Power SAR Max. Tune-up Scaled L |            |                                       |                     |                |          | Limit    |                 |                |                |                      |                   |               |        |
| MHz   | MOD        | Position                              | UL RB<br>Allocation | UL RB<br>START | Ch.      | (MHz)    | Drift<br>(<±5%) | (1g)<br>(W/kg) | Power<br>(dBm) | output<br>Power(dBm) | Scaling<br>factor | SAR<br>(W/kg) | (W/kg) |
| 20  | QPSK       | Back Touch<br>+Belt Clip +<br>headset | 1                   | 0              | 40620    | 2593     | -0.08           | 0.102          | 21.90          | 21.52                | 1.091             | 0.111         | 1.6    |
|   |            | Face up                               | 1                   | 0              | 40620    | 2593     | 0.36            | 0.186          | 21.90          | 21.52                | 1.091             | 0.203         | 1.6    |

### Note:

 $<sup>\</sup>cdot$  When the 1-g Reported SAR is  $\leq$  0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.

| SAR I  | /IEASURI   | EMENT                                    |                     |                |          |          |                |                |                |                      |                    |               |        |
|--------|------------|--|---------------------|----------------|----------|----------|----------------|----------------|----------------|----------------------|--------------------|---------------|--------|
| Depth  | of Liquid  | (cm):>15                                 |                     |                | Relative | Humidity | (%): 59.3      |                |                |                      |                    |               |        |
| Produ  | ct: LTE sr | nartphone                                |                     |                |          |          |                |                |                |                      |                    |               |        |
| Test M | lode: LTE  | Band 66                                  |                     |                |          |          |                |                |                |                      |                    |               |        |
| BW     | MOD        | Position                                 | Test M              | ode            | Ch.      | Freq.    | Power<br>Drift | SAR            | Max.<br>Tuneup | Meas.                | Tune-up<br>Scaling | Scaled<br>SAR | Limit  |
| MHz    | IVIOD      | Position                                 | UL RB<br>Allocation | UL RB<br>START | CII.     | (MHz)    | (<±5%)         | (1g)<br>(W/kg) | Power<br>(dBm) | output<br>Power(dBm) | factor             | (W/Kg)        | (W/kg) |
| 20     | QPSK       | Back<br>Touch<br>+Belt Clip<br>+ headset | 1                   | 0              | 132422   | 1755     | -0.09          | 0.334          | 22.50          | 21.83                | 1.167              | 0.390         | 1.6    |
|        |            | Face up                                  | 1                   | 0              | 132422   | 1755     | 0.21           | 0.199          | 22.50          | 21.83                | 1.167              | 0.232         | 1.6    |

### Note:

<sup>·</sup> When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.



Page 61 of 124

# APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab Date: Apr. 13, 2025

System Check Head 750 MHz

DUT: Dipole 750 MHz Type: SID 750

Communication System CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1; Conv.F=2.04 Frequency: 750 MHz; Medium parameters used: f = 750 MHz;  $\sigma = 0.91$  mho/m;  $\epsilon r = 42.14$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ( $^{\circ}$ ):21.2, Liquid temperature ( $^{\circ}$ ): 20.9

# SATIMO Configuration:


Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

· Sensor-Surface: 4mm (Mechanical Surface Detection)

Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

Configuration/System Check 750MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check 750MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

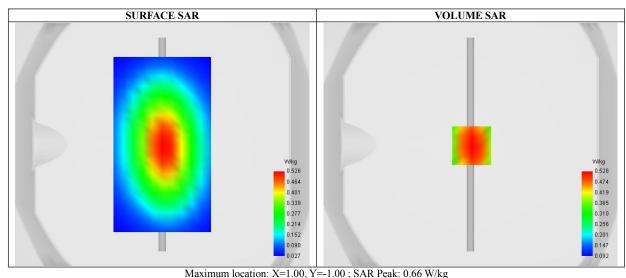


| SAR 10g (W/Kg) | 0.365 |
| SAR 1g (W/Kg) | 0.509 |
| Variation (%) | -2.120 |
| Horizontal validation criteria: minimum distance (mm) | -1.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%) | 75.646701


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.662 | 0.528 | 0.399 | 0.303 | 0.233 | 0.178 | 0.139 |

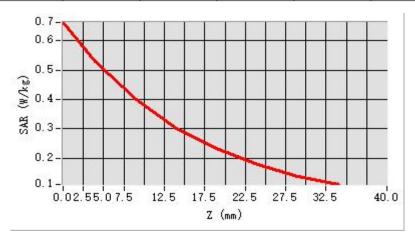

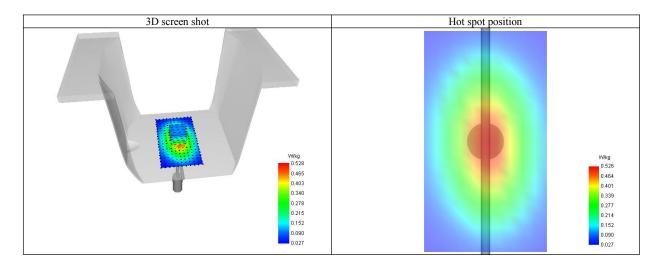

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Date: Apr. 14, 2025

Page 63 of 124

# Test Laboratory: AGC Lab System Check Head 835 MHz

DUT: Dipole 835 MHz Type: SID 835

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=1.89 Frequency: 835 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.89$  mho/m;  $\epsilon r = 40.52$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C):21.3, Liquid temperature (°C): 20.8

### SATIMO Configuration:


Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

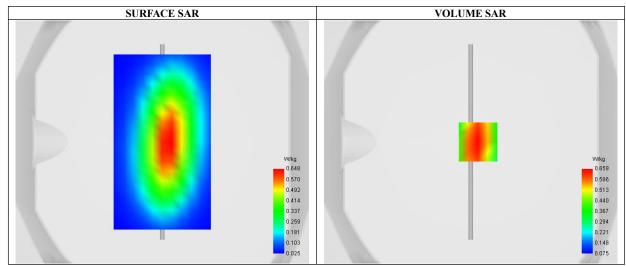



Maximum location: X=6.00, Y=0.00; SAR Peak: 0.91 W/kg

| SAR 10g (W/Kg)  | 0.410     |
|---|-----------|
| SAR 1g (W/Kg)   | 0.631     |
| Variation (%)   | -0.170    |
| Horizontal validation criteria: minimum distance (mm) | 17.888544 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 67.389971 |
|   |           |



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.911 | 0.659 | 0.444 | 0.311 | 0.223 | 0.165 | 0.124 |

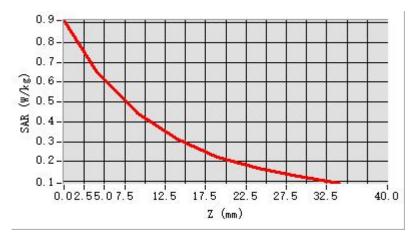

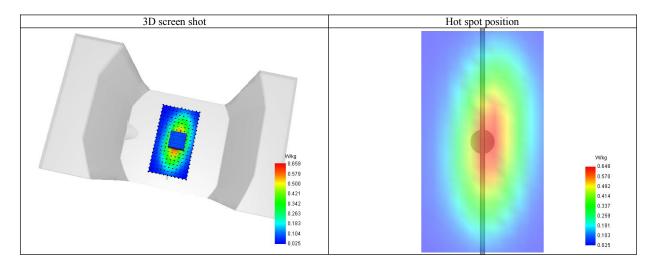



Date: Apr. 19, 2025

Page 65 of 124

Test Laboratory: AGC Lab System Check Head 1750MHz

DUT: Dipole 1800 MHz; Type: SID 1800

Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=2.28 Frequency: 1750 MHz; Medium parameters used: f = 1750 MHz;  $\sigma = 1.34 \text{ mho/m}$ ;  $\epsilon r = 39.32$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C): 21.3, Liquid temperature (°C): 21.1

# SATIMO Configuration:


Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V5.3.15.8

Configuration/System Check 1750MHz Head/Area Scan: Measurement grid: dx=8mm,dy=8mm Configuration/System Check 1750MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

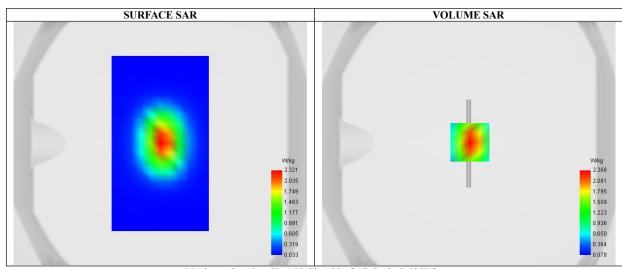

 Maximum location: X=1.00, Y=1.00 ; SAR Peak: 3.68 W/kg

 SAR 10g (W/Kg)
 1.185

 SAR 1g (W/Kg)
 2.224


 Variation (%)
 -2.140


 Horizontal validation criteria: minimum distance (mm)
 16.000000

 Vertical validation criteria: SAR ratio M2/M1 (%)
 56.966537



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 3.666 | 2.368 | 1.349 | 0.798 | 0.483 | 0.302 | 0.198 |

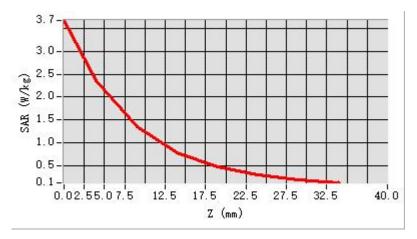

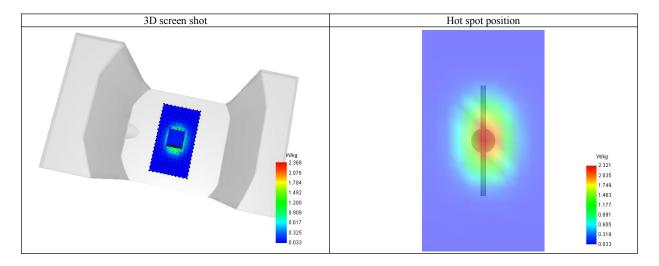



Date: Apr. 18, 2025

Page 67 of 124

Test Laboratory: AGC Lab System Check Head 1900MHz

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=2.08 Frequency: 1900 MHz; Medium parameters used: f = 1900 MHz;  $\sigma = 1.37$  mho/m;  $\epsilon r = 41.28$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C):21.2, Liquid temperature (°C): 20.7

### SATIMO Configuration:


Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

Configuration/System Check 1900MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check 1900MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

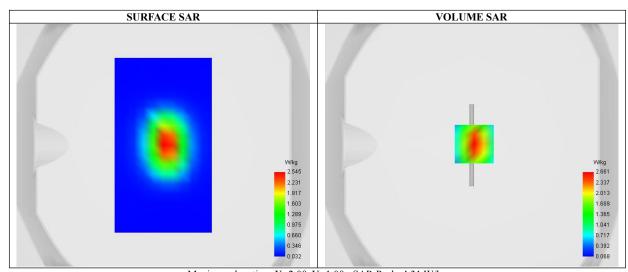

 Maximum location: X=2.00, Y=1.00; SAR Peak: 4.31 W/kg

 SAR 10g (W/Kg)
 1.261

 SAR 1g (W/Kg)
 2.509

 Variation (%)
 -1.900

 Horizontal validation criteria: minimum distance (mm)
 16.000000


 Vertical validation criteria: SAR ratio M2/M1 (%)
 52.760923


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 4.318 | 2.661 | 1.404 | 0.773 | 0.431 | 0.256 | 0.160 |

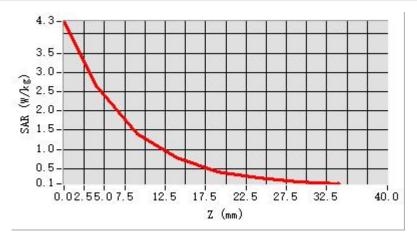

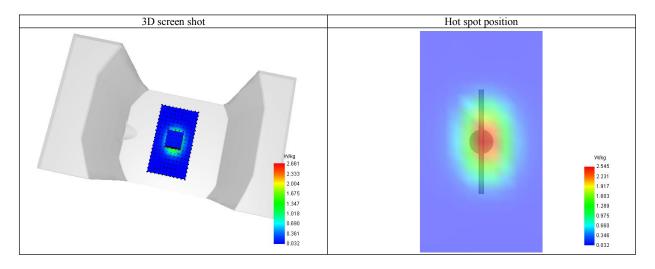

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Date: Apr. 16, 2025

Page 69 of 124

# Test Laboratory: AGC Lab System Check Head 2300 MHz

DUT: Dipole 2300 MHz Type: SID 2300

Communication System CW; Communication System Band: D2300 (2300.0 MHz); Duty Cycle: 1:1; Conv.F=2.20 Frequency: 2300 MHz; Medium parameters used: f = 2300 MHz;  $\sigma = 1.66 \text{ mho/m}$ ;  $\epsilon r = 38.92$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C): 20.7, Liquid temperature (°C): 20.5

### **SATIMO Configuration**


Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V5.3.15.8

Configuration/System Check 2300MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/System Check 2300MHz Head/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

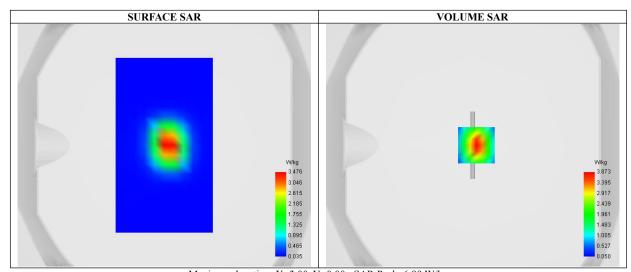

 Maximum location: X=3.00, Y=0.00 ; SAR Peak: 6.99 W/kg

 SAR 10g (W/Kg)
 1.484

 SAR 1g (W/Kg)
 3.408


 Variation (%)
 -0.920


 Horizontal validation criteria: minimum distance (mm)
 10.000000

 Vertical validation criteria: SAR ratio M2/M1 (%)
 42.434803



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 7.117 | 3.873 | 1.644 | 0.746 | 0.360 | 0.183 | 0.106 |

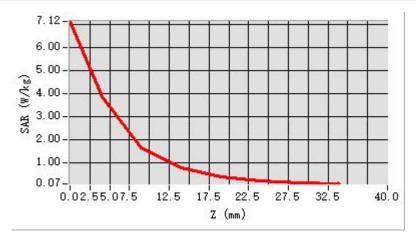

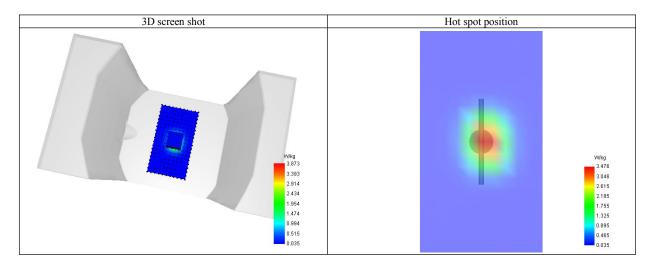



Date: Apr. 15, 2025

Page 71 of 124

Test Laboratory: AGC Lab System Check Head 2600MHz

DUT: Dipole 2600 MHz; Type: SID 2600

Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1; Conv.F=2.06 Frequency: 2600 MHz; Medium parameters used: f = 2600 MHz;  $\sigma = 1.93$  mho/m;  $\epsilon r = 38.74$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C): 21.2, Liquid temperature (°C): 20.9

### **SATIMO Configuration:**


Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

Configuration/System Check 2600 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm Configuration/System Check 2600 Head/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

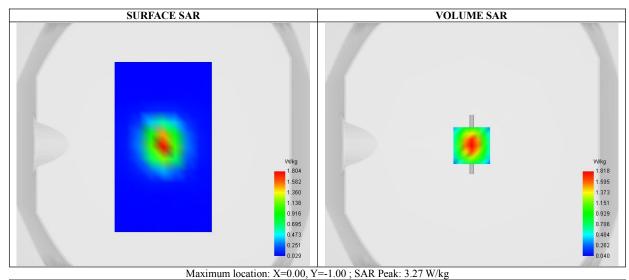


| SAR 10g (W/Kg) | 0.739 |
| SAR 1g (W/Kg) | 1.683 |
| Variation (%) | -2.690 |
| Horizontal validation criteria: minimum distance (mm) | 14.142136 |
| Vertical validation criteria: SAR ratio M2/M1 (%) | 43.122860 |


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 3.311 | 1.818 | 0.784 | 0.357 | 0.175 | 0.097 | 0.064 |

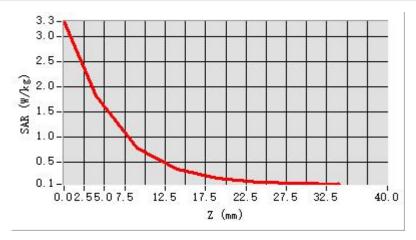

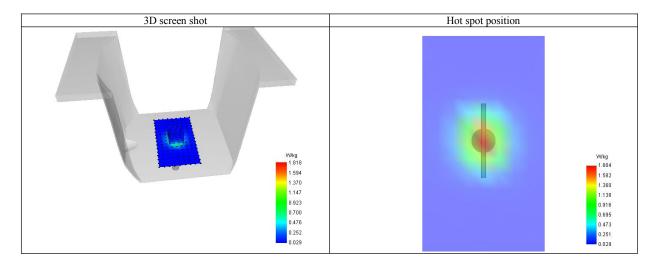

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 73 of 124

# APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab Date: Apr. 18, 2025

LTE Band 2 Mid-Body-Back Touch with all accessories (1 RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.08; Frequency:1880MHz; Medium parameters used: f = 1900 MHz;  $\sigma = 1.35$  mho/m;  $\epsilon = 41.68$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.2, Liquid temperature ( $^{\circ}$ C): 20.7

## SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

• Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE Band 2 Mid-Body-Back Touch with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

**Configuration/ LTE Band 2 Mid-Body-Back Touch with all accessories/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5m;


| Area Scan       | surf_sam_plan.txt, h= 5.00 mm   |  |  |  |  |
|-----------------|---------------------------------|--|--|--|--|
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm      |  |  |  |  |
| Phantom         | Validation plane                |  |  |  |  |
| Device Position | Back Touch with all accessories |  |  |  |  |
| Band            | LTE Band 2                      |  |  |  |  |
| Channels        | Middle                          |  |  |  |  |
| Signal          | OFDM (Crest factor: 1.0)        |  |  |  |  |

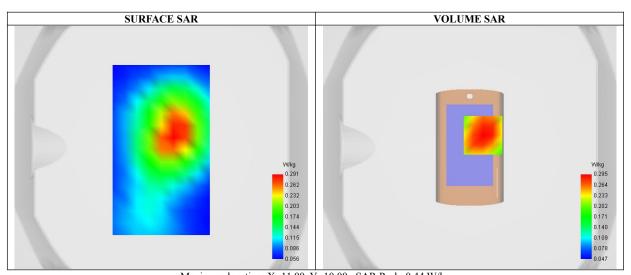


| Maximum location: $X=11.00$ ,                         | Y=10.00; SAR Peak: 0.44 W/kg |
|---|------------------------------|
| SAR 10g (W/Kg)  | 0.178                        |
| SAR 1g (W/Kg)   | 0.287                        |
| Variation (%)   | -4.580                       |
| Horizontal validation criteria: minimum distance (mm) | -1.000000                    |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 62 458631                    |



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.438 | 0.295 | 0.184 | 0.125 | 0.089 | 0.071 | 0.057 |



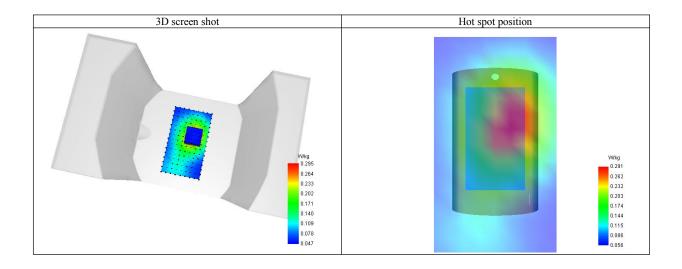



Page 75 of 124

Test Laboratory: AGC Lab Date: Apr. 18, 2025

**LTE Band 2 Mid-Face Up 2.5cm (1 RB#0)**DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.08; Frequency:1880MHz; Medium parameters used: f = 1900 MHz;  $\sigma = 1.35 \text{ mho/m}$ ;  $\epsilon = 41.68$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ ): 21.2, Liquid temperature ( $^{\circ}$ ): 20.7

#### SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE Band 2 Mid-Face Up 2.5cm/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 2 Mid-Face Up 2.5cm/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

| Area Scan       | surf_sam_plan.txt, h= 5.00 mm |  |  |  |
|-----------------|-------------------------------|--|--|--|
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm    |  |  |  |
| Phantom         | Validation plane              |  |  |  |
| Device Position | Face Up                       |  |  |  |
| Band            | LTE Band 2                    |  |  |  |
| Channels        | Middle                        |  |  |  |
| Signal          | OFDM (Crest factor: 1.0)      |  |  |  |

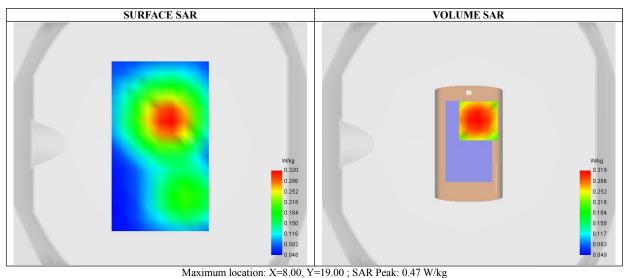



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.453 | 0.319 | 0.207 | 0.140 | 0.100 | 0.078 | 0.065 |



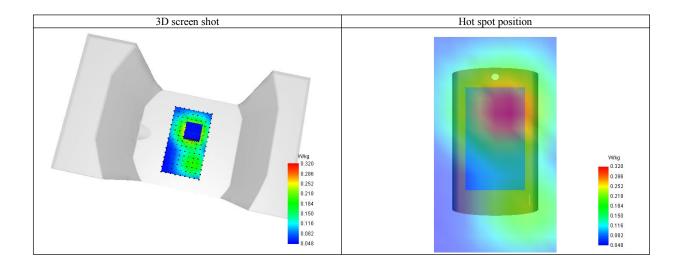



Page 77 of 124

Test Laboratory: AGC Lab Date: Apr. 19, 2025

LTE Band 4 Mid-Body-Back Touch with all accessories (1 RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.28; Frequency:1732.5 MHz; Medium parameters used: f = 1750 MHz;  $\sigma = 1.32 \text{ mho/m}$ ;  $\epsilon = 40.83$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ ): 21.3, Liquid temperature ( $^{\circ}$ ): 21.1

## **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE Band 4 Mid-Body-Back Touch with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

**Configuration/ LTE Band 4 Mid-Body-Back Touch with all accessories/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5m;


| Area Scan       | surf_sam_plan.txt, h= 5.00 mm   |  |  |  |
|-----------------|---------------------------------|--|--|--|
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm      |  |  |  |
| Phantom         | Validation plane                |  |  |  |
| Device Position | Back Touch with all accessories |  |  |  |
| Band            | LTE Band 4                      |  |  |  |
| Channels        | Middle                          |  |  |  |
| Signal          | OFDM (Crest factor: 1.0)        |  |  |  |

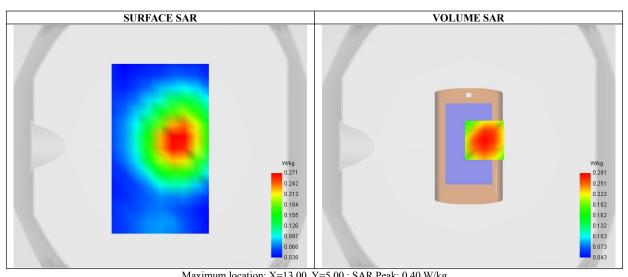


| Waxiiidii location. A=15.00,                          | 1-3.00, SAK I cak. 0.40 W/kg |
|---|------------------------------|
| SAR 10g (W/Kg)  | 0.177                        |
| SAR 1g (W/Kg)   | 0.272                        |
| Variation (%)   | -2.230                       |
| Horizontal validation criteria: minimum distance (mm) | 22.627417                    |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 65.493071                    |
|   |                              |



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.402 | 0.281 | 0.184 | 0.130 | 0.093 | 0.075 | 0.059 |



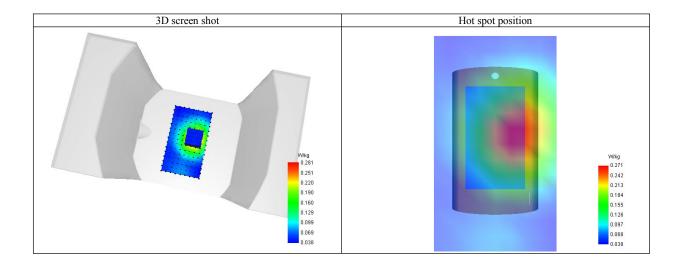



Page 79 of 124

Test Laboratory: AGC Lab Date: Apr. 19, 2025

**LTE Band 4 Mid-Face Up 2.5cm (1 RB#0)**DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.28; Frequency:1732.5 MHz; Medium parameters used: f = 1750 MHz;  $\sigma = 1.32$  mho/m;  $\epsilon = 40.83$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.3, Liquid temperature ( $^{\circ}$ C): 21.1

#### SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8


Configuration/ LTE Band 4 Mid-Face Up 2.5cm/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 Mid-Face Up 2.5cm/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

| Area Scan       | surf_sam_plan.txt, h= 5.00 mm |  |  |  |
|-----------------|-------------------------------|--|--|--|
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm    |  |  |  |
| Phantom         | Validation plane              |  |  |  |
| Device Position | Face Up                       |  |  |  |
| Band            | LTE Band 4                    |  |  |  |
| Channels        | Middle                        |  |  |  |
| Signal          | OFDM (Crest factor: 1.0)      |  |  |  |

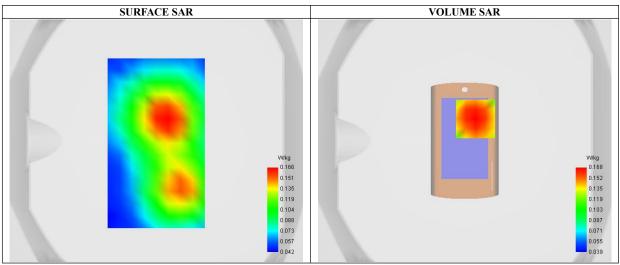


| Maximum location: X=9.00, Y                           | Maximum location: X=9.00, Y=18.00; SAR Peak: 0.24 W/kg |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|
| SAR 10g (W/Kg)  | 0.112  |  |  |  |  |  |  |
| SAR 1g (W/Kg)   | 0.164  |  |  |  |  |  |  |
| Variation (%)   | -2.670   |  |  |  |  |  |  |
| Horizontal validation criteria: minimum distance (mm) | -1.000000  |  |  |  |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 68.005831  |  |  |  |  |  |  |


| Z (mm) | 0.00 | 4.00 | 9.00 | 14.00 | 19.00 | 24.00 | 29.00 |
|--------|------|------|------|-------|-------|-------|-------|





| SAI | R (W/Kg) | 0.236 | 0.168 | 0.114 | 0.086 | 0.069 | 0.056 | 0.050 |
|-----|----------|-------|-------|-------|-------|-------|-------|-------|
|     |          |       |       |       |       |       |       |       |



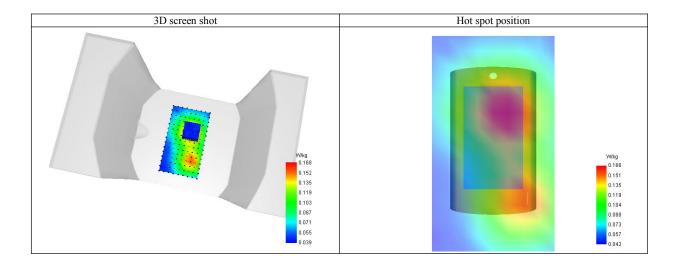



Page 81 of 124

Test Laboratory: AGC Lab Date: Apr. 14, 2025

LTE Band 5 Mid-Body-Back Touch with all accessories (1 RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=1.89 Frequency:836.5 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.91$ mho/m;  $\epsilon r = 39.86$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ ): 21.3, Liquid temperature ( $^{\circ}$ ): 20.8

#### SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE Band 5 Mid-Body-Back Touch with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

**Configuration/ LTE Band 5 Mid-Body-Back Touch with all accessories/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5m;

| Area Scan       | surf_sam_plan.txt, h= 5.00 mm   |
|-----------------|---------------------------------|
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm      |
| Phantom         | Validation plane                |
| Device Position | Back Touch with all accessories |
| Band            | LTE Band 5                      |
| Channels        | Middle                          |
| Signal          | OFDM (Crest factor: 1.0)        |

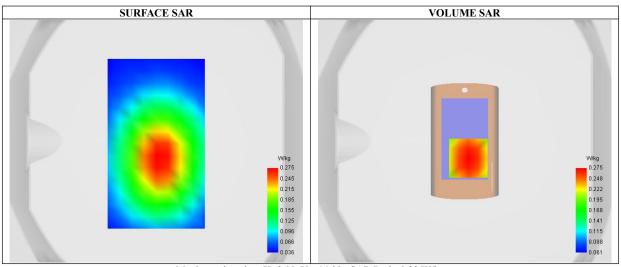

 Maximum location: X=3.00, Y=-14.00 ; SAR Peak: 0.33 W/kg

 SAR 10g (W/Kg)
 0.197

 SAR 1g (W/Kg)
 0.264

 Variation (%)
 -2.140


 Horizontal validation criteria: minimum distance (mm)
 -1.000000


 Vertical validation criteria: SAR ratio M2/M1 (%)
 77.829866

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.331 | 0.275 | 0.214 | 0.167 | 0.131 | 0.106 | 0.089 |



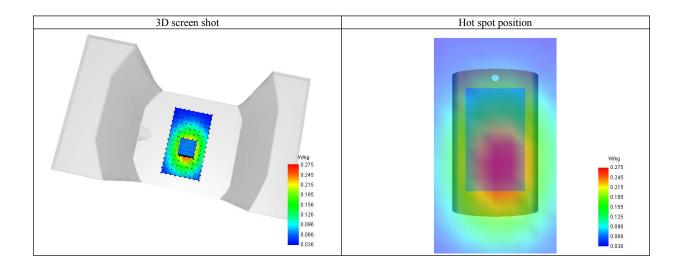

Web: http://www.agccert.com/



Page 83 of 124

Test Laboratory: AGC Lab Date: Apr. 14, 2025

**LTE Band 5 Mid-Face Up 2.5cm (1 RB#0)**DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=1.89 Frequency:836.5 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.91$ mho/m;  $\epsilon r = 39.86$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ ): 21.3, Liquid temperature ( $^{\circ}$ ): 20.8

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8


Configuration/ LTE Band 5 Mid-Face Up 2.5cm/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 5 Mid-Face Up 2.5cm/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

| Area Scan                | surf_sam_plan.txt, h= 5.00 mm |  |  |
|--------------------------|-------------------------------|--|--|
| Zoom Scan                | 5x5x7,dx=8mm dy=8mm dz=5mm    |  |  |
| Phantom Validation plane |                               |  |  |
| Device Position          | Face Up                       |  |  |
| Band                     | LTE Band 5                    |  |  |
| Channels Middle          |                               |  |  |
| Signal                   | OFDM (Crest factor: 1.0)      |  |  |

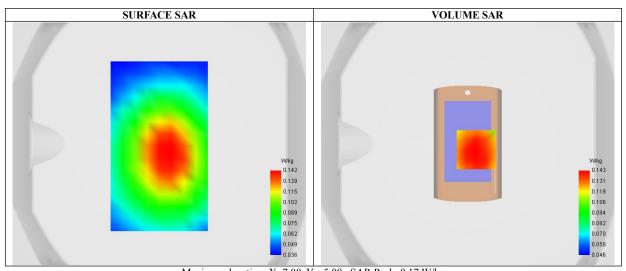


| Maximum location: X=7.00, Y=-5.00; SAR Peak: 0.17 W/kg |           |  |  |  |  |
|--|-----------|--|--|--|--|
| SAR 10g (W/Kg)   | 0.108     |  |  |  |  |
| SAR 1g (W/Kg)  | 0.139     |  |  |  |  |
| Variation (%)  | -0.810    |  |  |  |  |
| Horizontal validation criteria: minimum distance (mm)  | -1.000000 |  |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)      | 81.137317 |  |  |  |  |


| Z (mm) | 0.00 | 4.00 | 9.00 | 14.00 | 19.00 | 24.00 | 29.00 |
|--------|------|------|------|-------|-------|-------|-------|





SAR (W/Kg) 0.164 0.143 0.116 0.094 0.077 0.064 0.058



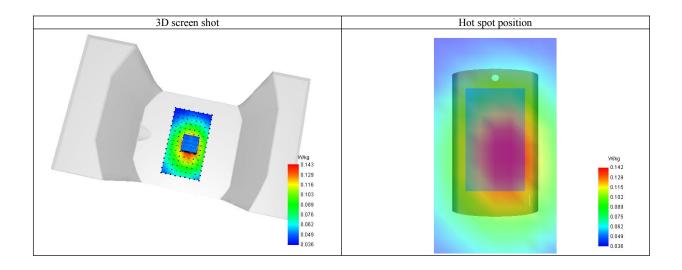

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 85 of 124

Test Laboratory: AGC Lab Date: Apr. 15, 2025

LTE Band 7 Mid-Body-Back Touch with all accessories (1RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.06 Frequency: 2535MHz; Medium parameters used: f = 2600 MHz;  $\sigma = 1.86 \text{ mho/m}$ ;  $\epsilon = 40.13$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.2, Liquid temperature ( $^{\circ}$ C): 20.9

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

**Configuration/ LTE BAND 7 Mid-Body-Back Touch with all accessories /Area Scan:** Measurement grid: dx=10mm, y=10mm

**Configuration/ LTE BAND 7 Mid-Body-Back Touch with all accessories /Zoom Scan:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

| Area Scan surf_sam_plan.txt, h= 5.00 mn |                                 |  |  |
|---|---------------------------------|--|--|
| ZoomScan                                | 7x7x7,dx=5mm dy=5mm dz=5mm      |  |  |
| Phantom Validation plane                |                                 |  |  |
| Device Position                         | Back Touch with all accessories |  |  |
| Band                                    | LTE BAND 7                      |  |  |
| Channels                                | Middle                          |  |  |
| Signal                                  | OFDM (Crest factor: 1.0)        |  |  |

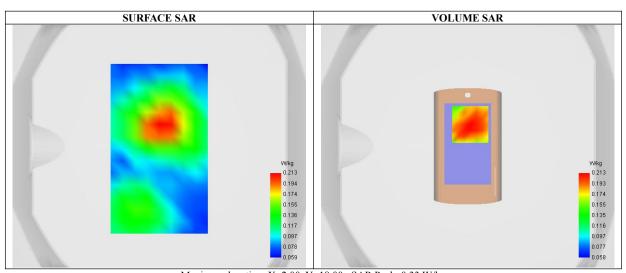



| Maximum location: X=2.00, Y=18.00; SAR Peak: 0.33 W/kg |           |  |  |  |  |
|--|-----------|--|--|--|--|
| SAR 10g (W/Kg)   | 0.137     |  |  |  |  |
| SAR 1g (W/Kg)  | 0.207     |  |  |  |  |
| Variation (%)  | 1.100     |  |  |  |  |
| Horizontal validation criteria: minimum distance (mm)  | -1.000000 |  |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)      | 61 072655 |  |  |  |  |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.330 | 0.213 | 0.130 | 0.097 | 0.080 | 0.077 | 0.074 |



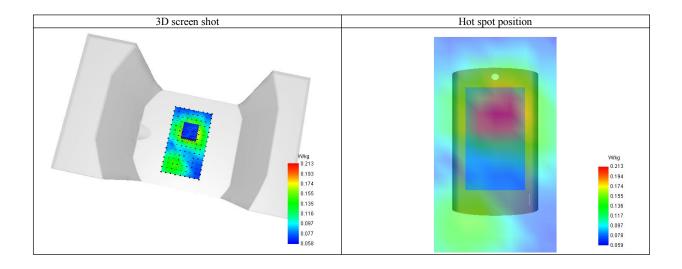



Page 87 of 124

Test Laboratory: AGC Lab Date: Apr. 15, 2025

LTE Band 7 Mid-Face Up 2.5cm (1RB#0) DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=2.06 Frequency: 2535MHz; Medium parameters used: f = 2600 MHz;  $\sigma = 1.86 \text{ mho/m}$ ;  $\epsilon r = 40.13$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ ): 21.2, Liquid temperature ( $^{\circ}$ ): 20.9

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE BAND 7 Mid-Face Up 2.5cm /Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 7 Mid-Face Up 2.5cm /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm


| Area Scan surf_sam_plan.txt, h= 5.00 mm |                             |  |  |
|---|-----------------------------|--|--|
| ZoomScan                                | 7x7x7,dx=5mm dy=5mm dz=5mm  |  |  |
| Phantom Validation plane                |                             |  |  |
| Device Position                         | Face Up                     |  |  |
| Band                                    | LTE BAND 7                  |  |  |
| Channels                                | Middle                      |  |  |
| Signal                                  | al OFDM (Crest factor: 1.0) |  |  |

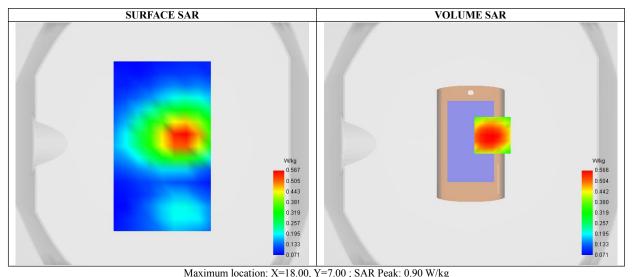


|   | 1 7.00 , STITET CARE 0.50 177118 |
|---|----------------------------------|
| SAR 10g (W/Kg)  | 0.321                            |
| SAR 1g (W/Kg)   | 0.550                            |
| Variation (%)   | -1.100                           |
| Horizontal validation criteria: minimum distance (mm) | 21.213203                        |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 56.373571                        |

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.891 | 0.566 | 0.319 | 0.195 | 0.137 | 0.099 | 0.095 |





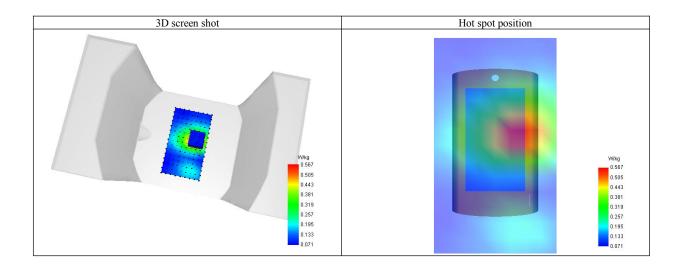



Page 89 of 124

Test Laboratory: AGC Lab Date: Apr. 13, 2025

LTE Band 12 Mid-Body-Back Touch with all accessories (1 RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=2.04; Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz;  $\sigma = 0.88$  mho/m;  $\epsilon = 43.06$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.2, Liquid temperature ( $^{\circ}$ C): 20.9

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

**Configuration/ LTE Band 12 Mid-Body-Back Touch with all accessories/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/ LTE Band 12 Mid-Body-Back Touch with all accessories/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5m;


| Area Scan                       | surf_sam_plan.txt, h= 5.00 mm   |  |
|---------------------------------|---------------------------------|--|
| Zoom Scan                       | 5x5x7,dx=8mm dy=8mm dz=5mm      |  |
| Phantom                         | Validation plane                |  |
| Device Position                 | Back Touch with all accessories |  |
| Band                            | LTE Band 12                     |  |
| Channels                        | Middle                          |  |
| Signal OFDM (Crest factor: 1.0) |                                 |  |

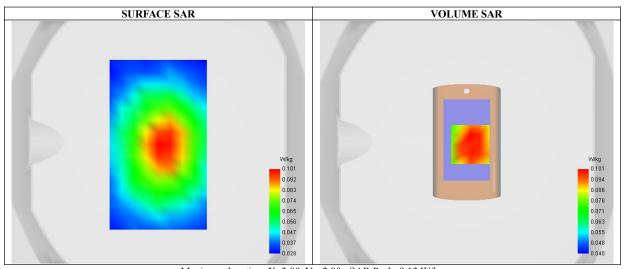


| Maximum location: X=3.00, Y=-2.00; SAR Peak: 0.13 W/kg |           |  |  |  |  |
|--|-----------|--|--|--|--|
| SAR 10g (W/Kg)   | 0.077     |  |  |  |  |
| SAR 1g (W/Kg)  | 0.101     |  |  |  |  |
| Variation (%)  | -2.980    |  |  |  |  |
| Horizontal validation criteria: minimum distance (mm)  | -1.000000 |  |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)      | 80.313813 |  |  |  |  |



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.127 | 0.101 | 0.081 | 0.067 | 0.063 | 0.052 | 0.050 |



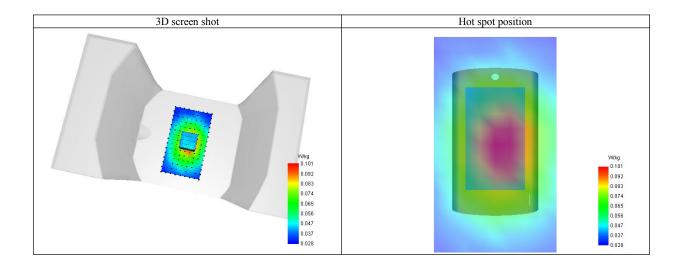



Page 91 of 124

Test Laboratory: AGC Lab Date: Apr. 13, 2025

**LTE Band 12 Mid-Face Up 2.5cm (1 RB#0)**DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=2.04; Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz;  $\sigma = 0.88$  mho/m;  $\epsilon = 43.06$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.2, Liquid temperature ( $^{\circ}$ C): 20.9

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE Band 12 Mid-Face Up 2.5cm/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 12 Mid-Face Up 2.5cm/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

| Area Scan       | surf_sam_plan.txt, h= 5.00 mm |  |  |
|-----------------|-------------------------------|--|--|
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm    |  |  |
| Phantom         | Validation plane              |  |  |
| Device Position | Face Up                       |  |  |
| Band            | LTE Band 12                   |  |  |
| Channels        | Middle                        |  |  |
| Signal          | OFDM (Crest factor: 1.0)      |  |  |

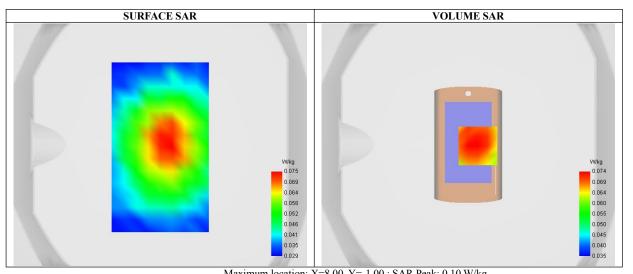



| Waxiiiuiii location. A=8.00, 1                        | 1.00 , SAK Peak. 0.10 W/kg |
|---|----------------------------|
| SAR 10g (W/Kg)  | 0.058                      |
| SAR 1g (W/Kg)   | 0.075                      |
| Variation (%)   | 1.080                      |
| Horizontal validation criteria: minimum distance (mm) | -1.000000                  |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 87.966631                  |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.081 | 0.074 | 0.065 | 0.057 | 0.050 | 0.043 | 0.041 |



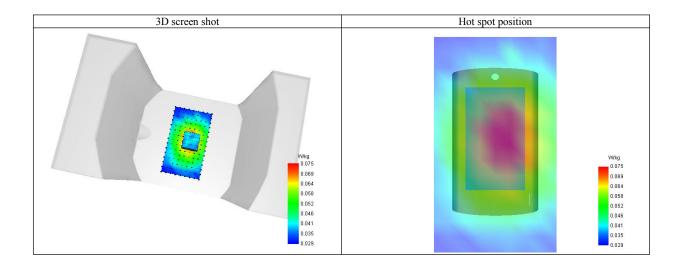

Web: http://www.agccert.com/



Page 93 of 124

Test Laboratory: AGC Lab Date: Apr. 13, 2025

LTE Band 13 Mid-Body-Back Touch with all accessories (1 RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=2.04; Frequency: 782 MHz; Medium parameters used: f = 750 MHz;  $\sigma = 0.92$  mho/m;  $\epsilon = 41.30$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.2, Liquid temperature ( $^{\circ}$ C): 20.9

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V5.3.15.8

**Configuration/ LTE Band 13 Mid-Body-Back Touch with all accessories/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/ LTE Band 13 Mid-Body-Back Touch with all accessories/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5m;


| Area Scan       | surf_sam_plan.txt, h= 5.00 mm   |
|-----------------|---------------------------------|
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm      |
| Phantom         | Validation plane                |
| Device Position | Back Touch with all accessories |
| Band            | LTE Band 13                     |
| Channels        | Middle                          |
| Signal          | OFDM (Crest factor: 1.0)        |

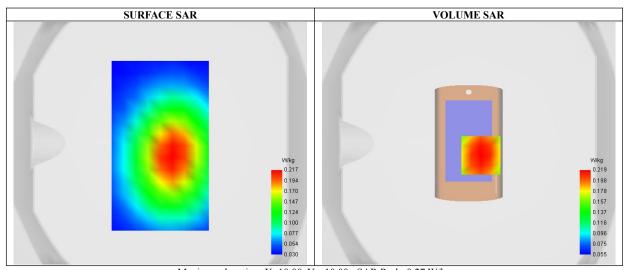


| Maximum location: $X=10.00$ , $Y=-10.00$ ; SAR Peak: $0.27 \text{ W/kg}$ |           |  |  |  |  |
|--|-----------|--|--|--|--|
| SAR 10g (W/Kg)   | 0.160     |  |  |  |  |
| SAR 1g (W/Kg)  | 0.213     |  |  |  |  |
| Variation (%)  | -0.870    |  |  |  |  |
| Horizontal validation criteria: minimum distance (mm)                    | -1.000000 |  |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)                        | 78.600334 |  |  |  |  |



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.270 | 0.219 | 0.172 | 0.138 | 0.112 | 0.089 | 0.074 |



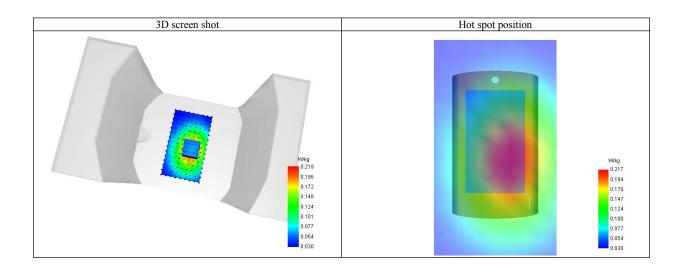



Page 95 of 124

Test Laboratory: AGC Lab Date: Apr. 13, 2025

**LTE Band 13 Mid-Face Up 2.5cm (1 RB#0)**DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=2.04; Frequency: 782 MHz; Medium parameters used: f = 750 MHz;  $\sigma = 0.92$  mho/m;  $\epsilon = 41.30$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.2, Liquid temperature ( $^{\circ}$ C): 20.9

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE Band 13 Mid-Face Up 2.5cm/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 13 Mid-Face Up 2.5cm/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


| Area Scan       | surf_sam_plan.txt, h= 5.00 mm |  |  |
|-----------------|-------------------------------|--|--|
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm    |  |  |
| Phantom         | Validation plane              |  |  |
| Device Position | Face Up                       |  |  |
| Band            | LTE Band 13                   |  |  |
| Channels        | Middle                        |  |  |
| Signal          | OFDM (Crest factor: 1.0)      |  |  |

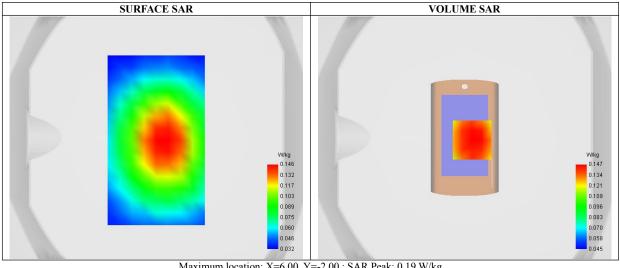


| Maximum location: X=6.00, Y=-2.00; SAR Peak: 0.19 W/kg |           |  |  |  |  |
|--|-----------|--|--|--|--|
| SAR 10g (W/Kg)   | 0.112     |  |  |  |  |
| SAR 1g (W/Kg)  | 0.145     |  |  |  |  |
| Variation (%)  | 0.170     |  |  |  |  |
| Horizontal validation criteria: minimum distance (mm)  | -1.000000 |  |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)      | 82.373865 |  |  |  |  |

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.170 | 0.147 | 0.121 | 0.098 | 0.079 | 0.069 | 0.057 |





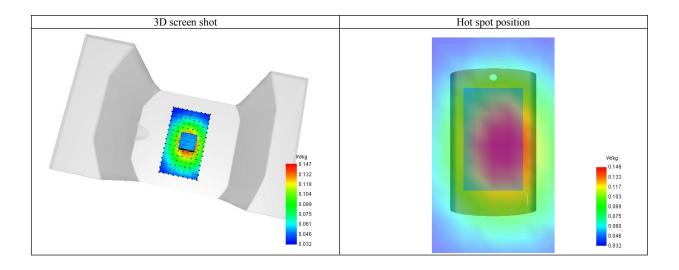



Page 97 of 124

Test Laboratory: AGC Lab Date: Apr. 13, 2025

LTE Band 17 Mid-Body-Back Touch with all accessories (1 RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 17; Duty Cycle:1:1; Conv.F=2.04; Frequency: 710 MHz; Medium parameters used: f = 750 MHz;  $\sigma = 0.89$  mho/m;  $\epsilon = 42.66$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.2, Liquid temperature ( $^{\circ}$ C): 20.9

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V5.3.15.8

**Configuration/ LTE Band 17 Mid-Body-Back Touch with all accessories/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/ LTE Band 17 Mid-Body-Back Touch with all accessories/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5m;


| Area Scan       | surf_sam_plan.txt, h= 5.00 mm   |
|-----------------|---------------------------------|
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm      |
| Phantom         | Validation plane                |
| Device Position | Back Touch with all accessories |
| Band            | LTE Band 17                     |
| Channels        | Middle                          |
| Signal          | OFDM (Crest factor: 1.0)        |

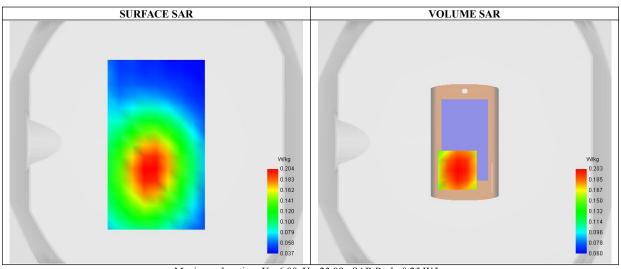


| Maximum location: X=-6.00, Y=-23.00; SAR Peak: 0.25 W/kg |           |  |  |  |
|--|-----------|--|--|--|
| SAR 10g (W/Kg)   | 0.156     |  |  |  |
| SAR 1g (W/Kg)  | 0.204     |  |  |  |
| Variation (%)  | -9.910    |  |  |  |
| Horizontal validation criteria: minimum distance (mm)    | -1.000000 |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)        | 79.927004 |  |  |  |



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.249 | 0.203 | 0.162 | 0.134 | 0.111 | 0.092 | 0.077 |



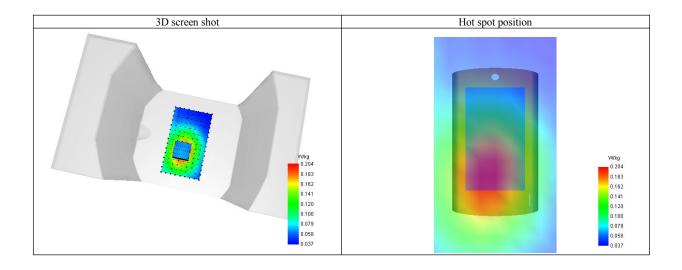



Page 99 of 124

Test Laboratory: AGC Lab Date: Apr. 13, 2025

**LTE Band 17 Mid-Face Up 2.5cm (1 RB#0)**DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 17; Duty Cycle:1:1; Conv.F=2.04; Frequency: 710 MHz; Medium parameters used: f = 750 MHz;  $\sigma = 0.89$  mho/m;  $\epsilon = 42.66$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.2, Liquid temperature ( $^{\circ}$ C): 20.9

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8


Configuration/ LTE Band 17 Mid-Face Up 2.5cm/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 17 Mid-Face Up 2.5cm/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

| Area Scan                            | surf_sam_plan.txt, h= 5.00 mm |  |  |
|--------------------------------------|-------------------------------|--|--|
| Zoom Scan 5x5x7,dx=8mm dy=8mm dz=5mm |                               |  |  |
| Phantom                              | Validation plane              |  |  |
| Device Position                      | Face Up                       |  |  |
| Band                                 | LTE Band 17                   |  |  |
| Channels                             | Middle                        |  |  |
| Signal                               | OFDM (Crest factor: 1.0)      |  |  |

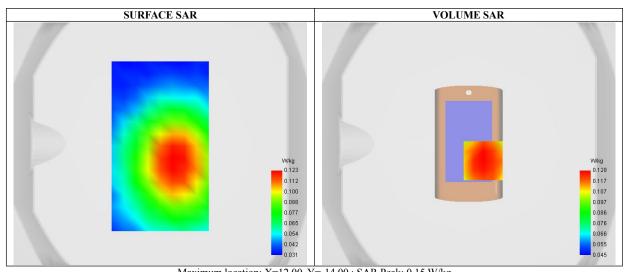


| Maximum location: X=12.00, Y=-14.00; SAR Peak: 0.15 W/kg |           |  |  |  |
|--|-----------|--|--|--|
| SAR 10g (W/Kg)   | 0.100     |  |  |  |
| SAR 1g (W/Kg)  | 0.127     |  |  |  |
| Variation (%)  | -1.250    |  |  |  |
| Horizontal validation criteria: minimum distance (mm)    | -1.000000 |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)        | 81.033483 |  |  |  |


| _ |        |      |      |      |       |       |       |       |
|---|--------|------|------|------|-------|-------|-------|-------|
|   | Z (mm) | 0.00 | 4.00 | 9.00 | 14.00 | 19.00 | 24.00 | 29.00 |





SAR (W/Kg) 0.151 0.128 0.103 0.088 0.072 0.064 0.056



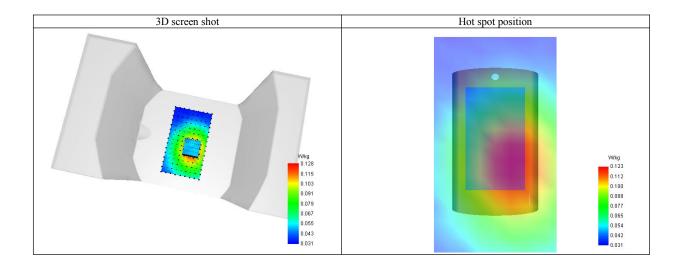



Page 101 of 124

Test Laboratory: AGC Lab Date: Apr. 15, 2025

LTE Band 38 Mid-Body-Back Touch with all accessories (1RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 38; Duty Cycle:1:1.58; Conv.F=2.06 Frequency: 2595MHz; Medium parameters used: f =2600 MHz;  $\sigma$ =1.91 mho/m;  $\epsilon$ r =39.27;  $\rho$ = 1000 kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.2, Liquid temperature ( $^{\circ}$ C): 20.9

#### SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V5.3.15.8


Configuration/ LTE BAND 38 Mid-Body-Back Touch with all accessories /Area Scan: Measurement grid:

dx=10mm, y=10mm

Configuration/ LTE BAND 38 Mid-Body-Back Touch with all accessories /Zoom Scan: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

| Area Scan       | surf_sam_plan.txt, h= 5.00 mm   |  |  |
|-----------------|---------------------------------|--|--|
| ZoomScan        | 7x7x7,dx=5mm dy=5mm dz=5mm      |  |  |
| Phantom         | Validation plane                |  |  |
| Device Position | Back Touch with all accessories |  |  |
| Band            | LTE BAND 38                     |  |  |
| Channels        | Middle                          |  |  |
| Signal          | Crest factor: 1.58              |  |  |

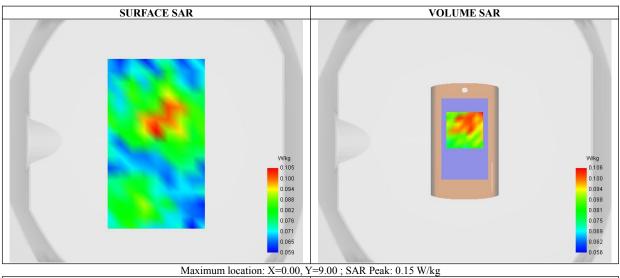


| Waxiiiuiii locatioii. A=0.00, i                       | 1-9.00, SAR I Cak. 0.13 W/kg |
|---|------------------------------|
| SAR 10g (W/Kg)  | 0.059                        |
| SAR 1g (W/Kg)   | 0.099                        |
| Variation (%)   | -8.690                       |
| Horizontal validation criteria: minimum distance (mm) | -1.000000                    |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 80.229743                    |


| Z (mm) | 0.00 | 4.00 | 9.00 | 14.00 | 19.00 | 24.00 | 29.00 |
|--------|------|------|------|-------|-------|-------|-------|





SAR (W/Kg) 0.173 0.106 0.064 0.074 0.060 0.071 0.073



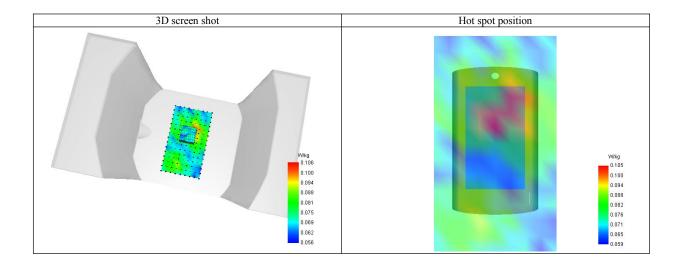



Page 103 of 124

Test Laboratory: AGC Lab Date: Apr. 15, 2025

LTE Band 38 Mid-Face Up 2.5cm (1RB#0) DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 38; Duty Cycle:1:1.58; Conv.F=2.06 Frequency: 2595MHz; Medium parameters used: f =2600 MHz;  $\sigma$ =1.91 mho/m;  $\epsilon$ r =39.27;  $\rho$ = 1000 kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.2, Liquid temperature ( $^{\circ}$ C): 20.9

#### SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE BAND 38 Mid-Face Up 2.5cm /Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 38 Mid-Face Up 2.5cm /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm


| Area Scan       | surf sam plan.txt, h= 5.00 mm |  |  |
|-----------------|-------------------------------|--|--|
| ZoomScan        | 7x7x7,dx=5mm dy=5mm dz=5mm    |  |  |
| Phantom         | Validation plane              |  |  |
| Device Position | Face Up                       |  |  |
| Band            | LTE BAND 38                   |  |  |
| Channels        | Middle                        |  |  |
| Signal          | Crest factor: 1.58            |  |  |

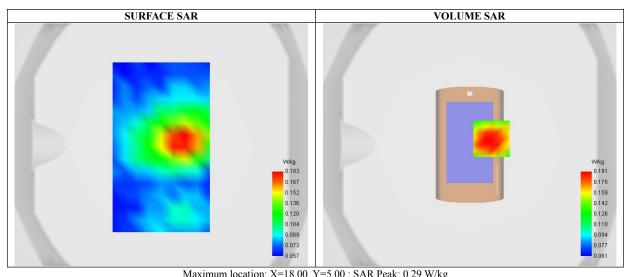


| Wiaximum location: A 16.00,                           | 1 5.00 , SAR 1 car. 0.27 W/kg |
|---|-------------------------------|
| SAR 10g (W/Kg)  | 0.120                         |
| SAR 1g (W/Kg)   | 0.184                         |
| Variation (%)   | 2.090                         |
| Horizontal validation criteria: minimum distance (mm) | -1.000000                     |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 64.350480                     |



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.298 | 0.191 | 0.121 | 0.091 | 0.079 | 0.080 | 0.070 |



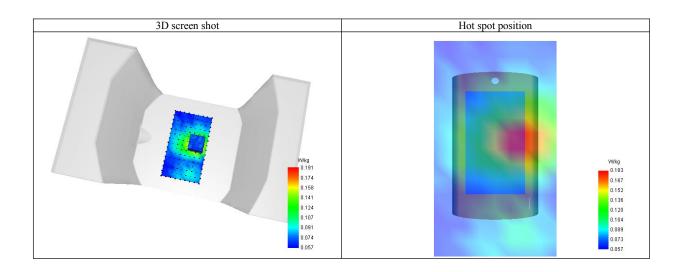



Page 105 of 124

Test Laboratory: AGC Lab Date: Apr. 16, 2025

LTE Band 40- Lower Side Mid-Body- Back Touch with all accessories (1 RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 40-Upper Side; Duty Cycle:1:1.58;

Conv.F=2.20

Frequency: 2310 MHz; Medium parameters used: f = 2300 MHz;  $\sigma = 1.68$  mho/m;  $\epsilon r = 38.42$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.7, Liquid temperature (°C): 20.5

### SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom


• Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE Band 40- Lower Side Mid-Body- Back Touch with all accessories/Area Scan: Measurement qrid: dx=8mm, dy=8mm

Configuration/ LTE Band 40- Lower Side Mid-Body- Back Touch with all accessories/Zoom Scan:

Measurement grid: dx=8mm, dy=8mm, dz=5mm;


| Area Scan                                       | surf_sam_plan.txt, h= 5.00 mm |  |  |
|---|-------------------------------|--|--|
| <b>Zoom Scan</b> 7x7x7,dx=5mm dy=5mm dz=5mm     |                               |  |  |
| Phantom Validation plane                        |                               |  |  |
| Device Position Back Touch with all accessories |                               |  |  |
| Band  | LTE Band 40- Lower Side       |  |  |
| Channels  | Middle                        |  |  |
| Signal Crest factor: 1.58                       |                               |  |  |

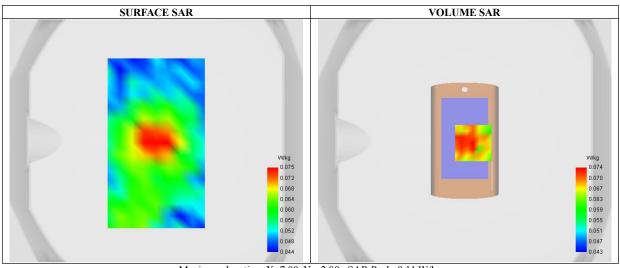


|                             | Maximum location: X=7.00, Y=-2.00; SAR Peak: 0.11 W/kg |           |  |  |  |
|-----------------------------|--|-----------|--|--|--|
|                             | SAR 10g (W/Kg)   | 0.051     |  |  |  |
| SAR 1g (W/Kg) Variation (%) |  | 0.073     |  |  |  |
|                             |  | -6.390    |  |  |  |
| Ī                           | Horizontal validation criteria: minimum distance (mm)  | -1.000000 |  |  |  |
| ı                           | Vertical validation criteria: SAR ratio M2/M1 (%)      | 73 173525 |  |  |  |

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.111 | 0.074 | 0.054 | 0.053 | 0.050 | 0.048 | 0.047 |





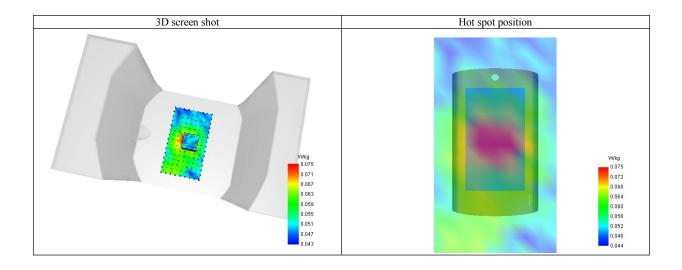



Page 107 of 124

Test Laboratory: AGC Lab Date: Apr. 16, 2025

LTE Band 40- Lower Side Mid-Body- Face Up 2.5cm (1 RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 40-Upper Side; Duty Cycle:1:1.58;

Conv.F=2.20

Frequency: 2310 MHz; Medium parameters used: f = 2300 MHz;  $\sigma = 1.68$  mho/m;  $\epsilon r = 38.42$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.7, Liquid temperature (°C): 20.5

## SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE Band 40- Lower Side Mid-Body- Face Up 2.5cm/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 40- Lower Side Mid-Body- Face Up 2.5cm/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

| n, az onin,     |                               |  |  |  |
|-----------------|-------------------------------|--|--|--|
| Area Scan       | surf_sam_plan.txt, h= 5.00 mm |  |  |  |
| Zoom Scan       | 7x7x7,dx=5mm dy=5mm dz=5mm    |  |  |  |
| Phantom         | Validation plane              |  |  |  |
| Device Position | Face Up                       |  |  |  |
| Band            | LTE Band 40- Lower Side       |  |  |  |
| Channels        | Middle                        |  |  |  |
| Signal          | Crest factor: 1.58            |  |  |  |

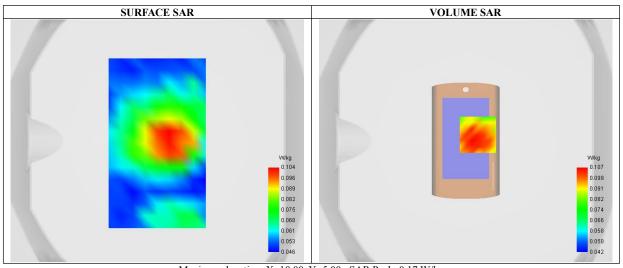



| Maximum location: X=10.00, Y=5.00; SAR Peak: 0.17 W/kg |           |  |  |  |
|--|-----------|--|--|--|
| SAR 10g (W/Kg)   | 0.071     |  |  |  |
| SAR 1g (W/Kg)  | 0.106     |  |  |  |
| Variation (%)  | -4.220    |  |  |  |
| Horizontal validation criteria: minimum distance (mm)  | -1.000000 |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)      | 68.919915 |  |  |  |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.180 | 0.107 | 0.063 | 0.058 | 0.052 | 0.055 | 0.051 |



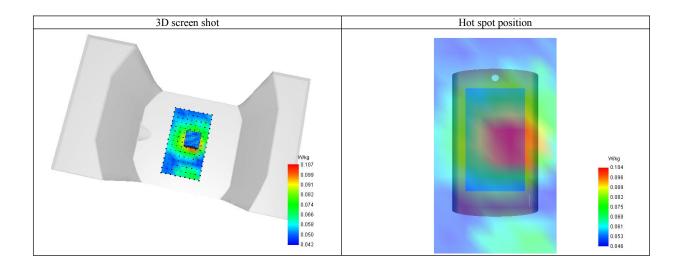

Web: http://www.agccert.com/



Page 109 of 124

Test Laboratory: AGC Lab Date: Apr. 16, 2025

LTE Band 40-Upper Side Mid-Body- Back Touch with all accessories (1 RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 40-Upper Side; Duty Cycle:1:1.58;

Conv.F=2.20

Frequency: 2355 MHz; Medium parameters used: f = 2300 MHz;  $\sigma = 1.71$  mho/m;  $\epsilon r = 38.04$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.7, Liquid temperature (°C): 20.5

### SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom


• Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE Band 40-Upper Side Mid-Body- Back Touch with all accessories/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 40-Upper Side Mid-Body- Back Touch with all accessories/Zoom Scan: Measurement


grid: dx=8mm, dy=8mm, dz=5mm;

| Area Scan                   | surf_sam_plan.txt, h= 5.00 mm   |  |  |
|-----------------------------|---------------------------------|--|--|
| Alea Ocali                  | Sun_Sun_plan.txt, n= 0.00 min   |  |  |
| Zoom Scan                   | 7x7x7,dx=5mm dy=5mm dz=5mm      |  |  |
| Phantom                     | Validation plane                |  |  |
| Device Position             | Back Touch with all accessories |  |  |
| Band LTE Band 40-Upper Side |                                 |  |  |
| Channels                    | Middle                          |  |  |
| Signal Crest factor: 1.58   |                                 |  |  |

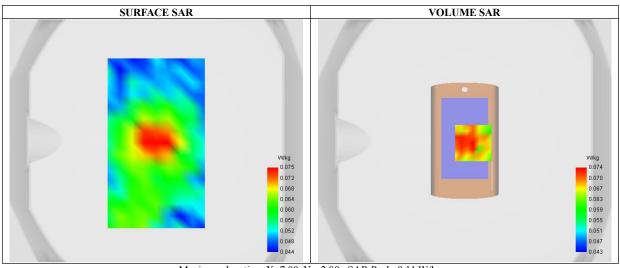


| Maximum location: X=7.00, Y=-2.00; SAR Peak: 0.11 W/kg |           |  |  |  |
|--|-----------|--|--|--|
| SAR 10g (W/Kg)   | 0.051     |  |  |  |
| SAR 1g (W/Kg)  | 0.073     |  |  |  |
| Variation (%)  | -6.390    |  |  |  |
| Horizontal validation criteria: minimum distance (mm)  | -1.000000 |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)      | 73.173525 |  |  |  |


| Z (mm) | 0.00 | 4.00 | 9.00 | 14.00 | 19.00 | 24.00 | 29.00 |
|--------|------|------|------|-------|-------|-------|-------|





SAR (W/Kg) 0.111 0.074 0.054 0.053 0.050 0.048 0.047



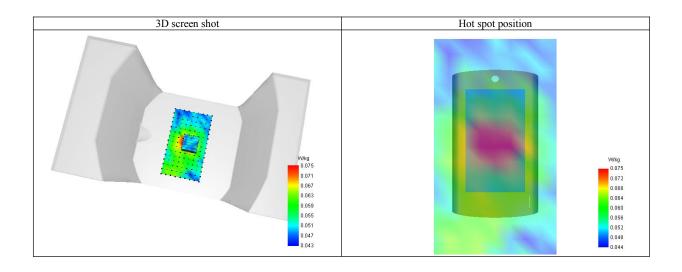

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



Page 111 of 124

Test Laboratory: AGC Lab Date: Apr. 16, 2025

LTE Band 40-Upper Side Mid-Body-Face Up 2.5cm (1 RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 40-Upper Side; Duty Cycle:1:1.58;

Conv.F=2.20

Frequency: 2355 MHz; Medium parameters used: f = 2300 MHz;  $\sigma = 1.71$  mho/m;  $\epsilon r = 38.04$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature (°C): 20.7, Liquid temperature (°C): 20.5

### SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE Band 40-Upper Side Mid-Body- Face Up 2.5cm/Area Scan: Measurement grid: dx=8mm, dv=8mm

**Configuration/ LTE Band 40-Upper Side Mid-Body- Face Up 2.5cm/Zoom Scan:** Measurement grid: dx=8mm, dy=8mm, dz=5mm;

| Area Scan surf_sam_plan.txt, h= 5.00 mm |                            |  |  |  |
|---|----------------------------|--|--|--|
| Zoom Scan                               | 7x7x7,dx=5mm dy=5mm dz=5mm |  |  |  |
| Phantom                                 | Validation plane           |  |  |  |
| Device Position                         | Face Up                    |  |  |  |
| Band LTE Band 40-Upper Side             |                            |  |  |  |
| Channels Middle                         |                            |  |  |  |
| Signal Crest factor: 1.58               |                            |  |  |  |

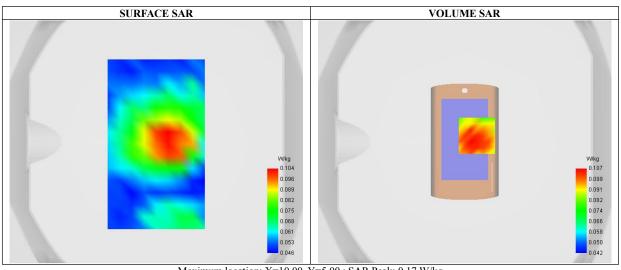


| Maximum location: X=10.00, Y=5.00; SAR Peak: 0.17 W/kg |           |  |  |  |
|--|-----------|--|--|--|
| SAR 10g (W/Kg)   | 0.071     |  |  |  |
| SAR 1g (W/Kg)  | 0.106     |  |  |  |
| Variation (%)  | -4.220    |  |  |  |
| Horizontal validation criteria: minimum distance (mm)  | -1.000000 |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)      | 68.919915 |  |  |  |


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.180 | 0.107 | 0.063 | 0.058 | 0.052 | 0.055 | 0.051 |



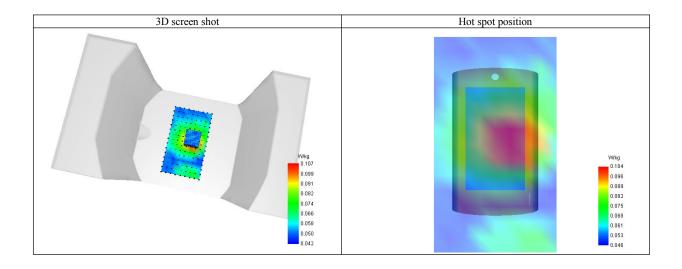

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 113 of 124

Test Laboratory: AGC Lab Date: Apr. 15, 2025

LTE Band 41 Mid-Body-Back Touch with all accessories(1RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.06 Frequency: 2593MHz; Medium parameters used: f = 2600 MHz;  $\sigma = 1.88 \text{ mho/m}$ ;  $\epsilon = 39.81$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.2, Liquid temperature ( $^{\circ}$ C): 20.9

### SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: SAM twin phantom

• Measurement SW: OpenSAR V5.3.15.8


Configuration/ LTE BAND 41 Mid-Body-Back Touch with all accessories /Area Scan: Measurement grid:

dx=8mm, y=8mm

Configuration/ LTE BAND 41 Mid-Body-Back Touch with all accessories /Zoom Scan: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

| Area Scan surf_sam_plan.txt, h= 5.00 mm    |                                 |  |  |  |
|--|---------------------------------|--|--|--|
| <b>ZoomScan</b> 7x7x7,dx=5mm dy=5mm dz=5mm |                                 |  |  |  |
| Phantom Validation plane                   |                                 |  |  |  |
| Device Position                            | Back Touch with all accessories |  |  |  |
| Band LTE BAND 41                           |                                 |  |  |  |
| Channels                                   | Middle                          |  |  |  |
| Signal OFDM (Crest factor: 1.58)           |                                 |  |  |  |

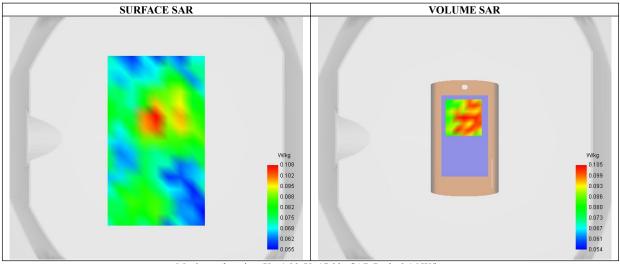


| Maximum location: X=-1.00, Y=17.00; SAR Peak: 0.16 W/kg |           |  |  |  |
|---|-----------|--|--|--|
| SAR 10g (W/Kg)  | 0.070     |  |  |  |
| SAR 1g (W/Kg)   | 0.102     |  |  |  |
| Variation (%)   | -2.450    |  |  |  |
| Horizontal validation criteria: minimum distance (mm)   | -1.000000 |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)       | 72 251628 |  |  |  |


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.161 | 0.105 | 0.076 | 0.065 | 0.073 | 0.062 | 0.069 |



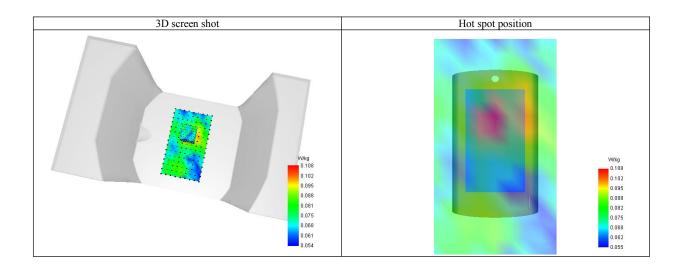



Page 115 of 124

Test Laboratory: AGC Lab Date: Apr. 15, 2025

LTE Band 41 Mid-Face Up 2.5cm(1RB#0) DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.06 Frequency: 2593MHz; Medium parameters used: f = 2600 MHz;  $\sigma = 1.88 \text{ mho/m}$ ;  $\epsilon = 39.81$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.2, Liquid temperature ( $^{\circ}$ C): 20.9

## SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE BAND 41 Mid-Face Up 2.5cm /Area Scan: Measurement grid: dx=8mm, y=8mm Configuration/ LTE BAND 41 Mid-Face Up 2.5cm /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

| Area Scan surf_sam_plan.txt, h= 5.00 mm          |                            |  |  |
|--|----------------------------|--|--|
| ZoomScan   | 7x7x7,dx=5mm dy=5mm dz=5mm |  |  |
| Phantom  | Validation plane           |  |  |
| Device Position Face Up 2.5cm                    |                            |  |  |
| Band   | LTE BAND 41                |  |  |
| Channels Middle Signal OFDM (Crest factor: 1.58) |                            |  |  |

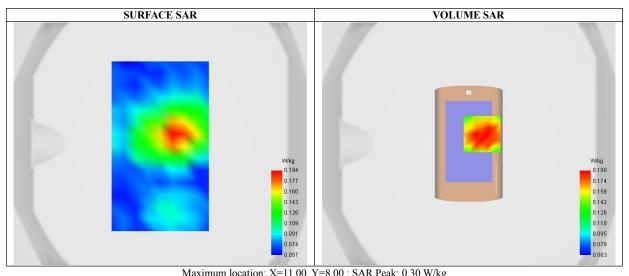


| Waxiiiuiii locatioii. X-11.00, 1-6.00, 5AK 1 cak. 0.30 W/kg |           |  |  |  |
|---|-----------|--|--|--|
| SAR 10g (W/Kg)  | 0.123     |  |  |  |
| SAR 1g (W/Kg)   | 0.186     |  |  |  |
| Variation (%)   | -12.360   |  |  |  |
| Horizontal validation criteria: minimum distance (mm)       | -1.000000 |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)           | 62.079393 |  |  |  |


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.295 | 0.190 | 0.121 | 0.091 | 0.085 | 0.075 | 0.070 |



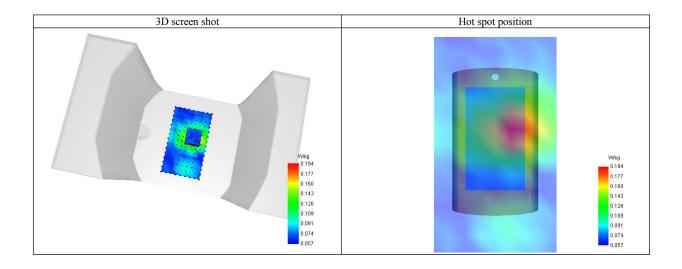



Page 117 of 124

Test Laboratory: AGC Lab Date: Apr. 19, 2025

LTE Band 66 Mid-Body-Back Touch with all accessories (1 RB#0)

DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.28; Frequency:1755 MHz; Medium parameters used: f = 1750 MHz;  $\sigma = 1.35$  mho/m;  $\epsilon = 38.92$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.3, Liquid temperature ( $^{\circ}$ C): 21.1

### SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414

Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

**Configuration/ LTE Band 66 Mid-Body-Back Touch with all accessories/Area Scan:** Measurement grid: dx=8mm, dy=8mm

**Configuration/ LTE Band 66 Mid-Body-Back Touch with all accessories/Zoom Scan:** Measurement grid: dx=8mm,dy=8mm, dz=5m;


| Area Scan                                   | surf_sam_plan.txt, h= 5.00 mm                |  |  |  |
|---|--|--|--|--|
| <b>Zoom Scan</b> 5x5x7,dx=8mm dy=8mm dz=5mm |  |  |  |  |
| Phantom                                     | Validation plane                             |  |  |  |
| Device Position                             | Back Touch with all accessories  LTE Band 66 |  |  |  |
| Band  |  |  |  |  |
| Channels                                    | Middle                                       |  |  |  |
| Signal OFDM (Crest factor: 1.0)             |  |  |  |  |

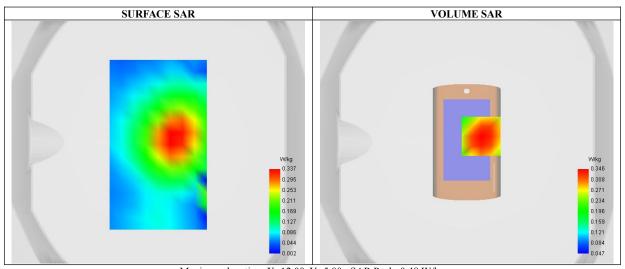


| Maximum location: X=12.00, Y=5.00; SAR Peak: 0.48 W/kg |           |  |  |  |
|--|-----------|--|--|--|
| SAR 10g (W/Kg)   | 0.217     |  |  |  |
| SAR 1g (W/Kg)  | 0.334     |  |  |  |
| Variation (%)  | -4.610    |  |  |  |
| Horizontal validation criteria: minimum distance (mm)  | 22.627417 |  |  |  |
| Vertical validation criteria: SAR ratio M2/M1 (%)      | 66.743016 |  |  |  |



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.483 | 0.346 | 0.231 | 0.159 | 0.114 | 0.086 | 0.067 |



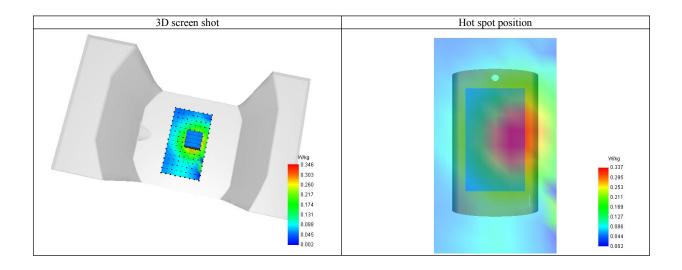



Page 119 of 124

Test Laboratory: AGC Lab Date: Apr. 19, 2025

**LTE Band 66 Mid-Face Up 2.5cm (1 RB#0)**DUT: 4G Global Walkie-Talkie; Type: N888

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.28; Frequency:1755 MHz; Medium parameters used: f = 1750 MHz;  $\sigma = 1.35$  mho/m;  $\epsilon = 38.92$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.3, Liquid temperature ( $^{\circ}$ C): 21.1

### SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 30, 2024; Serial No.: 2023-EPGO-414


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V5.3.15.8

Configuration/ LTE Band 66 Mid-Face Up 2.5cm/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 Mid-Face Up 2.5cm/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

| Area Scan                       | surf_sam_plan.txt, h= 5.00 mm |  |  |  |  |
|---------------------------------|-------------------------------|--|--|--|--|
| Zoom Scan                       | 5x5x7,dx=8mm dy=8mm dz=5mm    |  |  |  |  |
| Phantom Validation plane        |                               |  |  |  |  |
| Device Position                 | Face Up 2.5cm                 |  |  |  |  |
| Band                            | LTE Band 66                   |  |  |  |  |
| Channels                        | Middle                        |  |  |  |  |
| Signal OFDM (Crest factor: 1.0) |                               |  |  |  |  |

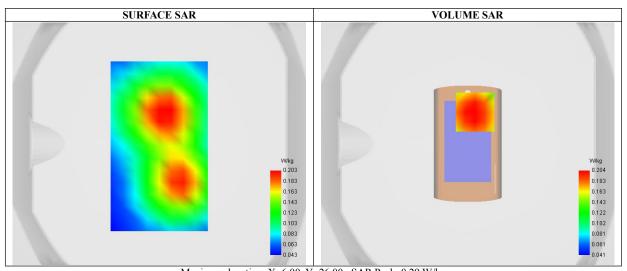

 Maximum location: X=6.00, Y=26.00 ; SAR Peak: 0.29 W/kg

 SAR 10g (W/Kg)
 0.135

 SAR 1g (W/Kg)
 0.199

 Variation (%)
 -2.860

 Horizontal validation criteria: minimum distance (mm)
 22.627417


 Vertical validation criteria: SAR ratio M2/M1 (%)
 68.792028


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 | 24.00 | 29.00 |
|------------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 0.279 | 0.204 | 0.140 | 0.100 | 0.076 | 0.062 | 0.052 |



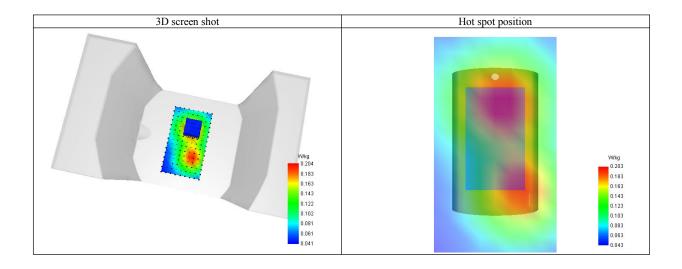





## APPENDIX C. TEST SETUP PHOTOGRAPHS

Back Touch with all accessories 0mm



Face up 25mm

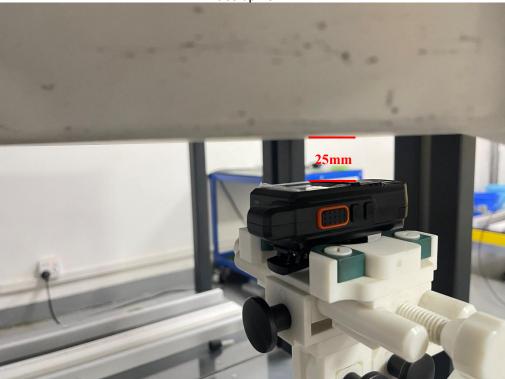






# DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note: The position used in the measurement were according to IEEE 1528-2013

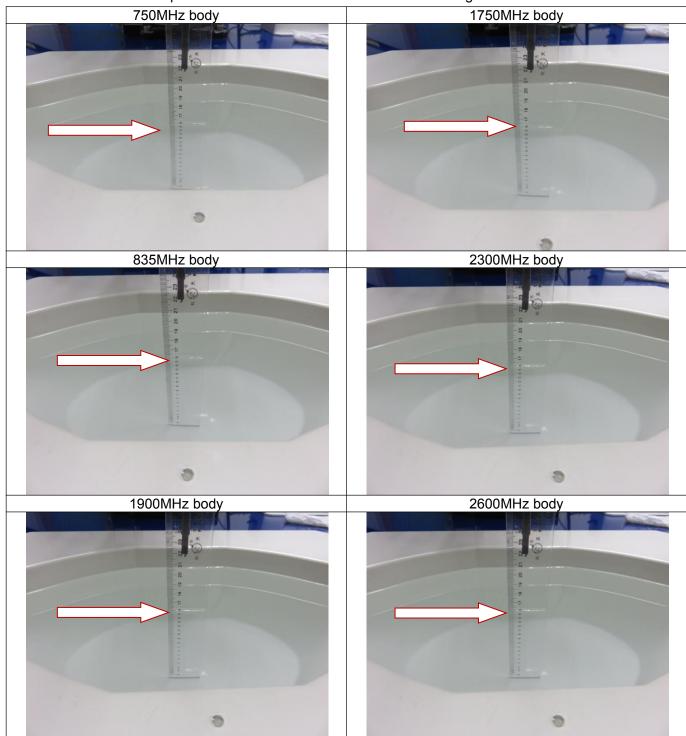



Page 123 of 124

# APPENDIX D. CALIBRATION DATA

Refer to Attached files.



Page 124 of 124

# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

## ----END OF REPORT----