



FCC TEST REPORT

FCC ID:2BN9C-A5MINIK

Applicant: **Shenzhen Youle Technology Co., Ltd**
Address: Block B, Fencheng Zhigu Building, No. 60 Tiezai Road, Gongle Community, xixiang street, Bao 'an District, Shenzhen
Manufacturer: **Shenzhen Youle Technology Co., Ltd**
Address: Block B, Fencheng Zhigu Building, No. 60 Tiezai Road, Gongle Community, xixiang street, Bao 'an District, Shenzhen
EUT: **Car Media Player Box**
Trade Mark: N/A
Model Number: A5 Mini K
See page 7 for detailed models
Date of Receipt: Nov. 20, 2024
Test Date: Nov. 20, 2024 - Apr. 08, 2025
Date of Report: Apr. 08, 2025
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China
Applicable Standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407
ANSI C63.10:2013
KDB 789033 D02 v02r01
Test Result: Pass
Report Number: DLE-250408008R

Prepared (Test Engineer): Dimon Tan
Reviewer (Supervisor): Jack Bu
Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1. VERSION	4
2.SUMMARY OF TEST RESULTS	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4.EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT	15
4.2 RADIATED EMISSION MEASUREMENT	31
4.2.1 APPLICABLE STANDARD	31
4.2.2 CONFORMANCE LIMIT	31
4.2.3 MEASURING INSTRUMENTS	31
4.2.4 TEST CONFIGURATION	32
4.2.5 TEST PROCEDURE	33
4.2.6 TEST RESULT	34
5.POWER SPECTRAL DENSITY TEST	59
5.1 APPLIED PROCEDURES / LIMIT	107
5.2 TEST PROCEDURE	108
5.3 DEVIATION FROM STANDARD	108
5.4 TEST SETUP	108
5.5 EUT OPERATION CONDITIONS	108
5.6 TEST RESULTS	109
6. 6DB BANDWIDTH	111
6.1 APPLIED PROCEDURES / LIMIT	113
6.2 TEST PROCEDURE	113
6.3 EUT OPERATION CONDITIONS	114



Table of Contents	Page
6.4 TEST RESULTS	114
7.MAXIMUM CONDUCTED OUTPUT POWER	118
7.1 PPLIED PROCEDURES / LIMIT	118
7.2 TEST PROCEDURE	118
7.3 DEVIATION FROM STANDARD	119
7.4 TEST SETUP	119
7.5 EUT OPERATION CONDITIONS	119
7.6 TEST RESULTS	120
8.OUT OF BAND EMISSIONS	121
8.1 APPLICABLE STANDARD	121
8.2 TEST PROCEDURE	121
8.3 DEVIATION FROM STANDARD	121
8.4 TEST SETUP	122
8.5 EUT OPERATION CONDITIONS	122
8.6 TEST RESULTS	122
9.SPURIOUS RF CONDUCTED EMISSIONS	123
9.1 CONFORMANCE LIMIT	125
9.2 MEASURING INSTRUMENTS	125
9.3 TEST SETUP	125
9.4 TEST PROCEDURE	125
9.5 TEST RESULTS	125
10.Frequency Stability Measurement	130
10.1 LIMIT	130
10.2 TEST PROCEDURES	130
10.3 TEST SETUP LAYOUT	130
10.4 EUT OPERATION DURING TEST	130
10.5 TEST RESULTS	130
11. DUTY CYCLE	135
11.1 APPLIED PROCEDURES / LIMIT	135
11.2 DEVIATION FROM STANDARD	135
11.3 TEST SETUP	135
12.ANTENNA REQUIREMENT	139
13. TEST SETUP PHOTO	140
14. EUT CONSTRUCTIONAL DETAILS	140



1. VERSION

Report No.	Version	Description	Approved
DLE-250408008R	Rev.01	Initial issue of report	Apr. 08, 2025



2.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emission	PASS	
789033 D02 General U-NII	Duty Cycle	PASS	
15.209(a)	Spurious Radiated Emissions	PASS	
15.407(e)	26dB Emission Bandwidth & 6dB Occupied Bandwidth	PASS	
15.407 (a)(3)	Maximum Conducted Output Power	PASS	
2.1051	Band Edge	PASS	
15.407 (a)(3)	Power Spectral Density	PASS	
2.1051, 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street,
Longgang Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % °

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Car Media Player Box
Model No.:	A5 Mini K A5 Mini A, A5 Mini C, A5 Mini D, A5 Mini E, A5 Mini F, A5 Mini G, A5 Mini H, A5 Mini I, A5 Mini J, A5 Mini B, A5 Mini E-S, A5 Mini F-S, A5, A5 SE, A5 Air, A5 Pro, A5 Plus, A5 Ultra, A6, A6 SE, A6 Air, A6 Pro, A6 Plus, A6 Ultra, A8, A8 Pro, A8 Plus, A8 Ultra, A9, A9 Pro, A9 Plus, A9 Ultra, A10, A10 Pro, A10 Plus, A10 Ultra, A5MINI F-S, CA2, CA3, CA4, CA5, CA6, CA7, DAC1, DCA2, DCA3, CP30-C2CMini, CP30-C2CMini2, CP30-C2CMini3, CP30-C2CMini4, CP30-C2CMini5, CP30-C2CMini6,CP30-A2AMini, CP30-A2AMini2, CP30-A2AMini3, CP30-A2AMini4, CP30-A2AMini5, CP30-A2AMini6,CP30-Mini,CP30-Mini2,CP30-Mini3,CP30-Mini4,CP30-Mini5,CP30-Mini6,CP30-Mini7,CP30-Mini8,CP30-Mini9,CP30-Mini10,CP30-Mini11,CP30-Mini12,CP30-Mini13,CP30-Mini14,CP30-Mini15,CP30-air,CP30-air2,CP30-air3,CP30-air4,CP30-air5,CP30-air6,CP30-air7,CP30-air8,CP30-air9,CP30-air10,CP30-air11,CP30-air12,CP30-air13,CP30-air14,CP30-air15,CP30-CS5,CP30-CS5 Mini,CP30-CS5 Pro,CP30-CS5 Plus,CP30-CS5-D,CP30-CS5-D Mini,CP30-CS5-D Pro,CP30-CS5-D Plus,CP30-CS6,CP30-CS6 Mini,CP30-CS6 Pro,CP30-CS6 Plus,CP30-CS7,CP30-CS7 Mini,CP30-CS7 Pro,CP30-CS7 Plus,CP30-CS8,CP30-CS8 Mini,CP30-CS8 Pro,CP30-CS8 Plus,CP30-CS9,CP30-CS9 SE,CP30-CS9 Mini,CP30-CS9 Pro ,CP30-CS9 Max,CP30-CS9 Ultra,CP30-CS10,CP30-CS10 SE,CP30-CS10 Mini,CP30-CS10 Pro, ,CP30-CS10 Max,CP30-CS10 Ultra,CP30-CS11,CP30-CS11 Mini,CP30-CS11 Pro,CP30-CS11 Plus,CP30-CS11 Max,CP30-CS11 Ultra,CP30-CS12,CP30-CS12 Mini,CP30-CS12 Pro,CP30-CS12 Plus,CP30-CS12 Max,CP30-CS12 Ultra,CP30-CM5,CP30-CM5 Mini,CP30-CM5 Pro,CP30-CM5 Plus,CP30-CM5 Max,CP30-CM5 Ultra,CP30-CM6,CP30-CM6 Mini,CP30-CM6 Pro,CP30-CM6 Plus,CP30-CM6 Max,CP30-CM6 Ultra,CP30-CM7,CP30-CM7 Mini,CP30-CM7 Pro,CP30-CM7 Plus,CP30-CM7 Max,CP30-CM7 Ultra,CP30-C2C01,CP30-C2C01 Pro
Model Different.:	The additional models have slight differences in exterior design. Some models retain the same USB plug-in design as the EUT but feature various optimizations, such as textured anti-slip surfaces, geometric cut patterns, circular openings, or airflow grooves, to meet different user needs. Additionally, some models adopt a cabled design, providing more flexible connectivity and adapting to a wider range of usage scenarios. Despite the differences in casing, all additional models share the exact same core PCB board, internal circuitry, and chip modules as the EUT, meaning there are no differences in hardware functionality or performance.
Sample ID	DLE-250408008R
Sample(s) Status:	Engineer sample



Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/n/ac (20MHz channel bandwidth) ☒ 802.11ac/n (40MHz channel bandwidth)
	Data Rate	802.11a 802.11n(HT20/HT40):MCS0-MCS7; 802.11ac(VHT20/VHT40):MCS0-MCS9
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	☐ 5180-5240MHz for 802.11a/n20/ac20; 5190-5230MHz for 802.11ac40/n40; ☒ 5745-5825 MHz for 802.11a/n20/ac20; 5755-5795 MHz for 802.11ac40/n40;
	Number of Channels	☐ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 ac40/n40 in the 5190-5230 MHz band ; ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 ac40/n40 in the 5755-5795 MHz band ;
Channel List	Please refer to the Note 2.	
Antenna Type:	PCB Antenna	
Antenna gain:	2.21 dBi	
Power supply:	Input: DC 5V, 1A	
AC/DC Adapter:	N/A	
AC/DC Adapter Mode:	N/A	

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

802.11a/n20/ac20 Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11ac40/n40 Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	-	-	-	-	-	-
159	5795	-	-	-	-	-	-

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply	



voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

Test Software	REALTEK Test Tool
Power level setup	<14dBm

Pretest Mode	Description
Mode 1	802.11a/n20/ac20 CH149/ CH157/ CH 165
Mode 2	802.11ac40/n40 CH 151 / CH 159

Conducted Emission	
Final Test Mode	Description
Mode 1	802.11a/n20/ac20 CH149/ CH157/ CH 165
Mode 2	802.11ac40/n40 CH 151 / CH 159

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a/n20/ac20 CH149/ CH157/ CH 165
Mode 2	802.11ac40/n40 CH 151 / CH 159


Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.




3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Radiated Emission



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Car Media Player Box	N/A	A5 Mini K	N/A	EUT
A-9	Notebook computer	SAMSUNG	RC510	N/A	Auxiliary
A1	AC/DC adapter	N/A	H6157-W1	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 30, 2024	Sep. 29, 2025
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	C-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Sep. 29, 2024	Sep. 28, 2025
5	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Sep. 29, 2024	Sep. 28, 2025
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 30, 2024	Sep. 29, 2025
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2024	Sep. 29, 2025
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Oct. 11, 2024	Oct. 10, 2025
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 29, 2024	Sep. 28, 2025
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Sep. 30, 2024	Sep. 29, 2025
11	Test Cable	N/A	R-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
12	Test Cable	N/A	R-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
13	Test Cable	N/A	R-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	RF-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	Test Cable	N/A	RF-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Test Cable	N/A	RF-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
6	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Sep. 29, 2024	Sep. 28, 2025
7	Signal Generator	Agilent	N5182A	N/A	A.01.87	Sep. 29, 2024	Sep. 28, 2025
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344/M-1752	N/A	Nov. 16, 2024	Nov. 15, 2025
9	Van der Hoofden measuring head	Schwarzbeck Mess-elektronik	VDHH 9502	9502-039	N/A	Sep. 30, 2024	Sep. 29, 2025
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 30, 2024	Sep. 29, 2025
11	Power Meter	KEYSIGHT	N1912A P	N/A	A.05.00	Sep. 30, 2024	Sep. 29, 2025
12	MWRF Power Meter Test system	MW	MW100-RF CB	N/A	N/A	Sep. 29, 2024	Sep. 28, 2025
13	D.C. Power Supply	LongWei	TPR-6405 D	N/A	N/A	Sep. 29, 2024	Sep. 28, 2025
14	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



4.EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

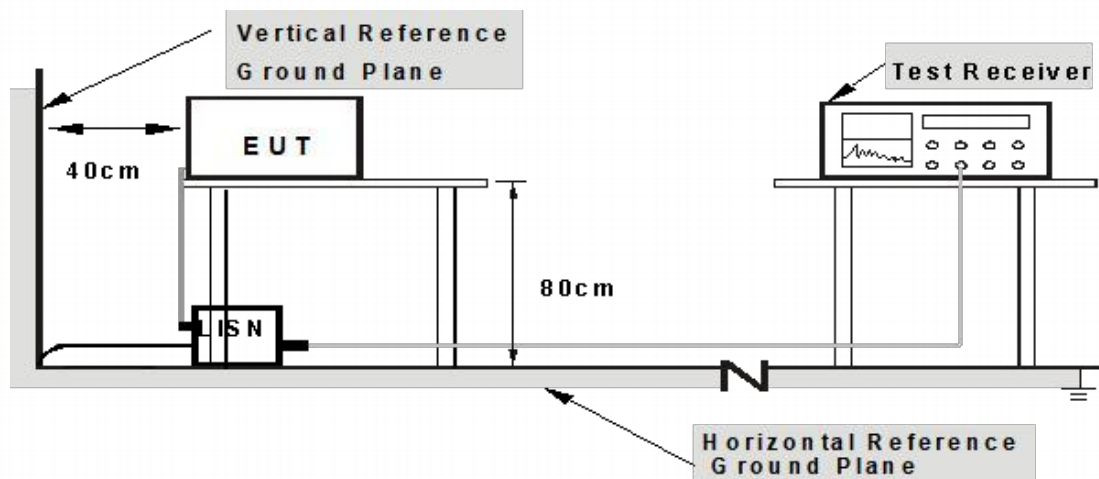

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

A5 Mini K

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

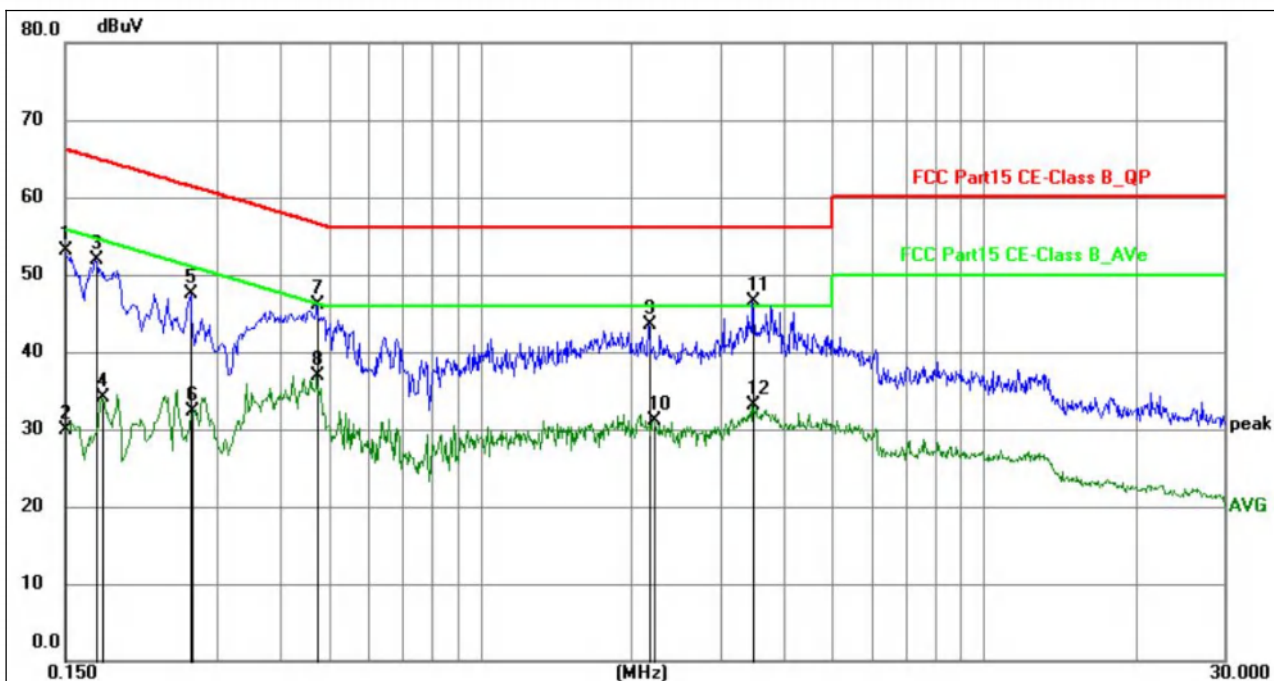


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	32.56	20.48	53.04	66.00	-12.96	QP	P	
2	0.1500	9.42	20.48	29.90	56.00	-26.10	AVG	P	
3	0.1723	31.30	20.57	51.87	64.85	-12.98	QP	P	
4	0.1768	13.47	20.59	34.06	54.63	-20.57	AVG	P	
5	0.2670	26.94	20.65	47.59	61.21	-13.62	QP	P	
6	0.2686	11.70	20.65	32.35	51.16	-18.81	AVG	P	
7	0.4738	25.55	20.57	46.12	56.45	-10.33	QP	P	
8	0.4738	16.29	20.57	36.86	46.45	-9.59	AVG	P	
9	2.1568	22.61	20.86	43.47	56.00	-12.53	QP	P	
10	2.2019	10.35	20.85	31.20	46.00	-14.80	AVG	P	
11	3.4754	25.73	20.82	46.55	56.00	-9.45	QP	P	
12	3.4754	12.38	20.82	33.20	46.00	-12.80	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor.
- 4.The test data shows only the worst case 802.11n20 - 5745MHz.



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

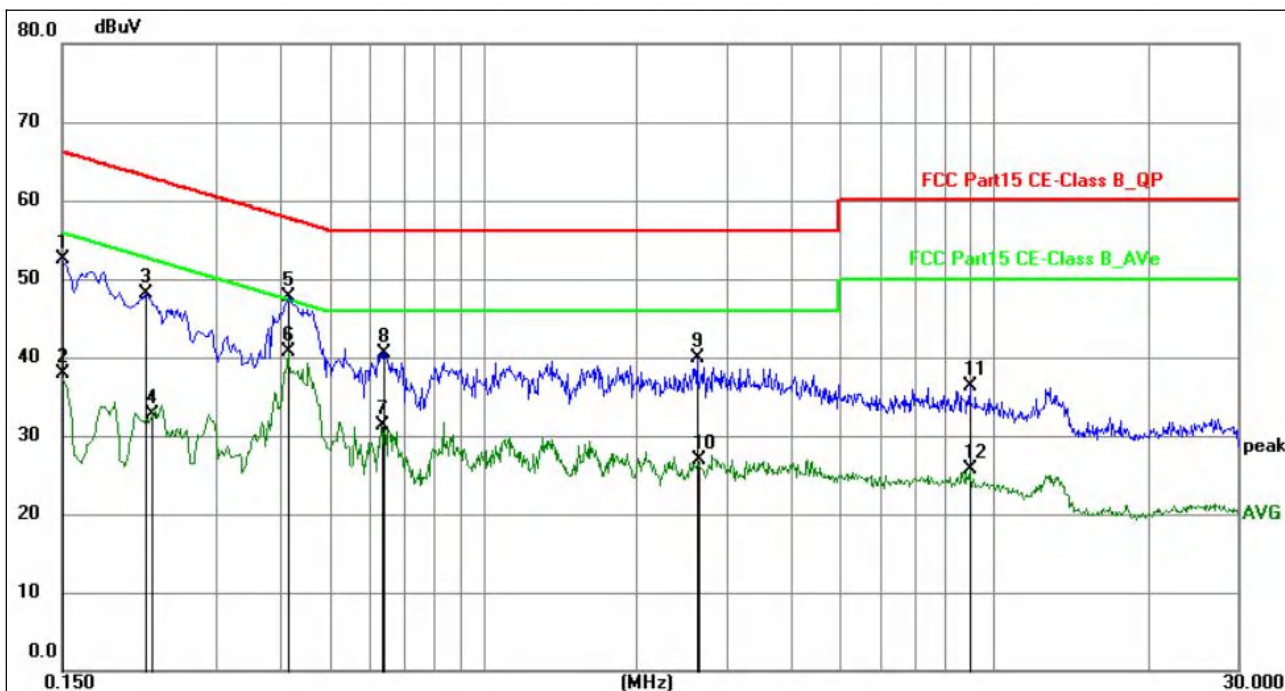


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	31.90	20.58	52.48	66.00	-13.52	QP	P	
2	0.1500	17.27	20.58	37.85	56.00	-18.15	AVG	P	
3	0.2184	27.39	20.79	48.18	62.88	-14.70	QP	P	
4	0.2242	11.85	20.78	32.63	52.66	-20.03	AVG	P	
5	0.4154	26.92	20.72	47.64	57.54	-9.90	QP	P	
6	0.4154	19.95	20.72	40.67	47.54	-6.87	AVG	P	
7	0.6313	10.64	20.72	31.36	46.00	-14.64	AVG	P	
8	0.6403	19.74	20.72	40.46	56.00	-15.54	QP	P	
9	2.6295	18.93	20.88	39.81	56.00	-16.19	QP	P	
10	2.6428	6.12	20.88	27.00	46.00	-19.00	AVG	P	
11	8.9924	14.89	21.43	36.32	60.00	-23.68	QP	P	
12	8.9924	4.32	21.43	25.75	50.00	-24.25	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.

**A5MINI F-S**

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

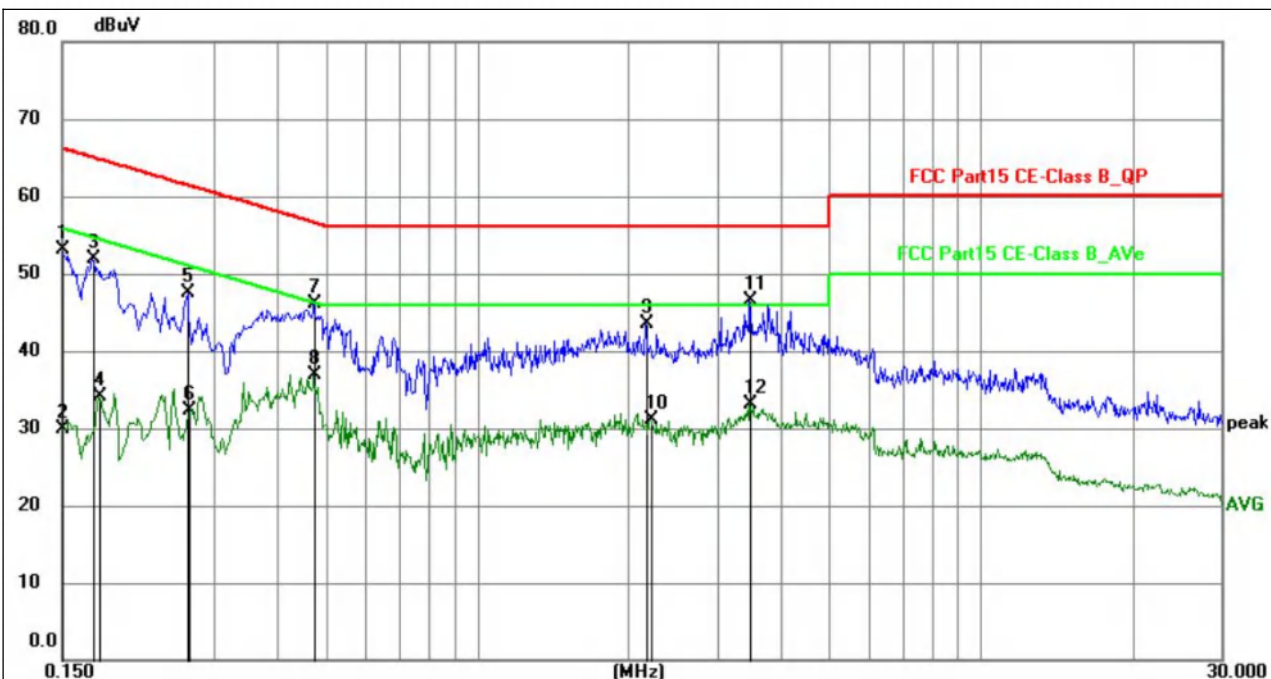


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	32.56	20.48	53.04	66.00	-12.96	QP	P	
2	0.1500	9.42	20.48	29.90	56.00	-26.10	AVG	P	
3	0.1723	31.30	20.57	51.87	64.85	-12.98	QP	P	
4	0.1768	13.47	20.59	34.06	54.63	-20.57	AVG	P	
5	0.2670	26.94	20.65	47.59	61.21	-13.62	QP	P	
6	0.2686	11.70	20.65	32.35	51.16	-18.81	AVG	P	
7	0.4738	25.55	20.57	46.12	56.45	-10.33	QP	P	
8	0.4738	16.29	20.57	36.86	46.45	-9.59	AVG	P	
9	2.1568	22.61	20.86	43.47	56.00	-12.53	QP	P	
10	2.2019	10.35	20.85	31.20	46.00	-14.80	AVG	P	
11	3.4754	25.73	20.82	46.55	56.00	-9.45	QP	P	
12	3.4754	12.38	20.82	33.20	46.00	-12.80	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

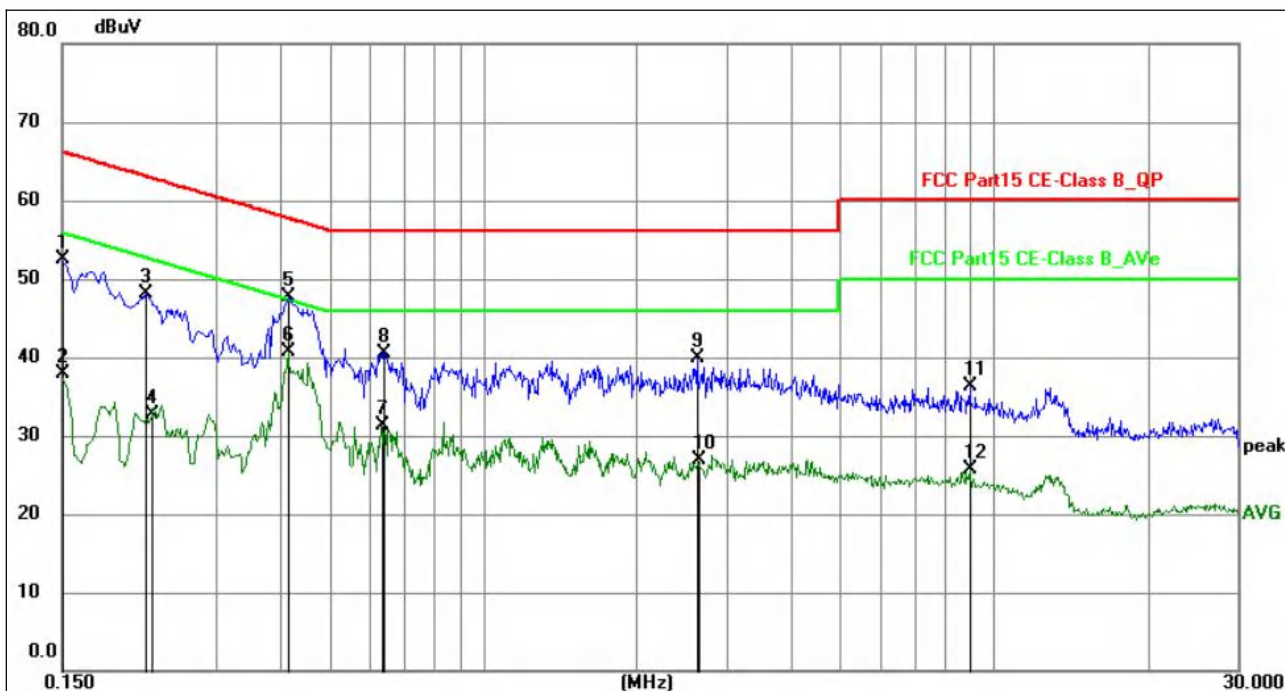


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	31.90	20.58	52.48	66.00	-13.52	QP	P	
2	0.1500	17.27	20.58	37.85	56.00	-18.15	AVG	P	
3	0.2184	27.39	20.79	48.18	62.88	-14.70	QP	P	
4	0.2242	11.85	20.78	32.63	52.66	-20.03	AVG	P	
5	0.4154	26.92	20.72	47.64	57.54	-9.90	QP	P	
6	0.4154	19.95	20.72	40.67	47.54	-6.87	AVG	P	
7	0.6313	10.64	20.72	31.36	46.00	-14.64	AVG	P	
8	0.6403	19.74	20.72	40.46	56.00	-15.54	QP	P	
9	2.6295	18.93	20.88	39.81	56.00	-16.19	QP	P	
10	2.6428	6.12	20.88	27.00	46.00	-19.00	AVG	P	
11	8.9924	14.89	21.43	36.32	60.00	-23.68	QP	P	
12	8.9924	4.32	21.43	25.75	50.00	-24.25	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.

**CP30-air**

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

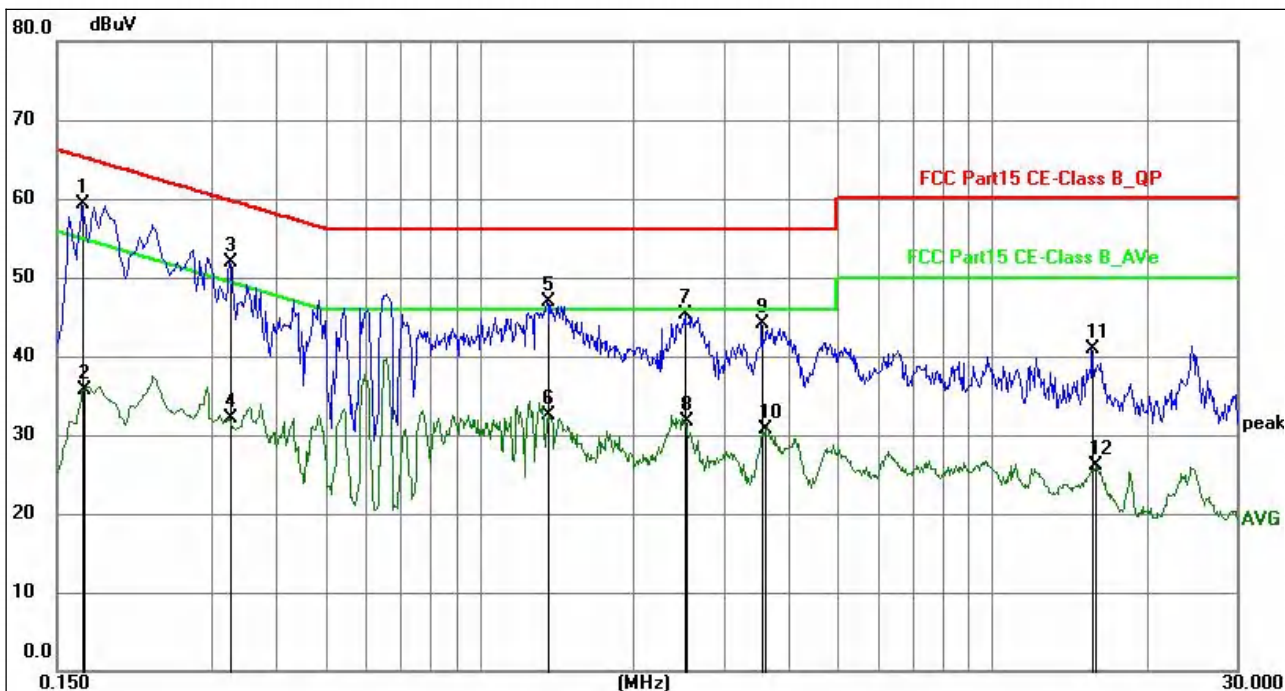


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1680	39.01	20.25	59.26	65.06	-5.80	QP	P
2	0.1693	15.53	20.26	35.79	54.99	-19.20	AVG	P
3	0.3255	31.63	20.34	51.97	59.57	-7.60	QP	P
4	0.3255	11.82	20.34	32.16	49.57	-17.41	AVG	P
5	1.3559	26.64	20.31	46.95	56.00	-9.05	QP	P
6	1.3649	12.20	20.31	32.51	46.00	-13.49	AVG	P
7	2.5215	24.93	20.32	45.25	56.00	-10.75	QP	P
8	2.5393	11.32	20.32	31.64	46.00	-14.36	AVG	P
9	3.5520	23.70	20.34	44.04	56.00	-11.96	QP	P
10	3.6105	10.43	20.34	30.77	46.00	-15.23	AVG	P
11	15.6478	20.33	20.49	40.82	60.00	-19.18	QP	P
12	15.9268	5.57	20.49	26.06	50.00	-23.94	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

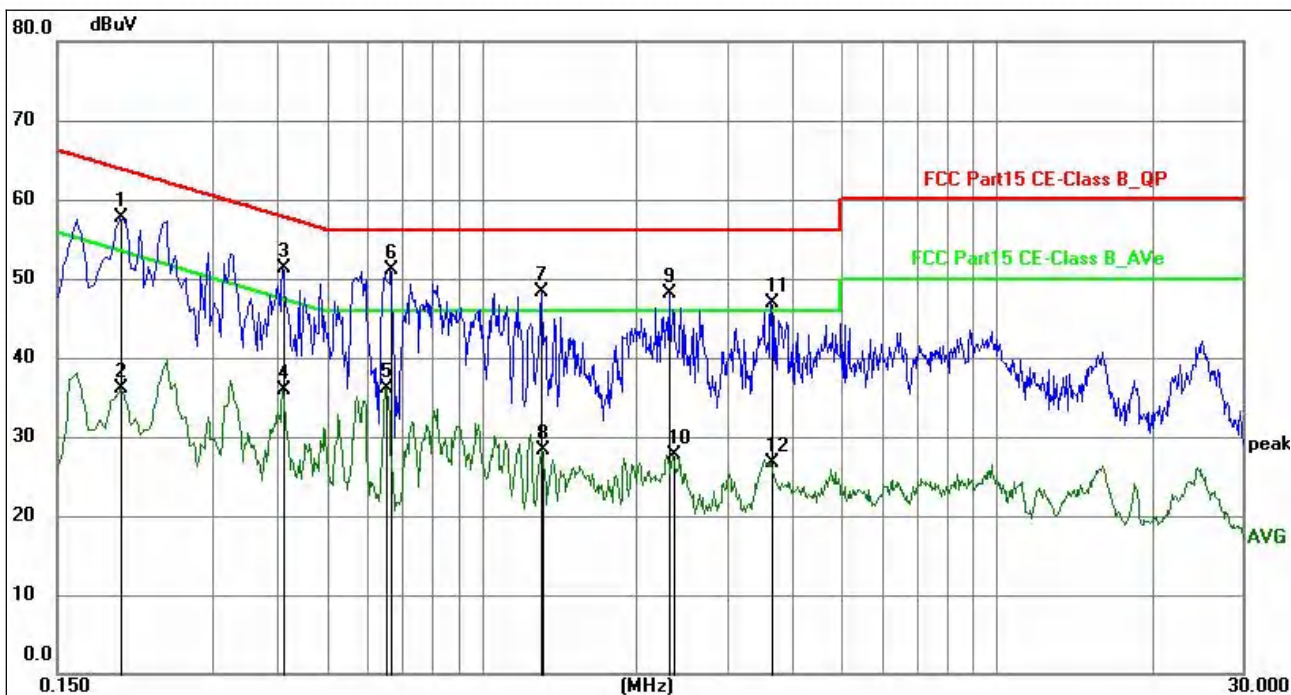


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1995	37.31	20.37	57.68	63.63	-5.95	QP	P
2	0.1995	15.73	20.37	36.10	53.63	-17.53	AVG	P
3	0.4107	30.93	20.32	51.25	57.63	-6.38	QP	P
4	0.4107	15.60	20.32	35.92	47.63	-11.71	AVG	P
5	0.6542	15.72	20.29	36.01	46.00	-9.99	AVG	P
6	0.6673	30.73	20.29	51.02	56.00	-4.98	QP	P
7	1.3064	28.06	20.31	48.37	56.00	-7.63	QP	P
8	1.3105	7.96	20.31	28.27	46.00	-17.73	AVG	P
9	2.3100	27.85	20.32	48.17	56.00	-7.83	QP	P
10	2.3549	7.45	20.32	27.77	46.00	-18.23	AVG	P
11	3.6465	26.67	20.33	47.00	56.00	-9.00	QP	P
12	3.6465	6.32	20.33	26.65	46.00	-19.35	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.

**CP30-air**

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

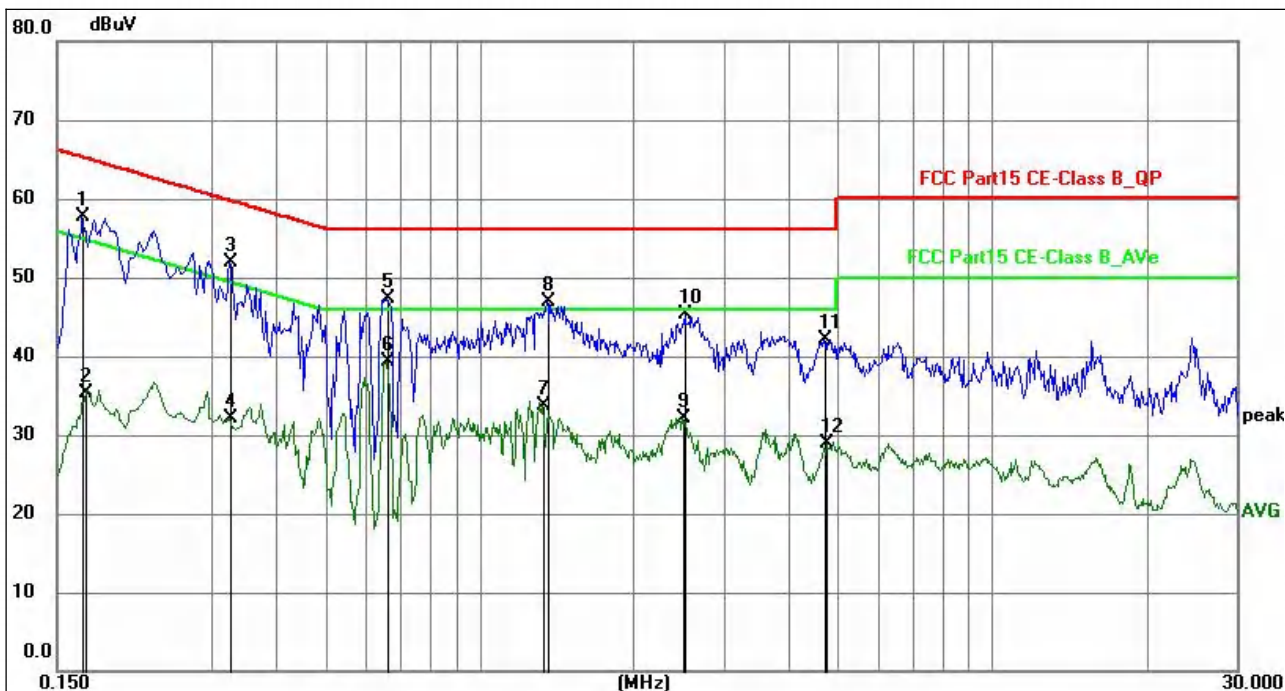


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1680	37.51	20.25	57.76	65.06	-7.30	QP	P
2	0.1703	15.14	20.26	35.40	54.95	-19.55	AVG	P
3	0.3255	31.63	20.34	51.97	59.57	-7.60	QP	P
4	0.3255	11.82	20.34	32.16	49.57	-17.41	AVG	P
5	0.6582	27.10	20.29	47.39	56.00	-8.61	QP	P
6	0.6582	18.97	20.29	39.26	46.00	-6.74	AVG	P
7	1.3244	13.31	20.31	33.62	46.00	-12.38	AVG	P
8	1.3559	26.64	20.31	46.95	56.00	-9.05	QP	P
9	2.4944	11.73	20.32	32.05	46.00	-13.95	AVG	P
10	2.5215	24.93	20.32	45.25	56.00	-10.75	QP	P
11	4.7130	21.79	20.35	42.14	56.00	-13.86	QP	P
12	4.7625	8.51	20.35	28.86	46.00	-17.14	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

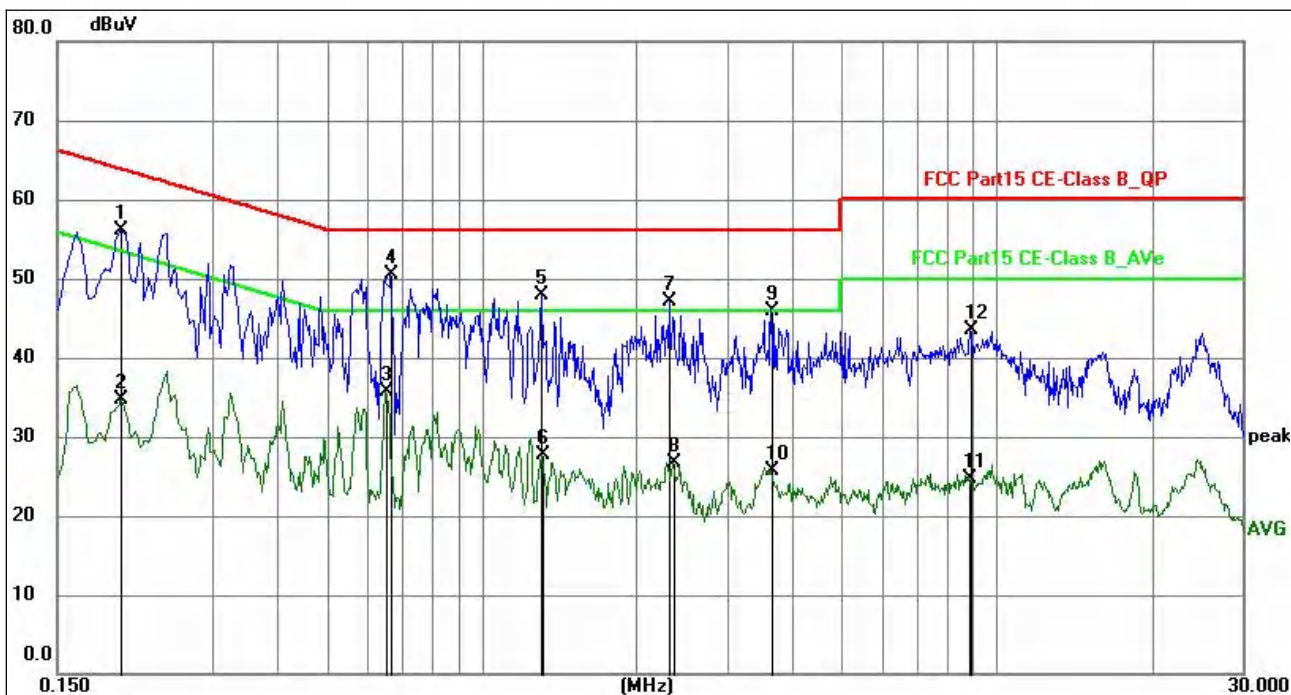


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1995	35.81	20.37	56.18	63.63	-7.45	QP	P
2	0.1995	14.30	20.37	34.67	53.63	-18.96	AVG	P
3	0.6539	15.34	20.29	35.63	46.00	-10.37	AVG	P
4	0.6673	30.23	20.29	50.52	56.00	-5.48	QP	P
5	1.3064	27.56	20.31	47.87	56.00	-8.13	QP	P
6	1.3104	7.46	20.31	27.77	46.00	-18.23	AVG	P
7	2.3100	26.85	20.32	47.17	56.00	-8.83	QP	P
8	2.3549	6.45	20.32	26.77	46.00	-19.23	AVG	P
9	3.6465	25.67	20.33	46.00	56.00	-10.00	QP	P
10	3.6465	5.32	20.33	25.65	46.00	-20.35	AVG	P
11	8.8483	4.23	20.44	24.67	50.00	-25.33	AVG	P
12	8.8978	23.12	20.44	43.56	60.00	-16.44	QP	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor.
- 4.The test data shows only the worst case 802.11n20 - 5745MHz.

**CP30-air2**

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

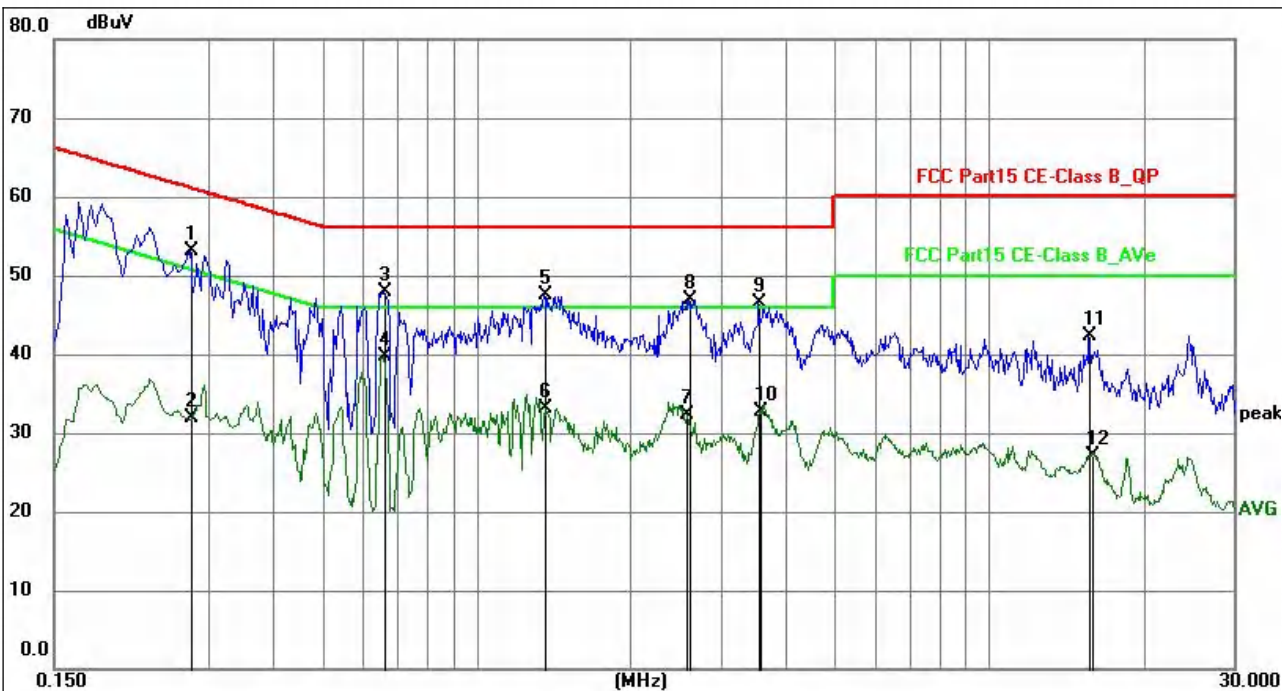


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2760	32.69	20.35	53.04	60.94	-7.90	QP	P
2	0.2787	11.55	20.35	31.90	50.85	-18.95	AVG	P
3	0.6582	27.60	20.29	47.89	56.00	-8.11	QP	P
4	0.6582	19.47	20.29	39.76	46.00	-6.24	AVG	P
5	1.3559	27.14	20.31	47.45	56.00	-8.55	QP	P
6	1.3649	12.70	20.31	33.01	46.00	-12.99	AVG	P
7	2.5800	11.98	20.32	32.30	46.00	-13.70	AVG	P
8	2.6070	26.63	20.32	46.95	56.00	-9.05	QP	P
9	3.5520	26.20	20.34	46.54	56.00	-9.46	QP	P
10	3.5790	12.43	20.34	32.77	46.00	-13.23	AVG	P
11	15.6478	21.83	20.49	42.32	60.00	-17.68	QP	P
12	15.8550	6.60	20.49	27.09	50.00	-22.91	AVG	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor.
- 4.The test data shows only the worst case 802.11n20 - 5745MHz.



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

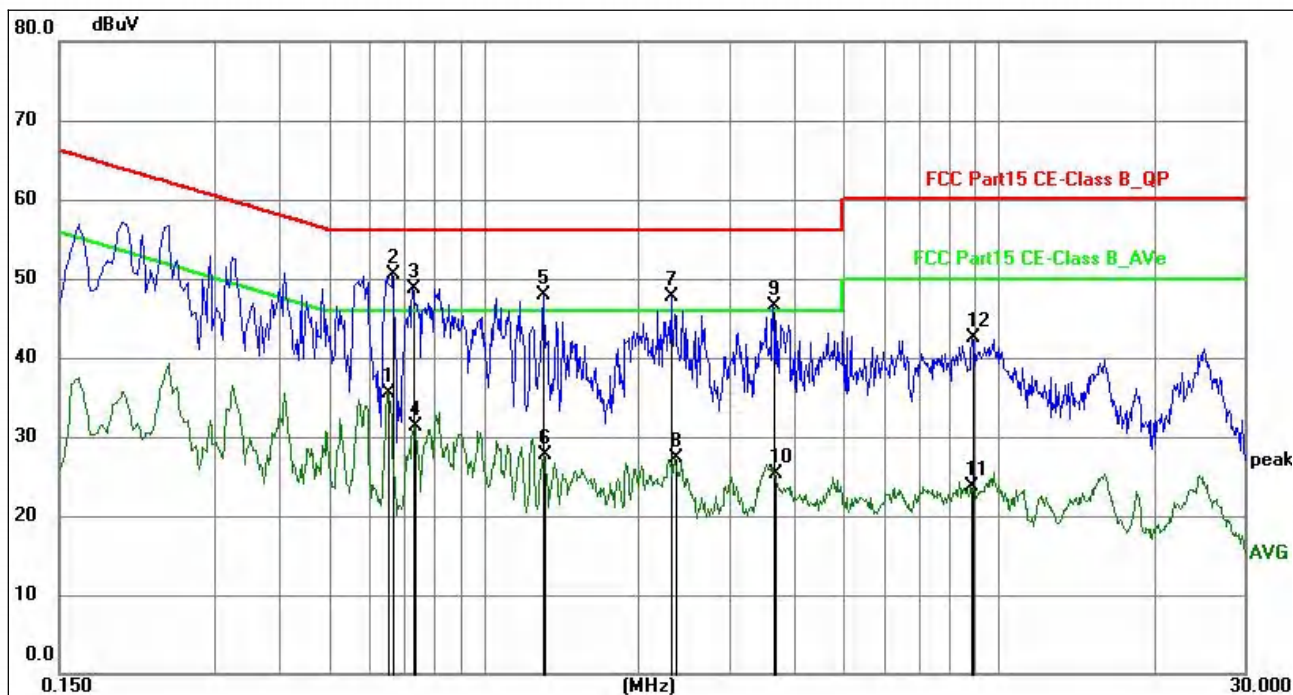


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.6542	15.22	20.29	35.51	46.00	-10.49	AVG	P
2	0.6673	30.23	20.29	50.52	56.00	-5.48	QP	P
3	0.7304	28.48	20.29	48.77	56.00	-7.23	QP	P
4	0.7347	11.05	20.29	31.34	46.00	-14.66	AVG	P
5	1.3064	27.56	20.31	47.87	56.00	-8.13	QP	P
6	1.3104	7.46	20.31	27.77	46.00	-18.23	AVG	P
7	2.3100	27.35	20.32	47.67	56.00	-8.33	QP	P
8	2.3549	6.95	20.32	27.27	46.00	-18.73	AVG	P
9	3.6465	26.17	20.33	46.50	56.00	-9.50	QP	P
10	3.6690	5.04	20.33	25.37	46.00	-20.63	AVG	P
11	8.8483	3.23	20.44	23.67	50.00	-26.33	AVG	P
12	8.8978	22.12	20.44	42.56	60.00	-17.44	QP	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.

**CP30-air3**

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

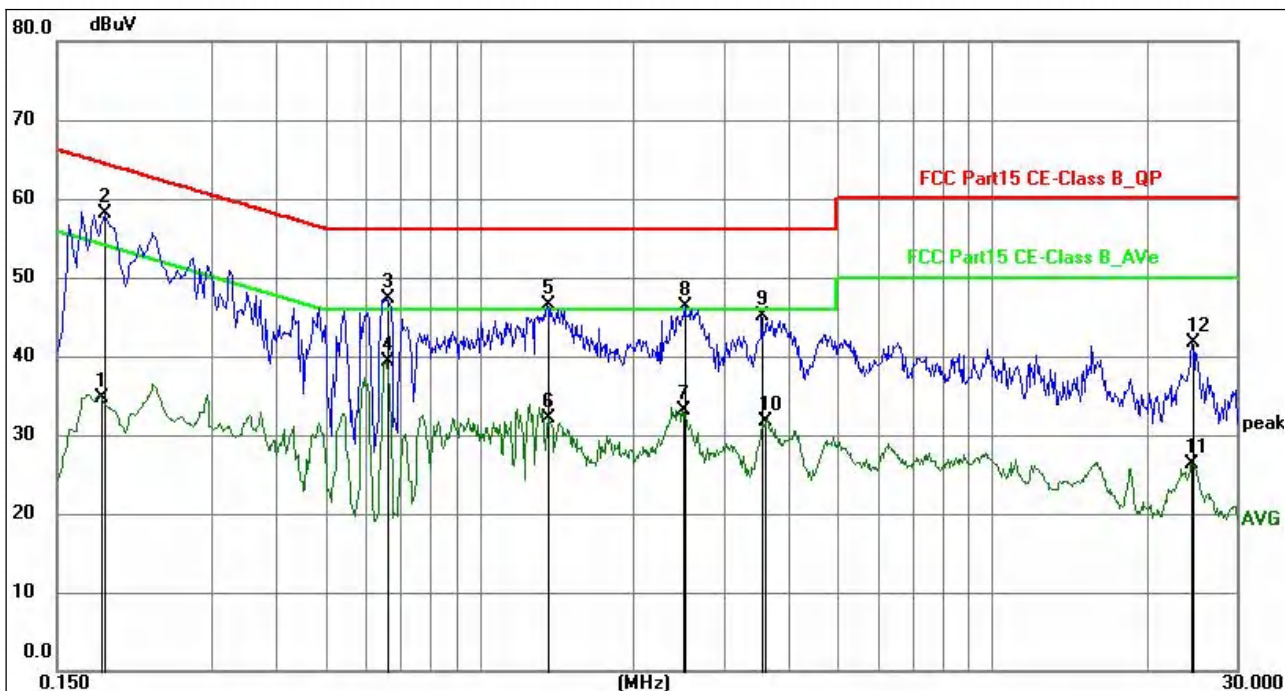


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1833	14.32	20.32	34.64	54.33	-19.69	AVG	P
2	0.1859	37.70	20.33	58.03	64.22	-6.19	QP	P
3	0.6582	27.10	20.29	47.39	56.00	-8.61	QP	P
4	0.6582	18.97	20.29	39.26	46.00	-6.74	AVG	P
5	1.3559	26.14	20.31	46.45	56.00	-9.55	QP	P
6	1.3649	11.70	20.31	32.01	46.00	-13.99	AVG	P
7	2.4944	12.73	20.32	33.05	46.00	-12.95	AVG	P
8	2.5215	25.93	20.32	46.25	56.00	-9.75	QP	P
9	3.5520	24.70	20.34	45.04	56.00	-10.96	QP	P
10	3.6105	11.43	20.34	31.77	46.00	-14.23	AVG	P
11	24.4860	5.72	20.62	26.34	50.00	-23.66	AVG	P
12	24.5985	21.17	20.62	41.79	60.00	-18.21	QP	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

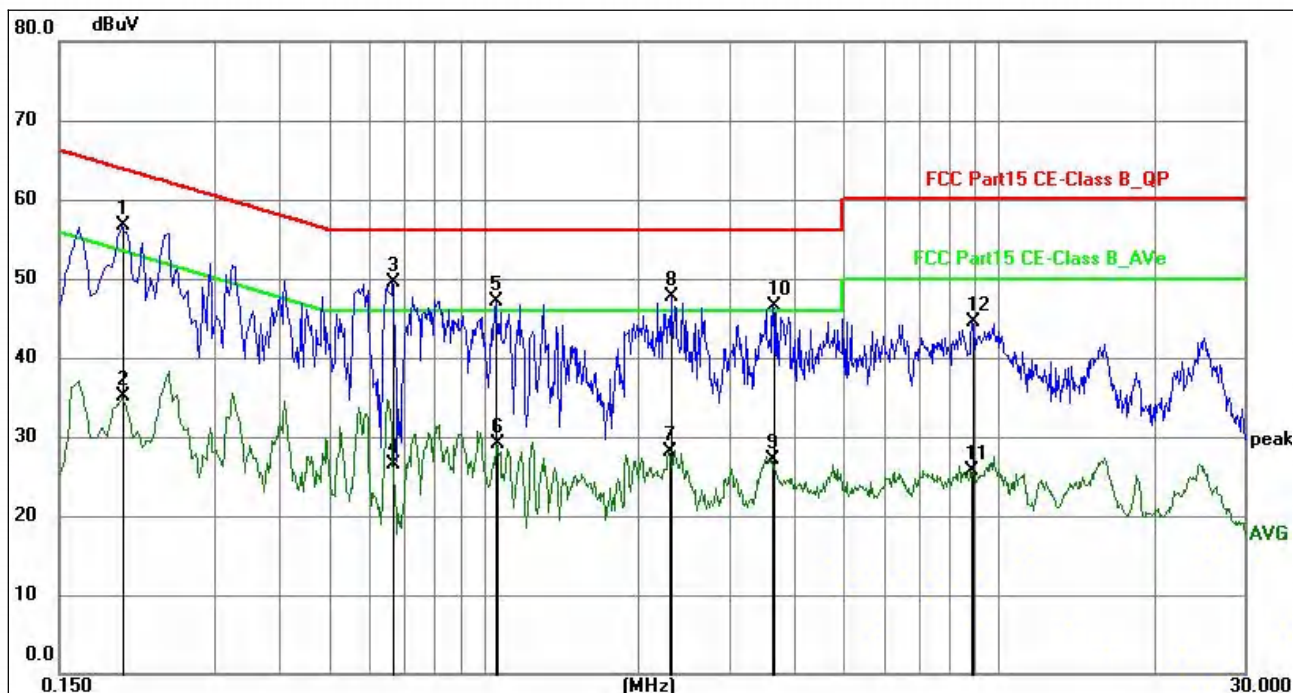


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1995	36.31	20.37	56.68	63.63	-6.95	QP	P
2	0.1995	14.80	20.37	35.17	53.63	-18.46	AVG	P
3	0.6673	29.23	20.29	49.52	56.00	-6.48	QP	P
4	0.6673	6.30	20.29	26.59	46.00	-19.41	AVG	P
5	1.0584	26.78	20.30	47.08	56.00	-8.92	QP	P
6	1.0625	8.73	20.30	29.03	46.00	-16.97	AVG	P
7	2.2964	7.79	20.32	28.11	46.00	-17.89	AVG	P
8	2.3100	27.35	20.32	47.67	56.00	-8.33	QP	P
9	3.6330	6.80	20.33	27.13	46.00	-18.87	AVG	P
10	3.6465	26.17	20.33	46.50	56.00	-9.50	QP	P
11	8.8483	5.23	20.44	25.67	50.00	-24.33	AVG	P
12	8.8978	24.12	20.44	44.56	60.00	-15.44	QP	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.

**CP30-air5**

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

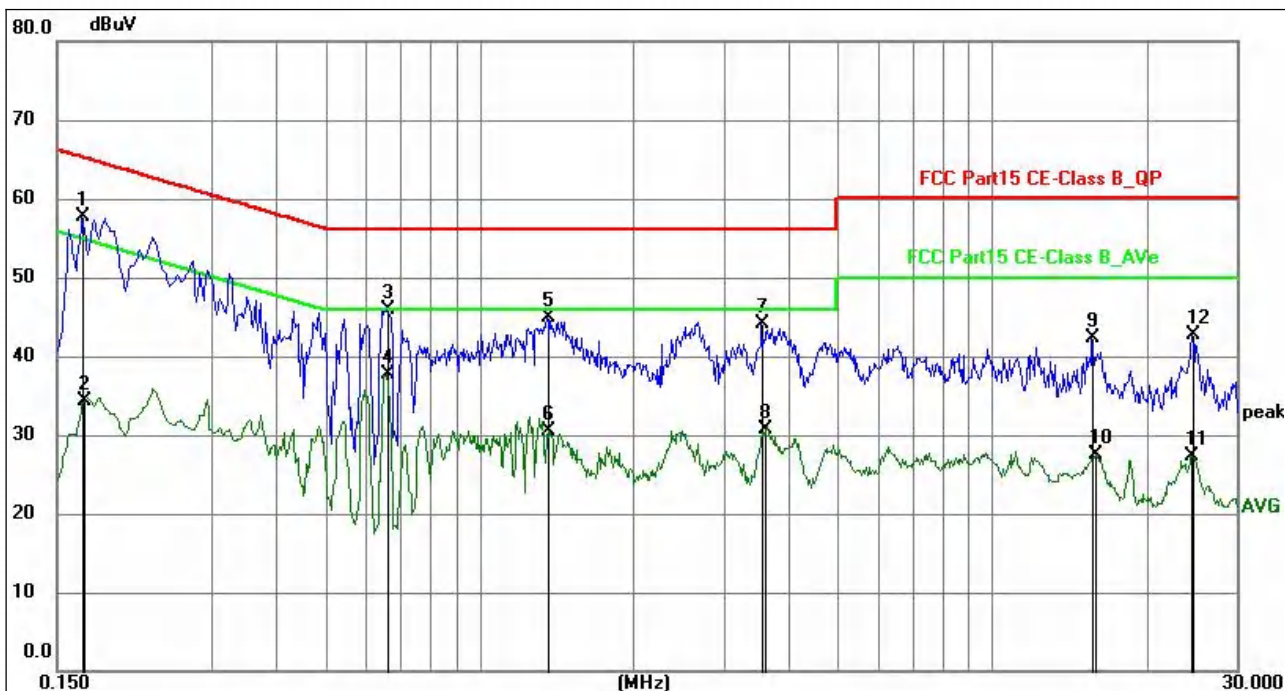


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1680	37.51	20.25	57.76	65.06	-7.30	QP	P
2	0.1693	14.03	20.26	34.29	54.99	-20.70	AVG	P
3	0.6582	25.60	20.29	45.89	56.00	-10.11	QP	P
4	0.6582	17.47	20.29	37.76	46.00	-8.24	AVG	P
5	1.3559	24.64	20.31	44.95	56.00	-11.05	QP	P
6	1.3649	10.20	20.31	30.51	46.00	-15.49	AVG	P
7	3.5520	23.70	20.34	44.04	56.00	-11.96	QP	P
8	3.6105	10.43	20.34	30.77	46.00	-15.23	AVG	P
9	15.6478	21.83	20.49	42.32	60.00	-17.68	QP	P
10	15.9268	7.07	20.49	27.56	50.00	-22.44	AVG	P
11	24.4860	6.72	20.62	27.34	50.00	-22.66	AVG	P
12	24.5985	22.17	20.62	42.79	60.00	-17.21	QP	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

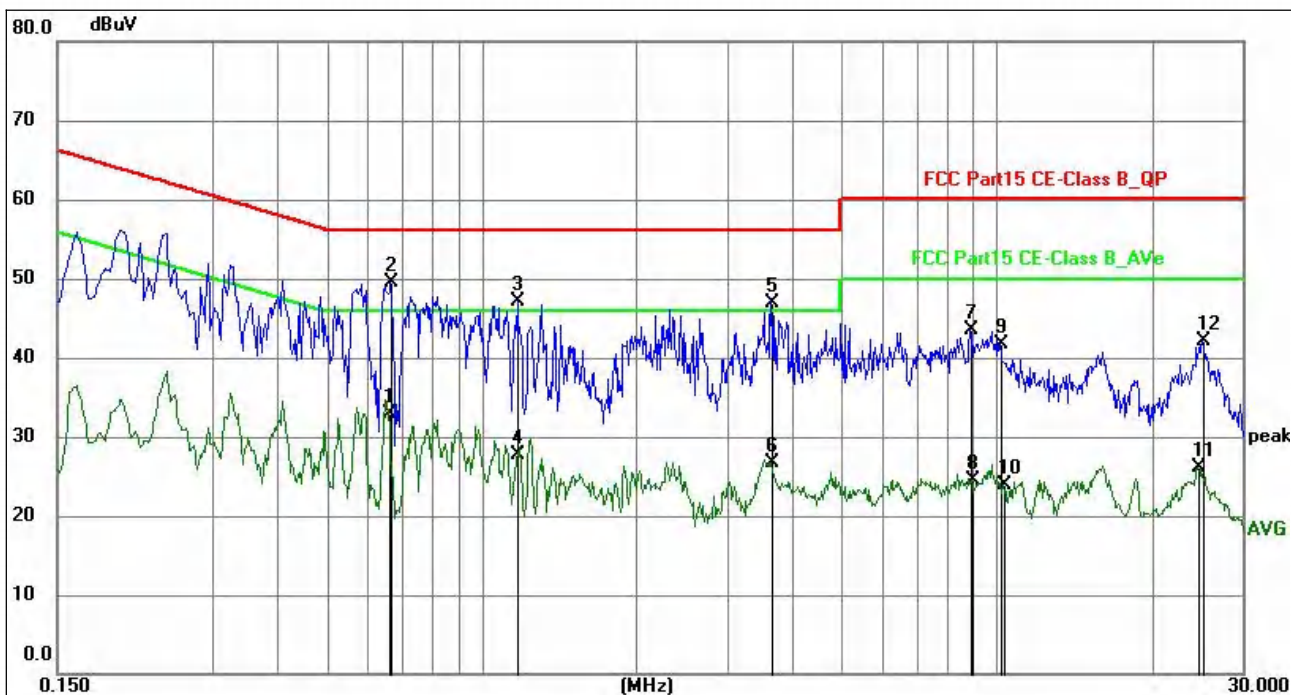


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.6582	12.56	20.29	32.85	46.00	-13.15	AVG	P
2	0.6673	29.23	20.29	49.52	56.00	-6.48	QP	P
3	1.1754	26.84	20.30	47.14	56.00	-8.86	QP	P
4	1.1754	7.44	20.30	27.74	46.00	-18.26	AVG	P
5	3.6465	26.67	20.33	47.00	56.00	-9.00	QP	P
6	3.6465	6.32	20.33	26.65	46.00	-19.35	AVG	P
7	8.8978	23.12	20.44	43.56	60.00	-16.44	QP	P
8	8.9565	4.04	20.44	24.48	50.00	-25.52	AVG	P
9	10.1623	21.26	20.47	41.73	60.00	-18.27	QP	P
10	10.2926	3.44	20.47	23.91	50.00	-26.09	AVG	P
11	24.6431	5.41	20.66	26.07	50.00	-23.93	AVG	P
12	25.1340	21.38	20.66	42.04	60.00	-17.96	QP	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.

**CP30-air7**

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

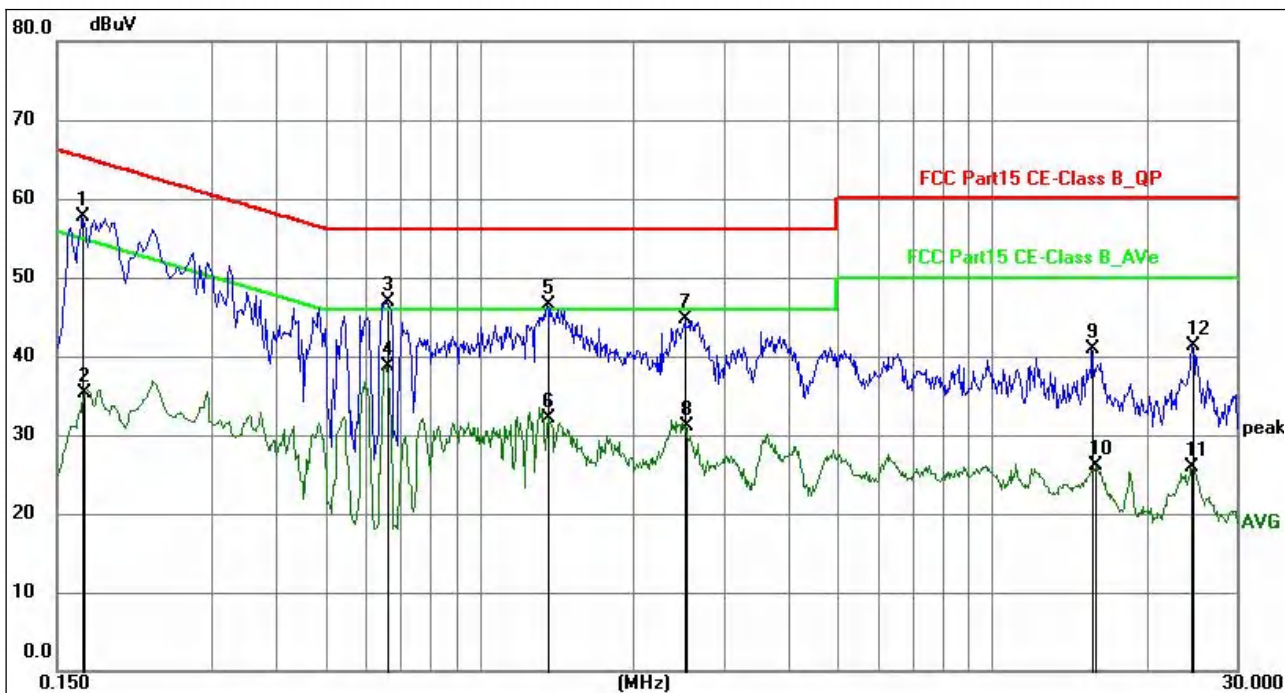


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1680	37.51	20.25	57.76	65.06	-7.30	QP	P
2	0.1693	15.03	20.26	35.29	54.99	-19.70	AVG	P
3	0.6582	26.60	20.29	46.89	56.00	-9.11	QP	P
4	0.6582	18.47	20.29	38.76	46.00	-7.24	AVG	P
5	1.3559	26.14	20.31	46.45	56.00	-9.55	QP	P
6	1.3649	11.70	20.31	32.01	46.00	-13.99	AVG	P
7	2.5215	24.43	20.32	44.75	56.00	-11.25	QP	P
8	2.5393	10.82	20.32	31.14	46.00	-14.86	AVG	P
9	15.6478	20.33	20.49	40.82	60.00	-19.18	QP	P
10	15.9268	5.57	20.49	26.06	50.00	-23.94	AVG	P
11	24.4860	5.22	20.62	25.84	50.00	-24.16	AVG	P
12	24.5985	20.67	20.62	41.29	60.00	-18.71	QP	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	TX 802.11n20 - 5745MHz

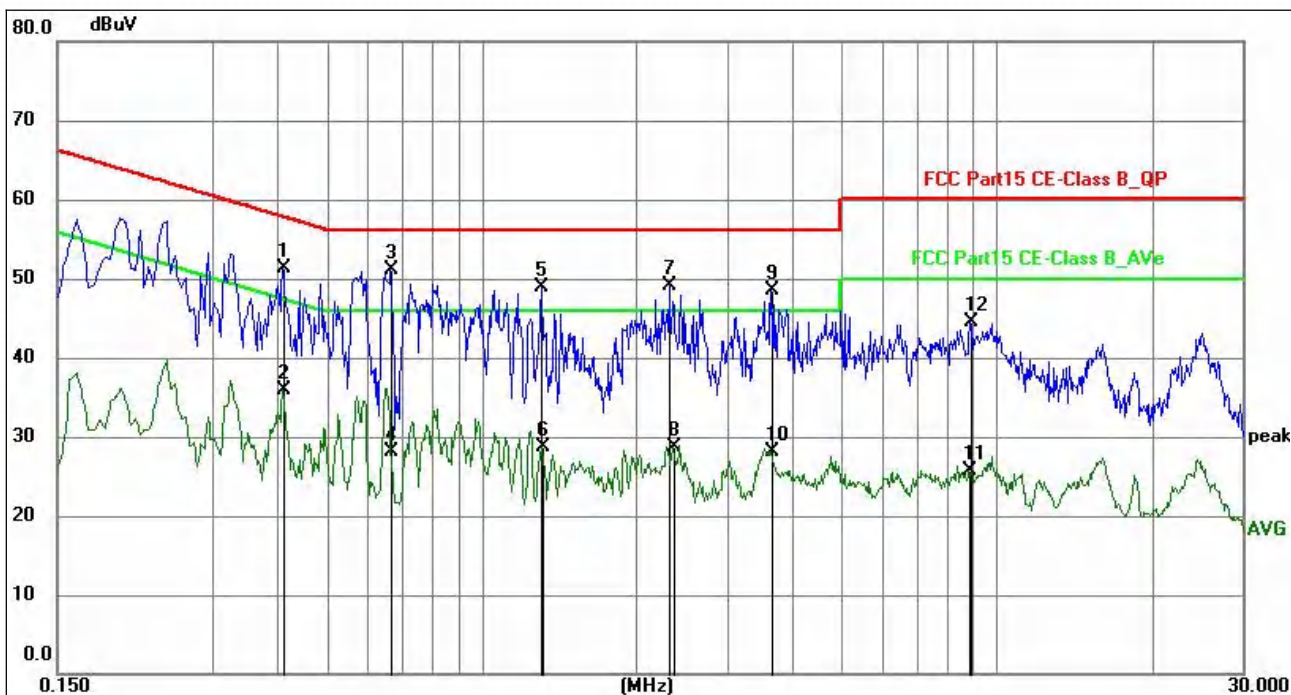

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.4107	30.93	20.32	51.25	57.63	-6.38	QP	P
2	0.4107	15.60	20.32	35.92	47.63	-11.71	AVG	P
3	0.6673	30.73	20.29	51.02	56.00	-4.98	QP	P
4	0.6673	7.80	20.29	28.09	46.00	-17.91	AVG	P
5	1.3064	28.56	20.31	48.87	56.00	-7.13	QP	P
6	1.3104	8.46	20.31	28.77	46.00	-17.23	AVG	P
7	2.3100	28.85	20.32	49.17	56.00	-6.83	QP	P
8	2.3549	8.45	20.32	28.77	46.00	-17.23	AVG	P
9	3.6465	28.17	20.33	48.50	56.00	-7.50	QP	P
10	3.6465	7.82	20.33	28.15	46.00	-17.85	AVG	P
11	8.8483	5.23	20.44	25.67	50.00	-24.33	AVG	P
12	8.8978	24.12	20.44	44.56	60.00	-15.44	QP	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor.
4. The test data shows only the worst case 802.11n20 - 5745MHz.



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.


4.2.3 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.




4.2.4 TEST CONFIGURATION


1. For radiated emissions below 30MHz

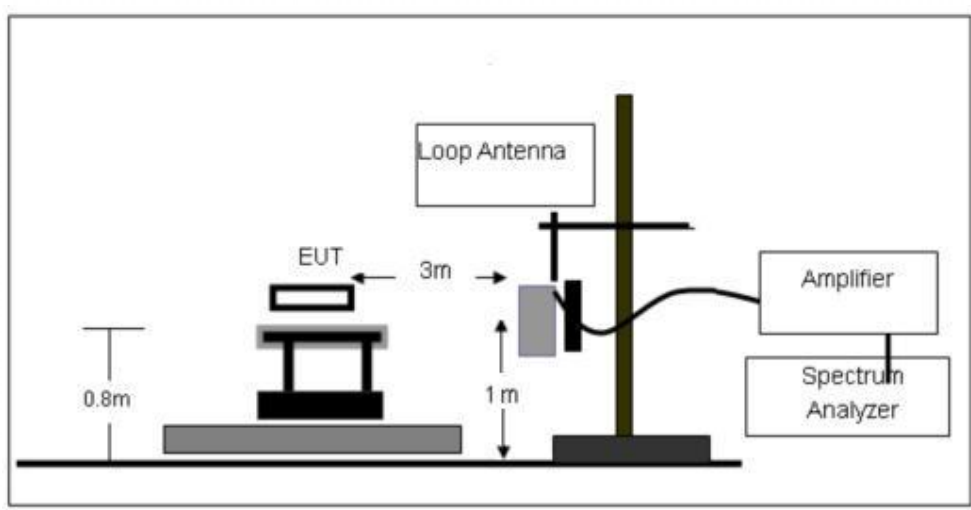

2. For radiated emissions from 30MHz to 1000MHz

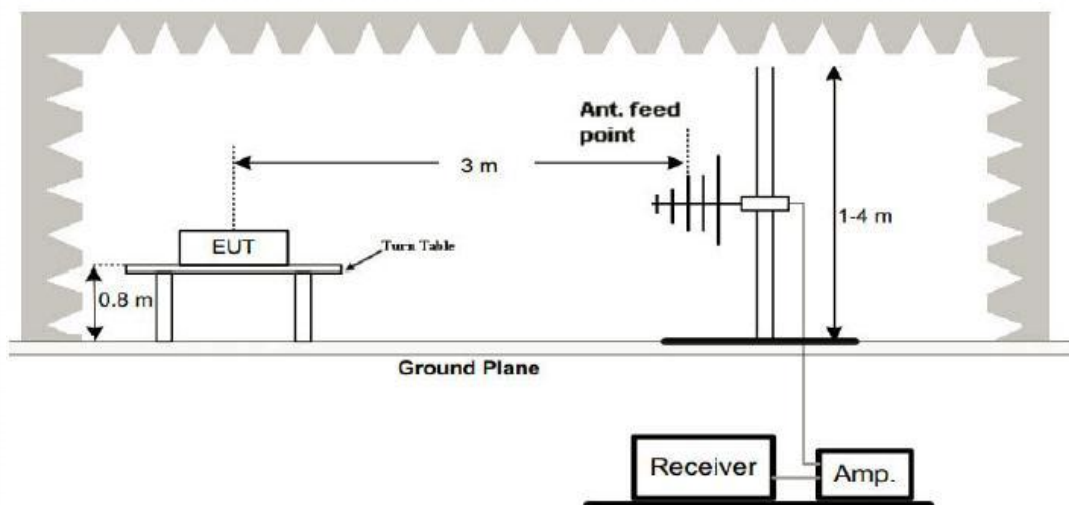

3. Radiated Emission Test-Up Frequency Above 1GHz

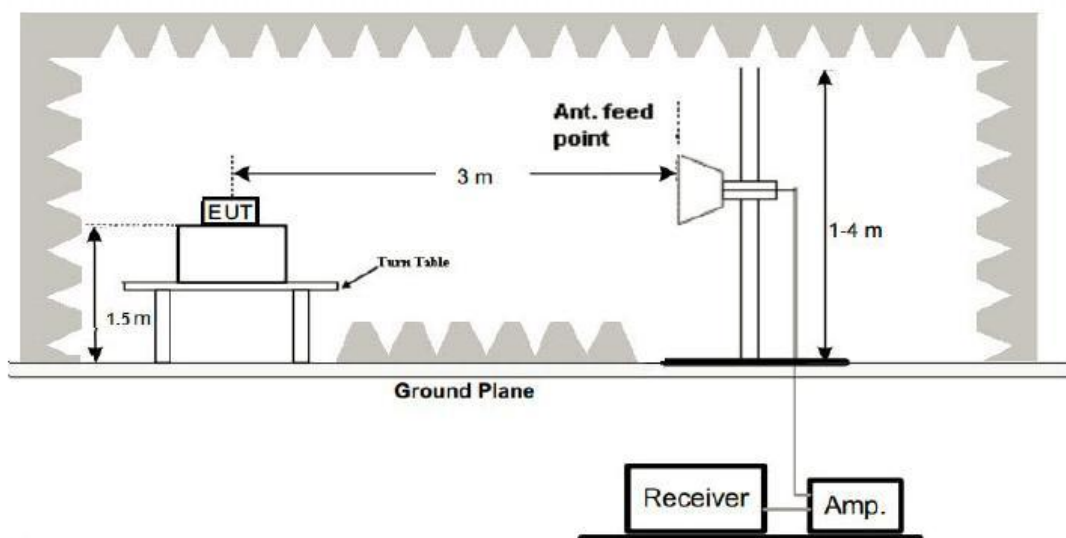

4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

**Note:**

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.


4.2.6 TEST RESULT

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

**A5 Mini K Between 30MHz – 1GHz**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

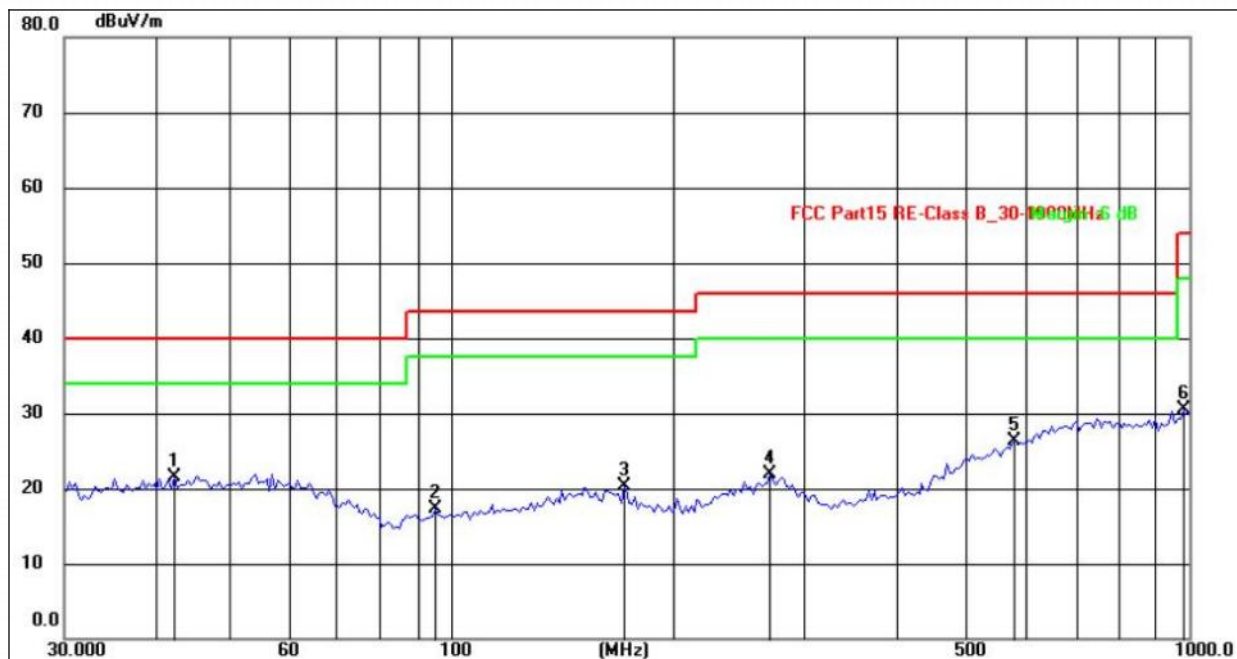


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.2280	29.68	-8.12	21.56	40.00	-18.44	QP
2	95.4269	31.22	-13.99	17.23	43.50	-26.27	QP
3	171.6932	31.38	-11.15	20.23	43.50	-23.27	QP
4	270.8491	30.72	-8.90	21.82	46.00	-24.18	QP
5	580.7025	29.57	-3.36	26.21	46.00	-19.79	QP
6	982.6200	29.68	0.76	30.44	54.00	-23.56	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

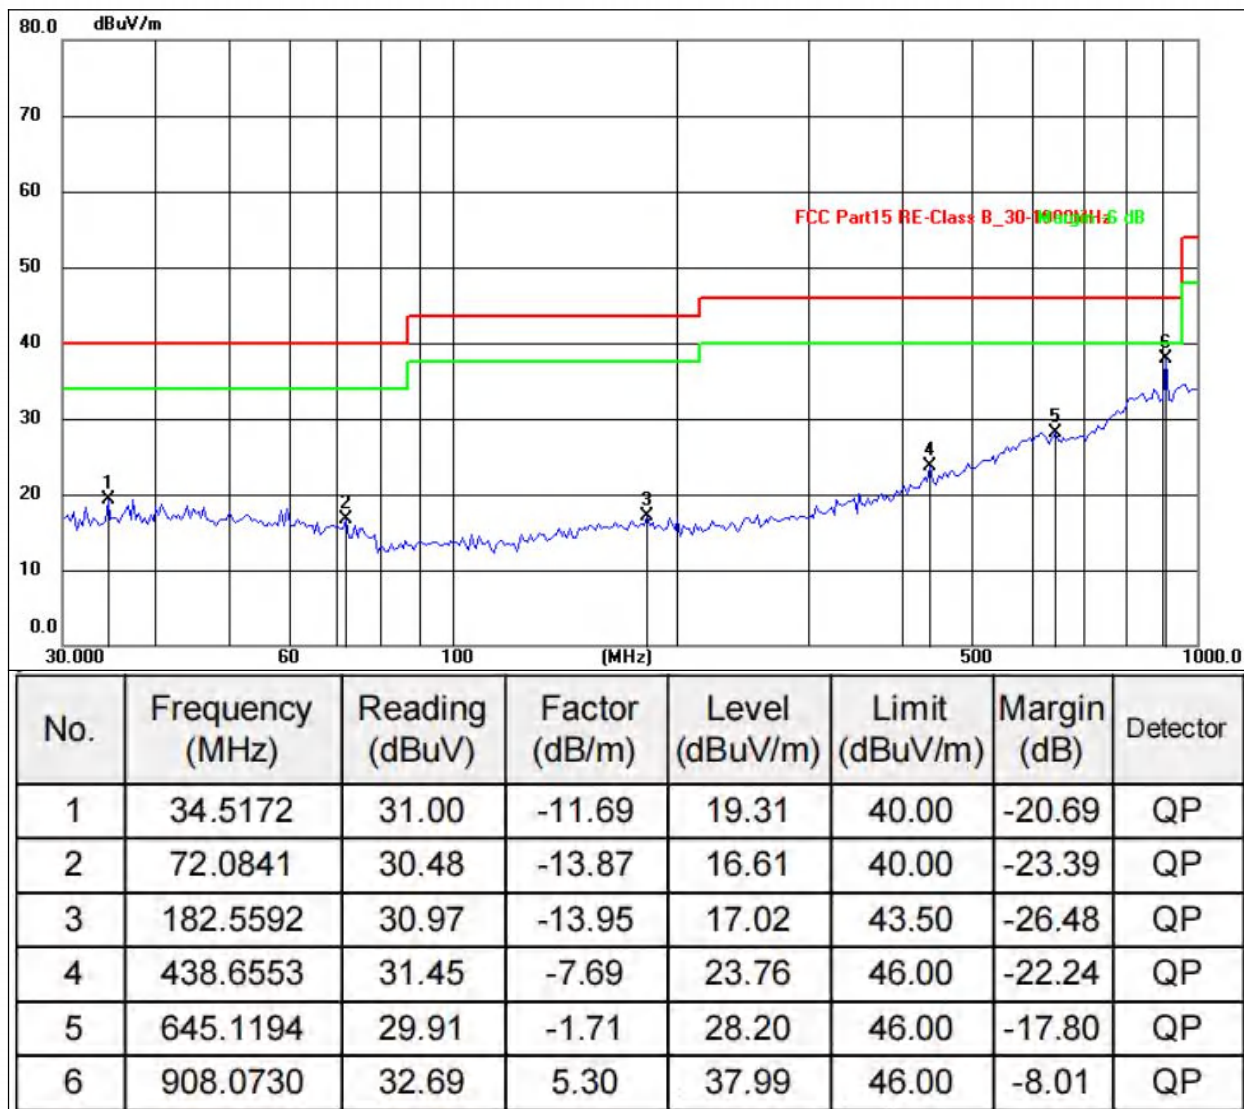


Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case K 802.11n20 - 5745MHz.

**A5MINI F-S Between 30MHz – 1GHz**

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

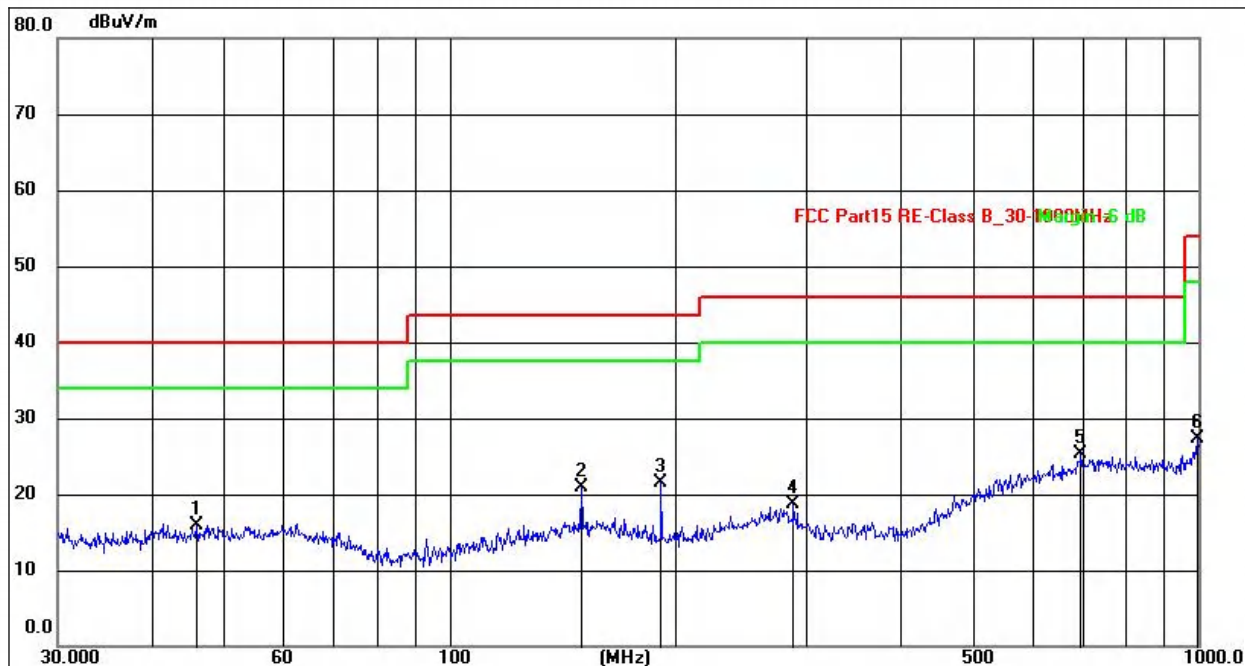


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	46.0162	29.93	-13.98	15.95	40.00	-24.05	QP
2	150.0107	37.17	-16.35	20.82	43.50	-22.68	QP
3	191.7450	39.56	-18.11	21.45	43.50	-22.05	QP
4	287.9904	33.75	-14.98	18.77	46.00	-27.23	QP
5	696.8567	31.74	-6.49	25.25	46.00	-20.75	QP
6	996.4995	31.95	-4.63	27.32	54.00	-26.68	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

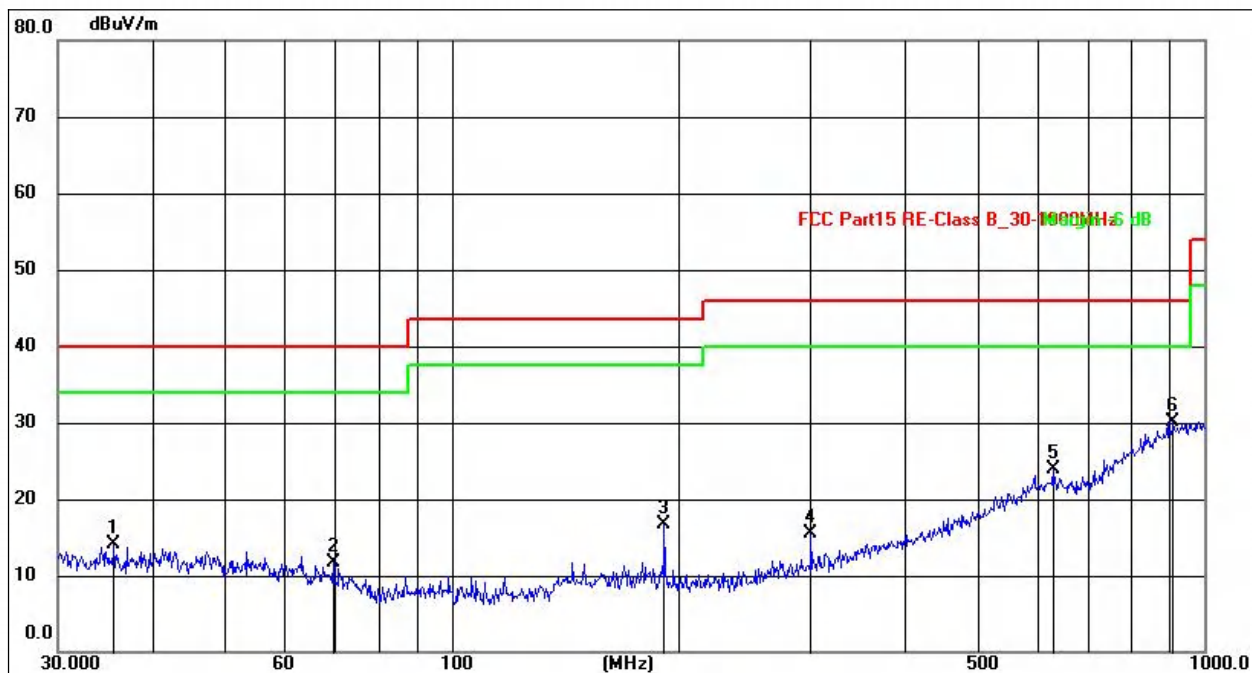


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.6238	31.45	-17.41	14.04	40.00	-25.96	QP
2	69.6003	30.99	-19.20	11.79	40.00	-28.21	QP
3	191.7450	36.74	-20.05	16.69	43.50	-26.81	QP
4	300.3672	33.40	-17.89	15.51	46.00	-30.49	QP
5	629.4772	31.30	-7.34	23.96	46.00	-22.04	QP
6	909.6666	30.50	-0.38	30.12	46.00	-15.88	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz.

**CP30-air Between 30MHz – 1GHz**

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

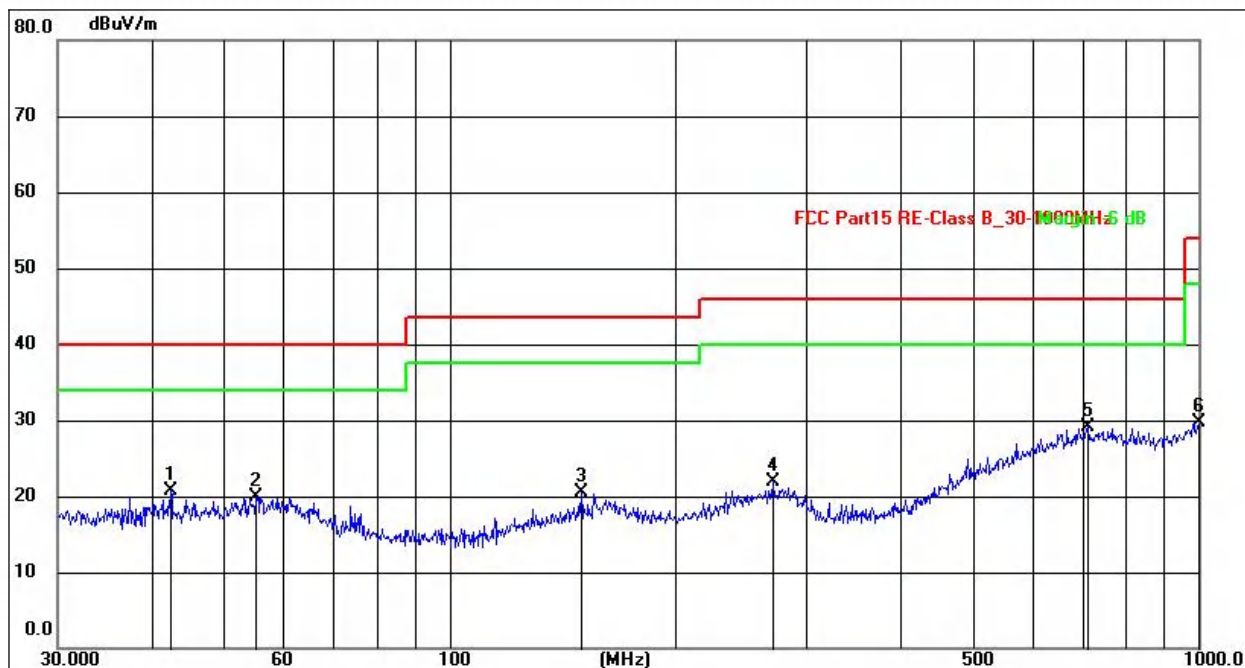


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.4508	34.72	-14.01	20.71	40.00	-19.29	QP
2	55.2207	33.89	-14.03	19.86	40.00	-20.14	QP
3	150.0107	36.83	-16.35	20.48	43.50	-23.02	QP
4	270.3747	36.41	-14.53	21.88	46.00	-24.12	QP
5	711.6734	35.52	-6.45	29.07	46.00	-16.93	QP
6	1000.0000	34.25	-4.56	29.69	54.00	-24.31	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

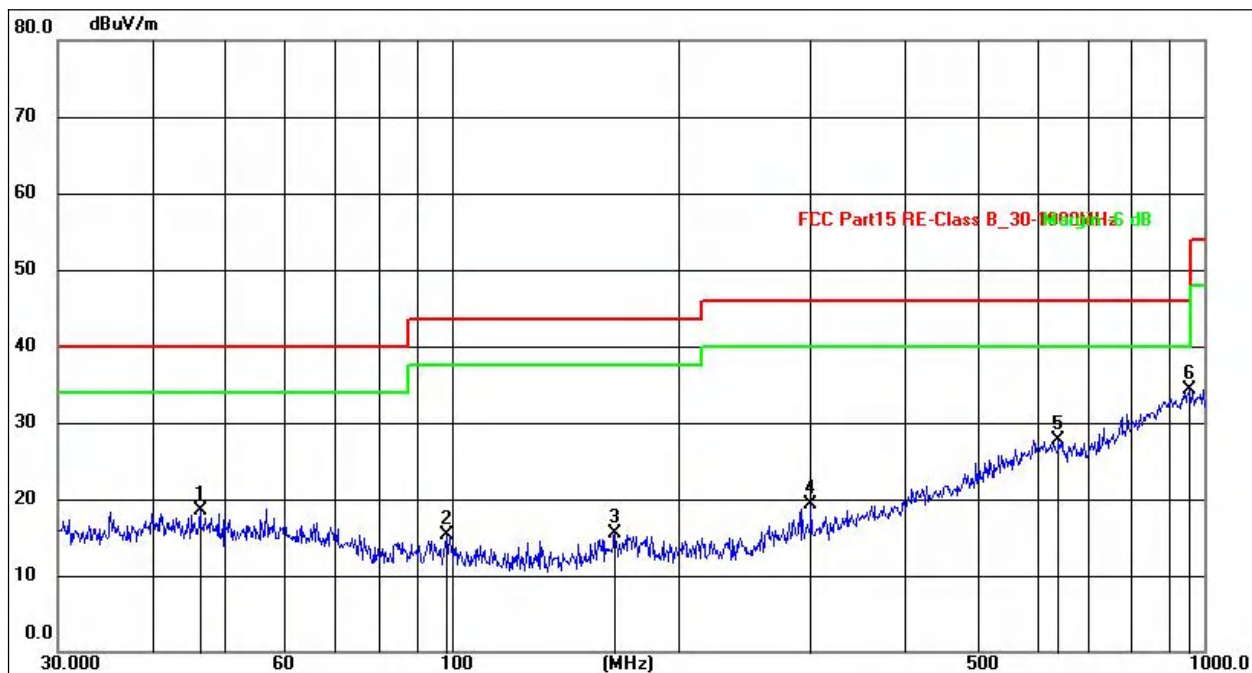

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	46.3402	35.61	-17.03	18.58	40.00	-21.42	QP
2	98.4865	36.41	-21.14	15.27	43.50	-28.23	QP
3	164.9071	35.33	-19.87	15.46	43.50	-28.04	QP
4	300.3672	37.10	-17.89	19.21	46.00	-26.79	QP
5	640.6109	35.11	-7.35	27.76	46.00	-18.24	QP
6	955.4379	34.42	-0.14	34.28	46.00	-11.72	QP


Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz.



CP30-air Between 30MHz – 1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

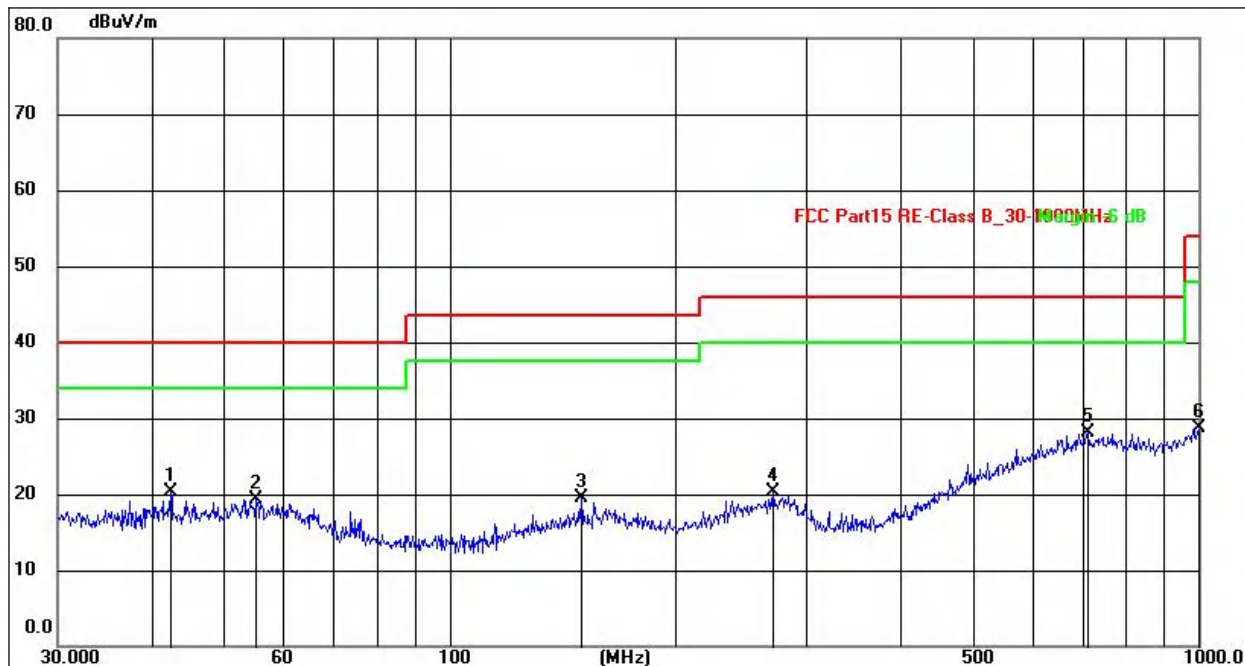


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.4508	34.22	-14.01	20.21	40.00	-19.79	QP
2	55.2207	33.39	-14.03	19.36	40.00	-20.64	QP
3	150.0107	35.83	-16.35	19.48	43.50	-24.02	QP
4	270.3747	34.91	-14.53	20.38	46.00	-25.62	QP
5	711.6734	34.52	-6.45	28.07	46.00	-17.93	QP
6	1000.0000	33.25	-4.56	28.69	54.00	-25.31	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

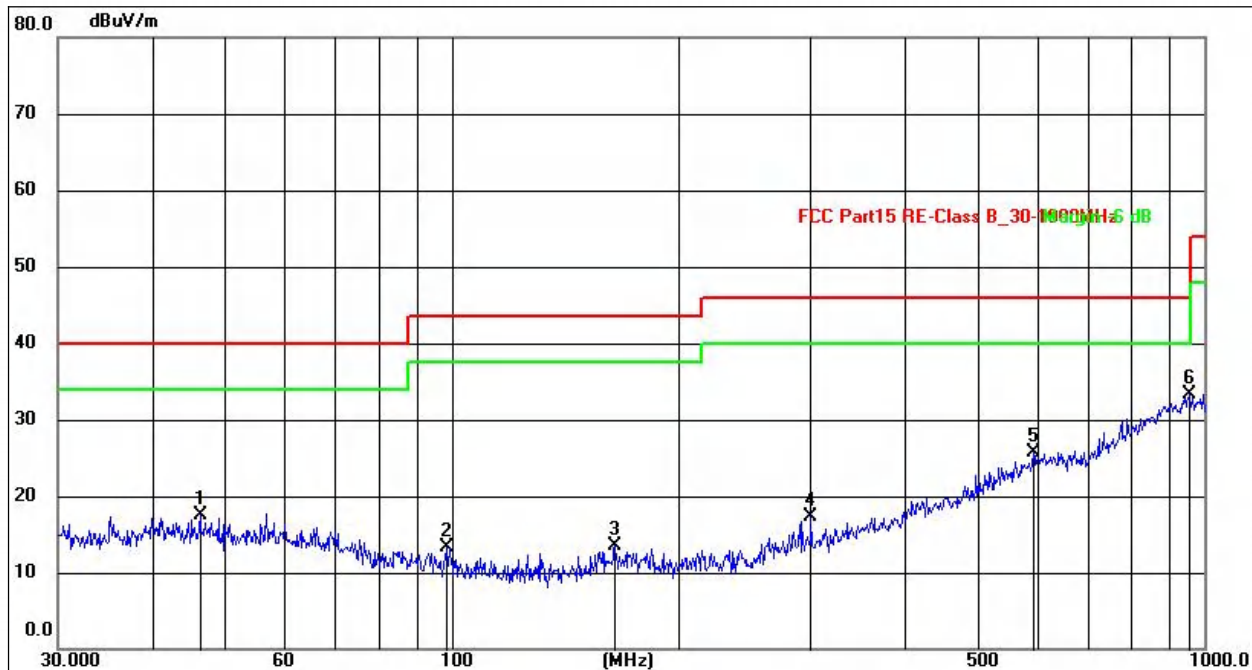


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	46.3402	34.61	-17.03	17.58	40.00	-22.42	QP
2	98.4865	34.41	-21.14	13.27	43.50	-30.23	QP
3	164.9072	33.33	-19.87	13.46	43.50	-30.04	QP
4	300.3672	35.10	-17.89	17.21	46.00	-28.79	QP
5	593.0496	33.29	-7.59	25.70	46.00	-20.30	QP
6	955.4379	33.42	-0.14	33.28	46.00	-12.72	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz

**CP30-air2 Between 30MHz – 1GHz**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

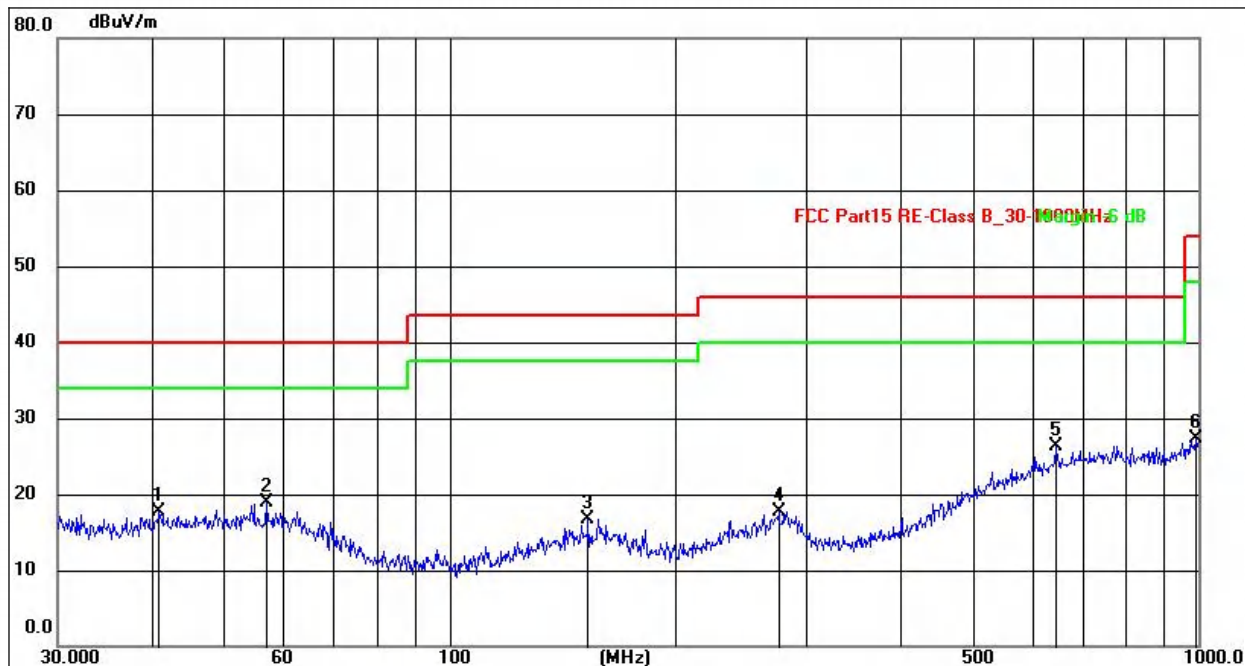


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.9880	31.74	-14.02	17.72	40.00	-22.28	QP
2	56.9912	32.94	-14.07	18.87	40.00	-21.13	QP
3	153.2003	32.96	-16.23	16.73	43.50	-26.77	QP
4	275.1570	32.00	-14.24	17.76	46.00	-28.24	QP
5	645.1194	33.73	-7.50	26.23	46.00	-19.77	QP
6	993.0114	31.93	-4.71	27.22	54.00	-26.78	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

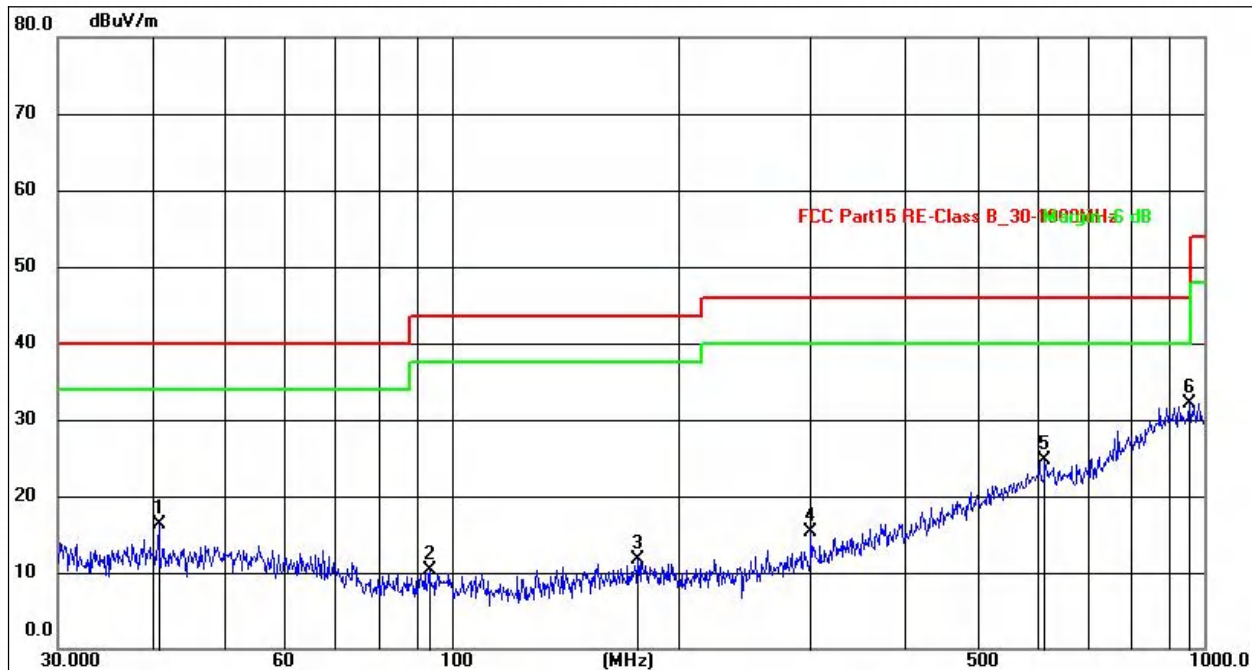


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.8445	33.07	-16.80	16.27	40.00	-23.73	QP
2	93.4402	31.53	-21.29	10.24	43.50	-33.26	QP
3	176.8878	31.39	-19.64	11.75	43.50	-31.75	QP
4	300.3672	33.14	-17.89	15.25	46.00	-30.75	QP
5	614.2142	32.00	-7.34	24.66	46.00	-21.34	QP
6	955.4381	32.23	-0.14	32.09	46.00	-13.91	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz

**CP30-air3 Between 30MHz – 1GHz**

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

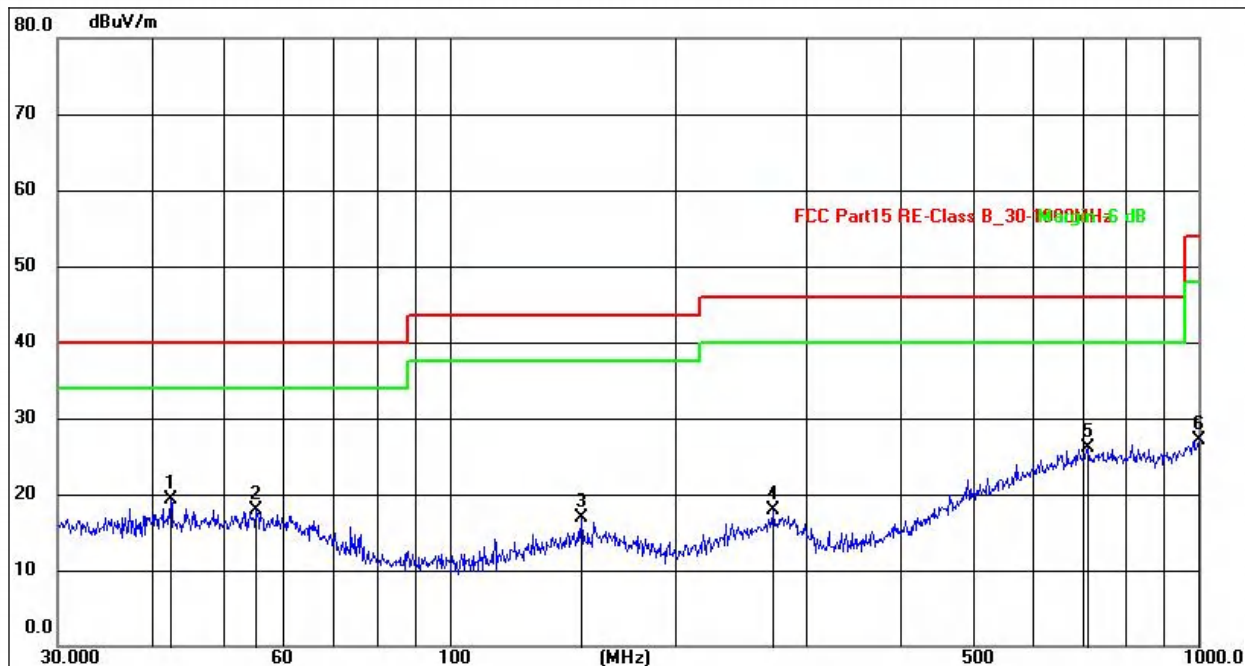


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.4508	33.22	-14.01	19.21	40.00	-20.79	QP
2	55.2207	31.89	-14.03	17.86	40.00	-22.14	QP
3	150.0108	33.33	-16.35	16.98	43.50	-26.52	QP
4	270.3748	32.41	-14.53	17.88	46.00	-28.12	QP
5	711.6734	32.52	-6.45	26.07	46.00	-19.93	QP
6	1000.0000	31.75	-4.56	27.19	54.00	-26.81	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

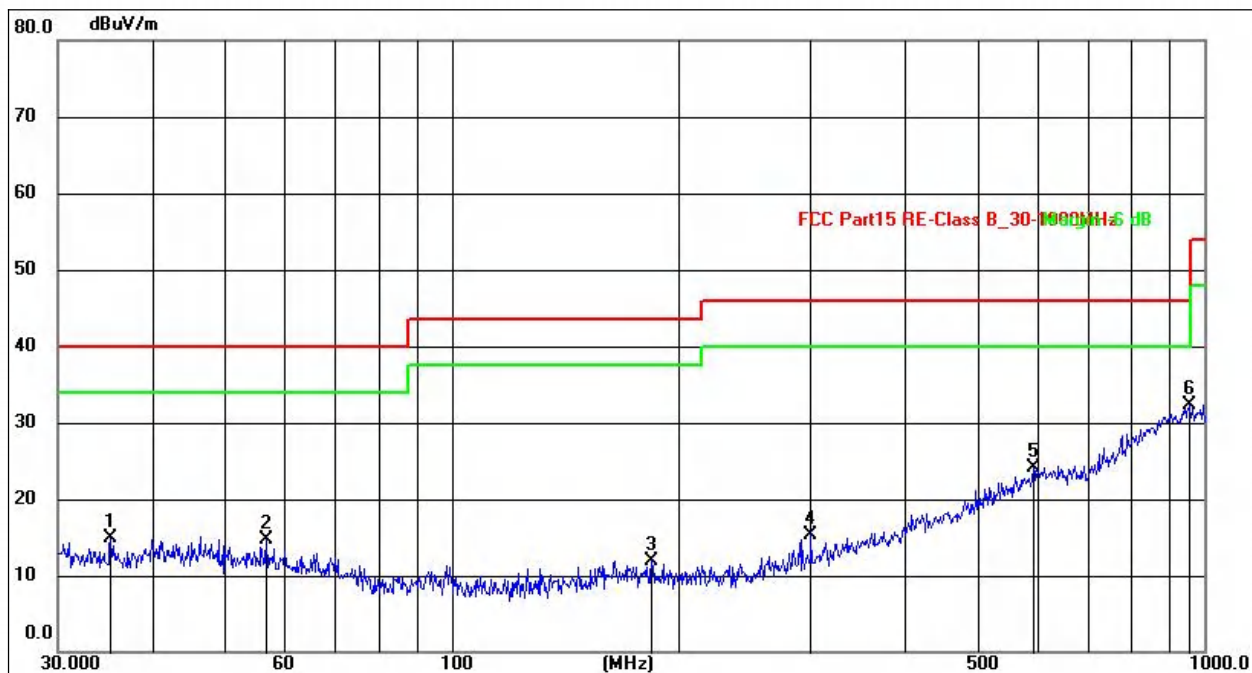


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.2511	32.28	-17.46	14.82	40.00	-25.18	QP
2	56.7917	32.60	-17.88	14.72	40.00	-25.28	QP
3	184.4898	31.77	-19.77	12.00	43.50	-31.50	QP
4	300.3672	33.10	-17.89	15.21	46.00	-30.79	QP
5	593.0496	31.79	-7.59	24.20	46.00	-21.80	QP
6	955.4381	32.42	-0.14	32.28	46.00	-13.72	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz

**CP30-air5 Between 30MHz – 1GHz**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

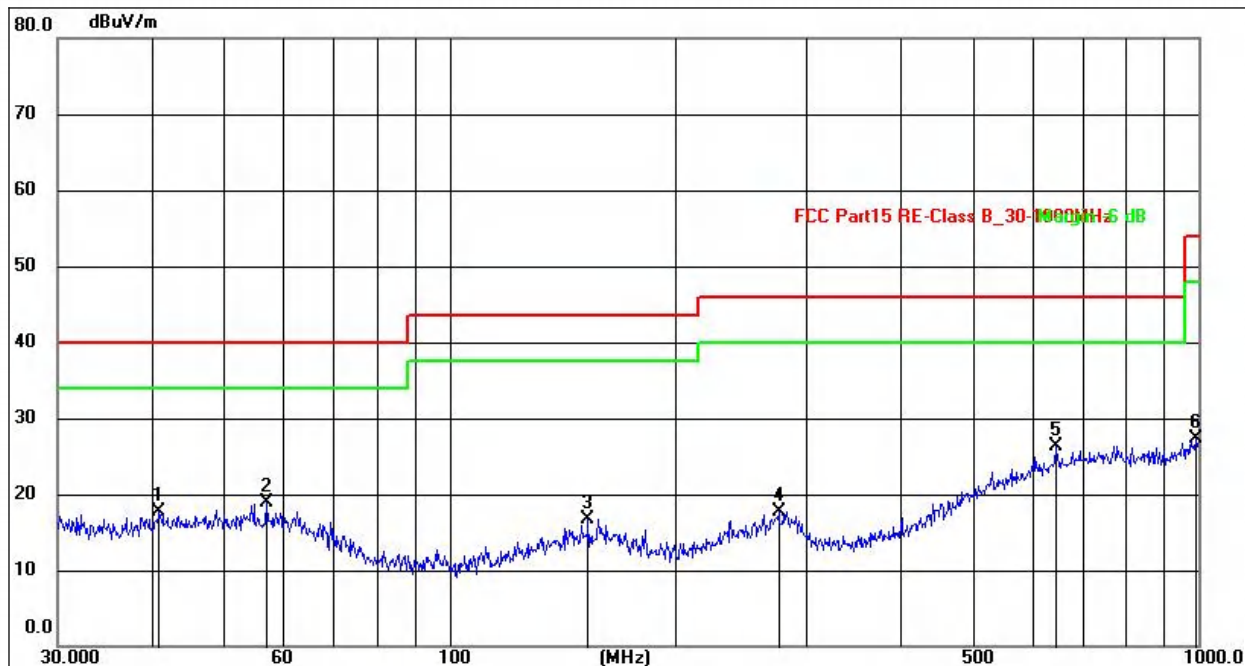


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.9880	31.74	-14.02	17.72	40.00	-22.28	QP
2	56.9912	32.94	-14.07	18.87	40.00	-21.13	QP
3	153.2003	32.96	-16.23	16.73	43.50	-26.77	QP
4	275.1570	32.00	-14.24	17.76	46.00	-28.24	QP
5	645.1194	33.73	-7.50	26.23	46.00	-19.77	QP
6	993.0114	31.93	-4.71	27.22	54.00	-26.78	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

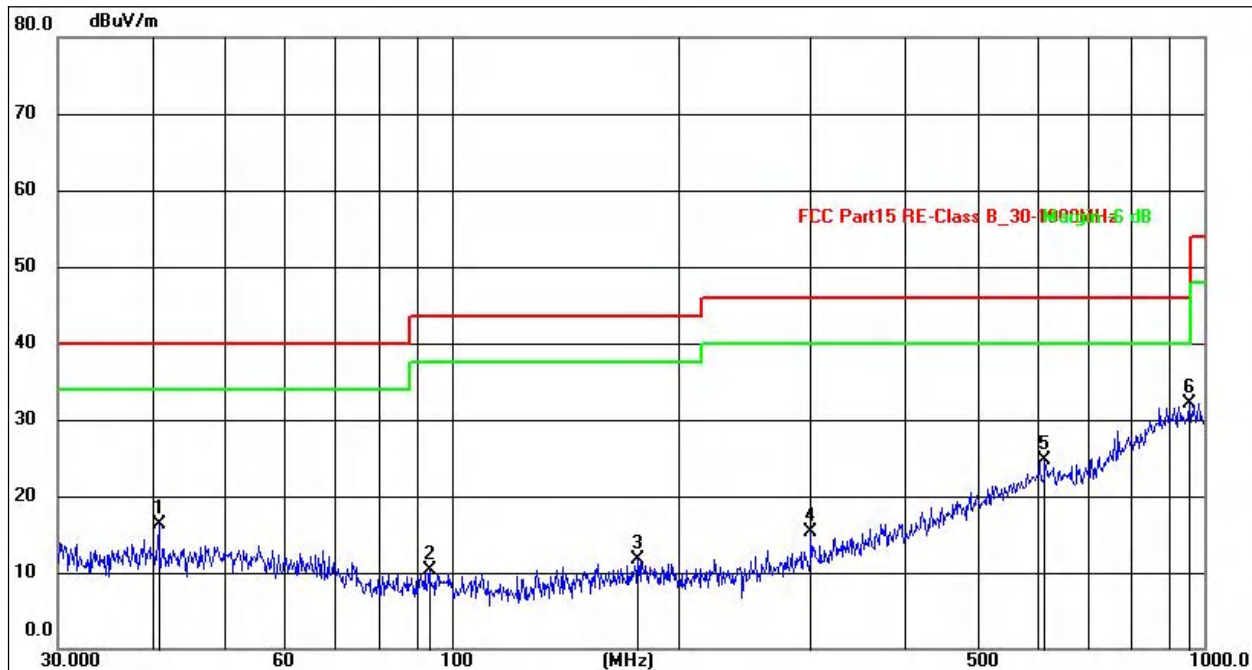


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.8445	33.07	-16.80	16.27	40.00	-23.73	QP
2	93.4402	31.53	-21.29	10.24	43.50	-33.26	QP
3	176.8878	31.39	-19.64	11.75	43.50	-31.75	QP
4	300.3672	33.14	-17.89	15.25	46.00	-30.75	QP
5	614.2142	32.00	-7.34	24.66	46.00	-21.34	QP
6	955.4381	32.23	-0.14	32.09	46.00	-13.91	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz

**CP30-air6 Between 30MHz – 1GHz**

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

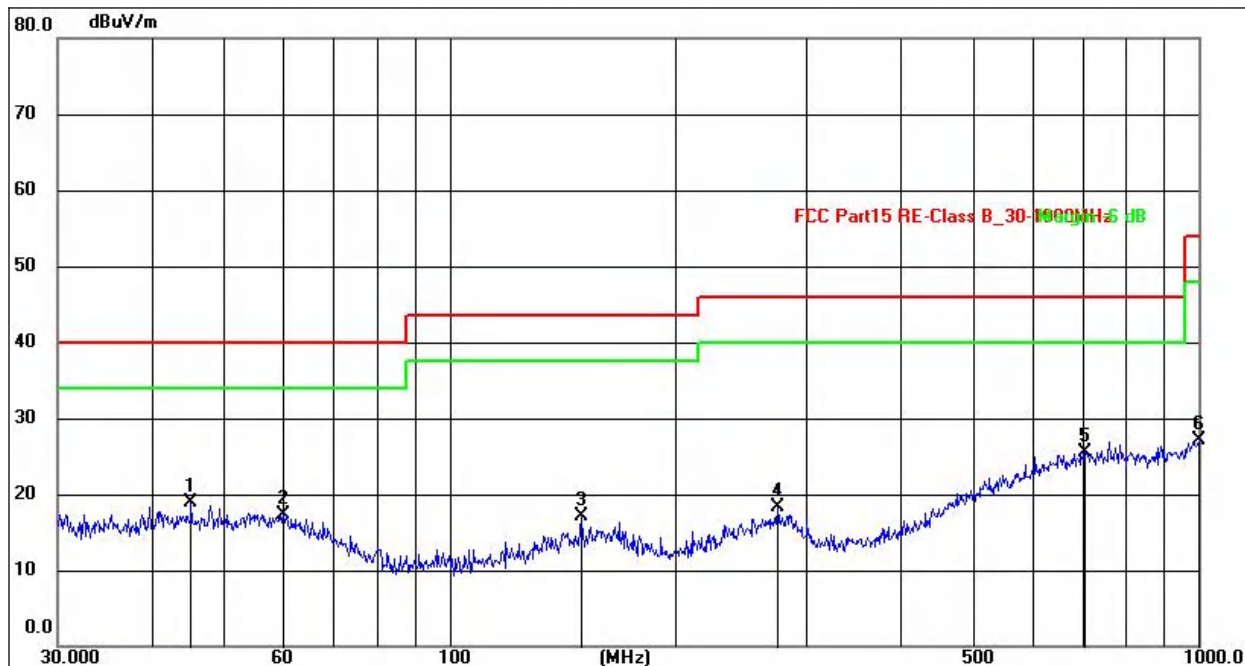


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	45.2166	32.83	-13.98	18.85	40.00	-21.15	QP
2	60.0691	31.55	-14.15	17.40	40.00	-22.60	QP
3	150.0108	33.42	-16.35	17.07	43.50	-26.43	QP
4	274.1938	32.60	-14.30	18.30	46.00	-27.70	QP
5	704.2261	31.89	-6.44	25.45	46.00	-20.55	QP
6	1000.0000	31.67	-4.56	27.11	54.00	-26.89	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

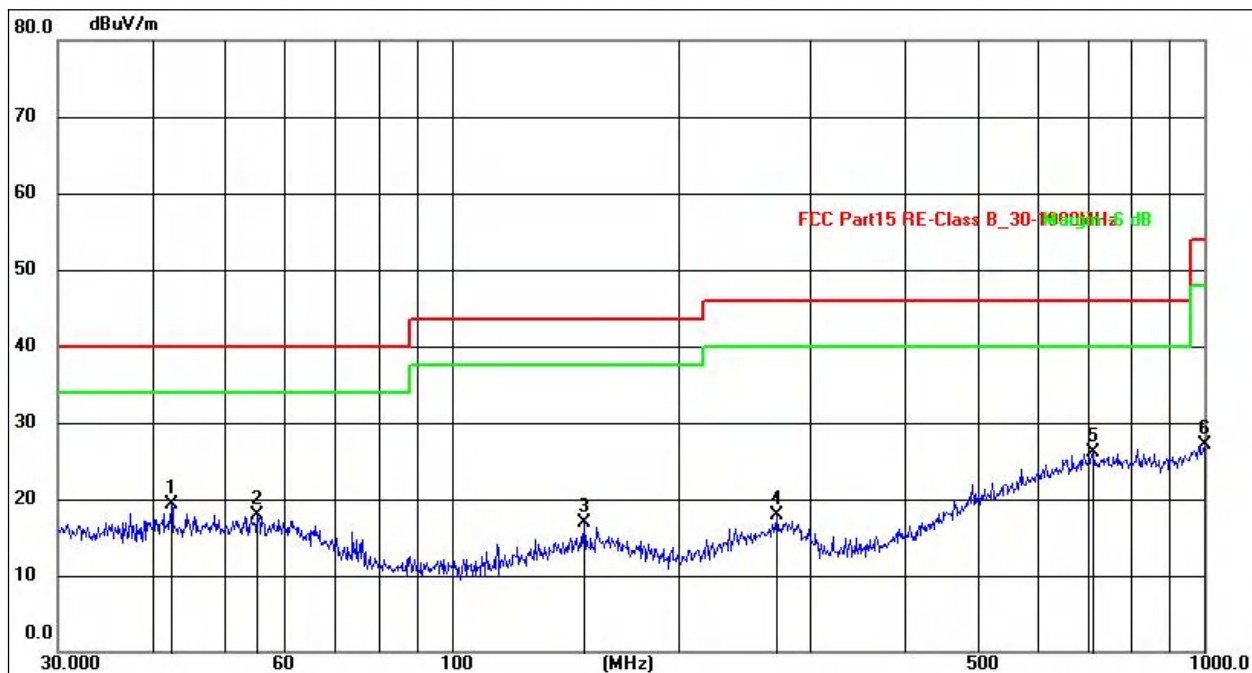


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.4508	33.22	-14.01	19.21	40.00	-20.79	QP
2	55.2207	31.89	-14.03	17.86	40.00	-22.14	QP
3	150.0108	33.33	-16.35	16.98	43.50	-26.52	QP
4	270.3748	32.41	-14.53	17.88	46.00	-28.12	QP
5	711.6734	32.52	-6.45	26.07	46.00	-19.93	QP
6	1000.0000	31.75	-4.56	27.19	54.00	-26.81	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz

**CP30-air7 Between 30MHz – 1GHz**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

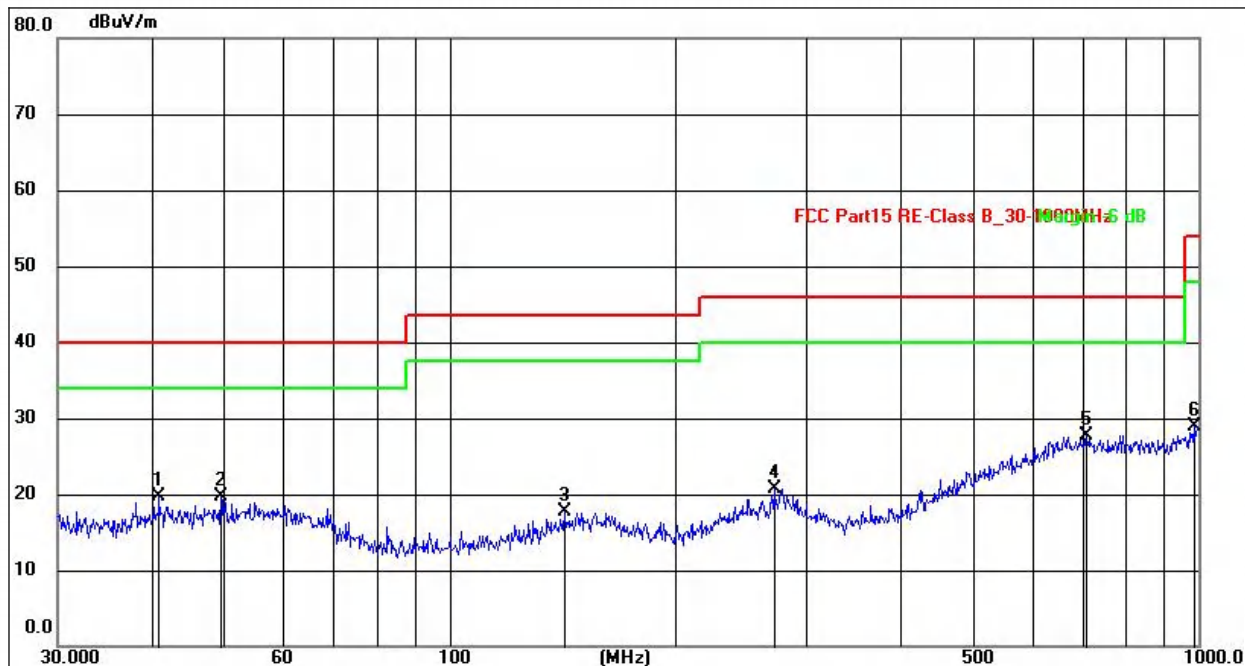


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.9879	33.81	-14.02	19.79	40.00	-20.21	QP
2	49.5328	33.58	-13.94	19.64	40.00	-20.36	QP
3	142.3243	34.33	-16.64	17.69	43.50	-25.81	QP
4	271.3245	35.19	-14.48	20.71	46.00	-25.29	QP
5	709.1821	34.17	-6.46	27.71	46.00	-18.29	QP
6	986.0715	33.67	-4.86	28.81	54.00	-25.19	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

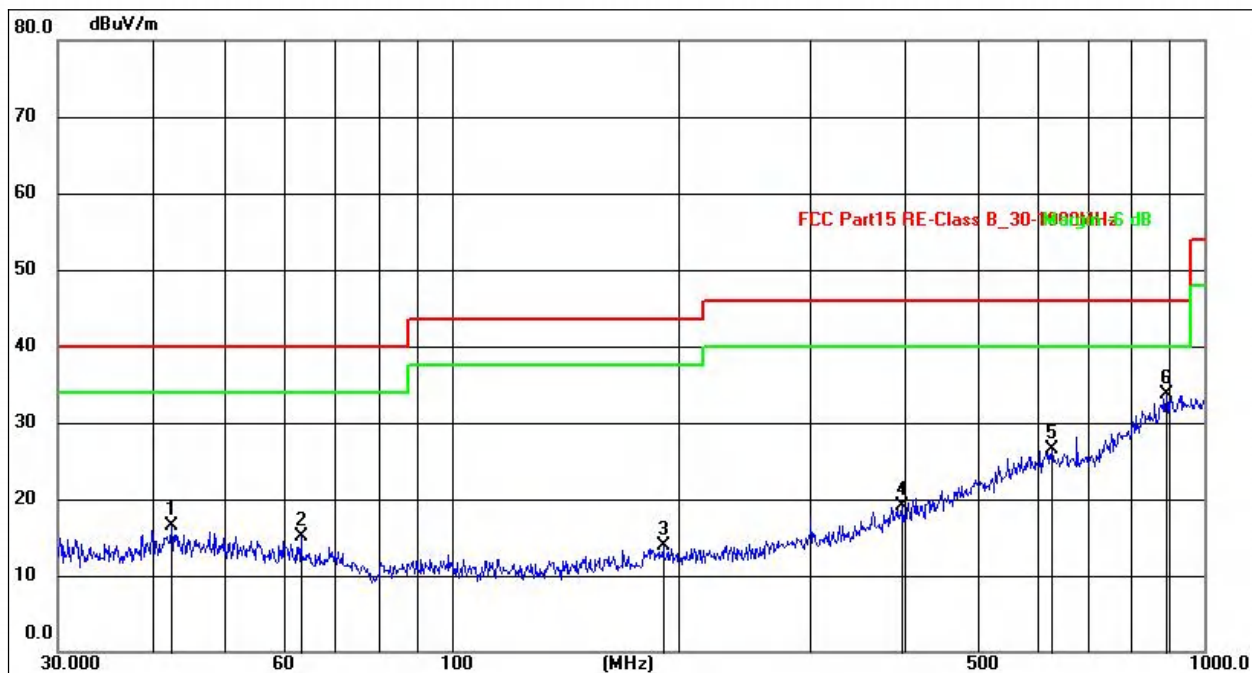

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.4508	33.37	-16.86	16.51	40.00	-23.49	QP
2	63.0915	33.53	-18.52	15.01	40.00	-24.99	QP
3	191.0738	33.95	-20.03	13.92	43.50	-29.58	QP
4	397.6333	33.70	-14.60	19.10	46.00	-26.90	QP
5	627.2736	33.93	-7.34	26.59	46.00	-19.41	QP
6	890.7277	34.43	-0.70	33.73	46.00	-12.27	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 - 5745MHz

**Between A5 Mini K 1GHz~25GHz**

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	5.8G TX- 802.11a/ n20/ ac20/ n40/ ac40		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	49.84	30.55	5.77	24.66	49.72	74.00	-24.28	PK
V	11490.00	42.12	30.55	5.77	24.66	42.00	54.00	-12.00	AV
V	17235.00	51.11	30.33	6.32	24.55	51.65	68.20	-16.55	PK
V	17235.00	41.64	30.33	6.32	24.55	42.18	54.00	-11.82	AV
V	22980.00	48.72	30.85	7.45	24.69	50.01	74.00	-23.99	PK
V	22980.00	41.57	30.85	7.45	24.69	42.86	54.00	-11.14	AV
V	28725.00	51.97	31.02	8.99	25.57	55.51	68.20	-12.69	PK
V	28725.00	41.79	31.02	8.99	25.57	45.33	54.00	-8.67	AV
H	11490.00	50.59	30.55	5.77	24.66	50.47	74.00	-23.53	PK
H	11490.00	42.09	30.55	5.77	24.66	41.97	54.00	-12.03	AV
H	17235.00	52.60	30.33	6.32	24.55	53.14	68.20	-15.06	PK
H	17235.00	41.80	30.33	6.32	24.55	42.34	54.00	-11.66	AV
H	22980.00	50.56	30.85	7.45	24.69	51.85	74.00	-22.15	PK
H	22980.00	42.03	30.85	7.45	24.69	43.32	54.00	-10.68	AV
H	28725.00	51.15	31.02	8.99	25.57	54.69	68.20	-13.51	PK
H	28725.00	42.26	31.02	8.99	25.57	45.80	54.00	-8.20	AV
Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	49.89	30.55	5.77	24.66	49.77	74.00	-24.23	PK
V	11570.00	42.28	30.55	5.77	24.66	42.16	54.00	-11.84	AV
V	17355.00	49.03	30.33	6.32	24.55	49.57	68.20	-18.63	PK
V	17355.00	42.08	30.33	6.32	24.55	42.62	54.00	-11.38	AV
V	23140.00	51.11	30.85	7.45	24.69	52.40	74.00	-21.60	PK
V	23140.00	41.89	30.85	7.45	24.69	43.18	54.00	-10.82	AV
V	28925.00	49.06	31.02	8.99	25.57	52.60	68.20	-15.60	PK
V	28925.00	42.11	31.02	8.99	25.57	45.65	54.00	-8.35	AV
H	11570.00	49.24	30.55	5.77	24.66	49.12	74.00	-24.88	PK
H	11570.00	42.36	30.55	5.77	24.66	42.24	54.00	-11.76	AV
H	17355.00	53.47	30.33	6.32	24.55	54.01	68.20	-14.19	PK
H	17355.00	41.89	30.33	6.32	24.55	42.43	54.00	-11.57	AV
H	23140.00	50.98	30.85	7.45	24.69	52.27	74.00	-21.73	PK
H	23140.00	42.30	30.85	7.45	24.69	43.59	54.00	-10.41	AV
H	28925.00	48.88	31.02	8.99	25.57	52.42	68.20	-15.78	PK
H	28925.00	42.48	31.02	8.99	25.57	46.02	54.00	-7.98	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	50.23	30.55	5.77	24.66	50.11	74.00	-23.89	PK
V	11650.00	42.04	30.55	5.77	24.66	41.92	54.00	-12.08	AV
V	17475.00	48.92	30.33	6.32	24.55	49.46	68.20	-18.74	PK
V	17475.00	41.79	30.33	6.32	24.55	42.33	54.00	-11.67	AV
V	23300.00	49.99	30.85	7.45	24.69	51.28	74.00	-22.72	PK
V	23300.00	41.88	30.85	7.45	24.69	43.17	54.00	-10.83	AV
V	29125.00	52.57	31.02	8.99	25.57	56.11	68.20	-12.09	PK
V	29125.00	41.82	31.02	8.99	25.57	45.36	54.00	-8.64	AV
H	11650.00	51.22	30.55	5.77	24.66	51.10	74.00	-22.90	PK
H	11650.00	41.58	30.55	5.77	24.66	41.46	54.00	-12.54	AV
H	17475.00	51.81	30.33	6.32	24.55	52.35	68.20	-15.85	PK
H	17475.00	42.02	30.33	6.32	24.55	42.56	54.00	-11.44	AV
H	23300.00	52.65	30.85	7.45	24.69	53.94	74.00	-20.06	PK
H	23300.00	41.82	30.85	7.45	24.69	43.11	54.00	-10.89	AV
H	29125.00	48.64	31.02	8.99	25.57	52.18	68.20	-16.02	PK
H	29125.00	42.20	31.02	8.99	25.57	45.74	54.00	-8.26	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	49.55	30.55	5.77	24.66	49.43	74.00	-24.57	PK
V	11490.00	41.83	30.55	5.77	24.66	41.71	54.00	-12.29	AV
V	17235.00	50.82	30.33	6.32	24.55	51.36	68.20	-16.84	PK
V	17235.00	41.35	30.33	6.32	24.55	41.89	54.00	-12.11	AV
V	22980.00	48.43	30.85	7.45	24.69	49.72	74.00	-24.28	PK
V	22980.00	41.28	30.85	7.45	24.69	42.57	54.00	-11.43	AV
V	28725.00	51.68	31.02	8.99	25.57	55.22	68.20	-12.98	PK
V	28725.00	41.50	31.02	8.99	25.57	45.04	54.00	-8.96	AV
H	11490.00	50.30	30.55	5.77	24.66	50.18	74.00	-23.82	PK
H	11490.00	41.80	30.55	5.77	24.66	41.68	54.00	-12.32	AV
H	17235.00	52.31	30.33	6.32	24.55	52.85	68.20	-15.35	PK
H	17235.00	41.51	30.33	6.32	24.55	42.05	54.00	-11.95	AV
H	22980.00	50.27	30.85	7.45	24.69	51.56	74.00	-22.44	PK
H	22980.00	41.74	30.85	7.45	24.69	43.03	54.00	-10.97	AV
H	28725.00	50.86	31.02	8.99	25.57	54.40	68.20	-13.80	PK
H	28725.00	41.97	31.02	8.99	25.57	45.51	54.00	-8.49	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	49.61	30.55	5.77	24.66	49.49	74.00	-24.51	PK
V	11570.00	42.00	30.55	5.77	24.66	41.88	54.00	-12.12	AV
V	17355.00	48.75	30.33	6.32	24.55	49.29	68.20	-18.91	PK
V	17355.00	41.80	30.33	6.32	24.55	42.34	54.00	-11.66	AV
V	23140.00	50.83	30.85	7.45	24.69	52.12	74.00	-21.88	PK
V	23140.00	41.61	30.85	7.45	24.69	42.90	54.00	-11.10	AV
V	28925.00	48.78	31.02	8.99	25.57	52.32	68.20	-15.88	PK
V	28925.00	41.83	31.02	8.99	25.57	45.37	54.00	-8.63	AV
H	11570.00	48.96	30.55	5.77	24.66	48.84	74.00	-25.16	PK
H	11570.00	42.08	30.55	5.77	24.66	41.96	54.00	-12.04	AV
H	17355.00	53.19	30.33	6.32	24.55	53.73	68.20	-14.47	PK
H	17355.00	41.61	30.33	6.32	24.55	42.15	54.00	-11.85	AV
H	23140.00	50.70	30.85	7.45	24.69	51.99	74.00	-22.01	PK
H	23140.00	42.02	30.85	7.45	24.69	43.31	54.00	-10.69	AV
H	28925.00	48.60	31.02	8.99	25.57	52.14	68.20	-16.06	PK
H	28925.00	42.20	31.02	8.99	25.57	45.74	54.00	-8.26	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	50.51	30.55	5.77	24.66	50.39	74.00	-23.61	PK
V	11650.00	41.81	30.55	5.77	24.66	41.69	54.00	-12.31	AV
V	17475.00	48.69	30.33	6.32	24.55	49.23	68.20	-18.97	PK
V	17475.00	41.56	30.33	6.32	24.55	42.10	54.00	-11.90	AV
V	23300.00	49.76	30.85	7.45	24.69	51.05	74.00	-22.95	PK
V	23300.00	41.65	30.85	7.45	24.69	42.94	54.00	-11.06	AV
V	29125.00	52.34	31.02	8.99	25.57	55.88	68.20	-12.32	PK
V	29125.00	41.59	31.02	8.99	25.57	45.13	54.00	-8.87	AV
H	11650.00	50.99	30.55	5.77	24.66	50.87	74.00	-23.13	PK
H	11650.00	41.35	30.55	5.77	24.66	41.23	54.00	-12.77	AV
H	17475.00	51.58	30.33	6.32	24.55	52.12	68.20	-16.08	PK
H	17475.00	41.79	30.33	6.32	24.55	42.33	54.00	-11.67	AV
H	23300.00	52.42	30.85	7.45	24.69	53.71	74.00	-20.29	PK
H	23300.00	41.59	30.85	7.45	24.69	42.88	54.00	-11.12	AV
H	29125.00	48.41	31.02	8.99	25.57	51.95	68.20	-16.25	PK
H	29125.00	41.97	31.02	8.99	25.57	45.51	54.00	-8.49	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**802.11ac20**

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	50.05	30.55	5.77	24.66	49.93	74.00	-24.07	PK
V	11490.00	41.82	30.55	5.77	24.66	41.70	54.00	-12.30	AV
V	17235.00	50.81	30.33	6.32	24.55	51.35	68.20	-16.85	PK
V	17235.00	41.34	30.33	6.32	24.55	41.88	54.00	-12.12	AV
V	22980.00	48.42	30.85	7.45	24.69	49.71	74.00	-24.29	PK
V	22980.00	41.27	30.85	7.45	24.69	42.56	54.00	-11.44	AV
V	28725.00	51.67	31.02	8.99	25.57	55.21	68.20	-12.99	PK
V	28725.00	41.49	31.02	8.99	25.57	45.03	54.00	-8.97	AV
H	11490.00	50.29	30.55	5.77	24.66	50.17	74.00	-23.83	PK
H	11490.00	41.79	30.55	5.77	24.66	41.67	54.00	-12.33	AV
H	17235.00	52.30	30.33	6.32	24.55	52.84	68.20	-15.36	PK
H	17235.00	41.50	30.33	6.32	24.55	42.04	54.00	-11.96	AV
H	22980.00	50.26	30.85	7.45	24.69	51.55	74.00	-22.45	PK
H	22980.00	41.73	30.85	7.45	24.69	43.02	54.00	-10.98	AV
H	28725.00	50.85	31.02	8.99	25.57	54.39	68.20	-13.81	PK
H	28725.00	41.96	31.02	8.99	25.57	45.50	54.00	-8.50	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	50.24	30.55	5.77	24.66	50.12	74.00	-23.88	PK
V	11570.00	42.12	30.55	5.77	24.66	42.00	54.00	-12.00	AV
V	17355.00	48.87	30.33	6.32	24.55	49.41	68.20	-18.79	PK
V	17355.00	41.92	30.33	6.32	24.55	42.46	54.00	-11.54	AV
V	23140.00	50.95	30.85	7.45	24.69	52.24	74.00	-21.76	PK
V	23140.00	41.73	30.85	7.45	24.69	43.02	54.00	-10.98	AV
V	28925.00	48.90	31.02	8.99	25.57	52.44	68.20	-15.76	PK
V	28925.00	41.95	31.02	8.99	25.57	45.49	54.00	-8.51	AV
H	11570.00	49.08	30.55	5.77	24.66	48.96	74.00	-25.04	PK
H	11570.00	42.20	30.55	5.77	24.66	42.08	54.00	-11.92	AV
H	17355.00	53.31	30.33	6.32	24.55	53.85	68.20	-14.35	PK
H	17355.00	41.73	30.33	6.32	24.55	42.27	54.00	-11.73	AV
H	23140.00	50.82	30.85	7.45	24.69	52.11	74.00	-21.89	PK
H	23140.00	42.14	30.85	7.45	24.69	43.43	54.00	-10.57	AV
H	28925.00	48.72	31.02	8.99	25.57	52.26	68.20	-15.94	PK
H	28925.00	42.32	31.02	8.99	25.57	45.86	54.00	-8.14	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	50.52	30.55	5.77	24.66	50.40	74.00	-23.60	PK
V	11650.00	41.82	30.55	5.77	24.66	41.70	54.00	-12.30	AV
V	17475.00	48.70	30.33	6.32	24.55	49.24	68.20	-18.96	PK
V	17475.00	41.57	30.33	6.32	24.55	42.11	54.00	-11.89	AV
V	23300.00	49.77	30.85	7.45	24.69	51.06	74.00	-22.94	PK
V	23300.00	41.66	30.85	7.45	24.69	42.95	54.00	-11.05	AV
V	29125.00	52.35	31.02	8.99	25.57	55.89	68.20	-12.31	PK
V	29125.00	41.60	31.02	8.99	25.57	45.14	54.00	-8.86	AV
H	11650.00	51.00	30.55	5.77	24.66	50.88	74.00	-23.12	PK
H	11650.00	41.36	30.55	5.77	24.66	41.24	54.00	-12.76	AV
H	17475.00	51.59	30.33	6.32	24.55	52.13	68.20	-16.07	PK
H	17475.00	41.80	30.33	6.32	24.55	42.34	54.00	-11.66	AV
H	23300.00	52.43	30.85	7.45	24.69	53.72	74.00	-20.28	PK
H	23300.00	41.60	30.85	7.45	24.69	42.89	54.00	-11.11	AV
H	29125.00	48.42	31.02	8.99	25.57	51.96	68.20	-16.24	PK
H	29125.00	41.98	31.02	8.99	25.57	45.52	54.00	-8.48	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Between A5MINI F-S 1GHz~25GHz**

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	5.8G TX- 802.11a/ n20/ ac20/ n40/ ac40		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	54.21	30.55	5.77	24.66	54.09	74.00	54.21	PK
V	11490.00	43.00	30.55	5.77	24.66	42.88	54.00	43.00	AV
V	17235.00	52.90	30.33	6.32	24.55	53.44	74.00	52.90	PK
V	17235.00	43.91	30.33	6.32	24.55	44.45	54.00	43.91	AV
V	22980.00	54.05	30.85	7.45	24.69	55.34	74.00	54.05	PK
V	22980.00	43.74	30.85	7.45	24.69	45.03	54.00	43.74	AV
V	28725.00	54.32	31.02	8.99	25.57	57.86	74.00	54.32	PK
V	28725.00	43.28	31.02	8.99	25.57	46.82	54.00	43.28	AV
H	11490.00	50.59	30.55	5.77	24.66	50.47	74.00	50.59	PK
H	11490.00	43.35	30.55	5.77	24.66	43.23	54.00	43.35	AV
H	17235.00	52.47	30.33	6.32	24.55	53.01	74.00	52.47	PK
H	17235.00	43.56	30.33	6.32	24.55	44.10	54.00	43.56	AV
H	22980.00	52.33	30.85	7.45	24.69	53.62	74.00	52.33	PK
H	22980.00	43.85	30.85	7.45	24.69	45.14	54.00	43.85	AV
H	28725.00	54.14	31.02	8.99	25.57	57.68	74.00	54.14	PK
H	28725.00	43.66	31.02	8.99	25.57	47.20	54.00	43.66	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	51.11	30.55	5.77	24.66	50.99	74.00	-23.01	PK
V	11570.00	43.59	30.55	5.77	24.66	43.47	54.00	-10.53	AV
V	17355.00	51.79	30.33	6.32	24.55	52.33	74.00	-21.67	PK
V	17355.00	43.34	30.33	6.32	24.55	43.88	54.00	-10.12	AV
V	23140.00	54.47	30.85	7.45	24.69	55.76	74.00	-18.24	PK
V	23140.00	43.73	30.85	7.45	24.69	45.02	54.00	-8.98	AV
V	28925.00	54.46	31.02	8.99	25.57	58.00	74.00	-16.00	PK
V	28925.00	43.54	31.02	8.99	25.57	47.08	54.00	-6.92	AV
H	11570.00	51.58	30.55	5.77	24.66	51.46	74.00	-22.54	PK
H	11570.00	43.51	30.55	5.77	24.66	43.39	54.00	-10.61	AV
H	17355.00	50.08	30.33	6.32	24.55	50.62	74.00	-23.38	PK
H	17355.00	43.68	30.33	6.32	24.55	44.22	54.00	-9.78	AV
H	23140.00	53.94	30.85	7.45	24.69	55.23	74.00	-18.77	PK
H	23140.00	43.27	30.85	7.45	24.69	44.56	54.00	-9.44	AV
H	28925.00	53.54	31.02	8.99	25.57	57.08	74.00	-16.92	PK
H	28925.00	43.55	31.02	8.99	25.57	47.09	54.00	-6.91	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5825MHz									
V	11650.00	54.11	30.55	5.77	24.66	53.99	74.00	-20.01	PK
V	11650.00	43.75	30.55	5.77	24.66	43.63	54.00	-10.37	AV
V	17475.00	50.82	30.33	6.32	24.55	51.36	74.00	-22.64	PK
V	17475.00	43.73	30.33	6.32	24.55	44.27	54.00	-9.73	AV
V	23300.00	50.55	30.85	7.45	24.69	51.84	74.00	-22.16	PK
V	23300.00	43.50	30.85	7.45	24.69	44.79	54.00	-9.21	AV
V	29125.00	53.66	31.02	8.99	25.57	57.20	74.00	-16.80	PK
V	29125.00	43.97	31.02	8.99	25.57	47.51	54.00	-6.49	AV
H	11650.00	52.86	30.55	5.77	24.66	52.74	74.00	-21.26	PK
H	11650.00	43.65	30.55	5.77	24.66	43.53	54.00	-10.47	AV
H	17475.00	54.47	30.33	6.32	24.55	55.01	74.00	-18.99	PK
H	17475.00	43.47	30.33	6.32	24.55	44.01	54.00	-9.99	AV
H	23300.00	53.13	30.85	7.45	24.69	54.42	74.00	-19.58	PK
H	23300.00	43.52	30.85	7.45	24.69	44.81	54.00	-9.19	AV
H	29125.00	52.06	31.02	8.99	25.57	55.60	74.00	-18.40	PK
H	29125.00	44.00	31.02	8.99	25.57	47.54	54.00	-6.46	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	53.86	30.55	5.77	24.66	53.74	74.00	-20.26	PK
V	11490.00	43.88	30.55	5.77	24.66	43.76	54.00	-10.24	AV
V	17235.00	50.27	30.33	6.32	24.55	50.81	74.00	-23.19	PK
V	17235.00	43.91	30.33	6.32	24.55	44.45	54.00	-9.55	AV
V	22980.00	54.10	30.85	7.45	24.69	55.39	74.00	-18.61	PK
V	22980.00	43.35	30.85	7.45	24.69	44.64	54.00	-9.36	AV
V	28725.00	51.76	31.02	8.99	25.57	55.30	74.00	-18.70	PK
V	28725.00	43.18	31.02	8.99	25.57	46.72	54.00	-7.28	AV
H	11490.00	54.70	30.55	5.77	24.66	54.58	74.00	-19.42	PK
H	11490.00	43.59	30.55	5.77	24.66	43.47	54.00	-10.53	AV
H	17235.00	50.28	30.33	6.32	24.55	50.82	74.00	-23.18	PK
H	17235.00	43.36	30.33	6.32	24.55	43.90	54.00	-10.10	AV
H	22980.00	53.07	30.85	7.45	24.69	54.36	74.00	-19.64	PK
H	22980.00	43.90	30.85	7.45	24.69	45.19	54.00	-8.81	AV
H	28725.00	50.69	31.02	8.99	25.57	54.23	74.00	-19.77	PK
H	28725.00	43.93	31.02	8.99	25.57	47.47	54.00	-6.53	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	52.26	30.55	5.77	24.66	52.14	74.00	-21.86	PK
V	11570.00	43.96	30.55	5.77	24.66	43.84	54.00	-10.16	AV
V	17355.00	54.29	30.33	6.32	24.55	54.83	74.00	-19.17	PK
V	17355.00	43.62	30.33	6.32	24.55	44.16	54.00	-9.84	AV
V	23140.00	52.19	30.85	7.45	24.69	53.48	74.00	-20.52	PK
V	23140.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
V	28925.00	54.37	31.02	8.99	25.57	57.91	74.00	-16.09	PK
V	28925.00	43.36	31.02	8.99	25.57	46.90	54.00	-7.10	AV
H	11570.00	51.14	30.55	5.77	24.66	51.02	74.00	-22.98	PK
H	11570.00	43.26	30.55	5.77	24.66	43.14	54.00	-10.86	AV
H	17355.00	53.92	30.33	6.32	24.55	54.46	74.00	-19.54	PK
H	17355.00	43.81	30.33	6.32	24.55	44.35	54.00	-9.65	AV
H	23140.00	53.39	30.85	7.45	24.69	54.68	74.00	-19.32	PK
H	23140.00	43.99	30.85	7.45	24.69	45.28	54.00	-8.72	AV
H	28925.00	54.56	31.02	8.99	25.57	58.10	74.00	-15.90	PK
H	28925.00	43.96	31.02	8.99	25.57	47.50	54.00	-6.50	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5825MHz									
V	11650.00	53.58	30.55	5.77	24.66	53.46	74.00	-20.54	PK
V	11650.00	43.92	30.55	5.77	24.66	43.80	54.00	-10.20	AV
V	17475.00	53.71	30.33	6.32	24.55	54.25	74.00	-19.75	PK
V	17475.00	43.07	30.33	6.32	24.55	43.61	54.00	-10.39	AV
V	23300.00	52.95	30.85	7.45	24.69	54.24	74.00	-19.76	PK
V	23300.00	43.48	30.85	7.45	24.69	44.77	54.00	-9.23	AV
V	29125.00	50.33	31.02	8.99	25.57	53.87	74.00	-20.13	PK
V	29125.00	43.11	31.02	8.99	25.57	46.65	54.00	-7.35	AV
H	11650.00	50.23	30.55	5.77	24.66	50.11	74.00	-23.89	PK
H	11650.00	43.19	30.55	5.77	24.66	43.07	54.00	-10.93	AV
H	17475.00	51.16	30.33	6.32	24.55	51.70	74.00	-22.30	PK
H	17475.00	43.99	30.33	6.32	24.55	44.53	54.00	-9.47	AV
H	23300.00	53.69	30.85	7.45	24.69	54.98	74.00	-19.02	PK
H	23300.00	43.12	30.85	7.45	24.69	44.41	54.00	-9.59	AV
H	29125.00	51.22	31.02	8.99	25.57	54.76	74.00	-19.24	PK
H	29125.00	43.00	31.02	8.99	25.57	46.54	54.00	-7.46	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	52.30	30.55	5.77	24.66	52.18	74.00	-21.82	PK
V	11490.00	43.24	30.55	5.77	24.66	43.12	54.00	-10.88	AV
V	17235.00	51.53	30.33	6.32	24.55	52.07	74.00	-21.93	PK
V	17235.00	43.56	30.33	6.32	24.55	44.10	54.00	-9.90	AV
V	22980.00	54.57	30.85	7.45	24.69	55.86	74.00	-18.14	PK
V	22980.00	43.76	30.85	7.45	24.69	45.05	54.00	-8.95	AV
V	28725.00	53.11	31.02	8.99	25.57	56.65	74.00	-17.35	PK
V	28725.00	43.62	31.02	8.99	25.57	47.16	54.00	-6.84	AV
H	11490.00	50.05	30.55	5.77	24.66	49.93	74.00	-24.07	PK
H	11490.00	43.88	30.55	5.77	24.66	43.76	54.00	-10.24	AV
H	17235.00	54.91	30.33	6.32	24.55	55.45	74.00	-18.55	PK
H	17235.00	43.54	30.33	6.32	24.55	44.08	54.00	-9.92	AV
H	22980.00	52.16	30.85	7.45	24.69	53.45	74.00	-20.55	PK
H	22980.00	43.73	30.85	7.45	24.69	45.02	54.00	-8.98	AV
H	28725.00	52.37	31.02	8.99	25.57	55.91	74.00	-18.09	PK
H	28725.00	43.10	31.02	8.99	25.57	46.64	54.00	-7.36	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	52.13	30.55	5.77	24.66	52.01	74.00	-21.99	PK
V	11570.00	43.48	30.55	5.77	24.66	43.36	54.00	-10.64	AV
V	17355.00	54.27	30.33	6.32	24.55	54.81	74.00	-19.19	PK
V	17355.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
V	23140.00	52.62	30.85	7.45	24.69	53.91	74.00	-20.09	PK
V	23140.00	43.22	30.85	7.45	24.69	44.51	54.00	-9.49	AV
V	28925.00	54.36	31.02	8.99	25.57	57.90	74.00	-16.10	PK
V	28925.00	43.51	31.02	8.99	25.57	47.05	54.00	-6.95	AV
H	11570.00	50.92	30.55	5.77	24.66	50.80	74.00	-23.20	PK
H	11570.00	43.39	30.55	5.77	24.66	43.27	54.00	-10.73	AV
H	17355.00	50.00	30.33	6.32	24.55	50.54	74.00	-23.46	PK
H	17355.00	43.95	30.33	6.32	24.55	44.49	54.00	-9.51	AV
H	23140.00	51.43	30.85	7.45	24.69	52.72	74.00	-21.28	PK
H	23140.00	43.76	30.85	7.45	24.69	45.05	54.00	-8.95	AV
H	28925.00	52.86	31.02	8.99	25.57	56.40	74.00	-17.60	PK
H	28925.00	43.53	31.02	8.99	25.57	47.07	54.00	-6.93	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	52.92	30.55	5.77	24.66	52.80	74.00	-21.20	PK
V	11650.00	43.68	30.55	5.77	24.66	43.56	54.00	-10.44	AV
V	17475.00	51.21	30.33	6.32	24.55	51.75	74.00	-22.25	PK
V	17475.00	43.46	30.33	6.32	24.55	44.00	54.00	-10.00	AV
V	23300.00	52.09	30.85	7.45	24.69	53.38	74.00	-20.62	PK
V	23300.00	43.56	30.85	7.45	24.69	44.85	54.00	-9.15	AV
V	29125.00	52.53	31.02	8.99	25.57	56.07	74.00	-17.93	PK
V	29125.00	43.41	31.02	8.99	25.57	46.95	54.00	-7.05	AV
H	11650.00	54.51	30.55	5.77	24.66	54.39	74.00	-19.61	PK
H	11650.00	43.67	30.55	5.77	24.66	43.55	54.00	-10.45	AV
H	17475.00	50.71	30.33	6.32	24.55	51.25	74.00	-22.75	PK
H	17475.00	43.39	30.33	6.32	24.55	43.93	54.00	-10.07	AV
H	23300.00	54.04	30.85	7.45	24.69	55.33	74.00	-18.67	PK
H	23300.00	43.03	30.85	7.45	24.69	44.32	54.00	-9.68	AV
H	29125.00	54.16	31.02	8.99	25.57	57.70	74.00	-16.30	PK
H	29125.00	43.04	31.02	8.99	25.57	46.58	54.00	-7.42	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Between A5MINI I 1GHz~25GHz**

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	5.8G TX- 802.11a/ n20/ ac20/ n40/ ac40		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

802.11a

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	52.12	30.55	5.77	24.66	52.00	74.00	-22.00	PK
V	11490.00	43.39	30.55	5.77	24.66	43.27	54.00	-10.73	AV
V	17235.00	51.23	30.33	6.32	24.55	51.77	74.00	-22.23	PK
V	17235.00	43.50	30.33	6.32	24.55	44.04	54.00	-9.96	AV
V	22980.00	50.71	30.85	7.45	24.69	52.00	74.00	-22.00	PK
V	22980.00	43.86	30.85	7.45	24.69	45.15	54.00	-8.85	AV
V	28725.00	54.77	31.02	8.99	25.57	58.31	74.00	-15.69	PK
V	28725.00	43.07	31.02	8.99	25.57	46.61	54.00	-7.39	AV
H	11490.00	51.27	30.55	5.77	24.66	51.15	74.00	-22.85	PK
H	11490.00	43.27	30.55	5.77	24.66	43.15	54.00	-10.85	AV
H	17235.00	53.13	30.33	6.32	24.55	53.67	74.00	-20.33	PK
H	17235.00	43.66	30.33	6.32	24.55	44.20	54.00	-9.80	AV
H	22980.00	51.58	30.85	7.45	24.69	52.87	74.00	-21.13	PK
H	22980.00	43.72	30.85	7.45	24.69	45.01	54.00	-8.99	AV
H	28725.00	50.52	31.02	8.99	25.57	54.06	74.00	-19.94	PK
H	28725.00	43.12	31.02	8.99	25.57	46.66	54.00	-7.34	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	50.40	30.55	5.77	24.66	50.28	74.00	-23.72	PK
V	11570.00	43.30	30.55	5.77	24.66	43.18	54.00	-10.82	AV
V	17355.00	54.90	30.33	6.32	24.55	55.44	74.00	-18.56	PK
V	17355.00	43.94	30.33	6.32	24.55	44.48	54.00	-9.52	AV
V	23140.00	51.22	30.85	7.45	24.69	52.51	74.00	-21.49	PK
V	23140.00	43.30	30.85	7.45	24.69	44.59	54.00	-9.41	AV
V	28925.00	53.28	31.02	8.99	25.57	56.82	74.00	-17.18	PK
V	28925.00	43.76	31.02	8.99	25.57	47.30	54.00	-6.70	AV
H	11570.00	53.89	30.55	5.77	24.66	53.77	74.00	-20.23	PK
H	11570.00	43.13	30.55	5.77	24.66	43.01	54.00	-10.99	AV
H	17355.00	51.28	30.33	6.32	24.55	51.82	74.00	-22.18	PK
H	17355.00	43.32	30.33	6.32	24.55	43.86	54.00	-10.14	AV
H	23140.00	53.34	30.85	7.45	24.69	54.63	74.00	-19.37	PK
H	23140.00	43.69	30.85	7.45	24.69	44.98	54.00	-9.02	AV
H	28925.00	54.00	31.02	8.99	25.57	57.54	74.00	-16.46	PK
H	28925.00	43.16	31.02	8.99	25.57	46.70	54.00	-7.30	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	51.28	30.55	5.77	24.66	51.16	74.00	-22.84	PK
V	11650.00	43.69	30.55	5.77	24.66	43.57	54.00	-10.43	AV
V	17475.00	51.07	30.33	6.32	24.55	51.61	74.00	-22.39	PK
V	17475.00	43.48	30.33	6.32	24.55	44.02	54.00	-9.98	AV
V	23300.00	53.72	30.85	7.45	24.69	55.01	74.00	-18.99	PK
V	23300.00	43.92	30.85	7.45	24.69	45.21	54.00	-8.79	AV
V	29125.00	54.89	31.02	8.99	25.57	58.43	74.00	-15.57	PK
V	29125.00	43.87	31.02	8.99	25.57	47.41	54.00	-6.59	AV
H	11650.00	51.15	30.55	5.77	24.66	51.03	74.00	-22.97	PK
H	11650.00	43.91	30.55	5.77	24.66	43.79	54.00	-10.21	AV
H	17475.00	52.03	30.33	6.32	24.55	52.57	74.00	-21.43	PK
H	17475.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
H	23300.00	54.66	30.85	7.45	24.69	55.95	74.00	-18.05	PK
H	23300.00	43.69	30.85	7.45	24.69	44.98	54.00	-9.02	AV
H	29125.00	51.77	31.02	8.99	25.57	55.31	74.00	-18.69	PK
H	29125.00	43.28	31.02	8.99	25.57	46.82	54.00	-7.18	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	52.81	30.55	5.77	24.66	52.69	74.00	-21.31	PK
V	11490.00	43.64	30.55	5.77	24.66	43.52	54.00	-10.48	AV
V	17235.00	54.52	30.33	6.32	24.55	55.06	74.00	-18.94	PK
V	17235.00	43.99	30.33	6.32	24.55	44.53	54.00	-9.47	AV
V	22980.00	50.00	30.85	7.45	24.69	51.29	74.00	-22.71	PK
V	22980.00	43.63	30.85	7.45	24.69	44.92	54.00	-9.08	AV
V	28725.00	50.40	31.02	8.99	25.57	53.94	74.00	-20.06	PK
V	28725.00	43.80	31.02	8.99	25.57	47.34	54.00	-6.66	AV
H	11490.00	54.88	30.55	5.77	24.66	54.76	74.00	-19.24	PK
H	11490.00	43.54	30.55	5.77	24.66	43.42	54.00	-10.58	AV
H	17235.00	50.55	30.33	6.32	24.55	51.09	74.00	-22.91	PK
H	17235.00	43.98	30.33	6.32	24.55	44.52	54.00	-9.48	AV
H	22980.00	54.12	30.85	7.45	24.69	55.41	74.00	-18.59	PK
H	22980.00	43.59	30.85	7.45	24.69	44.88	54.00	-9.12	AV
H	28725.00	50.00	31.02	8.99	25.57	53.54	74.00	-20.46	PK
H	28725.00	43.95	31.02	8.99	25.57	47.49	54.00	-6.51	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	53.53	30.55	5.77	24.66	53.41	74.00	-20.59	PK
V	11570.00	43.54	30.55	5.77	24.66	43.42	54.00	-10.58	AV
V	17355.00	51.07	30.33	6.32	24.55	51.61	74.00	-22.39	PK
V	17355.00	43.48	30.33	6.32	24.55	44.02	54.00	-9.98	AV
V	23140.00	52.67	30.85	7.45	24.69	53.96	74.00	-20.04	PK
V	23140.00	43.92	30.85	7.45	24.69	45.21	54.00	-8.79	AV
V	28925.00	52.05	31.02	8.99	25.57	55.59	74.00	-18.41	PK
V	28925.00	43.03	31.02	8.99	25.57	46.57	54.00	-7.43	AV
H	11570.00	50.59	30.55	5.77	24.66	50.47	74.00	-23.53	PK
H	11570.00	43.38	30.55	5.77	24.66	43.26	54.00	-10.74	AV
H	17355.00	54.52	30.33	6.32	24.55	55.06	74.00	-18.94	PK
H	17355.00	43.21	30.33	6.32	24.55	43.75	54.00	-10.25	AV
H	23140.00	52.07	30.85	7.45	24.69	53.36	74.00	-20.64	PK
H	23140.00	43.83	30.85	7.45	24.69	45.12	54.00	-8.88	AV
H	28925.00	53.36	31.02	8.99	25.57	56.90	74.00	-17.10	PK
H	28925.00	43.72	31.02	8.99	25.57	47.26	54.00	-6.74	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	51.57	30.55	5.77	24.66	51.45	74.00	-22.55	PK
V	11650.00	43.61	30.55	5.77	24.66	43.49	54.00	-10.51	AV
V	17475.00	51.38	30.33	6.32	24.55	51.92	74.00	-22.08	PK
V	17475.00	43.33	30.33	6.32	24.55	43.87	54.00	-10.13	AV
V	23300.00	51.18	30.85	7.45	24.69	52.47	74.00	-21.53	PK
V	23300.00	43.80	30.85	7.45	24.69	45.09	54.00	-8.91	AV
V	29125.00	50.18	31.02	8.99	25.57	53.72	74.00	-20.28	PK
V	29125.00	44.00	31.02	8.99	25.57	47.54	54.00	-6.46	AV
H	11650.00	52.77	30.55	5.77	24.66	52.65	74.00	-21.35	PK
H	11650.00	43.40	30.55	5.77	24.66	43.28	54.00	-10.72	AV
H	17475.00	52.43	30.33	6.32	24.55	52.97	74.00	-21.03	PK
H	17475.00	43.58	30.33	6.32	24.55	44.12	54.00	-9.88	AV
H	23300.00	53.37	30.85	7.45	24.69	54.66	74.00	-19.34	PK
H	23300.00	43.65	30.85	7.45	24.69	44.94	54.00	-9.06	AV
H	29125.00	50.46	31.02	8.99	25.57	54.00	74.00	-20.00	PK
H	29125.00	43.64	31.02	8.99	25.57	47.18	54.00	-6.82	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	51.57	30.55	5.77	24.66	51.45	74.00	-22.55	PK
V	11490.00	43.61	30.55	5.77	24.66	43.49	54.00	-10.51	AV
V	17235.00	51.38	30.33	6.32	24.55	51.92	74.00	-22.08	PK
V	17235.00	43.33	30.33	6.32	24.55	43.87	54.00	-10.13	AV
V	22980.00	51.18	30.85	7.45	24.69	52.47	74.00	-21.53	PK
V	22980.00	43.80	30.85	7.45	24.69	45.09	54.00	-8.91	AV
V	28725.00	50.18	31.02	8.99	25.57	53.72	74.00	-20.28	PK
V	28725.00	44.00	31.02	8.99	25.57	47.54	54.00	-6.46	AV
H	11490.00	52.77	30.55	5.77	24.66	52.65	74.00	-21.35	PK
H	11490.00	43.40	30.55	5.77	24.66	43.28	54.00	-10.72	AV
H	17235.00	52.43	30.33	6.32	24.55	52.97	74.00	-21.03	PK
H	17235.00	43.58	30.33	6.32	24.55	44.12	54.00	-9.88	AV
H	22980.00	53.37	30.85	7.45	24.69	54.66	74.00	-19.34	PK
H	22980.00	43.65	30.85	7.45	24.69	44.94	54.00	-9.06	AV
H	28725.00	50.46	31.02	8.99	25.57	54.00	74.00	-20.00	PK
H	28725.00	43.64	31.02	8.99	25.57	47.18	54.00	-6.82	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	54.55	30.55	5.77	24.66	54.43	74.00	-19.57	PK
V	11570.00	43.16	30.55	5.77	24.66	43.04	54.00	-10.96	AV
V	17355.00	50.07	30.33	6.32	24.55	50.61	74.00	-23.39	PK
V	17355.00	43.26	30.33	6.32	24.55	43.80	54.00	-10.20	AV
V	23140.00	53.85	30.85	7.45	24.69	55.14	74.00	-18.86	PK
V	23140.00	43.87	30.85	7.45	24.69	45.16	54.00	-8.84	AV
V	28925.00	54.62	31.02	8.99	25.57	58.16	74.00	-15.84	PK
V	28925.00	43.10	31.02	8.99	25.57	46.64	54.00	-7.36	AV
H	11570.00	54.65	30.55	5.77	24.66	54.53	74.00	-19.47	PK
H	11570.00	43.20	30.55	5.77	24.66	43.08	54.00	-10.92	AV
H	17355.00	52.86	30.33	6.32	24.55	53.40	74.00	-20.60	PK
H	17355.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
H	23140.00	54.49	30.85	7.45	24.69	55.78	74.00	-18.22	PK
H	23140.00	43.76	30.85	7.45	24.69	45.05	54.00	-8.95	AV
H	28925.00	54.79	31.02	8.99	25.57	58.33	74.00	-15.67	PK
H	28925.00	43.30	31.02	8.99	25.57	46.84	54.00	-7.16	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	53.82	30.55	5.77	24.66	53.70	74.00	-20.30	PK
V	11650.00	43.50	30.55	5.77	24.66	43.38	54.00	-10.62	AV
V	17475.00	51.41	30.33	6.32	24.55	51.95	74.00	-22.05	PK
V	17475.00	43.75	30.33	6.32	24.55	44.29	54.00	-9.71	AV
V	23300.00	51.02	30.85	7.45	24.69	52.31	74.00	-21.69	PK
V	23300.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
V	29125.00	53.65	31.02	8.99	25.57	57.19	74.00	-16.81	PK
V	29125.00	43.90	31.02	8.99	25.57	47.44	54.00	-6.56	AV
H	11650.00	51.61	30.55	5.77	24.66	51.49	74.00	-22.51	PK
H	11650.00	43.07	30.55	5.77	24.66	42.95	54.00	-11.05	AV
H	17475.00	52.26	30.33	6.32	24.55	52.80	74.00	-21.20	PK
H	17475.00	43.59	30.33	6.32	24.55	44.13	54.00	-9.87	AV
H	23300.00	53.10	30.85	7.45	24.69	54.39	74.00	-19.61	PK
H	23300.00	43.29	30.85	7.45	24.69	44.58	54.00	-9.42	AV
H	29125.00	50.50	31.02	8.99	25.57	54.04	74.00	-19.96	PK
H	29125.00	43.14	31.02	8.99	25.57	46.68	54.00	-7.32	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Between CP30-air 1GHz~25GHz**

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	5.8G TX- 802.11a/ n20/ ac20/ n40/ ac40		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	52.12	30.55	5.77	24.66	52.00	74.00	-22.00	PK
V	11490.00	43.39	30.55	5.77	24.66	43.27	54.00	-10.73	AV
V	17235.00	51.23	30.33	6.32	24.55	51.77	74.00	-22.23	PK
V	17235.00	43.50	30.33	6.32	24.55	44.04	54.00	-9.96	AV
V	22980.00	50.71	30.85	7.45	24.69	52.00	74.00	-22.00	PK
V	22980.00	43.86	30.85	7.45	24.69	45.15	54.00	-8.85	AV
V	28725.00	54.77	31.02	8.99	25.57	58.31	74.00	-15.69	PK
V	28725.00	43.07	31.02	8.99	25.57	46.61	54.00	-7.39	AV
H	11490.00	51.27	30.55	5.77	24.66	51.15	74.00	-22.85	PK
H	11490.00	43.27	30.55	5.77	24.66	43.15	54.00	-10.85	AV
H	17235.00	53.13	30.33	6.32	24.55	53.67	74.00	-20.33	PK
H	17235.00	43.66	30.33	6.32	24.55	44.20	54.00	-9.80	AV
H	22980.00	51.58	30.85	7.45	24.69	52.87	74.00	-21.13	PK
H	22980.00	43.72	30.85	7.45	24.69	45.01	54.00	-8.99	AV
H	28725.00	50.52	31.02	8.99	25.57	54.06	74.00	-19.94	PK
H	28725.00	43.12	31.02	8.99	25.57	46.66	54.00	-7.34	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	50.40	30.55	5.77	24.66	50.28	74.00	-23.72	PK
V	11570.00	43.30	30.55	5.77	24.66	43.18	54.00	-10.82	AV
V	17355.00	54.90	30.33	6.32	24.55	55.44	74.00	-18.56	PK
V	17355.00	43.94	30.33	6.32	24.55	44.48	54.00	-9.52	AV
V	23140.00	51.22	30.85	7.45	24.69	52.51	74.00	-21.49	PK
V	23140.00	43.30	30.85	7.45	24.69	44.59	54.00	-9.41	AV
V	28925.00	53.28	31.02	8.99	25.57	56.82	74.00	-17.18	PK
V	28925.00	43.76	31.02	8.99	25.57	47.30	54.00	-6.70	AV
H	11570.00	53.89	30.55	5.77	24.66	53.77	74.00	-20.23	PK
H	11570.00	43.13	30.55	5.77	24.66	43.01	54.00	-10.99	AV
H	17355.00	51.28	30.33	6.32	24.55	51.82	74.00	-22.18	PK
H	17355.00	43.32	30.33	6.32	24.55	43.86	54.00	-10.14	AV
H	23140.00	53.34	30.85	7.45	24.69	54.63	74.00	-19.37	PK
H	23140.00	43.69	30.85	7.45	24.69	44.98	54.00	-9.02	AV
H	28925.00	54.00	31.02	8.99	25.57	57.54	74.00	-16.46	PK
H	28925.00	43.16	31.02	8.99	25.57	46.70	54.00	-7.30	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	51.28	30.55	5.77	24.66	51.16	74.00	-22.84	PK
V	11650.00	43.69	30.55	5.77	24.66	43.57	54.00	-10.43	AV
V	17475.00	51.07	30.33	6.32	24.55	51.61	74.00	-22.39	PK
V	17475.00	43.48	30.33	6.32	24.55	44.02	54.00	-9.98	AV
V	23300.00	53.72	30.85	7.45	24.69	55.01	74.00	-18.99	PK
V	23300.00	43.92	30.85	7.45	24.69	45.21	54.00	-8.79	AV
V	29125.00	54.89	31.02	8.99	25.57	58.43	74.00	-15.57	PK
V	29125.00	43.87	31.02	8.99	25.57	47.41	54.00	-6.59	AV
H	11650.00	51.15	30.55	5.77	24.66	51.03	74.00	-22.97	PK
H	11650.00	43.91	30.55	5.77	24.66	43.79	54.00	-10.21	AV
H	17475.00	52.03	30.33	6.32	24.55	52.57	74.00	-21.43	PK
H	17475.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
H	23300.00	54.66	30.85	7.45	24.69	55.95	74.00	-18.05	PK
H	23300.00	43.69	30.85	7.45	24.69	44.98	54.00	-9.02	AV
H	29125.00	51.77	31.02	8.99	25.57	55.31	74.00	-18.69	PK
H	29125.00	43.28	31.02	8.99	25.57	46.82	54.00	-7.18	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	52.81	30.55	5.77	24.66	52.69	74.00	-21.31	PK
V	11490.00	43.64	30.55	5.77	24.66	43.52	54.00	-10.48	AV
V	17235.00	54.52	30.33	6.32	24.55	55.06	74.00	-18.94	PK
V	17235.00	43.99	30.33	6.32	24.55	44.53	54.00	-9.47	AV
V	22980.00	50.00	30.85	7.45	24.69	51.29	74.00	-22.71	PK
V	22980.00	43.63	30.85	7.45	24.69	44.92	54.00	-9.08	AV
V	28725.00	50.40	31.02	8.99	25.57	53.94	74.00	-20.06	PK
V	28725.00	43.80	31.02	8.99	25.57	47.34	54.00	-6.66	AV
H	11490.00	54.88	30.55	5.77	24.66	54.76	74.00	-19.24	PK
H	11490.00	43.54	30.55	5.77	24.66	43.42	54.00	-10.58	AV
H	17235.00	50.55	30.33	6.32	24.55	51.09	74.00	-22.91	PK
H	17235.00	43.98	30.33	6.32	24.55	44.52	54.00	-9.48	AV
H	22980.00	54.12	30.85	7.45	24.69	55.41	74.00	-18.59	PK
H	22980.00	43.59	30.85	7.45	24.69	44.88	54.00	-9.12	AV
H	28725.00	50.00	31.02	8.99	25.57	53.54	74.00	-20.46	PK
H	28725.00	43.95	31.02	8.99	25.57	47.49	54.00	-6.51	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	53.53	30.55	5.77	24.66	53.41	74.00	-20.59	PK
V	11570.00	43.54	30.55	5.77	24.66	43.42	54.00	-10.58	AV
V	17355.00	51.07	30.33	6.32	24.55	51.61	74.00	-22.39	PK
V	17355.00	43.48	30.33	6.32	24.55	44.02	54.00	-9.98	AV
V	23140.00	52.67	30.85	7.45	24.69	53.96	74.00	-20.04	PK
V	23140.00	43.92	30.85	7.45	24.69	45.21	54.00	-8.79	AV
V	28925.00	52.05	31.02	8.99	25.57	55.59	74.00	-18.41	PK
V	28925.00	43.03	31.02	8.99	25.57	46.57	54.00	-7.43	AV
H	11570.00	50.59	30.55	5.77	24.66	50.47	74.00	-23.53	PK
H	11570.00	43.38	30.55	5.77	24.66	43.26	54.00	-10.74	AV
H	17355.00	54.52	30.33	6.32	24.55	55.06	74.00	-18.94	PK
H	17355.00	43.21	30.33	6.32	24.55	43.75	54.00	-10.25	AV
H	23140.00	52.07	30.85	7.45	24.69	53.36	74.00	-20.64	PK
H	23140.00	43.83	30.85	7.45	24.69	45.12	54.00	-8.88	AV
H	28925.00	53.36	31.02	8.99	25.57	56.90	74.00	-17.10	PK
H	28925.00	43.72	31.02	8.99	25.57	47.26	54.00	-6.74	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	51.57	30.55	5.77	24.66	51.45	74.00	-22.55	PK
V	11650.00	43.61	30.55	5.77	24.66	43.49	54.00	-10.51	AV
V	17475.00	51.38	30.33	6.32	24.55	51.92	74.00	-22.08	PK
V	17475.00	43.33	30.33	6.32	24.55	43.87	54.00	-10.13	AV
V	23300.00	51.18	30.85	7.45	24.69	52.47	74.00	-21.53	PK
V	23300.00	43.80	30.85	7.45	24.69	45.09	54.00	-8.91	AV
V	29125.00	50.18	31.02	8.99	25.57	53.72	74.00	-20.28	PK
V	29125.00	44.00	31.02	8.99	25.57	47.54	54.00	-6.46	AV
H	11650.00	52.77	30.55	5.77	24.66	52.65	74.00	-21.35	PK
H	11650.00	43.40	30.55	5.77	24.66	43.28	54.00	-10.72	AV
H	17475.00	52.43	30.33	6.32	24.55	52.97	74.00	-21.03	PK
H	17475.00	43.58	30.33	6.32	24.55	44.12	54.00	-9.88	AV
H	23300.00	53.37	30.85	7.45	24.69	54.66	74.00	-19.34	PK
H	23300.00	43.65	30.85	7.45	24.69	44.94	54.00	-9.06	AV
H	29125.00	50.46	31.02	8.99	25.57	54.00	74.00	-20.00	PK
H	29125.00	43.64	31.02	8.99	25.57	47.18	54.00	-6.82	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	54.55	30.55	5.77	24.66	54.43	74.00	-19.57	PK
V	11490.00	43.54	30.55	5.77	24.66	43.42	54.00	-10.58	AV
V	17235.00	54.45	30.33	6.32	24.55	54.99	74.00	-19.01	PK
V	17235.00	43.96	30.33	6.32	24.55	44.50	54.00	-9.50	AV
V	22980.00	53.41	30.85	7.45	24.69	54.70	74.00	-19.30	PK
V	22980.00	43.86	30.85	7.45	24.69	45.15	54.00	-8.85	AV
V	28725.00	50.09	31.02	8.99	25.57	53.63	74.00	-20.37	PK
V	28725.00	43.40	31.02	8.99	25.57	46.94	54.00	-7.06	AV
H	11490.00	53.35	30.55	5.77	24.66	53.23	74.00	-20.77	PK
H	11490.00	43.85	30.55	5.77	24.66	43.73	54.00	-10.27	AV
H	17235.00	50.25	30.33	6.32	24.55	50.79	74.00	-23.21	PK
H	17235.00	43.20	30.33	6.32	24.55	43.74	54.00	-10.26	AV
H	22980.00	53.92	30.85	7.45	24.69	55.21	74.00	-18.79	PK
H	22980.00	43.20	30.85	7.45	24.69	44.49	54.00	-9.51	AV
H	28725.00	52.13	31.02	8.99	25.57	55.67	74.00	-18.33	PK
H	28725.00	43.53	31.02	8.99	25.57	47.07	54.00	-6.93	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	54.55	30.55	5.77	24.66	54.43	74.00	-19.57	PK
V	11570.00	43.16	30.55	5.77	24.66	43.04	54.00	-10.96	AV
V	17355.00	50.07	30.33	6.32	24.55	50.61	74.00	-23.39	PK
V	17355.00	43.26	30.33	6.32	24.55	43.80	54.00	-10.20	AV
V	23140.00	53.85	30.85	7.45	24.69	55.14	74.00	-18.86	PK
V	23140.00	43.87	30.85	7.45	24.69	45.16	54.00	-8.84	AV
V	28925.00	54.62	31.02	8.99	25.57	58.16	74.00	-15.84	PK
V	28925.00	43.10	31.02	8.99	25.57	46.64	54.00	-7.36	AV
H	11570.00	54.65	30.55	5.77	24.66	54.53	74.00	-19.47	PK
H	11570.00	43.20	30.55	5.77	24.66	43.08	54.00	-10.92	AV
H	17355.00	52.86	30.33	6.32	24.55	53.40	74.00	-20.60	PK
H	17355.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
H	23140.00	54.49	30.85	7.45	24.69	55.78	74.00	-18.22	PK
H	23140.00	43.76	30.85	7.45	24.69	45.05	54.00	-8.95	AV
H	28925.00	54.79	31.02	8.99	25.57	58.33	74.00	-15.67	PK
H	28925.00	43.30	31.02	8.99	25.57	46.84	54.00	-7.16	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	53.82	30.55	5.77	24.66	53.70	74.00	-20.30	PK
V	11650.00	43.50	30.55	5.77	24.66	43.38	54.00	-10.62	AV
V	17475.00	51.41	30.33	6.32	24.55	51.95	74.00	-22.05	PK
V	17475.00	43.75	30.33	6.32	24.55	44.29	54.00	-9.71	AV
V	23300.00	51.02	30.85	7.45	24.69	52.31	74.00	-21.69	PK
V	23300.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
V	29125.00	53.65	31.02	8.99	25.57	57.19	74.00	-16.81	PK
V	29125.00	43.90	31.02	8.99	25.57	47.44	54.00	-6.56	AV
H	11650.00	51.61	30.55	5.77	24.66	51.49	74.00	-22.51	PK
H	11650.00	43.07	30.55	5.77	24.66	42.95	54.00	-11.05	AV
H	17475.00	52.26	30.33	6.32	24.55	52.80	74.00	-21.20	PK
H	17475.00	43.59	30.33	6.32	24.55	44.13	54.00	-9.87	AV
H	23300.00	53.10	30.85	7.45	24.69	54.39	74.00	-19.61	PK
H	23300.00	43.29	30.85	7.45	24.69	44.58	54.00	-9.42	AV
H	29125.00	50.50	31.02	8.99	25.57	54.04	74.00	-19.96	PK
H	29125.00	43.14	31.02	8.99	25.57	46.68	54.00	-7.32	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Between CP30-air2 1GHz~25GHz**

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	5.8G TX- 802.11a/ n20/ ac20/ n40/ ac40		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	51.04	30.55	5.77	24.66	50.92	74.00	-23.08	PK
V	11490.00	43.61	30.55	5.77	24.66	43.49	54.00	-10.51	AV
V	17235.00	53.20	30.33	6.32	24.55	53.74	74.00	-20.26	PK
V	17235.00	43.25	30.33	6.32	24.55	43.79	54.00	-10.21	AV
V	22980.00	50.14	30.85	7.45	24.69	51.43	74.00	-22.57	PK
V	22980.00	43.72	30.85	7.45	24.69	45.01	54.00	-8.99	AV
V	28725.00	52.38	31.02	8.99	25.57	55.92	74.00	-18.08	PK
V	28725.00	43.09	31.02	8.99	25.57	46.63	54.00	-7.37	AV
H	11490.00	51.88	30.55	5.77	24.66	51.76	74.00	-22.24	PK
H	11490.00	43.74	30.55	5.77	24.66	43.62	54.00	-10.38	AV
H	17235.00	54.67	30.33	6.32	24.55	55.21	74.00	-18.79	PK
H	17235.00	43.37	30.33	6.32	24.55	43.91	54.00	-10.09	AV
H	22980.00	54.20	30.85	7.45	24.69	55.49	74.00	-18.51	PK
H	22980.00	43.18	30.85	7.45	24.69	44.47	54.00	-9.53	AV
H	28725.00	54.21	31.02	8.99	25.57	57.75	74.00	-16.25	PK
H	28725.00	43.33	31.02	8.99	25.57	46.87	54.00	-7.13	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	53.18	30.55	5.77	24.66	53.06	74.00	-20.94	PK
V	11570.00	43.35	30.55	5.77	24.66	43.23	54.00	-10.77	AV
V	17355.00	50.31	30.33	6.32	24.55	50.85	74.00	-23.15	PK
V	17355.00	43.40	30.33	6.32	24.55	43.94	54.00	-10.06	AV
V	23140.00	53.17	30.85	7.45	24.69	54.46	74.00	-19.54	PK
V	23140.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
V	28925.00	53.27	31.02	8.99	25.57	56.81	74.00	-17.19	PK
V	28925.00	43.84	31.02	8.99	25.57	47.38	54.00	-6.62	AV
H	11570.00	53.10	30.55	5.77	24.66	52.98	74.00	-21.02	PK
H	11570.00	43.29	30.55	5.77	24.66	43.17	54.00	-10.83	AV
H	17355.00	53.97	30.33	6.32	24.55	54.51	74.00	-19.49	PK
H	17355.00	43.14	30.33	6.32	24.55	43.68	54.00	-10.32	AV
H	23140.00	52.91	30.85	7.45	24.69	54.20	74.00	-19.80	PK
H	23140.00	43.72	30.85	7.45	24.69	45.01	54.00	-8.99	AV
H	28925.00	51.21	31.02	8.99	25.57	54.75	74.00	-19.25	PK
H	28925.00	43.61	31.02	8.99	25.57	47.15	54.00	-6.85	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	50.16	30.55	5.77	24.66	50.04	74.00	-23.96	PK
V	11650.00	43.46	30.55	5.77	24.66	43.34	54.00	-10.66	AV
V	17475.00	51.43	30.33	6.32	24.55	51.97	74.00	-22.03	PK
V	17475.00	43.98	30.33	6.32	24.55	44.52	54.00	-9.48	AV
V	23300.00	50.84	30.85	7.45	24.69	52.13	74.00	-21.87	PK
V	23300.00	43.26	30.85	7.45	24.69	44.55	54.00	-9.45	AV
V	29125.00	54.35	31.02	8.99	25.57	57.89	74.00	-16.11	PK
V	29125.00	43.34	31.02	8.99	25.57	46.88	54.00	-7.12	AV
H	11650.00	50.29	30.55	5.77	24.66	50.17	74.00	-23.83	PK
H	11650.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
H	17475.00	52.59	30.33	6.32	24.55	53.13	74.00	-20.87	PK
H	17475.00	43.32	30.33	6.32	24.55	43.86	54.00	-10.14	AV
H	23300.00	51.52	30.85	7.45	24.69	52.81	74.00	-21.19	PK
H	23300.00	43.14	30.85	7.45	24.69	44.43	54.00	-9.57	AV
H	29125.00	51.85	31.02	8.99	25.57	55.39	74.00	-18.61	PK
H	29125.00	43.44	31.02	8.99	25.57	46.98	54.00	-7.02	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	54.99	30.55	5.77	24.66	54.87	74.00	-19.13	PK
V	11490.00	43.92	30.55	5.77	24.66	43.80	54.00	-10.20	AV
V	17235.00	53.05	30.33	6.32	24.55	53.59	74.00	-20.41	PK
V	17235.00	43.96	30.33	6.32	24.55	44.50	54.00	-9.50	AV
V	22980.00	50.49	30.85	7.45	24.69	51.78	74.00	-22.22	PK
V	22980.00	43.00	30.85	7.45	24.69	44.29	54.00	-9.71	AV
V	28725.00	54.65	31.02	8.99	25.57	58.19	74.00	-15.81	PK
V	28725.00	43.48	31.02	8.99	25.57	47.02	54.00	-6.98	AV
H	11490.00	52.37	30.55	5.77	24.66	52.25	74.00	-21.75	PK
H	11490.00	44.00	30.55	5.77	24.66	43.88	54.00	-10.12	AV
H	17235.00	53.87	30.33	6.32	24.55	54.41	74.00	-19.59	PK
H	17235.00	43.45	30.33	6.32	24.55	43.99	54.00	-10.01	AV
H	22980.00	50.87	30.85	7.45	24.69	52.16	74.00	-21.84	PK
H	22980.00	43.66	30.85	7.45	24.69	44.95	54.00	-9.05	AV
H	28725.00	50.83	31.02	8.99	25.57	54.37	74.00	-19.63	PK
H	28725.00	43.94	31.02	8.99	25.57	47.48	54.00	-6.52	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	51.69	30.55	5.77	24.66	51.57	74.00	-22.43	PK
V	11570.00	43.33	30.55	5.77	24.66	43.21	54.00	-10.79	AV
V	17355.00	50.22	30.33	6.32	24.55	50.76	74.00	-23.24	PK
V	17355.00	43.62	30.33	6.32	24.55	44.16	54.00	-9.84	AV
V	23140.00	54.32	30.85	7.45	24.69	55.61	74.00	-18.39	PK
V	23140.00	43.15	30.85	7.45	24.69	44.44	54.00	-9.56	AV
V	28925.00	53.16	31.02	8.99	25.57	56.70	74.00	-17.30	PK
V	28925.00	43.49	31.02	8.99	25.57	47.03	54.00	-6.97	AV
H	11570.00	50.91	30.55	5.77	24.66	50.79	74.00	-23.21	PK
H	11570.00	43.82	30.55	5.77	24.66	43.70	54.00	-10.30	AV
H	17355.00	51.76	30.33	6.32	24.55	52.30	74.00	-21.70	PK
H	17355.00	43.67	30.33	6.32	24.55	44.21	54.00	-9.79	AV
H	23140.00	54.92	30.85	7.45	24.69	56.21	74.00	-17.79	PK
H	23140.00	43.42	30.85	7.45	24.69	44.71	54.00	-9.29	AV
H	28925.00	53.05	31.02	8.99	25.57	56.59	74.00	-17.41	PK
H	28925.00	43.92	31.02	8.99	25.57	47.46	54.00	-6.54	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	52.50	30.55	5.77	24.66	52.38	74.00	-21.62	PK
V	11650.00	43.96	30.55	5.77	24.66	43.84	54.00	-10.16	AV
V	17475.00	53.80	30.33	6.32	24.55	54.34	74.00	-19.66	PK
V	17475.00	43.30	30.33	6.32	24.55	43.84	54.00	-10.16	AV
V	23300.00	50.08	30.85	7.45	24.69	51.37	74.00	-22.63	PK
V	23300.00	43.96	30.85	7.45	24.69	45.25	54.00	-8.75	AV
V	29125.00	53.73	31.02	8.99	25.57	57.27	74.00	-16.73	PK
V	29125.00	44.00	31.02	8.99	25.57	47.54	54.00	-6.46	AV
H	11650.00	54.34	30.55	5.77	24.66	54.22	74.00	-19.78	PK
H	11650.00	43.02	30.55	5.77	24.66	42.90	54.00	-11.10	AV
H	17475.00	54.97	30.33	6.32	24.55	55.51	74.00	-18.49	PK
H	17475.00	43.69	30.33	6.32	24.55	44.23	54.00	-9.77	AV
H	23300.00	50.66	30.85	7.45	24.69	51.95	74.00	-22.05	PK
H	23300.00	43.22	30.85	7.45	24.69	44.51	54.00	-9.49	AV
H	29125.00	50.99	31.02	8.99	25.57	54.53	74.00	-19.47	PK
H	29125.00	43.55	31.02	8.99	25.57	47.09	54.00	-6.91	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	54.73	30.55	5.77	24.66	54.61	74.00	-19.39	PK
V	11490.00	43.02	30.55	5.77	24.66	42.90	54.00	-11.10	AV
V	17235.00	51.40	30.33	6.32	24.55	51.94	74.00	-22.06	PK
V	17235.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
V	22980.00	54.92	30.85	7.45	24.69	56.21	74.00	-17.79	PK
V	22980.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
V	28725.00	53.30	31.02	8.99	25.57	56.84	74.00	-17.16	PK
V	28725.00	43.38	31.02	8.99	25.57	46.92	54.00	-7.08	AV
H	11490.00	54.40	30.55	5.77	24.66	54.28	74.00	-19.72	PK
H	11490.00	43.11	30.55	5.77	24.66	42.99	54.00	-11.01	AV
H	17235.00	52.34	30.33	6.32	24.55	52.88	74.00	-21.12	PK
H	17235.00	43.29	30.33	6.32	24.55	43.83	54.00	-10.17	AV
H	22980.00	53.87	30.85	7.45	24.69	55.16	74.00	-18.84	PK
H	22980.00	43.62	30.85	7.45	24.69	44.91	54.00	-9.09	AV
H	28725.00	51.60	31.02	8.99	25.57	55.14	74.00	-18.86	PK
H	28725.00	43.85	31.02	8.99	25.57	47.39	54.00	-6.61	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	52.38	30.55	5.77	24.66	52.26	74.00	-21.74	PK
V	11570.00	43.86	30.55	5.77	24.66	43.74	54.00	-10.26	AV
V	17355.00	54.09	30.33	6.32	24.55	54.63	74.00	-19.37	PK
V	17355.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
V	23140.00	51.52	30.85	7.45	24.69	52.81	74.00	-21.19	PK
V	23140.00	43.90	30.85	7.45	24.69	45.19	54.00	-8.81	AV
V	28925.00	52.77	31.02	8.99	25.57	56.31	74.00	-17.69	PK
V	28925.00	43.30	31.02	8.99	25.57	46.84	54.00	-7.16	AV
H	11570.00	51.78	30.55	5.77	24.66	51.66	74.00	-22.34	PK
H	11570.00	43.47	30.55	5.77	24.66	43.35	54.00	-10.65	AV
H	17355.00	53.11	30.33	6.32	24.55	53.65	74.00	-20.35	PK
H	17355.00	43.40	30.33	6.32	24.55	43.94	54.00	-10.06	AV
H	23140.00	54.95	30.85	7.45	24.69	56.24	74.00	-17.76	PK
H	23140.00	43.37	30.85	7.45	24.69	44.66	54.00	-9.34	AV
H	28925.00	54.90	31.02	8.99	25.57	58.44	74.00	-15.56	PK
H	28925.00	43.14	31.02	8.99	25.57	46.68	54.00	-7.32	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	54.08	30.55	5.77	24.66	53.96	74.00	-20.04	PK
V	11650.00	43.98	30.55	5.77	24.66	43.86	54.00	-10.14	AV
V	17475.00	52.33	30.33	6.32	24.55	52.87	74.00	-21.13	PK
V	17475.00	43.39	30.33	6.32	24.55	43.93	54.00	-10.07	AV
V	23300.00	51.75	30.85	7.45	24.69	53.04	74.00	-20.96	PK
V	23300.00	43.40	30.85	7.45	24.69	44.69	54.00	-9.31	AV
V	29125.00	54.44	31.02	8.99	25.57	57.98	74.00	-16.02	PK
V	29125.00	43.90	31.02	8.99	25.57	47.44	54.00	-6.56	AV
H	11650.00	51.89	30.55	5.77	24.66	51.77	74.00	-22.23	PK
H	11650.00	43.48	30.55	5.77	24.66	43.36	54.00	-10.64	AV
H	17475.00	54.15	30.33	6.32	24.55	54.69	74.00	-19.31	PK
H	17475.00	43.66	30.33	6.32	24.55	44.20	54.00	-9.80	AV
H	23300.00	50.80	30.85	7.45	24.69	52.09	74.00	-21.91	PK
H	23300.00	43.80	30.85	7.45	24.69	45.09	54.00	-8.91	AV
H	29125.00	53.97	31.02	8.99	25.57	57.51	74.00	-16.49	PK
H	29125.00	43.04	31.02	8.99	25.57	46.58	54.00	-7.42	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Between CP30-air3 1GHz~25GHz**

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	5.8G TX- 802.11a/ n20/ ac20/ n40/ ac40		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	53.20	30.55	5.77	24.66	53.08	74.00	-20.92	PK
V	11490.00	43.27	30.55	5.77	24.66	43.15	54.00	-10.85	AV
V	17235.00	54.65	30.33	6.32	24.55	55.19	74.00	-18.81	PK
V	17235.00	43.66	30.33	6.32	24.55	44.20	54.00	-9.80	AV
V	22980.00	52.90	30.85	7.45	24.69	54.19	74.00	-19.81	PK
V	22980.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
V	28725.00	52.75	31.02	8.99	25.57	56.29	74.00	-17.71	PK
V	28725.00	43.72	31.02	8.99	25.57	47.26	54.00	-6.74	AV
H	11490.00	54.35	30.55	5.77	24.66	54.23	74.00	-19.77	PK
H	11490.00	43.78	30.55	5.77	24.66	43.66	54.00	-10.34	AV
H	17235.00	53.00	30.33	6.32	24.55	53.54	74.00	-20.46	PK
H	17235.00	43.89	30.33	6.32	24.55	44.43	54.00	-9.57	AV
H	22980.00	53.19	30.85	7.45	24.69	54.48	74.00	-19.52	PK
H	22980.00	43.22	30.85	7.45	24.69	44.51	54.00	-9.49	AV
H	28725.00	54.43	31.02	8.99	25.57	57.97	74.00	-16.03	PK
H	28725.00	43.47	31.02	8.99	25.57	47.01	54.00	-6.99	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	52.85	30.55	5.77	24.66	52.73	74.00	-21.27	PK
V	11570.00	43.92	30.55	5.77	24.66	43.80	54.00	-10.20	AV
V	17355.00	53.15	30.33	6.32	24.55	53.69	74.00	-20.31	PK
V	17355.00	43.38	30.33	6.32	24.55	43.92	54.00	-10.08	AV
V	23140.00	53.34	30.85	7.45	24.69	54.63	74.00	-19.37	PK
V	23140.00	43.32	30.85	7.45	24.69	44.61	54.00	-9.39	AV
V	28925.00	52.96	31.02	8.99	25.57	56.50	74.00	-17.50	PK
V	28925.00	43.73	31.02	8.99	25.57	47.27	54.00	-6.73	AV
H	11570.00	51.90	30.55	5.77	24.66	51.78	74.00	-22.22	PK
H	11570.00	43.67	30.55	5.77	24.66	43.55	54.00	-10.45	AV
H	17355.00	50.57	30.33	6.32	24.55	51.11	74.00	-22.89	PK
H	17355.00	43.59	30.33	6.32	24.55	44.13	54.00	-9.87	AV
H	23140.00	50.95	30.85	7.45	24.69	52.24	74.00	-21.76	PK
H	23140.00	43.77	30.85	7.45	24.69	45.06	54.00	-8.94	AV
H	28925.00	53.84	31.02	8.99	25.57	57.38	74.00	-16.62	PK
H	28925.00	43.84	31.02	8.99	25.57	47.38	54.00	-6.62	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5825MHz									
V	11650.00	52.82	30.55	5.77	24.66	52.70	74.00	-21.30	PK
V	11650.00	43.87	30.55	5.77	24.66	43.75	54.00	-10.25	AV
V	17475.00	54.69	30.33	6.32	24.55	55.23	74.00	-18.77	PK
V	17475.00	43.12	30.33	6.32	24.55	43.66	54.00	-10.34	AV
V	23300.00	54.62	30.85	7.45	24.69	55.91	74.00	-18.09	PK
V	23300.00	43.12	30.85	7.45	24.69	44.41	54.00	-9.59	AV
V	29125.00	52.58	31.02	8.99	25.57	56.12	74.00	-17.88	PK
V	29125.00	43.47	31.02	8.99	25.57	47.01	54.00	-6.99	AV
H	11650.00	50.15	30.55	5.77	24.66	50.03	74.00	-23.97	PK
H	11650.00	43.20	30.55	5.77	24.66	43.08	54.00	-10.92	AV
H	17475.00	53.70	30.33	6.32	24.55	54.24	74.00	-19.76	PK
H	17475.00	43.80	30.33	6.32	24.55	44.34	54.00	-9.66	AV
H	23300.00	50.71	30.85	7.45	24.69	52.00	74.00	-22.00	PK
H	23300.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
H	29125.00	52.80	31.02	8.99	25.57	56.34	74.00	-17.66	PK
H	29125.00	43.54	31.02	8.99	25.57	47.08	54.00	-6.92	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	52.28	30.55	5.77	24.66	52.16	74.00	-21.84	PK
V	11490.00	43.83	30.55	5.77	24.66	43.71	54.00	-10.29	AV
V	17235.00	52.17	30.33	6.32	24.55	52.71	74.00	-21.29	PK
V	17235.00	43.53	30.33	6.32	24.55	44.07	54.00	-9.93	AV
V	22980.00	54.70	30.85	7.45	24.69	55.99	74.00	-18.01	PK
V	22980.00	43.21	30.85	7.45	24.69	44.50	54.00	-9.50	AV
V	28725.00	51.02	31.02	8.99	25.57	54.56	74.00	-19.44	PK
V	28725.00	43.08	31.02	8.99	25.57	46.62	54.00	-7.38	AV
H	11490.00	50.61	30.55	5.77	24.66	50.49	74.00	-23.51	PK
H	11490.00	43.23	30.55	5.77	24.66	43.11	54.00	-10.89	AV
H	17235.00	51.99	30.33	6.32	24.55	52.53	74.00	-21.47	PK
H	17235.00	43.92	30.33	6.32	24.55	44.46	54.00	-9.54	AV
H	22980.00	50.20	30.85	7.45	24.69	51.49	74.00	-22.51	PK
H	22980.00	43.58	30.85	7.45	24.69	44.87	54.00	-9.13	AV
H	28725.00	50.56	31.02	8.99	25.57	54.10	74.00	-19.90	PK
H	28725.00	43.06	31.02	8.99	25.57	46.60	54.00	-7.40	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	50.70	30.55	5.77	24.66	50.58	74.00	-23.42	PK
V	11570.00	43.92	30.55	5.77	24.66	43.80	54.00	-10.20	AV
V	17355.00	54.77	30.33	6.32	24.55	55.31	74.00	-18.69	PK
V	17355.00	43.69	30.33	6.32	24.55	44.23	54.00	-9.77	AV
V	23140.00	54.46	30.85	7.45	24.69	55.75	74.00	-18.25	PK
V	23140.00	43.95	30.85	7.45	24.69	45.24	54.00	-8.76	AV
V	28925.00	51.01	31.02	8.99	25.57	54.55	74.00	-19.45	PK
V	28925.00	43.50	31.02	8.99	25.57	47.04	54.00	-6.96	AV
H	11570.00	50.43	30.55	5.77	24.66	50.31	74.00	-23.69	PK
H	11570.00	43.13	30.55	5.77	24.66	43.01	54.00	-10.99	AV
H	17355.00	51.56	30.33	6.32	24.55	52.10	74.00	-21.90	PK
H	17355.00	43.75	30.33	6.32	24.55	44.29	54.00	-9.71	AV
H	23140.00	52.16	30.85	7.45	24.69	53.45	74.00	-20.55	PK
H	23140.00	43.80	30.85	7.45	24.69	45.09	54.00	-8.91	AV
H	28925.00	50.62	31.02	8.99	25.57	54.16	74.00	-19.84	PK
H	28925.00	43.88	31.02	8.99	25.57	47.42	54.00	-6.58	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	50.60	30.55	5.77	24.66	50.48	74.00	-23.52	PK
V	11650.00	43.91	30.55	5.77	24.66	43.79	54.00	-10.21	AV
V	17475.00	53.95	30.33	6.32	24.55	54.49	74.00	-19.51	PK
V	17475.00	43.10	30.33	6.32	24.55	43.64	54.00	-10.36	AV
V	23300.00	52.85	30.85	7.45	24.69	54.14	74.00	-19.86	PK
V	23300.00	43.83	30.85	7.45	24.69	45.12	54.00	-8.88	AV
V	29125.00	53.23	31.02	8.99	25.57	56.77	74.00	-17.23	PK
V	29125.00	43.47	31.02	8.99	25.57	47.01	54.00	-6.99	AV
H	11650.00	53.31	30.55	5.77	24.66	53.19	74.00	-20.81	PK
H	11650.00	43.37	30.55	5.77	24.66	43.25	54.00	-10.75	AV
H	17475.00	51.61	30.33	6.32	24.55	52.15	74.00	-21.85	PK
H	17475.00	43.73	30.33	6.32	24.55	44.27	54.00	-9.73	AV
H	23300.00	54.59	30.85	7.45	24.69	55.88	74.00	-18.12	PK
H	23300.00	43.55	30.85	7.45	24.69	44.84	54.00	-9.16	AV
H	29125.00	52.88	31.02	8.99	25.57	56.42	74.00	-17.58	PK
H	29125.00	43.22	31.02	8.99	25.57	46.76	54.00	-7.24	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	51.79	30.55	5.77	24.66	51.67	74.00	-22.33	PK
V	11490.00	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
V	17235.00	51.23	30.33	6.32	24.55	51.77	74.00	-22.23	PK
V	17235.00	43.94	30.33	6.32	24.55	44.48	54.00	-9.52	AV
V	22980.00	51.23	30.85	7.45	24.69	52.52	74.00	-21.48	PK
V	22980.00	43.49	30.85	7.45	24.69	44.78	54.00	-9.22	AV
V	28725.00	51.94	31.02	8.99	25.57	55.48	74.00	-18.52	PK
V	28725.00	43.76	31.02	8.99	25.57	47.30	54.00	-6.70	AV
H	11490.00	54.14	30.55	5.77	24.66	54.02	74.00	-19.98	PK
H	11490.00	43.08	30.55	5.77	24.66	42.96	54.00	-11.04	AV
H	17235.00	54.51	30.33	6.32	24.55	55.05	74.00	-18.95	PK
H	17235.00	43.23	30.33	6.32	24.55	43.77	54.00	-10.23	AV
H	22980.00	53.52	30.85	7.45	24.69	54.81	74.00	-19.19	PK
H	22980.00	43.10	30.85	7.45	24.69	44.39	54.00	-9.61	AV
H	28725.00	53.91	31.02	8.99	25.57	57.45	74.00	-16.55	PK
H	28725.00	43.68	31.02	8.99	25.57	47.22	54.00	-6.78	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	52.74	30.55	5.77	24.66	52.62	74.00	-21.38	PK
V	11570.00	43.63	30.55	5.77	24.66	43.51	54.00	-10.49	AV
V	17355.00	52.31	30.33	6.32	24.55	52.85	74.00	-21.15	PK
V	17355.00	43.07	30.33	6.32	24.55	43.61	54.00	-10.39	AV
V	23140.00	52.20	30.85	7.45	24.69	53.49	74.00	-20.51	PK
V	23140.00	43.13	30.85	7.45	24.69	44.42	54.00	-9.58	AV
V	28925.00	50.62	31.02	8.99	25.57	54.16	74.00	-19.84	PK
V	28925.00	43.86	31.02	8.99	25.57	47.40	54.00	-6.60	AV
H	11570.00	52.41	30.55	5.77	24.66	52.29	74.00	-21.71	PK
H	11570.00	43.48	30.55	5.77	24.66	43.36	54.00	-10.64	AV
H	17355.00	52.12	30.33	6.32	24.55	52.66	74.00	-21.34	PK
H	17355.00	43.90	30.33	6.32	24.55	44.44	54.00	-9.56	AV
H	23140.00	52.63	30.85	7.45	24.69	53.92	74.00	-20.08	PK
H	23140.00	43.96	30.85	7.45	24.69	45.25	54.00	-8.75	AV
H	28925.00	52.49	31.02	8.99	25.57	56.03	74.00	-17.97	PK
H	28925.00	43.50	31.02	8.99	25.57	47.04	54.00	-6.96	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	50.77	30.55	5.77	24.66	50.65	74.00	-23.35	PK
V	11650.00	43.53	30.55	5.77	24.66	43.41	54.00	-10.59	AV
V	17475.00	50.12	30.33	6.32	24.55	50.66	74.00	-23.34	PK
V	17475.00	43.36	30.33	6.32	24.55	43.90	54.00	-10.10	AV
V	23300.00	54.66	30.85	7.45	24.69	55.95	74.00	-18.05	PK
V	23300.00	43.56	30.85	7.45	24.69	44.85	54.00	-9.15	AV
V	29125.00	51.44	31.02	8.99	25.57	54.98	74.00	-19.02	PK
V	29125.00	43.27	31.02	8.99	25.57	46.81	54.00	-7.19	AV
H	11650.00	54.25	30.55	5.77	24.66	54.13	74.00	-19.87	PK
H	11650.00	43.73	30.55	5.77	24.66	43.61	54.00	-10.39	AV
H	17475.00	52.05	30.33	6.32	24.55	52.59	74.00	-21.41	PK
H	17475.00	43.84	30.33	6.32	24.55	44.38	54.00	-9.62	AV
H	23300.00	50.71	30.85	7.45	24.69	52.00	74.00	-22.00	PK
H	23300.00	43.91	30.85	7.45	24.69	45.20	54.00	-8.80	AV
H	29125.00	54.63	31.02	8.99	25.57	58.17	74.00	-15.83	PK
H	29125.00	43.49	31.02	8.99	25.57	47.03	54.00	-6.97	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Between CP30-air5 1GHz~25GHz**

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	5.8G TX- 802.11a/ n20/ ac20/ n40/ ac40		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	52.77	30.55	5.77	24.66	52.65	74.00	-21.35	PK
V	11490.00	43.14	30.55	5.77	24.66	43.02	54.00	-10.98	AV
V	17235.00	53.19	30.33	6.32	24.55	53.73	74.00	-20.27	PK
V	17235.00	43.91	30.33	6.32	24.55	44.45	54.00	-9.55	AV
V	22980.00	53.55	30.85	7.45	24.69	54.84	74.00	-19.16	PK
V	22980.00	43.78	30.85	7.45	24.69	45.07	54.00	-8.93	AV
V	28725.00	54.19	31.02	8.99	25.57	57.73	74.00	-16.27	PK
V	28725.00	43.92	31.02	8.99	25.57	47.46	54.00	-6.54	AV
H	11490.00	52.02	30.55	5.77	24.66	51.90	74.00	-22.10	PK
H	11490.00	43.57	30.55	5.77	24.66	43.45	54.00	-10.55	AV
H	17235.00	52.57	30.33	6.32	24.55	53.11	74.00	-20.89	PK
H	17235.00	43.49	30.33	6.32	24.55	44.03	54.00	-9.97	AV
H	22980.00	51.78	30.85	7.45	24.69	53.07	74.00	-20.93	PK
H	22980.00	43.44	30.85	7.45	24.69	44.73	54.00	-9.27	AV
H	28725.00	54.41	31.02	8.99	25.57	57.95	74.00	-16.05	PK
H	28725.00	43.56	31.02	8.99	25.57	47.10	54.00	-6.90	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	51.66	30.55	5.77	24.66	51.54	74.00	-22.46	PK
V	11570.00	43.61	30.55	5.77	24.66	43.49	54.00	-10.51	AV
V	17355.00	54.04	30.33	6.32	24.55	54.58	74.00	-19.42	PK
V	17355.00	43.81	30.33	6.32	24.55	44.35	54.00	-9.65	AV
V	23140.00	51.59	30.85	7.45	24.69	52.88	74.00	-21.12	PK
V	23140.00	43.17	30.85	7.45	24.69	44.46	54.00	-9.54	AV
V	28925.00	53.14	31.02	8.99	25.57	56.68	74.00	-17.32	PK
V	28925.00	43.07	31.02	8.99	25.57	46.61	54.00	-7.39	AV
H	11570.00	54.61	30.55	5.77	24.66	54.49	74.00	-19.51	PK
H	11570.00	44.00	30.55	5.77	24.66	43.88	54.00	-10.12	AV
H	17355.00	50.36	30.33	6.32	24.55	50.90	74.00	-23.10	PK
H	17355.00	43.37	30.33	6.32	24.55	43.91	54.00	-10.09	AV
H	23140.00	54.87	30.85	7.45	24.69	56.16	74.00	-17.84	PK
H	23140.00	43.35	30.85	7.45	24.69	44.64	54.00	-9.36	AV
H	28925.00	51.44	31.02	8.99	25.57	54.98	74.00	-19.02	PK
H	28925.00	43.85	31.02	8.99	25.57	47.39	54.00	-6.61	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5825MHz									
V	11650.00	50.08	30.55	5.77	24.66	49.96	74.00	-24.04	PK
V	11650.00	43.90	30.55	5.77	24.66	43.78	54.00	-10.22	AV
V	17475.00	54.27	30.33	6.32	24.55	54.81	74.00	-19.19	PK
V	17475.00	43.34	30.33	6.32	24.55	43.88	54.00	-10.12	AV
V	23300.00	52.63	30.85	7.45	24.69	53.92	74.00	-20.08	PK
V	23300.00	43.78	30.85	7.45	24.69	45.07	54.00	-8.93	AV
V	29125.00	50.06	31.02	8.99	25.57	53.60	74.00	-20.40	PK
V	29125.00	43.46	31.02	8.99	25.57	47.00	54.00	-7.00	AV
H	11650.00	54.75	30.55	5.77	24.66	54.63	74.00	-19.37	PK
H	11650.00	43.79	30.55	5.77	24.66	43.67	54.00	-10.33	AV
H	17475.00	51.08	30.33	6.32	24.55	51.62	74.00	-22.38	PK
H	17475.00	43.08	30.33	6.32	24.55	43.62	54.00	-10.38	AV
H	23300.00	52.17	30.85	7.45	24.69	53.46	74.00	-20.54	PK
H	23300.00	43.39	30.85	7.45	24.69	44.68	54.00	-9.32	AV
H	29125.00	52.15	31.02	8.99	25.57	55.69	74.00	-18.31	PK
H	29125.00	43.39	31.02	8.99	25.57	46.93	54.00	-7.07	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	54.35	30.55	5.77	24.66	54.23	74.00	-19.77	PK
V	11490.00	43.85	30.55	5.77	24.66	43.73	54.00	-10.27	AV
V	17235.00	53.31	30.33	6.32	24.55	53.85	74.00	-20.15	PK
V	17235.00	43.62	30.33	6.32	24.55	44.16	54.00	-9.84	AV
V	22980.00	54.24	30.85	7.45	24.69	55.53	74.00	-18.47	PK
V	22980.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
V	28725.00	54.36	31.02	8.99	25.57	57.90	74.00	-16.10	PK
V	28725.00	43.89	31.02	8.99	25.57	47.43	54.00	-6.57	AV
H	11490.00	52.81	30.55	5.77	24.66	52.69	74.00	-21.31	PK
H	11490.00	43.33	30.55	5.77	24.66	43.21	54.00	-10.79	AV
H	17235.00	51.55	30.33	6.32	24.55	52.09	74.00	-21.91	PK
H	17235.00	43.98	30.33	6.32	24.55	44.52	54.00	-9.48	AV
H	22980.00	52.08	30.85	7.45	24.69	53.37	74.00	-20.63	PK
H	22980.00	43.53	30.85	7.45	24.69	44.82	54.00	-9.18	AV
H	28725.00	50.71	31.02	8.99	25.57	54.25	74.00	-19.75	PK
H	28725.00	43.59	31.02	8.99	25.57	47.13	54.00	-6.87	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	51.41	30.55	5.77	24.66	51.29	74.00	-22.71	PK
V	11570.00	43.54	30.55	5.77	24.66	43.42	54.00	-10.58	AV
V	17355.00	52.51	30.33	6.32	24.55	53.05	74.00	-20.95	PK
V	17355.00	43.14	30.33	6.32	24.55	43.68	54.00	-10.32	AV
V	23140.00	53.03	30.85	7.45	24.69	54.32	74.00	-19.68	PK
V	23140.00	43.40	30.85	7.45	24.69	44.69	54.00	-9.31	AV
V	28925.00	51.06	31.02	8.99	25.57	54.60	74.00	-19.40	PK
V	28925.00	43.05	31.02	8.99	25.57	46.59	54.00	-7.41	AV
H	11570.00	52.33	30.55	5.77	24.66	52.21	74.00	-21.79	PK
H	11570.00	43.27	30.55	5.77	24.66	43.15	54.00	-10.85	AV
H	17355.00	54.07	30.33	6.32	24.55	54.61	74.00	-19.39	PK
H	17355.00	43.14	30.33	6.32	24.55	43.68	54.00	-10.32	AV
H	23140.00	50.58	30.85	7.45	24.69	51.87	74.00	-22.13	PK
H	23140.00	43.20	30.85	7.45	24.69	44.49	54.00	-9.51	AV
H	28925.00	52.58	31.02	8.99	25.57	56.12	74.00	-17.88	PK
H	28925.00	43.80	31.02	8.99	25.57	47.34	54.00	-6.66	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	54.42	30.55	5.77	24.66	54.30	74.00	-19.70	PK
V	11650.00	43.39	30.55	5.77	24.66	43.27	54.00	-10.73	AV
V	17475.00	53.11	30.33	6.32	24.55	53.65	74.00	-20.35	PK
V	17475.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
V	23300.00	53.78	30.85	7.45	24.69	55.07	74.00	-18.93	PK
V	23300.00	43.42	30.85	7.45	24.69	44.71	54.00	-9.29	AV
V	29125.00	50.02	31.02	8.99	25.57	53.56	74.00	-20.44	PK
V	29125.00	43.35	31.02	8.99	25.57	46.89	54.00	-7.11	AV
H	11650.00	51.61	30.55	5.77	24.66	51.49	74.00	-22.51	PK
H	11650.00	43.62	30.55	5.77	24.66	43.50	54.00	-10.50	AV
H	17475.00	50.25	30.33	6.32	24.55	50.79	74.00	-23.21	PK
H	17475.00	43.84	30.33	6.32	24.55	44.38	54.00	-9.62	AV
H	23300.00	53.43	30.85	7.45	24.69	54.72	74.00	-19.28	PK
H	23300.00	43.36	30.85	7.45	24.69	44.65	54.00	-9.35	AV
H	29125.00	50.85	31.02	8.99	25.57	54.39	74.00	-19.61	PK
H	29125.00	43.81	31.02	8.99	25.57	47.35	54.00	-6.65	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	53.70	30.55	5.77	24.66	53.58	74.00	-20.42	PK
V	11490.00	43.75	30.55	5.77	24.66	43.63	54.00	-10.37	AV
V	17235.00	52.77	30.33	6.32	24.55	53.31	74.00	-20.69	PK
V	17235.00	43.02	30.33	6.32	24.55	43.56	54.00	-10.44	AV
V	22980.00	52.69	30.85	7.45	24.69	53.98	74.00	-20.02	PK
V	22980.00	43.29	30.85	7.45	24.69	44.58	54.00	-9.42	AV
V	28725.00	52.63	31.02	8.99	25.57	56.17	74.00	-17.83	PK
V	28725.00	43.39	31.02	8.99	25.57	46.93	54.00	-7.07	AV
H	11490.00	50.24	30.55	5.77	24.66	50.12	74.00	-23.88	PK
H	11490.00	43.02	30.55	5.77	24.66	42.90	54.00	-11.10	AV
H	17235.00	53.42	30.33	6.32	24.55	53.96	74.00	-20.04	PK
H	17235.00	43.07	30.33	6.32	24.55	43.61	54.00	-10.39	AV
H	22980.00	51.82	30.85	7.45	24.69	53.11	74.00	-20.89	PK
H	22980.00	43.99	30.85	7.45	24.69	45.28	54.00	-8.72	AV
H	28725.00	51.30	31.02	8.99	25.57	54.84	74.00	-19.16	PK
H	28725.00	43.55	31.02	8.99	25.57	47.09	54.00	-6.91	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	50.00	30.55	5.77	24.66	49.88	74.00	-24.12	PK
V	11570.00	43.90	30.55	5.77	24.66	43.78	54.00	-10.22	AV
V	17355.00	53.59	30.33	6.32	24.55	54.13	74.00	-19.87	PK
V	17355.00	43.27	30.33	6.32	24.55	43.81	54.00	-10.19	AV
V	23140.00	54.09	30.85	7.45	24.69	55.38	74.00	-18.62	PK
V	23140.00	43.89	30.85	7.45	24.69	45.18	54.00	-8.82	AV
V	28925.00	51.90	31.02	8.99	25.57	55.44	74.00	-18.56	PK
V	28925.00	43.14	31.02	8.99	25.57	46.68	54.00	-7.32	AV
H	11570.00	50.69	30.55	5.77	24.66	50.57	74.00	-23.43	PK
H	11570.00	43.91	30.55	5.77	24.66	43.79	54.00	-10.21	AV
H	17355.00	53.86	30.33	6.32	24.55	54.40	74.00	-19.60	PK
H	17355.00	43.31	30.33	6.32	24.55	43.85	54.00	-10.15	AV
H	23140.00	50.36	30.85	7.45	24.69	51.65	74.00	-22.35	PK
H	23140.00	43.39	30.85	7.45	24.69	44.68	54.00	-9.32	AV
H	28925.00	52.53	31.02	8.99	25.57	56.07	74.00	-17.93	PK
H	28925.00	43.77	31.02	8.99	25.57	47.31	54.00	-6.69	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	53.33	30.55	5.77	24.66	53.21	74.00	-20.79	PK
V	11650.00	43.39	30.55	5.77	24.66	43.27	54.00	-10.73	AV
V	17475.00	50.25	30.33	6.32	24.55	50.79	74.00	-23.21	PK
V	17475.00	43.27	30.33	6.32	24.55	43.81	54.00	-10.19	AV
V	23300.00	53.82	30.85	7.45	24.69	55.11	74.00	-18.89	PK
V	23300.00	43.39	30.85	7.45	24.69	44.68	54.00	-9.32	AV
V	29125.00	54.44	31.02	8.99	25.57	57.98	74.00	-16.02	PK
V	29125.00	43.48	31.02	8.99	25.57	47.02	54.00	-6.98	AV
H	11650.00	52.43	30.55	5.77	24.66	52.31	74.00	-21.69	PK
H	11650.00	43.31	30.55	5.77	24.66	43.19	54.00	-10.81	AV
H	17475.00	50.02	30.33	6.32	24.55	50.56	74.00	-23.44	PK
H	17475.00	43.07	30.33	6.32	24.55	43.61	54.00	-10.39	AV
H	23300.00	53.98	30.85	7.45	24.69	55.27	74.00	-18.73	PK
H	23300.00	43.28	30.85	7.45	24.69	44.57	54.00	-9.43	AV
H	29125.00	54.58	31.02	8.99	25.57	58.12	74.00	-15.88	PK
H	29125.00	43.41	31.02	8.99	25.57	46.95	54.00	-7.05	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Between CP30-air6 1GHz~25GHz**

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	5.8G TX- 802.11a/ n20/ ac20/ n40/ ac40		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	54.93	30.55	5.77	24.66	54.81	74.00	-19.19	PK
V	11490.00	43.89	30.55	5.77	24.66	43.77	54.00	-10.23	AV
V	17235.00	53.36	30.33	6.32	24.55	53.90	74.00	-20.10	PK
V	17235.00	43.59	30.33	6.32	24.55	44.13	54.00	-9.87	AV
V	22980.00	53.45	30.85	7.45	24.69	54.74	74.00	-19.26	PK
V	22980.00	43.03	30.85	7.45	24.69	44.32	54.00	-9.68	AV
V	28725.00	53.15	31.02	8.99	25.57	56.69	74.00	-17.31	PK
V	28725.00	43.10	31.02	8.99	25.57	46.64	54.00	-7.36	AV
H	11490.00	54.92	30.55	5.77	24.66	54.80	74.00	-19.20	PK
H	11490.00	43.90	30.55	5.77	24.66	43.78	54.00	-10.22	AV
H	17235.00	51.39	30.33	6.32	24.55	51.93	74.00	-22.07	PK
H	17235.00	43.66	30.33	6.32	24.55	44.20	54.00	-9.80	AV
H	22980.00	52.57	30.85	7.45	24.69	53.86	74.00	-20.14	PK
H	22980.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
H	28725.00	51.40	31.02	8.99	25.57	54.94	74.00	-19.06	PK
H	28725.00	43.35	31.02	8.99	25.57	46.89	54.00	-7.11	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	54.62	30.55	5.77	24.66	54.50	74.00	-19.50	PK
V	11570.00	43.08	30.55	5.77	24.66	42.96	54.00	-11.04	AV
V	17355.00	53.95	30.33	6.32	24.55	54.49	74.00	-19.51	PK
V	17355.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
V	23140.00	50.95	30.85	7.45	24.69	52.24	74.00	-21.76	PK
V	23140.00	43.70	30.85	7.45	24.69	44.99	54.00	-9.01	AV
V	28925.00	50.35	31.02	8.99	25.57	53.89	74.00	-20.11	PK
V	28925.00	43.48	31.02	8.99	25.57	47.02	54.00	-6.98	AV
H	11570.00	50.95	30.55	5.77	24.66	50.83	74.00	-23.17	PK
H	11570.00	43.10	30.55	5.77	24.66	42.98	54.00	-11.02	AV
H	17355.00	53.58	30.33	6.32	24.55	54.12	74.00	-19.88	PK
H	17355.00	43.63	30.33	6.32	24.55	44.17	54.00	-9.83	AV
H	23140.00	54.73	30.85	7.45	24.69	56.02	74.00	-17.98	PK
H	23140.00	43.69	30.85	7.45	24.69	44.98	54.00	-9.02	AV
H	28925.00	54.17	31.02	8.99	25.57	57.71	74.00	-16.29	PK
H	28925.00	43.33	31.02	8.99	25.57	46.87	54.00	-7.13	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	54.38	30.55	5.77	24.66	54.26	74.00	-19.74	PK
V	11650.00	43.36	30.55	5.77	24.66	43.24	54.00	-10.76	AV
V	17475.00	51.00	30.33	6.32	24.55	51.54	74.00	-22.46	PK
V	17475.00	43.68	30.33	6.32	24.55	44.22	54.00	-9.78	AV
V	23300.00	53.19	30.85	7.45	24.69	54.48	74.00	-19.52	PK
V	23300.00	43.16	30.85	7.45	24.69	44.45	54.00	-9.55	AV
V	29125.00	52.90	31.02	8.99	25.57	56.44	74.00	-17.56	PK
V	29125.00	43.15	31.02	8.99	25.57	46.69	54.00	-7.31	AV
H	11650.00	54.75	30.55	5.77	24.66	54.63	74.00	-19.37	PK
H	11650.00	43.29	30.55	5.77	24.66	43.17	54.00	-10.83	AV
H	17475.00	52.34	30.33	6.32	24.55	52.88	74.00	-21.12	PK
H	17475.00	43.33	30.33	6.32	24.55	43.87	54.00	-10.13	AV
H	23300.00	53.16	30.85	7.45	24.69	54.45	74.00	-19.55	PK
H	23300.00	43.75	30.85	7.45	24.69	45.04	54.00	-8.96	AV
H	29125.00	51.74	31.02	8.99	25.57	55.28	74.00	-18.72	PK
H	29125.00	43.57	31.02	8.99	25.57	47.11	54.00	-6.89	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	52.32	30.55	5.77	24.66	52.20	74.00	-21.80	PK
V	11490.00	43.10	30.55	5.77	24.66	42.98	54.00	-11.02	AV
V	17235.00	51.94	30.33	6.32	24.55	52.48	74.00	-21.52	PK
V	17235.00	43.28	30.33	6.32	24.55	43.82	54.00	-10.18	AV
V	22980.00	52.88	30.85	7.45	24.69	54.17	74.00	-19.83	PK
V	22980.00	43.99	30.85	7.45	24.69	45.28	54.00	-8.72	AV
V	28725.00	51.17	31.02	8.99	25.57	54.71	74.00	-19.29	PK
V	28725.00	43.62	31.02	8.99	25.57	47.16	54.00	-6.84	AV
H	11490.00	54.62	30.55	5.77	24.66	54.50	74.00	-19.50	PK
H	11490.00	43.87	30.55	5.77	24.66	43.75	54.00	-10.25	AV
H	17235.00	53.68	30.33	6.32	24.55	54.22	74.00	-19.78	PK
H	17235.00	43.46	30.33	6.32	24.55	44.00	54.00	-10.00	AV
H	22980.00	50.97	30.85	7.45	24.69	52.26	74.00	-21.74	PK
H	22980.00	43.57	30.85	7.45	24.69	44.86	54.00	-9.14	AV
H	28725.00	54.75	31.02	8.99	25.57	58.29	74.00	-15.71	PK
H	28725.00	43.46	31.02	8.99	25.57	47.00	54.00	-7.00	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	53.78	30.55	5.77	24.66	53.66	74.00	-20.34	PK
V	11570.00	43.09	30.55	5.77	24.66	42.97	54.00	-11.03	AV
V	17355.00	53.36	30.33	6.32	24.55	53.90	74.00	-20.10	PK
V	17355.00	43.58	30.33	6.32	24.55	44.12	54.00	-9.88	AV
V	23140.00	52.29	30.85	7.45	24.69	53.58	74.00	-20.42	PK
V	23140.00	43.65	30.85	7.45	24.69	44.94	54.00	-9.06	AV
V	28925.00	53.03	31.02	8.99	25.57	56.57	74.00	-17.43	PK
V	28925.00	43.92	31.02	8.99	25.57	47.46	54.00	-6.54	AV
H	11570.00	50.75	30.55	5.77	24.66	50.63	74.00	-23.37	PK
H	11570.00	43.22	30.55	5.77	24.66	43.10	54.00	-10.90	AV
H	17355.00	54.78	30.33	6.32	24.55	55.32	74.00	-18.68	PK
H	17355.00	43.52	30.33	6.32	24.55	44.06	54.00	-9.94	AV
H	23140.00	54.73	30.85	7.45	24.69	56.02	74.00	-17.98	PK
H	23140.00	43.61	30.85	7.45	24.69	44.90	54.00	-9.10	AV
H	28925.00	50.17	31.02	8.99	25.57	53.71	74.00	-20.29	PK
H	28925.00	43.88	31.02	8.99	25.57	47.42	54.00	-6.58	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	50.15	30.55	5.77	24.66	50.03	74.00	-23.97	PK
V	11650.00	43.72	30.55	5.77	24.66	43.60	54.00	-10.40	AV
V	17475.00	51.18	30.33	6.32	24.55	51.72	74.00	-22.28	PK
V	17475.00	43.84	30.33	6.32	24.55	44.38	54.00	-9.62	AV
V	23300.00	52.94	30.85	7.45	24.69	54.23	74.00	-19.77	PK
V	23300.00	43.65	30.85	7.45	24.69	44.94	54.00	-9.06	AV
V	29125.00	52.42	31.02	8.99	25.57	55.96	74.00	-18.04	PK
V	29125.00	43.40	31.02	8.99	25.57	46.94	54.00	-7.06	AV
H	11650.00	51.43	30.55	5.77	24.66	51.31	74.00	-22.69	PK
H	11650.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
H	17475.00	53.17	30.33	6.32	24.55	53.71	74.00	-20.29	PK
H	17475.00	43.91	30.33	6.32	24.55	44.45	54.00	-9.55	AV
H	23300.00	53.68	30.85	7.45	24.69	54.97	74.00	-19.03	PK
H	23300.00	43.72	30.85	7.45	24.69	45.01	54.00	-8.99	AV
H	29125.00	50.57	31.02	8.99	25.57	54.11	74.00	-19.89	PK
H	29125.00	43.18	31.02	8.99	25.57	46.72	54.00	-7.28	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	53.59	30.55	5.77	24.66	53.47	74.00	-20.53	PK
V	11490.00	43.51	30.55	5.77	24.66	43.39	54.00	-10.61	AV
V	17235.00	52.99	30.33	6.32	24.55	53.53	74.00	-20.47	PK
V	17235.00	43.78	30.33	6.32	24.55	44.32	54.00	-9.68	AV
V	22980.00	54.67	30.85	7.45	24.69	55.96	74.00	-18.04	PK
V	22980.00	43.30	30.85	7.45	24.69	44.59	54.00	-9.41	AV
V	28725.00	51.21	31.02	8.99	25.57	54.75	74.00	-19.25	PK
V	28725.00	43.57	31.02	8.99	25.57	47.11	54.00	-6.89	AV
H	11490.00	54.27	30.55	5.77	24.66	54.15	74.00	-19.85	PK
H	11490.00	43.63	30.55	5.77	24.66	43.51	54.00	-10.49	AV
H	17235.00	54.54	30.33	6.32	24.55	55.08	74.00	-18.92	PK
H	17235.00	43.46	30.33	6.32	24.55	44.00	54.00	-10.00	AV
H	22980.00	51.43	30.85	7.45	24.69	52.72	74.00	-21.28	PK
H	22980.00	43.48	30.85	7.45	24.69	44.77	54.00	-9.23	AV
H	28725.00	53.90	31.02	8.99	25.57	57.44	74.00	-16.56	PK
H	28725.00	43.72	31.02	8.99	25.57	47.26	54.00	-6.74	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	54.49	30.55	5.77	24.66	54.37	74.00	-19.63	PK
V	11570.00	43.82	30.55	5.77	24.66	43.70	54.00	-10.30	AV
V	17355.00	53.16	30.33	6.32	24.55	53.70	74.00	-20.30	PK
V	17355.00	43.36	30.33	6.32	24.55	43.90	54.00	-10.10	AV
V	23140.00	54.27	30.85	7.45	24.69	55.56	74.00	-18.44	PK
V	23140.00	43.62	30.85	7.45	24.69	44.91	54.00	-9.09	AV
V	28925.00	54.91	31.02	8.99	25.57	58.45	74.00	-15.55	PK
V	28925.00	43.51	31.02	8.99	25.57	47.05	54.00	-6.95	AV
H	11570.00	51.18	30.55	5.77	24.66	51.06	74.00	-22.94	PK
H	11570.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
H	17355.00	52.81	30.33	6.32	24.55	53.35	74.00	-20.65	PK
H	17355.00	43.58	30.33	6.32	24.55	44.12	54.00	-9.88	AV
H	23140.00	50.08	30.85	7.45	24.69	51.37	74.00	-22.63	PK
H	23140.00	43.27	30.85	7.45	24.69	44.56	54.00	-9.44	AV
H	28925.00	50.50	31.02	8.99	25.57	54.04	74.00	-19.96	PK
H	28925.00	43.90	31.02	8.99	25.57	47.44	54.00	-6.56	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	51.20	30.55	5.77	24.66	51.08	74.00	-22.92	PK
V	11650.00	43.26	30.55	5.77	24.66	43.14	54.00	-10.86	AV
V	17475.00	52.33	30.33	6.32	24.55	52.87	74.00	-21.13	PK
V	17475.00	43.45	30.33	6.32	24.55	43.99	54.00	-10.01	AV
V	23300.00	50.13	30.85	7.45	24.69	51.42	74.00	-22.58	PK
V	23300.00	43.22	30.85	7.45	24.69	44.51	54.00	-9.49	AV
V	29125.00	51.08	31.02	8.99	25.57	54.62	74.00	-19.38	PK
V	29125.00	43.76	31.02	8.99	25.57	47.30	54.00	-6.70	AV
H	11650.00	52.58	30.55	5.77	24.66	52.46	74.00	-21.54	PK
H	11650.00	43.39	30.55	5.77	24.66	43.27	54.00	-10.73	AV
H	17475.00	54.06	30.33	6.32	24.55	54.60	74.00	-19.40	PK
H	17475.00	43.99	30.33	6.32	24.55	44.53	54.00	-9.47	AV
H	23300.00	53.43	30.85	7.45	24.69	54.72	74.00	-19.28	PK
H	23300.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
H	29125.00	54.28	31.02	8.99	25.57	57.82	74.00	-16.18	PK
H	29125.00	43.15	31.02	8.99	25.57	46.69	54.00	-7.31	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Between CP30-air7 1GHz~25GHz**

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	5.8G TX- 802.11a/ n20/ ac20/ n40/ ac40		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

802.11a

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	52.04	30.55	5.77	24.66	51.92	74.00	-22.08	PK
V	11490.00	43.35	30.55	5.77	24.66	43.23	54.00	-10.77	AV
V	17235.00	52.30	30.33	6.32	24.55	52.84	74.00	-21.16	PK
V	17235.00	43.66	30.33	6.32	24.55	44.20	54.00	-9.80	AV
V	22980.00	54.08	30.85	7.45	24.69	55.37	74.00	-18.63	PK
V	22980.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
V	28725.00	51.21	31.02	8.99	25.57	54.75	74.00	-19.25	PK
V	28725.00	43.94	31.02	8.99	25.57	47.48	54.00	-6.52	AV
H	11490.00	51.68	30.55	5.77	24.66	51.56	74.00	-22.44	PK
H	11490.00	43.24	30.55	5.77	24.66	43.12	54.00	-10.88	AV
H	17235.00	51.74	30.33	6.32	24.55	52.28	74.00	-21.72	PK
H	17235.00	43.81	30.33	6.32	24.55	44.35	54.00	-9.65	AV
H	22980.00	52.73	30.85	7.45	24.69	54.02	74.00	-19.98	PK
H	22980.00	43.55	30.85	7.45	24.69	44.84	54.00	-9.16	AV
H	28725.00	52.35	31.02	8.99	25.57	55.89	74.00	-18.11	PK
H	28725.00	43.68	31.02	8.99	25.57	47.22	54.00	-6.78	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	53.03	30.55	5.77	24.66	52.91	74.00	-21.09	PK
V	11570.00	43.04	30.55	5.77	24.66	42.92	54.00	-11.08	AV
V	17355.00	52.98	30.33	6.32	24.55	53.52	74.00	-20.48	PK
V	17355.00	43.25	30.33	6.32	24.55	43.79	54.00	-10.21	AV
V	23140.00	51.85	30.85	7.45	24.69	53.14	74.00	-20.86	PK
V	23140.00	43.29	30.85	7.45	24.69	44.58	54.00	-9.42	AV
V	28925.00	51.92	31.02	8.99	25.57	55.46	74.00	-18.54	PK
V	28925.00	43.01	31.02	8.99	25.57	46.55	54.00	-7.45	AV
H	11570.00	54.11	30.55	5.77	24.66	53.99	74.00	-20.01	PK
H	11570.00	43.50	30.55	5.77	24.66	43.38	54.00	-10.62	AV
H	17355.00	53.06	30.33	6.32	24.55	53.60	74.00	-20.40	PK
H	17355.00	43.98	30.33	6.32	24.55	44.52	54.00	-9.48	AV
H	23140.00	53.60	30.85	7.45	24.69	54.89	74.00	-19.11	PK
H	23140.00	43.33	30.85	7.45	24.69	44.62	54.00	-9.38	AV
H	28925.00	54.76	31.02	8.99	25.57	58.30	74.00	-15.70	PK
H	28925.00	43.09	31.02	8.99	25.57	46.63	54.00	-7.37	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	52.46	30.55	5.77	24.66	52.34	74.00	-21.66	PK
V	11650.00	43.50	30.55	5.77	24.66	43.38	54.00	-10.62	AV
V	17475.00	50.85	30.33	6.32	24.55	51.39	74.00	-22.61	PK
V	17475.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
V	23300.00	51.75	30.85	7.45	24.69	53.04	74.00	-20.96	PK
V	23300.00	43.27	30.85	7.45	24.69	44.56	54.00	-9.44	AV
V	29125.00	52.28	31.02	8.99	25.57	55.82	74.00	-18.18	PK
V	29125.00	43.33	31.02	8.99	25.57	46.87	54.00	-7.13	AV
H	11650.00	50.98	30.55	5.77	24.66	50.86	74.00	-23.14	PK
H	11650.00	43.54	30.55	5.77	24.66	43.42	54.00	-10.58	AV
H	17475.00	54.32	30.33	6.32	24.55	54.86	74.00	-19.14	PK
H	17475.00	43.01	30.33	6.32	24.55	43.55	54.00	-10.45	AV
H	23300.00	51.71	30.85	7.45	24.69	53.00	74.00	-21.00	PK
H	23300.00	43.17	30.85	7.45	24.69	44.46	54.00	-9.54	AV
H	29125.00	50.45	31.02	8.99	25.57	53.99	74.00	-20.01	PK
H	29125.00	43.42	31.02	8.99	25.57	46.96	54.00	-7.04	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	50.25	30.55	5.77	24.66	50.13	74.00	-23.87	PK
V	11490.00	43.57	30.55	5.77	24.66	43.45	54.00	-10.55	AV
V	17235.00	53.04	30.33	6.32	24.55	53.58	74.00	-20.42	PK
V	17235.00	43.25	30.33	6.32	24.55	43.79	54.00	-10.21	AV
V	22980.00	51.53	30.85	7.45	24.69	52.82	74.00	-21.18	PK
V	22980.00	43.73	30.85	7.45	24.69	45.02	54.00	-8.98	AV
V	28725.00	53.20	31.02	8.99	25.57	56.74	74.00	-17.26	PK
V	28725.00	43.71	31.02	8.99	25.57	47.25	54.00	-6.75	AV
H	11490.00	51.31	30.55	5.77	24.66	51.19	74.00	-22.81	PK
H	11490.00	43.35	30.55	5.77	24.66	43.23	54.00	-10.77	AV
H	17235.00	51.54	30.33	6.32	24.55	52.08	74.00	-21.92	PK
H	17235.00	43.33	30.33	6.32	24.55	43.87	54.00	-10.13	AV
H	22980.00	54.33	30.85	7.45	24.69	55.62	74.00	-18.38	PK
H	22980.00	43.27	30.85	7.45	24.69	44.56	54.00	-9.44	AV
H	28725.00	54.74	31.02	8.99	25.57	58.28	74.00	-15.72	PK
H	28725.00	43.70	31.02	8.99	25.57	47.24	54.00	-6.76	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	54.83	30.55	5.77	24.66	54.71	74.00	-19.29	PK
V	11570.00	43.68	30.55	5.77	24.66	43.56	54.00	-10.44	AV
V	17355.00	51.75	30.33	6.32	24.55	52.29	74.00	-21.71	PK
V	17355.00	43.31	30.33	6.32	24.55	43.85	54.00	-10.15	AV
V	23140.00	53.80	30.85	7.45	24.69	55.09	74.00	-18.91	PK
V	23140.00	43.60	30.85	7.45	24.69	44.89	54.00	-9.11	AV
V	28925.00	53.35	31.02	8.99	25.57	56.89	74.00	-17.11	PK
V	28925.00	43.03	31.02	8.99	25.57	46.57	54.00	-7.43	AV
H	11570.00	50.19	30.55	5.77	24.66	50.07	74.00	-23.93	PK
H	11570.00	43.94	30.55	5.77	24.66	43.82	54.00	-10.18	AV
H	17355.00	51.07	30.33	6.32	24.55	51.61	74.00	-22.39	PK
H	17355.00	43.69	30.33	6.32	24.55	44.23	54.00	-9.77	AV
H	23140.00	51.58	30.85	7.45	24.69	52.87	74.00	-21.13	PK
H	23140.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
H	28925.00	53.15	31.02	8.99	25.57	56.69	74.00	-17.31	PK
H	28925.00	43.64	31.02	8.99	25.57	47.18	54.00	-6.82	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:5825MHz									
V	11650.00	53.43	30.55	5.77	24.66	53.31	74.00	-20.69	PK
V	11650.00	43.75	30.55	5.77	24.66	43.63	54.00	-10.37	AV
V	17475.00	52.65	30.33	6.32	24.55	53.19	74.00	-20.81	PK
V	17475.00	43.06	30.33	6.32	24.55	43.60	54.00	-10.40	AV
V	23300.00	54.56	30.85	7.45	24.69	55.85	74.00	-18.15	PK
V	23300.00	43.61	30.85	7.45	24.69	44.90	54.00	-9.10	AV
V	29125.00	51.94	31.02	8.99	25.57	55.48	74.00	-18.52	PK
V	29125.00	43.17	31.02	8.99	25.57	46.71	54.00	-7.29	AV
H	11650.00	51.81	30.55	5.77	24.66	51.69	74.00	-22.31	PK
H	11650.00	43.86	30.55	5.77	24.66	43.74	54.00	-10.26	AV
H	17475.00	50.18	30.33	6.32	24.55	50.72	74.00	-23.28	PK
H	17475.00	43.04	30.33	6.32	24.55	43.58	54.00	-10.42	AV
H	23300.00	54.57	30.85	7.45	24.69	55.86	74.00	-18.14	PK
H	23300.00	43.10	30.85	7.45	24.69	44.39	54.00	-9.61	AV
H	29125.00	52.54	31.02	8.99	25.57	56.08	74.00	-17.92	PK
H	29125.00	43.94	31.02	8.99	25.57	47.48	54.00	-6.52	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	54.32	30.55	5.77	24.66	54.20	74.00	-19.80	PK
V	11490.00	43.26	30.55	5.77	24.66	43.14	54.00	-10.86	AV
V	17235.00	52.10	30.33	6.32	24.55	52.64	74.00	-21.36	PK
V	17235.00	43.59	30.33	6.32	24.55	44.13	54.00	-9.87	AV
V	22980.00	53.46	30.85	7.45	24.69	54.75	74.00	-19.25	PK
V	22980.00	43.91	30.85	7.45	24.69	45.20	54.00	-8.80	AV
V	28725.00	53.90	31.02	8.99	25.57	57.44	74.00	-16.56	PK
V	28725.00	43.88	31.02	8.99	25.57	47.42	54.00	-6.58	AV
H	11490.00	53.72	30.55	5.77	24.66	53.60	74.00	-20.40	PK
H	11490.00	43.44	30.55	5.77	24.66	43.32	54.00	-10.68	AV
H	17235.00	51.40	30.33	6.32	24.55	51.94	74.00	-22.06	PK
H	17235.00	43.73	30.33	6.32	24.55	44.27	54.00	-9.73	AV
H	22980.00	52.69	30.85	7.45	24.69	53.98	74.00	-20.02	PK
H	22980.00	43.62	30.85	7.45	24.69	44.91	54.00	-9.09	AV
H	28725.00	53.01	31.02	8.99	25.57	56.55	74.00	-17.45	PK
H	28725.00	43.20	31.02	8.99	25.57	46.74	54.00	-7.26	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	53.27	30.55	5.77	24.66	53.15	74.00	-20.85	PK
V	11570.00	43.14	30.55	5.77	24.66	43.02	54.00	-10.98	AV
V	17355.00	52.58	30.33	6.32	24.55	53.12	74.00	-20.88	PK
V	17355.00	43.93	30.33	6.32	24.55	44.47	54.00	-9.53	AV
V	23140.00	51.22	30.85	7.45	24.69	52.51	74.00	-21.49	PK
V	23140.00	43.35	30.85	7.45	24.69	44.64	54.00	-9.36	AV
V	28925.00	53.06	31.02	8.99	25.57	56.60	74.00	-17.40	PK
V	28925.00	43.07	31.02	8.99	25.57	46.61	54.00	-7.39	AV
H	11570.00	53.36	30.55	5.77	24.66	53.24	74.00	-20.76	PK
H	11570.00	43.69	30.55	5.77	24.66	43.57	54.00	-10.43	AV
H	17355.00	51.36	30.33	6.32	24.55	51.90	74.00	-22.10	PK
H	17355.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
H	23140.00	54.57	30.85	7.45	24.69	55.86	74.00	-18.14	PK
H	23140.00	43.03	30.85	7.45	24.69	44.32	54.00	-9.68	AV
H	28925.00	53.43	31.02	8.99	25.57	56.97	74.00	-17.03	PK
H	28925.00	43.07	31.02	8.99	25.57	46.61	54.00	-7.39	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	51.52	30.55	5.77	24.66	51.40	74.00	-22.60	PK
V	11650.00	43.37	30.55	5.77	24.66	43.25	54.00	-10.75	AV
V	17475.00	53.18	30.33	6.32	24.55	53.72	74.00	-20.28	PK
V	17475.00	43.25	30.33	6.32	24.55	43.79	54.00	-10.21	AV
V	23300.00	53.78	30.85	7.45	24.69	55.07	74.00	-18.93	PK
V	23300.00	43.36	30.85	7.45	24.69	44.65	54.00	-9.35	AV
V	29125.00	54.20	31.02	8.99	25.57	57.74	74.00	-16.26	PK
V	29125.00	43.29	31.02	8.99	25.57	46.83	54.00	-7.17	AV
H	11650.00	53.13	30.55	5.77	24.66	53.01	74.00	-20.99	PK
H	11650.00	43.36	30.55	5.77	24.66	43.24	54.00	-10.76	AV
H	17475.00	52.37	30.33	6.32	24.55	52.91	74.00	-21.09	PK
H	17475.00	43.84	30.33	6.32	24.55	44.38	54.00	-9.62	AV
H	23300.00	52.59	30.85	7.45	24.69	53.88	74.00	-20.12	PK
H	23300.00	43.55	30.85	7.45	24.69	44.84	54.00	-9.16	AV
H	29125.00	51.80	31.02	8.99	25.57	55.34	74.00	-18.66	PK
H	29125.00	43.13	31.02	8.99	25.57	46.67	54.00	-7.33	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(3)

Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



5.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5.4 Unless otherwise a special operating condition is specified in the follows during the testing.




5.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 5V
Test Mode :	TX		


5.8G						
Test mode	Test Channel (MHz)	PSD (dBm/500kHz)	duty cycle Factor (dB)	Total PSD (dBm)	Limit (dBm/500kHz)	Result
802.11a	5745	-3.119	0.18	-2.939	30	Pass
	5785	-4.638	0.18	-4.458	30	Pass
	5825	-5.937	0.18	-5.757	30	Pass
802.11n20	5745	-5.152	0.18	-4.972	30	Pass
	5785	-5.957	0.18	-5.777	30	Pass
	5825	-7.021	0.18	-6.841	30	Pass
802.11ac20	5745	-4.887	0.18	-4.707	30	Pass
	5785	-6.163	0.18	-5.983	30	Pass
	5825	-7.225	0.18	-7.045	30	Pass
802.11n40	5755	-7.702	0.18	-7.522	30	Pass
	5795	-9.163	0.18	-8.983	30	Pass
802.11ac40	5755	-8.105	0.18	-7.925	30	Pass
	5795	-9.426	0.18	-9.246	30	Pass
Note: Add 10 log (1/x), where x is the duty cycle, duty cycle = 96%, so 10 log (1/0.96) = 0.18 dB.						



(802.11a) PSD plot on channel 149

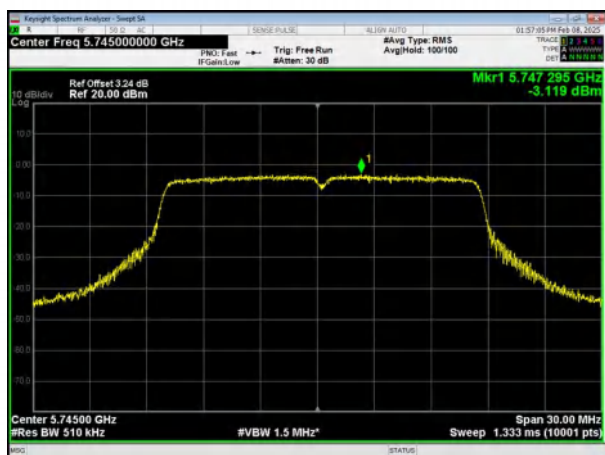

(802.11a) PSD plot on channel 157

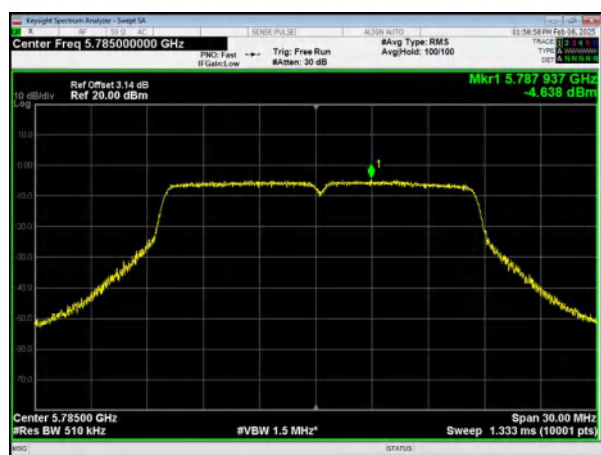


(802.11a) PSD plot on channel 165





(802.11n20) PSD plot on channel 149

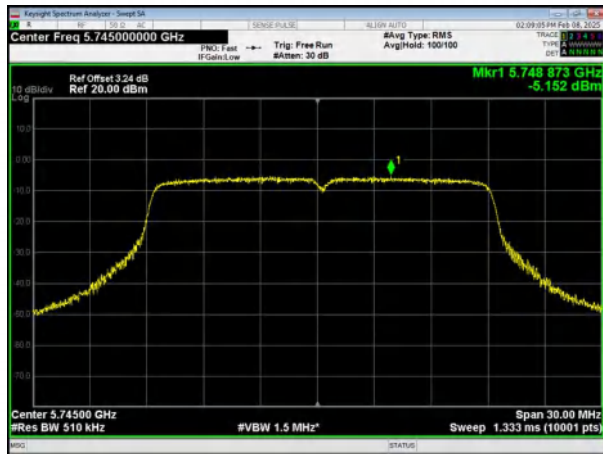

(802.11ac20) PSD plot on channel 149



(802.11n20) PSD plot on channel 157



(802.11ac20) PSD plot on channel 157



(802.11n20) PSD plot on channel 165



(802.11ac20) PSD plot on channel 165







(802.11n40) PSD plot on channel 151




(802.11ac40) PSD plot on channel 151

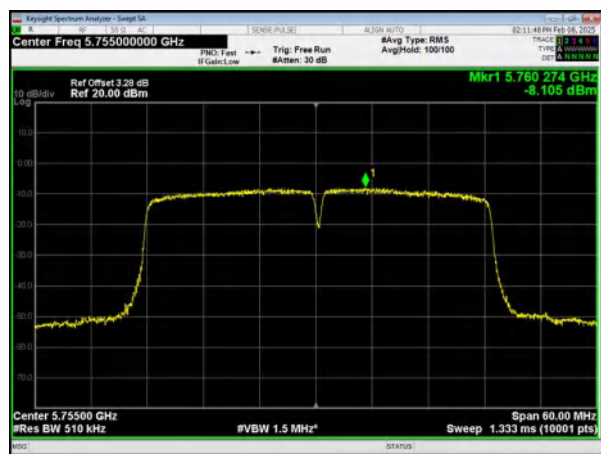

(802.11n40) PSD plot on channel 159

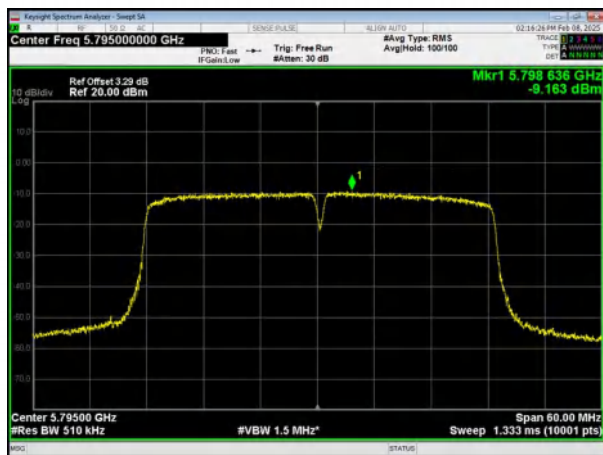

(802.11ac40) PSD plot on channel 159

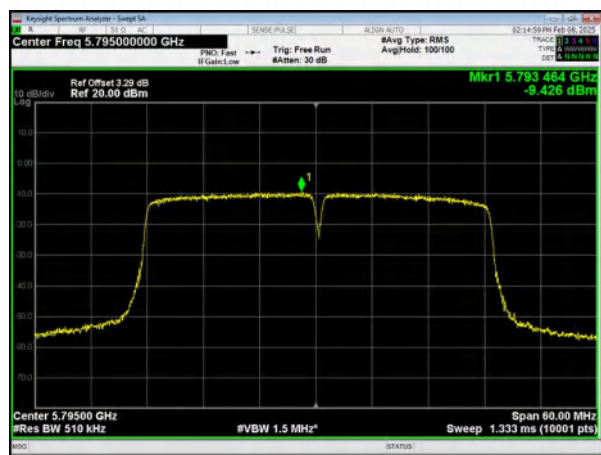



6. 6DB BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

6.2 TEST PROCEDURE

The following procedure shall be used for measuring 6dB bandwidth:

The procedure for this method is as follows:

- a) Set RBW = 100KHz.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring 26dB bandwidth:

The procedure for this method is as follows:

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.





6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 6.2 Unless otherwise a special operating condition is specified in the follows during the testing.

6.4 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX		

5.8G				
Test Mode	Test CH	6dB Bandwidth (MHz)	Limit(KHz)	Result
802.11a	Lowest	16.04	>500	Pass
	Middle	16.32		
	Highest	16.06		
802.11n20	Lowest	17.54	>500	Pass
	Middle	16.69		
	Highest	17.30		
802.11ac20	Lowest	17.05	>500	Pass
	Middle	16.90		
	Highest	17.18		
802.11n40	Lowest	35.06	>500	Pass
	Highest	35.11		
802.11ac40	Lowest	35.12	>500	Pass
	Highest	35.06		




5.8G Test plot


(802.11a) 6dB Bandwidth plot on channel 149

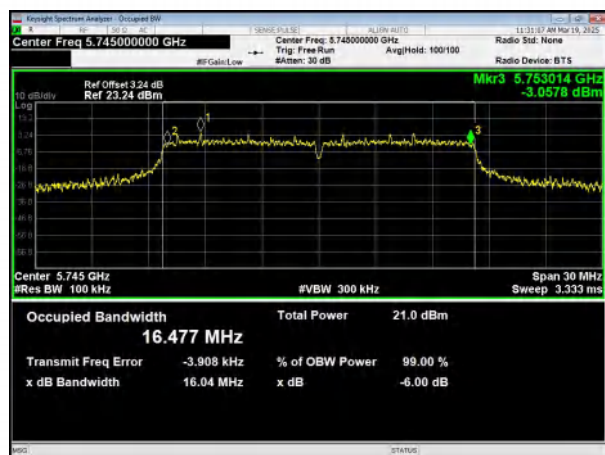

(802.11a) 6dB Bandwidth plot on channel 157

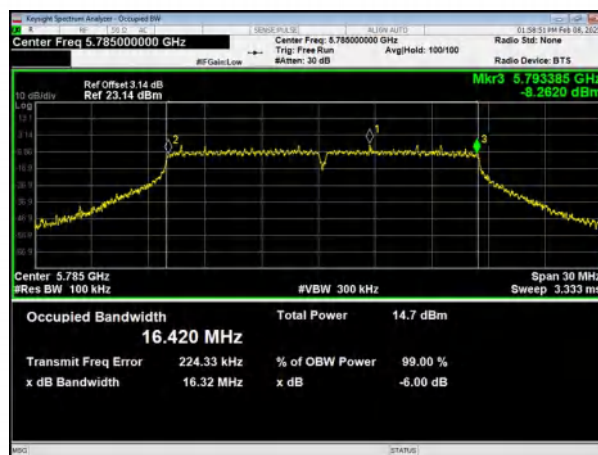


(802.11a) 6dB Bandwidth plot on channel 165

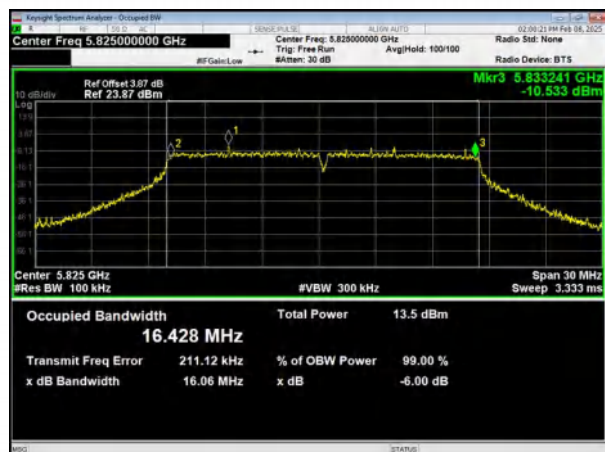


**5.8G Test plot**


(802.11n20) 6dB Bandwidth plot on channel 149

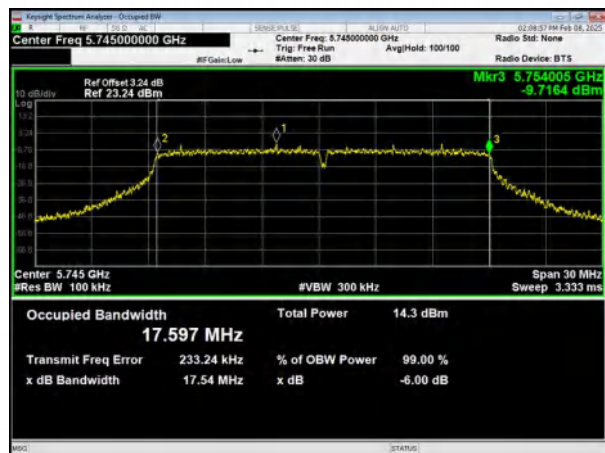


(802.11ac20) 6dB Bandwidth plot on channel 149

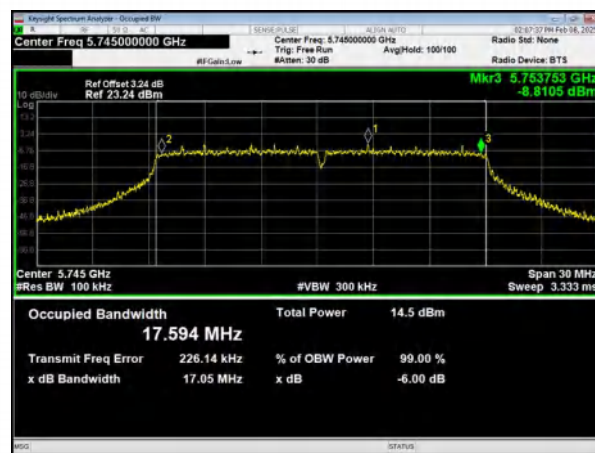

(802.11n20) 6dB Bandwidth plot on channel 157

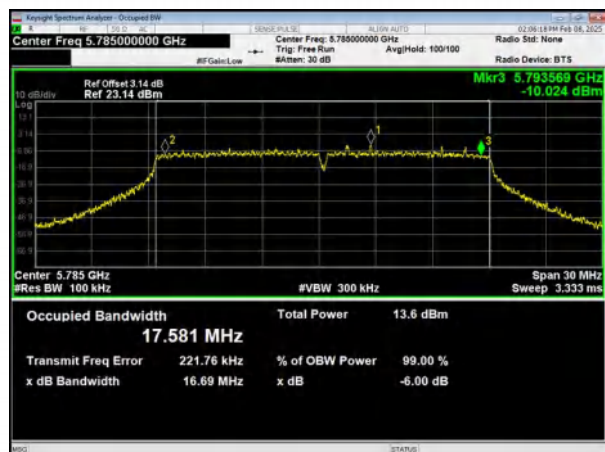

(802.11ac20) 6dB Bandwidth plot on channel 157

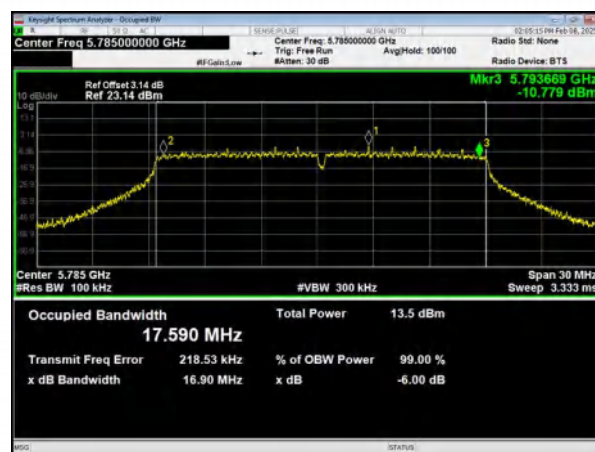

(802.11n20) 6dB Bandwidth plot on channel 165




(802.11ac20) 6dB Bandwidth plot on channel 165




**5.8G Test plot**

(802.11n40) PSD plot on channel 151

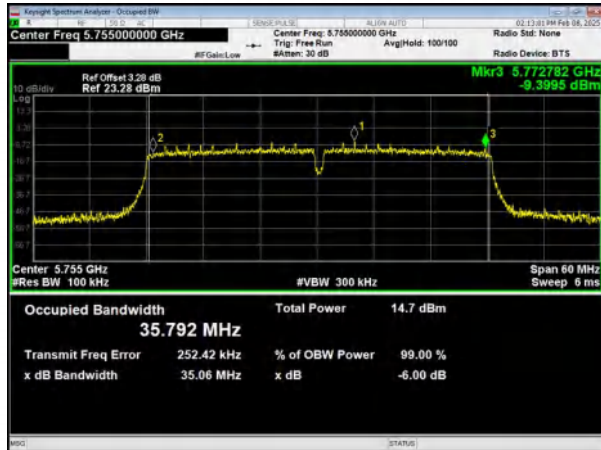

(802.11ac40) PSD plot on channel 151

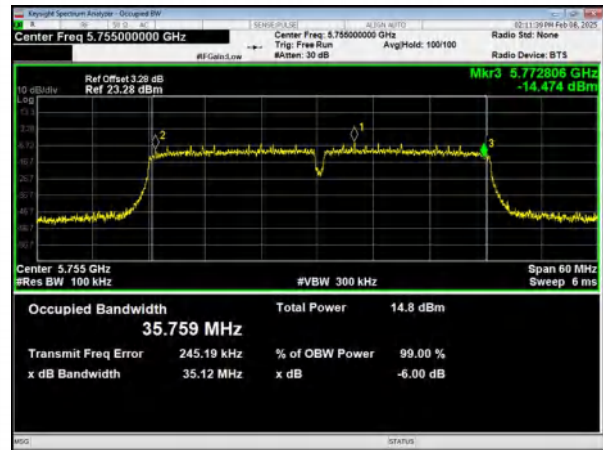

(802.11n40) PSD plot on channel 159



(802.11ac40) PSD plot on channel 159





7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

7.2 TEST PROCEDURE

The EUT was directly connected to the Power meter

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.



- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 7.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX		

802.11 a Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH149	5745	6.014	0.18	6.194	30	Pass
CH157	5785	6.003	0.18	6.183	30	Pass
CH165	5825	6.793	0.18	6.973	30	Pass
802.11 n20 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH149	5745	7.207	0.18	7.387	30	Pass
CH157	5785	6.404	0.18	6.584	30	Pass
CH165	5825	7.252	0.18	7.432	30	Pass
802.11 ac20 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH149	5745	6.877	0.18	7.057	30	Pass
CH157	5785	7.291	0.18	7.471	30	Pass
CH165	5825	6.686	0.18	6.866	30	Pass
802.11 n40 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH151	5755	7.247	0.18	7.427	30	Pass
CH159	5795	7.213	0.18	7.393	30	Pass
802.11 ac40 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH151	5755	7.244	0.18	7.424	30	Pass



CH159	5795	7.232	0.18	7.412	30	Pass
Note: Add 10 log (1/x), where x is the duty cycle, duty cycle = 96%, so 10 log (1/0.96) = 0.18dB.						

8.OUT OF BAND EMISSIONS

8.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2)

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

8.2 TEST PROCEDURE


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.3 DEVIATION FROM STANDARD

No deviation.



8.4 TEST SETUP

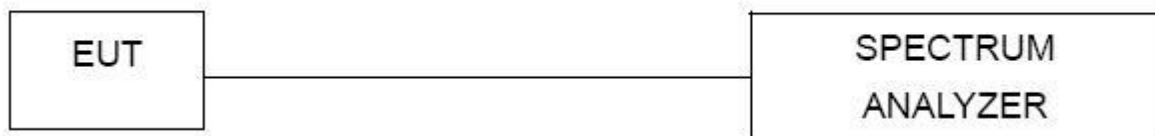

8.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 8.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test band :	5.8G	Antenna gain :	2.21 dBi

5.745~5.825 GHz

(802.11a) Band Edge, Left Side


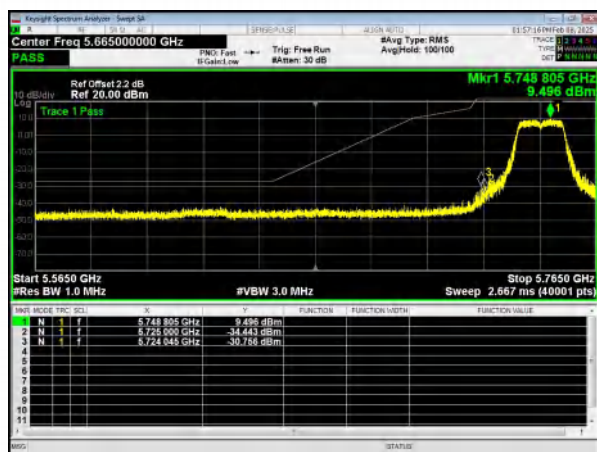


(802.11a) Band Edge, Right Side



(802.11n20) Band Edge, Left Side


(802.11n20) Band Edge, Right Side

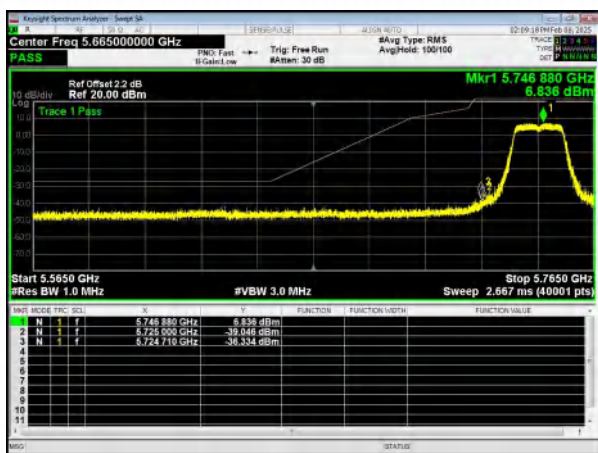

(802.11ac20) Band Edge, Left Side




(802.11ac20) Band Edge, Right Side

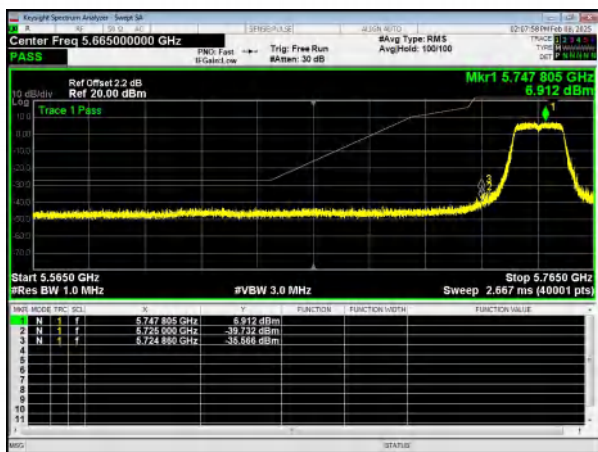

(802.11n40) Band Edge, Left Side




(802.11n40) Band Edge, Right Side

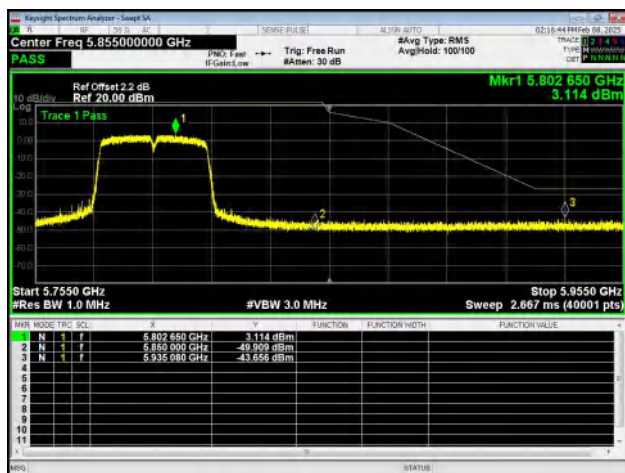




Report No.:DLE-250408008R

(802.11ac40) Band Edge, Left Side

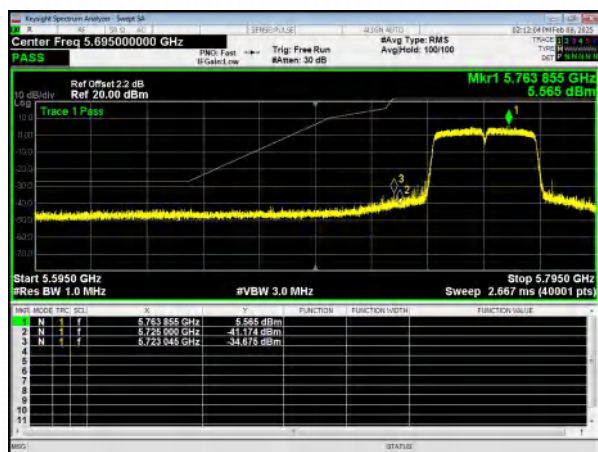

(802.11ac40) Band Edge, Right Side

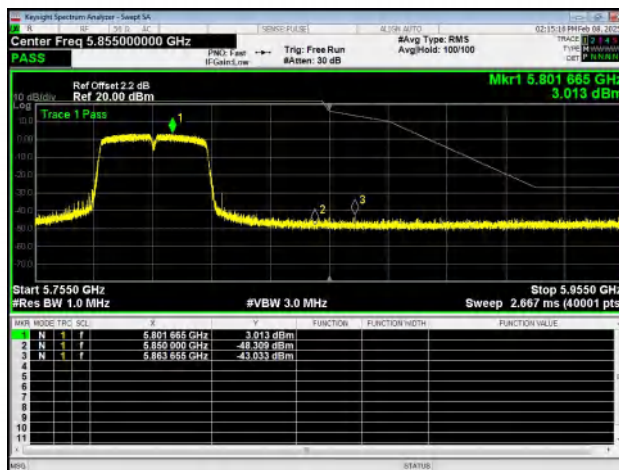



9.SPURIOUS RF CONDUCTED EMISSIONS

9.1 CONFORMANCE LIMIT

Frequency Band (MHz)	Limit
5150 - 5250	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5250 - 5350	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5470 - 5725	Outside of the 5.47-5.725 GHz band: e.i.r.p. -27 dBm
5725 - 5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

9.2 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.

9.3 TEST SETUP





9.4 TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=1MHz and VBW= 3MHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.

9.5 TEST RESULTS


Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. And above 26.5GHz of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

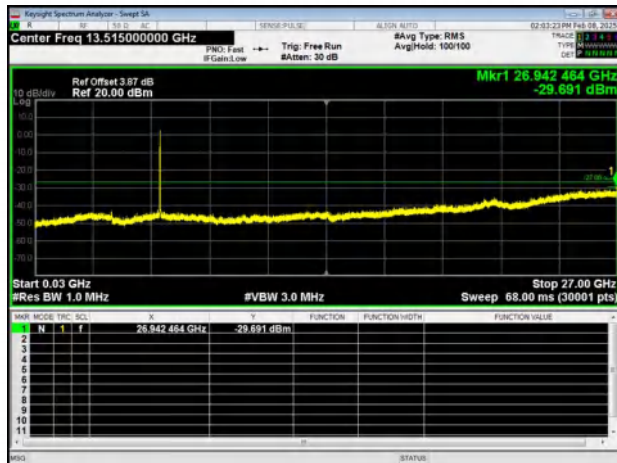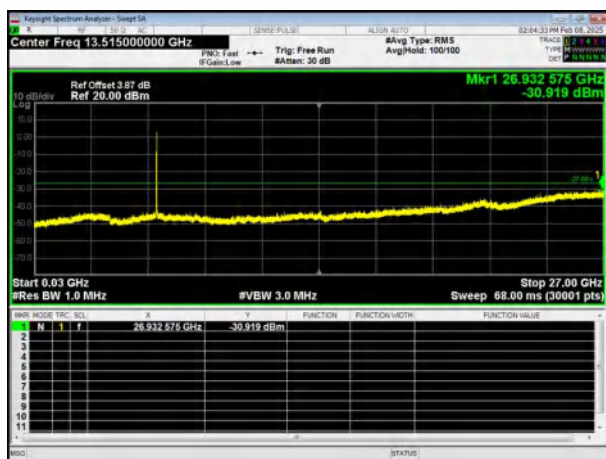




5.8G Test Plot


802.11n40 on channel 151

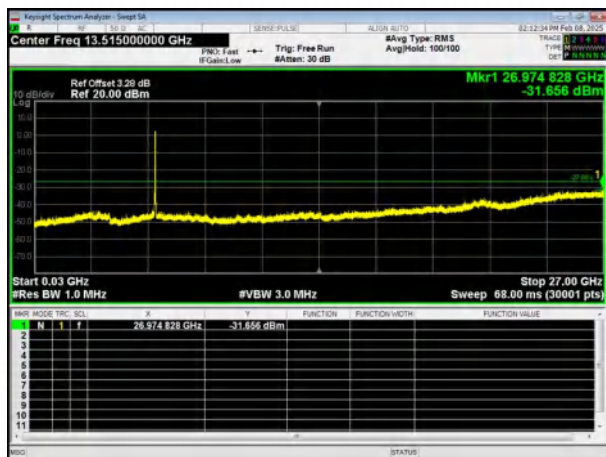


802.11ac40 on channel 159

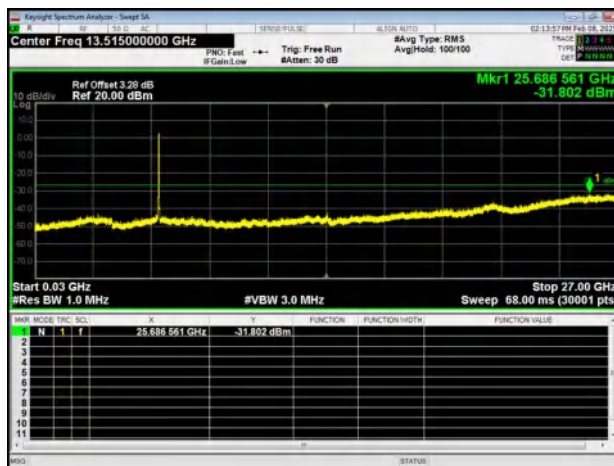

802.11n40 on channel 151

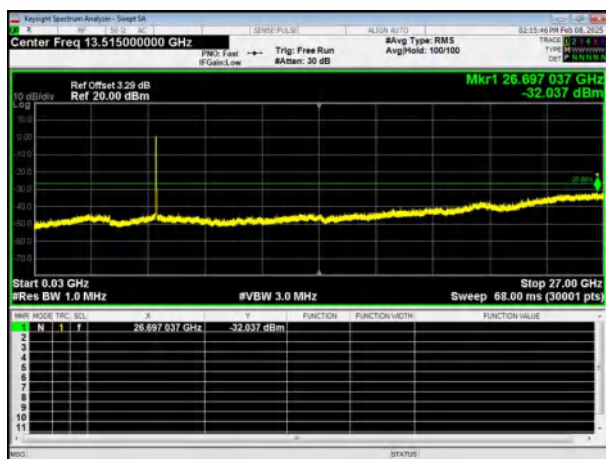

802.11ac40 on channel 159

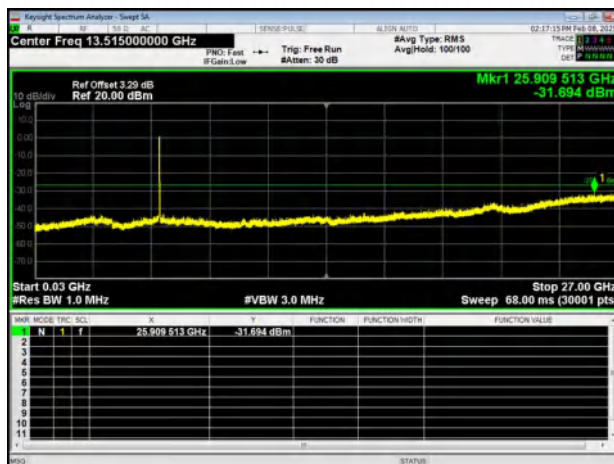



10.Frequency Stability Measurement

10.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

10.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

10.3 TEST SETUP LAYOUT



10.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

10.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX		
Note: All channels have been tested, and only the worst test data is recorded in this report.			

**5.8G:**

802.11a

Reference Frequency(Middle Channel): 5745MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	5	46	0.00849
40	5	27	0.00591
30	5	36	0.00496
20	5	23	0.00653
10	5	14	0.0034
0	5	16	0.00358
-10	5	13	0.00376
-20	5	27	0.00477
-30	5	38	0.00664

802.11n20

Reference Frequency(Middle Channel): 5745MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	5	42	0.00692
40	5	24	0.00381
30	5	32	0.00419
20	5	24	0.00581
10	5	13	0.00191
0	5	5	0.00173
-10	5	13	0.00191
-20	5	21	0.00329
-30	5	32	0.00577



802.11ac20

Reference Frequency(Middle Channel): 5745 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	5	43	0.00709
40	5	51	0.00448
30	5	23	0.00375
20	5	26	0.00515
10	5	23	0.00374
0	5	26	0.00415
-10	5	22	0.00346
-20	5	36	0.00588
-30	5	26	0.00462

802.11n40

Reference Frequency(Middle Channel): 5755MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	5	62	0.00987
40	5	54	0.00635
30	5	42	0.00759
20	5	44	0.00793
10	5	34	0.00621
0	5	32	0.00586
-10	5	34	0.00621
-20	5	42	0.00759
-30	5	51	0.00914



802.11ac40

Reference Frequency(Middle Channel): 5755MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	5	60	0.00954
40	5	55	0.00697
30	5	47	0.00679
20	5	45	0.00784
10	5	32	0.00635
0	5	26	0.0055
-10	5	38	0.00538
-20	5	43	0.00688
-30	5	54	0.00890

So, Frequency Stability Versus Input Voltage is:

802.11a

Reference Frequency(Middle Channel): 5745 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	5	46	0.00849
20	5	23	0.00653
-30	5	38	0.00664

802.11n20

Reference Frequency(Middle Channel): 5745 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	5	42	0.00692
20	5	24	0.00581
-30	5	32	0.00577



802.11ac20

Reference Frequency(Middle Channel): 5745 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	5	43	0.00709
20	5	26	0.00515
-20	5	36	0.00588

802.11n40

Reference Frequency(Middle Channel): 5755 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	5	62	0.00987
20	5	44	0.00793
-30	5	51	0.00914

802.11ac40

Reference Frequency(Middle Channel): 5755 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	5	60	0.00954
20	5	45	0.00784
-30	5	54	0.00890



11. DUTY CYCLE

11.1 APPLIED PROCEDURES / LIMIT

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

11.2 DEVIATION FROM STANDARD

No deviation.

11.3 TEST SETUP






11.4 TEST RESULTS


Mode	Frequency (MHz)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Result
802.11a	5745	98.12	0	Pass
802.11n20	5745	99	0	Pass
802.11ac20	5745	98.76	0	Pass
802.11n40	5755	98.75	0	Pass
802.11ac40	5755	98.75	0	Pass

802.11a

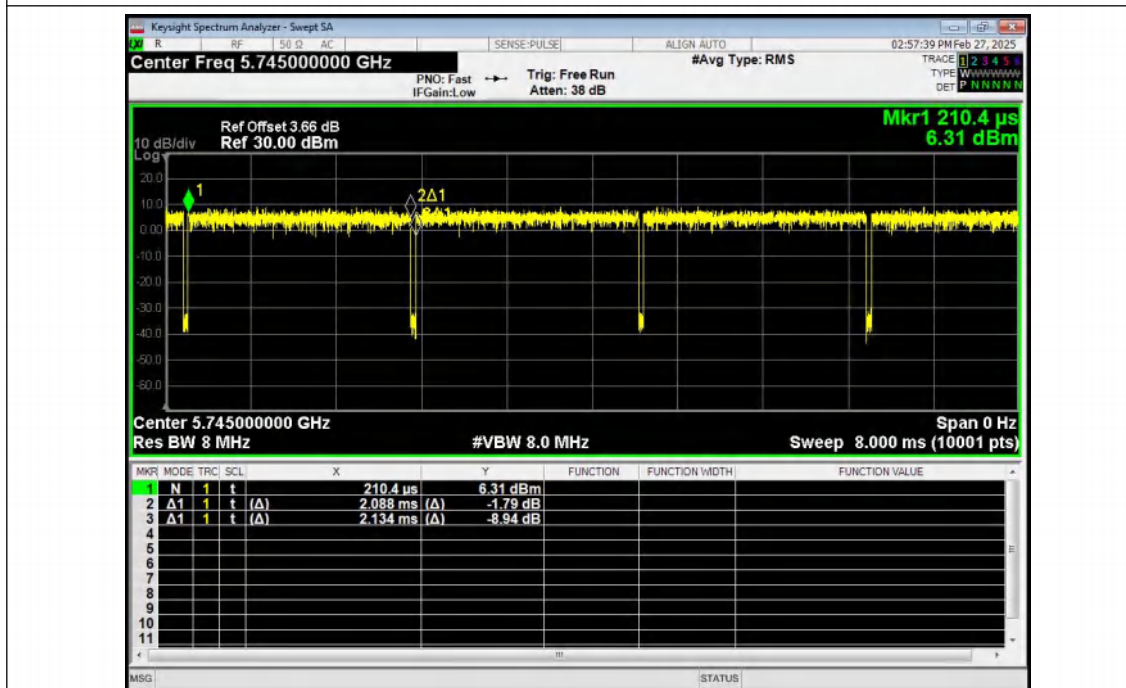




802.11n20

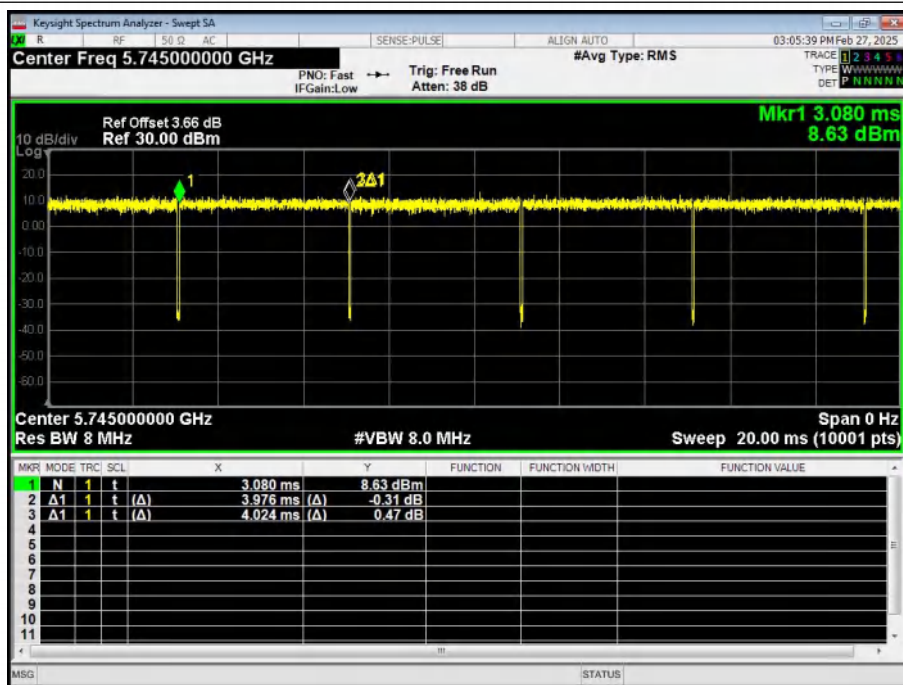


802.11ac20

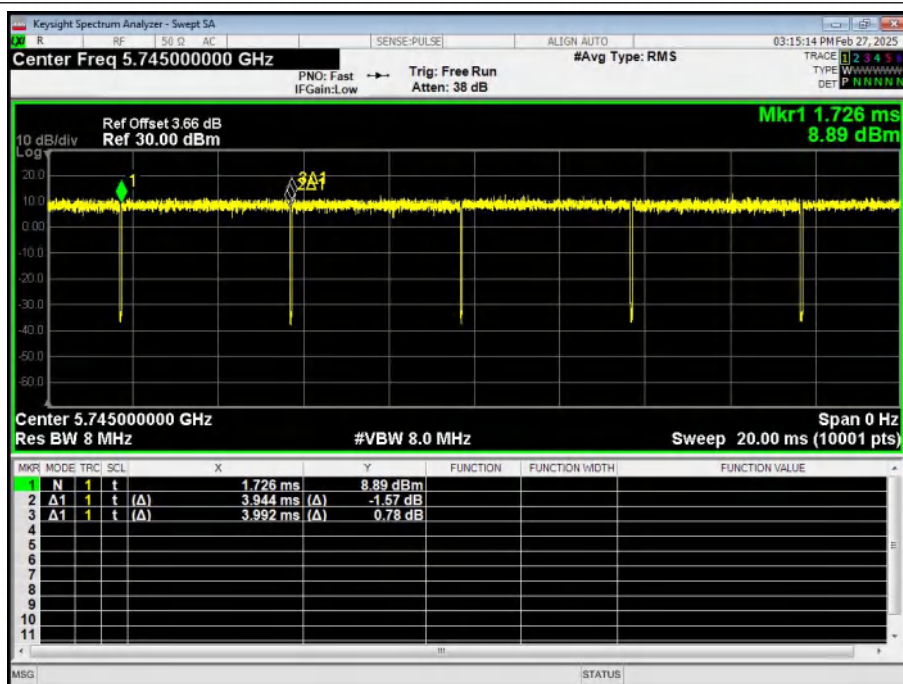




802.11n40

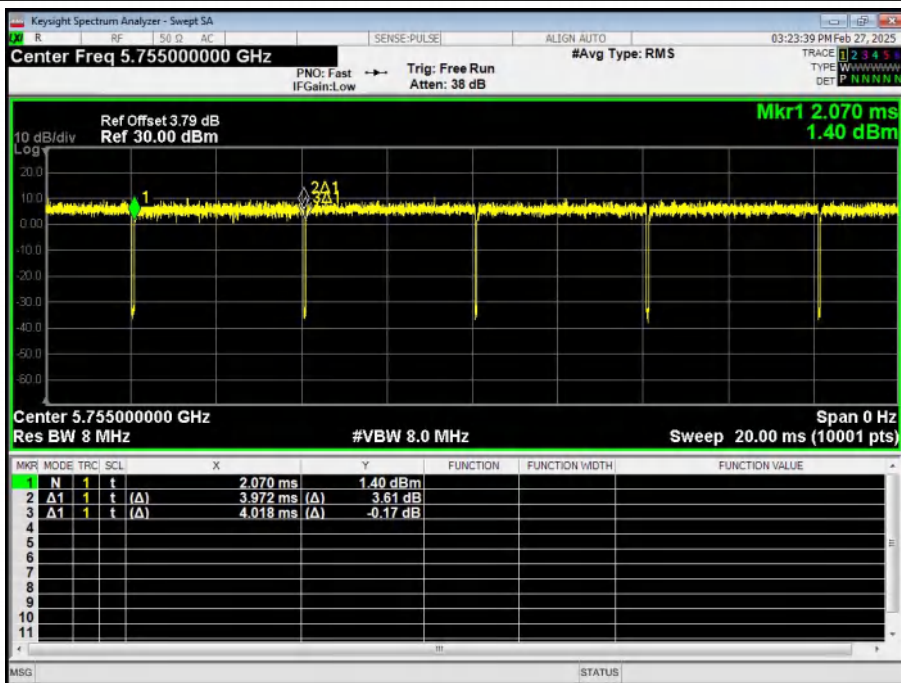

802.11ac40

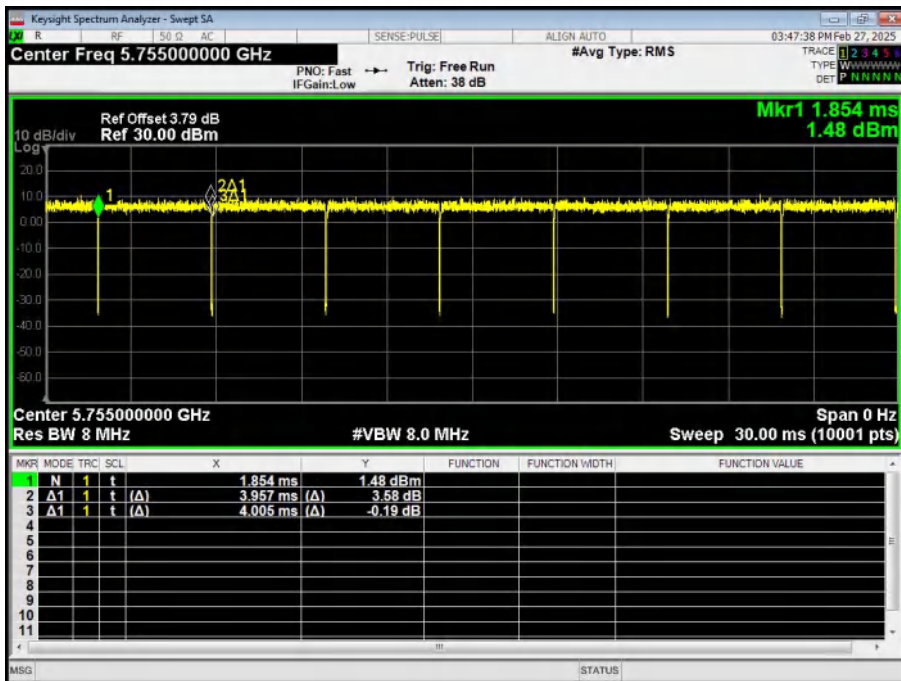

Note: All channel have been tested, and the report only reflects the worst case data.

Duty Cycle= Ton /Total*100%

Duty Cycle Correction Factor = 10log (1/Duty Cycle)

**12.ANTENNA REQUIREMENT**

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is PCB Antenna, the best case gain of the antenna is 2.21 dBi, reference to the appendix II for details	



13. TEST SETUP PHOTO

Reference to the appendix I for details.

14. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****