

RF TEST REPORT

For

SHENZHEN RUIBOSI ELECTRONIC CO.,LTD.

Product Name: Camera Test Model(s).: RBX-S87

Report Reference No. : DACE241227002RF001

FCC ID : 2BNB4-RBX-S87

Applicant's Name : SHENZHEN RUIBOSI ELECTRONIC CO.,LTD.

Address 5F, Block B, Shabian Industrial Park, Sanwei, Xixiang, Bao'an, Shenzhen,

China

Testing Laboratory : Shenzhen DACE Testing Technology Co., Ltd.

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park,

Address : Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen,

Guangdong, China

Test Specification Standard : 47 CFR Part 15.247

Date of Receipt : December 27, 2024

Date of Test : December 27, 2024 to January 7, 2025

Data of Issue : January 7, 2025

Result : Pass

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen DACE Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen DACE Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 1 of 82





00000191

Apply for company information

Applicant's Name	:	SHENZHEN RUIBOSI ELECTRONIC CO.,LTD.		
Address	:	F, Block B, Shabian Industrial Park, Sanwei, Xixiang, Bao'an, Shenzhen, China		
Product Name	:	Camera		
Test Model(s)	:	RBX-S87		
Series Model(s)		RBX-S44		
Test Specification Standard(s)	*	47 CFR Part 15.247		

NOTE1:

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:

Keren Huang

Keren Huang / Test Engineer

January 7, 2025

Supervised by:

Stone Yin / Project Engineer

January 7, 2025

Approved by:

Wehen Manager

January 7, 2025

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com

Tel: +86-755-23010613

E-mail: service@dace-lab.com

Page 2 of 82



DAG

Report No.: DACE241227002RF001

Revision History Of Report

Version	Description	REPORT No.	Issue Date
V1.0	Original	DACE241227002RF001	January 7, 2025
	1		

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 3 of 82

DAG

CONTENTS

1 T	EST SUMMARY	6
	1.1 Test Standards	
	1.2 SUMMARY OF TEST RESULT	
2 G	ENERAL INFORMATION	7
	2.1 CLIENT INFORMATION	7
	2.2 DESCRIPTION OF DEVICE (EUT)	
	2.3 DESCRIPTION OF TEST MODES	
	2.4 DESCRIPTION OF SUPPORT UNITS	
	2.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY	
	2.7 AUTHORIZATIONS	
	2.8 ANNOUNCEMENT	11
3 E	VALUATION RESULTS (EVALUATION)	12
	3.1 ANTENNA REQUIREMENT	12
	3.1.1 Conclusion:	12
4 R	ADIO SPECTRUM MATTER TEST RESULTS (RF)	13
	4.1 CONDUCTED EMISSION AT AC POWER LINE	13
	4.1.1 E.U.T. Operation:	13
	4.1.2 Test Setup Diagram:	
	4.1.3 Test Data:	
	4.2 6dB Bandwidth	
	4.2.1 E.U.T. Operation:	16
	4.2.2 Test Setup Diagram:	16
	4.2.3 Test Data:	
	4.3 MAXIMUM CONDUCTED OUTPUT POWER	
	4.3.1 E.U.T. Operation:	
	4.3.2 Test Setup Diagram:	
	4.3.3 Test Data:	
	4.4 POWER SPECTRAL DENSITY	20
	4.4.1 E.U.T. Operation: 4.4.2 Test Setup Diagram:	20
	4.4.3 Test Data:	
	4.5 EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	
	4.5.1 E.U.T. Operation:	
	4.5.1 E.0.1. Operation:	
	4.5.3 Test Data:	
	4.6 BAND EDGE EMISSIONS (RADIATED)	
	4.6.1 E.U.T. Operation:	
	4.6.2 Test Setup Diagram:	
	4.6.3 Test Data:	
	4.7 EMISSIONS IN FREQUENCY BANDS (BELOW 1GHz)	
	4.7.1 E.U.T. Operation:	
	4.7.2 Test Data:	
	4.8 EMISSIONS IN FREQUENCY BANDS (ABOVE 1GHz)	
	4.8.1 E.U.T. Operation:	
	4.8.2 Test Setup Diagram:	





DAG

DAG

4.8.3 Test Data:	34
5 TEST SETUP PHOTOS	37
6 PHOTOS OF THE EUT	39
APPENDIX	51
16DB BANDWIDTH	51
2. DUTY CYCLE	56
3. MAX. OUTPUT POWER	
4. Power Spectral Density	62

Report No.: DACE241227002RF001

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 5 of 82

DAG



1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

Report No.: DACE241227002RF001

1.2 Summary of Test Result

Item	Method	Requirement	Result
Antenna requirement	/	47 CFR 15.203	Pass
Conducted Emission at AC power line	ANSI C63.10-2020 section 6.2	47 CFR 15.207(a)	Pass
6dB Bandwidth	ANSI C63.10-2020, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	ANSI C63.10-2020, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	ANSI C63.10-2020, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	ANSI C63.10-2020 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Band edge emissions (Radiated)	ANSI C63.10-2020 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (below 1GHz)	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (above 1GHz)	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass

Note: 1.N/A -this device(EUT) is not applicable to this testing item

2. RF-conducted test results including cable loss.

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 6 of 82



GENERAL INFORMATION

2.1 Client Information

Applicant's Name SHENZHEN RUIBOSI ELECTRONIC CO.,LTD.

Address 5F, Block B, Shabian Industrial Park, Sanwei, Xixiang, Bao'an, Shenzhen,

China

SHENZHEN RUIBOSI ELECTRONIC CO.,LTD. Manufacturer

Address 5F, Block B, Shabian Industrial Park, Sanwei, Xixiang, Bao'an, Shenzhen,

China

2.2 Description of Device (EUT)

Product Name:	Camera
Sample No.:	Q241227004-1
Model/Type reference:	RBX-S87
Series Model:	RBX-S44
Model Difference:	There two models of the product is differences in the color and Shell shape of the appearance. However, the internal circuit boards, PCBs, BOMs, and other electrical structures of these models are the same, and these differences will not affect RF&EMC performance. Therefore, the selected test model is:RBX-S87.
Trade Mark:	N/A
Product Description:	Camera
Power Supply:	DC3.7V from battery; charging from type-c port.
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz;
Number of Channels:	802.11b/g/n(HT20): 11 Channels;
Modulation Type:	802.11b: DSSS(CCK, DQPSK, DBPSK); 802.11g: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n(HT20): OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type:	External Antenna
Antenna Gain:	3.0dBi
Hardware Version:	VER01
Software Version:	V1.0

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz	-	76

Note:In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 7 of 82



Test channel	Frequency (MHz)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz


2.3 Description of Test Modes

V1.0

No	Title	Description
TM1	802.11b mode	Keep the EUT in 802.11b transmitting mode at lowest, middle and highest channel.
TM2	802.11g mode	Keep the EUT in 802.11g transmitting mode at lowest, middle and highest channel.
ТМЗ	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20) transmitting mode at lowest, middle and highest channel.

- ☐ Special software is used.
- ☐ Through engineering command into the engineering mode. engineering command: *#*#3646633#*#*
- Other method:

Special software+test command



2.4 Description of Support Units

Title	Title Manufacturer		NOTE	
TF CARD	SD	16GB	Provide by Lab	
ADAPTER	PHOTON	1	Provide by Lab	

Page 8 of 82 Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com



2.5 Equipments Used During The Test

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Cable	SCHWARZ BECK	1	1	2024-03-20	2025-03-19
Pulse Limiter	SCHWARZ BECK	VTSD 9561-F Pulse limiter 10dB Attenuation	561-G071	2024-12-06	2025-12-05
50ΩCoaxial Switch	Anritsu	MP59B	M20531	1	
Test Receiver	Rohde & Schwarz	ESPI TEST RECEIVER	ID:1164.6607K 03-102109- MH	2024-06-12	2025-06-11
L.I.S.N	R&S	ESH3-Z5	831.5518.52	2023-12-12	2025-12-11
L.I.S.N	SCHWARZ BECK	NSLK 8126	05055	2024-06-14	2025-06-13
Pulse Limiter	CYBERTEK	EM5010A	/	2024-09-27	2025-09-26
EMI test software	EZ -EMC	EZ	V1.1.42	1	1

Report No.: DACE241227002RF001

6dB Bandwidth

Maximum Conducted Output Power

Power Spectral Density

Emissions in non-restricted frequency bands

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Test Software	Tachoy Information	RTS-01	V1.0.0	1	E1
Power divider	MIDEWEST	PWD-2533	SMA-79	2023-05-11	2026-05-10
RF Sensor Unit	Tachoy Information	TR1029-2	000001	1	1
Wideband radio communication tester	R&S	CMW500	113410	2024-06-12	2025-06-11
Vector Signal Generator	Keysight	N5181A	MY50143455	2024-12-06	2025-12-05
Signal Generator	Keysight	N5182A	MY48180415	2024-12-06	2025-12-05
Spectrum Analyzer	Keysight	N9020A	MY53420323	2024-12-06	2025-12-05

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 9 of 82



Band edge emissions (Radiated) Emissions in frequency bands (below 1GHz)

Emissions in frequency bands (above 1GHz)

V1.0

Emissions in requests sunus (usove 1912)									
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date				
EMI Test software	Farad	EZ -EMC	V1.1.42	1	1				
Positioning Controller	MF	MF-7802	61	1	1				
Amplifier(18-40G)	COM-POWER	AH-1840	10100008-1	2022-04-05	2025-04-04				
Horn antenna	COM-POWER	AH-1840 (18-40G)	10100008	2023-04-05	2025-04-04				
Loop antenna	ZHINAN	ZN30900C	ZN30900C	2024-06-14	2026-06-13				
Cable(LF)#2	Schwarzbeck	1	1	2024-02-19	2025-02-18				
Cable(LF)#1	Schwarzbeck	1	1	2024-02-19	2025-02-18				
Cable(HF)#2	Schwarzbeck	AK9515E	96250	2024-03-20	2025-03-19				
Cable(HF)#1	Schwarzbeck	SYV-50-3-1		2024-03-20	2025-03-19				
Power amplifier(LF)	Schwarzbeck	BBV9743	9743-151	2024-06-12	2025-06-11				
Power amplifier(HF)	Schwarzbeck	BBV9718	9718-282	2024-06-12	2025-06-11				
Wideband radio communication tester	R&S	CMW500	113410	2024-06-12	2025-06-11				
Spectrum Analyzer	R&S	FSP30	1321.3008K40 -101729-jR	2024-06-12	2025-06-11				
Test Receiver	Test Receiver R&S		1166.5950K03 -101431-Jq	2024-06-13	2025-06-12				
Horn Antenna	Sunol Sciences	DRH-118	A091114	2023-05-13	2025-05-12				
Broadband Antenna	Sunol Sciences	JB6 Antenna	A090414	2024-09-28	2026-09-27				

2.6 Statement Of The Measurement Uncertainty

Test Item	Measurement Uncertainty				
Conducted Disturbance (0.15~30MHz)	±3.41dB				
Occupied Bandwidth	±3.63%	200			
RF conducted power	±0.733dB				
RF power density	±0.234%				
Conducted Spurious emissions	±1.98dB				
Radiated Emission (Above 1GHz)	±5.46dB				
Radiated Emission (Below 1GHz)	±5.79dB				

Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 10 of 82



2.7 Authorizations

Company Name:	Shenzhen DACE Testing Technology Co., Ltd.
Address:	102, Building H1 & 1/F, Building H, Hongfa Science and Technology Park, Tangtou, Shiyan, Bao'An District, Shenzhen, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252

Report No.: DACE241227002RF001

Identification of the Responsible Testing Location

Company Name:	Shenzhen DACE Testing Technology Co., Ltd.
Address:	102, Building H1 & 1/F, Building H, Hongfa Science and Technology Park, Tangtou, Shiyan, Bao'An District, Shenzhen, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252
FCC Registration Number:	0032847402
Designation Number:	CN1342
Test Firm Registration No.:	778666
A2LA Certificate Number:	6270.01

2.8 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by DACE and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) We hereby declare that the laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant. the laboratory is not responsible for the accuracy of the information provided by the client(item 2.2). When the information provided by the customer may affect the effectiveness of the results, the responsibility lies with the customer, and the laboratory does not assume any responsibility.

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 11 of 82



3 Evaluation Results (Evaluation)

3.1 Antenna requirement

Test Requirement:

Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.1 Conclusion:



Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 12 of 82



4 Radio Spectrum Matter Test Results (RF)


4.1 Conducted Emission at AC power line

Test Requirement: Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto th AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).									
Test Limit:	Frequency of emission (MHz) Conducted limit (dBµV)								
		Quasi-peak	Average						
	0.15-0.5	66 to 56*	56 to 46*						
	0.5-5	56	46						
	5-30	60	50						
\	*Decreases with the logarithm of the frequency.								
Test Method:	ANSI C63.10-2020 section 6.2								
Procedure:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices								

4.1.1 E.U.T. Operation:

Operating Environment:										
Temperature:	23.1 °C		Humidity:	48 %	At	tmospheric Pressure:	102 kPa			
Pretest mode:		TM1			·	V				
Final test mode:		TM1								

4.1.2 Test Setup Diagram:

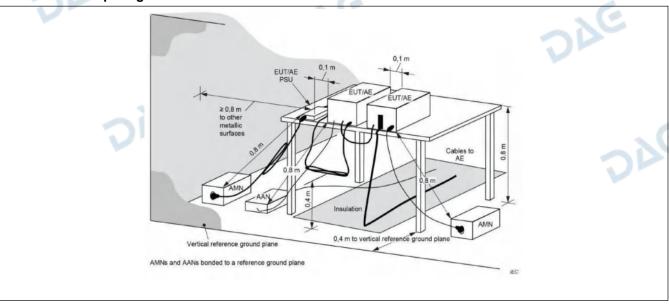


Web: http://www.dace-lab.com


Tel: +86-755-23010613

E-mail: service@dace-lab.com

Page 13 of 82

4.1.3 Test Data:



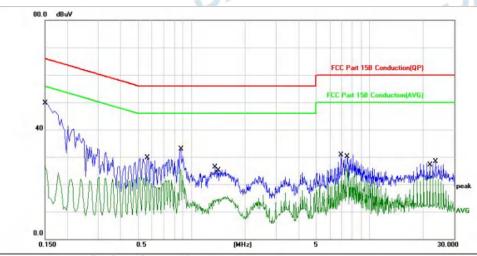


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1500	39.64	10.13	49.77	65.99	-16.22	QP	
2		0.1500	16.68	10.13	26.81	55.99	-29.18	AVG	
3		0.5660	19.56	10.09	29.65	56.00	-26.35	QP	
4		0.5660	12.52	10.09	22.61	46.00	-23.39	AVG	
5		0.8700	15.54	10.10	25.64	46.00	-20.36	AVG	
6		0.8740	22.85	10.10	32.95	56.00	-23.05	QP	
7		1.3540	16.16	10.07	26.23	56.00	-29.77	QP	
8		1.4180	4.57	10.06	14.63	46.00	-31.37	AVG	
9		6.9460	20.53	10.22	30.75	60.00	-29.25	QP	
10		7.5300	15.46	10.24	25.70	50.00	-24.30	AVG	
11		21.9180	12.24	10.63	22.87	50.00	-27.13	AVG	
12		23.6020	17.55	10.69	28.24	60.00	-31.76	QP	

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 14 of 82





TM1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 20 / CH: L

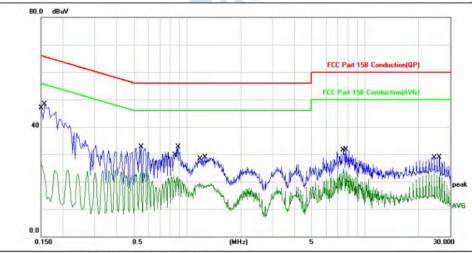

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	16.98	10.13	27.11	55.99	-28.88	AVG	
2	*	0.1580	38.21	10.13	48.34	65.56	-17.22	QP	
3		0.5460	13.24	10.09	23.33	46.00	-22.67	AVG	
4		0.5500	22.51	10.09	32.60	56.00	-23.40	QP	
5		0.8420	11.98	10.09	22.07	46.00	-23.93	AVG	
6		0.8860	22.55	10.10	32.65	56.00	-23.35	QP	
7		1.1700	9.42	10.10	19.52	46.00	-26.48	AVG	
8		1.2500	18.89	10.09	28.98	56.00	-27.02	QP	
9		7.5300	14.36	10.24	24.60	50.00	-25.40	AVG	
10		7.7460	21.51	10.24	31.75	60.00	-28.25	QP	
11		24.4540	12.15	10.72	22.87	50.00	-27.13	AVG	
12		26.1380	18.14	10.81	28.95	60.00	-31.05	QP	

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 15 of 82



4.2 6dB Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	11.8.1 Option 1 The steps for the first option are as follows: a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. b) Set the VBW ≥ [3 × RBW]. c) Detector = peak. d) Trace mode = max-hold. e) Sweep = No faster than coupled (auto) time. f) Allow the trace to stabilize. g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the "-6 dB down amplitude". If a marker is below this "-6 dB down amplitude" value, then it shall be as close as possible to this value. 11.8.2 Option 2 The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW ≥ 3 × RBW, and peak detector with
DIG	maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

Report No.: DACE241227002RF001

4.2.1 E.U.T. Operation:

Operating Environment:										
Temperature:	23.1 °C		Humidity:	48 %	Atmospheric Pressure:	102 kPa				
Pretest mode: TM1, TM2, TM			TM2, TM3		C					
Final test mode	1	TM1,	TM2, TM3		- 1/6					

4.2.2 Test Setup Diagram:

Web: http://www.dace-lab.com

Tel: +86-755-23010613

E-mail: service@dace-lab.com


Page 16 of 82



DAG

DAG



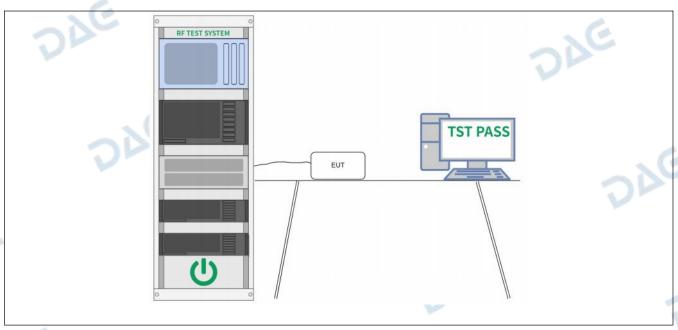

DAG

DAG

4.2.3 Test Data:

DAG

DAG

Please Refer to Appendix for Details.

DAG

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 17 of 82





4.3 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2020, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020, section 11.9.1 Maximum peak conducted output power Note: Per ANSI C63.10-2020, if there are two or more antnnas, the conducted powers at Core 0, Core 1,, Core i were first measured separately, as shown in the section above(this product olny have one antenna). The measured values were then summed in linear power units then converted back to dBm. Per ANSI C63.10-2020 Section 14.4.3.2.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used. For correlated unequal antenna gain Directional gain = 10*log[(10G1/20 + 10G2/20 + + 10GN/20)2 / NANT] dBi For completely uncorrelated unequal antenna gain Directional gain = 10*log[(10G1/10 + 10G2/10 + + 10GN/10)/ NANT] dBi Sample Multiple antennas Calculation: Core 0 + Core 1 +Core i. = MIMO/CDD (i is the number of antennas) (#VALUE! mW + mW) = #VALUE! mW = dBm
	Sample e.i.r.p. Calculation: e.i.r.p. (dBm) = Conducted Power (dBm) + Ant gain (dBi)

Report No.: DACE241227002RF001

4.3.1 E.U.T. Operation:

Operating Environment:									
Temperature:	23.1 °C		Humidity:	48 %	-	Atmospheric Pressure:	102 kPa	- 2/	
Pretest mode:		TM1,	TM2, TM3						
Final test mode:		TM1,	TM2, TM3						


4.3.2 Test Setup Diagram:

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Web: http://www.dace-lab.com
Tel: +86-755-23010613
E-mail: service@dace-lab.com
Page 18 of 82



DAG

DAG

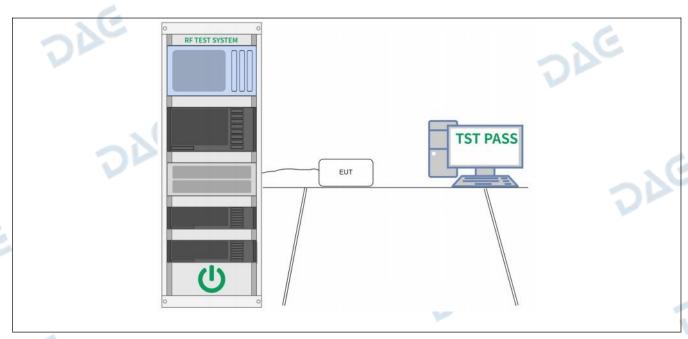

DAG

DAG

4.3.3 Test Data:

DAG

DAG

Please Refer to Appendix for Details.

DAG

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 19 of 82



4.4 Power Spectral Density


Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2020, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020, section 11.10, Maximum power spectral density level in the fundamental emission

Report No.: DACE241227002RF001

4.4.1 E.U.T. Operation:

Operating Environment:							
Temperature:	23.1 °C		Humidity:	48 %	Atmospheric Pressure:	102 kPa	
Pretest mode: TM1, TM2, TM3						•	
Final test mode: TM1, TM2, TM3							

4.4.2 Test Setup Diagram:

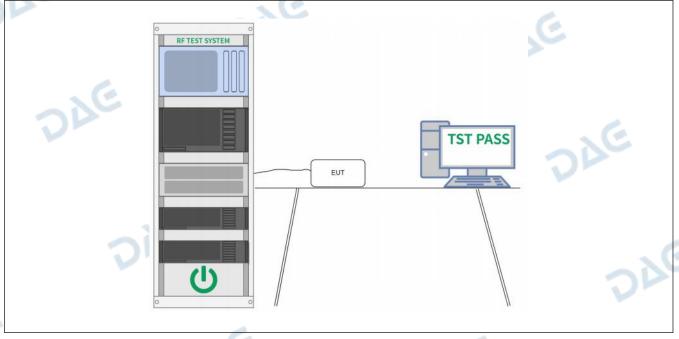

4.4.3 Test Data:

Please Refer to Appendix for Details.

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 20 of 82



4.5 Emissions in non-restricted frequency bands


Test Requirement:	47 CFR 15.247(d), 15.209, 15.205
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2020 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

Report No.: DACE241227002RF001

4.5.1 E.U.T. Operation:

Operating Environment:							
Temperature:	23.1 °C		Humidity:	48 %	Atmospheric Pressure:	102 kPa	
Pretest mode: TM1, TM2, TM3			TM2, TM3			C	
Final test mode: TM1, TM2, TM3							

4.5.2 Test Setup Diagram:

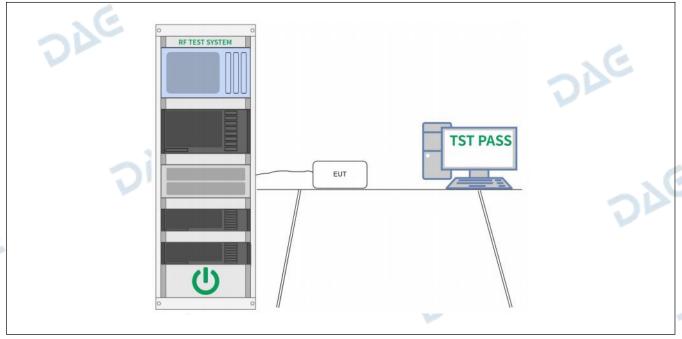

4.5.3 Test Data:

Please Refer to Appendix for Details.

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 21 of 82

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China



4.6 Band edge emissions (Radiated)


		C.	. (4					
Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).							
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)					
- 10	0.009-0.490	2400/F(kHz)	300					
DI-	0.490-1.705	24000/F(kHz)	30					
	1.705-30.0	30	30					
	30-88	100 **	3					
	88-216	150 **	3					
	216-960	200 **	3					
	Above 960	500	3					
16	** Except as provided in paragraph (g), fundamental emissions from intention radiators operating under this section shall not be located in the frequency 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation these frequency bands is permitted under other sections of this part, e.g., and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9 110–490 kHz and above 1000 MHz. Radiated emission limits in these three are based on measurements employing an average detector.							
Test Method:	ANSI C63.10-2020 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02							
Procedure:	ANSI C63.10-2020 section	6.10.5.2						

Report No.: DACE241227002RF001

4.6.1 E.U.T. Operation:

Operating Environment:							
Temperature:	23.1 °C		Humidity:	48 %	Atmo	spheric Pressure:	102 kPa
Pretest mode:		TM1,	TM2, TM3				
Final test mode:	- 3	TM1,	TM2, TM3		- (

4.6.2 Test Setup Diagram:

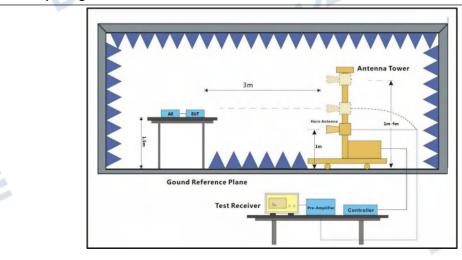


102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 22 of 82




4.6.3 Test Data:

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

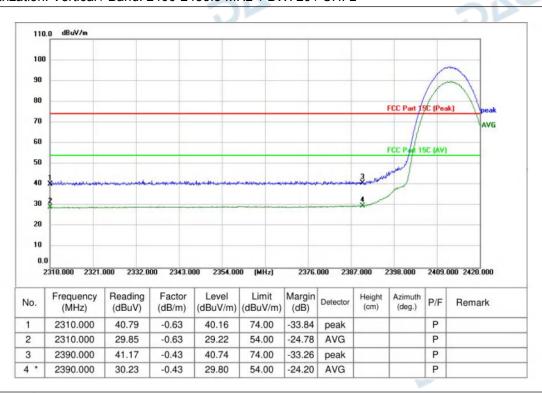

Report No.: DACE241227002RF001

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

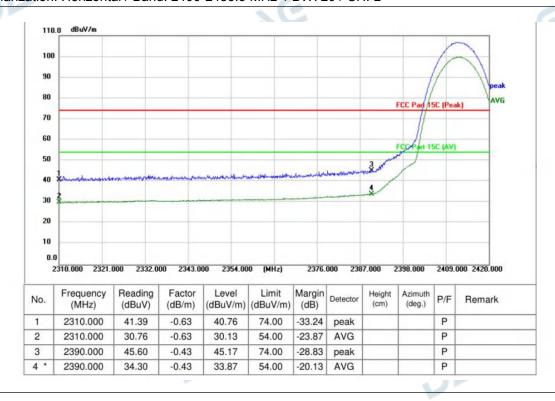

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 23 of 82

Р

Р



3

2500.000


2500.000

44.98

33.82

-0.15

-0.15

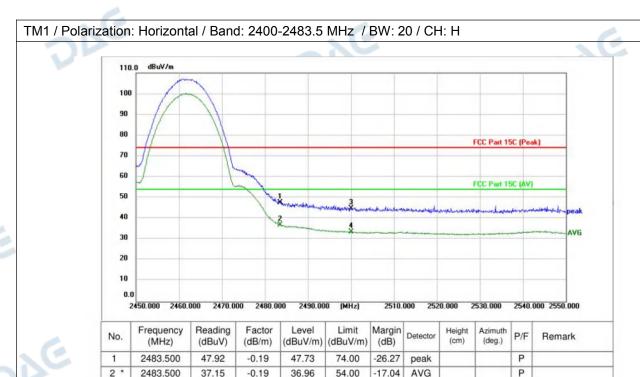

44.83

33.67

74.00

54.00

-29.17


-20.33

peak


AVG

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H dBuV/m 110.0 100 ខ្លា FCC Part 15C (Peak) 60 40 20 10 2450.000 2460.000 2470.000 2480.000 2490.000 (MHz) 2510.000 2520.000 2530.000 2540.000 2550.000 Frequency Reading Factor Level Margin Height Azimuth Detector P/F No. Remark (MHz) (dBuV) (dB/m) (dBuV/m) (dBuV/m) (dB) 42.06 -32.13 2483.500 -0.19 1 41.87 74.00 peak P Р 2 2483.500 31.89 -0.19 31.70 AVG 54.00 -22.30Р 3 2500.000 41.52 -0.1541.37 74.00 -32.63 peak Р 2500.000 30.09 -0.1529.94 54.00 -24.06 AVG



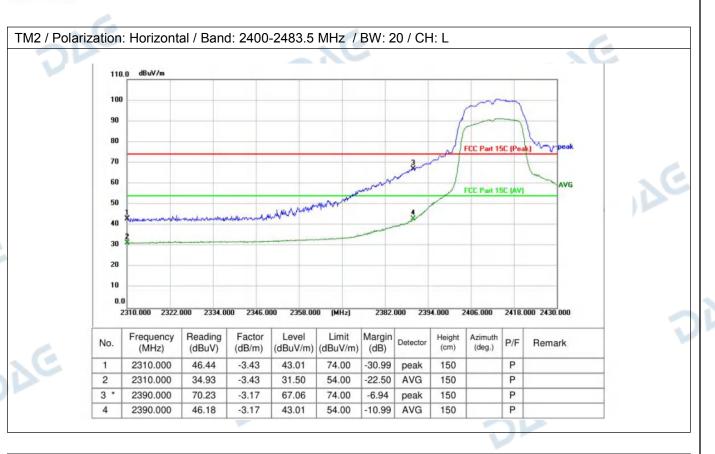



TM2 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

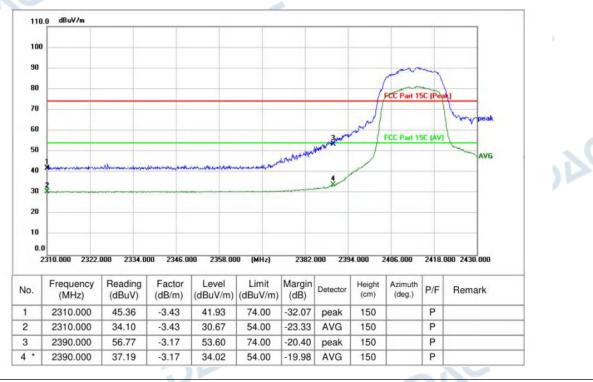

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 25 of 82



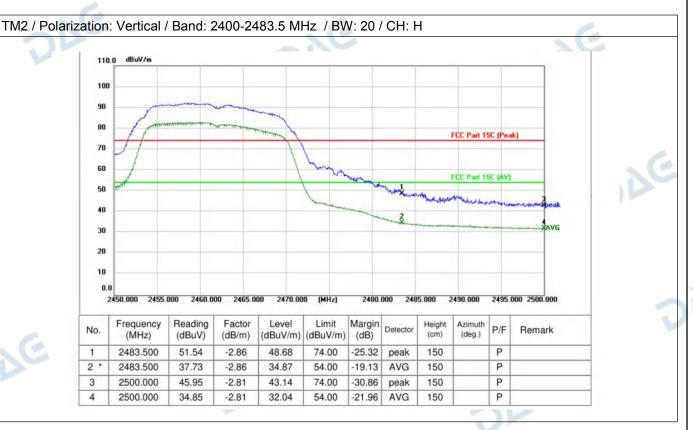

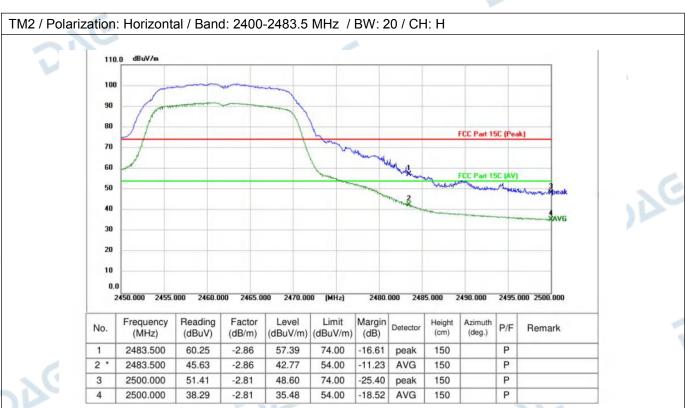

TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L 90 FCC Part 15C (Peak) 70 50 30 10 2450.000 2455.000 2460.000 2465.000 2470.000 (MHz) 2480.000 2485.000 2490.000 2495.000 2500.000 Frequency Reading Margin Factor Level Limit Height Azimuth Detector P/F Remark No. (deg.) (MHz) (dBuV/m) (dBuV/m) (cm) (dBuV) (dB/m) (dB) 2483.500 54.81 -2.86 51.95 74.00 22.05 peak 150 P

2

3

2483.500

2500.000

2500.000

38.78

45.79

35.01

2.86

-2.81

-2.81

35.92

42.98

32.20

54.00

74.00

54.00

-18.08

-31.02

-21.80

AVG

peak

150


150

150


Р

Р

Р

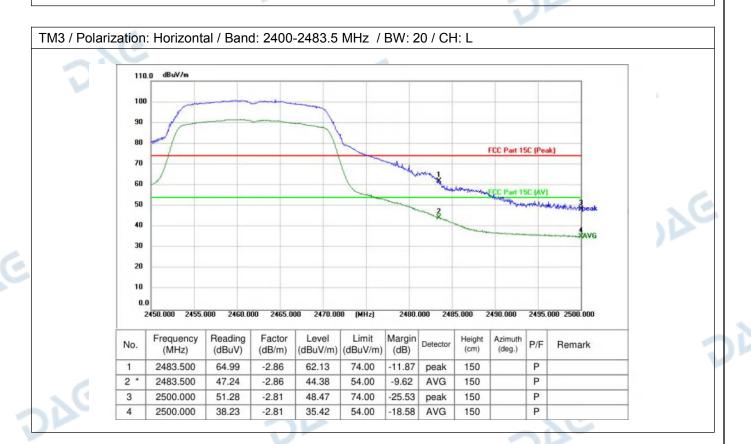



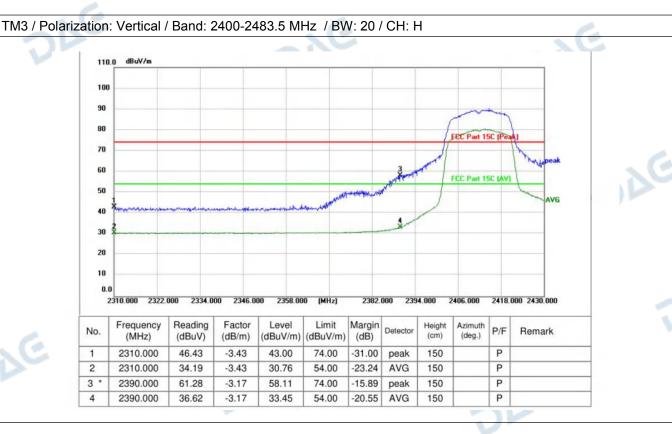

TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H dBuV/m 100 90 70 60 FCC Part 15C (AV) 30 20 10 2334.000 2346.000 2394 000 Frequency Reading Factor Level Limit Margin Height Azimuth No. Detector P/F Remark (MHz) (dBuV) (dB/m) (dBuV/m) (dBuV/m) (dB) (deg.) 2310.000 Р 46.05 -3.4342.62 74.00 -31.38 peak 150 Р 2310.000 35.11 -3.4331.68 54.00 -22.32 AVG 150 3 2390.000 P 72.82 -3.17 69.65 74.00 -4.35 150 Р 2390.000 45.64 -3.1742.47 54.00 -11.53 AVG 150

Remark:Margin=Level - Limit, Level=Test receiver reading + correction factor

The test software will only record the worst test angle and height, and only the worst case will be recorded in the test report.



DAG

4.7 Emissions in frequency bands (below 1GHz)

Test Requirement:	restricted bands, as	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).						
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)					
	0.009-0.490	2400/F(kHz)	300					
	0.490-1.705	24000/F(kHz)	30					
	1.705-30.0	30	30					
	30-88	100 **	3					
	88-216	150 **	3					
	216-960	200 **	3					
	Above 960	500	3					
	and 15.241. In the emission table The emission limits employing a CISPR 110–490 kHz and at	54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.						
Test Method:	ANSI C63.10-2020 s	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02						
	above the ground at 360 degrees to dete b. For above 1GHz, above the ground at degrees to determin c. The EUT was set which was mounted d. The antenna heig determine the maxim polarizations of the a e. For each suspect the antenna was turn below 30MHz, the a was turned from 0 d f. The test-receiver s Bandwidth with Max g. If the emission leving specified, then testim reported. Otherwise tested one by one us reported in a data sh h. Test the EUT in the	a 3 or 10 meter semi-anecemine the position of the higher the EUT was placed on the a 3 meter fully-anechoic of the the position of the highes 3 or 10 meters away from to on the top of a variable-height is varied from one meter num value of the field strengantenna are set to make the ed emission, the EUT was attended to heights from 1 meter num was tuned to height egrees to 360 degrees to fix system was set to Peak Definum Hold Mode. Wel of the EUT in peak mode and could be stopped and the the emissions that did not lesing peak, quasi-peak or aveneet.	top of a rotating table 1.5 meters namber. The table was rotated 360 tradiation. The interference-receiving antenna, ight antenna tower. To four meters above the ground to gth. Both horizontal and vertical emeasurement. For the test frequency of a meter) and the rotatable table and the maximum reading. The was 10dB lower than the limit e peak values of the EUT would be have 10dB margin would be reverage method as specified and their le channel, the Highest channel.					
	 i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete. Remark: 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report. 							

Report No.: DACE241227002RF001

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 29 of 82



2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Final Test Level =Receiver Reading + Antenna Factor + Cable Factor "C Preamplifier Factor


Report No.: DACE241227002RF001

3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.


4.7.1 E.U.T. Operation:

Operating Environment:								
Temperature: 23.1 °C Humidity: 48 % Atmospheric Pressure: 102 kPa								
Pretest mode: TM1, TM2, TM3								
Final test mode: TM1						1 C		

4.7.2 Test Data:

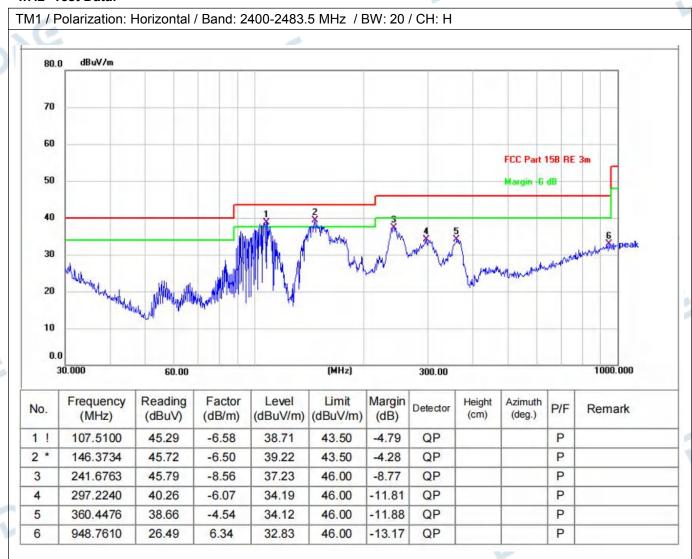

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 30 of 82

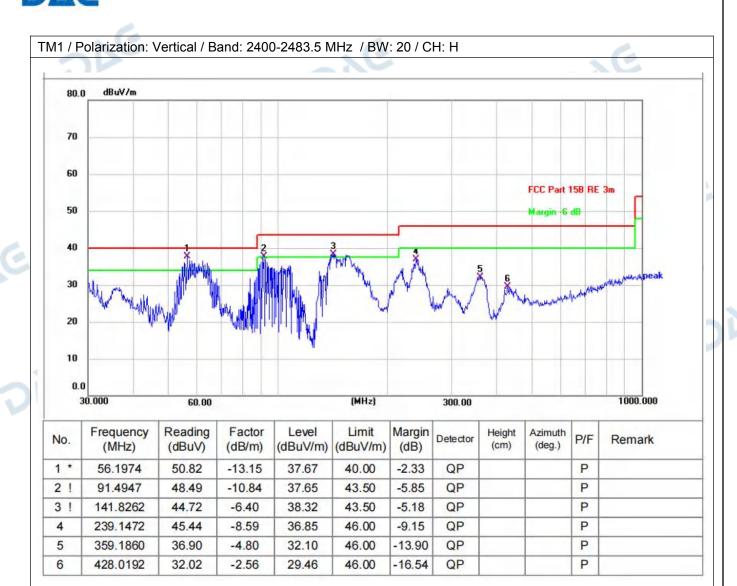

Remark:Margin=Level - Limit, Level=Test receiver reading + correction factor

The test software will only record the worst test angle and height, and only the worst case will be recorded in the test report.

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 31 of 82



DAG

4.8 Emissions in frequency bands (above 1GHz)

Test Requirement:	15.205(a), must also c	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).							
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)						
	0.009-0.490	2400/F(kHz)	300						
	0.490-1.705	24000/F(kHz)	30						
	1.705-30.0	30	30						
	30-88	100 **	3						
	88-216	150 **	3						
	216-960	200 **	3						
	Above 960	500	3						
	54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.								
Test Method:	ANSI C63.10-2020 sec	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02							
Procedure:	above the ground at a 360 degrees to determ b. For above 1GHz, the above the ground at a degrees to determine to. The EUT was set 3 which was mounted or d. The antenna height determine the maximu polarizations of the ante. For each suspected the antenna was tuned below 30MHz, the ante was turned from 0 deg f. The test-receiver sys Bandwidth with Maxim g. If the emission level specified, then testing reported. Otherwise th tested one by one usin reported in a data sheeh. Test the EUT in the i. The radiation measu	3 or 10 meter semi-aneoline the position of the higher EUT was placed on the 3 meter fully-anechoic chapsition of the highest or 10 meters away from the top of a variable-height varied from one meter mover value of the field strengtenna are set to make the emission, the EUT was at to heights from 1 meter tenna was tuned to heights rees to 360 degrees to firstem was set to Peak Detum Hold Mode. of the EUT in peak mode could be stopped and the emissions that did not be emissions that did not be greak, quasi-peak or avet.	top of a rotating table 1.5 meters namber. The table was rotated 360 t radiation. he interference-receiving antenna, ght antenna tower. to four meters above the ground to gth. Both horizontal and vertical						
	Remark: 1) For emission below	·	found the worst case is the lowest						

Report No.: DACE241227002RF001

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 32 of 82



2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Final Test Level =Receiver Reading + Antenna Factor + Cable Factor "C Preamplifier Factor


Report No.: DACE241227002RF001

3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.

4.8.1 E.U.T. Operation:

Operating Environment:								
Temperature: 23.1 °C Humidity: 48 % Atmospheric Pressure: 102 kPa								
Pretest mode: TM1, TM2,			TM2, TM3					
Final test mode:	1	TM1				· (e		

4.8.2 Test Setup Diagram:

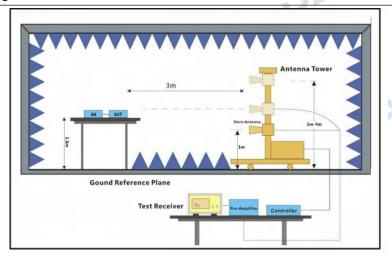


Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 33 of 82




4.8.3 Test Data:

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

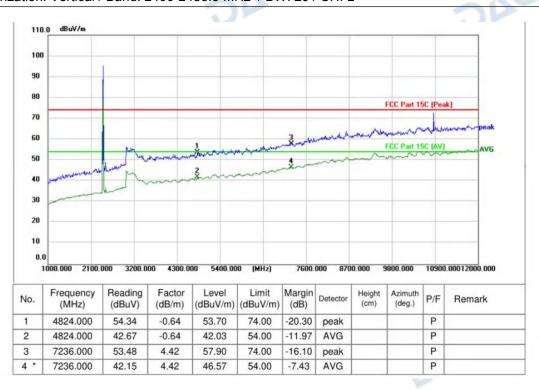



Report No.: DACE241227002RF001

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

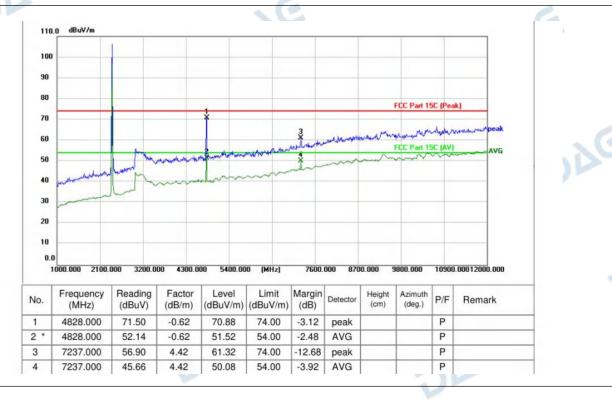





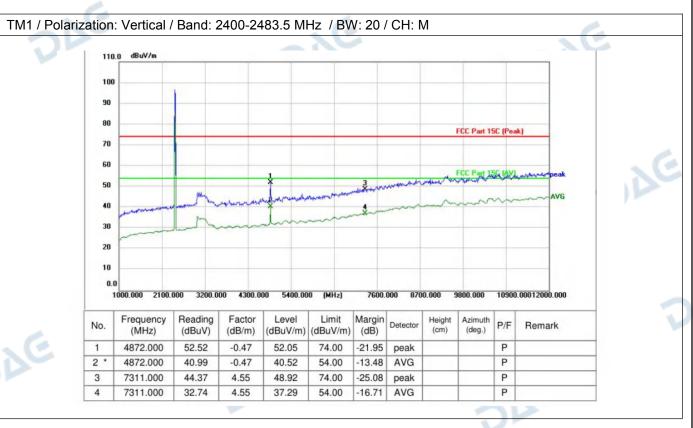

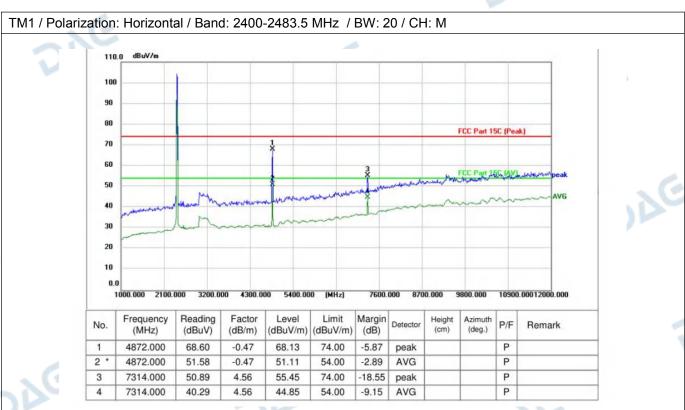



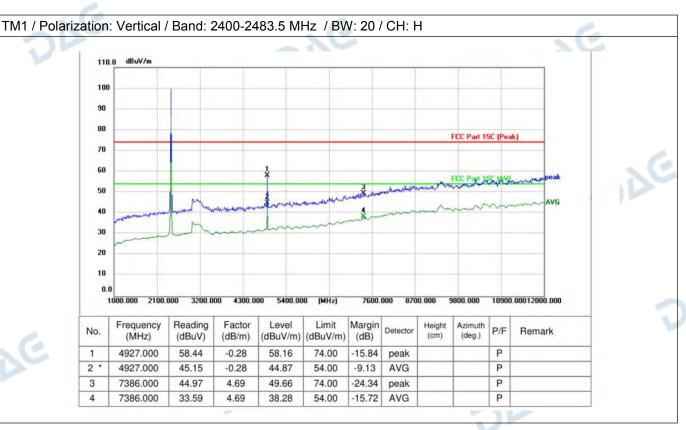

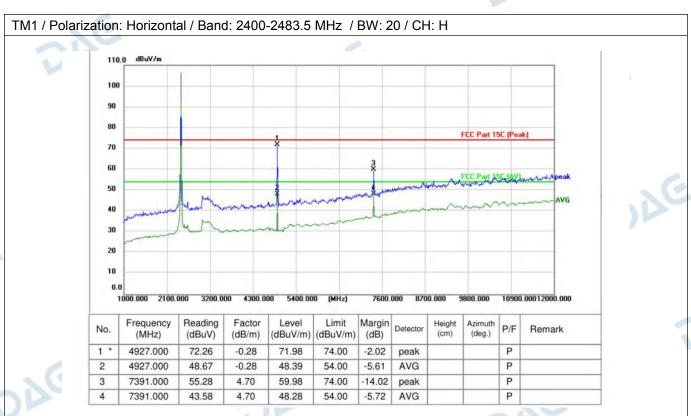

Remark:Margin=Level - Limit, Level=Test receiver reading + correction factor

The test software will only record the worst test angle and height, and only the worst case will be recorded in the test report.



5 TEST SETUP PHOTOS






Band edge emissions (Radiated)
Emissions in frequency bands (above 1GHz)



Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 37 of 82






DAG

DAG

DAG



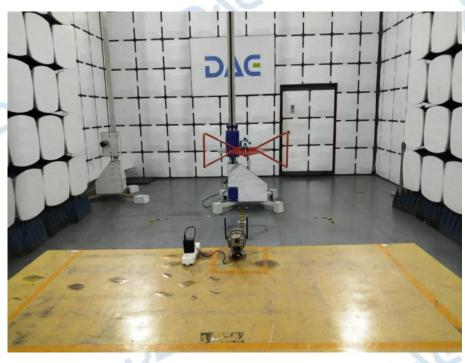

DAG

DAG

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 38 of 82



Report No.: DACE241227002RF001

PHOTOS OF THE EUT

External





Page 39 of 82 Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com







102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com

Tel: +86-755-23010613

E-mail: service@dace-lab.com

Page 40 of 82










Report No.: DACE241227002RF001



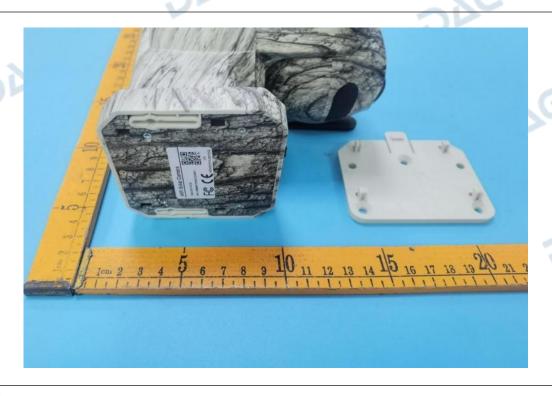

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com

Tel: +86-755-23010613

E-mail: service@dace-lab.com

Page 42 of 82







102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com

Tel: +86-755-23010613

E-mail: service@dace-lab.com


Page 43 of 82



Report No.: DACE241227002RF001





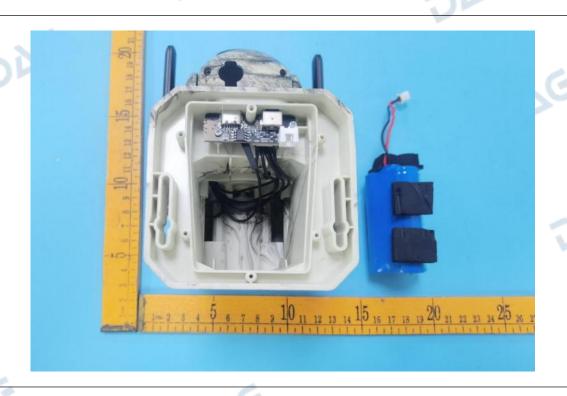

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com

Tel: +86-755-23010613

E-mail: service@dace-lab.com

Page 44 of 82









102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com

Tel: +86-755-23010613


E-mail: service@dace-lab.com

Page 45 of 82







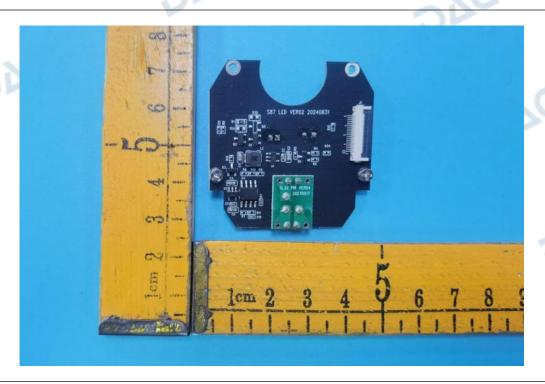

Web: http://www.dace-lab.com

Tel: +86-755-23010613

E-mail: service@dace-lab.com

Page 46 of 82

Report No.: DACE241227002RF001



V1.0





102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China


Web: http://www.dace-lab.com


Tel: +86-755-23010613

E-mail: service@dace-lab.com


Page 47 of 82



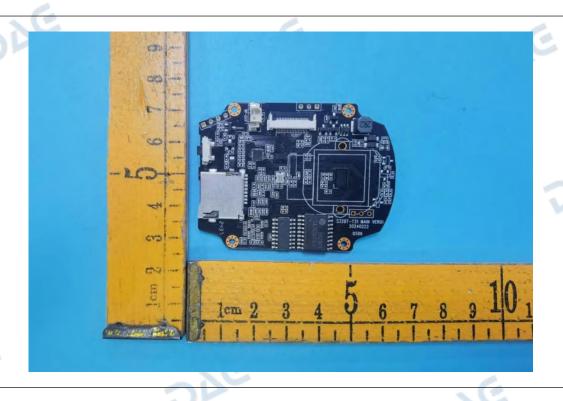

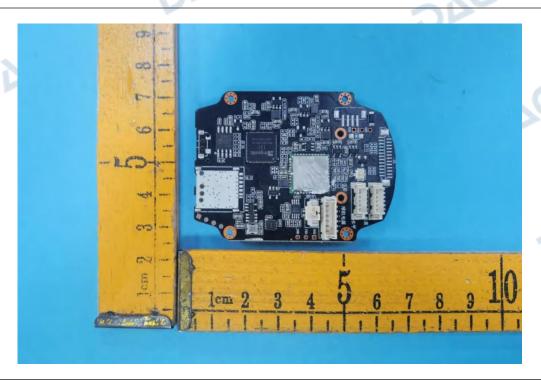


Tel: +86-755-23010613 Page 48 of 82 Web: http://www.dace-lab.com E-mail: service@dace-lab.com








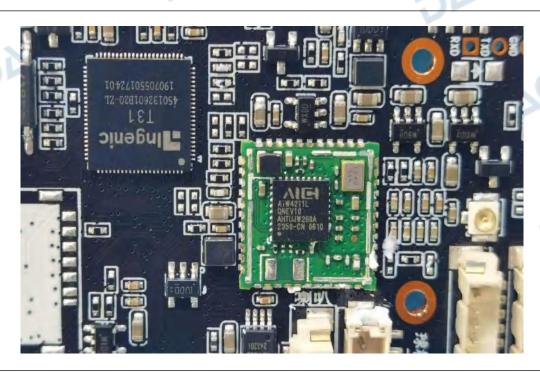


102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 49 of 82



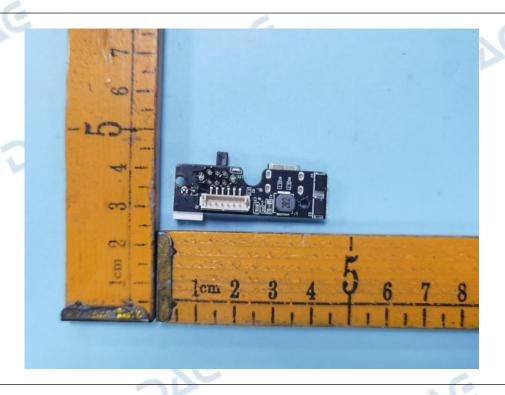

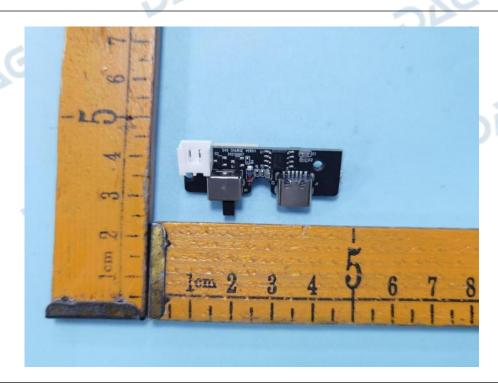

102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Web: http://www.dace-lab.com

Tel: +86-755-23010613

E-mail: service@dace-lab.com

Page 50 of 82




Appendix

1. -6dB Bandwidth


V1.0

Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT1	802.11b	2412.00	10.34	500	Pass
NVNT	ANT1	802.11b	2437.00	10.34	500	Pass
NVNT	ANT1	802.11b	2462.00	10.34	500	Pass
NVNT	ANT1	802.11g	2412.00	16.34	500	Pass
NVNT	ANT1	802.11g	2437.00	16.34	500	Pass
NVNT	ANT1	802.11g	2462.00	16.34	500	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	17.61	500	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	17.61	500	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	17.60	500	Pass

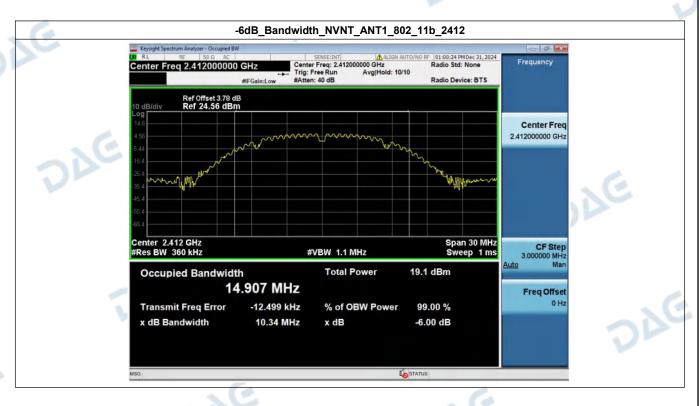

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 51 of 82



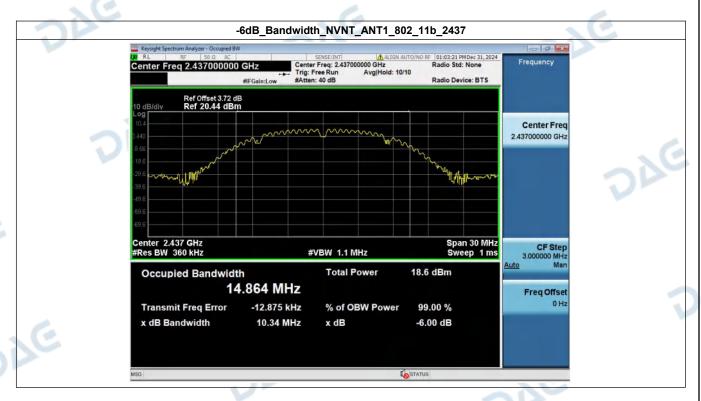



102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China


Web: http://www.dace-lab.com


Tel: +86-755-23010613

E-mail: service@dace-lab.com

Page 52 of 82




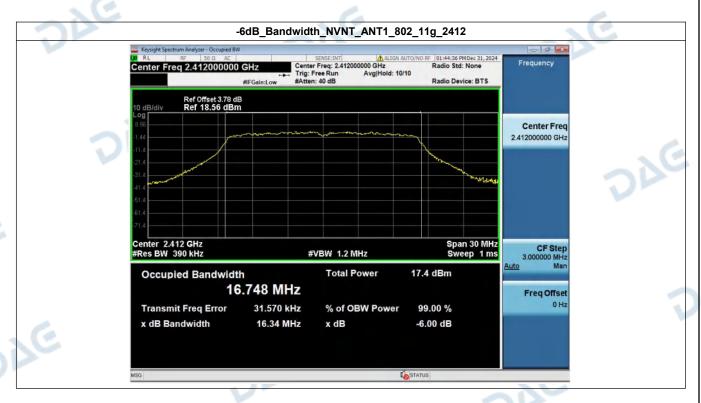


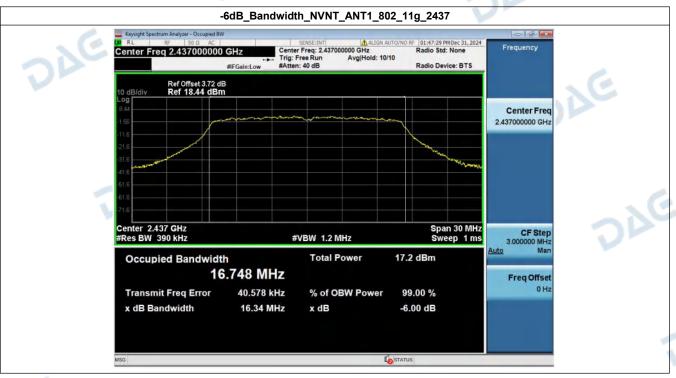

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 53 of 82




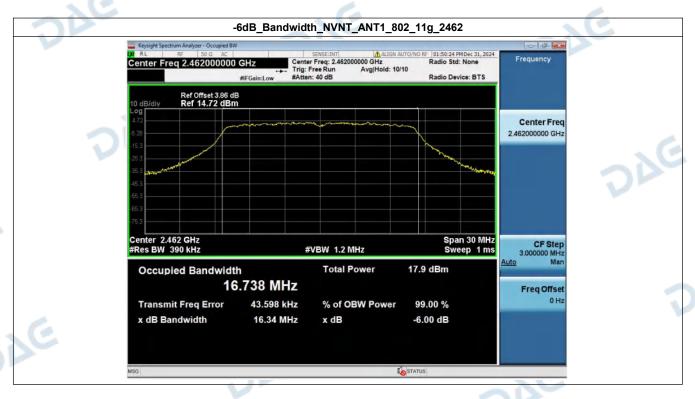

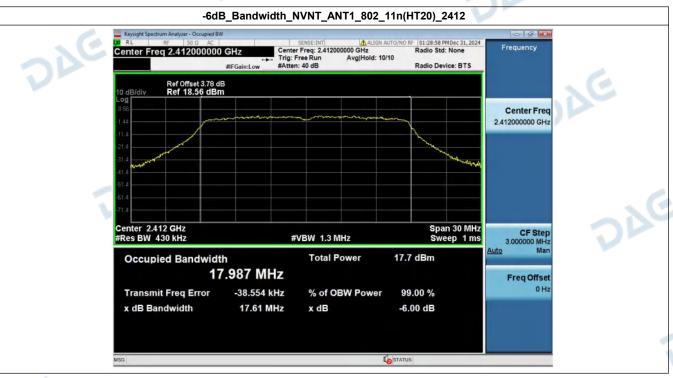

Web: http://www.dace-lab.com



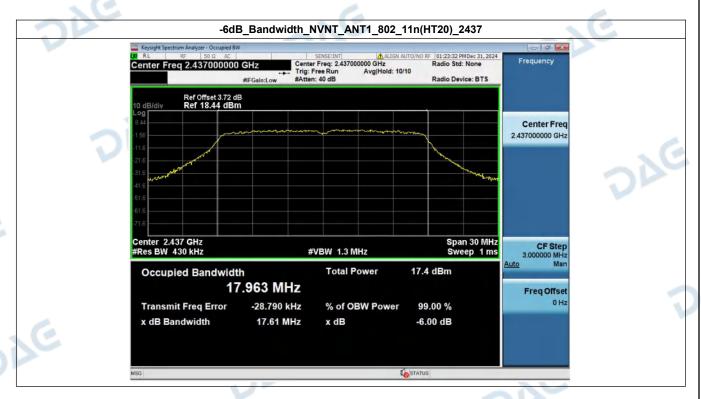




Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 55 of 82



Report No.: DACE241227002RF001


Duty Cycle


Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty factor(dB)
NVNT	ANT1	802.11b	2412.00	94.48	0.25
NVNT	ANT1	802.11b	2437.00	94.48	0.25
NVNT	ANT1	802.11b	2462.00	94.48	0.25
NVNT	ANT1	802.11g	2412.00	74.19	1.30
NVNT	ANT1	802.11g	2437.00	74.19	1.30
NVNT	ANT1	802.11g	2462.00	73.12	1.36
NVNT	ANT1	802.11n(HT20)	2412.00	71.91	1.43
NVNT	ANT1	802.11n(HT20)	2437.00	71.91	1.43
NVNT	ANT1	802.11n(HT20)	2462.00	71.91	1.43

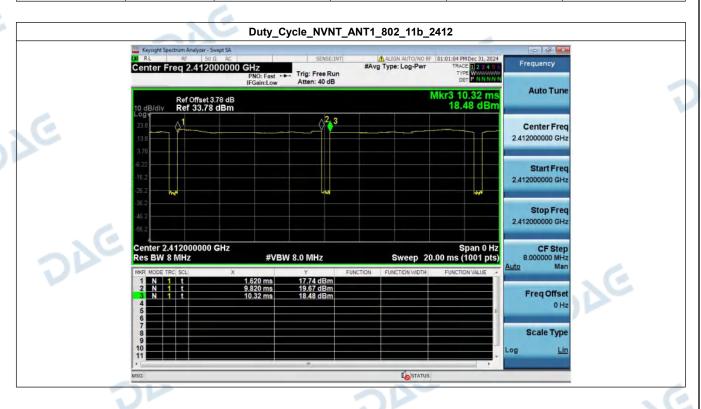


Tel: +86-755-23010613 Page 56 of 82 Web: http://www.dace-lab.com E-mail: service@dace-lab.com




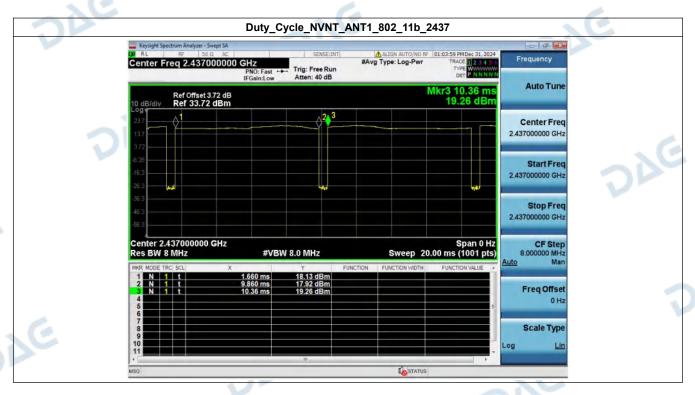

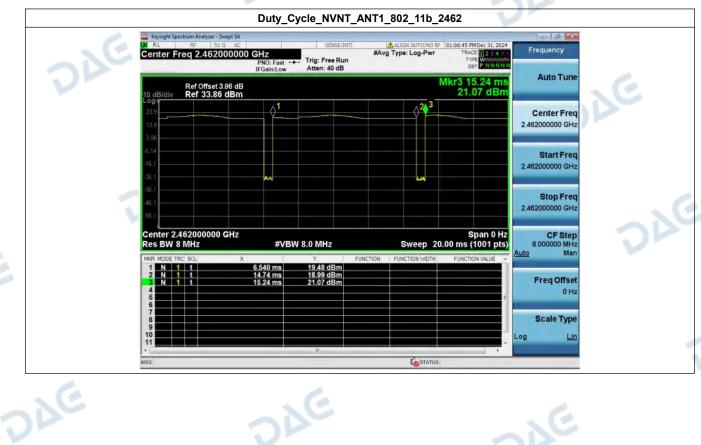





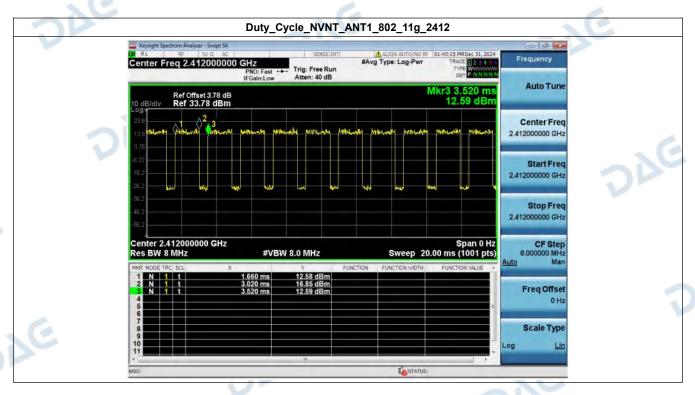

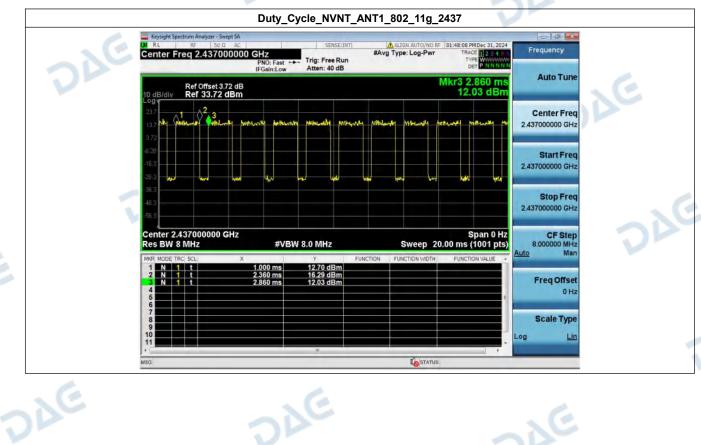





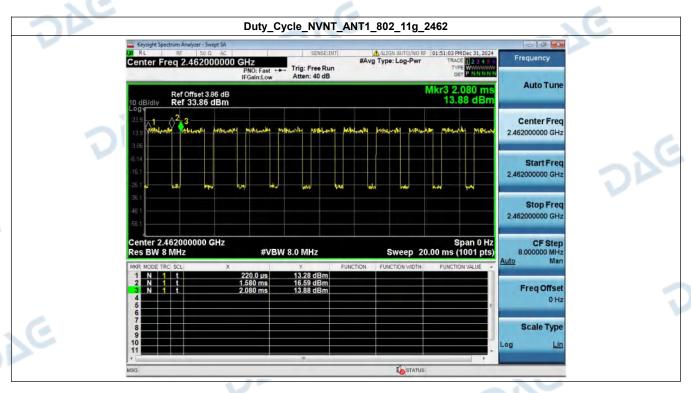

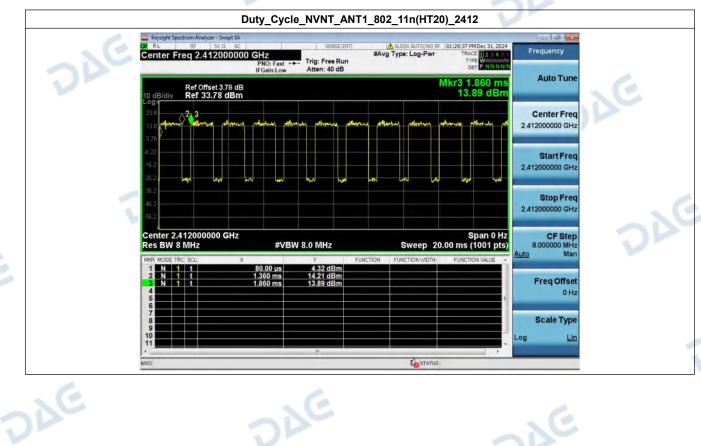



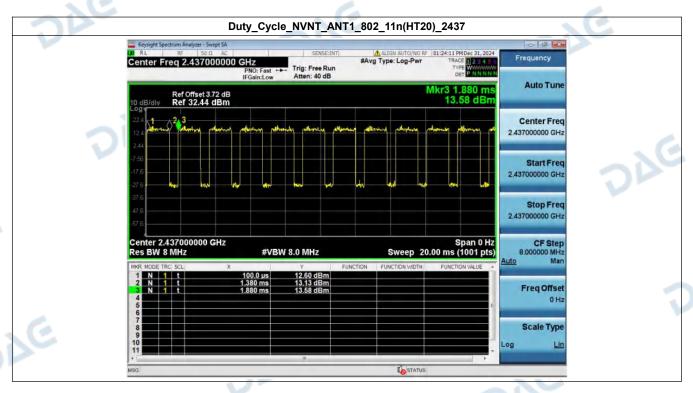

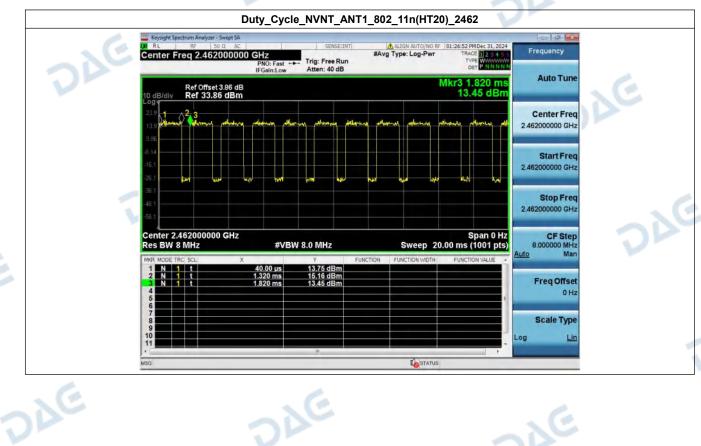



3. MAX. Output Power

DAG

Condition	Antenna	Modulation	Frequency (MHz)	Detector	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	Peak	17.67	0.25	17.92	30	Pass
NVNT	ANT1	802.11b	2437.00	Peak	17.27	0.25	17.52	30	Pass
NVNT	ANT1	802.11b	2462.00	Peak	18.31	0.25	18.56	30	Pass
NVNT	ANT1	802.11g	2412.00	Peak	16.58	1.30	17.88	30	Pass
NVNT	ANT1	802.11g	2437.00	Peak	16.40	1.30	17.7	30	Pass
NVNT	ANT1	802.11g	2462.00	Peak	16.95	1.36	18.31	30	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	Peak	16.97	1.43	18.4	30	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	Peak	16.65	1.43	18.08	30	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	Peak	17.25	1.43	18.68	30	Pass

Report No.: DACE241227002RF001

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 61 of 82

DAG



4. Power Spectral Density


Condition	Antenna	Modulation	Frequency (MHz)	SA_PSD (dBm/30kHz)	Duty factor(dB)	RB factor(dB)	PSD(dBm/3kHz)	limit(dBm/3kHz)	Result
NVNT	ANT1	802.11b	2412.00	2.55	0.25	-10.00	-7.20	8.00	Pass
NVNT	ANT1	802.11b	2437.00	1.93	0.25	-10.00	-7.82	8.00	Pass
NVNT	ANT1	802.11b	2462.00	2.98	0.25	-10.00	-6.77	8.00	Pass
NVNT	ANT1	802.11g	2412.00	-4.84	1.30	-10.00	-13.54	8.00	Pass
NVNT	ANT1	802.11g	2437.00	-5.18	1.30	-10.00	-13.88	8.00	Pass
NVNT	ANT1	802.11g	2462.00	-4.24	1.36	-10.00	-12.88	8.00	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	-4.81	1.43	-10.00	-13.38	8.00	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	-5.71	1.43	-10.00	-14.28	8.00	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	-4.47	1.43	-10.00	-13.04	8.00	Pass

Report No.: DACE241227002RF001

PSD(dBm/3kHz)=PSD(dBm/30kHz)+RB factor(dB);RB factor(dB)=10*log(3/30)=-10dB




Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 62 of 82

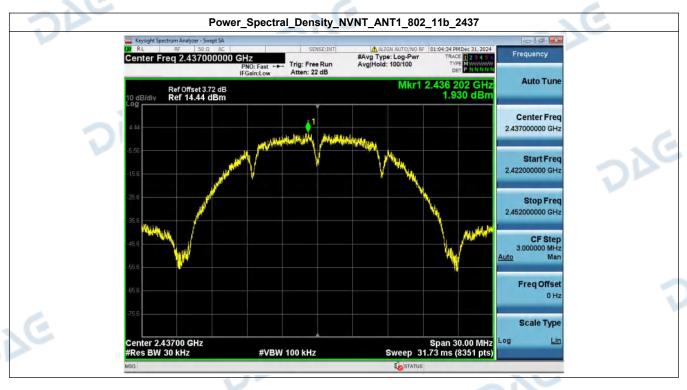






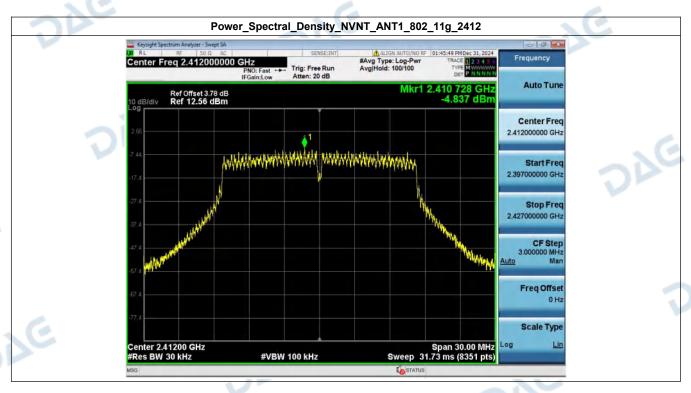






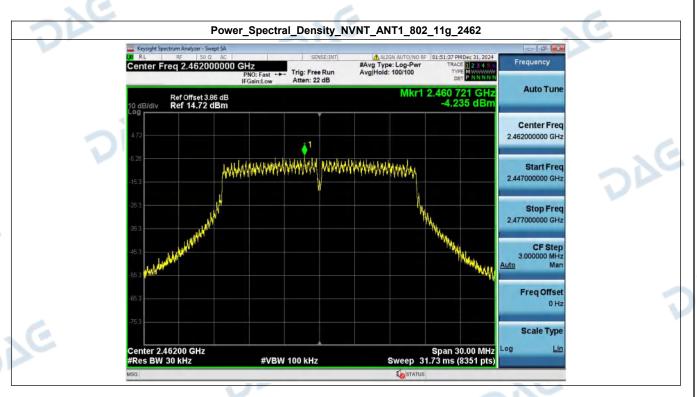




Web: http://www.dace-lab.com Page 65 of 82



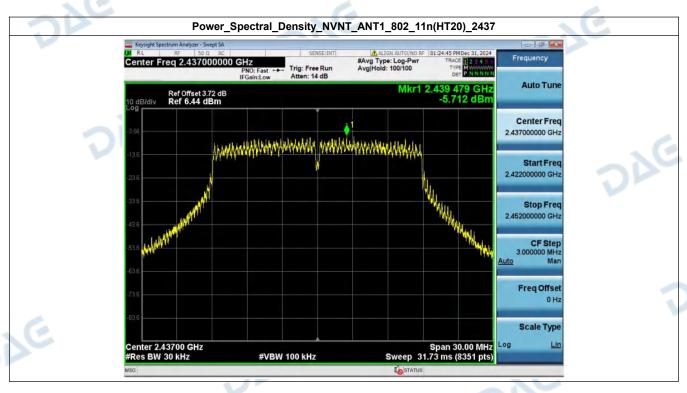


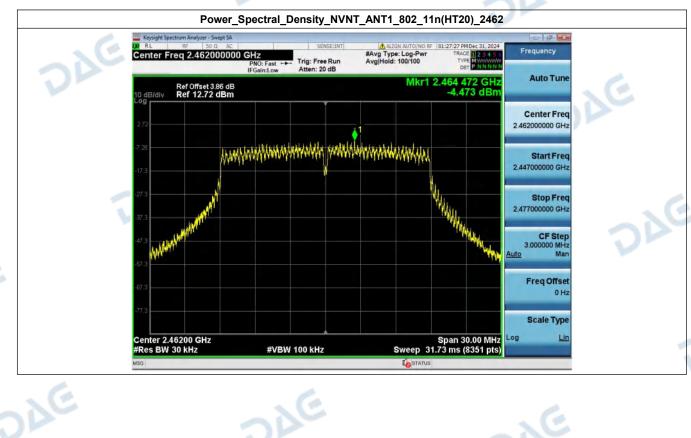



5. Bandedge

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_freq(MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	2397.024	6.020	-32.003	-13.980	Pass
NVNT	ANT1	802.11b	2462.00	2488.000	6.936	-51.902	-13.064	Pass
NVNT	ANT1	802.11g	2412.00	2399.936	-0.246	-39.345	-20.246	Pass
NVNT	ANT1	802.11g	2462.00	2483.776	-0.474	-54.296	-20.474	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	2399.936	0.342	-36.733	-19.658	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	2484.016	0.853	-52.876	-19.147	Pass

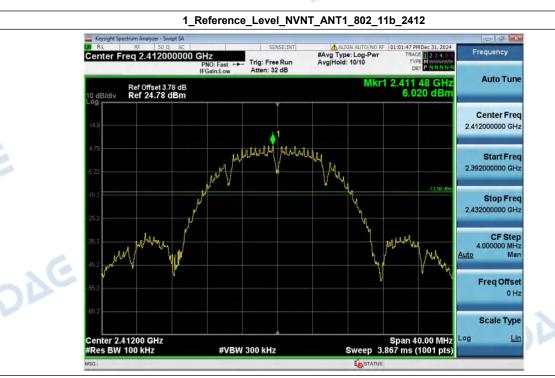





Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 67 of 82

DAG

V1.0



2_Bandedge_NVNT_ANT1_802_11b_2462




Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 68 of 82



DAG

V1.0

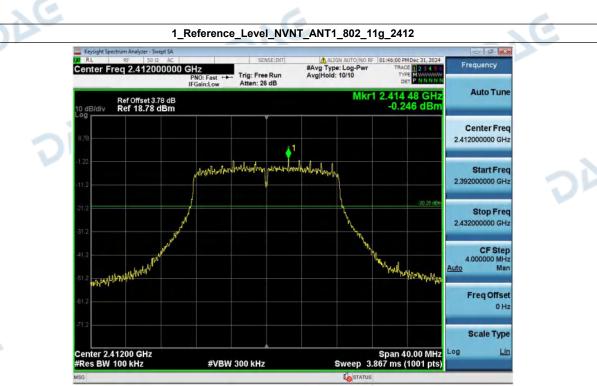






Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com

DAG

V1.0

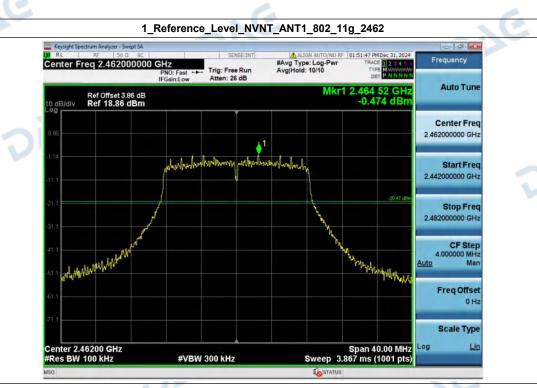


2_Bandedge_NVNT_ANT1_802_11g_2462



Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com


DAG

V1.0

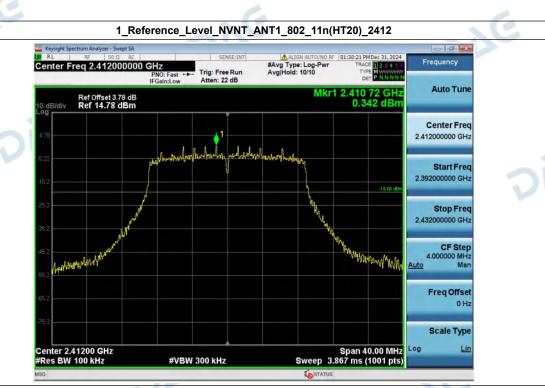

2_Bandedge_NVNT_ANT1_802_11n(HT20)_2412



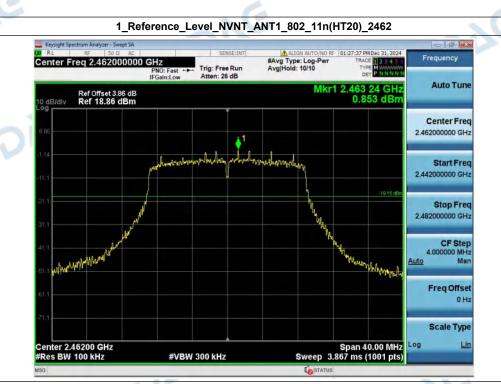

2_Bandedge_NVNT_ANT1_802_11n(HT20)_2462



Web: http://www.dace-lab.com

4

DAG

Tel: +86-755-23010613

E-mail: service@dace-lab.com

Page 72 of 82



6. Spurious Emission

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_freq(MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	24410.708	6.020	-37.742	-13.980	Pass
NVNT	ANT1	802.11b	2437.00	24463.145	5.506	-37.160	-14.494	Pass
NVNT	ANT1	802.11b	2462.00	24540.552	6.936	-39.980	-13.064	Pass
NVNT	ANT1	802.11g	2412.00	24430.684	-0.246	-41.678	-20.246	Pass
NVNT	ANT1	802.11g	2437.00	24485.618	-0.458	-48.761	-20.458	Pass
NVNT	ANT1	802.11g	2462.00	24940.072	-0.474	-41.776	-20.474	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	24473.133	0.342	-45.170	-19.658	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	24478.127	0.048	-41.703	-19.952	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	24498.103	0.853	-41.623	-19.147	Pass


Report No.: DACE241227002RF001




Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 73 of 82




DAG

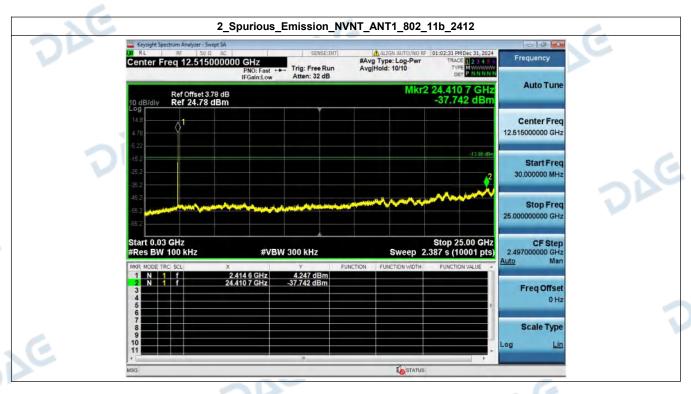


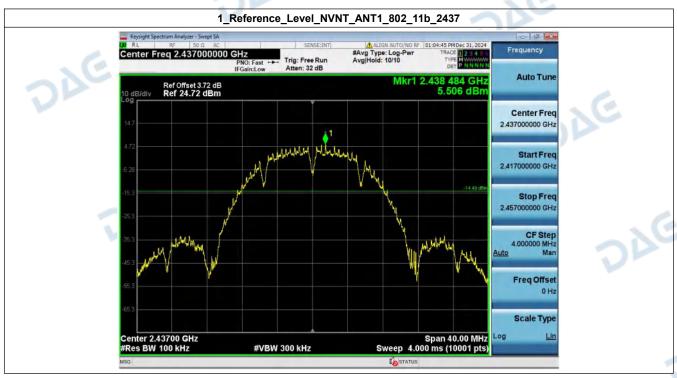




DAG

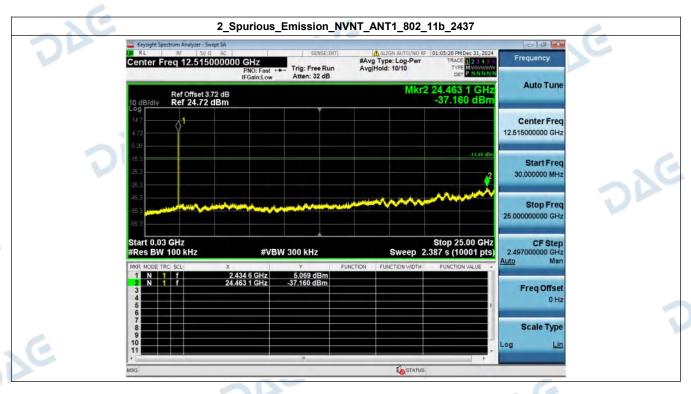


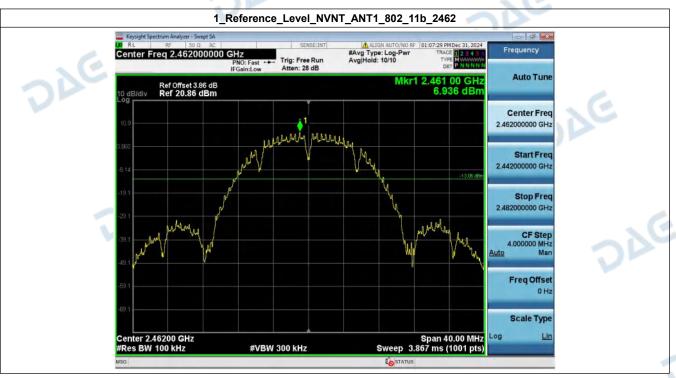




DIE

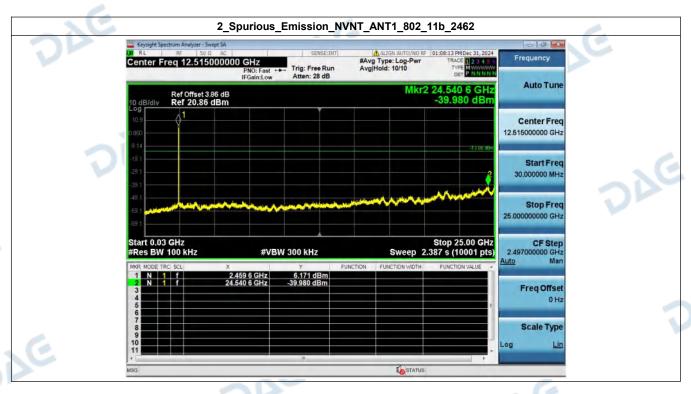


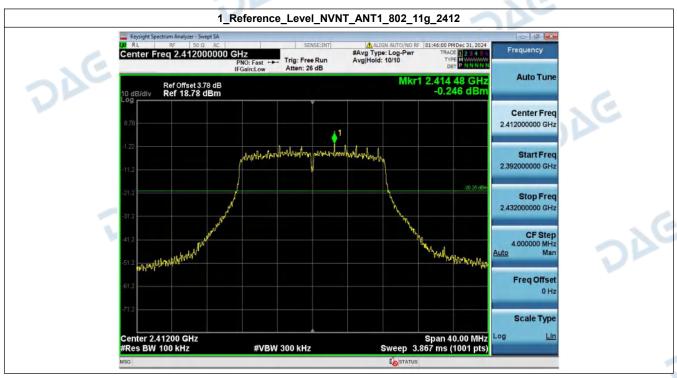




DAG

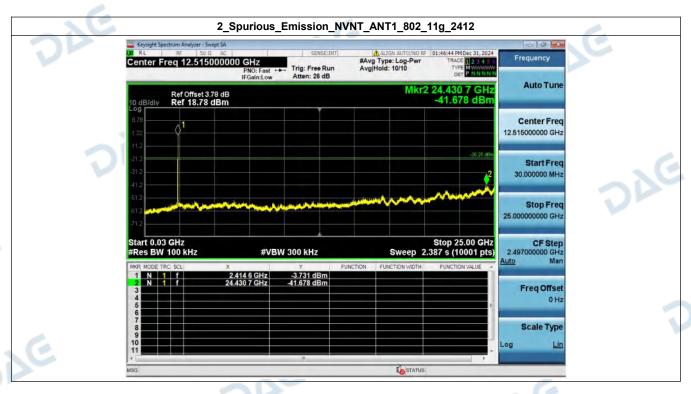


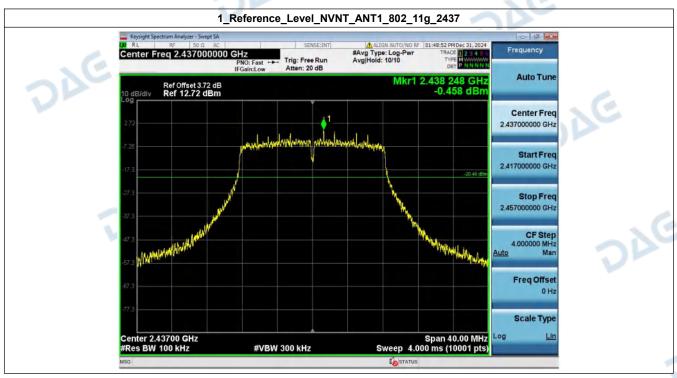




DAG

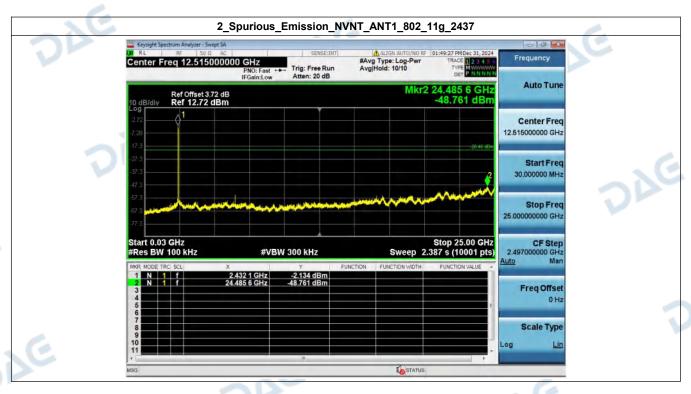


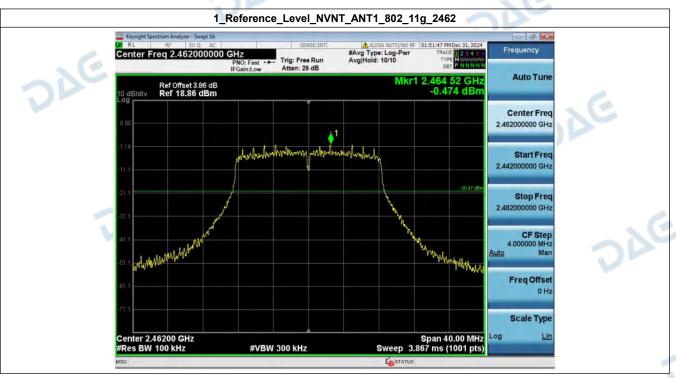




DAG

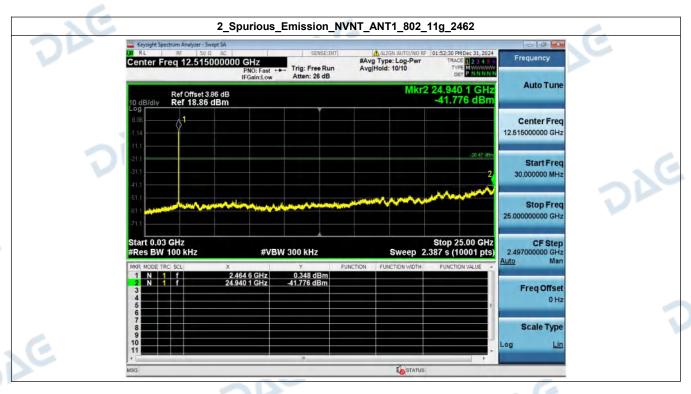


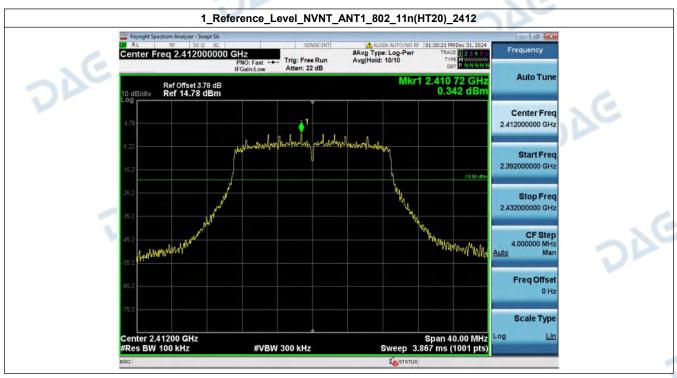




DAG

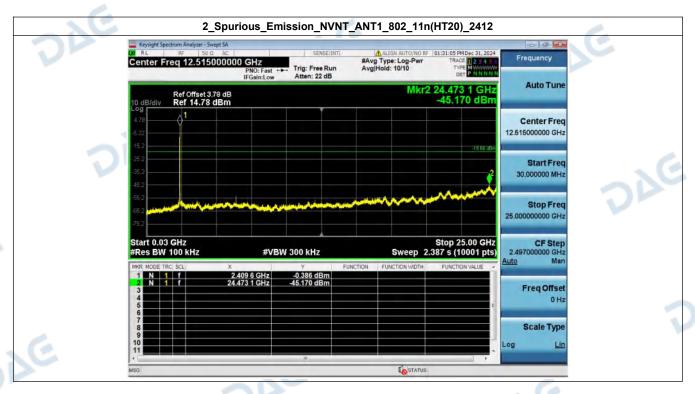


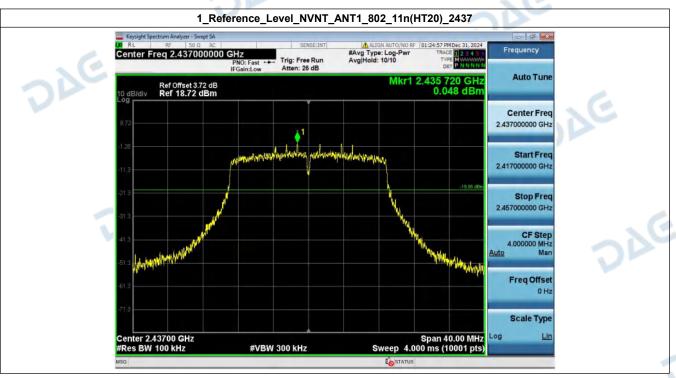



DAG

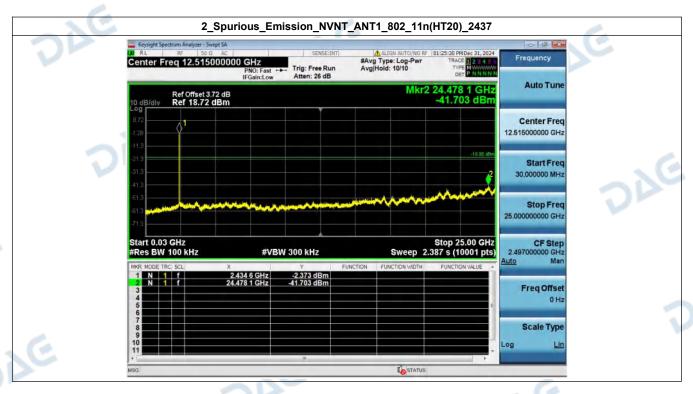

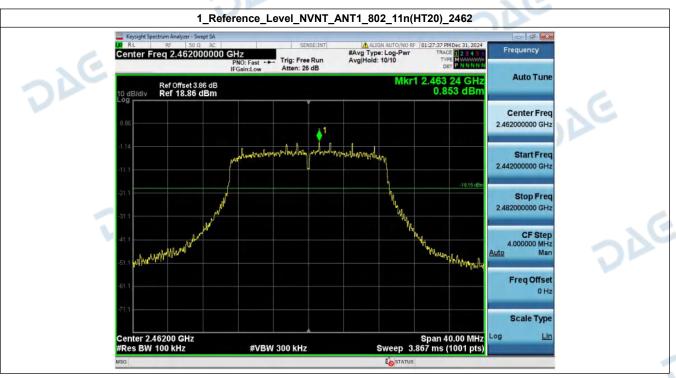


DAG

DAG

DAG

V1.0

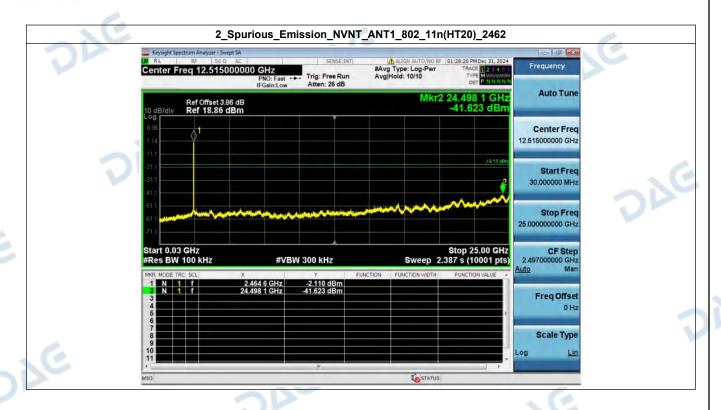

Web: http://www.dace-lab.com Tel: +86-755-23010613 E-mail: service@dace-lab.com Page 82 of 82

DAG