

Manufacturer

Address

Gain

Model

: ANHUI GUOJIE HEALTH TECHNOLOGY CO., LTD

: No. 782 Taiji Avenue, Guangde Economic Development Zone, Xuancheng, Anhui, China

: 0.0 dBi

: GJ-8100

產品型號:  
DESC

Φ20.5x47-12Ts-0.08x105-50mm-CLB


版本  
Rev: A.0

客戶 CUST:

淘軟料號 Fine P/N:

客戶料號 CUST P/N:

一、尺寸 DIMENSION:(mm)

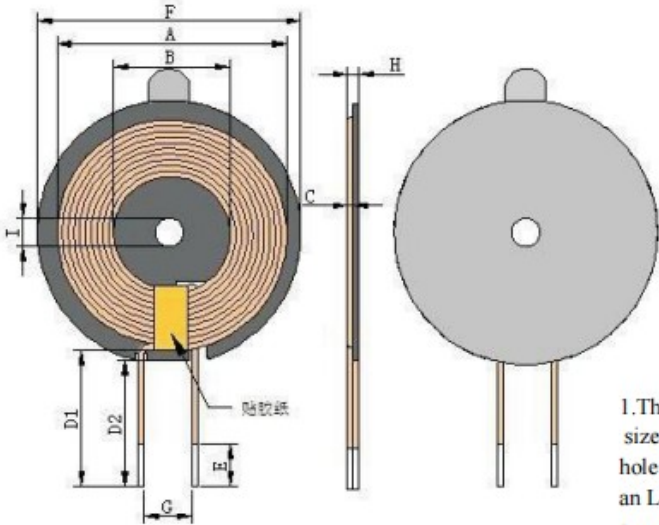

A

B

C

D1

D2

E

F

G

H

I


|    |          |
|----|----------|
| A  | 47.0±1.5 |
| B  | 20.5±0.5 |
| C  | 1.2±0.2  |
| D1 | 52±2     |
| D2 | 50±2     |
| E  | 3.5±1.5  |
| F  | 50±1     |
| G  | 11.0 ref |
| H  | 2.8 Max  |
| I  | 5.3 ref  |

1.The coil is attached with a magnetic sheet. The size of the magnetic sheet is 50±1mm, the inner hole is 5.3mm, the thickness is 1.0±0.2mm, and an L slot is made.

2.Wrap high-temperature adhesive tape with a width of 8mm ±0.5 at the coil lead-out position.

3.The back of the magnetic sheet is attached with a circular 49mm diameter (ref) with a hand-tear position and an inner hole of 6.0mm (ref) of ordinary double-sided tape.

二、原理图 SCHEMATIC DIAGRAM:



三、绕线参数 Winding Specification:

| 序号<br>NO. | 端子<br>TERMINAL | 线径<br>WIRE    | 圈数<br>Turns | 绕线方向<br>Winding Direction |
|-----------|----------------|---------------|-------------|---------------------------|
| 1         | S   F          | 丝包线 0.08*105P | 12Ts        | CCW                       |

三、绕线参数 Winding Specification:

| 序号<br>NO. | 端子<br>TERMINAL | 线径<br>WIRE    | 圈数<br>Turns | 绕线方向<br>Winding Direction |
|-----------|----------------|---------------|-------------|---------------------------|
| 1         | S   F          | 丝包线 0.08*105P | 12Ts        | CCW                       |