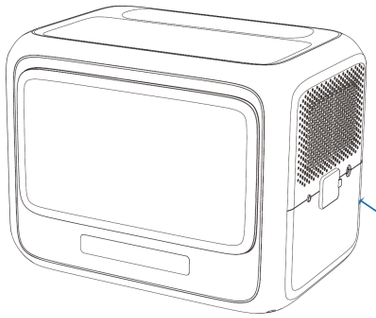

FCC ID and ISED Label Location

Back of the EUT

240mm

70mm

R4mm

4

BLUETTI

Portable Power Station

Model: Elite 100 V2

Battery Capacity: 1024Wh, 51.2V⎓20Ah

Input:
AC: 120V～ 50/60Hz, 15A
DC/PV: 12V-60V ⎓20A, 1000W

Discharging Temperature: -20°C-40°C/-4°F-104°F
Charging Temperature: 0°C-40°C/32°F-104°F
Working Humidity: 10%-90%

PT POWEROAK ENERGY INDONESIA
Address: Horizon Industrial Park Type A Lot 07
Sungai Pelunggut Village, Sagulung District, Batam
City 29439 Riau Islands Province, Indonesia

Output:
AC: 120V～ 50/60Hz, 1800W Total
USB-A: 5V⎓3A per port
USB-C(100W): 5/9/12/15V⎓3A; 20V⎓5A
USB-C(140W): 5/9/15V⎓3A; 20V/28V⎓5A
(With E-Marker chip built in)
Cigarette Lighter Port: 12V⎓10A
DC5521: 12V⎓total 8A Max., 5A per port
DC5521 and Cigarette Lighter: 10A Max.
AC & DC Output: 1900W Max.

CAN ICES (B) / NMB (B)
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID: 2BNDH-ELITE100 IC: 33469-ELITE100
MADE IN INDONESIA P/N: 17.0301.1586-02A2

CAUTION

- Risk of Electric Shock. Do not remove cover. No user serviceable parts inside. Refer servicing to qualified service personnel.
- Risk of Electric Shock. Connect only to properly grounded outlets.
- Risk of Injury To Persons. Do not use this product if the power cord or the battery cables are damaged in any way.
- Risk of Electric Shock. Never use portable power pack to supply power tools to cut or access live parts or live wirings.
- This device is not intended for use in a commercial repair facility.
- Risk of Electric Shock. Do not operate this device under a continuous load for more than 3 hours if the AC input current exceeds 12A (when the AC input power is 1440W).

DANGER

- This device is intended to be used indoors only. Do not use outdoors.

MISE EN GARDE

- Risque de décharge électrique.Ne pas enlever le couvercle. Aucune des pièces à l'intérieur ne peut être réparée par l'utilisateur. L'entretien courant doit être effectué par un personnel d'entretien qualifié.
- Risque de décharge électrique.Brancher l'unité uniquement à des prises de courant correctement mises à la masse.
- Risque de blessure aux personnes. Ne pas utiliser ce produit si le cordon d'alimentation ou les câbles de batterie sont endommagés de quelque façon.
- Risque de décharge électrique. N'utilisez jamais de bloc d'alimentation portable pour fournir des outils électriques pour couper ou accéder à des pièces sous tension ou à des câblages endirect.
- Le dispositif n'est pas destiné à être utilisé dans un atelier de réparation commercial.
- Risque d'électrocution. Ne pas faire fonctionner cet appareil sous charge continue pendant plus de 3 heures si le courant d'entrée AC dépasse 12A (lorsque la puissance d'entrée AC est de 1440W).

DANGER

- Le dispositif est destiné à être utilisé à l'intérieur seulement. Ne pas l'utiliser à l'extérieur.

Coded material number

size: 240*70mm,tolerance +0/-0.4mm