

## TEST REPORT

<b>Application No.:</b>	KSCR2412002669AT
<b>FCC ID:</b>	2BNFP-DM1
<b>IC:</b>	33480-DM1
<b>Applicant:</b>	Ambient Life Inc.
<b>Address of Applicant:</b>	321 Walnut St,#325 West Newton, MA 02465 US
<b>Manufacturer:</b>	Ambient Life Inc.
<b>Address of Manufacturer:</b>	321 Walnut St,#325 West Newton, MA 02465 US
<b>Factory:</b>	Jetta(China) Industries Co.,Ltd.
<b>Address of Factory:</b>	333 Cai Xin Lu,Lan He Zhen, Nan Sha Qu, Guangzhou City, Guangdong Province, China
<b>Equipment Under Test (EUT):</b>	
<b>EUT Name:</b>	Dreamie
<b>Model No.:</b>	DM1
<b>Standard(s) :</b>	47 CFR Part 15, Subpart C 15.255 RSS-Gen Issue 5 Amendment 2 (February 2021) RSS-210 Issue 11
<b>Date of Receipt:</b>	2024-12-30
<b>Date of Test:</b>	2025-01-02 to 2025-01-13
<b>Date of Issue:</b>	2025-01-13
<b>Test Result:</b>	<b>Pass*</b>


\* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

<b>Revision Record</b>			
<b>Version</b>	<b>Description</b>	<b>Date</b>	<b>Remark</b>
00	Original	2025-01-13	/

<b>Authorized for issue by:</b>			
<b>Tested By</b>	 Tommie Tang		
	Tommie_Tang/Project Engineer		
<b>Approved By</b>	 Terry Hou		
	Terry Hou /Reviewer		

## 2 Test Summary

Radio Spectrum Technical Requirement						
Item	FCC Standard	IC Standard	Method	FCC Requirement	IC Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.255	RSS-210	N/A	47 CFR Part 15, Subpart C 15.203	RSS-Gen Clause 6.8	Pass

N/A: Not applicable

Radio Spectrum Matter Part						
Item	FCC Standard	IC Standard	Method	FCC Requirement	IC Requirement	Result
Transmitter power and Transmitter off-times	47 CFR Part 15, Subpart C 15.255	RSS-210	ANSI C63.10, Sections 9.4, 9.5, 9.10	47 CFR Part 15, Subpart C 15.255(c)(2)(iii)(A )	RSS-210 Annex J.3.2(b)(iii)(1)	PAS S
Occupied bandwidth	47 CFR Part 15, Subpart C 15.255	RSS-210	ANSI C63.10 (2013) Section 9.3	47 CFR Part 15, Subpart C 15.215(c), 15.255(c)(2)(iii)	RSS-Gen Section 6.7	PAS S
Radiated spurious emissions below 40 GHz	47 CFR Part 15, Subpart C 15.255	RSS-210	ANSI C63.10 (2013) Section 9.13	47 CFR Part 15, Subpart C 15.255(d)(2)	RSS-Gen Section 8.9	PAS S
Radiated emissions outside assigned band and above 40 GHz up to 200 GHz	47 CFR Part 15, Subpart C 15.255	RSS-210	ANSI C63.10 (2013) Section 9.9, 9.12	47 CFR Part 15, Subpart C 15.255(d)(3)	RSS-210 Annex J.4	PAS S
Frequency stability	47 CFR Part 15, Subpart C 15.255	RSS-210	ANSI C63.10 (2013) Section 9.14	47 CFR Part 15, Subpart C 15.255(f)	RSS-Gen Section 8.11	PAS S

### 3 Contents

	Page
<b>1 COVER PAGE</b>	1
<b>2 TEST SUMMARY</b>	3
<b>3 CONTENTS</b>	4
<b>4 GENERAL INFORMATION</b>	5
4.1 DETAILS OF E.U.T	5
4.2 DESCRIPTION OF SUPPORT UNITS	5
4.3 MEASUREMENT UNCERTAINTY	5
4.4 TEST LOCATION	6
4.5 TEST FACILITY	6
4.6 DEVIATION FROM STANDARDS	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
<b>5 EQUIPMENT LIST</b>	7
<b>6 RADIO SPECTRUM TECHNICAL REQUIREMENT</b>	9
6.1 ANTENNA REQUIREMENT	9
<b>7 RADIO SPECTRUM MATTER TEST RESULTS</b>	10
7.1 OCCUPIED BANDWIDTH	10
7.2 TRANSMITTER POWER AND TRANSMITTER OFF-TIMES	11
7.3 RADIATED SPURIOUS EMISSIONS BELOW 40 GHz	12
7.4 RADIATED SPURIOUS EMISSIONS ABOVE 40 GHz	15
7.5 FREQUENCY STABILITY	17
<b>8 TEST SETUP PHOTO</b>	19
<b>9 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)</b>	19
<b>10 APPENDIX</b>	20
10.1 OCCUPIED BANDWIDTH	20
10.2 TRANSMITTER POWER AND TRANSMITTER OFF-TIMES	21
10.3 RADIATED SPURIOUS EMISSIONS BELOW 40 GHz	23
10.4 RADIATED SPURIOUS EMISSIONS ABOVE 40 GHz	25
10.5 FREQUENCY STABILITY	28

## 4 General Information

### 4.1 Details of E.U.T.

Power supply: DC 9V by adapter  
Adapter Model: RH-PD20W  
Input: 100-240V, 50/60Hz, 0.6A Max  
Output: 5V/3A, 9V/2.22A, 12V/1.67A

Frequency: 59-63GHz  
Modulation Type: FMCW  
Antenna Type: Integrated Patch Antenna  
Antenna Gain: 3dBi (Provided by the manufacturer)

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$8.4 \times 10^{-8}$
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Radiated Power	5.2dB (Below 1GHz) 5.9dB (Above 1GHz)
6	Radiated Spurious Emission Test	4.2dB (Below 30MHz) 4.5dB (30MHz-1GHz) 5.1dB (1GHz-18GHz) 5.4dB (Above 18GHz)
7	Temperature Test	1°C
8	Humidity Test	3%
9	Supply Voltages	1.5%
10	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.4 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3. Sample source: sent by customer.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC**

Compliance Certification Services Inc. has been recognized as an accredited testing laboratory.

Designation Number: CN1172.

- **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

- **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None

## 5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/06/2024	08/05/2025
	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/06/2024	08/05/2025
2	PXA Spectrum Analyzer	KEYSIGHT	N9030B	KSEM021-1	01/15/2024	01/14/2025
3	Signal Generator	Agilent	E8257C	KS301066	08/06/2024	08/05/2025
	Signal Generator	Agilent	E8257C	KS301066	08/06/2024	08/05/2025
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	03/18/2023	03/17/2025
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	06/29/2023	06/28/2025
6	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/15/2024	01/14/2025
7	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	KS301186	04/07/2023	04/06/2025
8	Amplifier(18~40GHz)	PANSHAN TECHNOLOGY	LNA180400G40	KSEM038	08/12/2024	08/11/2025
	Amplifier(18~40GHz)	PANSHAN TECHNOLOGY	LNA180400G40	KSEM038	08/12/2024	08/11/2025
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/07/2024	01/06/2026
10	Horn-antenna(40-60GHz)	ERAVANT	SAZ-2410-19-S1	KSEM003-1	02/02/2021*	02/01/2031**
11	Horn-antenna(50-75GHz)	ERAVANT	SAZ-2410-15-S1	KSEM003-2	02/02/2021*	02/01/2031**
12	Horn-antenna(50-75GHz)	ERAVANT	SAZ-2410-15-S1	KSEM003-7	12/14/2022*	12/13/2032**
13	Horn-antenna(60-90GHz)	ERAVANT	SAZ-2410-12-S1	KSEM003-8	12/14/2022*	12/13/2032**
14	Horn-antenna(75-110GHz)	ERAVANT	SAZ-2410-10-S1	KSEM003-3	02/02/2021*	02/01/2031**
15	Horn-antenna(90-140GHz)	ERAVANT	SAZ-2410-08-S1	KSEM003-9	12/14/2022*	12/13/2032**
16	Horn-antenna(110-170GHz)	ERAVANT	SAZ-2410-06-S1	KSEM003-4	02/02/2021*	02/01/2031**
17	Horn-antenna(140-220GHz)	ERAVANT	SAZ-2410-05-S1	KSEM003-5	02/02/2021*	02/01/2031**
18	Horn-antenna(140-220GHz)	ERAVANT	SAZ-2410-05-S1	KSEM003-10	12/14/2022*	12/13/2032**
19	Horn-antenna(220-325GHz)	ERAVANT	SAR-2309-03-S2	KSEM003-6	02/02/2021*	02/01/2031**
20	Extended waveguide(40-60GHz)	ERAVANT	SWG-19025-FB	KSEM004-1	02/02/2021*	02/01/2031**
21	Extended waveguide(50-75GHz)	ERAVANT	SWG-15025-FB	KSEM004-2	02/02/2021*	02/01/2031**
22	Extended waveguide(50-75GHz)	ERAVANT	SWG-15025-FB	KSEM004-7	12/14/2022*	12/13/2032**
23	Extended waveguide(60-90GHz)	ERAVANT	SWG-12025-FB	KSEM004-8	12/14/2022*	12/13/2032**
24	Extended waveguide(75-110GHz)	ERAVANT	SWG-10025-FB	KSEM004-3	02/02/2021*	02/01/2031**
25	Extended waveguide(90-140GHz)	ERAVANT	SWG-08025-FB	KSEM004-9	12/14/2022*	12/13/2032**
26	Extended waveguide(110-170GHz)	ERAVANT	SWG-06025-FB	KSEM004-4	02/02/2021*	02/01/2031**
27	Extended waveguide(140-220GHz)	ERAVANT	SWG-05025-FB	KSEM004-5	02/02/2021*	02/01/2031**
28	Extended waveguide(140-220GHz)	ERAVANT	SWG-05025-FB	KSEM004-10	12/14/2022*	12/13/2032**

29	Extended waveguide(220-325GHz)	ERAVANT	SWG-03025-FB	KSEM004-6	02/02/2021*	02/01/2031**
30	Harmonic mixer(40-60GHz)	ERAVANT	STH-19SF-S1	KSEM005-2	10/01/2020*	09/30/2030**
31	Harmonic Mixer(50-75GHz)	VDI	SAX WR15	KSEM007-1	08/23/2023*	08/23/2033**
32	Harmonic Mixer(60-90GHz)	VDI	SAX WR12	KSEM007-2	08/23/2023*	08/23/2033**
33	Harmonic mixer(90-140GHz)	VDI	SAX WR8.0	KSEM007-3	08/23/2023*	08/23/2033**
34	Harmonic mixer(140-220GHz)	VDI	SAX WR5.1	KSEM007-4	08/23/2023*	08/23/2033**
35	Harmonic mixer(220-325GHz)	ERAVANT	HM 220-325	KSEM005-4	04/20/2021*	04/19/2031**
36	Upconverter	Talent	TMAM-060090-0612-12-AC	KSEM043	01/18/2022*	01/17/2032**
37	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	03/19/2024	03/18/2025
38	Software	Faratronic	EZ EMC-v 3A1	/	NCR	NCR
39	Software	ESE	E3_V 6.111221a	/	NCR	NCR

\*Calibration date provided by the equipment manufacturer.

\*\*Calibration every ten years. During this period, there will be daily check files for the equipment and the requirements for operators will be clearly defined through SOP.

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

FCC 47 CFR Part 15C Section 15.203

RSS-Gen Clause 6.8

#### 6.1.2 Conclusion

FCC Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

IC Standard Requirement:

Measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

EUT Antenna:

The antenna is Integrated Patch Antenna and no consideration of replacement.

Antenna location: Refer to EUT Photos.

## 7 Radio Spectrum Matter Test Results

### 7.1 Occupied bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215(c), 15.255(c)(2)(iii)

RSS-Gen Section 6.7

Test Method: ANSI C63.10, Section 9.3


#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.4 °C Humidity: 52.2 % RH Atmospheric Pressure: 1010 mbar

Test Mode: a: TX mode \_ Keep the EUT in continuously transmitting mode.

#### 7.1.2 Test Setup Diagram

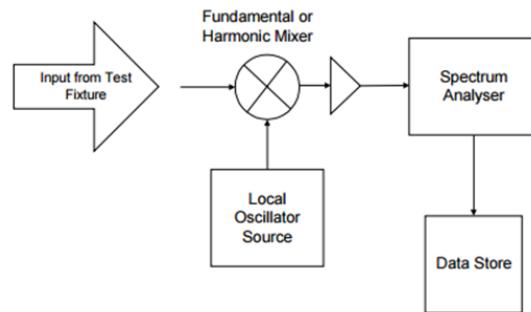

#### 7.1.3 Measurement Procedure and Data

- 1) Place the EUT on the table and set it in the transmitting mode
- 2) SA set RBW=1%~5% OBW, VBW=3\*RBW and Detector=Peak, or a minimum of 1 MHz if this is not possible due to a large OBW.
- 3) Measure and record the result of 20dB and 99% bandwidth

Please Refer to Appendix for Details

## 7.2 Transmitter power and Transmitter off-times

Test Requirement	47 CFR Part 15, Subpart C 15.255(c)(2)(iii)(A) RSS-210 Annex J.3.2(b)(iii)(1)
Test Method:	ANSI C63.10, Sections 9.4, 9.5, 9.10
Limit:	The peak EIRP shall not exceed 14 dBm, and the sum of continuous transmitter off-times of at least two milliseconds shall equal at least 25.5 milliseconds within any contiguous interval of 33 milliseconds.


### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.4 °C Humidity: 52.2 % RH Atmospheric Pressure: 1010 mbar

Test Mode: a: TX mode \_ Keep the EUT in continuously transmitting mode.

### 7.2.2 Test Setup Diagram

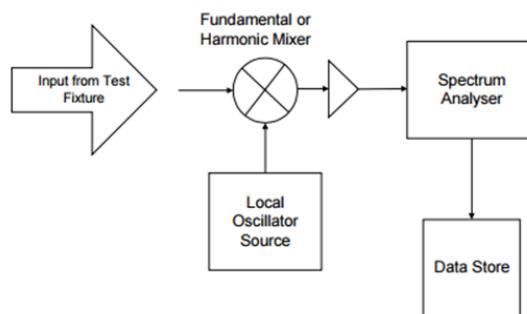

### 7.2.3 Measurement Procedure and Data

- 1) Place the EUT on the table and set it in the transmitting mode
- 2) SA set RBW=1MHz , VBW=3\*RBW , Detector=Peak/Average, Trace: Mask Hold, Peak Search
- 3) The EUT was turned from 0 degrees to 360 degrees to find the maximum reading.

Please Refer to Appendix for Details

### 7.3 Radiated spurious emissions below 40 GHz

Test Requirement 47 CFR Part 15, Subpart C 15.255(d)(2)

RSS-Gen Section 8.9

Test Method: ANSI C63.10, Section 9.13

Limit:

#### Below 30MHz

Frequency	Field Strength ( $\mu$ V/m)	Measurement Distance (metres)
9 - 490 kHz	2,400/F (kHz)	300
490 - 1,705 kHz	24,000/F (kHz)	30
1.705-30 MHz	30	30

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

#### Above 30MHz

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (metres)
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

Frequency (MHz)	Field strength at 3 m, dB( $\mu$ V/m)*		
	Within restricted bands		
	Peak	Quasi Peak	Average
0.009 - 0.090	148.5 - 128.5	NA	128.5 - 108.5**
0.090 - 0.110	NA	108.5 - 106.8**	NA
0.110 - 0.490	126.8 - 113.8	NA	106.8 - 93.8**
0.490 - 1.705	NA	73.8 - 63.0**	NA
1.705 - 30.0*		69.5	
30 - 88		40.0	
88 - 216		43.5	
216 - 960		46.0	
960-40000		54.0	




### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24.4 °C      Humidity: 52.2 % RH      Atmospheric Pressure: 1010 mbar

Test Mode: a: TX mode \_ Keep the EUT in continuously transmitting mode.

### 7.3.2 Test Setup Diagram

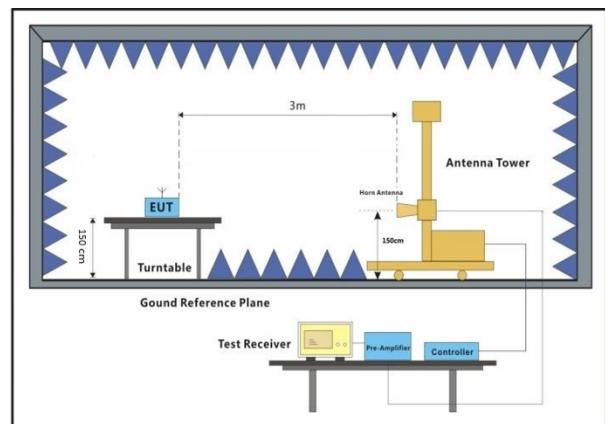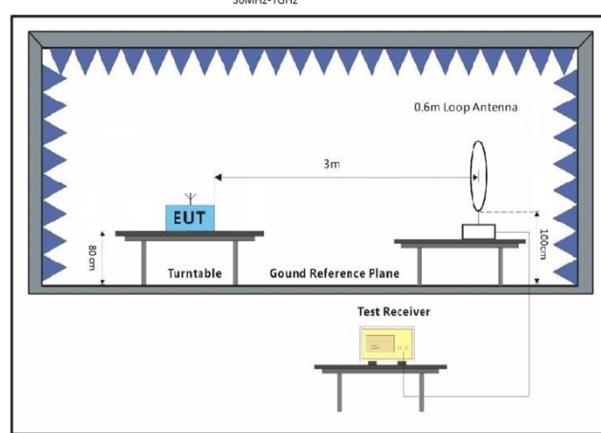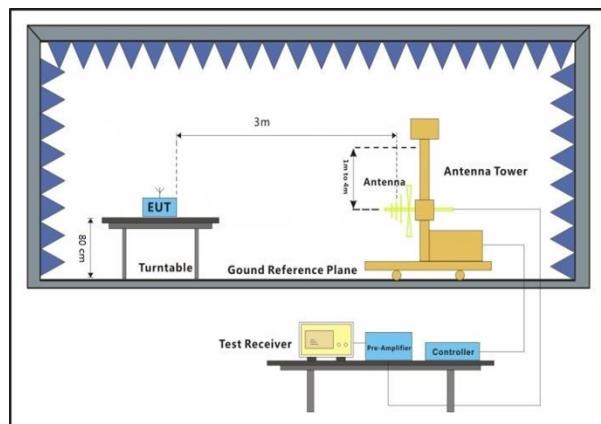

### 7.3.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For 1-40GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to the same height (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- h. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: Scan from 9kHz to 30MHz, the disturbance was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Please Refer to Appendix for Details

## 7.4 Radiated spurious emissions above 40 GHz

Test Requirement 47 CFR Part 15, Subpart C 15.255(d)(3)  
 RSS-210 Annex J.3

Test Method: ANSI C63.10, Section 9.9, 9.12  
 Limit:

### Above 40GHz

Frequency (GHz)	Power density at 3 m distance (pW/cm <sup>2</sup> )	Distance (m)	Field strength (dBuV/m)*, peak	Field strength (dBuV/m)*, average
40 - 200	90	3.0	105.31	85.31

\* - Field strength was calculated per equation (26) of ANSI C63.10-2013 section 9 as follows:  $E = \sqrt{PD \times 377}$ , where PD is the power density at the distance specified by the limit in W/m<sup>2</sup>, E- field strength in V/m.


### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.4 °C Humidity: 52.2% RH Atmospheric Pressure: 1010 mbar

Test mode: a: TX mode \_ Keep the EUT in continuously transmitting mode.

### 7.4.2 Test Setup Diagram

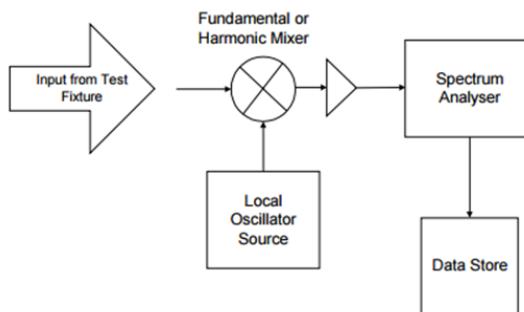

Above 40GHz

#### 7.4.3 Measurement Procedure and Data

- a. For above 40GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation
- b. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to the same height (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- e. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- f. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- g. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Please Refer to Appendix for Details

## 7.5 Frequency stability

Test Requirement

47 CFR Part 15, Subpart C 15. 255(f)

RSS-Gen Section 8.11

Test Method:

ANSI C63.10, Section 9.14

Limit:

Frequency (GHz)	Limit
57 - 64	The signal must be contained within assigned frequency band


### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 24.4 °C Humidity: 52.2% RH Atmospheric Pressure: 1010 mbar

Test mode: a: TX mode \_ Keep the EUT in continuously transmitting mode.

### 7.5.2 Test Setup Diagram

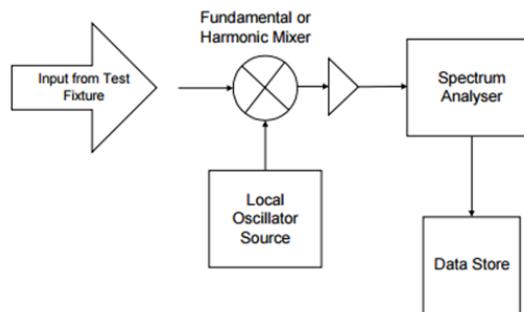

### 7.5.3 Measurement Procedure and Data

1. Temperature conditions:
  - a) The RF output port of the EUT was connected to Frequency Meter;
  - b) Set the working Frequency in the middle channel;
  - c) record the 20°C and norminal voltage frequency value as reference point;
  - d) vary the temperature from -20°C to 50°C with step 10°C
  - e) when reach a temperature point, keep the temperature banlance at least 1 hour to make the product working in this status;
  - f) read the frequency at the relative temperature.
2. Voltage conditions:
  - a) record the 20°C and norminal voltage frequency value as reference point;
  - b) vary the voltage from -15% norminal voltage to +15% voltage;  
read the frequency at the relative voltage.

Please Refer to Appendix for Details

## 8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2412002669AT

## 9 EUT Constructional Details (EUT Photos)


Refer to Appendix - Photographs of EUT Constructional Details for KSCR2412002669AT

## 10 Appendix

### 10.1 Occupied bandwidth

Frequency (GHz)	99% OCW (GHz)	Lowest Frequency (GHz)	Highest Frequency (GHz)	Limit (GHz)	Result
60.731	2.9921	59.237	62.229	57-64	Pass

Frequency (GHz)	-20dB OCW (GHz)	Lowest Frequency (GHz)	Highest Frequency (GHz)	Limit (GHz)	Result
60.731	3.0486	59.211	62.260	57-64	Pass

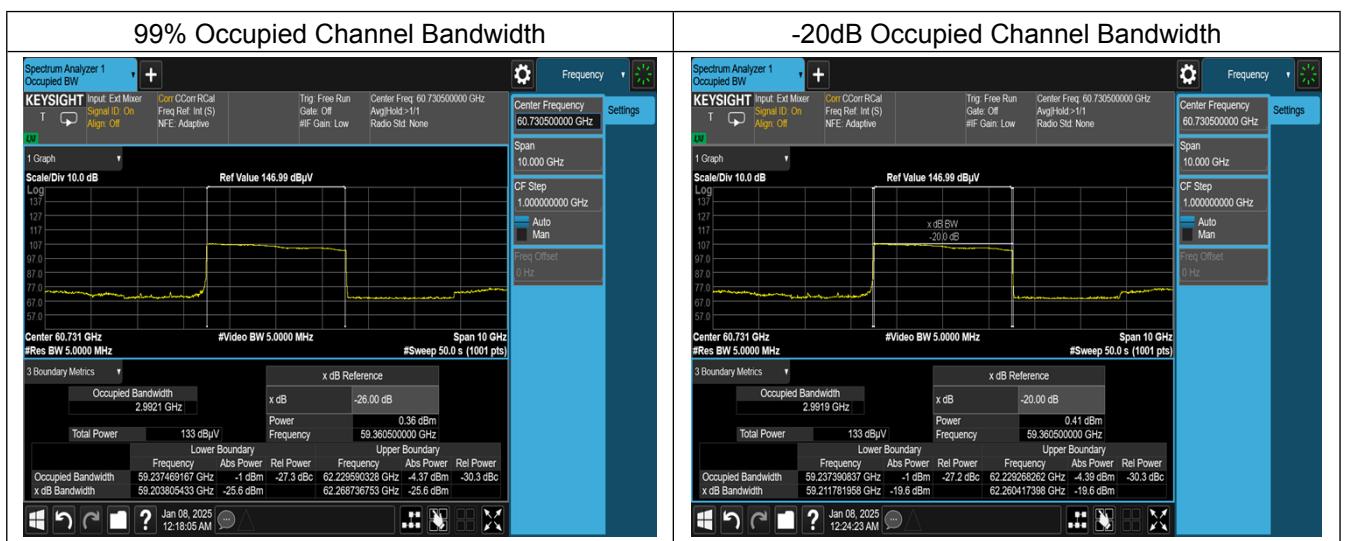

## 10.2 Transmitter power and Transmitter off-times

Frequency (GHz)	Distance (m)	Polarity	dBuV/m @ 3m	Desensitization factor (dB)	E.I.R.P. Power (dBm)	E.I.R.P. Limit (dBm)	Remark	Result
60.731	3	Horizontal	83.37	3.75	-8.11	14	peak	Pass
		Vertical	98.13	3.75	6.65	14	peak	Pass


Remark 1: EIRP[dBm] = E[dB $\mu$ V/m] + 20 log(d[meters]) - 104.77, where E = field strength and d = distance at which field strength limit is specified in the rules

Remark 2: The FMCW modulation desensitization correct factor 3.75 was calculated with equation below, where the  $BW_{Chirp}$ =3000MHz,  $T_{Chirp}$ =616uS, B=1MHz.

$$\alpha = \frac{1}{\sqrt{1 + \left(\frac{2 \ln(2)}{\pi}\right)^2 \left(\frac{BW_{Chirp}}{T_{Chirp} B^2}\right)^2}}$$

where

$\alpha$	is the reduction in amplitude
$BW_{Chirp}$	is the FMCW Chirp Bandwidth
$T_{Chirp}$	is the FMCW Chirp Time
$B$	is the 3 dB IF Bandwidth = RBW

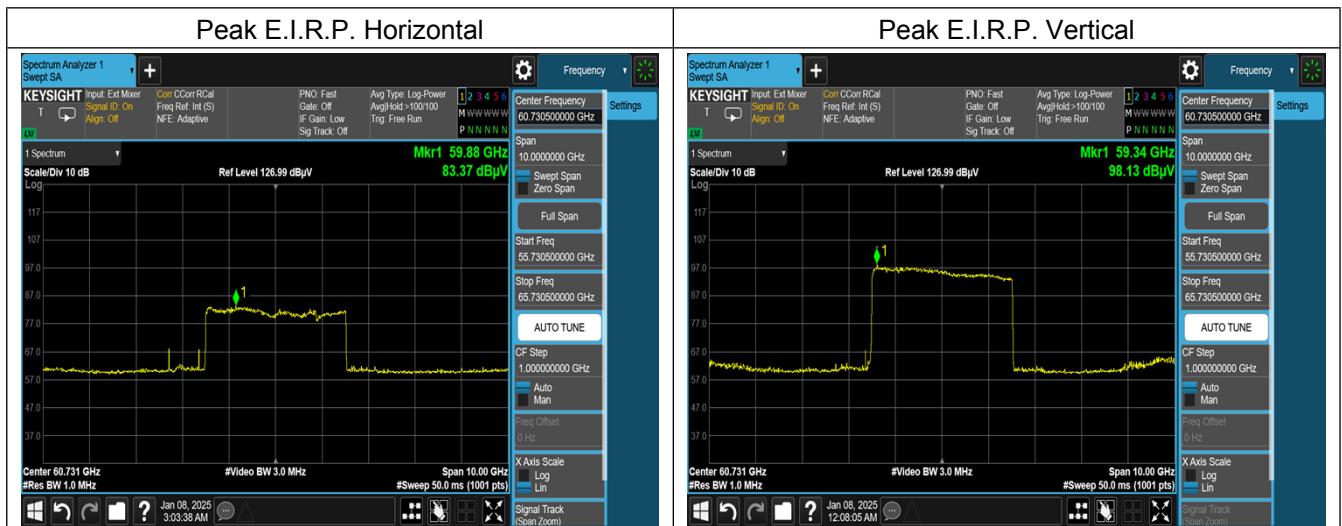


Frequency (GHz)	Transmitter On-times (mS)	Transmitter Off-times (mS)	Interval Period (mS)	Limit (mS)	Result
60.731	0.243	32.757	33	≥25.5	Pass

Note 1: Off-times = Interval Period – On-times

2: On-times = Chirp Width \* Chirp number =  $54 * ((13.40 - 11.36) + (41.80 - 39.34)) \mu\text{s} = 243 \mu\text{s}$




## 10.3 Radiated spurious emissions below 40 GHz

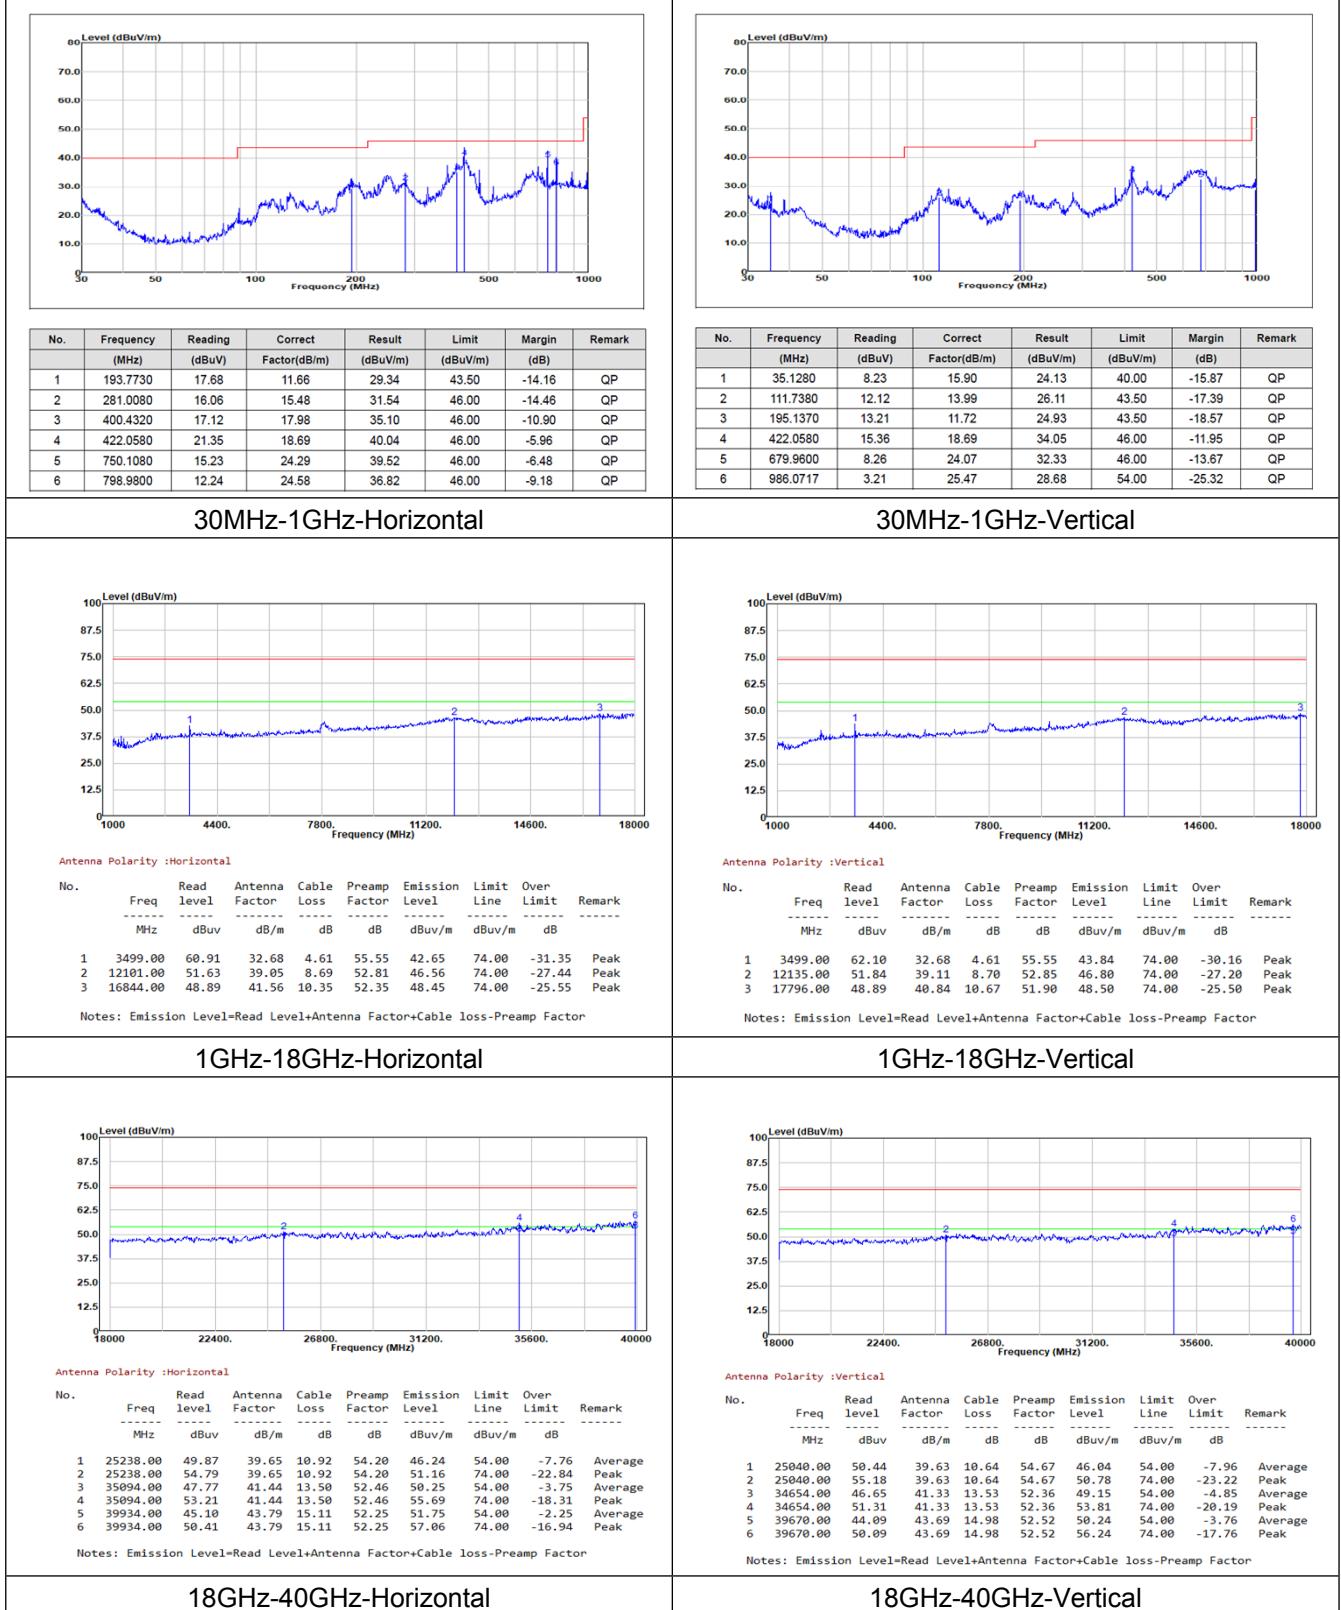



Report No.: KSCR241200266902  
Page: 24 of 28


## 10.4 Radiated spurious emissions above 40 GHz

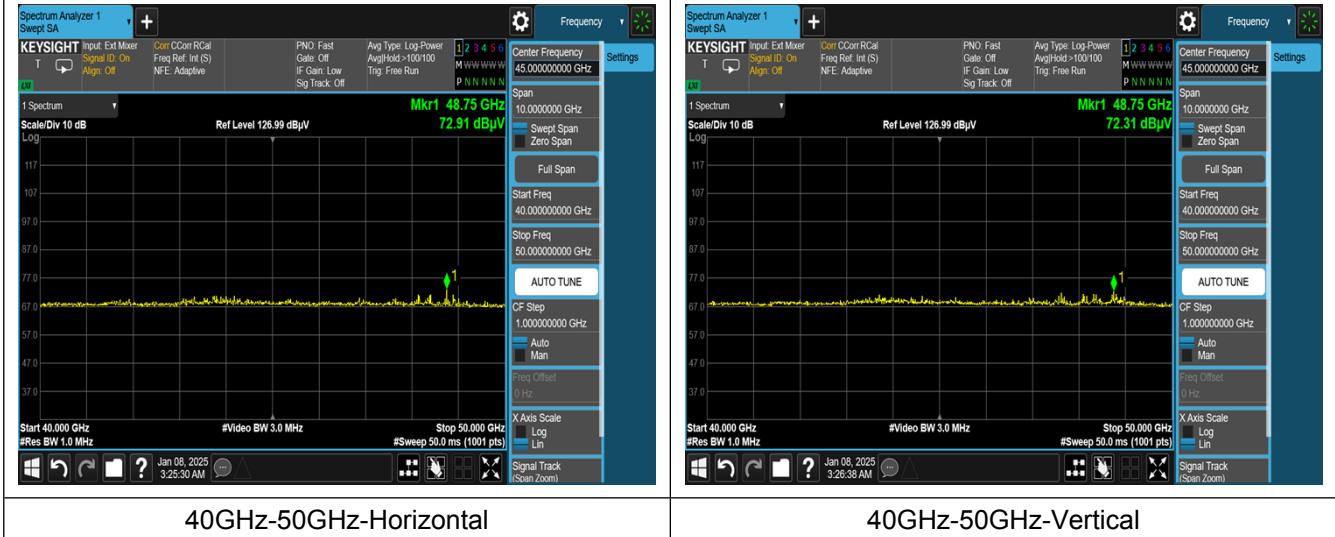


Frequency (GHz)	Distance (M)	PK Value (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Polarization	Result
48.75	3	72.91	105.31	85.31	Horizontal	PASS
48.75	3	72.31	105.31	85.31	Vertical	PASS




Frequency (GHz)	Distance (M)	PK Value (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Polarization	Result
51.547	3	66.81	105.31	85.31	Horizontal	PASS
51.540	3	82.33	105.31	85.31	Vertical	PASS

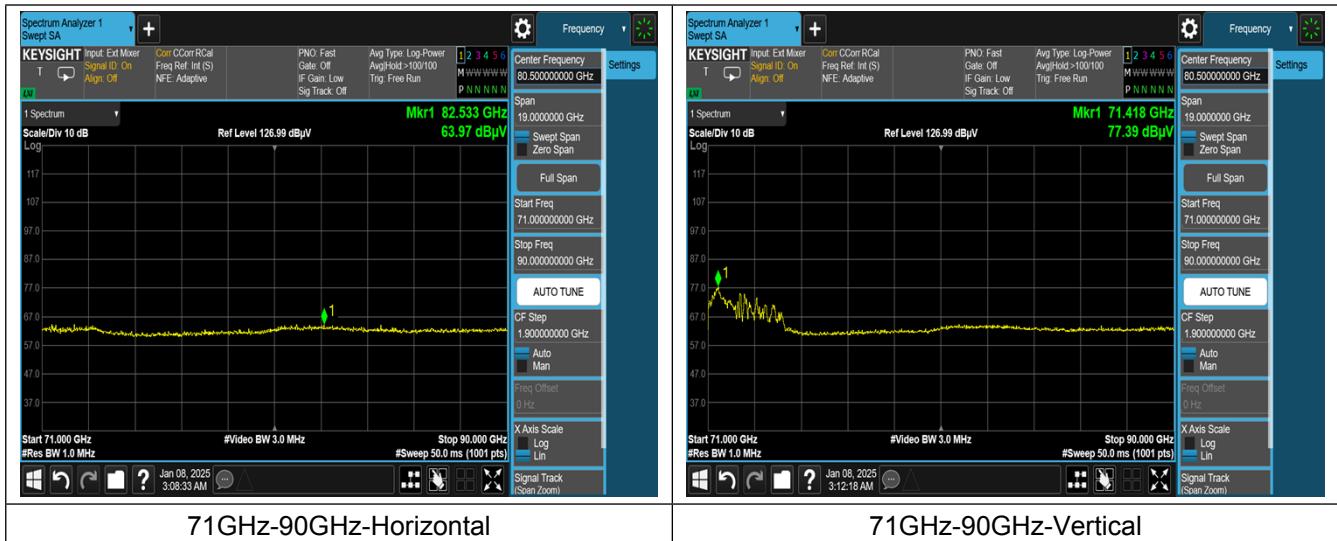

Frequency (GHz)	Distance (M)	PK Value (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Polarization	Result
82.533	3	63.97	105.31	85.31	Horizontal	PASS
71.418	3	77.39	105.31	85.31	Vertical	PASS

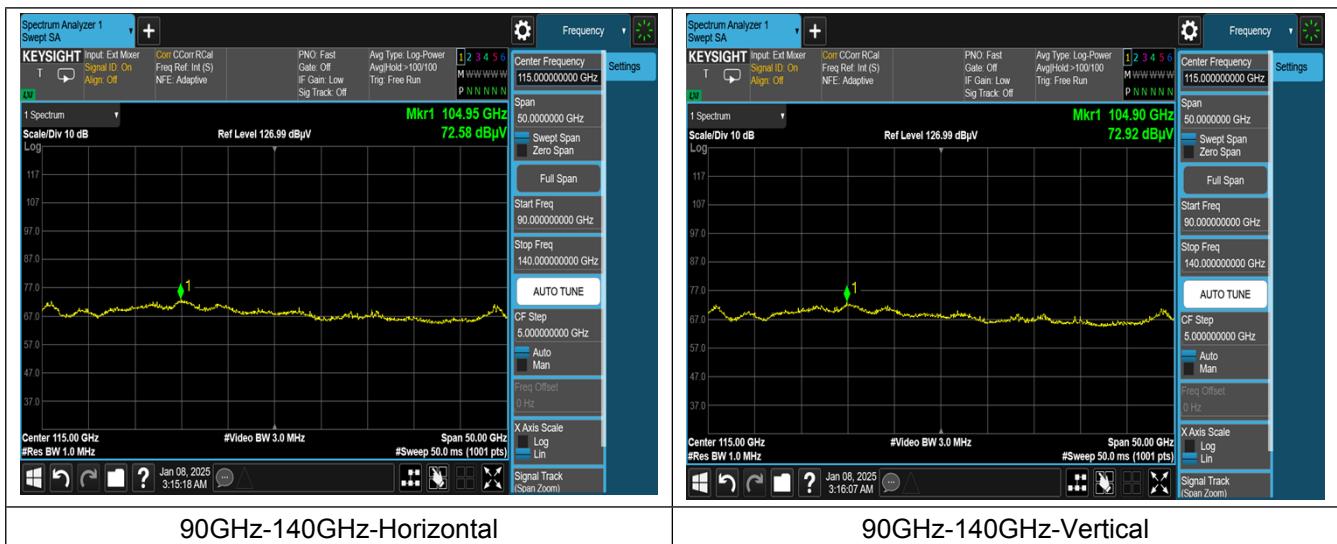

Frequency (GHz)	Distance (M)	PK Value (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Polarization	Result
104.95	3	72.58	105.31	85.31	Horizontal	Pass
104.90	3	72.92	105.31	85.31	Vertical	Pass

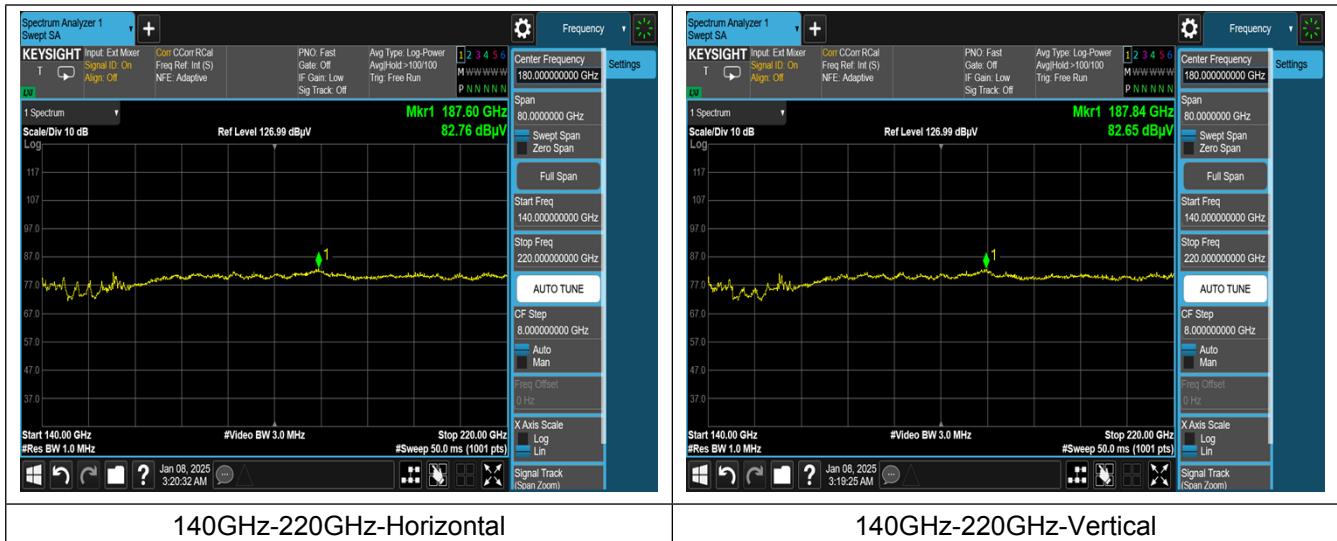

Frequency (GHz)	Distance (M)	PK Value (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Polarization	Result
187.60	3	82.76	105.31	85.31	Horizontal	Pass
187.84	3	82.65	105.31	85.31	Vertical	Pass

## 10.5 Frequency stability

Frequency Stability vs temperature:

Test for 57GHz to 64GHz (Channel=60.731GHz)

Temperature (°C)	Voltage (V AC)	F <sub>L</sub> (GHz)	Limit (GHz)	F <sub>H</sub> (GHz)	Limit (GHz)	Result
35	120	59.2117	57	62.2604	64	Pass
30	120	59.2115	57	62.2607	64	Pass
20	120	59.2117	57	62.2604	64	Pass
10	120	59.2113	57	62.2606	64	Pass
0	120	59.2116	57	62.2605	64	Pass
20	102	59.2115	57	62.2607	64	Pass
20	138	59.2113	57	62.2606	64	Pass

Remark 1: F<sub>L</sub>: Frequency Low Band Edge, F<sub>H</sub>: Frequency High Band Edge

Remark 2: We use 0 degrees Celsius as lowest voltage, 35 degrees Celsius as highest voltage in extreme environment test since the absolute working voltage of EUT is 0~35°C.