

1. Antenna Description:

Antenna type	PIFA antenna
Model	HI3-2
Frequency range	2400-2500MHz, 5180-5240MHz, 5745-5825MHz
Manufacturer	Shenzhen Shuwei Technology Co., Limited
Address	4th Floor, Building 2, Haomai High-tech Park, No.387 Huating Rd, Dalang St, Longhua District, Shenzhen, China
ANT Peak Gain	2400-2500MHz: 2.6 dBi 5180-5240MHz: 3.2 dBi 5745-5825MHz: 3.2 dBi

2. Antenna Photo:

Length: 31.93mm
Width: 17.50mm





3. Test Equipment & Conditions

3.1 Test instrument

VSWR is tested using Agilent E5071B connected to a hand mechanism, and the status is free space.

3.2 Test environment and methods


Dark room specifications: ETS-743

TD-SCDMA test equipment: StarPoint SP6010/Agilent 8960

LTE-TDD/FDD-SCDMA test equipment: StarPoint SP8011/CMW500


WCDMA/GSM/CDMA test equipment: Agilent 8960

Passive efficiency testing equipment: Agilent Technologies E5071B

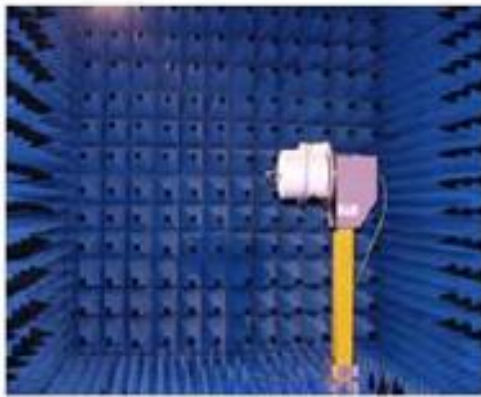


4 . Antenna Radiation Pattern


2400MHz

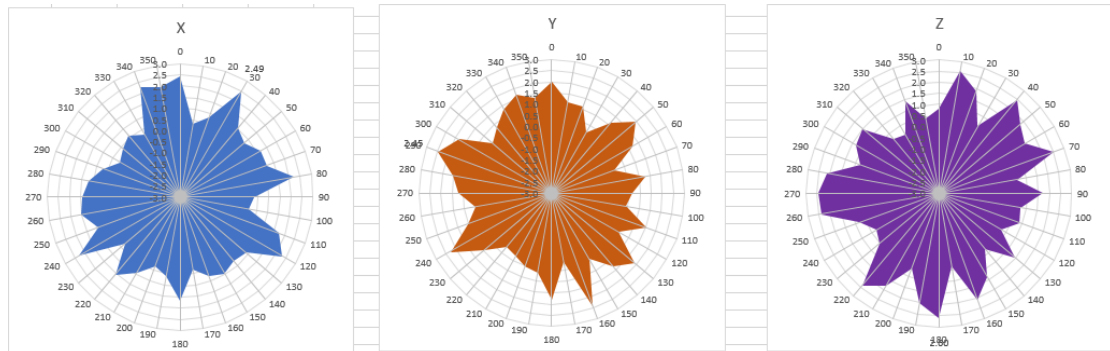


2450MHz

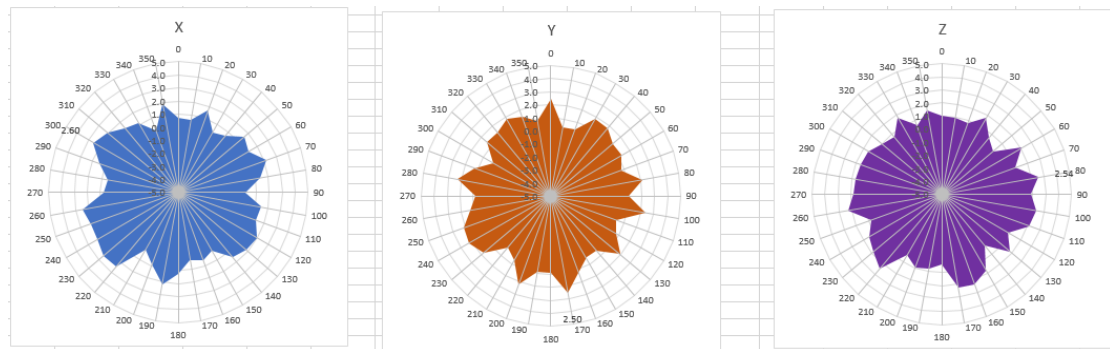


2500MHz

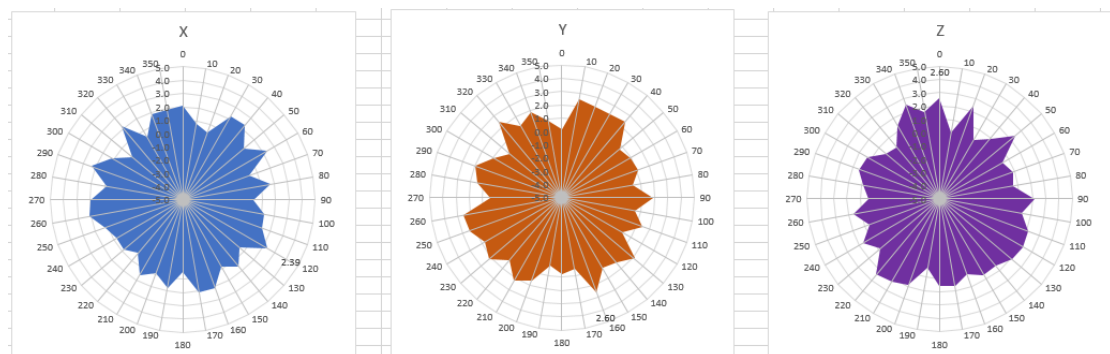



5180MHz

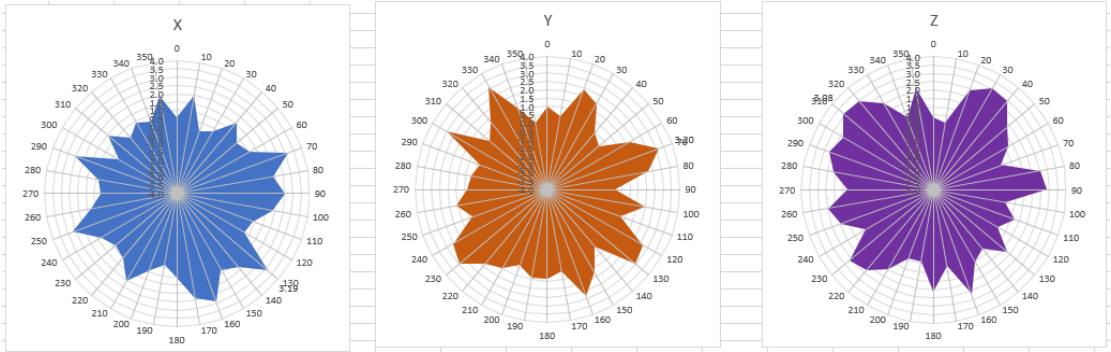


5220MHz

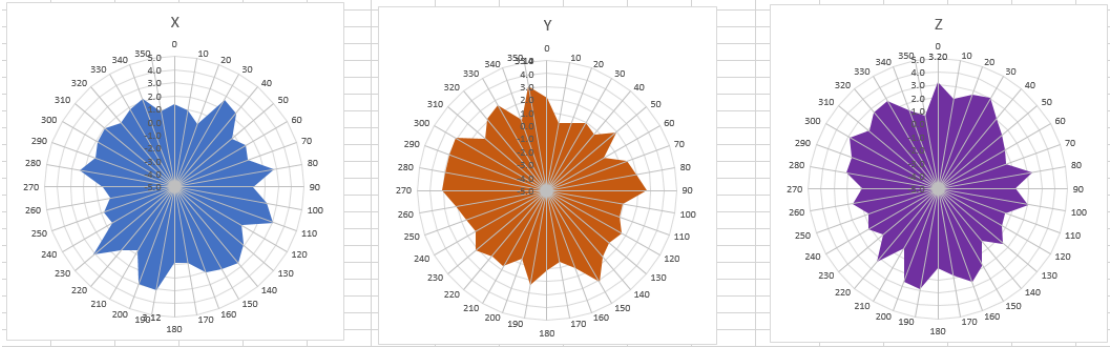


5240MHz

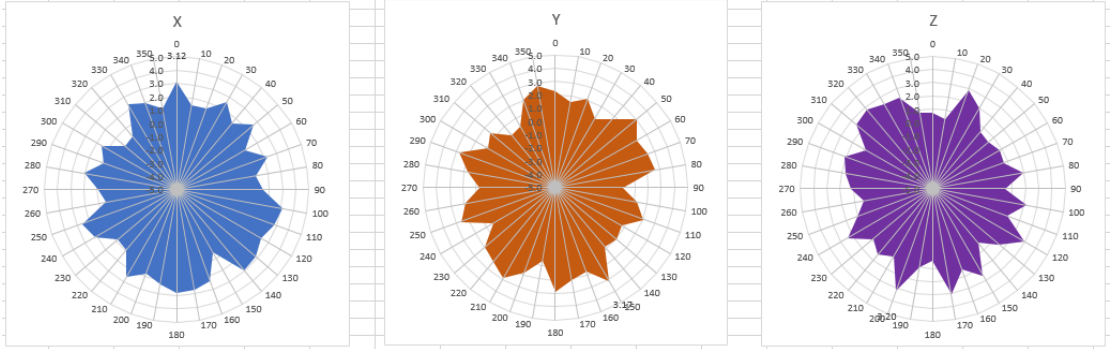

5745MHz

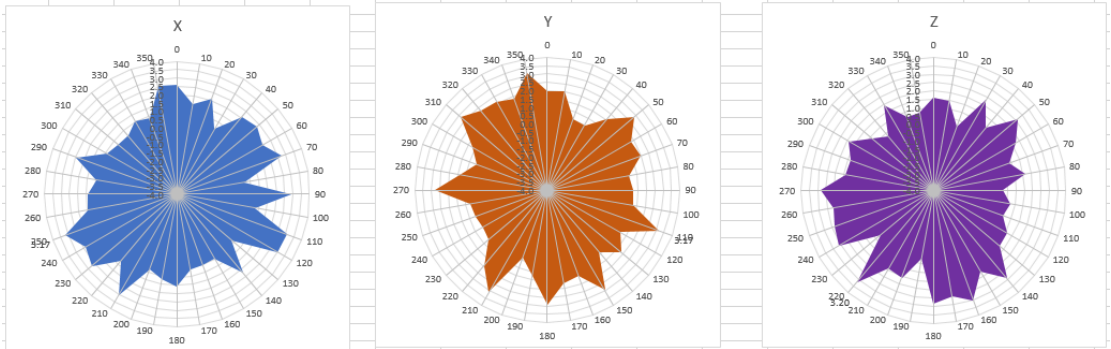

5785MHz

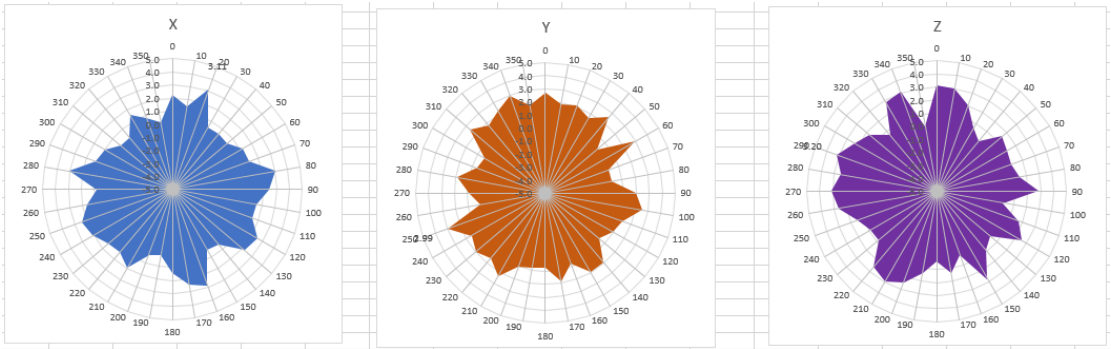

5825MHz

