



FCC RADIO TEST REPORT

FCC ID : 2BNGI-ANS86
Equipment : Tusk Frequence Dash Hub
Brand Name : Tusk
Model Name : 2138500001
Applicant : Rocky Mountain ATV/MC
1551 American Way, Payson, UT 84651
Manufacturer : Rocky Mountain ATV/MC
1551 American Way, Payson, UT 84651
Standard : FCC Part 15 Subpart C §15.247

The product was received on Dec. 23, 2024 and testing was performed from Jan. 08, 2024 to Apr. 03, 2025. We, Sporton International (USA) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International (USA) Inc., the test report shall not be reproduced except in full.

Approved by: Neil Kao

Sporton International (USA) Inc.
1175 Montague Expressway, Milpitas, CA 95035



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	5
2 Test Configuration of Equipment Under Test	6
2.1 Carrier Frequency Channel	6
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	8
2.6 Measurement Results Explanation Example.....	9
3 Test Result.....	10
3.1 Number of Channel Measurement	10
3.2 Hopping Channel Separation Measurement	11
3.3 Dwell Time Measurement.....	12
3.4 20dB and 99% Bandwidth Measurement	13
3.5 Output Power Measurement.....	14
3.6 Conducted Band Edges Measurement.....	15
3.7 Conducted Spurious Emission Measurement	16
3.8 Radiated Band Edges and Spurious Emission Measurement	17
3.9 Antenna Requirements.....	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	23
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission Test Data	
Appendix C. Duty Cycle Plots	
Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR241204002-01A	01	Initial issue of report	Mar. 28, 2025
FR241204002-01A	02	Revise Appendix A. This report is an updated version, replacing the report issued on Mar. 28, 2025	Apr. 10, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Pass	-
3.5	15.247(b)(1) 15.247(b)(4)	Peak Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	-
-	15.207	AC Conducted Emission	Not Required	See Note
3.9	15.203	Antenna Requirement	Pass	-

Note: The power source method of the EUT is to use power supply (DC power source), and there is no other AC power port, after assessing, AC Conduction Emission test is not required.

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth		
Antenna Type Bluetooth: Monopole Antenna		
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	-1.72

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International (USA) Inc.
Test Site Location	1175 Montague Expressway, Milpitas, CA 95035 TEL : 408 9043300
Test Site No.	Sporton Site No.
	TH01-CA, 03CH01-CA

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: US1250

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2020

Remark: All the test items were validated and recorded in accordance with the standards without any modification during the testing.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst plane, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases		
Test Item	Data Rate / Modulation	
Conducted Test Cases	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK
	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz
Remark: - For Radiated Test Cases, the worst mode data rate 1Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission. - The detailed Radiated test modes are shown in Appendix B.		

2.3 Connection Diagram of Test System

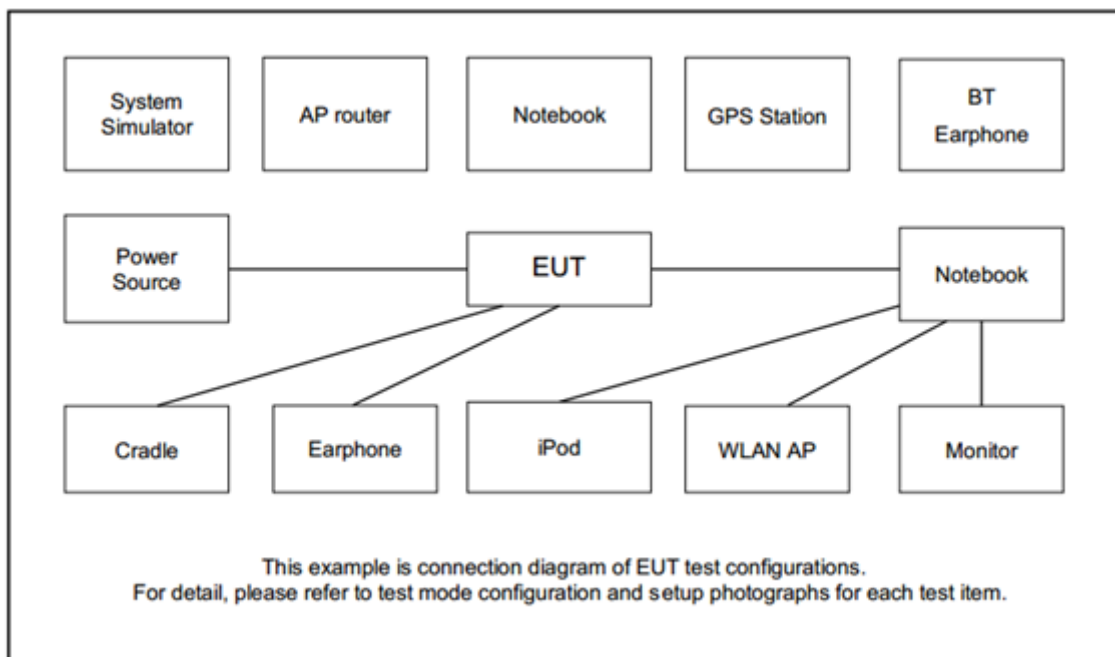

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	ASUS	ASUS EXPERTBOOK B1402CVA_B14 08CVA	PD9AX211NG	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m

2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term Version 4.95” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10 clause 7.8.3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300 kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup



3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10 clause 7.8.2.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300 kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10 clause 7.8.4.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

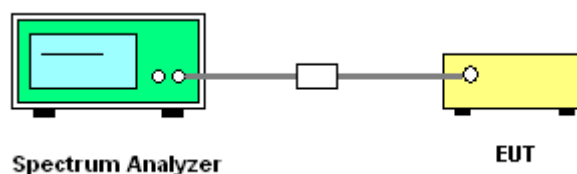

3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10 clause 6.9.2 and 6.9.3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Use the following spectrum analyzer settings for 20 dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW $\geq$ 1-5% of the 99% bandwidth; VBW $\geq$ 3 * RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

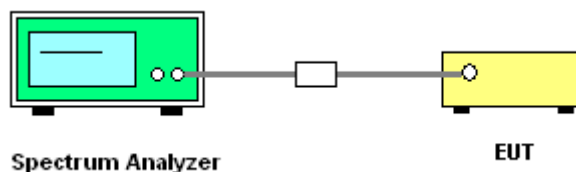

3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.

3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.
If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10 clause 7.8.5.
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

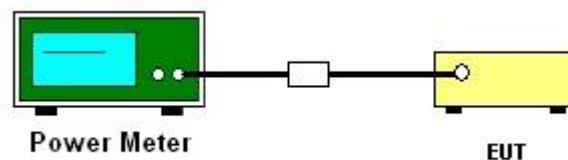

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10 clause 7.8.6.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2 and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

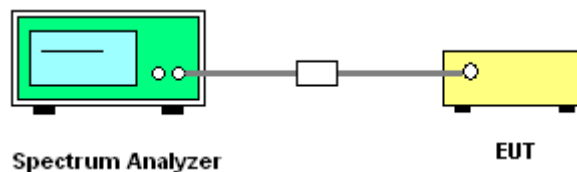

3.6.5 Test Result of Conducted Band Edges

Please refer to Appendix A.

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Please refer to Appendix A.

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10 clause 7.8.8.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurious must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

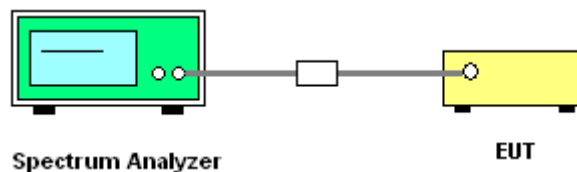

3.7.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A.

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics / spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.8.3 Test Procedures


1. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT is arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz, RBW = 1 MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log$ (Duty cycle)
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
8. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.


Note: The average levels are calculated from the peak level corrected with duty cycle correction factor (-42.38dB for 1Mbps and -42.16dB for 2Mbps) derived from $20 \log$ (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated test below 30MHz

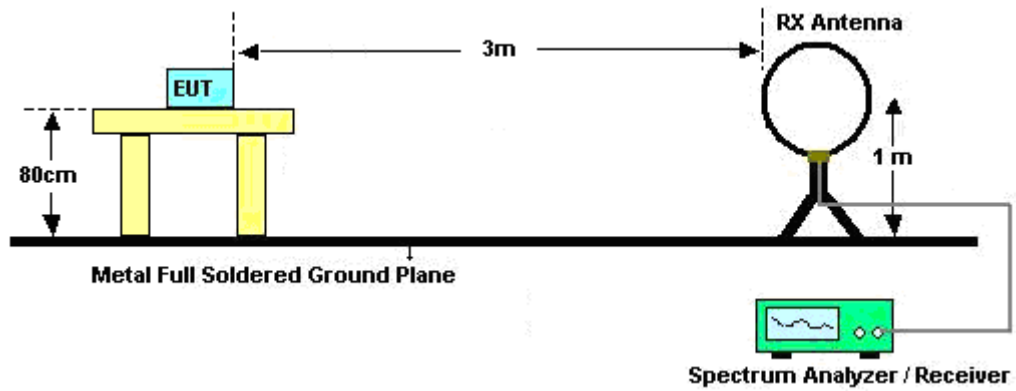


For radiated test from 30MHz to 1GHz

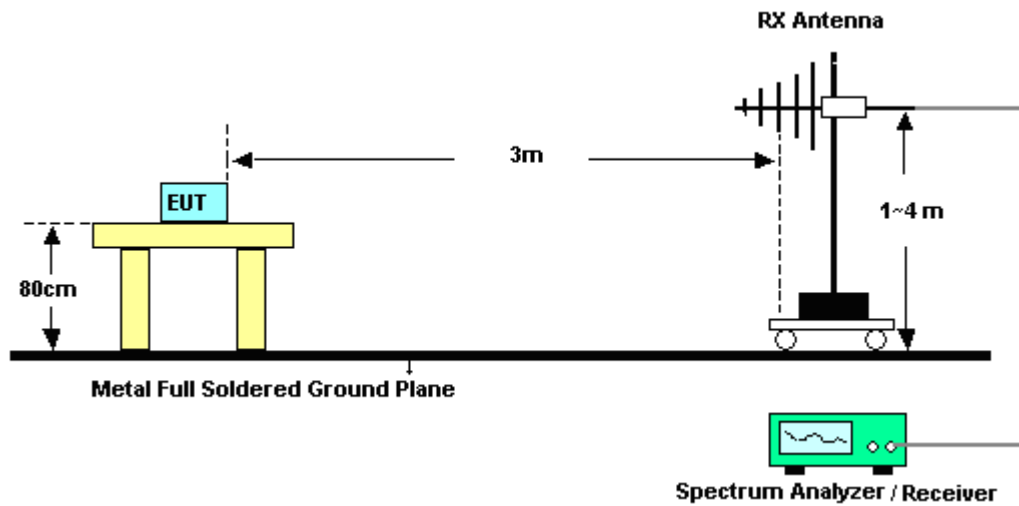

For radiated test from 1GHz to 18GHz

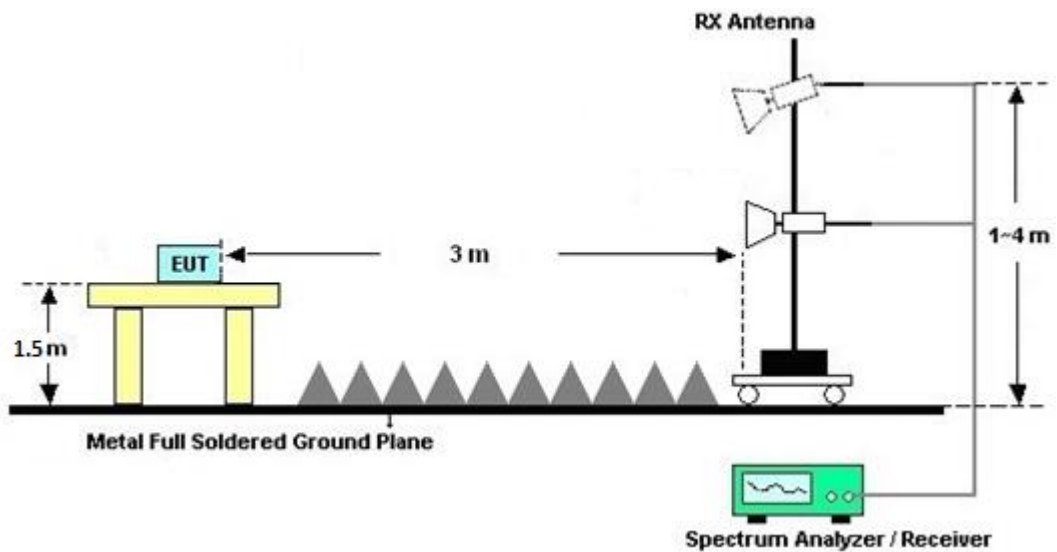

For radiated test above 18GHz

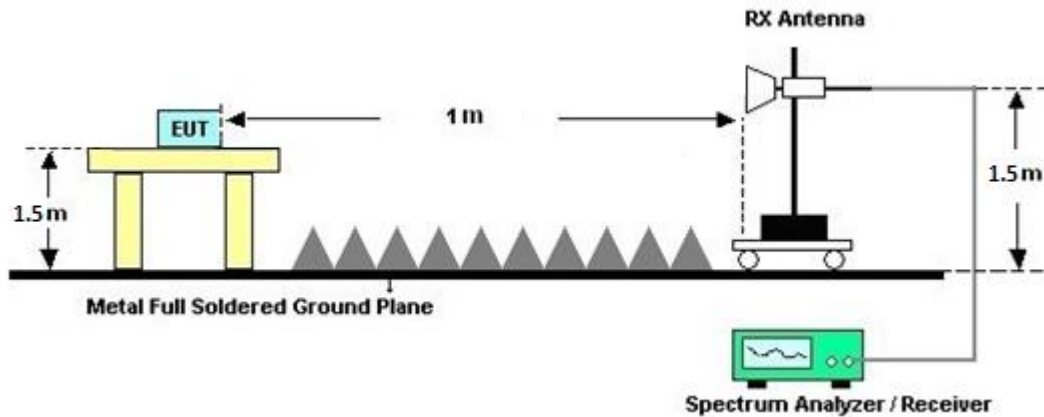

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.8.7 Duty Cycle

Please refer to Appendix C.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.9 Antenna Requirements

3.9.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.9.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	6111D	54683	30MHz~1GHz	Nov. 15, 2024	Jan. 08, 2024~ Feb. 26, 2024	Nov. 14, 2025	Radiation (03CH01-CA)
Loop Antenna	R&S	HFH2-Z2E	100840	9kHz~30MHz	May 02, 2024	Jan. 08, 2024~ Feb. 26, 2024	May 01, 2025	Radiation (03CH01-CA)
Horn Antenna	SCHWARZBECK	BBHA 9120D	02113	1GHz~18GHz	Apr. 26, 2024	Jan. 08, 2024~ Feb. 26, 2024	Apr. 25, 2025	Radiation (03CH01-CA)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00841	18GHz~40GHz	Aug. 07, 2024	Jan. 08, 2024~ Feb. 26, 2024	Aug. 06, 2025	Radiation (03CH01-CA)
Amplifier	SONOMA	310N	372241	9kHz~1GHz	Apr. 24, 2024	Jan. 08, 2024~ Feb. 26, 2024	Apr. 23, 2025	Radiation (03CH01-CA)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OST	SN9	3GHz High Pass Filter	Jun. 04, 2024	Jan. 08, 2024~ Feb. 26, 2024	Jun. 03, 2025	Radiation (03CH01-CA)
Filter	Wainwright	WLK12-1200-1 272-11000-40 SS	SN1	1.2GHz Low Pass Filter	Jun. 04, 2024	Jan. 08, 2024~ Feb. 26, 2024	Jun. 03, 2025	Radiation (03CH01-CA)
Preamplifier	Keysight	83017A	MY53270321	1GHz~26.5GHz	Apr. 25, 2024	Jan. 08, 2024~ Feb. 26, 2024	Apr. 24, 2025	Radiation (03CH01-CA)
Preamplifier	E-instrument	ERA-100M-18 G-56-01-A70	EC1900252	1GHz~18GHz	Apr. 25, 2024	Jan. 08, 2024~ Feb. 26, 2024	Apr. 24, 2025	Radiation (03CH01-CA)
Preamplifier	EMEC	EMC18G40G	060726	18G-40G	Apr. 04, 2024	Jan. 08, 2024~ Feb. 26, 2024	Apr. 03, 2025	Radiation (03CH01-CA)
RF Cable	HUBER+SUHNER	SUCOFLEX 102	8015932/2, 8015762/2, 804938/2	N/A	Mar. 05, 2024	Jan. 08, 2024~ Feb. 26, 2024	Mar. 04, 2025	Radiation (03CH01-CA)
Hygrometer	TESEO	608-H1	45142559	N/A	Aug. 14, 2024	Jan. 08, 2024~ Feb. 26, 2024	Aug. 13, 2025	Radiation (03CH01-CA)
Controller	Chaintek	EM-1000	060881	Control Turn Table & Antenna Mast	N/A	Jan. 08, 2024~ Feb. 26, 2024	N/A	Radiation (03CH01-CA)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 08, 2024~ Feb. 26, 2024	N/A	Radiation (03CH01-CA)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 08, 2024~ Feb. 26, 2024	N/A	Radiation (03CH01-CA)
Test Software	Audix E3	E3 230621 Sporton US,V9	PK-002093	N/A	N/A	Jan. 08, 2024~ Feb. 26, 2024	N/A	Radiation (03CH01-CA)
Hygrometer	Testo	608-H1	45141354	N/A	Aug. 14, 2024	Apr. 03, 2025	Aug. 13, 2025	Conducted (TH01-CA)
Power Meter	Anritsu	ML2495A	1804004	N/A	Apr. 25, 2024	Apr. 03, 2025	Apr. 24, 2025	Conducted (TH01-CA)
Spectrum analyzer	Rhodes & Schwarz	FSV40	101545	10Hz~40GHz	Apr. 25, 2024	Apr. 03, 2025	Apr. 24, 2025	Conducted (TH01-CA)
Switch Box	EM Electronics	EMSW26	1090304	N/A	Oct. 04, 2024	Apr. 03, 2025	Oct. 03, 2025	Conducted (TH01-CA)

5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Venkata Kondepudi	Temperature:	18.9~20.5	°C
Test Date:	2025/4/3	Relative Humidity:	43.2~45.2	%

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.929	0.818	0.990	0.6192	Pass
DH	1Mbps	1	39	2441	0.925	0.812	0.994	0.6166	Pass
DH	1Mbps	1	78	2480	0.929	0.811	1.003	0.6192	Pass
2DH	2Mbps	1	0	2402	1.297	1.170	1.003	0.8644	Pass
2DH	2Mbps	1	39	2441	1.298	1.171	0.990	0.8654	Pass
2DH	2Mbps	1	78	2480	1.286	1.171	1.020	0.8576	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time (hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
2DH5	79	106.670	2.90	0.31	0.4	Pass
2DH5 (AFH)	20	53.330	2.90	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	10.85	30.00	Pass
	39	1	11.25	30.00	Pass
	78	1	11.30	30.00	Pass
2DH1	0	1	13.24	20.97	Pass
	39	1	13.59	20.97	Pass
	78	1	13.58	20.97	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**


DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	9.97	5.23
	39	1	10.03	5.23
	78	1	10.34	5.23
2DH1	0	1	9.75	5.11
	39	1	10.41	5.11
	78	1	10.22	5.11

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass






Number of Hopping Frequency

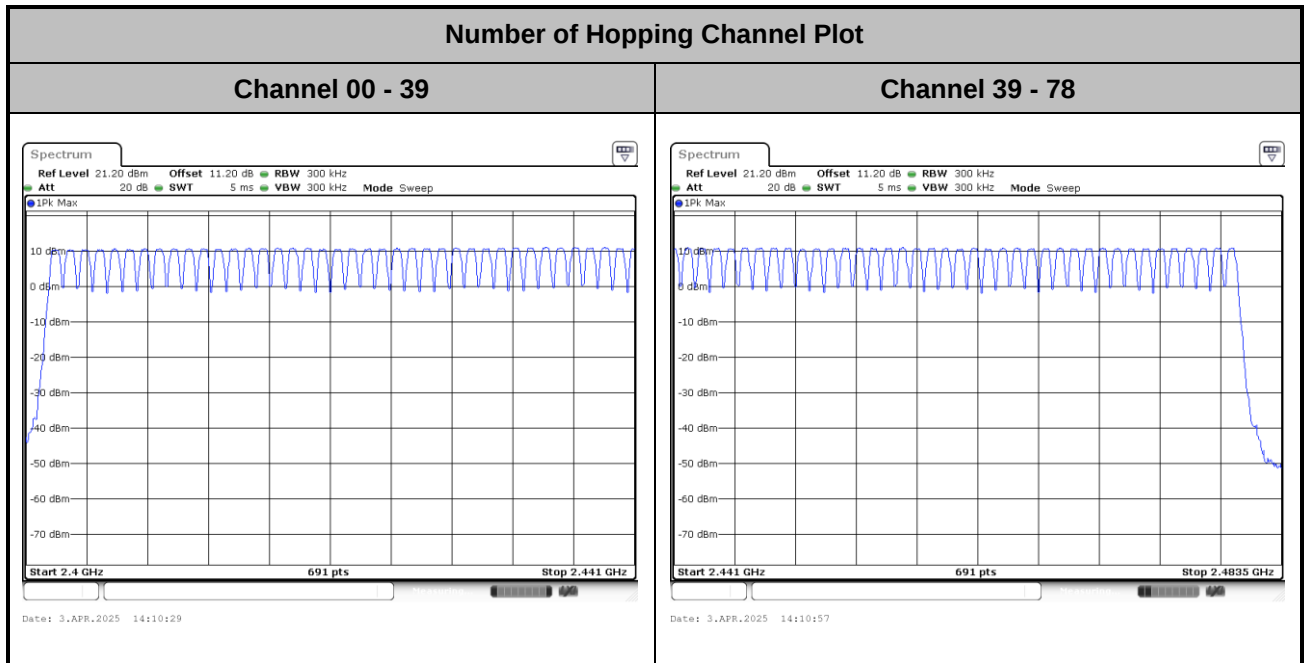

**Hopping Channel Separation**


<1Mbps>

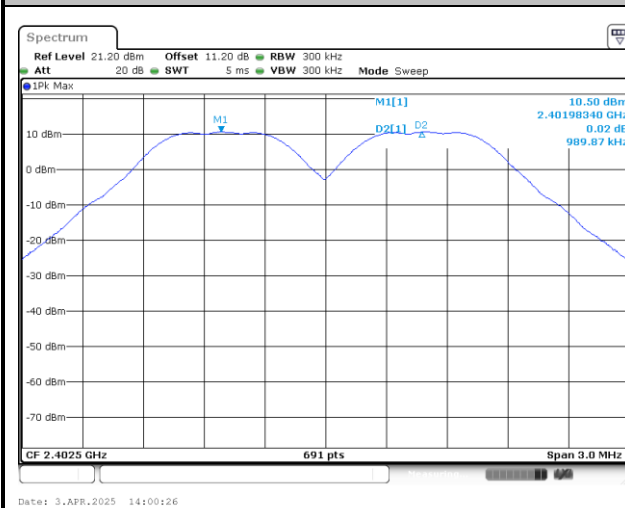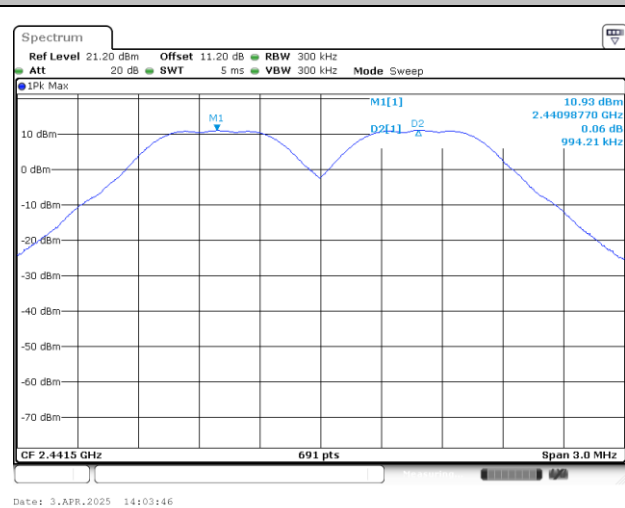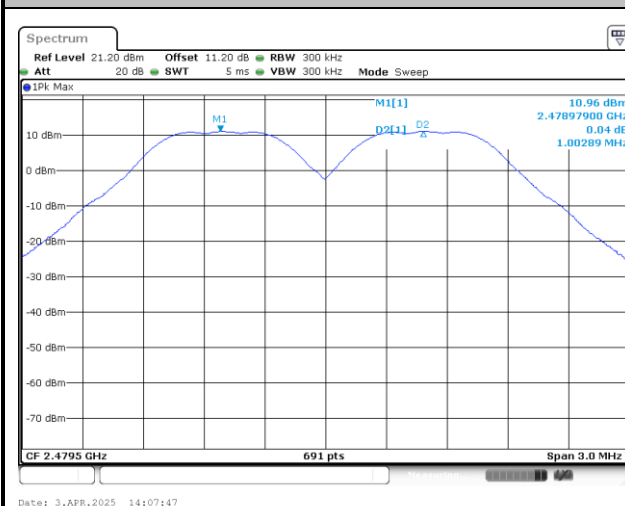Channel Separation Plot on Channel 00 - 01**Channel Separation Plot on Channel 39 - 40****Channel Separation Plot on Channel 77 - 78**




<2Mbps>


Channel Separation Plot on Channel 00 - 01

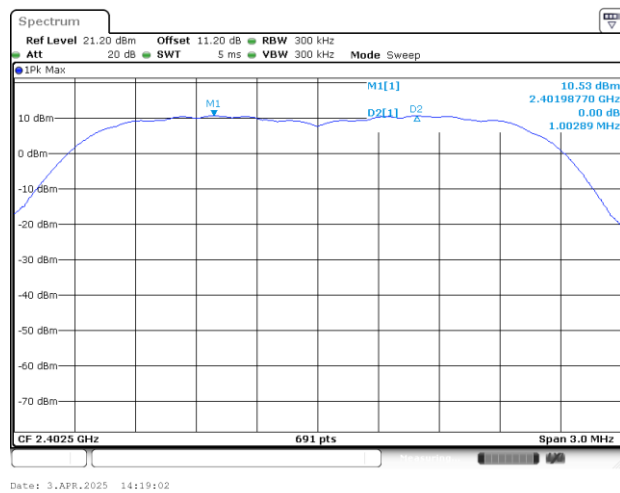

Channel Separation Plot on Channel 39 - 40

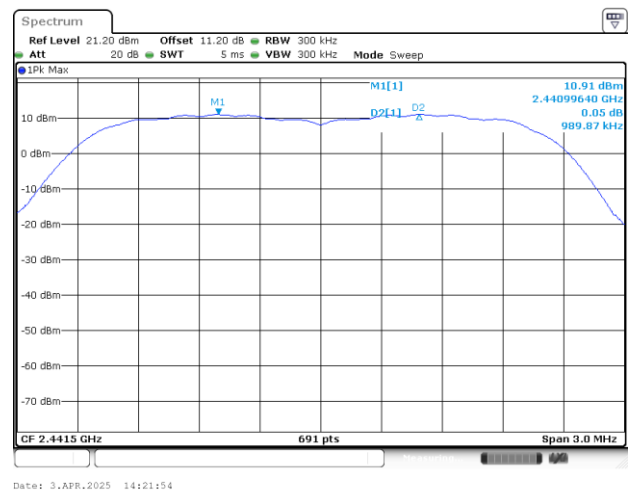


Channel Separation Plot on Channel 77 - 78

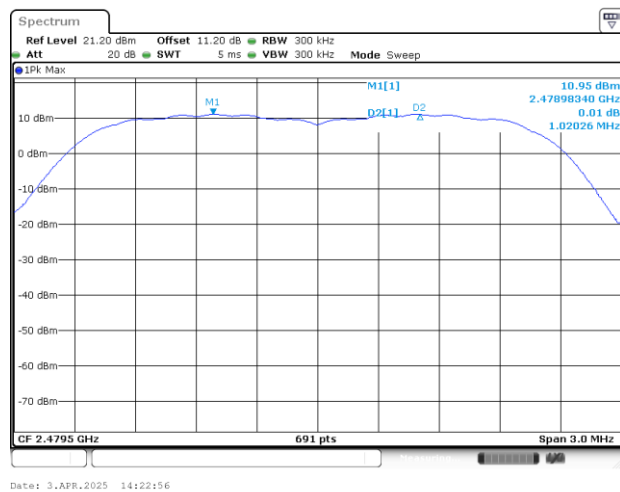


20dB Bandwidth

<1Mbps>


20 dB Bandwidth Plot in Channel 00

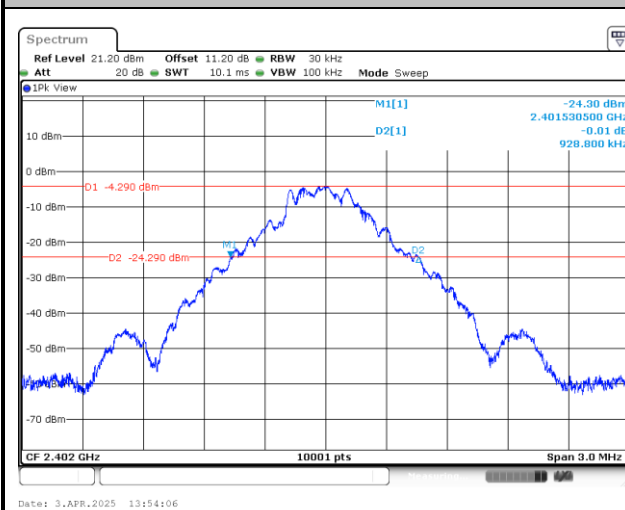

20 dB Bandwidth Plot in Channel 39

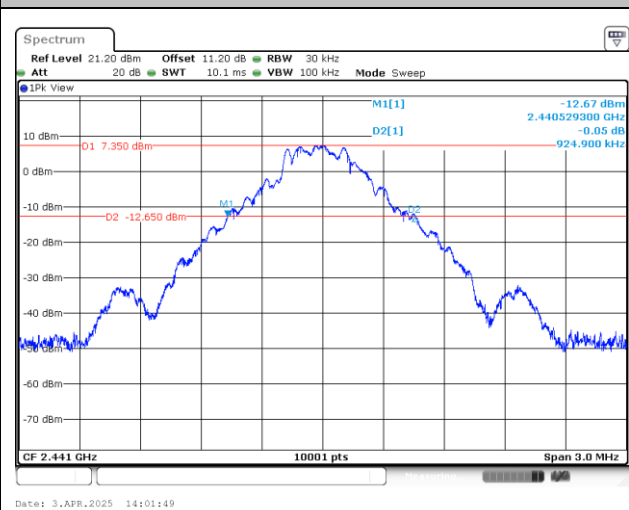


20 dB Bandwidth Plot in Channel 78

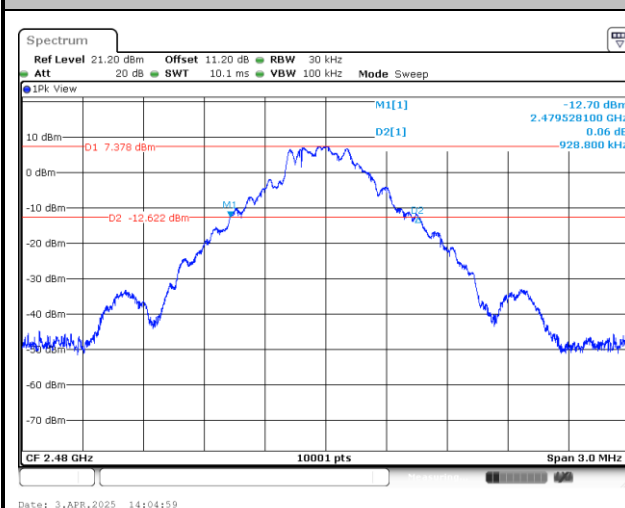




<2Mbps>


20 dB Bandwidth Plot in Channel 00

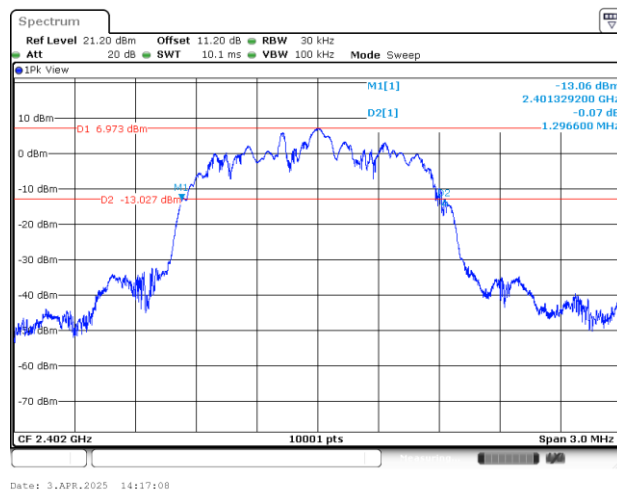

20 dB Bandwidth Plot in Channel 39



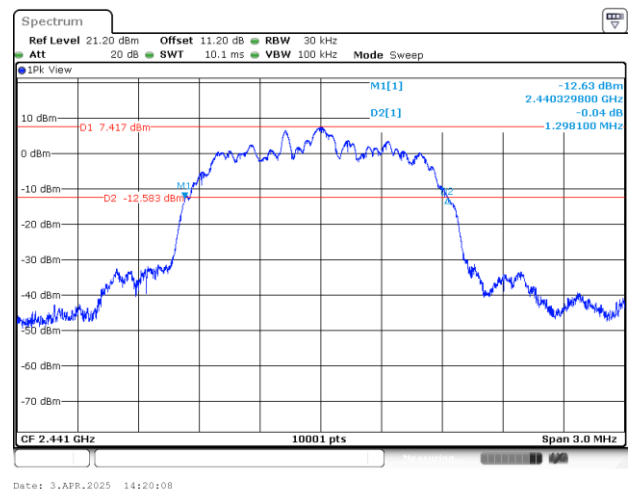


20 dB Bandwidth Plot in Channel 78

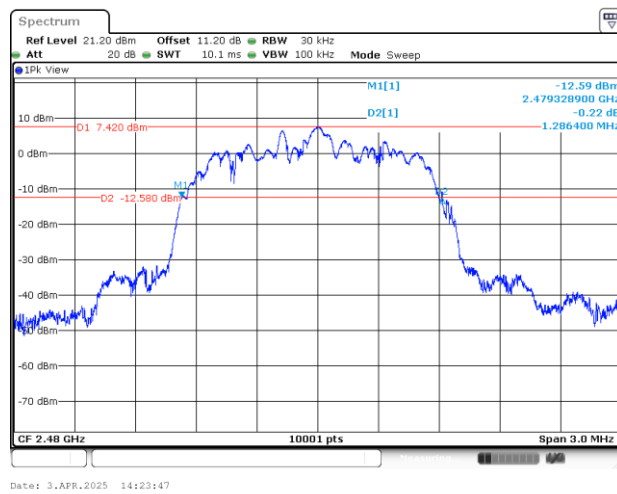

**99% Occupied Bandwidth**


<1Mbps>

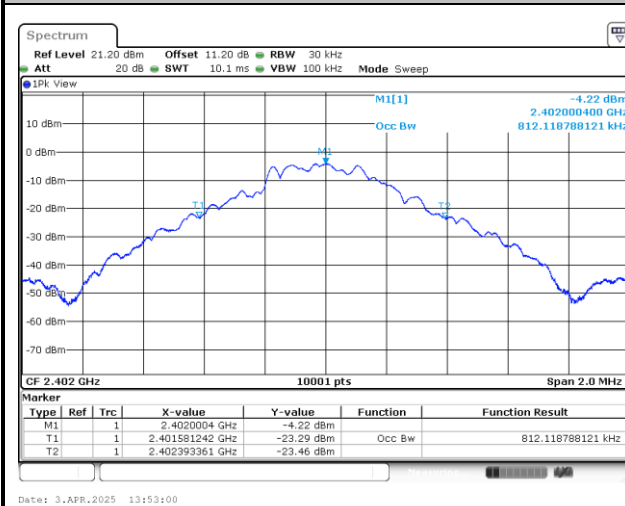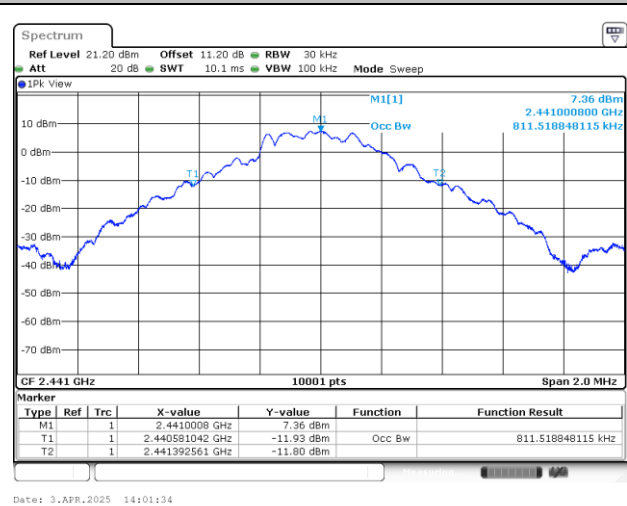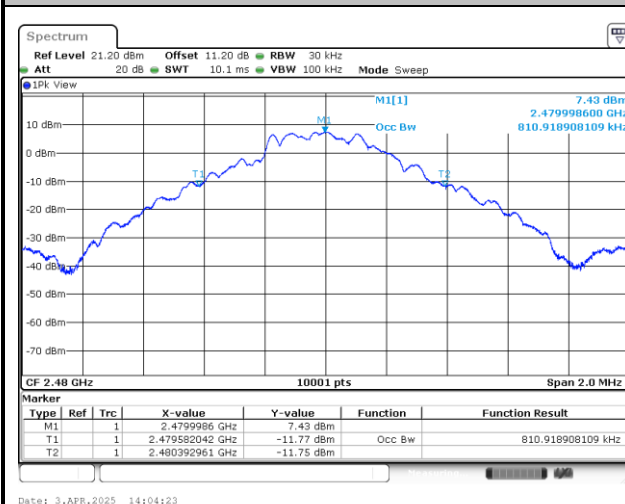99% Occupied Bandwidth on Channel 00**99% Occupied Bandwidth on Channel 39****99% Occupied Bandwidth on Channel 78**




<2Mbps>


99% Occupied Bandwidth on Channel 00

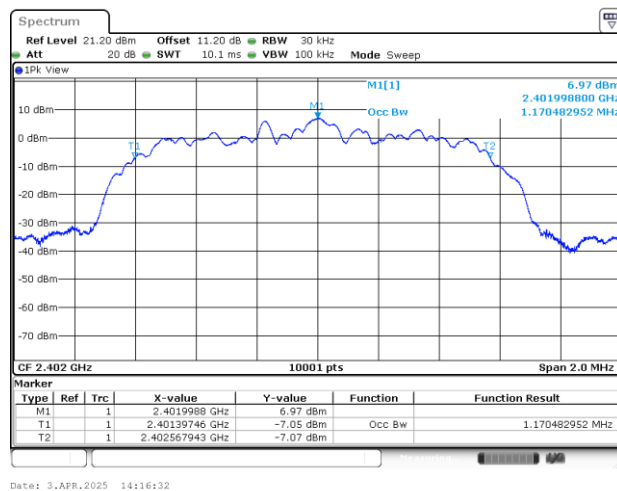

99% Occupied Bandwidth on Channel 39


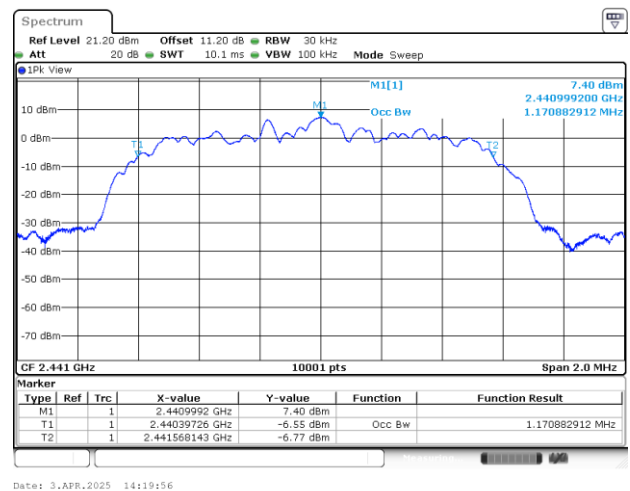


99% Occupied Bandwidth on Channel 78


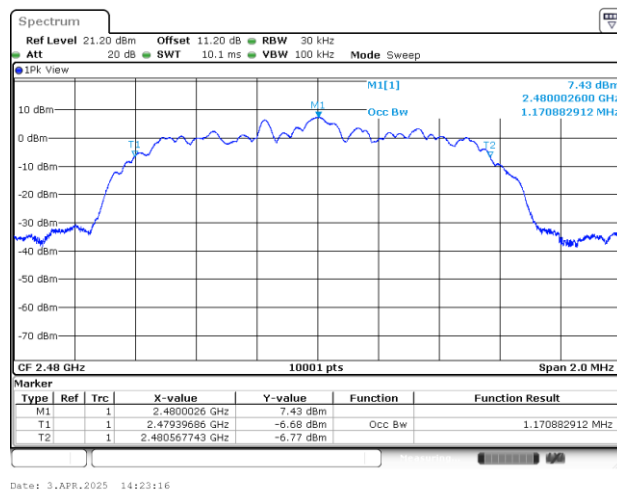


**Band Edges**

<1Mbps>

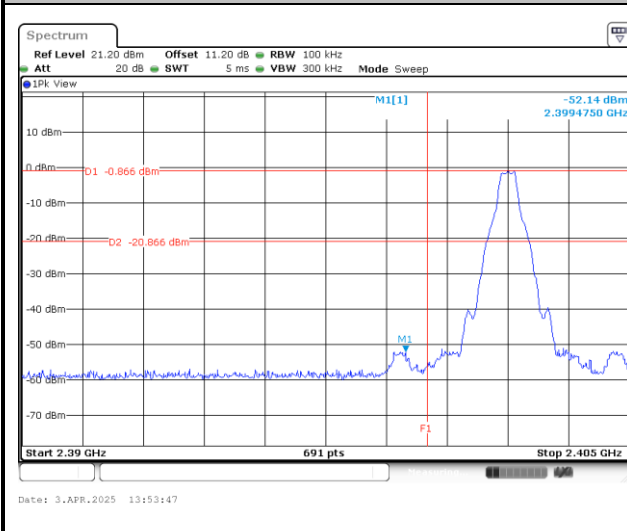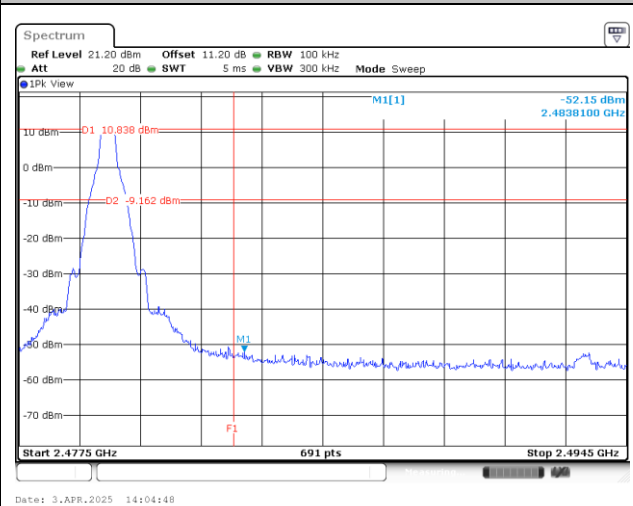Low Band Edge Plot on Channel 00**High Band Edge Plot on Channel 78**


<2Mbps>

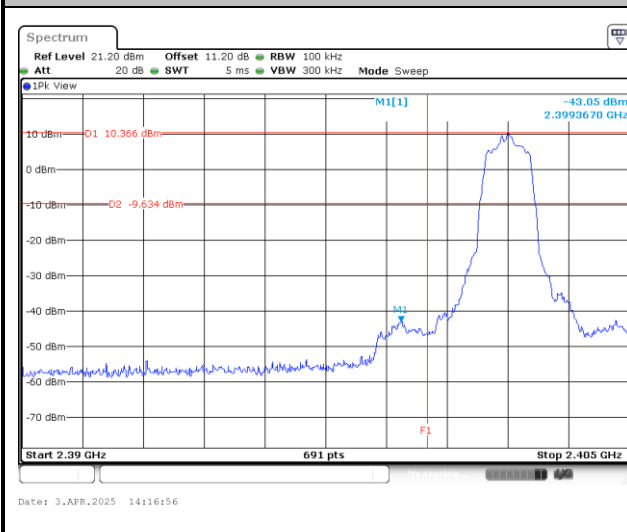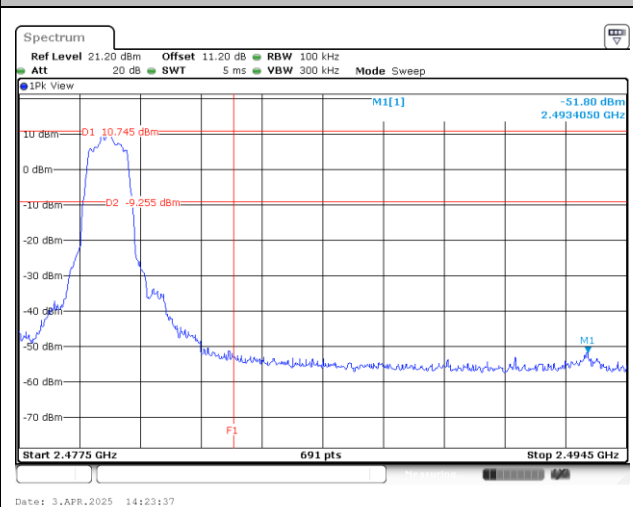Low Band Edge Plot on Channel 00**High Band Edge Plot on Channel 78**










Hopping Mode Band Edges







<1Mbps>

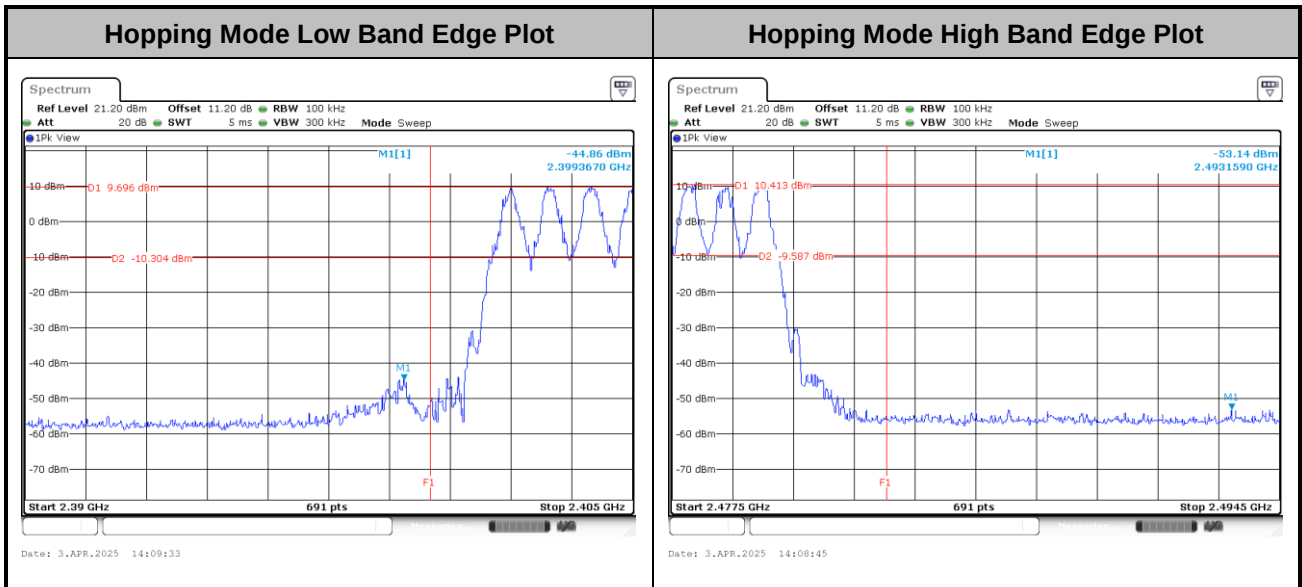

<2Mbps>

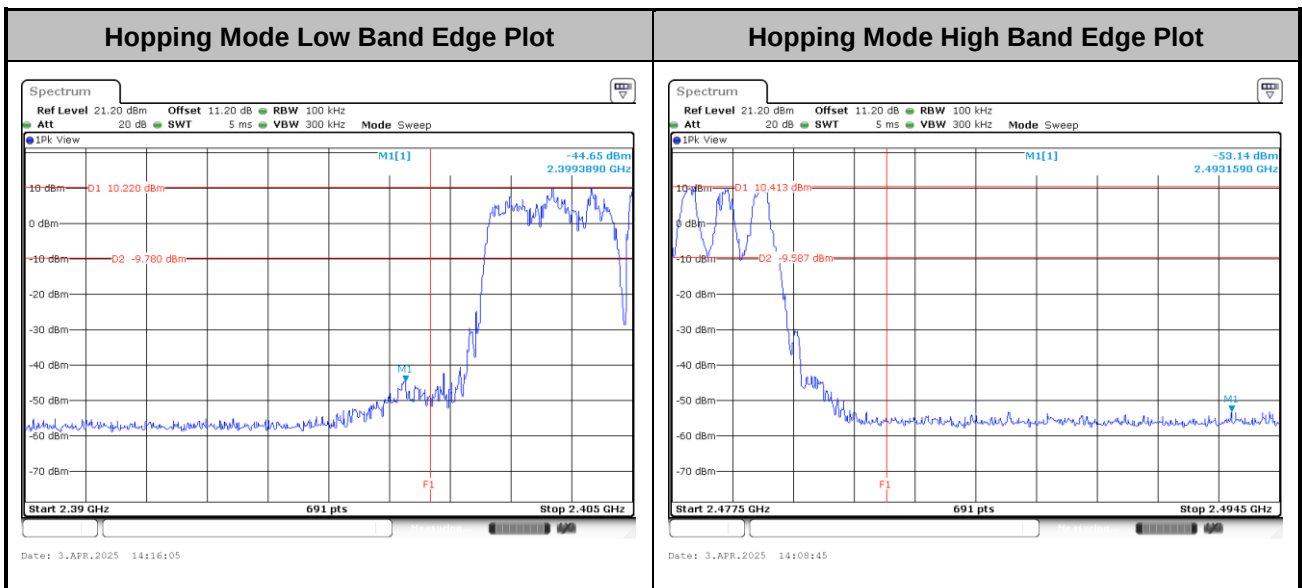

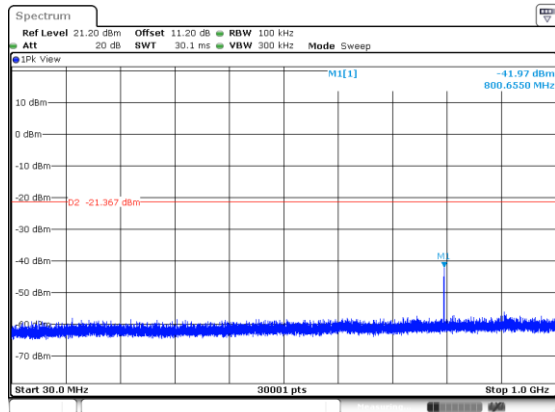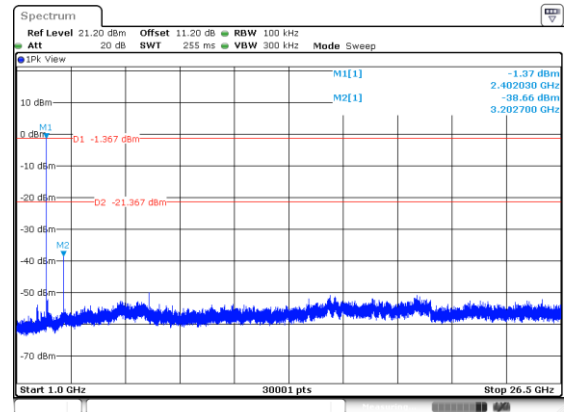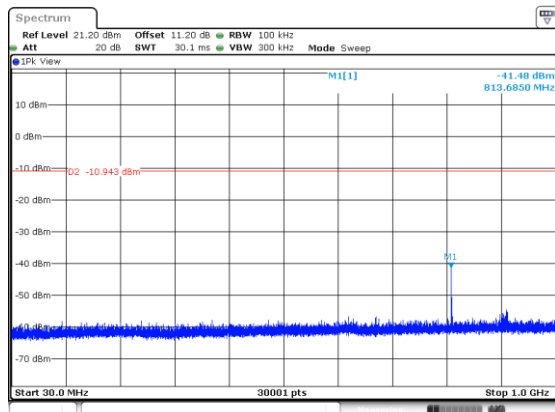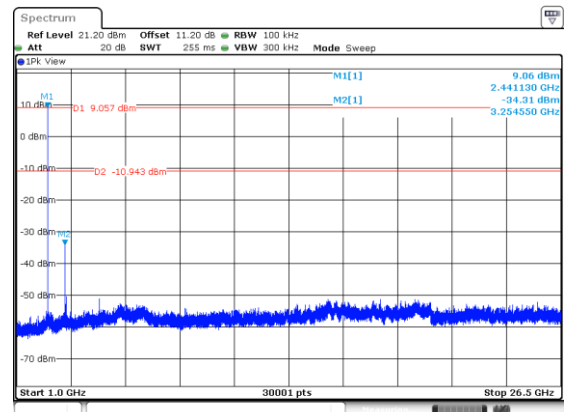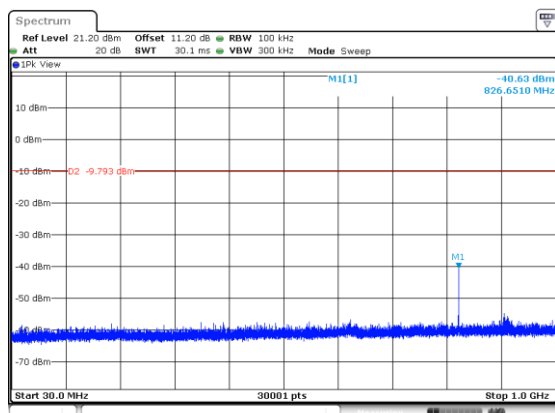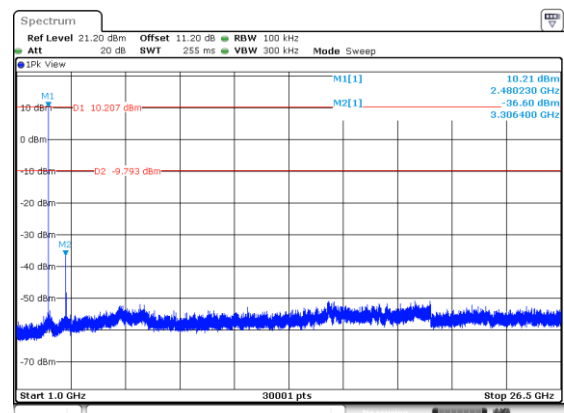Conducted Spurious Emission
<1Mbps>
CSE Plot on Low Ch between 30MHz ~ 1 GHz

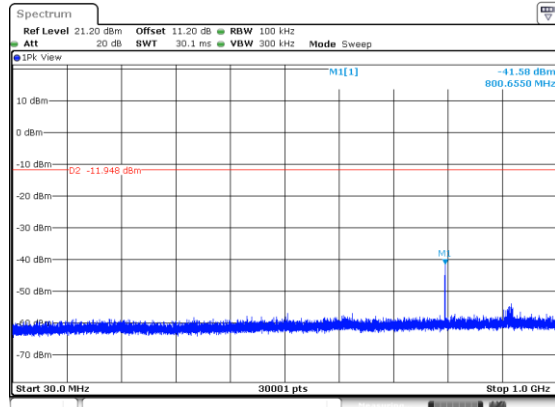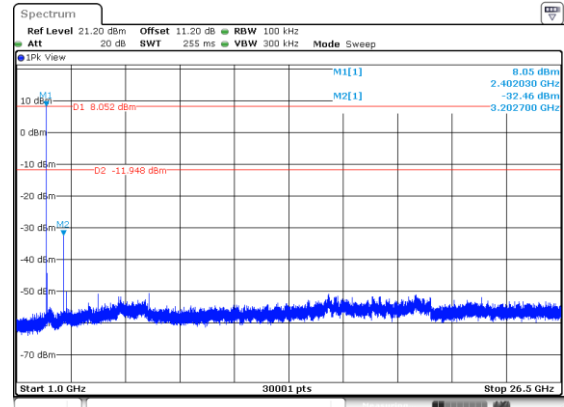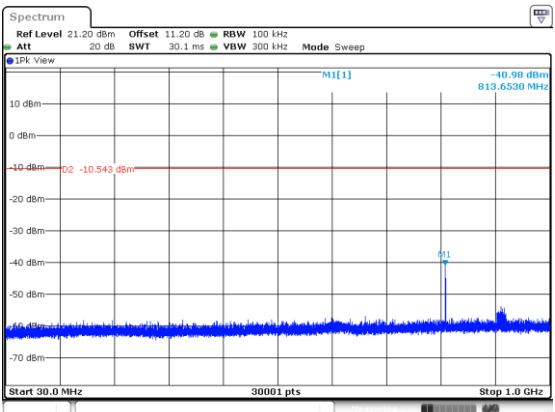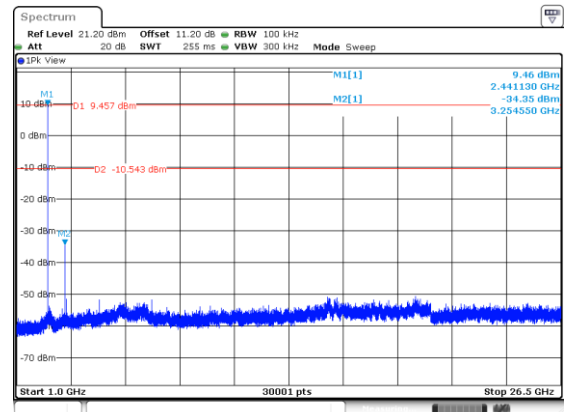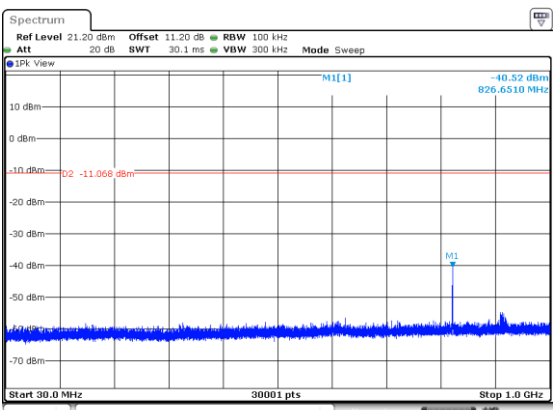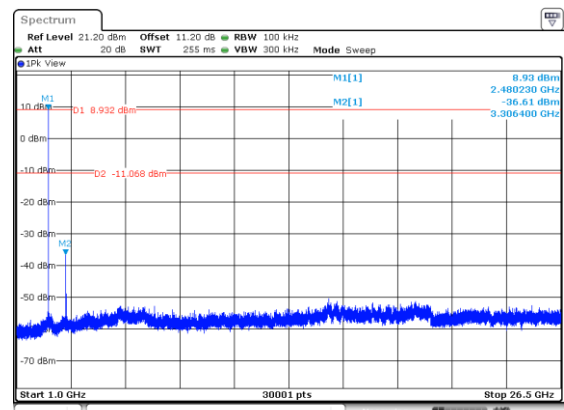CSE Plot on Low Ch between 1GHz ~ 26.5GHz

CSE Plot on Mid. Ch between 30MHz ~ 1 GHz

CSE Plot on Mid. Ch between 1GHz ~ 26.5GHz

CSE Plot on High Ch between 30MHz ~ 1 GHz

CSE Plot on High Ch between 1GHz ~ 26.5GHz


<2Mbps>
CSE Plot on Low Ch between 30MHz ~ 1 GHz

CSE Plot on Low Ch between 1GHz ~ 26.5GHz

CSE Plot on Mid. Ch between 30MHz ~ 1 GHz

CSE Plot on Mid. Ch between 1GHz ~ 26.5GHz

CSE Plot on High Ch between 30MHz ~ 1 GHz

CSE Plot on High Ch between 1GHz ~ 26.5GHz




Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Bill Chang , Fred Tseng , Jesse Fan	Temperature :	20.1~23.6°C
		Relative Humidity :	39.6~53.2%

Note symbol

-L	Low channel location
-R	High channel location



B1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth BR_GFSK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth BR_GFSK	39	2441	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth BR_GFSK	78	2480	1Mbps	-	-
Mode 4	2400-2483.5	1	Bluetooth BR_GFSK	0	2402	2Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth BR_GFSK	39	2441	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth BR_GFSK	78	2480	2Mbps	-	-
Mode 7	2400-2483.5	1	Bluetooth BR_GFSK	00	2402	1Mbps	-	LF
Mode 8	2400-2483.5	1	Bluetooth BR_GFSK	00	2402	1Mbps	-	SHF



B2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth BR_GFSK	00	2381.85	48.72	74.00	-25.28	V	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	00	3203.00	65.01	74.00	-8.99	V	Peak	Pass	-	Harmonic
2	Bluetooth BR_GFSK	39	2499.35	49.21	74.00	-24.79	V	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	39	3255.00	63.78	74.00	-10.22	V	Peak	Pass	-	Harmonic
3	Bluetooth BR_GFSK	78	2483.84	51.86	74.00	-22.14	V	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	78	3306.00	62.49	74.00	-11.51	V	Peak	Pass	-	Harmonic
4	Bluetooth BR_GFSK	0	2362.07	48.85	74.00	-25.15	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	0	3203.00	64.66	74.00	-9.34	H	Peak	Pass	-	Harmonic
5	Bluetooth BR_GFSK	39	2493.63	49.53	74.00	-24.47	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	39	3255.00	63.07	74.00	-10.93	V	Peak	Pass	-	Harmonic
6	Bluetooth BR_GFSK	78	2483.72	52.43	74.00	-21.57	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	78	3306.00	60.46	74.00	-13.54	H	Peak	Pass	-	Harmonic
7	LF	00	56.19	27.28	40.00	-12.72	V	Peak	Pass	-	LF
8	SHF	00	-	-	-	-	-	-	-	-	SHF

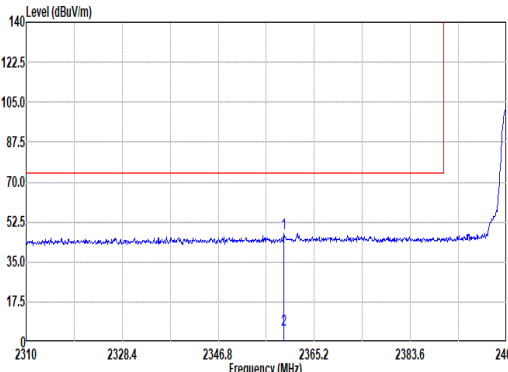
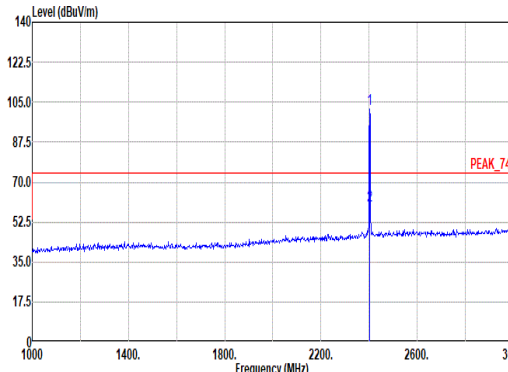


Mode	1																																																																																																																																		
	Band Edge																																																																																																																																		
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																																		
ANT	1																																																																																																																																		
Pol.	Horizontal	Fundamental																																																																																																																																	
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2359.31</td><td>47.66</td><td>74.00</td><td>-26.34</td><td>43.50</td><td>27.31</td><td>7.45</td><td>30.60</td><td>0.00</td><td>100</td><td>159</td><td>PEAK</td></tr><tr><td>2</td><td>2359.31</td><td>5.28</td><td>54.00</td><td>-48.72</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>159</td><td>AVERAGE</td></tr></table>			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	2359.31	47.66	74.00	-26.34	43.50	27.31	7.45	30.60	0.00	100	159	PEAK	2	2359.31	5.28	54.00	-48.72	--	--	--	--	--	100	159	AVERAGE	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2402.00</td><td>101.97</td><td>-----</td><td>97.56</td><td>27.47</td><td>7.51</td><td>30.57</td><td>0.00</td><td>100</td><td>159</td><td>PEAK</td><td></td></tr><tr><td>2</td><td>2402.00</td><td>59.59</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>159</td><td>AVERAGE</td><td></td></tr></table>			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	2402.00	101.97	-----	97.56	27.47	7.51	30.57	0.00	100	159	PEAK		2	2402.00	59.59	-----	--	--	--	--	--	--	100	159	AVERAGE	
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	2359.31	47.66	74.00	-26.34	43.50	27.31	7.45	30.60	0.00	100	159	PEAK																																																																																																																							
2	2359.31	5.28	54.00	-48.72	--	--	--	--	--	100	159	AVERAGE																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	2402.00	101.97	-----	97.56	27.47	7.51	30.57	0.00	100	159	PEAK																																																																																																																								
2	2402.00	59.59	-----	--	--	--	--	--	--	100	159	AVERAGE																																																																																																																							

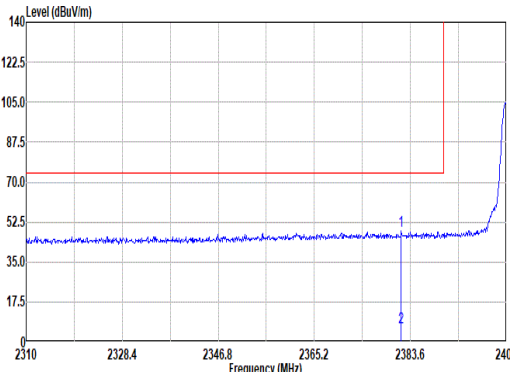
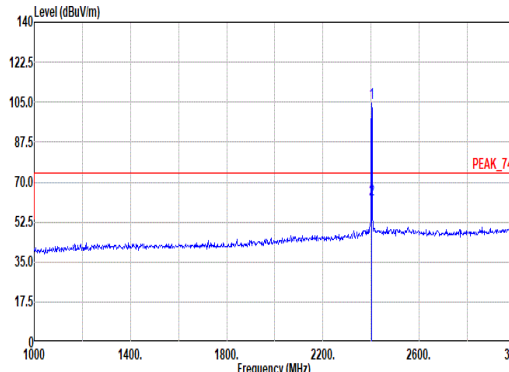


Mode	1																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Vertical						Fundamental																																																																																																																							
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2381.85</td><td>48.72</td><td>74.00</td><td>-25.28</td><td>44.35</td><td>27.47</td><td>7.48</td><td>30.58</td><td>0.00</td><td>394</td><td>117</td><td>PEAK</td></tr><tr><td>2</td><td>2381.85</td><td>6.34</td><td>54.00</td><td>-47.66</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>394</td><td>117</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2381.85	48.72	74.00	-25.28	44.35	27.47	7.48	30.58	0.00	394	117	PEAK	2	2381.85	6.34	54.00	-47.66	--	--	--	--	--	394	117	AVERAGE	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>104.87</td><td>-----</td><td>-----</td><td>100.39</td><td>27.54</td><td>7.51</td><td>30.57</td><td>0.00</td><td>394</td><td>117</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>62.49</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>394</td><td>117</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	104.87	-----	-----	100.39	27.54	7.51	30.57	0.00	394	117	PEAK	2	2402.00	62.49	-----	-----	--	--	--	--	--	394	117	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2381.85	48.72	74.00	-25.28	44.35	27.47	7.48	30.58	0.00	394	117	PEAK																																																																																																																		
2	2381.85	6.34	54.00	-47.66	--	--	--	--	--	394	117	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2402.00	104.87	-----	-----	100.39	27.54	7.51	30.57	0.00	394	117	PEAK																																																																																																																		
2	2402.00	62.49	-----	-----	--	--	--	--	--	394	117	AVERAGE																																																																																																																		

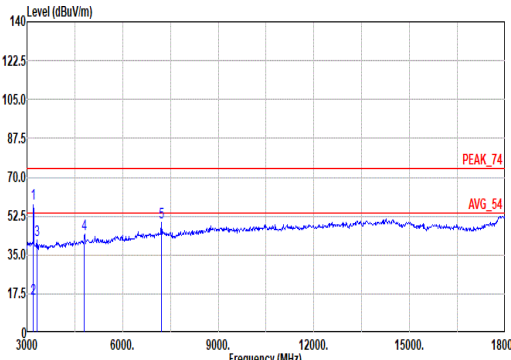
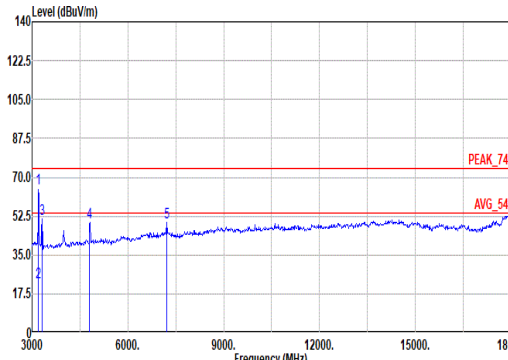


Mode	1																																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																																																																																																	
ANT	1																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
Peak Avg	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3203.00</td><td>57.89</td><td>74.00</td><td>-16.11</td><td>85.55</td><td>29.76</td><td>8.69</td><td>67.31</td><td>1.20</td><td>322</td><td>176</td><td>Peak</td></tr><tr><td>2</td><td>3203.00</td><td>15.51</td><td>54.00</td><td>-38.49</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>3315.00</td><td>41.52</td><td>74.00</td><td>-32.48</td><td>69.17</td><td>29.62</td><td>8.85</td><td>67.21</td><td>1.09</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>4804.00</td><td>44.32</td><td>74.00</td><td>-29.68</td><td>68.09</td><td>32.56</td><td>10.80</td><td>67.60</td><td>0.47</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>5</td><td>7206.00</td><td>49.60</td><td>74.00</td><td>-24.40</td><td>64.40</td><td>36.95</td><td>13.13</td><td>65.20</td><td>0.32</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3203.00	57.89	74.00	-16.11	85.55	29.76	8.69	67.31	1.20	322	176	Peak	2	3203.00	15.51	54.00	-38.49	--	--	--	--	--	--	--	Average	3	3315.00	41.52	74.00	-32.48	69.17	29.62	8.85	67.21	1.09	--	--	Peak	4	4804.00	44.32	74.00	-29.68	68.09	32.56	10.80	67.60	0.47	--	--	PEAK	5	7206.00	49.60	74.00	-24.40	64.40	36.95	13.13	65.20	0.32	--	--	PEAK	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3203.00</td><td>65.01</td><td>74.00</td><td>-8.99</td><td>92.64</td><td>29.79</td><td>8.69</td><td>67.31</td><td>1.20</td><td>244</td><td>178</td><td>Peak</td></tr><tr><td>2</td><td>3203.00</td><td>22.63</td><td>54.00</td><td>-31.37</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>3315.00</td><td>51.02</td><td>74.00</td><td>-22.98</td><td>78.63</td><td>29.66</td><td>8.85</td><td>67.21</td><td>1.09</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>4804.00</td><td>49.58</td><td>74.00</td><td>-24.42</td><td>73.28</td><td>32.63</td><td>10.80</td><td>67.60</td><td>0.47</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>5</td><td>7206.00</td><td>49.47</td><td>74.00</td><td>-24.53</td><td>64.19</td><td>37.03</td><td>13.13</td><td>65.20</td><td>0.32</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3203.00	65.01	74.00	-8.99	92.64	29.79	8.69	67.31	1.20	244	178	Peak	2	3203.00	22.63	54.00	-31.37	--	--	--	--	--	--	--	Average	3	3315.00	51.02	74.00	-22.98	78.63	29.66	8.85	67.21	1.09	--	--	Peak	4	4804.00	49.58	74.00	-24.42	73.28	32.63	10.80	67.60	0.47	--	--	PEAK	5	7206.00	49.47	74.00	-24.53	64.19	37.03	13.13	65.20	0.32	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																								
1	3203.00	57.89	74.00	-16.11	85.55	29.76	8.69	67.31	1.20	322	176	Peak																																																																																																																																																																																						
2	3203.00	15.51	54.00	-38.49	--	--	--	--	--	--	--	Average																																																																																																																																																																																						
3	3315.00	41.52	74.00	-32.48	69.17	29.62	8.85	67.21	1.09	--	--	Peak																																																																																																																																																																																						
4	4804.00	44.32	74.00	-29.68	68.09	32.56	10.80	67.60	0.47	--	--	PEAK																																																																																																																																																																																						
5	7206.00	49.60	74.00	-24.40	64.40	36.95	13.13	65.20	0.32	--	--	PEAK																																																																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																								
1	3203.00	65.01	74.00	-8.99	92.64	29.79	8.69	67.31	1.20	244	178	Peak																																																																																																																																																																																						
2	3203.00	22.63	54.00	-31.37	--	--	--	--	--	--	--	Average																																																																																																																																																																																						
3	3315.00	51.02	74.00	-22.98	78.63	29.66	8.85	67.21	1.09	--	--	Peak																																																																																																																																																																																						
4	4804.00	49.58	74.00	-24.42	73.28	32.63	10.80	67.60	0.47	--	--	PEAK																																																																																																																																																																																						
5	7206.00	49.47	74.00	-24.53	64.19	37.03	13.13	65.20	0.32	--	--	PEAK																																																																																																																																																																																						

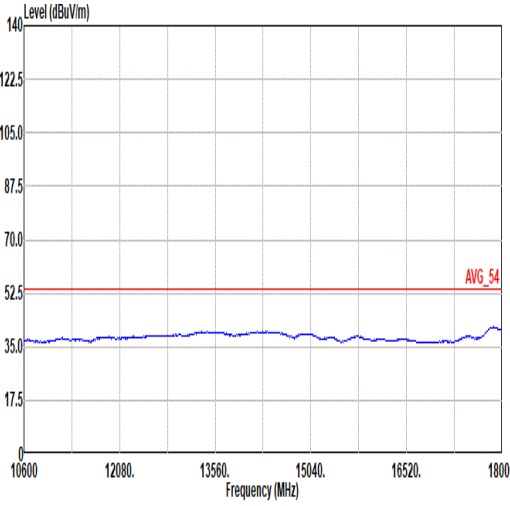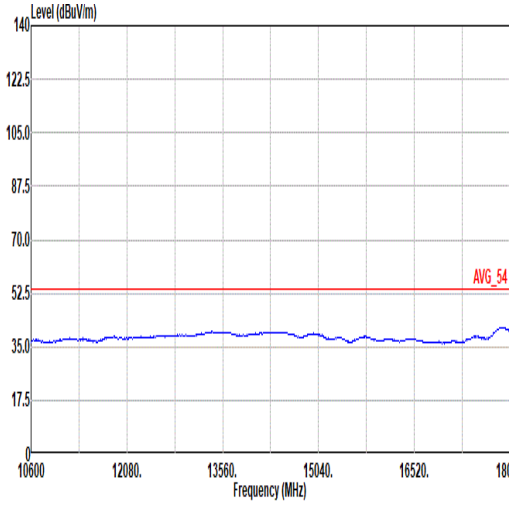


Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH01-CA Condition: AVG_54 3m HORN_02113_240426 HORIZONTAL	 Site : 03CH01-CA Condition: AVG_54 3m HORN_02113_240426 VERTICAL

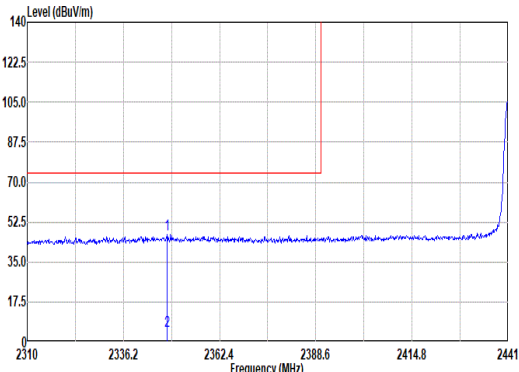
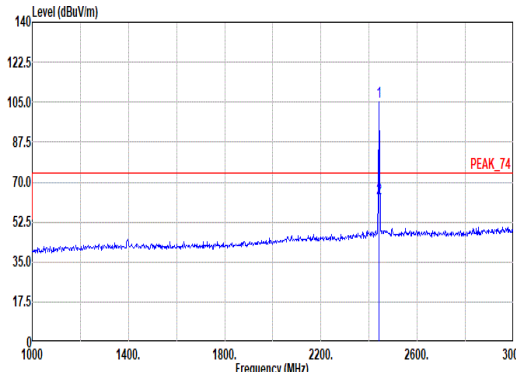


Mode	2																																																																																																																													
	Band Edge - L																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2340.12</td><td>47.17</td><td>74.00</td><td>-26.83</td><td>43.07</td><td>27.28</td><td>7.43</td><td>30.61</td><td>0.00</td><td>400</td><td>203</td><td>PEAK</td></tr><tr><td>2</td><td>2348.12</td><td>4.79</td><td>54.00</td><td>-49.21</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>400</td><td>203</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2340.12	47.17	74.00	-26.83	43.07	27.28	7.43	30.61	0.00	400	203	PEAK	2	2348.12	4.79	54.00	-49.21	--	--	--	--	--	400	203	AVERAGE	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2441.00</td><td>105.26</td><td>-----</td><td>-----</td><td>100.65</td><td>27.61</td><td>7.58</td><td>30.58</td><td>0.00</td><td>400</td><td>203</td><td>PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>62.88</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>400</td><td>203</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2441.00	105.26	-----	-----	100.65	27.61	7.58	30.58	0.00	400	203	PEAK	2	2441.00	62.88	-----	-----	--	--	--	--	--	400	203	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	2340.12	47.17	74.00	-26.83	43.07	27.28	7.43	30.61	0.00	400	203	PEAK																																																																																																																		
2	2348.12	4.79	54.00	-49.21	--	--	--	--	--	400	203	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	2441.00	105.26	-----	-----	100.65	27.61	7.58	30.58	0.00	400	203	PEAK																																																																																																																		
2	2441.00	62.88	-----	-----	--	--	--	--	--	400	203	AVERAGE																																																																																																																		

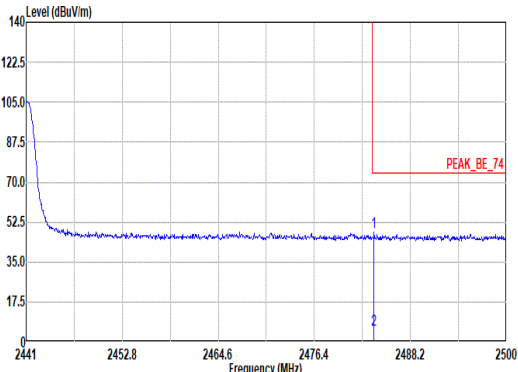


Mode	2																																																										
	Band Edge - R																																																										
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																										
ANT	1																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.72</td><td>47.90</td><td>74.00</td><td>-26.10</td><td>43.01</td><td>27.79</td><td>7.65</td><td>30.55</td><td>0.00</td><td>400</td><td>203</td><td>PEAK</td></tr><tr><td>2</td><td>2483.72</td><td>5.52</td><td>54.00</td><td>-48.48</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>400</td><td>203</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.72	47.90	74.00	-26.10	43.01	27.79	7.65	30.55	0.00	400	203	PEAK	2	2483.72	5.52	54.00	-48.48	--	--	--	--	--	400	203	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	2483.72	47.90	74.00	-26.10	43.01	27.79	7.65	30.55	0.00	400	203	PEAK																																															
2	2483.72	5.52	54.00	-48.48	--	--	--	--	--	400	203	AVERAGE																																															

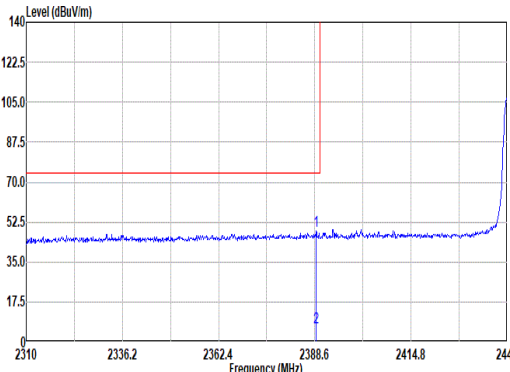
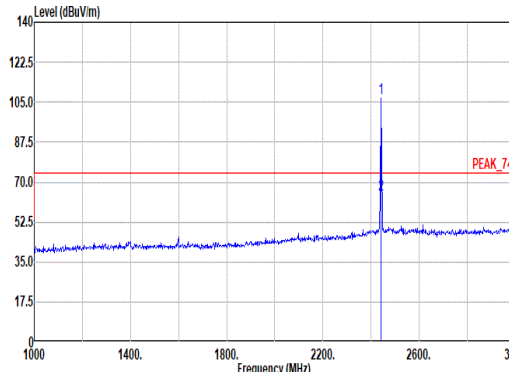


Mode	2																																																																																																																													
	Band Edge - L																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Vertical						Fundamental																																																																																																																							
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.99</td><td>48.76</td><td>74.00</td><td>-25.24</td><td>44.36</td><td>27.49</td><td>7.49</td><td>30.58</td><td>0.00</td><td>280</td><td>165</td><td>PEAK</td></tr><tr><td>2</td><td>2388.99</td><td>6.38</td><td>54.00</td><td>-47.62</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>280</td><td>165</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.99	48.76	74.00	-25.24	44.36	27.49	7.49	30.58	0.00	280	165	PEAK	2	2388.99	6.38	54.00	-47.62	--	--	--	--	--	280	165	AVERAGE	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2441.00</td><td>106.72</td><td>-----</td><td>-----</td><td>102.04</td><td>27.68</td><td>7.58</td><td>30.58</td><td>0.00</td><td>280</td><td>165</td><td>PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>64.34</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>280</td><td>165</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2441.00	106.72	-----	-----	102.04	27.68	7.58	30.58	0.00	280	165	PEAK	2	2441.00	64.34	-----	-----	--	--	--	--	--	280	165	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2388.99	48.76	74.00	-25.24	44.36	27.49	7.49	30.58	0.00	280	165	PEAK																																																																																																																		
2	2388.99	6.38	54.00	-47.62	--	--	--	--	--	280	165	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2441.00	106.72	-----	-----	102.04	27.68	7.58	30.58	0.00	280	165	PEAK																																																																																																																		
2	2441.00	64.34	-----	-----	--	--	--	--	--	280	165	AVERAGE																																																																																																																		

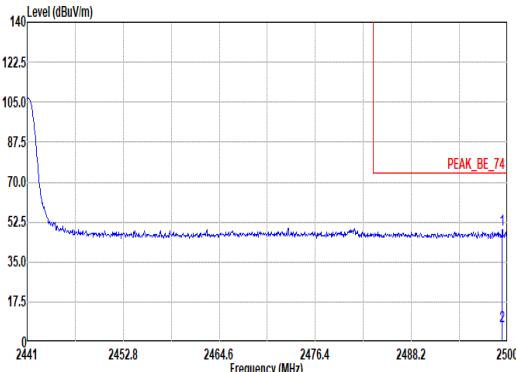

Mode	2																																																										
	Band Edge - R																																																										
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																										
ANT	1																																																										
Pol.	Vertical	Fundamental																																																									
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.35</td><td>49.21</td><td>74.00</td><td>-24.79</td><td>44.16</td><td>27.92</td><td>7.67</td><td>30.54</td><td>0.00</td><td>200</td><td>165</td><td>PEAK</td></tr><tr><td>2</td><td>2499.35</td><td>6.83</td><td>54.00</td><td>-47.17</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>200</td><td>165</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.35	49.21	74.00	-24.79	44.16	27.92	7.67	30.54	0.00	200	165	PEAK	2	2499.35	6.83	54.00	-47.17	--	--	--	--	--	200	165	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	2499.35	49.21	74.00	-24.79	44.16	27.92	7.67	30.54	0.00	200	165	PEAK																																															
2	2499.35	6.83	54.00	-47.17	--	--	--	--	--	200	165	AVERAGE																																															

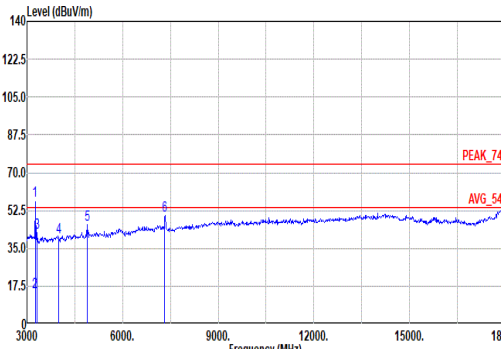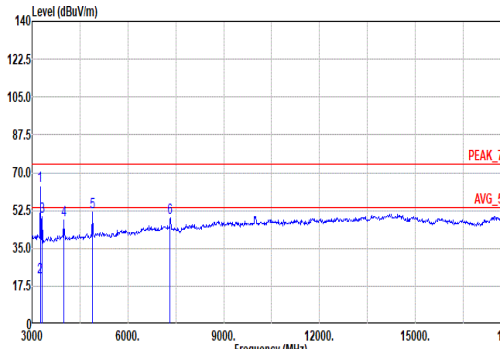

Mode	2																																																																																																																																																																																																																											
	Harmonic																																																																																																																																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																																																																																											
ANT	1																																																																																																																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																																																																																																																										
Peak	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3255.00</td><td>57.31</td><td>74.00</td><td>-16.69</td><td>85.09</td><td>29.69</td><td>8.77</td><td>67.39</td><td>1.15</td><td>343</td><td>180</td><td>Peak</td></tr><tr><td>2</td><td>3255.00</td><td>14.93</td><td>54.00</td><td>-39.07</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>3315.00</td><td>42.04</td><td>74.00</td><td>-31.96</td><td>69.69</td><td>29.62</td><td>8.85</td><td>67.21</td><td>1.09</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>3990.00</td><td>39.96</td><td>74.00</td><td>-34.04</td><td>66.34</td><td>30.97</td><td>9.89</td><td>67.91</td><td>0.67</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>4882.00</td><td>46.19</td><td>74.00</td><td>-27.81</td><td>69.41</td><td>32.93</td><td>10.89</td><td>67.51</td><td>0.47</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>6</td><td>7323.00</td><td>49.99</td><td>74.00</td><td>-24.01</td><td>66.65</td><td>36.87</td><td>13.26</td><td>67.12</td><td>0.33</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3255.00	57.31	74.00	-16.69	85.09	29.69	8.77	67.39	1.15	343	180	Peak	2	3255.00	14.93	54.00	-39.07	--	--	--	--	--	--	--	Average	3	3315.00	42.04	74.00	-31.96	69.69	29.62	8.85	67.21	1.09	--	--	Peak	4	3990.00	39.96	74.00	-34.04	66.34	30.97	9.89	67.91	0.67	--	--	Peak	5	4882.00	46.19	74.00	-27.81	69.41	32.93	10.89	67.51	0.47	--	--	PEAK	6	7323.00	49.99	74.00	-24.01	66.65	36.87	13.26	67.12	0.33	--	--	PEAK	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3255.00</td><td>63.78</td><td>74.00</td><td>-10.22</td><td>91.54</td><td>29.71</td><td>8.77</td><td>67.39</td><td>1.15</td><td>267</td><td>180</td><td>Peak</td></tr><tr><td>2</td><td>3255.00</td><td>21.40</td><td>54.00</td><td>-32.60</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>3315.00</td><td>49.84</td><td>74.00</td><td>-24.16</td><td>77.45</td><td>29.66</td><td>8.85</td><td>67.21</td><td>1.09</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>3990.00</td><td>48.16</td><td>74.00</td><td>-25.84</td><td>74.52</td><td>30.99</td><td>9.89</td><td>67.91</td><td>0.67</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>4882.00</td><td>51.89</td><td>74.00</td><td>-22.11</td><td>75.05</td><td>32.99</td><td>10.89</td><td>67.51</td><td>0.47</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>6</td><td>7323.00</td><td>48.93</td><td>74.00</td><td>-25.07</td><td>65.49</td><td>36.97</td><td>13.26</td><td>67.12</td><td>0.33</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3255.00	63.78	74.00	-10.22	91.54	29.71	8.77	67.39	1.15	267	180	Peak	2	3255.00	21.40	54.00	-32.60	--	--	--	--	--	--	--	Average	3	3315.00	49.84	74.00	-24.16	77.45	29.66	8.85	67.21	1.09	--	--	Peak	4	3990.00	48.16	74.00	-25.84	74.52	30.99	9.89	67.91	0.67	--	--	Peak	5	4882.00	51.89	74.00	-22.11	75.05	32.99	10.89	67.51	0.47	--	--	PEAK	6	7323.00	48.93	74.00	-25.07	65.49	36.97	13.26	67.12	0.33	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																				
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																		
1	3255.00	57.31	74.00	-16.69	85.09	29.69	8.77	67.39	1.15	343	180	Peak																																																																																																																																																																																																																
2	3255.00	14.93	54.00	-39.07	--	--	--	--	--	--	--	Average																																																																																																																																																																																																																
3	3315.00	42.04	74.00	-31.96	69.69	29.62	8.85	67.21	1.09	--	--	Peak																																																																																																																																																																																																																
4	3990.00	39.96	74.00	-34.04	66.34	30.97	9.89	67.91	0.67	--	--	Peak																																																																																																																																																																																																																
5	4882.00	46.19	74.00	-27.81	69.41	32.93	10.89	67.51	0.47	--	--	PEAK																																																																																																																																																																																																																
6	7323.00	49.99	74.00	-24.01	66.65	36.87	13.26	67.12	0.33	--	--	PEAK																																																																																																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																				
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																		
1	3255.00	63.78	74.00	-10.22	91.54	29.71	8.77	67.39	1.15	267	180	Peak																																																																																																																																																																																																																
2	3255.00	21.40	54.00	-32.60	--	--	--	--	--	--	--	Average																																																																																																																																																																																																																
3	3315.00	49.84	74.00	-24.16	77.45	29.66	8.85	67.21	1.09	--	--	Peak																																																																																																																																																																																																																
4	3990.00	48.16	74.00	-25.84	74.52	30.99	9.89	67.91	0.67	--	--	Peak																																																																																																																																																																																																																
5	4882.00	51.89	74.00	-22.11	75.05	32.99	10.89	67.51	0.47	--	--	PEAK																																																																																																																																																																																																																
6	7323.00	48.93	74.00	-25.07	65.49	36.97	13.26	67.12	0.33	--	--	PEAK																																																																																																																																																																																																																





Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G -18G Avg	Site : 03CH01-CA Condition: AVG_54 3m HORN_02113_240426 HORIZONTAL	Site : 03CH01-CA Condition: AVG_54 3m HORN_02113_240426 VERTICAL





Mode	3																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.90</td><td>49.80</td><td>74.00</td><td>-24.20</td><td>44.91</td><td>27.79</td><td>7.65</td><td>30.55</td><td>0.00</td><td>385</td><td>283</td><td>PEAK</td></tr><tr><td>2</td><td>2483.90</td><td>7.42</td><td>54.00</td><td>-46.58</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>385</td><td>283</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.90	49.80	74.00	-24.20	44.91	27.79	7.65	30.55	0.00	385	283	PEAK	2	2483.90	7.42	54.00	-46.58	--	--	--	--	--	385	283	AVERAGE	Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>105.83</td><td>-----</td><td>-----</td><td>100.98</td><td>27.77</td><td>7.64</td><td>30.56</td><td>0.00</td><td>385</td><td>283</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>63.45</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>385</td><td>283</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	105.83	-----	-----	100.98	27.77	7.64	30.56	0.00	385	283	PEAK	2	2480.00	63.45	-----	-----	--	--	--	--	--	385	283	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2483.90	49.80	74.00	-24.20	44.91	27.79	7.65	30.55	0.00	385	283	PEAK																																																																																																								
2	2483.90	7.42	54.00	-46.58	--	--	--	--	--	385	283	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2480.00	105.83	-----	-----	100.98	27.77	7.64	30.56	0.00	385	283	PEAK																																																																																																								
2	2480.00	63.45	-----	-----	--	--	--	--	--	385	283	AVERAGE																																																																																																								

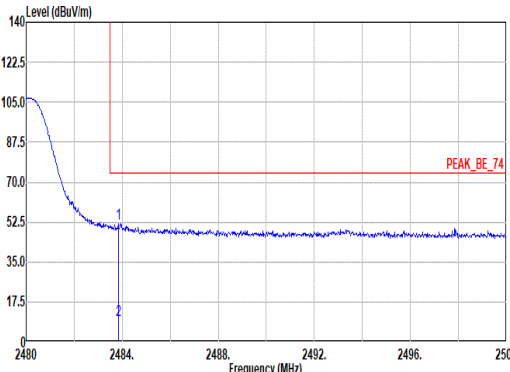
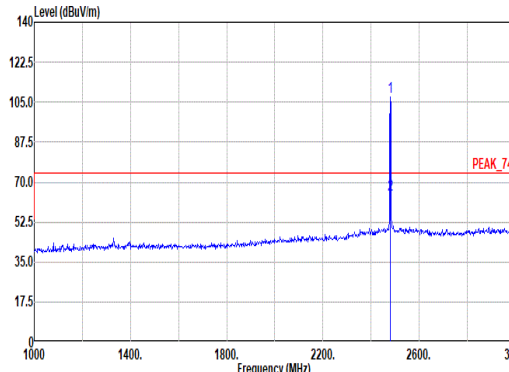


Mode	3																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Vertical						Fundamental																																																																																																																							
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.84</td><td>51.86</td><td>74.00</td><td>-22.14</td><td>46.91</td><td>27.85</td><td>7.65</td><td>30.55</td><td>0.00</td><td>275</td><td>166</td><td>PEAK</td></tr><tr><td>2</td><td>2483.84</td><td>9.48</td><td>54.00</td><td>-44.52</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>275</td><td>166</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.84	51.86	74.00	-22.14	46.91	27.85	7.65	30.55	0.00	275	166	PEAK	2	2483.84	9.48	54.00	-44.52	--	--	--	--	--	275	166	AVERAGE	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>107.02</td><td>-----</td><td>-----</td><td>102.10</td><td>27.84</td><td>7.64</td><td>30.56</td><td>0.00</td><td>275</td><td>166</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>64.64</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>275</td><td>166</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	107.02	-----	-----	102.10	27.84	7.64	30.56	0.00	275	166	PEAK	2	2480.00	64.64	-----	-----	--	--	--	--	--	275	166	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2483.84	51.86	74.00	-22.14	46.91	27.85	7.65	30.55	0.00	275	166	PEAK																																																																																																																		
2	2483.84	9.48	54.00	-44.52	--	--	--	--	--	275	166	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2480.00	107.02	-----	-----	102.10	27.84	7.64	30.56	0.00	275	166	PEAK																																																																																																																		
2	2480.00	64.64	-----	-----	--	--	--	--	--	275	166	AVERAGE																																																																																																																		

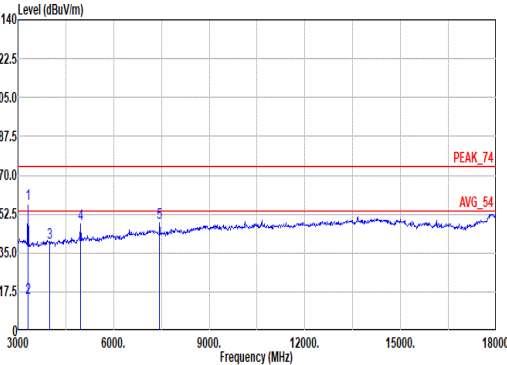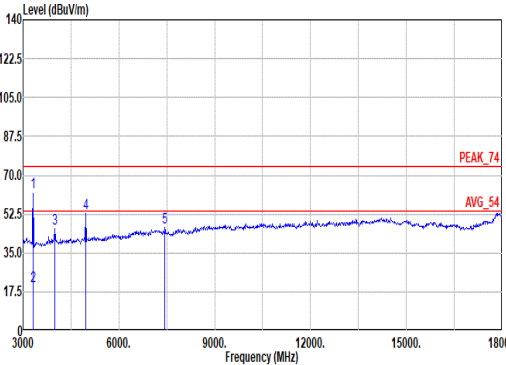

Mode	3											
	Harmonic											
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz											
ANT	1											
Pol.	Horizontal						Vertical					
Peak Avg												
	Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 HORIZONTAL						Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 VERTICAL					
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	3306.00	57.00	74.00	-16.92	84.75	29.63	8.84	67.24	1.10	292	178 Peak	
2	3306.00	14.70	54.00	-39.30	--	--	--	--	--	--	-- Average	
3	3990.00	39.48	74.00	-34.52	65.06	30.97	9.89	67.91	0.67	--	-- Peak	
4	4960.00	48.23	74.00	-25.77	71.32	33.15	10.97	67.68	0.47	--	-- PEAK	
5	7440.00	48.62	74.00	-25.38	65.47	36.57	13.37	67.13	0.34	--	-- PEAK	
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	3306.00	62.49	74.00	-11.51	90.12	29.67	8.84	67.24	1.10	244	175 Peak	
2	3306.00	20.11	54.00	-33.89	--	--	--	--	--	--	-- Average	
3	3990.00	46.00	74.00	-28.00	72.36	30.99	9.89	67.91	0.67	--	-- Peak	
4	4960.00	52.62	74.00	-21.38	75.68	33.18	10.97	67.68	0.47	--	-- PEAK	
5	7440.00	46.40	74.00	-27.60	63.18	36.64	13.37	67.13	0.34	--	-- PEAK	

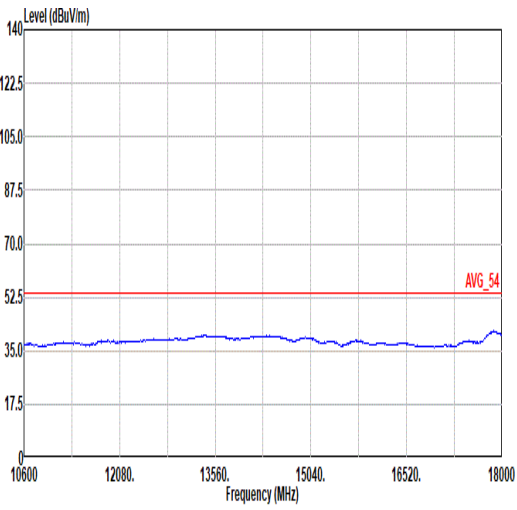
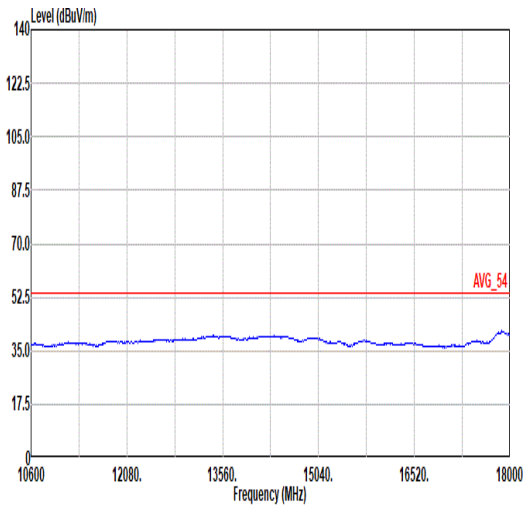


Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH01-CA Condition: AVG_54 3m HORN_02113_240426 HORIZONTAL	 Site : 03CH01-CA Condition: AVG_54 3m HORN_02113_240426 VERTICAL





Mode	4																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2362.07</td><td>48.85</td><td>74.00</td><td>-25.15</td><td>44.68</td><td>27.32</td><td>7.45</td><td>30.60</td><td>0.00</td><td>100</td><td>176</td><td>PEAK</td></tr><tr><td>2</td><td>2362.07</td><td>6.69</td><td>54.00</td><td>-47.31</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>176</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2362.07	48.85	74.00	-25.15	44.68	27.32	7.45	30.60	0.00	100	176	PEAK	2	2362.07	6.69	54.00	-47.31	--	--	--	--	--	100	176	AVERAGE	Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>106.94</td><td>-----</td><td>-----</td><td>102.53</td><td>27.47</td><td>7.51</td><td>30.57</td><td>0.00</td><td>100</td><td>176</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>64.78</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>176</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	106.94	-----	-----	102.53	27.47	7.51	30.57	0.00	100	176	PEAK	2	2402.00	64.78	-----	-----	--	--	--	--	--	100	176	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2362.07	48.85	74.00	-25.15	44.68	27.32	7.45	30.60	0.00	100	176	PEAK																																																																																																								
2	2362.07	6.69	54.00	-47.31	--	--	--	--	--	100	176	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2402.00	106.94	-----	-----	102.53	27.47	7.51	30.57	0.00	100	176	PEAK																																																																																																								
2	2402.00	64.78	-----	-----	--	--	--	--	--	100	176	AVERAGE																																																																																																								

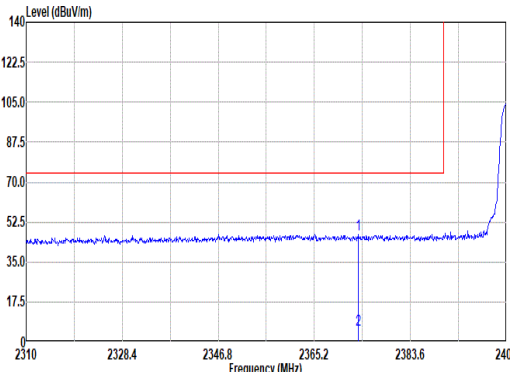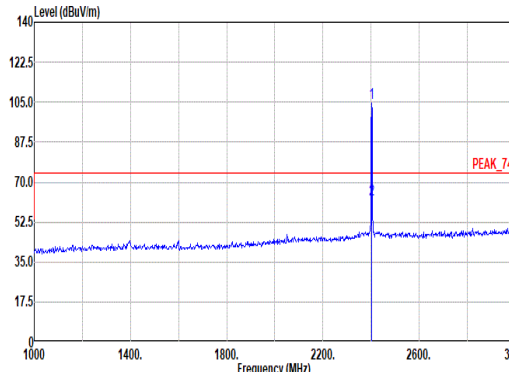

Mode	4																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2373.66</td><td>47.24</td><td>74.00</td><td>-26.76</td><td>42.91</td><td>27.45</td><td>7.47</td><td>30.59</td><td>0.00</td><td>100</td><td>206</td><td>PEAK</td></tr><tr><td>2</td><td>2373.66</td><td>5.08</td><td>54.00</td><td>-48.92</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>206</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2373.66	47.24	74.00	-26.76	42.91	27.45	7.47	30.59	0.00	100	206	PEAK	2	2373.66	5.08	54.00	-48.92	--	--	--	--	--	100	206	AVERAGE	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>104.58</td><td>-----</td><td>-----</td><td>100.10</td><td>27.54</td><td>7.51</td><td>30.57</td><td>0.00</td><td>100</td><td>206</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>62.42</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>206</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	104.58	-----	-----	100.10	27.54	7.51	30.57	0.00	100	206	PEAK	2	2402.00	62.42	-----	-----	--	--	--	--	--	100	206	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2373.66	47.24	74.00	-26.76	42.91	27.45	7.47	30.59	0.00	100	206	PEAK																																																																																																								
2	2373.66	5.08	54.00	-48.92	--	--	--	--	--	100	206	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2402.00	104.58	-----	-----	100.10	27.54	7.51	30.57	0.00	100	206	PEAK																																																																																																								
2	2402.00	62.42	-----	-----	--	--	--	--	--	100	206	AVERAGE																																																																																																								

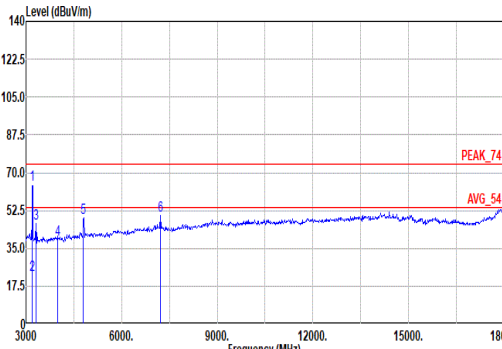
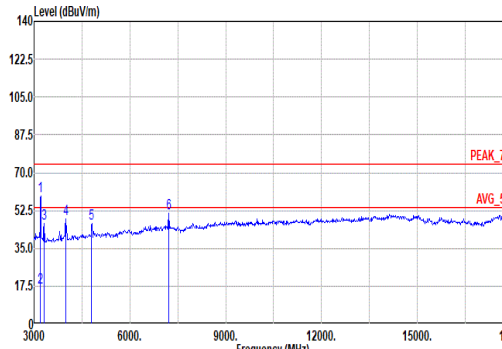


Mode	4																																																																																																																																																																																					
	Harmonic																																																																																																																																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																																																																																																																																					
ANT	1																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
Peak	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 3203.00</td><td>64.66</td><td>74.00</td><td>-9.34</td><td>92.32</td><td>29.76</td><td>8.69</td><td>67.31</td><td>1.20</td><td>100 147 Peak</td></tr><tr><td>2 3203.00</td><td>22.50</td><td>54.00</td><td>-31.50</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- Average</td></tr><tr><td>3 3315.00</td><td>46.41</td><td>74.00</td><td>-27.59</td><td>74.06</td><td>29.62</td><td>8.85</td><td>67.21</td><td>1.09</td><td>-- Peak</td></tr><tr><td>4 3990.00</td><td>39.24</td><td>74.00</td><td>-34.76</td><td>65.62</td><td>30.97</td><td>9.89</td><td>67.91</td><td>0.67</td><td>-- Peak</td></tr><tr><td>5 4804.00</td><td>48.90</td><td>74.00</td><td>-25.10</td><td>72.67</td><td>32.56</td><td>10.80</td><td>67.60</td><td>0.47</td><td>-- PEAK</td></tr><tr><td>6 7206.00</td><td>50.02</td><td>74.00</td><td>-23.98</td><td>64.82</td><td>36.95</td><td>13.13</td><td>65.20</td><td>0.32</td><td>-- PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 3203.00	64.66	74.00	-9.34	92.32	29.76	8.69	67.31	1.20	100 147 Peak	2 3203.00	22.50	54.00	-31.50	--	--	--	--	--	-- Average	3 3315.00	46.41	74.00	-27.59	74.06	29.62	8.85	67.21	1.09	-- Peak	4 3990.00	39.24	74.00	-34.76	65.62	30.97	9.89	67.91	0.67	-- Peak	5 4804.00	48.90	74.00	-25.10	72.67	32.56	10.80	67.60	0.47	-- PEAK	6 7206.00	50.02	74.00	-23.98	64.82	36.95	13.13	65.20	0.32	-- PEAK	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 3203.00</td><td>59.05</td><td>74.00</td><td>-14.95</td><td>86.68</td><td>29.79</td><td>8.69</td><td>67.31</td><td>1.20</td><td>230 168 Peak</td></tr><tr><td>2 3203.00</td><td>16.89</td><td>54.00</td><td>-37.11</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- Average</td></tr><tr><td>3 3315.00</td><td>46.49</td><td>74.00</td><td>-27.51</td><td>74.10</td><td>29.66</td><td>8.85</td><td>67.21</td><td>1.09</td><td>-- Peak</td></tr><tr><td>4 3990.00</td><td>48.55</td><td>74.00</td><td>-25.45</td><td>74.91</td><td>30.99</td><td>9.89</td><td>67.91</td><td>0.67</td><td>-- Peak</td></tr><tr><td>5 4804.00</td><td>46.75</td><td>74.00</td><td>-27.25</td><td>70.45</td><td>32.63</td><td>10.80</td><td>67.60</td><td>0.47</td><td>-- PEAK</td></tr><tr><td>6 7206.00</td><td>51.38</td><td>74.00</td><td>-22.62</td><td>66.10</td><td>37.03</td><td>13.13</td><td>65.20</td><td>0.32</td><td>-- PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 3203.00	59.05	74.00	-14.95	86.68	29.79	8.69	67.31	1.20	230 168 Peak	2 3203.00	16.89	54.00	-37.11	--	--	--	--	--	-- Average	3 3315.00	46.49	74.00	-27.51	74.10	29.66	8.85	67.21	1.09	-- Peak	4 3990.00	48.55	74.00	-25.45	74.91	30.99	9.89	67.91	0.67	-- Peak	5 4804.00	46.75	74.00	-27.25	70.45	32.63	10.80	67.60	0.47	-- PEAK	6 7206.00	51.38	74.00	-22.62	66.10	37.03	13.13	65.20	0.32	-- PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1 3203.00	64.66	74.00	-9.34	92.32	29.76	8.69	67.31	1.20	100 147 Peak																																																																																																																																																																													
2 3203.00	22.50	54.00	-31.50	--	--	--	--	--	-- Average																																																																																																																																																																													
3 3315.00	46.41	74.00	-27.59	74.06	29.62	8.85	67.21	1.09	-- Peak																																																																																																																																																																													
4 3990.00	39.24	74.00	-34.76	65.62	30.97	9.89	67.91	0.67	-- Peak																																																																																																																																																																													
5 4804.00	48.90	74.00	-25.10	72.67	32.56	10.80	67.60	0.47	-- PEAK																																																																																																																																																																													
6 7206.00	50.02	74.00	-23.98	64.82	36.95	13.13	65.20	0.32	-- PEAK																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1 3203.00	59.05	74.00	-14.95	86.68	29.79	8.69	67.31	1.20	230 168 Peak																																																																																																																																																																													
2 3203.00	16.89	54.00	-37.11	--	--	--	--	--	-- Average																																																																																																																																																																													
3 3315.00	46.49	74.00	-27.51	74.10	29.66	8.85	67.21	1.09	-- Peak																																																																																																																																																																													
4 3990.00	48.55	74.00	-25.45	74.91	30.99	9.89	67.91	0.67	-- Peak																																																																																																																																																																													
5 4804.00	46.75	74.00	-27.25	70.45	32.63	10.80	67.60	0.47	-- PEAK																																																																																																																																																																													
6 7206.00	51.38	74.00	-22.62	66.10	37.03	13.13	65.20	0.32	-- PEAK																																																																																																																																																																													
Avg																																																																																																																																																																																						




Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G -18G Avg	Site : 03CH01-CA Condition: AVG_54 3m HORN_02113_240426 HORIZONTAL	Site : 03CH01-CA Condition: AVG_54 3m HORN_02113_240426 VERTICAL

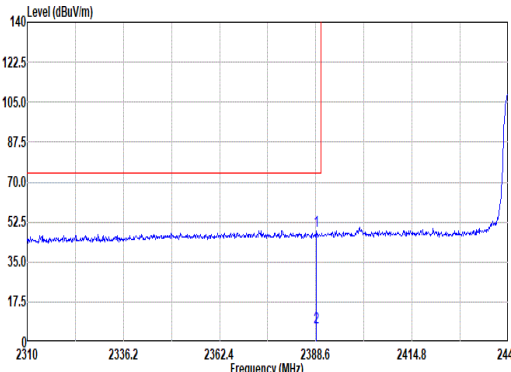
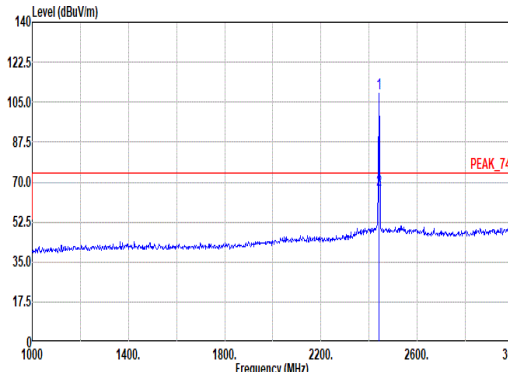


Mode	5																																																																																																																			
	Band Edge - L																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.73</td><td>48.73</td><td>74.00</td><td>-25.27</td><td>44.40</td><td>27.42</td><td>7.49</td><td>30.58</td><td>0.00</td><td>100</td><td>174</td><td>PEAK</td></tr><tr><td>2</td><td>2388.73</td><td>6.57</td><td>54.00</td><td>-47.43</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>174</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.73	48.73	74.00	-25.27	44.40	27.42	7.49	30.58	0.00	100	174	PEAK	2	2388.73	6.57	54.00	-47.43	--	--	--	--	--	100	174	AVERAGE	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2441.00</td><td>108.88</td><td>-----</td><td>-----</td><td>104.27</td><td>27.61</td><td>7.58</td><td>30.58</td><td>0.00</td><td>100</td><td>174</td><td>PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>66.72</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>174</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2441.00	108.88	-----	-----	104.27	27.61	7.58	30.58	0.00	100	174	PEAK	2	2441.00	66.72	-----	-----	--	--	--	--	--	100	174	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2388.73	48.73	74.00	-25.27	44.40	27.42	7.49	30.58	0.00	100	174	PEAK																																																																																																								
2	2388.73	6.57	54.00	-47.43	--	--	--	--	--	100	174	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2441.00	108.88	-----	-----	104.27	27.61	7.58	30.58	0.00	100	174	PEAK																																																																																																								
2	2441.00	66.72	-----	-----	--	--	--	--	--	100	174	AVERAGE																																																																																																								

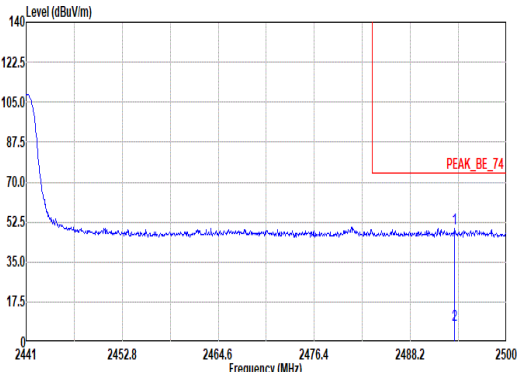


Mode	5																																																										
	Band Edge - R																																																										
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																										
ANT	1																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2493.63</td><td>49.53</td><td>74.00</td><td>-24.47</td><td>44.59</td><td>27.83</td><td>7.66</td><td>30.55</td><td>0.00</td><td>100</td><td>174</td><td>PEAK</td></tr><tr><td>2</td><td>2493.63</td><td>7.37</td><td>54.00</td><td>-46.63</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>174</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2493.63	49.53	74.00	-24.47	44.59	27.83	7.66	30.55	0.00	100	174	PEAK	2	2493.63	7.37	54.00	-46.63	--	--	--	--	--	100	174	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	2493.63	49.53	74.00	-24.47	44.59	27.83	7.66	30.55	0.00	100	174	PEAK																																															
2	2493.63	7.37	54.00	-46.63	--	--	--	--	--	100	174	AVERAGE																																															

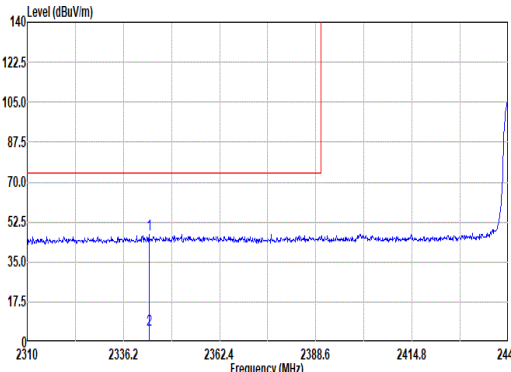
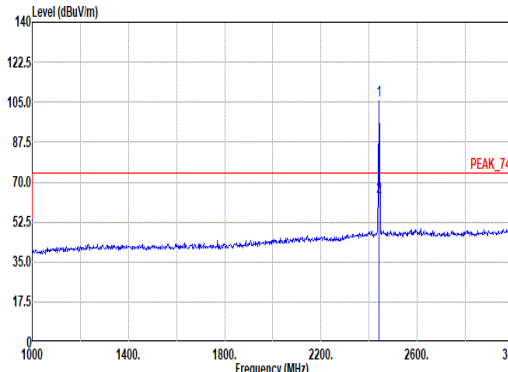


Mode	5																																																																																																																			
	Band Edge - L																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2343.14</td><td>47.27</td><td>74.00</td><td>-26.73</td><td>43.10</td><td>27.36</td><td>7.42</td><td>30.61</td><td>0.00</td><td>192</td><td>96</td><td>PEAK</td></tr><tr><td>2</td><td>2343.14</td><td>5.11</td><td>54.00</td><td>-48.89</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>192</td><td>96</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2343.14	47.27	74.00	-26.73	43.10	27.36	7.42	30.61	0.00	192	96	PEAK	2	2343.14	5.11	54.00	-48.89	--	--	--	--	--	192	96	AVERAGE	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2441.00</td><td>105.67</td><td>-----</td><td>-----</td><td>100.99</td><td>27.68</td><td>7.58</td><td>30.58</td><td>0.00</td><td>192</td><td>96</td><td>PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>63.51</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>192</td><td>96</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2441.00	105.67	-----	-----	100.99	27.68	7.58	30.58	0.00	192	96	PEAK	2	2441.00	63.51	-----	-----	--	--	--	--	--	192	96	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2343.14	47.27	74.00	-26.73	43.10	27.36	7.42	30.61	0.00	192	96	PEAK																																																																																																								
2	2343.14	5.11	54.00	-48.89	--	--	--	--	--	192	96	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2441.00	105.67	-----	-----	100.99	27.68	7.58	30.58	0.00	192	96	PEAK																																																																																																								
2	2441.00	63.51	-----	-----	--	--	--	--	--	192	96	AVERAGE																																																																																																								


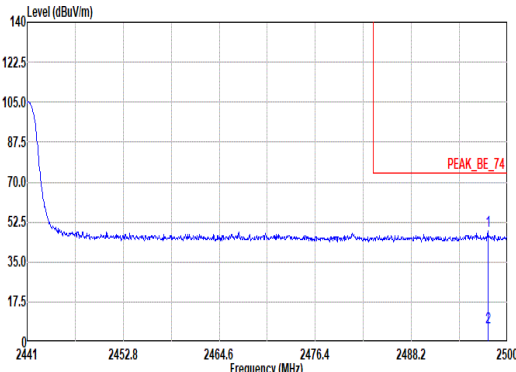


Mode	5																																																										
	Band Edge - R																																																										
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																										
ANT	1																																																										
Pol.	Vertical	Fundamental																																																									
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.58</td><td>48.35</td><td>74.00</td><td>-25.65</td><td>43.31</td><td>27.91</td><td>7.67</td><td>30.54</td><td>0.00</td><td>192</td><td>96</td><td>PEAK</td></tr><tr><td>2</td><td>2497.58</td><td>6.19</td><td>54.00</td><td>-47.81</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>192</td><td>96</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.58	48.35	74.00	-25.65	43.31	27.91	7.67	30.54	0.00	192	96	PEAK	2	2497.58	6.19	54.00	-47.81	--	--	--	--	--	192	96	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	2497.58	48.35	74.00	-25.65	43.31	27.91	7.67	30.54	0.00	192	96	PEAK																																															
2	2497.58	6.19	54.00	-47.81	--	--	--	--	--	192	96	AVERAGE																																															

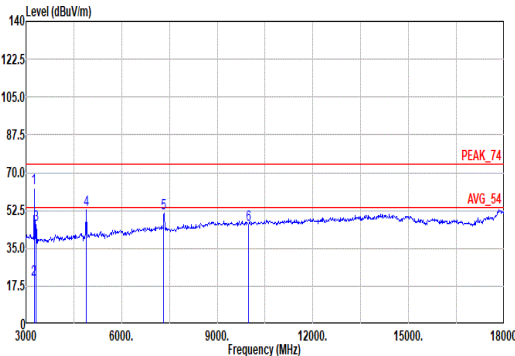
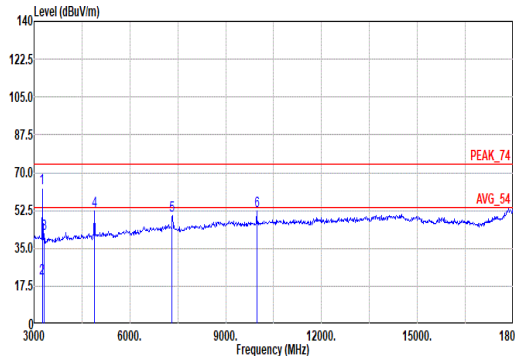


Mode	5												
	Harmonic												
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz												
ANT	1												
Pol.	Horizontal						Vertical						
Peak Avg													
	Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 HORIZONTAL						Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	
1	3255.00	62.75	74.00	-11.25	90.53	29.69	8.77	67.39	1.15	100	137	Peak	
2	3255.00	20.59	54.00	-33.41	--	--	--	--	--	--	--	--	Average
3	3315.00	46.22	74.00	-27.78	73.87	29.62	8.85	67.21	1.09	--	--	--	Peak
4	4882.00	52.92	74.00	-21.08	76.14	32.93	10.89	67.51	0.47	--	--	--	PEAK
5	7323.00	51.02	74.00	-22.98	67.68	36.87	13.26	67.12	0.33	--	--	--	PEAK
6	9975.00	45.81	74.00	-28.19	59.98	38.53	15.57	68.65	0.38	--	--	--	Peak
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	
1	3255.00	63.07	74.00	-10.93	90.83	29.71	8.77	67.39	1.15	190	168	Peak	
2	3255.00	20.91	54.00	-33.09	--	--	--	--	--	--	--	--	Average
3	3315.00	41.93	74.00	-32.07	69.54	29.66	8.85	67.21	1.09	--	--	--	Peak
4	4882.00	52.31	74.00	-21.69	75.47	32.99	10.89	67.51	0.47	--	--	--	PEAK
5	7323.00	50.04	74.00	-23.96	66.60	36.97	13.26	67.12	0.33	--	--	--	PEAK
6	9975.00	52.08	74.00	-21.92	66.25	38.53	15.57	68.65	0.38	--	--	--	Peak

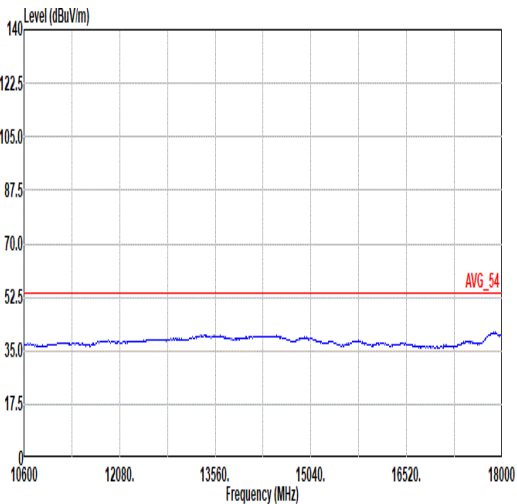
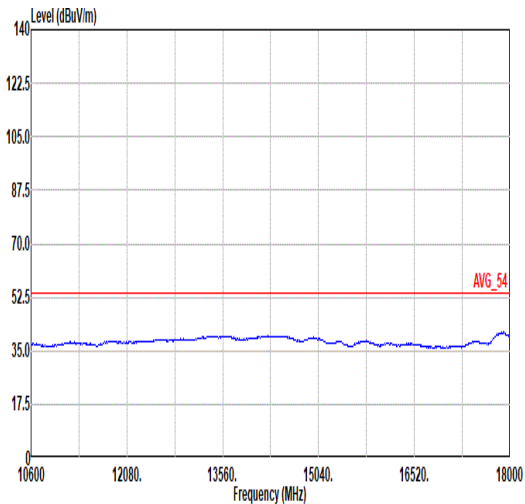


Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH01-CA Condition: AVG_54 3m HORN_02113_240426 HORIZONTAL	 Site : 03CH01-CA Condition: AVG_54 3m HORN_02113_240426 VERTICAL

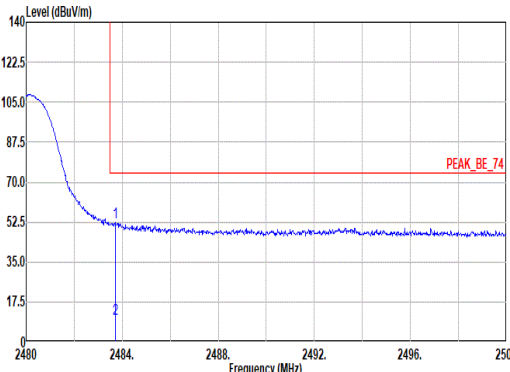
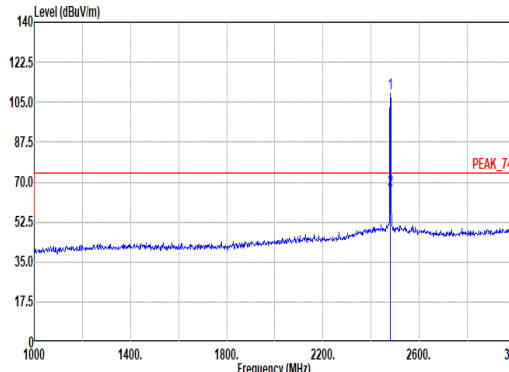


Mode	6																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.72</td><td>52.43</td><td>74.00</td><td>-21.57</td><td>47.54</td><td>27.79</td><td>7.65</td><td>30.55</td><td>0.00</td><td>100</td><td>174</td><td>PEAK</td></tr><tr><td>2</td><td>2483.72</td><td>10.27</td><td>54.00</td><td>-43.73</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>174</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.72	52.43	74.00	-21.57	47.54	27.79	7.65	30.55	0.00	100	174	PEAK	2	2483.72	10.27	54.00	-43.73	--	--	--	--	--	100	174	AVERAGE	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>108.58</td><td>-----</td><td>-----</td><td>103.73</td><td>27.77</td><td>7.64</td><td>30.56</td><td>0.00</td><td>100</td><td>174</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>66.42</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>100</td><td>174</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	108.58	-----	-----	103.73	27.77	7.64	30.56	0.00	100	174	PEAK	2	2480.00	66.42	-----	-----	--	--	--	--	--	100	174	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2483.72	52.43	74.00	-21.57	47.54	27.79	7.65	30.55	0.00	100	174	PEAK																																																																																																																		
2	2483.72	10.27	54.00	-43.73	--	--	--	--	--	100	174	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2480.00	108.58	-----	-----	103.73	27.77	7.64	30.56	0.00	100	174	PEAK																																																																																																																		
2	2480.00	66.42	-----	-----	--	--	--	--	--	100	174	AVERAGE																																																																																																																		

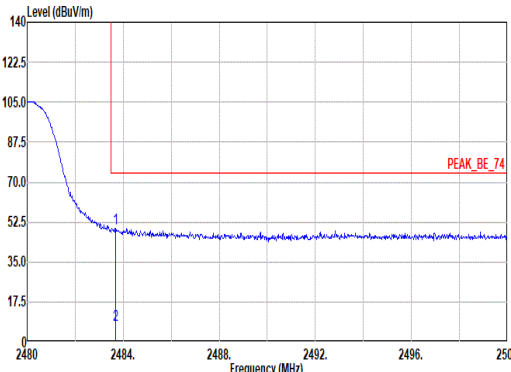
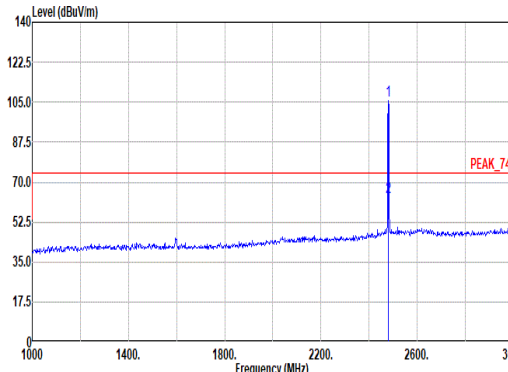


Mode	6																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	 Site : 03CH01-CA Condition: PEAK_BE_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>49.79</td><td>74.00</td><td>-24.21</td><td>44.84</td><td>27.85</td><td>7.65</td><td>30.55</td><td>0.00</td><td>109</td><td>157</td><td>PEAK</td></tr><tr><td>2</td><td>2483.68</td><td>7.63</td><td>54.00</td><td>-46.37</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>109</td><td>157</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	49.79	74.00	-24.21	44.84	27.85	7.65	30.55	0.00	109	157	PEAK	2	2483.68	7.63	54.00	-46.37	--	--	--	--	--	109	157	AVERAGE	 Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>105.72</td><td>-----</td><td>-----</td><td>100.80</td><td>27.84</td><td>7.64</td><td>30.56</td><td>0.00</td><td>109</td><td>157</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>63.56</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>109</td><td>157</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	105.72	-----	-----	100.80	27.84	7.64	30.56	0.00	109	157	PEAK	2	2480.00	63.56	-----	-----	--	--	--	--	--	109	157	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2483.68	49.79	74.00	-24.21	44.84	27.85	7.65	30.55	0.00	109	157	PEAK																																																																																																								
2	2483.68	7.63	54.00	-46.37	--	--	--	--	--	109	157	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2480.00	105.72	-----	-----	100.80	27.84	7.64	30.56	0.00	109	157	PEAK																																																																																																								
2	2480.00	63.56	-----	-----	--	--	--	--	--	109	157	AVERAGE																																																																																																								

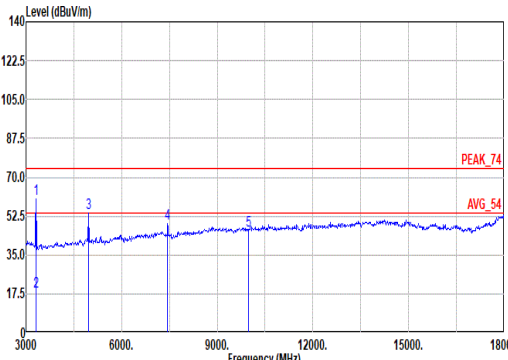
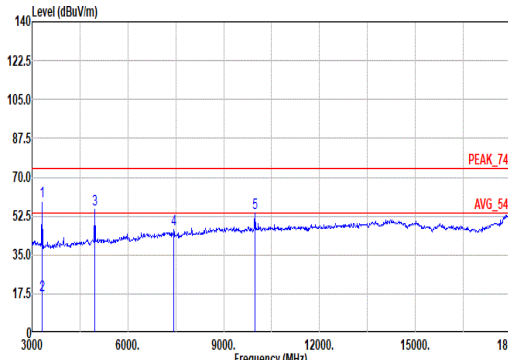


Mode	6																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal																																																																																																					
Peak																																																																																																						
	Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 HORIZONTAL																																																																																																					
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 3306.00</td><td>60.46</td><td>74.00</td><td>-13.54</td><td>88.13</td><td>29.63</td><td>8.84</td><td>67.24</td><td>1.10</td><td>100</td><td>146</td><td>Peak</td></tr><tr><td>2 3308.00</td><td>18.30</td><td>54.00</td><td>-35.70</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3 4960.00</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>76.85</td><td>33.15</td><td>10.97</td><td>67.68</td><td>0.47</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4 7440.00</td><td>49.27</td><td>74.00</td><td>-24.73</td><td>66.12</td><td>36.57</td><td>13.37</td><td>67.13</td><td>0.34</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>5 9990.00</td><td>45.74</td><td>74.00</td><td>-28.26</td><td>59.78</td><td>38.55</td><td>15.58</td><td>68.55</td><td>0.38</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 3306.00	60.46	74.00	-13.54	88.13	29.63	8.84	67.24	1.10	100	146	Peak	2 3308.00	18.30	54.00	-35.70	--	--	--	--	--	--	--	Average	3 4960.00	53.76	74.00	-20.24	76.85	33.15	10.97	67.68	0.47	--	--	PEAK	4 7440.00	49.27	74.00	-24.73	66.12	36.57	13.37	67.13	0.34	--	--	PEAK	5 9990.00	45.74	74.00	-28.26	59.78	38.55	15.58	68.55	0.38	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1 3306.00	60.46	74.00	-13.54	88.13	29.63	8.84	67.24	1.10	100	146	Peak																																																																																											
2 3308.00	18.30	54.00	-35.70	--	--	--	--	--	--	--	Average																																																																																											
3 4960.00	53.76	74.00	-20.24	76.85	33.15	10.97	67.68	0.47	--	--	PEAK																																																																																											
4 7440.00	49.27	74.00	-24.73	66.12	36.57	13.37	67.13	0.34	--	--	PEAK																																																																																											
5 9990.00	45.74	74.00	-28.26	59.78	38.55	15.58	68.55	0.38	--	--	Peak																																																																																											
Peak																																																																																																						
	Site : 03CH01-CA Condition: PEAK_74 3m HORN_02113_240426 VERTICAL																																																																																																					
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 3306.00</td><td>59.18</td><td>74.00</td><td>-14.82</td><td>86.81</td><td>29.67</td><td>8.84</td><td>67.24</td><td>1.10</td><td>231</td><td>168</td><td>Peak</td></tr><tr><td>2 3308.00</td><td>17.02</td><td>54.00</td><td>-36.98</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3 4960.00</td><td>55.34</td><td>74.00</td><td>-18.66</td><td>78.40</td><td>33.18</td><td>10.97</td><td>67.68</td><td>0.47</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4 7440.00</td><td>46.57</td><td>74.00</td><td>-27.43</td><td>63.35</td><td>36.64</td><td>13.37</td><td>67.13</td><td>0.34</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>5 9990.00</td><td>53.68</td><td>74.00</td><td>-20.32</td><td>67.72</td><td>38.55</td><td>15.58</td><td>68.55</td><td>0.38</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 3306.00	59.18	74.00	-14.82	86.81	29.67	8.84	67.24	1.10	231	168	Peak	2 3308.00	17.02	54.00	-36.98	--	--	--	--	--	--	--	Average	3 4960.00	55.34	74.00	-18.66	78.40	33.18	10.97	67.68	0.47	--	--	PEAK	4 7440.00	46.57	74.00	-27.43	63.35	36.64	13.37	67.13	0.34	--	--	PEAK	5 9990.00	53.68	74.00	-20.32	67.72	38.55	15.58	68.55	0.38	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1 3306.00	59.18	74.00	-14.82	86.81	29.67	8.84	67.24	1.10	231	168	Peak																																																																																											
2 3308.00	17.02	54.00	-36.98	--	--	--	--	--	--	--	Average																																																																																											
3 4960.00	55.34	74.00	-18.66	78.40	33.18	10.97	67.68	0.47	--	--	PEAK																																																																																											
4 7440.00	46.57	74.00	-27.43	63.35	36.64	13.37	67.13	0.34	--	--	PEAK																																																																																											
5 9990.00	53.68	74.00	-20.32	67.72	38.55	15.58	68.55	0.38	--	--	Peak																																																																																											

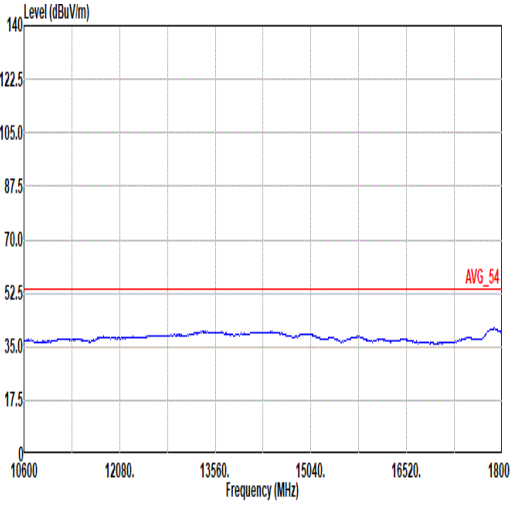
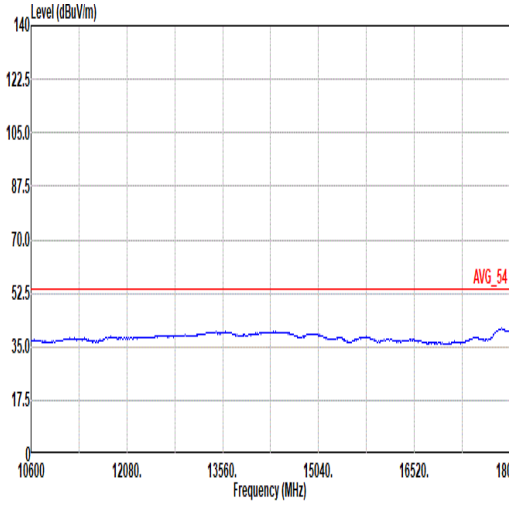


Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH01-CA Condition: AVG_54 3m HORN_02113_240426 HORIZONTAL	 Site : 03CH01-CA Condition: AVG_54 3m HORN_02113_240426 VERTICAL

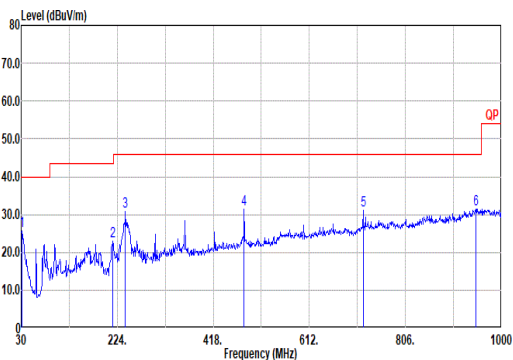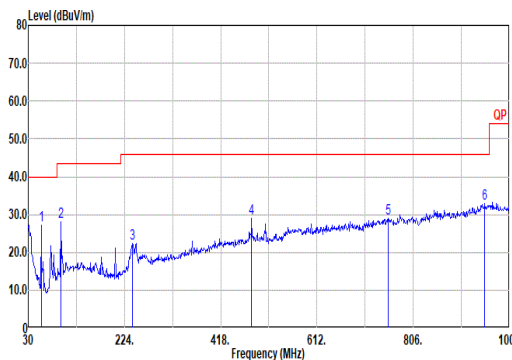


Mode	7																																																																																																																																																																																																																																	
	LF																																																																																																																																																																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																																																																																																																																	
ANT	1																																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																
QP/ Peak	 Site : 03CH01-CA Condition: QP 3m B1LOG_54683_241115 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.97</td><td>25.57</td><td>40.00</td><td>-14.43</td><td>32.47</td><td>24.57</td><td>0.85</td><td>32.40</td><td>0.08</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>215.27</td><td>22.80</td><td>43.50</td><td>-20.70</td><td>37.79</td><td>15.13</td><td>2.22</td><td>32.45</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>240.49</td><td>30.75</td><td>46.00</td><td>-15.25</td><td>43.05</td><td>17.69</td><td>2.34</td><td>32.45</td><td>0.12</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>480.08</td><td>31.52</td><td>46.00</td><td>-14.48</td><td>37.03</td><td>23.69</td><td>3.35</td><td>32.76</td><td>0.21</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>720.64</td><td>31.17</td><td>46.00</td><td>-14.83</td><td>32.50</td><td>27.19</td><td>4.12</td><td>32.87</td><td>0.23</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>948.59</td><td>31.44</td><td>46.00</td><td>-14.56</td><td>27.02</td><td>30.92</td><td>4.75</td><td>31.59</td><td>0.34</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.97	25.57	40.00	-14.43	32.47	24.57	0.85	32.40	0.08	--	--	--	Peak	2	215.27	22.80	43.50	-20.70	37.79	15.13	2.22	32.45	0.11	--	--	--	Peak	3	240.49	30.75	46.00	-15.25	43.05	17.69	2.34	32.45	0.12	--	--	--	Peak	4	480.08	31.52	46.00	-14.48	37.03	23.69	3.35	32.76	0.21	--	--	--	Peak	5	720.64	31.17	46.00	-14.83	32.50	27.19	4.12	32.87	0.23	--	--	--	Peak	6	948.59	31.44	46.00	-14.56	27.02	30.92	4.75	31.59	0.34	--	--	--	Peak	 Site : 03CH01-CA Condition: QP 3m B1LOG_54683_241115 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>56.19</td><td>27.28</td><td>40.00</td><td>-12.72</td><td>46.09</td><td>12.41</td><td>1.14</td><td>32.43</td><td>0.07</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>95.96</td><td>28.14</td><td>43.50</td><td>-15.36</td><td>43.31</td><td>15.58</td><td>1.49</td><td>32.42</td><td>0.18</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>240.49</td><td>22.28</td><td>46.00</td><td>-23.72</td><td>34.58</td><td>17.69</td><td>2.34</td><td>32.45</td><td>0.12</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>480.08</td><td>28.97</td><td>46.00</td><td>-17.03</td><td>34.48</td><td>23.69</td><td>3.35</td><td>32.76</td><td>0.21</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>755.56</td><td>28.88</td><td>46.00</td><td>-17.12</td><td>29.15</td><td>28.07</td><td>4.22</td><td>32.78</td><td>0.22</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>950.53</td><td>32.95</td><td>46.00</td><td>-13.05</td><td>28.45</td><td>30.99</td><td>4.75</td><td>31.58</td><td>0.34</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	56.19	27.28	40.00	-12.72	46.09	12.41	1.14	32.43	0.07	--	--	--	Peak	2	95.96	28.14	43.50	-15.36	43.31	15.58	1.49	32.42	0.18	--	--	--	Peak	3	240.49	22.28	46.00	-23.72	34.58	17.69	2.34	32.45	0.12	--	--	--	Peak	4	480.08	28.97	46.00	-17.03	34.48	23.69	3.35	32.76	0.21	--	--	--	Peak	5	755.56	28.88	46.00	-17.12	29.15	28.07	4.22	32.78	0.22	--	--	--	Peak	6	950.53	32.95	46.00	-13.05	28.45	30.99	4.75	31.58	0.34	--	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																				
		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																					
1	30.97	25.57	40.00	-14.43	32.47	24.57	0.85	32.40	0.08	--	--	--	Peak																																																																																																																																																																																																																					
2	215.27	22.80	43.50	-20.70	37.79	15.13	2.22	32.45	0.11	--	--	--	Peak																																																																																																																																																																																																																					
3	240.49	30.75	46.00	-15.25	43.05	17.69	2.34	32.45	0.12	--	--	--	Peak																																																																																																																																																																																																																					
4	480.08	31.52	46.00	-14.48	37.03	23.69	3.35	32.76	0.21	--	--	--	Peak																																																																																																																																																																																																																					
5	720.64	31.17	46.00	-14.83	32.50	27.19	4.12	32.87	0.23	--	--	--	Peak																																																																																																																																																																																																																					
6	948.59	31.44	46.00	-14.56	27.02	30.92	4.75	31.59	0.34	--	--	--	Peak																																																																																																																																																																																																																					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																						
1	56.19	27.28	40.00	-12.72	46.09	12.41	1.14	32.43	0.07	--	--	--	Peak																																																																																																																																																																																																																					
2	95.96	28.14	43.50	-15.36	43.31	15.58	1.49	32.42	0.18	--	--	--	Peak																																																																																																																																																																																																																					
3	240.49	22.28	46.00	-23.72	34.58	17.69	2.34	32.45	0.12	--	--	--	Peak																																																																																																																																																																																																																					
4	480.08	28.97	46.00	-17.03	34.48	23.69	3.35	32.76	0.21	--	--	--	Peak																																																																																																																																																																																																																					
5	755.56	28.88	46.00	-17.12	29.15	28.07	4.22	32.78	0.22	--	--	--	Peak																																																																																																																																																																																																																					
6	950.53	32.95	46.00	-13.05	28.45	30.99	4.75	31.58	0.34	--	--	--	Peak																																																																																																																																																																																																																					

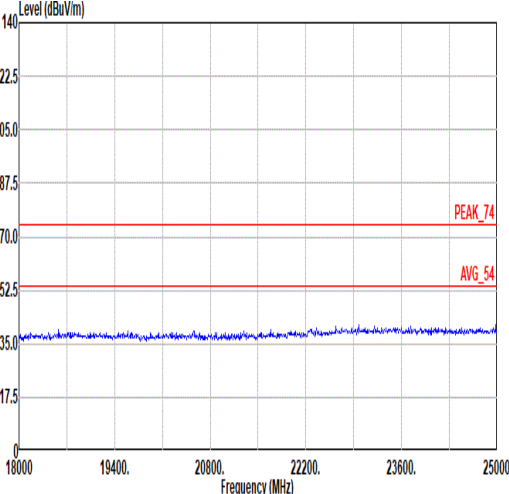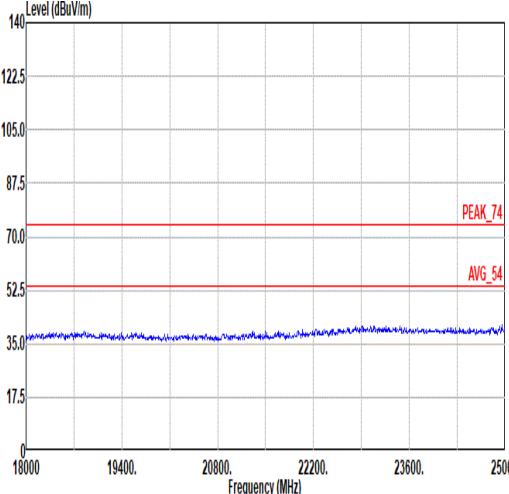

Mode	8	
	SHF	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
Avg	 Site : 03CH01-CA Condition: PEAK_74 1m SHF_HORIN_041_240807 HORIZONTAL	 Site : 03CH01-CA Condition: PEAK_74 1m SHF_HORIN_041_240807 VERTICAL

Appendix C. Duty Cycle Plots

<1Mbps>

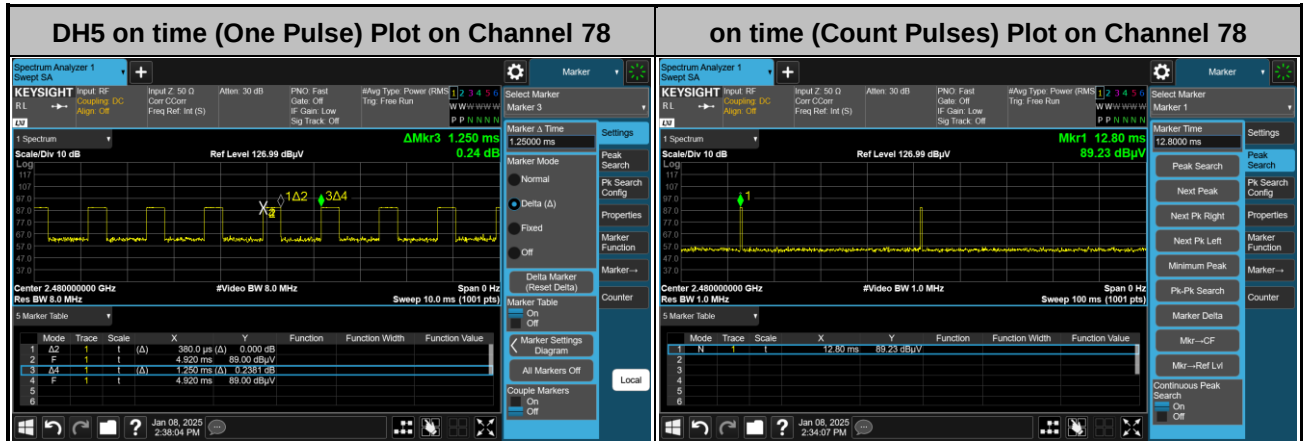

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 0.38 / 100 = 0.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -42.38 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the on time period to have DH5 packet completing one hopping sequence is

$$0.38 \text{ ms} \times 20 \text{ channels} = 7.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 7.6 \text{ ms}] = 2 \text{ hops}$


Thus, the maximum possible ON time:

$$0.38 \text{ ms} \times 2 = 0.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(0.76 \text{ ms}/100 \text{ ms}) = -42.38 \text{ dB}$$

<2Mbps>

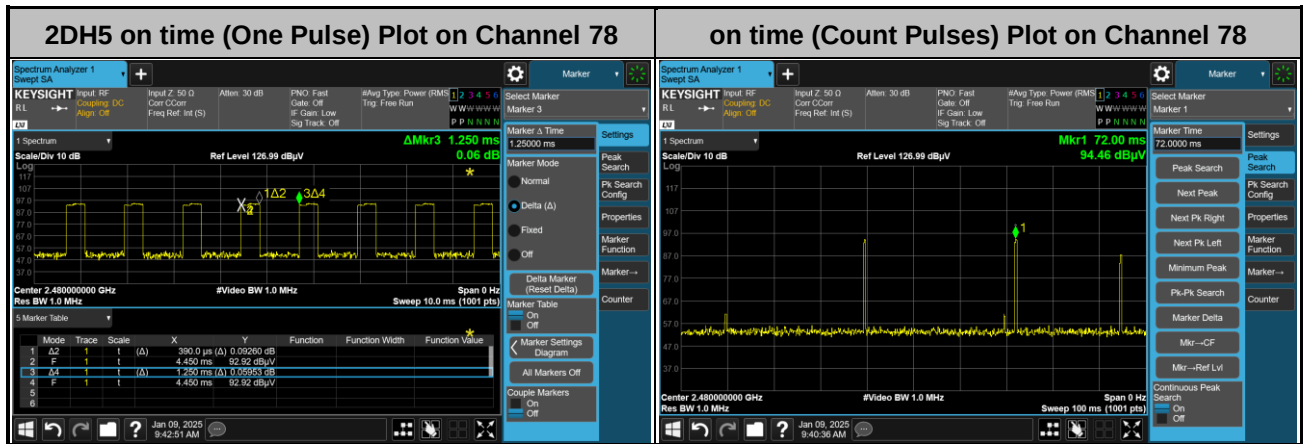

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 \times 0.39 / 100 = 0.78 \%$
2. Worst case Duty cycle correction factor = $20 \times \log(\text{Duty cycle}) = -42.16 \text{ dB}$
3. 2DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the on time period to have DH5 packet completing one hopping sequence is

$$0.39 \text{ ms} \times 20 \text{ channels} = 7.8 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 7.8 \text{ ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$0.39 \text{ ms} \times 2 = 0.78 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(0.78 \text{ ms}/100 \text{ ms}) = -42.16 \text{ dB}$$