






KIEL2506-YW05992

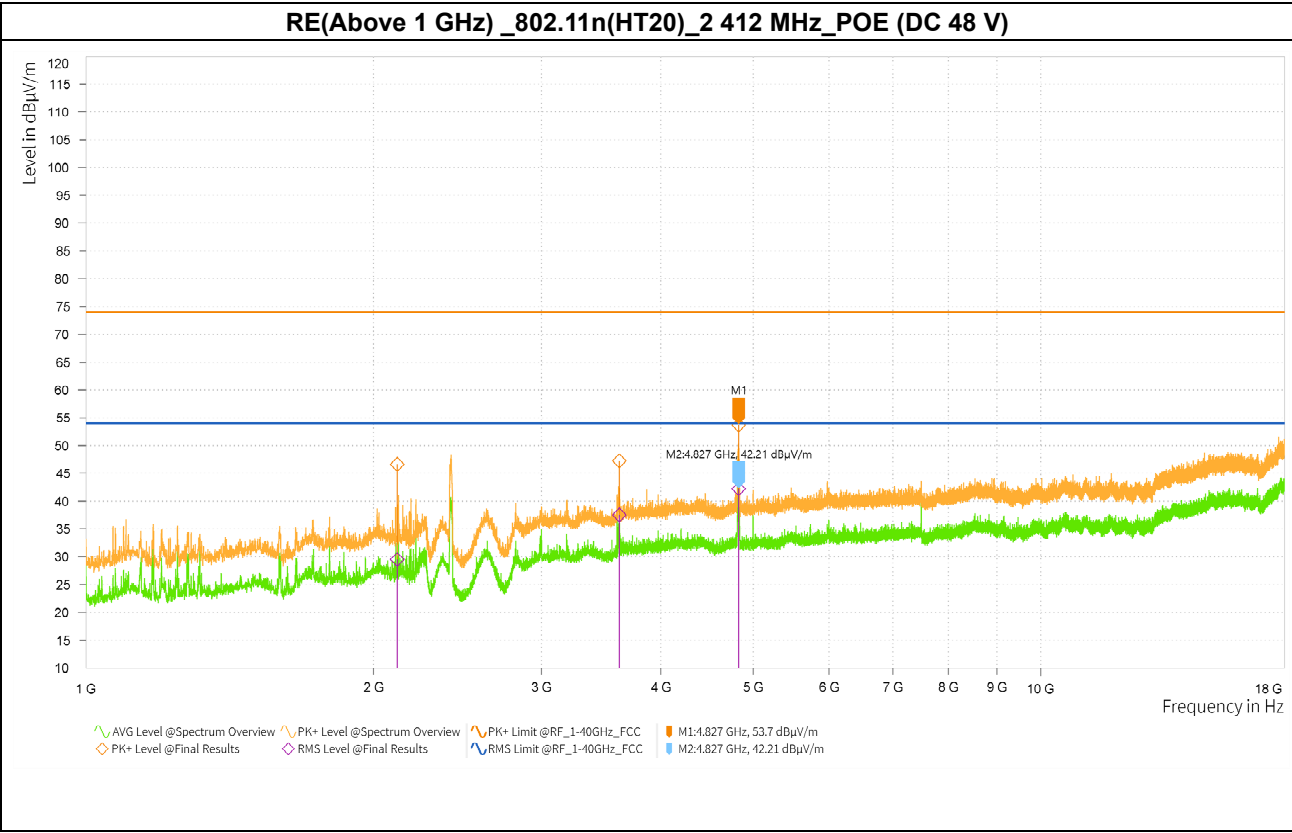


Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
2 119.000	57.80	46.60	40.70	30.19	0.69	1.00	V	65.1	-11.20	27.40	74.00	23.81	54.00
* 3 619.500	52.87	47.24	43.14	38.20	0.69	1.00	H	44.3	-5.63	26.76	74.00	15.80	54.00
* 4 827.000	56.50	53.70	45.01	42.90	0.69	1.00	V	333.3	-2.80	20.30	74.00	11.10	54.00

- Note)
- Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 - AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 - DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 - Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 - Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 - * - indicates frequency in Restricted Band.







KIEL2506-YW05992

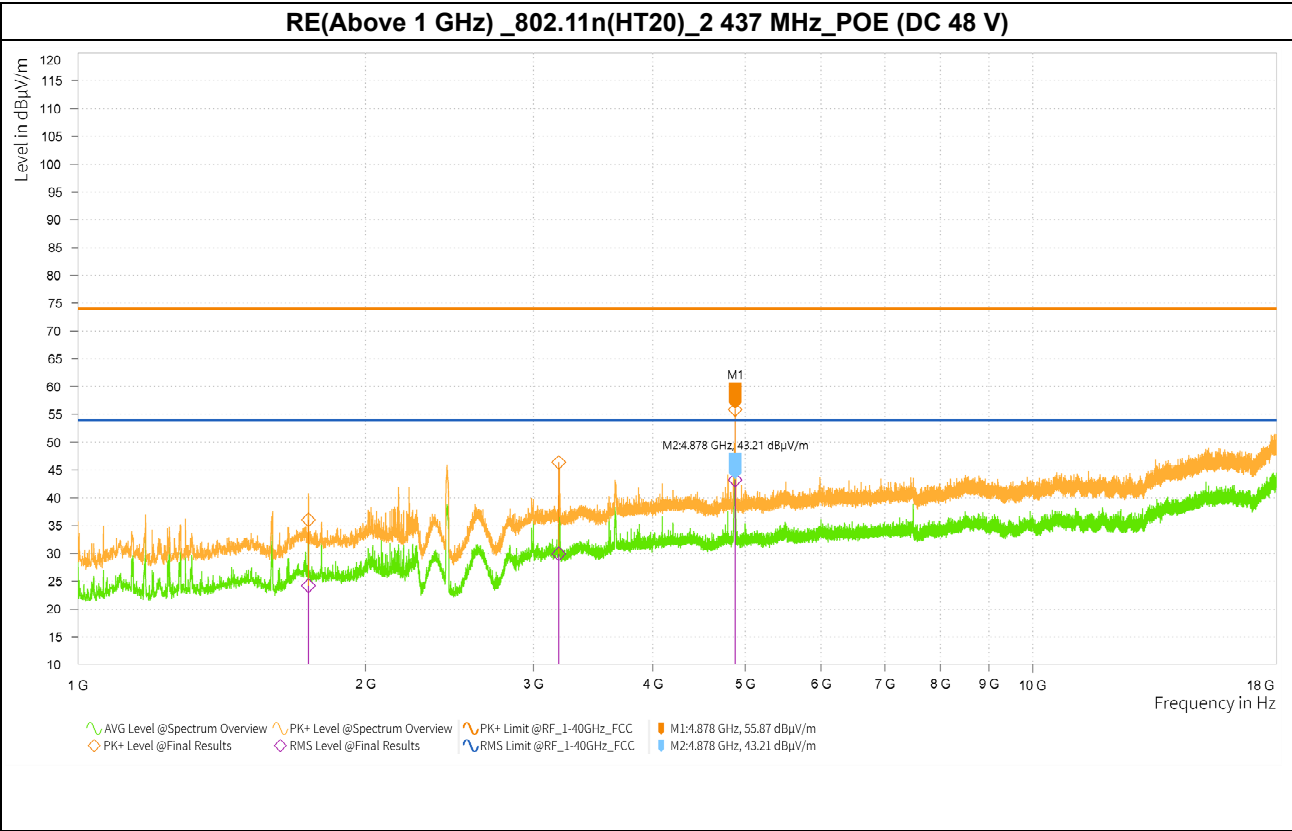

Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
1 744.000	49.28	36.05	37.42	24.88	0.69	3.00	H	357.7	-13.23	37.95	74.00	29.12	54.00
3 189.500	53.04	46.41	36.55	30.61	0.69	3.00	V	157.1	-6.63	27.59	74.00	23.39	54.00
* 4 878.000	58.47	55.87	45.81	43.90	0.69	1.00	V	305.2	-2.60	18.13	74.00	10.10	54.00


Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
6. * - indicates frequency in Restricted Band.







KIEL2506-YW05992

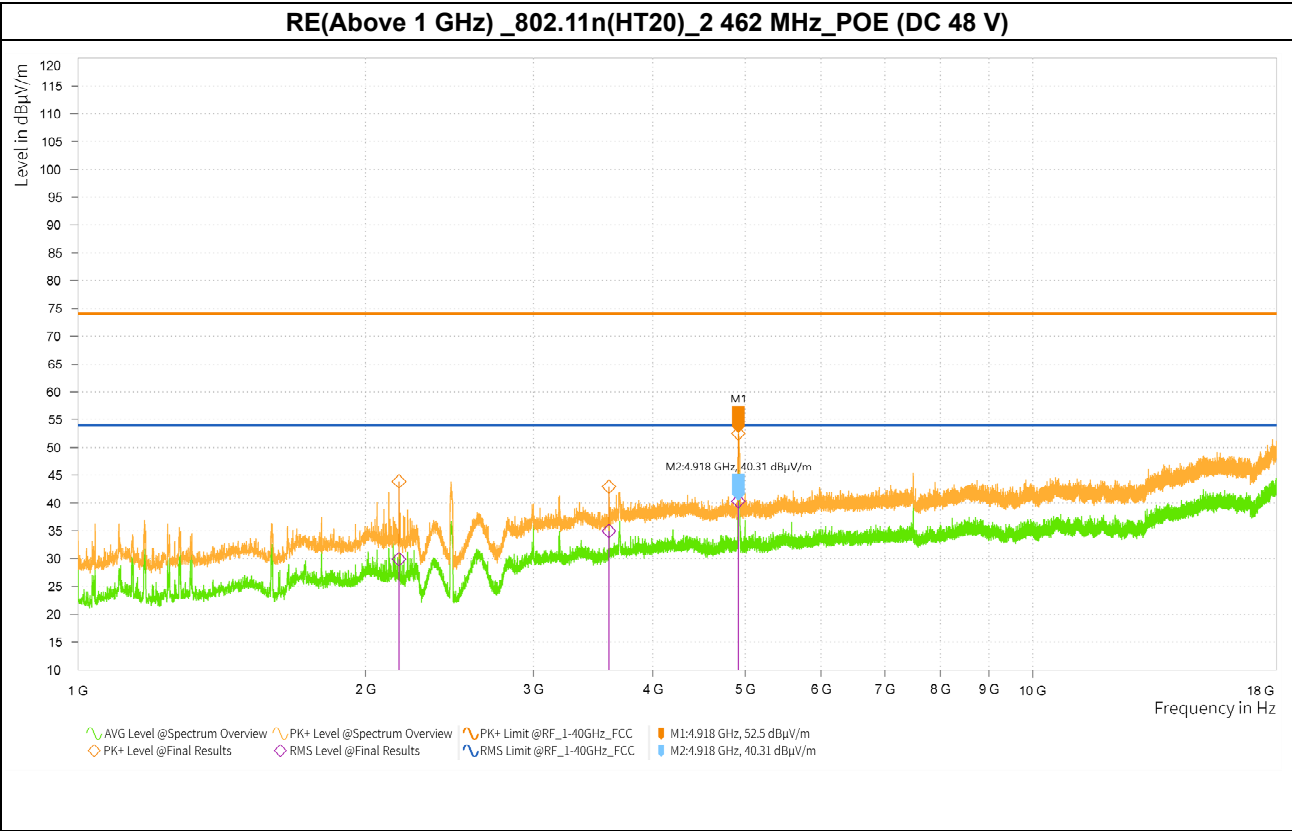


Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
2 169.000	55.26	43.89	41.24	30.56	0.69	1.00	V	1.5	-11.37	30.11	74.00	23.44	54.00
3 599.500	48.64	42.92	40.65	35.62	0.69	1.00	H	213.1	-5.72	31.08	74.00	18.38	54.00
* 4 917.500	55.01	52.50	42.82	41.00	0.69	1.00	V	38.2	-2.51	21.50	74.00	13.00	54.00

- Note)
- Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 - AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 - DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 - Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 - Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 - * - indicates frequency in Restricted Band.







KIEL2506-YW05992

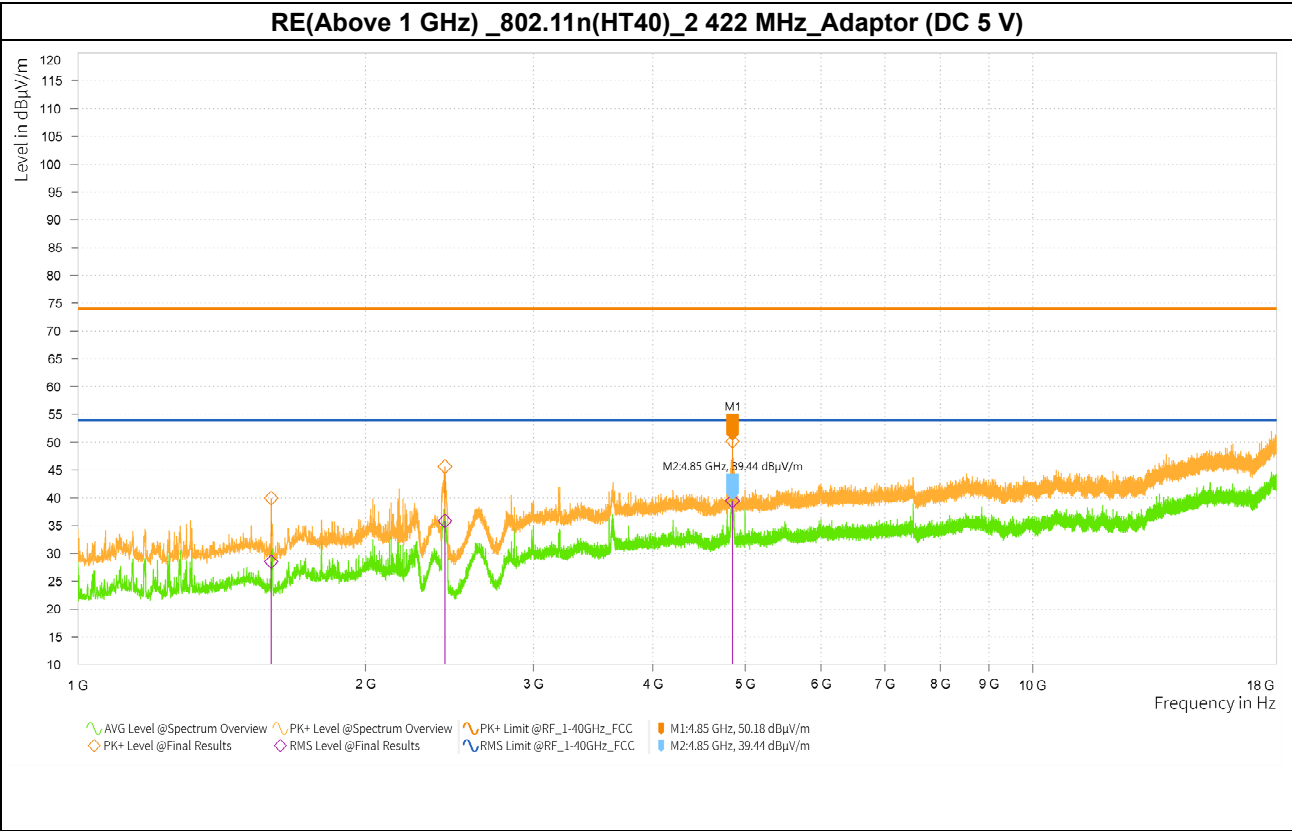

Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
* 1 594.000	53.84	39.95	42.39	29.65	1.15	2.00	V	138.1	-13.89	34.05	74.00	24.35	54.00
2 424.000	55.97	45.63	46.18	36.99	1.15	1.00	V	0.1	-10.34	28.37	74.00	17.01	54.00
* 4 849.500	52.87	50.18	42.13	40.59	1.15	1.00	V	306.1	-2.69	23.82	74.00	13.41	54.00


Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
6. * - indicates frequency in Restricted Band.





KIEL2506-YW05992

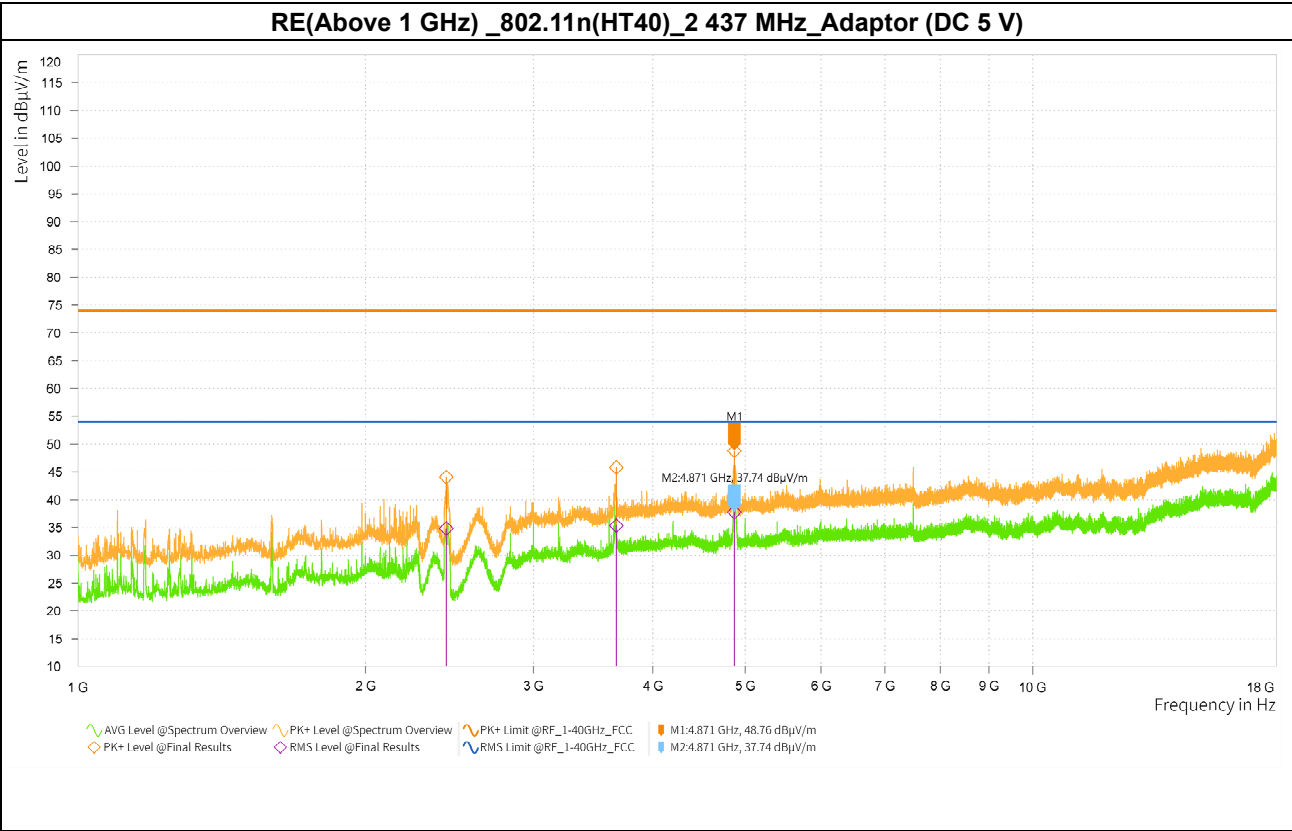

Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
2 431.000	54.35	44.05	45.12	35.97	1.15	1.00	V	0.8	-10.30	29.95	74.00	18.03	54.00
* 3 662.500	51.27	45.81	40.78	36.47	1.15	1.00	H	30.3	-5.46	28.19	74.00	17.53	54.00
* 4 870.500	51.38	48.76	40.36	38.89	1.15	1.00	V	358.7	-2.62	25.24	74.00	15.11	54.00

Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
6. * - indicates frequency in Restricted Band.

