






KIEL2506-YW05992

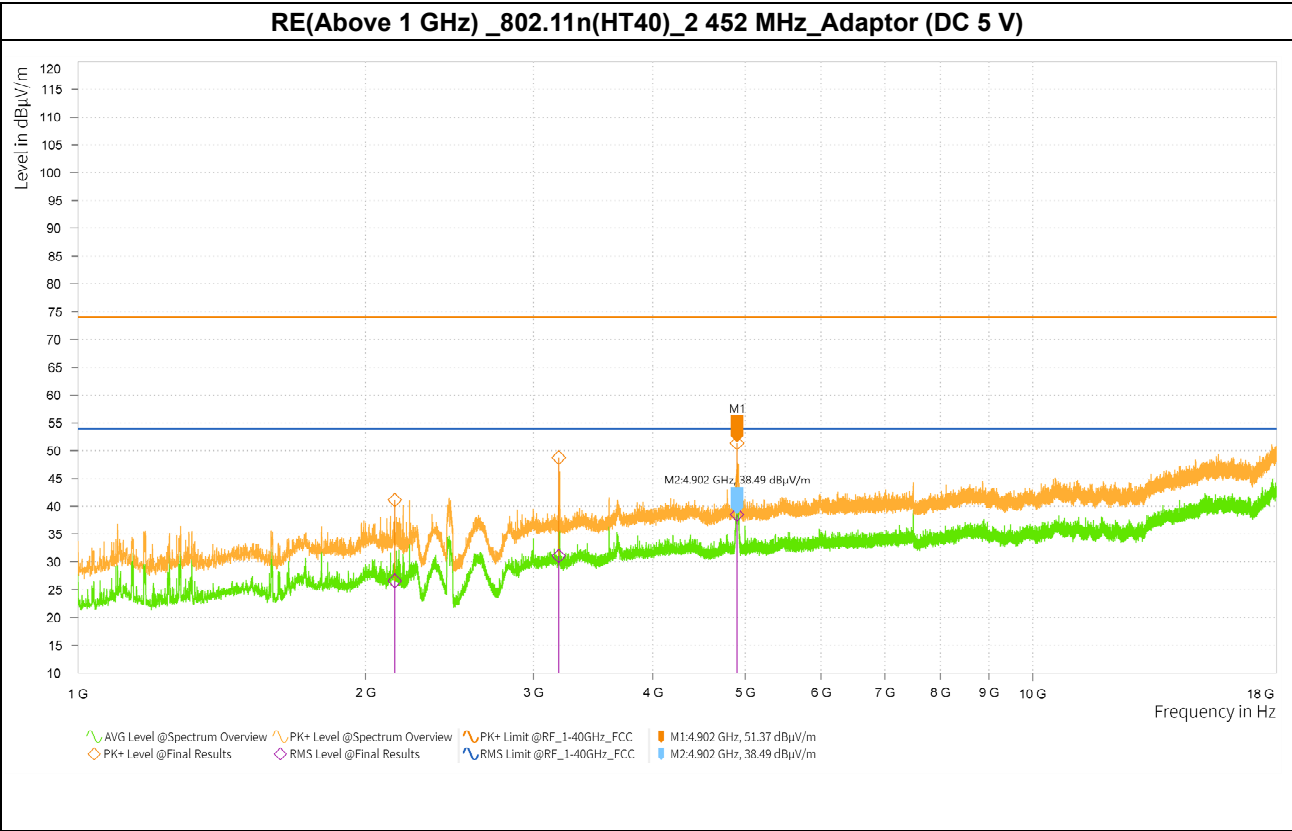


Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
2 147.500	52.53	41.14	37.99	27.75	1.15	1.00	H	120.6	-11.39	32.86	74.00	26.25	54.00
3 188.000	55.36	48.73	37.70	32.22	1.15	1.00	V	292.6	-6.63	25.27	74.00	21.78	54.00
* 4 901.500	53.90	51.37	41.02	39.64	1.15	1.00	V	292.6	-2.53	22.63	74.00	14.36	54.00

- Note)
- Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 - AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 - DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 - Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 - Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 - * - indicates frequency in Restricted Band.






KIEL2506-YW05992

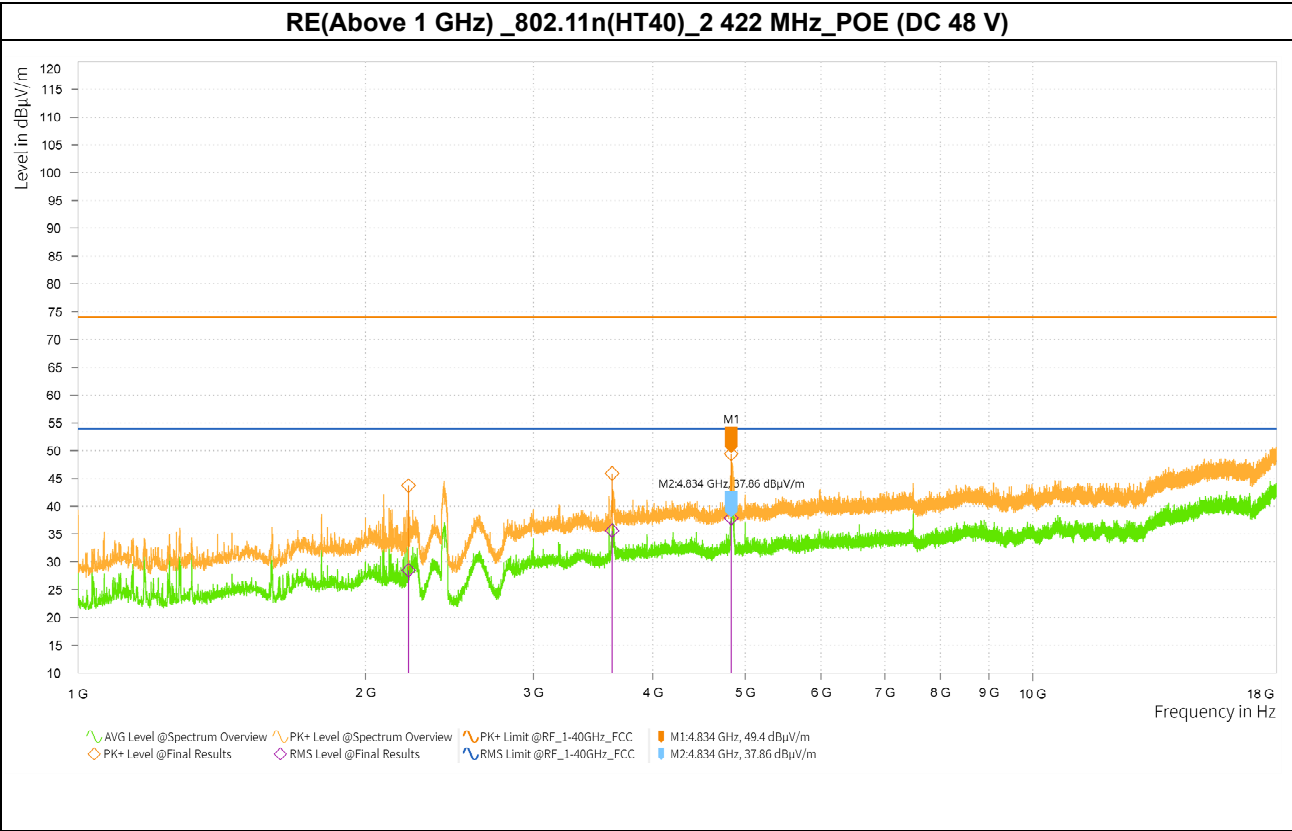


	Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
*	2 220.000	55.08	43.75	39.85	29.67	1.15	1.00	H	14.4	-11.33	30.25	74.00	24.33	54.00
*	3 626.000	51.53	45.93	41.24	36.79	1.15	1.00	H	30.1	-5.60	28.07	74.00	17.21	54.00
*	4 834.000	52.17	49.40	40.63	39.01	1.15	1.00	V	29.4	-2.77	24.60	74.00	14.99	54.00

- Note)
- Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 - AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 - DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 - Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 - Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 - * - indicates frequency in Restricted Band.






KIEL2506-YW05992

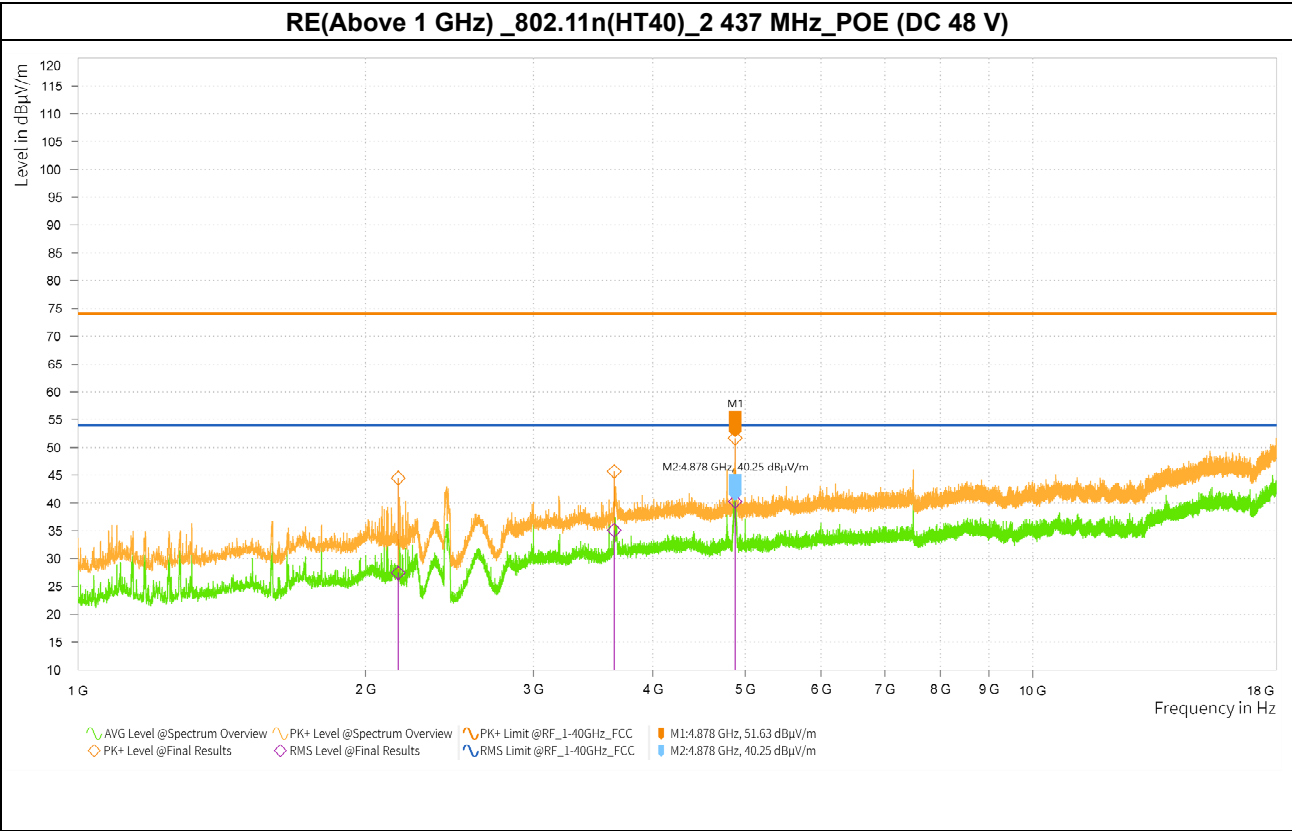


Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
2 165.000	55.86	44.48	38.81	28.58	1.15	1.00	V	0.3	-11.38	29.52	74.00	25.42	54.00
* 3 645.500	51.19	45.67	40.61	36.24	1.15	1.00	H	43.6	-5.52	28.33	74.00	17.76	54.00
* 4 878.000	54.23	51.63	42.85	41.40	1.15	1.00	V	305.9	-2.60	22.37	74.00	12.60	54.00

- Note)
- Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 - AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 - DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 - Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 - Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 - * - indicates frequency in Restricted Band.

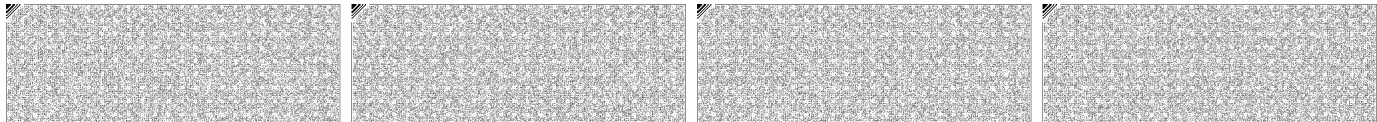





KIEL2506-YW05992

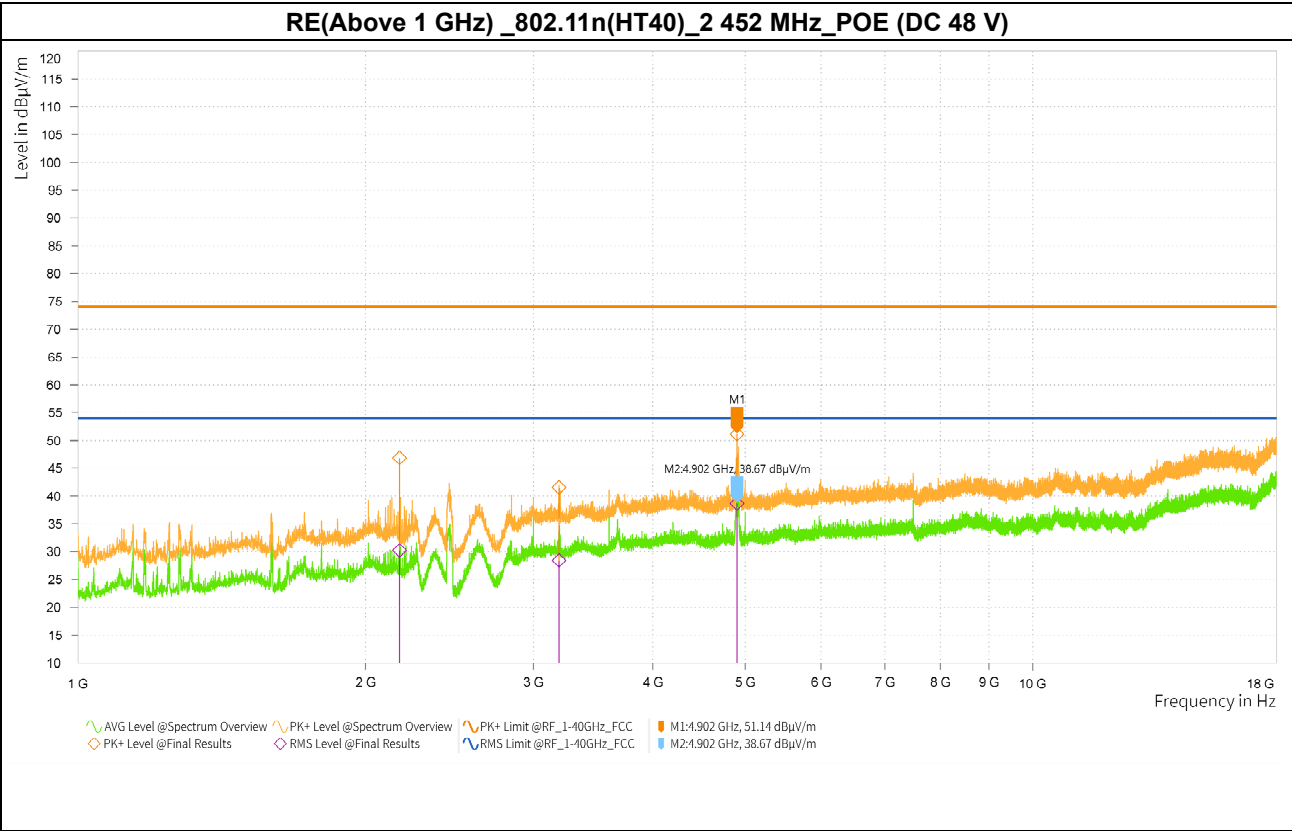

Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
2 172.000	58.23	46.86	41.56	31.34	1.15	1.00	H	330.9	-11.37	27.14	74.00	22.66	54.00
3 190.000	48.16	41.54	35.00	29.53	1.15	3.00	H	305.2	-6.62	32.46	74.00	24.47	54.00
* 4 901.500	53.67	51.14	41.20	39.82	1.15	1.00	V	4.8	-2.53	22.86	74.00	14.18	54.00

- Note)
1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 6. * - indicates frequency in Restricted Band.






KIEL2506-YW05992

-Simultaneous

RE(Above 1 GHz)_1 GHz ~ 1.2 GHz _802.11n(HT40)_2 437 MHz_Adaptor (DC 5 V)

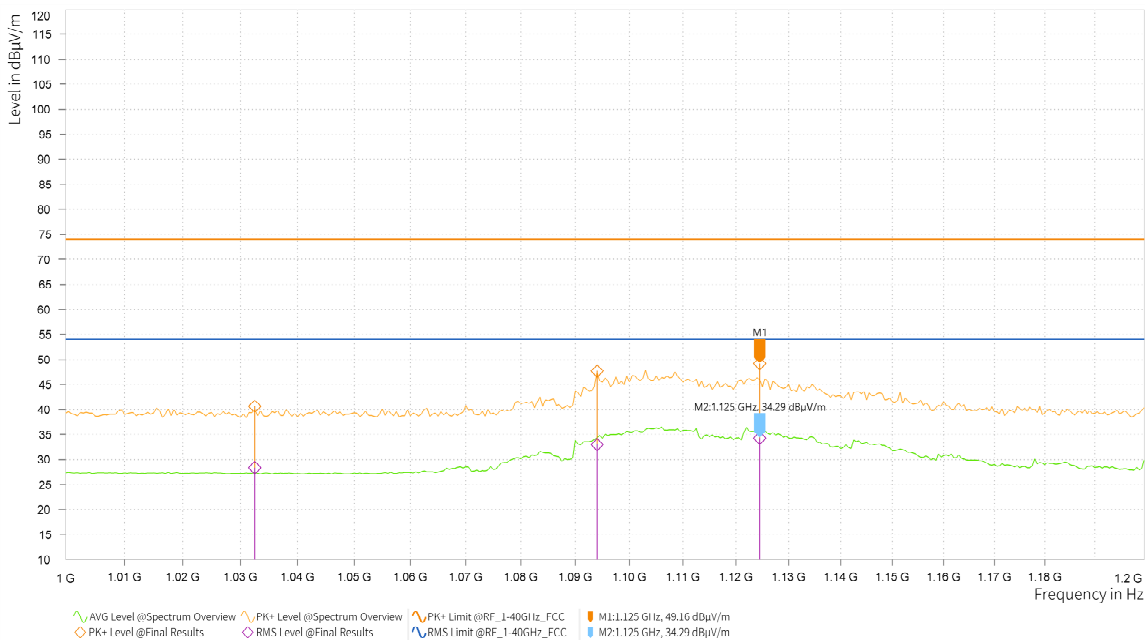

Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
* 1 032.500	56.49	40.62	44.23	29.05	0.69	1.50	H	315.6	-15.87	33.38	74.00	24.95	54.00
* 1 094.000	63.58	47.65	48.92	33.68	0.69	1.50	V	104.3	-15.93	26.35	74.00	20.32	54.00
* 1 124.500	65.13	49.16	50.26	34.98	0.69	1.50	V	106.3	-15.97	24.84	74.00	19.02	54.00

- Note)
1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
 2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
 3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
 4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
 5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
 6. * - indicates frequency in Restricted Band.

