







KIEL2506-YW05992

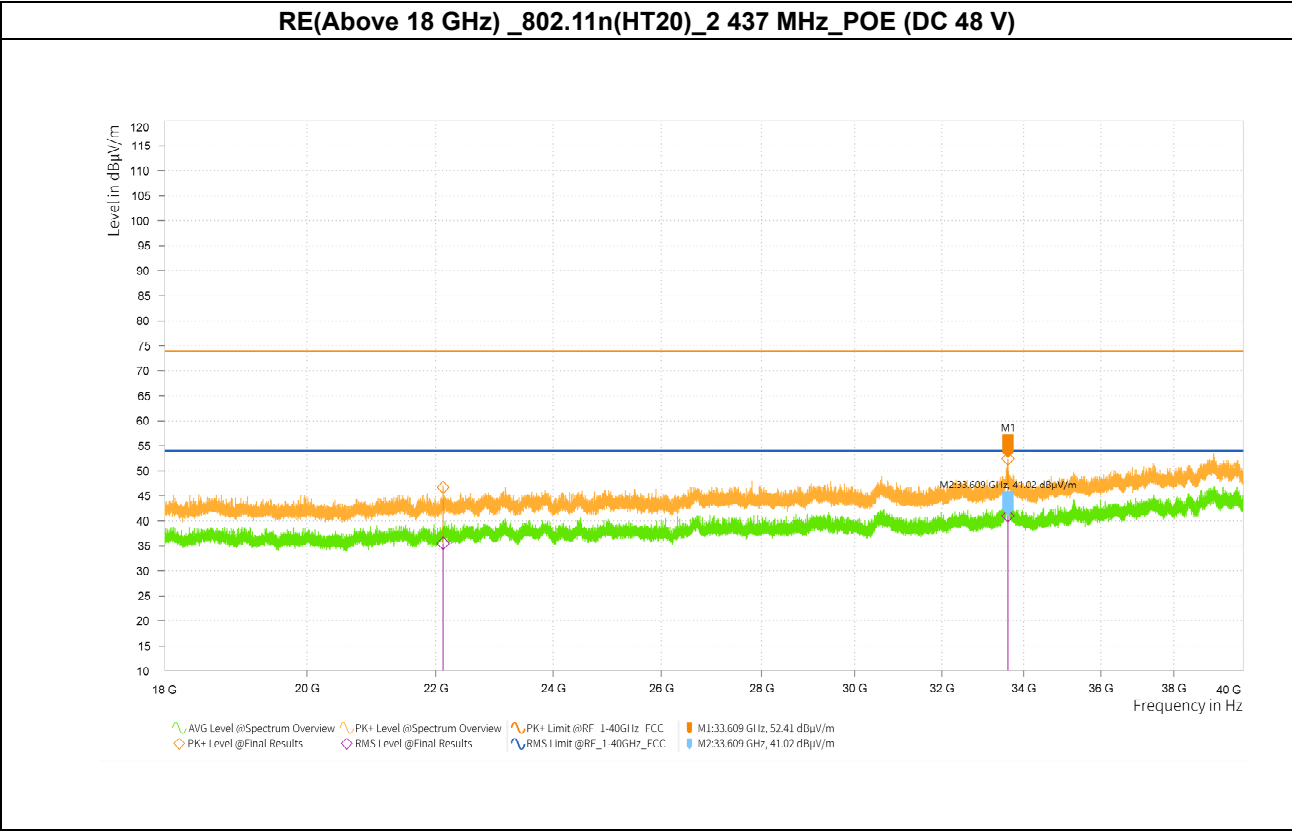

Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
* 22 120.500	53.29	46.69	42.08	36.17	0.69	3.00	V	77.8	-6.60	27.31	74.00	17.83	54.00
33 608.500	51.66	52.41	40.27	41.71	0.69	1.00	H	0.1	0.75	21.59	74.00	12.29	54.00

Note)


- Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
- AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
- DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
- Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
- * - indicates frequency in Restricted Band.





KIEL2506-YW05992


Restricted Band Edge

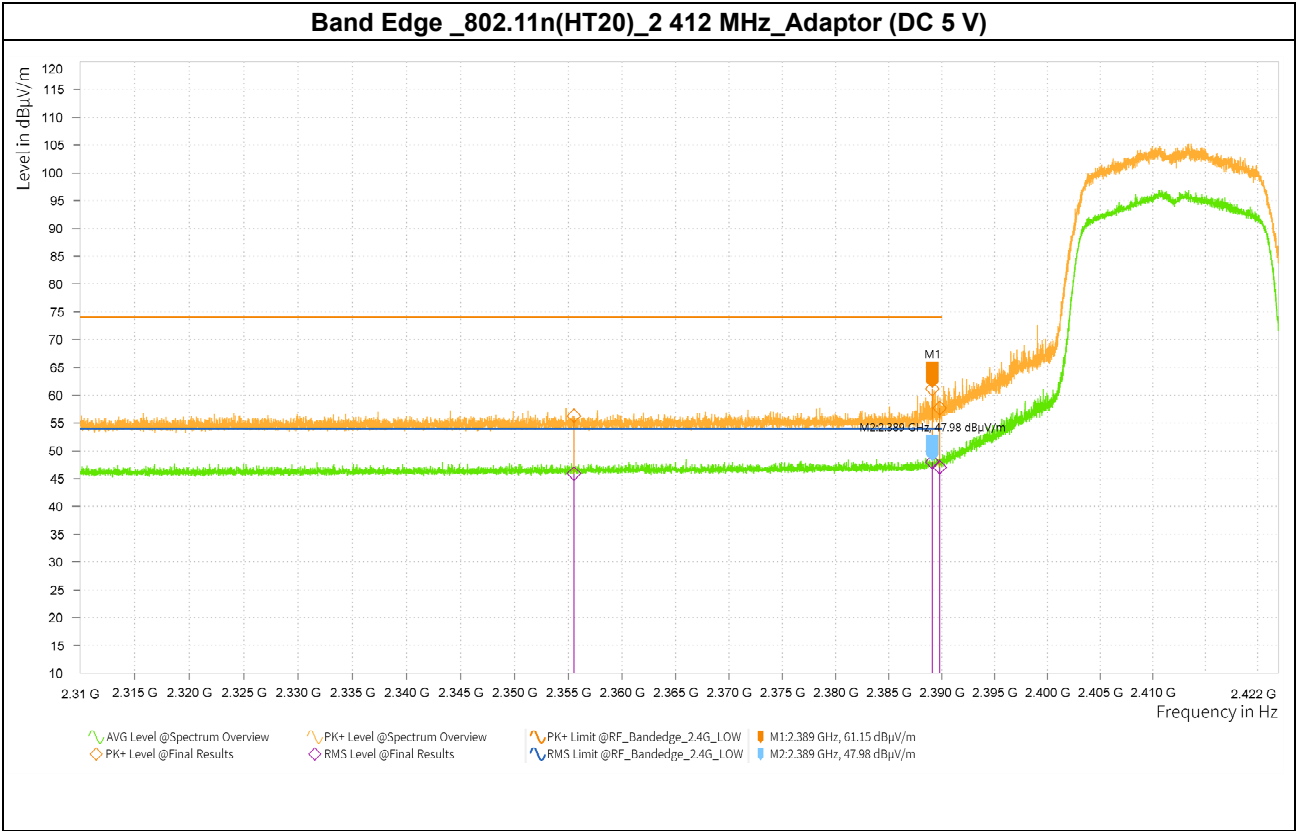

	Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
*	2 355.519	57.16	56.30	46.75	46.58	0.69	2.00	H	339.7	-0.86	17.70	74.00	7.42	54.00
*	2 389.109	61.83	61.15	48.66	48.67	0.69	2.00	V	358.5	-0.68	12.85	74.00	5.33	54.00
*	2 389.809	58.35	57.68	47.73	47.75	0.69	3.00	V	24.9	-0.67	16.32	74.00	6.25	54.00


Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
6. * - indicates frequency in Restricted Band.






KIEL2506-YW05992

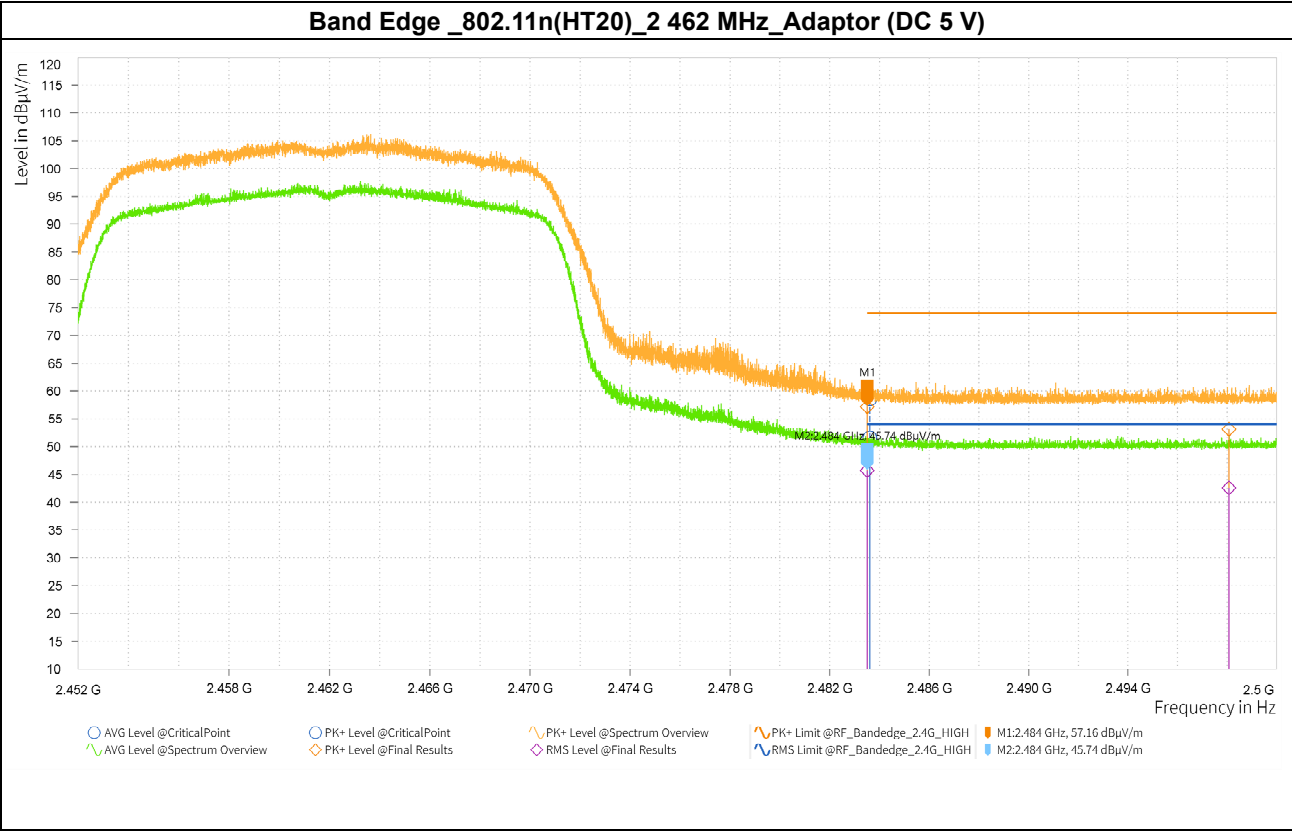

Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
* 2 483.500	57.10	57.16	45.68	46.43	0.69	2.00	V	349.3	0.06	16.84	74.00	7.57	54.00
* 2 498.080	52.90	53.13	42.37	43.29	0.69	2.00	V	19.3	0.23	20.87	74.00	10.71	54.00


Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
6. * - indicates frequency in Restricted Band.






KIEL2506-YW05992

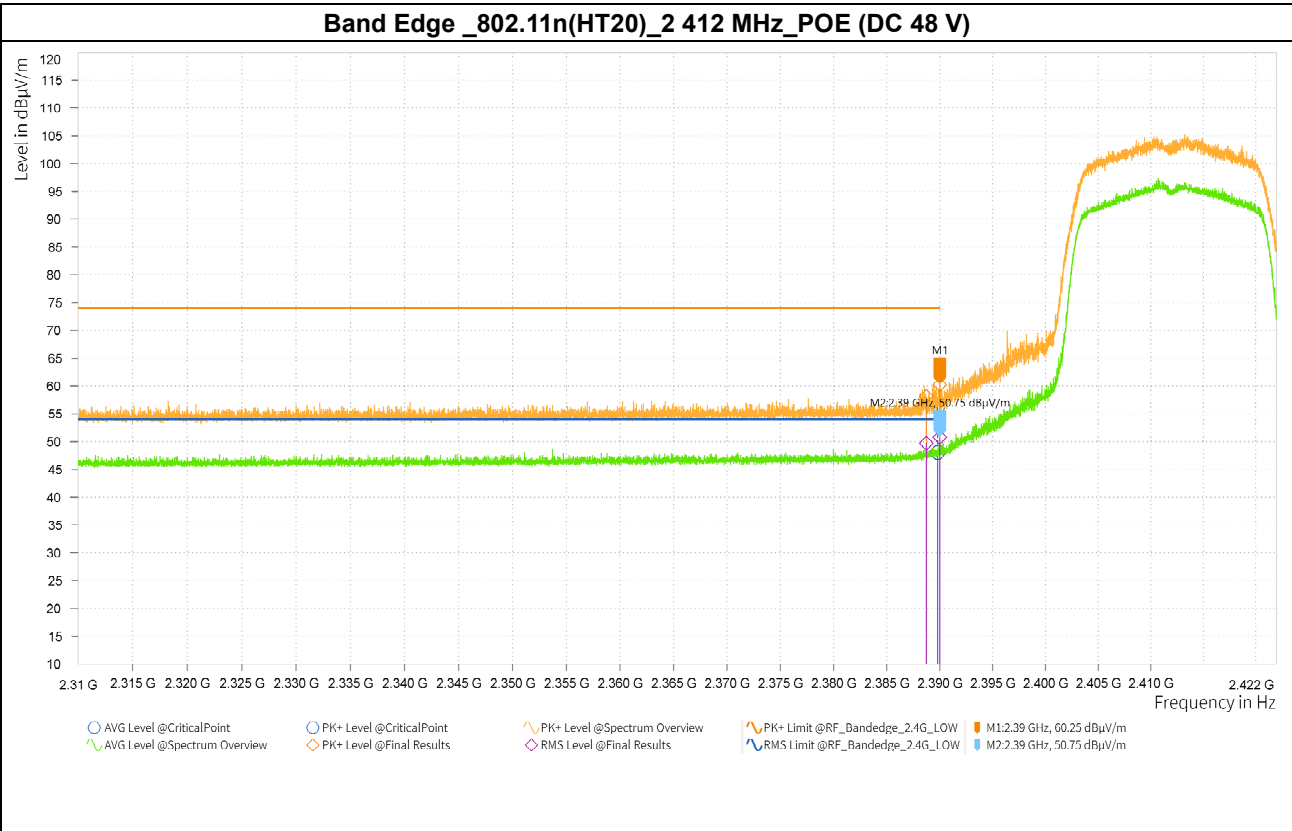

Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
* 2 388.736	58.81	58.13	50.41	50.42	0.69	2.00	V	34.9	-0.68	15.87	74.00	3.58	54.00
* 2 390.000	60.92	60.25	51.42	51.44	0.69	2.00	V	18.6	-0.67	13.75	74.00	2.56	54.00


Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
6. * - indicates frequency in Restricted Band.





KIEL2506-YW05992

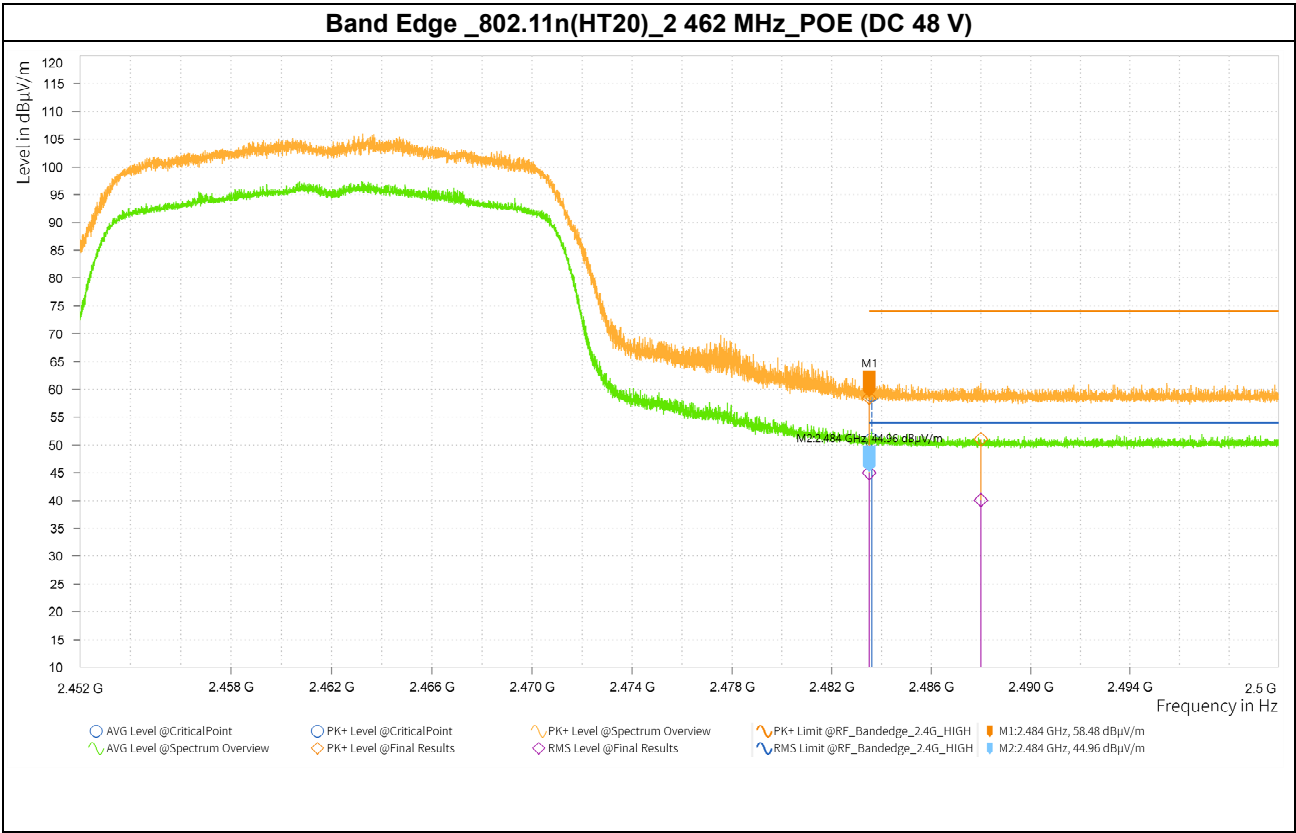

	Frequency [MHz]	Peak Reading [dBuV]	Peak Result [dBuV/m]	AVG Reading [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol	Azimuth [deg]	Corr. [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
*	2 483.500	58.42	58.48	44.90	45.65	0.69	2.00	V	19.0	0.06	15.52	74.00	8.35	54.00
*	2 488.000	50.89	51.01	39.97	40.78	0.69	3.00	V	28.9	0.12	22.99	74.00	13.22	54.00

Note)

1. Peak Result(dBuV/m) = Peak Reading Value(dBuV) + Correction Factor(dB/m)
2. AVG Result(dBuV/m) = Average Reading Value (dBuV) + Correction Factor(dB/m) + DCCF
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/AVG) Limit (dBuV/m) – (Peak/AVG) Result (dBuV/m)
6. * - indicates frequency in Restricted Band.

