


说明书

本产品为 CAN 总线 NFC 车载非接读卡器产品。

- 1、使用方法：将 NFC 卡片钥匙紧贴主驾 B 柱的 NFC 感应区域 1 秒左右就能开关锁
- 2、产品功能：支持刷 NFC 卡片钥匙、手机 NFC 钥匙进行车辆解/闭锁。本设备能够与车辆其他电子模块进行信息交互，给车主提供更多、更便利的服务。
- 3、产品性能：

产品尺寸	102.4*50.9*15.1(mm)
产品重量	43g±3g
额定电压	DV 12V
工作电压	9V~16V
平均工作电流	≤50mA
最大工作电流	≤350mA
刷卡距离	40mm 内能稳定检卡

- 4、图片示例：

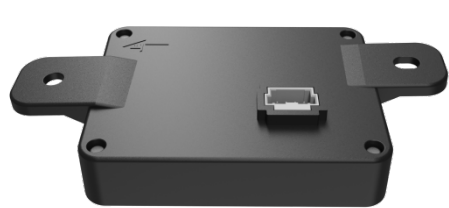

端子面



刷卡面

- 5、安装位置建议：B 柱


Instruction Manual

This product is CAN bus NFC vehicle non-connected card reader products.


- 1、 Usage method: Place the NFC card key close to the NFC sensing area on the driver's B-pillar for about 1 second to open or close the lock.;
- 2、 Product function: support Reader NFC card key, cell phone NFC key for vehicle unlocking/closing. This product is able to interact with other electronic modules of the vehicle to provide more convenient services to the vehicle owner.
- 3、 Product performance:

Product Size	102.4*50.9*15.1(mm)
Product Weight	43g \pm 3g
Rated Voltage	DV 12V
Operating Voltage	9V~16V
Average Working Current	\leq 50mA
Maximum Working Current	\leq 350mA
Card Swipe Distance	Stable card detection within 40mm

- 4、 Image examples:

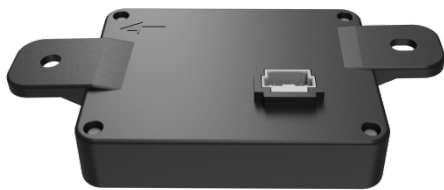

Terminal faces

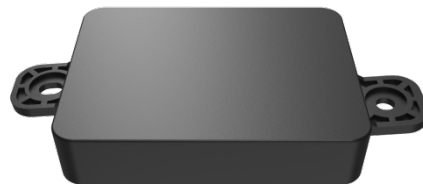

Swipe the card side

- 5、 Recommended installation location: B-pillar

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.