

RADIO TEST REPORT

Product : LoRaWAN Transceiver Module
Model Name : RYLR933
FCC ID : 2BNIV-LORA
Test Regulation : FCC 47 CFR Part 15 Subpart C (Section 15.247)
Received Date : 2025/3/21
Test Date : 2025/3/22 ~ 2025/3/27
Issued Date : 2025/7/22

Applicant : All Inspire Health
19 Morris Avenue, Building 128, Brooklyn, NY 11205
Issued By : Underwriters Laboratories Taiwan Co., Ltd.
Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd.,
Zhudong Township, Hsinchu County, Taiwan



The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

REVISION HISTORY

Original Test Report No.: 4791618243E-US-R0-V0

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Building A, B and E, No. 372-7, Sec. 4
Telephone :+886-2-7737-3000

Telephone : +886-2-7737-5000
Facsimile (FAX) : +886-3-583-7948

Table of Contents

1. Attestation of Test Results	4
2. Summary of Test Results	5
3. Test Methodology and Reference Procedures.....	6
4. Facilities and Accreditation	6
5. Measurement Uncertainty	7
6. Equipment under Test.....	8
6.1. Description of EUT	8
6.2. Channel List	9
6.3. Test Condition.....	10
6.4. Description of Available Antennas	11
6.5. Test Mode Applicability and Tested Channel Detail.....	12
6.6. Duty cycle	13
7. Test Equipment	14
8. Description of Test Setup	16
9. Test Results	18
9.1. Conducted Output Power.....	18
9.2. Radiated Spurious Emission	20
9.3. AC Power Line Conducted Emission	32

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

1. Attestation of Test Results

APPLICANT: All Inspire Health
 19 Morris Avenue, Building 128, Brooklyn, NY 11205

MANUFACTURER: InnoComm Mobile Technology Corporation
 3F, No. 6, Hsin Ann Rd., Hsinchu Science Park, Hsinchu 300092,
 Taiwan

EUT DESCRIPTION: LoRaWAN Transceiver Module

BRAND: All Inspire Health

MODEL: RYLR933

SAMPLE STAGE: Design Verification Test Sample

DATE of TESTED: 2025/3/22 ~ 2025/3/27

APPLICABLE STANDARDS	
STANDARD	Test Results
FCC 47 CFR PART 15 Subpart C (Section 15.247)	PASS

Underwriters Laboratories Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Prepared By:



Cindy Hsin
 Project Handler

Date : 2025/7/22

Approved and Authorized By:



Kent Liu
 Senior Laboratory Engineer

Date : 2025/7/22

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

2. Summary of Test Results

Summary of Test Results		
FCC Clause	Test Items	Result
15.247(b)	Conducted Output Power	PASS
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS
15.207	AC Power Conducted Emission	PASS
15.203	Antenna Requirement	PASS

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

3. Test Methodology and Reference Procedures

The tests documented in this report were performed in accordance with 47 CFR FCC Part 2, KDB558074 D01 Meas Guidance v05r02, KDB414788 D01 Radiated Test Site v01r01, ANSI C63.10-2013 and KDB 662911 D01 Multiple Transmitter Output v02r01.

4. Facilities and Accreditation

Test Location	Underwriters Laboratories Taiwan Co., Ltd.
Address	Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Accreditation Certificate	Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

5. Measurement Uncertainty

For statement of conformity, Simple acceptance (Section 3.1.4 of IEC Guide 115) was applied as decision rule for measurement in this test report.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Determining compliance based on the results of the compliance measurement, not considering measurement instrumentation uncertainty.

Measurement	Frequency	Uncertainty
Conducted disturbance at mains terminals ports	150kHz ~ 30MHz	3.0 dB
RF Conducted	9 kHz - 40GHz	2.4 dB
Radiated disturbance below 30MHz	9 kHz - 30 MHz	1.9 dB
Radiated disturbance below 1 GHz	30MHz ~ 1GHz	5.6 dB
Radiated disturbance above 1 GHz	1GHz ~ 40GHz	4.6 dB

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6. Equipment under Test

6.1. Description of EUT

Product	LoRaWAN Transceiver Module
Brand Name	All Inspire Health
Model Name	RYLR933
Normal Voltage	3.6Vdc from Host

Operating Frequency	903MHz ~ 914.2MHz
Modulation	GFSK (FSK, CSS)
Maximum Output Power	16.16 dBm
Sample ID	Conducted Test:8268295
	Radiated Test:8268296

Note:

1. This report is prepared for FCC permissive change. The difference compared with the original design is as the following:
 - Change module to limited module.
 - User-installed limited module transmitters in a host, host information as below:

Product	Brand Name	Model Name	FCC ID	Remark
AUGi Sense	All Inspire Health	IN6S001	2BNIV-SNS-1	With BT LE and FMCW function

- Add host antenna, antenna table as below:

Ant. No.	Transmitter Circuit	Frequency Range	Brand Name	Model Name	Maximum Gain (dBi)	Ant. Type	Connector Type
1	Chain0	903~920MHz	Innocomm	Sense_Lora	2	IFA	None

2. According to above changed conditions, therefore only the Radiated Spurious Emission worse case , Conducted output power and AC Power Conducted Emission need to be performed, others result please refer to the original report.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refer the manufacturer's or user's manual, the laboratory shall not be held responsible.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6.2. Channel List

8 channels are provided for LoRa mode:

Channel	Frequency (MHz)
0	903.0
1	904.6
2	906.2
3	907.8
4	909.4
5	911.0
6	912.6
7	914.2

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6.3. Test Condition

Test Item	Test Site No.	Environmental	Input Power	Test Date	Tested by
Antenna Port Conducted Measurement	SR4	23~26°C/ 62~67%RH	3.6Vdc	2025/03/22~ 2025/03/27	Rex Chen
Radiated Spurious Emission	966-2	22~26°C/ 62~68%RH	3.6Vdc	2025/03/22~ 2025/03/27	Rex Chen
AC power Line Conducted Emission	SR1	24°C/ 62%RH	120Vac/60Hz	2025/03/26	Rex Chen

Sample Calculation:

Antenna Port Conducted Measurement:

- Where relevant, the follow sample calculation is provided:

Result Value (dBm) = Reading Value (dBm) + Attenuator Factor (dB) + Cable Loss (dB).

Example: Result Value (10dBm) = Reading Value (-2dBm) + Attenuator Factor (10dB) + Cable Loss(2dB).

*Test plot only shown the “Result Value”.

Radiated Spurious Emission:

- Where relevant, the follow sample calculation is provided:

Result Value (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).

Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamp Factor (dB).

Example: Result Value (34.5dBuV/m) = Reading Value (40.1dBuV) + Antenna Factor (18.7dB/m) + Cable Loss (4.2dB) - Preamp Factor (28.5dB).

AC power Line Conducted Emission:

- Where relevant, the follow sample calculation is provided:

Result Value (dBuV) = Reading Value (dBuV) + Correction Factor (dB).

Correction Factor (dB) = Insertion loss(dB) + Cable loss(dB).

Example: Result Value (53.7dBuV) = Reading Value (35.1dBuV) + Insertion loss(18.1dB) + Cable loss(0.5dB).

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6.4. Description of Available Antennas

Ant. No.	Transmitter Circuit	Frequency Range	Brand Name	Model Name	Maximum Gain (dBi)	Ant. Type	Connector Type
1	Chain0	903~920MHz	Innocomm	Sense_Lora	2	IFA	None

Note: The above antenna information was provided from customer and for more detailed features description, please refer the manufacturer's specification or user's manual, the laboratory shall not be held responsible.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6.5. Test Mode Applicability and Tested Channel Detail

Test Item	Modulation Type	Available Channel	Test Channel
Radiated Emissions	LoRa	0 to 7	0,4,7
Radiated Emissions (Below 1GHz)	LoRa	0 to 7	0,4,7
AC Power Line Conducted Emission	LoRa	0 to 7	0
Antenna Port Conducted Measurement	LoRa	0 to 7	0,4,7

- In the transmit mode, LoRa channel 0 has the highest RF output power. Therefore, the AC conduction was performed using this worst-case mode.
- For Antenna Port Conducted Measurement, this item includes all test value of each mode but only includes spectrum plot of worst value of each mode.
- For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6.6. Duty cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle	Duty Factor (dB)	VBW Set (above 1GHz)
LoRa	100.000	100.000	1.0000	N/A	10Hz

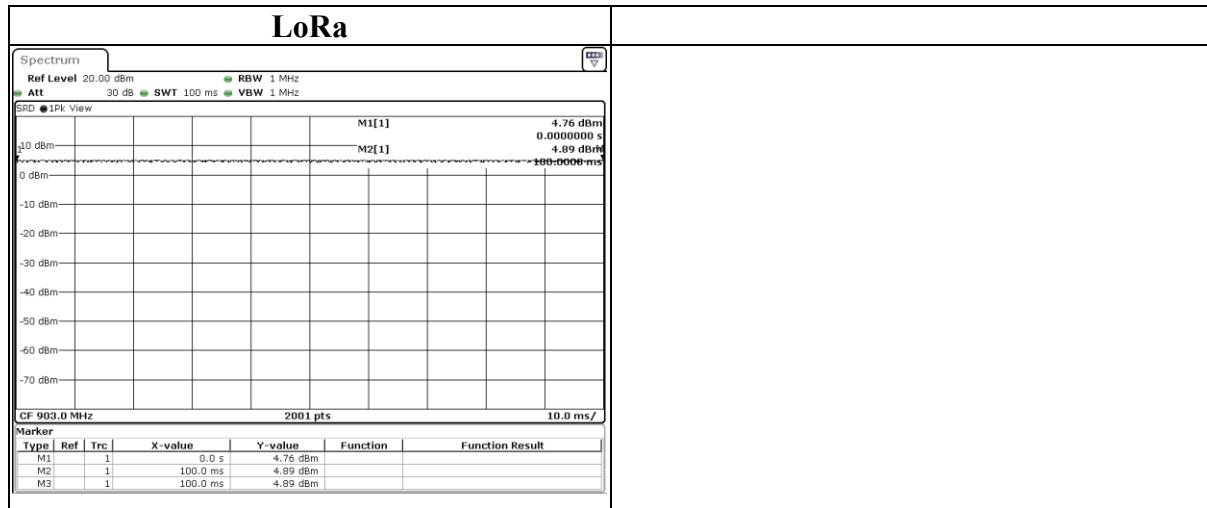

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

7. Test Equipment

Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired date
Radiated Spurious Emission					
Spectrum Analyzer	Keysight	N9010A	MY56070827	2024/3/29	2025/3/28
EMI Test Reciever	Rohde & Schwarz	ESR7	101754	2024/12/24	2025/12/23
Loop Antenna	ETS lindgren	6502	00213440	2024/12/11	2025/12/10
Trilog-Broadband Antenna with 5dB Attenuator	Schwarzbeck & EMCI	VULB 9168 & N-6-05	774 & AT-N0538	2024/12/30	2025/12/29
Horn Antenna (1-18 GHz)	Schwarzbeck	BBHA 9120 D	01690	2024/11/27	2025/11/26
Horn Antenna (18-40 GHz)	Schwarzbeck	BBHA 9170	781	2024/12/18	2025/12/17
Preamplifier (30-1000 MHz)	EMCI	EMC330E	980405	2024/5/28	2025/5/27
Preamplifier (1-18 GHz)	EMCI	EMC051835BE	980406	2025/1/13	2026/1/12
Preamplifier (18-40GHz)	EMCI	EMC184040SEE	980426	2024/4/16	2025/4/15
Cables (9k-18 GHz)	Hanyitek	K1K50-UP0264-K1K50-2500	170214-4 & 170425-2	2024/11/22	2025/11/21
Cables (18-40GHz)	Hanyitek	K1K50-UP0264-K1K50-2500	170214-1 & 170214-2	2024/11/22	2025/11/21
Antenna Port Conducted Measurement					
Signal Analyzer	Rohde & Schwarz	FSVA3044	101281	2025/3/5	2026/3/4
Signal Analyzer	Rohde & Schwarz	FSV40	101490	2024/7/1	2025/6/30
Attenuator	EMCI	EMC-40ATK2W10	17002	2024/11/13	2025/11/12
USB Power Sensor	Anritsu	MA24408A	12031	2024/7/13	2025/7/12
Temperature &Humidity Test Chamber	GIANT FORCE	GTH-150- 40-CP-AR	MAA1701-010	2025/2/25	2026/2/24

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired date
AC power Line Conducted Emission					
EMI Test Receiver	Rohde & Schwarz	ESR7	101753	2024/10/1	2025/9/30
Two-Line V-Network	Rohde & Schwarz	ENV216	102136	2024/5/14	2025/5/13
Impuls-Begrenzer Pulse Limiter	Rohde & Schwarz	ESH3-Z2	102219-Qt	2024/8/29	2025/8/28
Cables	TITAN	CFD200	T0732ACFD 20020A300-2	2024/5/14	2025/5/13

UL Software		
Description	Name	Version
Radiated measurement	e3	6.191211 (V6)
Conducted measurement	RF-Conducted-FCC 15247	ver 1.0
AC power Line Conducted Emission	EZ_EMCA	UL-3A1.2

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

8. Description of Test Setup

Tx Mode

Support Equipment

ID	Equipment	Brand Name	Model Name	S/N	Remark
A	Laptop	MSI	MS-13Q2	K2402N0015485	Provide by Lab
B	Test Tool	SILICON LABS	PCB1015A A03	N/A	Supplied by Client
C	Battery	LISUN	ER14505	N/A	Supplied by Client 3.6V Battery x 3
D	Test Tool	Augi-Sense_MB	R003	N/A	Supplied by Client

I/O Cables

ID	Equipment	Brand Name	Model Name	Length (m)	Remark
1	DC Cable	N/A	N/A	0.07	Supplied by Client

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1


Test Setup

The EUT was worked in engineering mode to transmit signal.

Controlled using a bespoke application (QCOM_V1.6) on a test Notebook. The application was used to enable a continuous transmission mode and to select the test channels, data rates, modulation schemes and power setting as required.

Setup Diagram for Test

Tx Mode

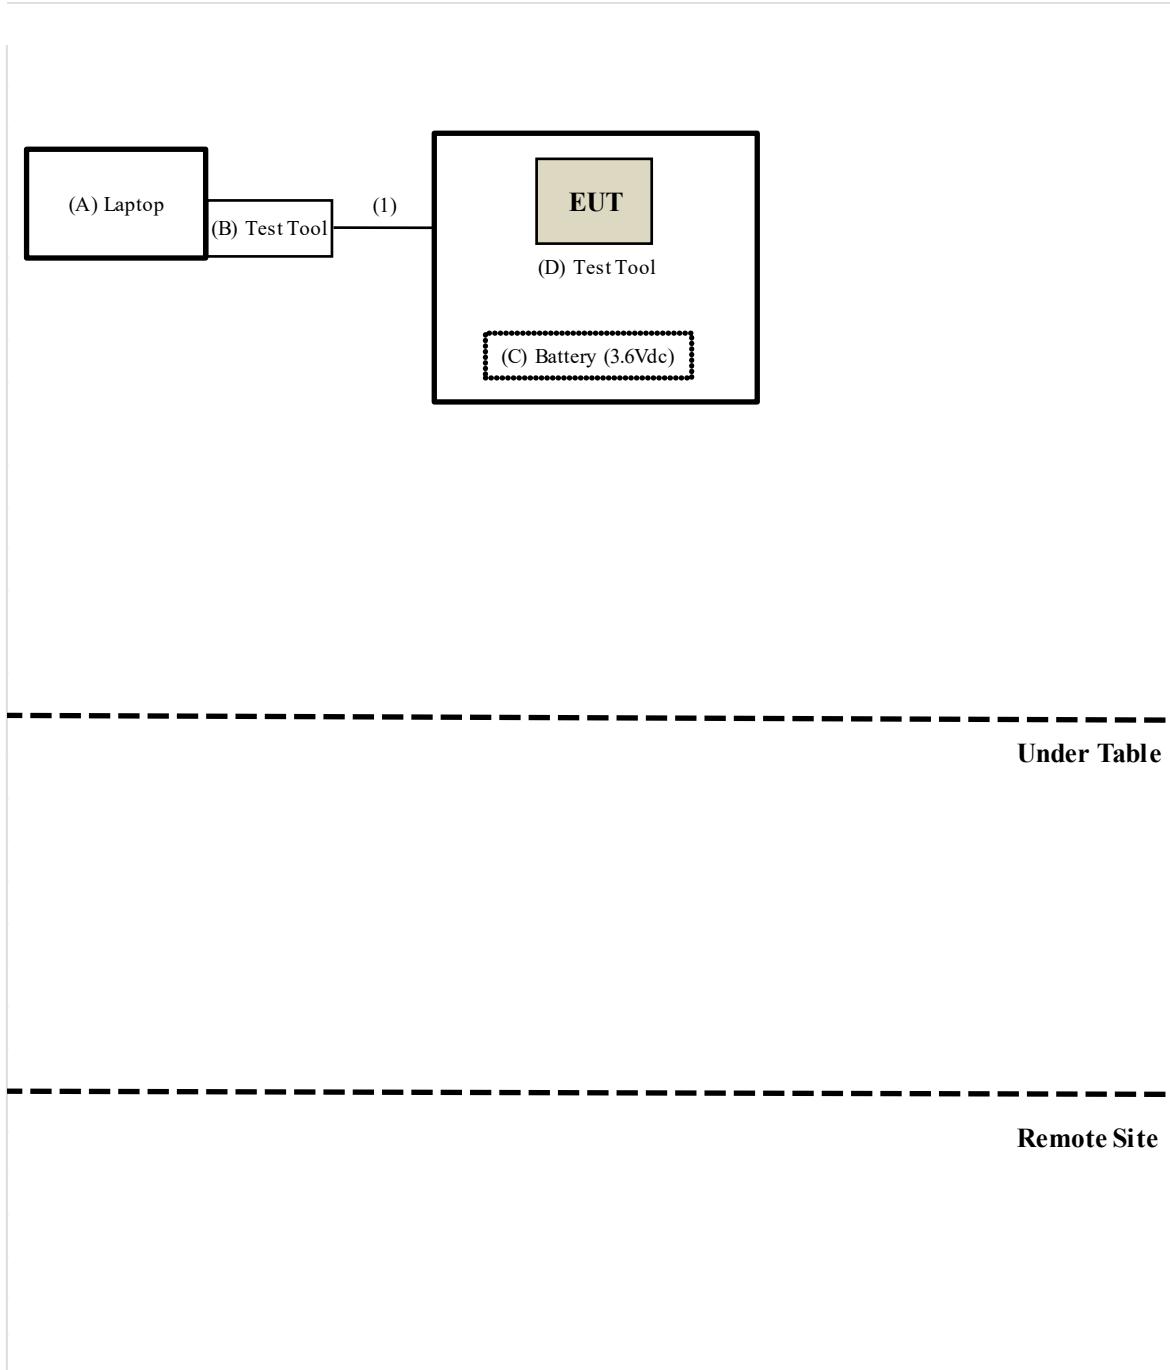

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

9. Test Results

9.1. Conducted Output Power

Requirements

For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.


Note:

1. P_{out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi, B is the 26 dB emission bandwidth in megahertz
2. If EUT with Multiple Transmitter Output:
 - a. Directional Gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ant}]$ dBi.
 N_{ant} : Number of Transmit Antennas
 $G1, G2, \dots, Gn$: Gain of Individual Antennas
 Example: two antenna and gain 5 dBi / 3dBi, so if it was used for TxBF power measurement
 $Directional\ Gain = 10 \log[(105/20 + 103/20)^2 / 2] \text{ dBi} = 7.07 \text{ dBi}$
 - b. Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices, CDD
 $Array\ Gain = 0 \text{ dB}$ (i.e., no array gain) for $N_{ANT} \leq 4$;
 $Array\ Gain = 0 \text{ dB}$ (i.e., no array gain) for channel widths $\geq 40 \text{ MHz}$ for any N_{ANT} ;
 $Array\ Gain = 5 \log(N_{ANT}/NSS) \text{ dB}$ or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.
 Example: Maximum antenna gain = 5 dBi and $N_{ANT} \leq 4$, so if it was used for CDD power measurement
 $Directional\ Gain = 5 \text{ dBi} + Array\ Gain = 5 \text{ dBi} + 0 \text{ dB} = 5 \text{ dBi}$
 - c. For power measurement of KDB 662911 is used with multiple transmitter output. Total conducted power is the sum of the conducted power levels measured at the various output ports.

Test Procedure

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Test Setup



The loss between RF output port of the EUT and the input port of the Power Meter has been taken into consideration.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Data

Mode	CH	Freq. (MHz)	Peak Power (dBm) Chain 0	Total Power (mW)	Total Power (dBm)	AVG Power (dBm) Chain 0	Total Power (mW)	Total Power (dBm)	Limit (dBm)	Result
LoRa (DTS mode)	0	903	16.16	41.305	16.16	16.13	41.02	16.13	30	Pass
	4	909.4	16.05	40.272	16.05	16.03	40.087	16.03	30	Pass
	7	914.2	15.98	39.628	15.98	15.92	39.084	15.92	30	Pass

Note: Average Power is for reference Only.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

9.2. Radiated Spurious Emission

Requirements

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Procedures

[For 9 kHz ~ 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 30MHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

[For above 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Note:

- a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- b. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

Peak

Frequency	RBW	VBW
9 kHz~150 kHz	200 Hz	600 Hz
150 kHz~30 MHz	10 kHz	30 kHz
30 MHz~1 GHz	120 kHz	360 kHz
Above 1GHz	1 MHz	3 MHz

Average for above 1GHz

RBW	VBW
1MHz	Refer to section 6.6 for duty cycle.

- d. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
- e. Test data of Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
- f. Test data of Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
- g. Test data of Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamp Factor (dB).
- h. Test data of Notation "@" = Fundamental Frequency
- i. Test data of Notation " * " = The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948


Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Setup

<Frequency Range 9 kHz ~ 30 MHz>

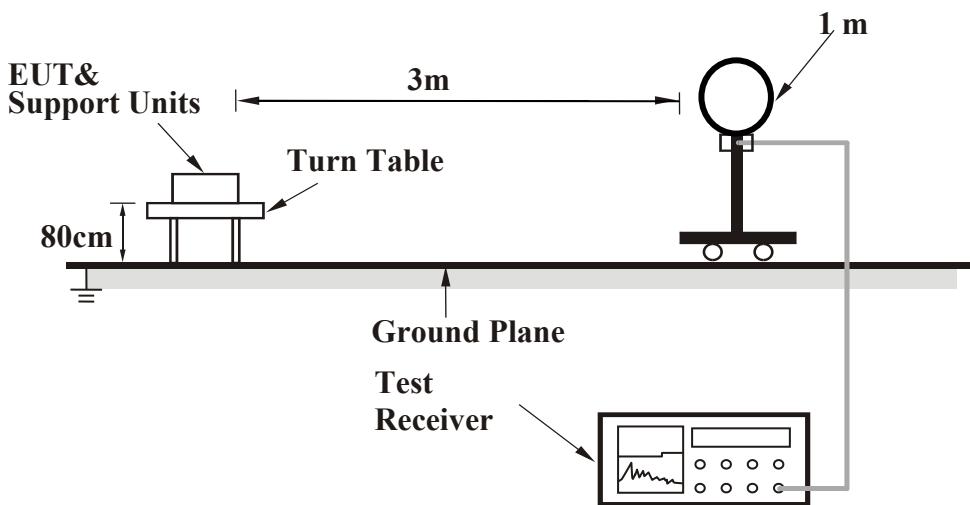

<Frequency Range 30 MHz ~ 1 GHz >

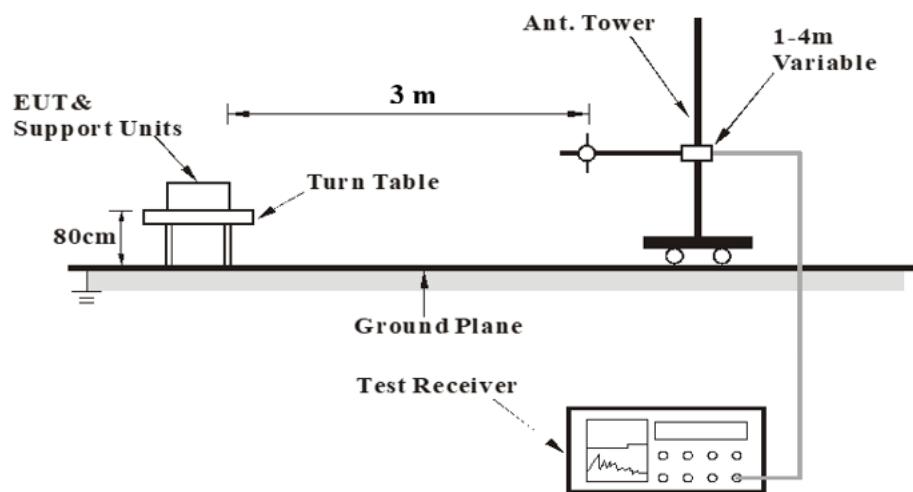

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

<Frequency Range above 1 GHz>

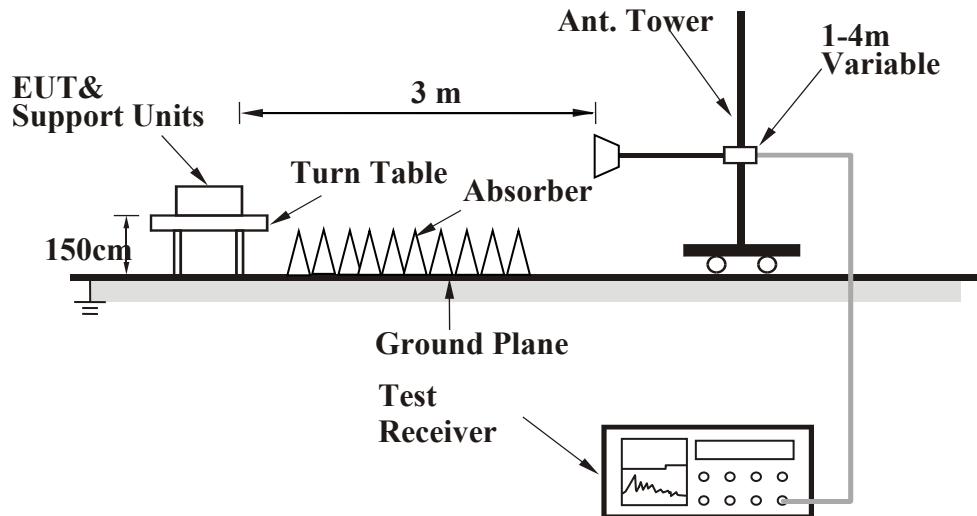

For the actual test configuration, please refer to the Setup Configurations.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948


Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Data

Above 1 GHz

Mode	LoRa	Channel	0
------	------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	*	2709	50.66	-3.01	47.65	74	-26.35	PK
	*	3612	37.05	-0.62	36.43	74	-37.57	PK
	*	4515	35.02	1.67	36.69	74	-37.31	PK
	*	5418	34.6	3.72	38.32	74	-35.68	PK
	*	8127	33.49	12.56	46.05	74	-27.95	PK
	*	9030	32.54	14.3	46.84	74	-27.16	PK
Vertical	*	2709	43.39	-3.01	40.38	74	-33.62	PK
	*	3612	36.54	-0.62	35.92	74	-38.08	PK
	*	4515	36.27	1.67	37.94	74	-36.06	PK
	*	5418	38.21	3.72	41.93	74	-32.07	PK
	*	8127	32.56	12.56	45.12	74	-28.88	PK
	*	9030	33.48	14.3	47.78	74	-26.22	PK

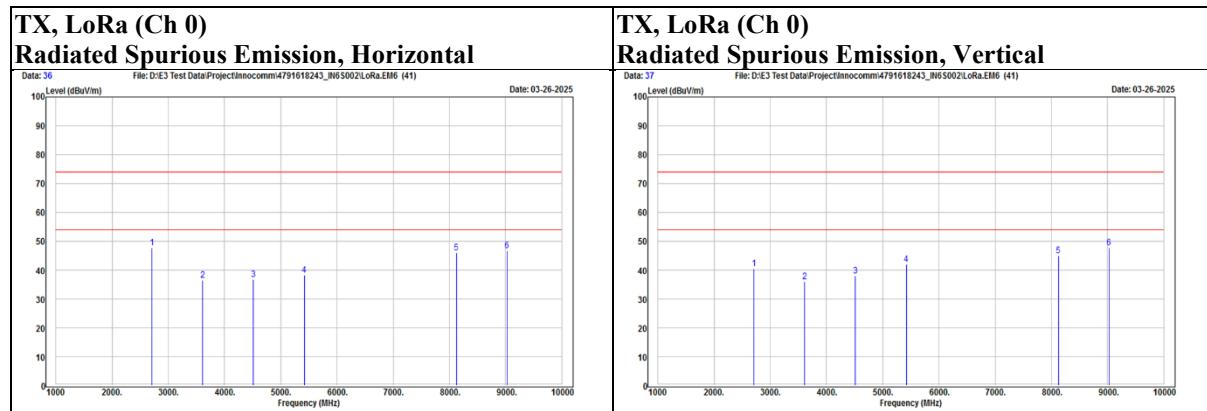

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	LoRa	Channel	4
------	------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	*	2728.2	45.98	-2.93	43.05	74	-30.95	PK
	*	3637.6	36.89	-0.5	36.39	74	-37.61	PK
	*	4547	35.81	1.71	37.52	74	-36.48	PK
	*	5456.4	37.45	3.93	41.38	74	-32.62	PK
	*	7275.2	33.86	10.62	44.48	74	-29.52	PK
	*	8184.6	33.18	12.19	45.37	74	-28.63	PK
	*	9094	32.52	14.61	47.13	74	-26.87	PK
Vertical	*	2728.2	42.98	-2.93	40.05	74	-33.95	PK
	*	3637.6	37.63	-0.5	37.13	74	-36.87	PK
	*	4547	35.49	1.71	37.2	74	-36.8	PK
	*	5456.4	36.16	3.93	40.09	74	-33.91	PK
	*	7275.2	32.7	10.62	43.32	74	-30.68	PK
	*	8184.6	33.05	12.19	45.24	74	-28.76	PK
	*	9094	38.42	14.61	53.03	74	-20.97	PK

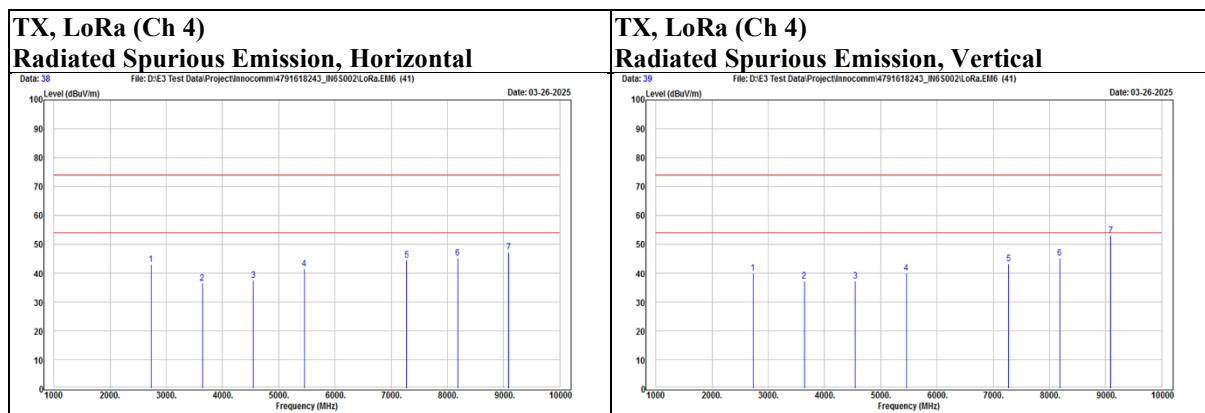

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	LoRa	Channel	7
------	------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2742.6	46.78	-2.88	43.9	74	-30.1	PK
	*	3656.8	37.24	-0.45	36.79	74	-37.21	PK
	*	4571	34.98	1.85	36.83	74	-37.17	PK
		5485.2	35.06	4.06	39.12	74	-34.88	PK
	*	7313.6	33.3	10.57	43.87	74	-30.13	PK
		8227.8	33.01	12.05	45.06	74	-28.94	PK
Vertical		2742.6	44.09	-2.88	41.21	74	-32.79	PK
	*	3656.8	37.72	-0.45	37.27	74	-36.73	PK
	*	4571	34.93	1.85	36.78	74	-37.22	PK
		5485.2	37.26	4.06	41.32	74	-32.68	PK
	*	7313.6	34.02	10.57	44.59	74	-29.41	PK
		8227.8	33.08	12.05	45.13	74	-28.87	PK

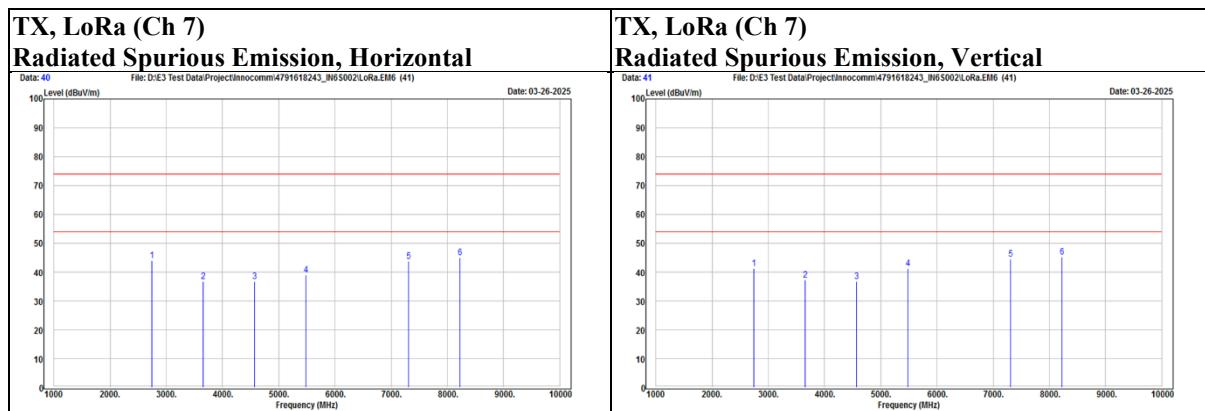

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Below 1 GHz

Mode	LoRa	Channel	0
------	------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		52.31	35.07	-1.77	33.3	40	-6.7	PK
		143.49	38.89	-2.21	36.68	43.5	-6.82	PK
		165.8	38.28	-1.61	36.67	43.5	-6.83	PK
		614	29.89	7.91	37.8	46	-8.2	PK
	@	903	104.01	12.57	116.58	N/A	N/A	PK
		960	30.78	13.67	44.45	54	-9.55	PK
Vertical		52.31	35.37	-1.77	33.6	40	-6.4	PK
		125.06	37.6	-3.86	33.74	43.5	-9.76	PK
		165.8	37.64	-1.61	36.03	43.5	-7.47	PK
		614	29.47	7.91	37.38	46	-8.62	PK
	@	903	90.62	12.57	103.19	N/A	N/A	PK
		960	30.32	13.67	43.99	54	-10.01	PK

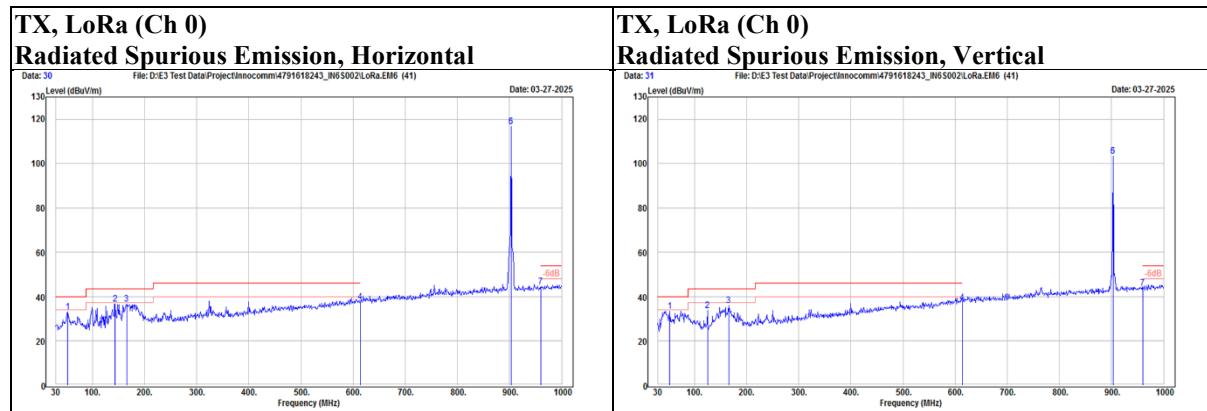
Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	LoRa	Channel	4
------	------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		52.31	35.11	-1.77	33.34	40	-6.66	PK
		142.52	39.16	-2.31	36.85	43.5	-6.65	PK
		175.5	38.72	-2.2	36.52	43.5	-6.98	PK
		614	29.58	7.91	37.49	46	-8.51	PK
	@	909.4	103.62	12.79	116.41	N/A	N/A	PK
		960	30.17	13.67	43.84	54	-10.16	PK
Vertical		55.22	34.98	-1.76	33.22	40	-6.78	PK
		162.89	38.05	-1.54	36.51	43.5	-6.99	PK
		399.57	35.72	2.37	38.09	46	-7.91	PK
		614	29.48	7.91	37.39	46	-8.61	PK
	@	909.4	90.68	12.79	103.47	N/A	N/A	PK
		960	31.08	13.67	44.75	54	-9.25	PK

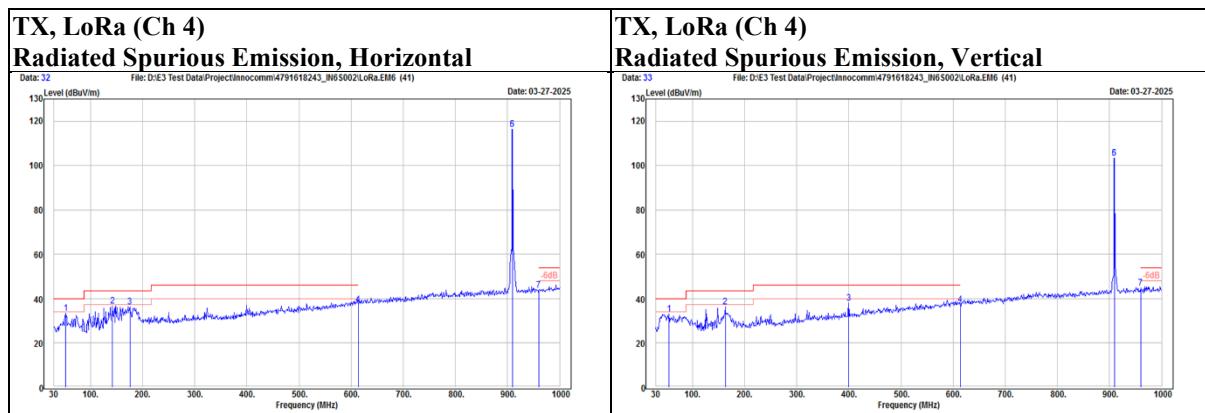

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	LoRa	Channel	7
------	------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		52.31	35.44	-1.77	33.67	40	-6.33	PK
		148.34	38.82	-1.96	36.86	43.5	-6.64	PK
		175.5	39.25	-2.2	37.05	43.5	-6.45	PK
		614	30.08	7.91	37.99	46	-8.01	PK
	@	914.2	103.2	12.91	116.11	N/A	N/A	PK
		960	30.83	13.67	44.5	54	-9.5	PK
Vertical		44.55	36.42	-2.94	33.48	40	-6.52	PK
		153.19	37.76	-1.69	36.07	43.5	-7.43	PK
		165.8	38.08	-1.61	36.47	43.5	-7.03	PK
		614	31.25	7.91	39.16	46	-6.84	PK
	@	914.2	90.89	12.91	103.8	N/A	N/A	PK
		960	29.58	13.67	43.25	54	-10.75	PK

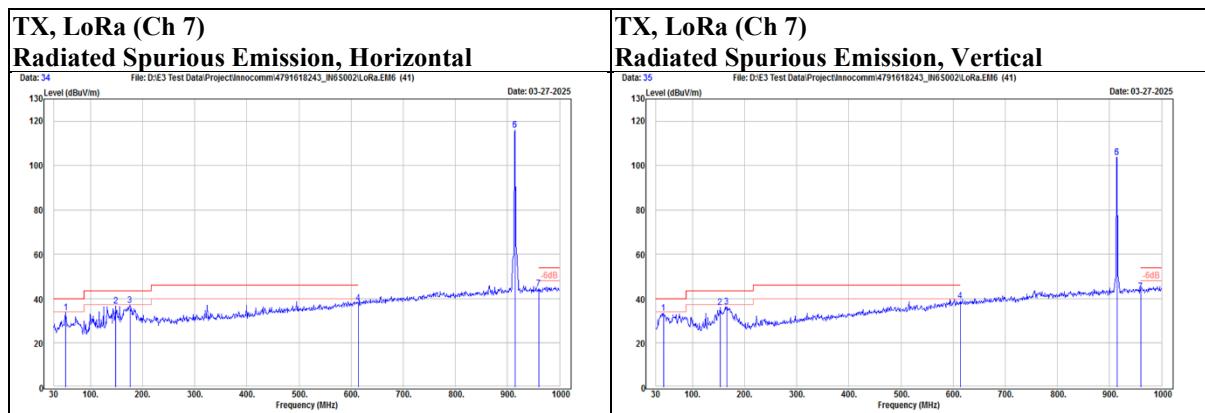

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

9 kHz ~ 30 MHz Data:

For 9 kHz to 30 MHz radiated emission have performed all modes of operation were investigated. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

No non-compliance noted:

KDB 414788 D01 OATS and Chamber Correlation Justification

- Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
- OATs and chamber correlation testing had been performed and chamber measured test results is the worst case test result.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

9.3. AC Power Line Conducted Emission

Requirements

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.
2. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
3. Test data of Result value (dB μ V) = Reading value (dB μ V) + Correction Factor (dB).
4. Test data of Margin(dB) = Result value (dB μ V) - Limit value (dB μ V).
5. Test data of Correction Factor (dB) = Insertion loss(dB) + Cable loss(dB).

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Setup

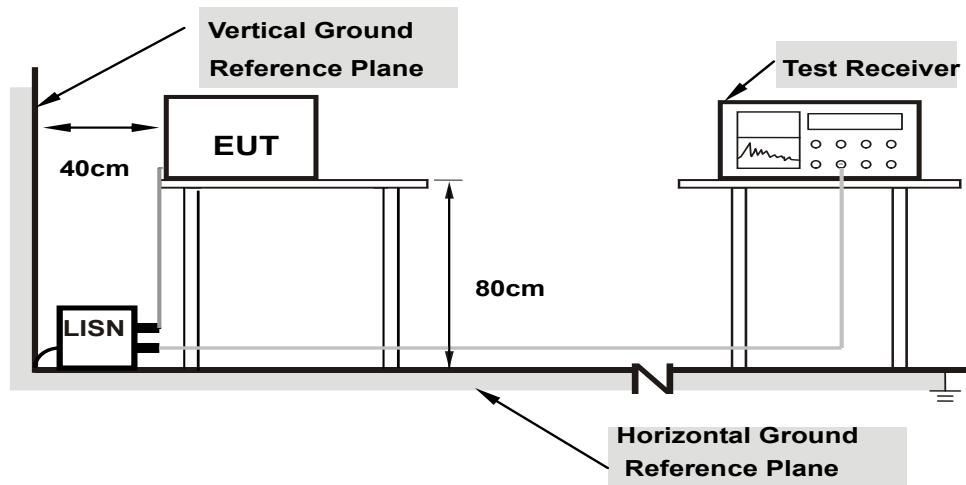

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the Setup Configurations.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Data

Mode	LoRa_TX903	Channel	0
------	------------	---------	---

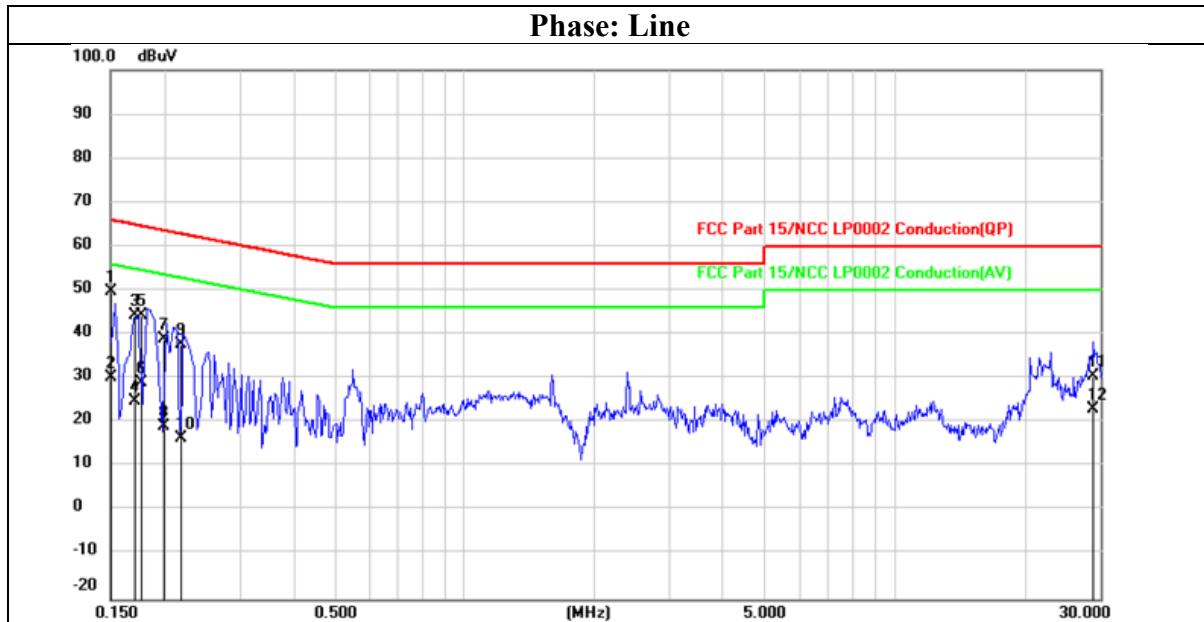

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1502	39.80	9.96	49.76	65.99	-16.23	QP
2	0.1502	20.15	9.96	30.11	55.99	-25.88	AVG
3	0.1711	34.41	9.96	44.37	64.91	-20.54	QP
4	0.1711	14.79	9.96	24.75	54.91	-30.16	AVG
5	0.1778	34.41	9.96	44.37	64.59	-20.22	QP
6	0.1778	19.08	9.96	29.04	54.59	-25.55	AVG
7	0.1987	28.94	9.96	38.90	63.66	-24.76	QP
8	0.1987	9.26	9.96	19.22	53.66	-34.44	AVG
9	0.2180	27.79	9.96	37.75	62.89	-25.14	QP
10	0.2180	6.47	9.96	16.43	52.89	-36.46	AVG
11	29.0019	19.80	10.80	30.60	60.00	-29.40	QP
12	29.0019	12.12	10.80	22.92	50.00	-27.08	AVG

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	LoRa TX903	Channel	0
------	------------	---------	---

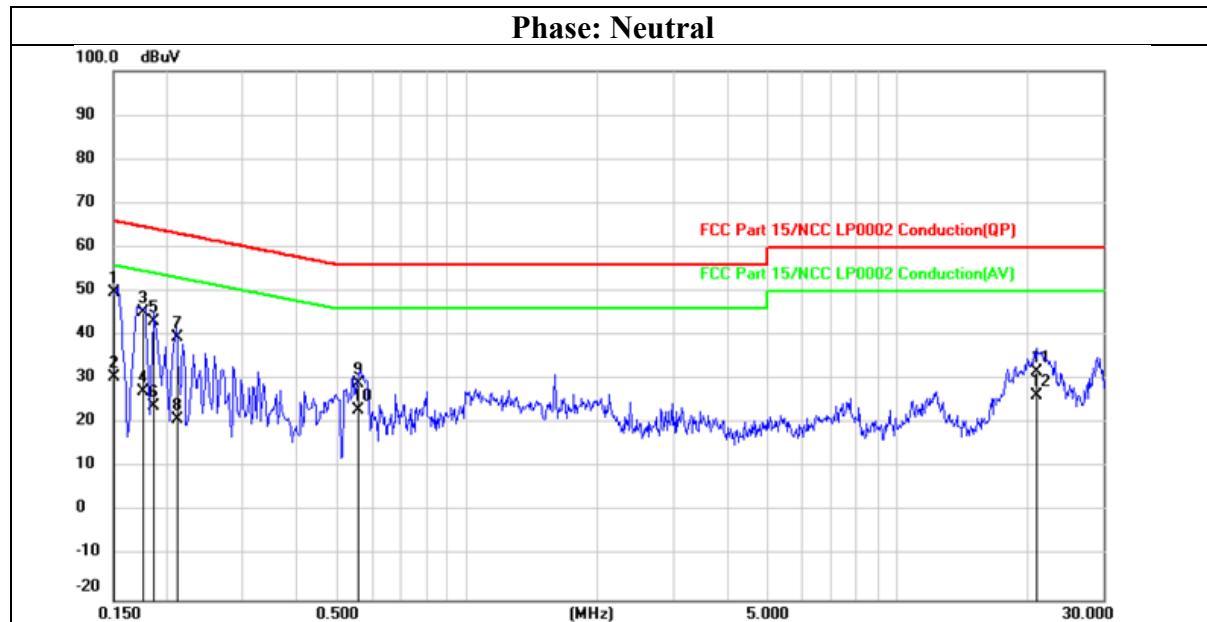

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1502	39.84	9.94	49.78	65.99	-16.21	QP
2	0.1502	20.67	9.94	30.61	55.99	-25.38	AVG
3	0.1749	35.31	9.94	45.25	64.72	-19.47	QP
4	0.1749	17.27	9.94	27.21	54.72	-27.51	AVG
5	0.1847	33.26	9.94	43.20	64.27	-21.07	QP
6	0.1847	14.00	9.94	23.94	54.27	-30.33	AVG
7	0.2110	29.66	9.94	39.60	63.17	-23.57	QP
8	0.2110	10.87	9.94	20.81	53.17	-32.36	AVG
9	0.5561	19.25	9.95	29.20	56.00	-26.80	QP
10	0.5561	13.00	9.95	22.95	46.00	-23.05	AVG
11	21.0977	21.19	10.53	31.72	60.00	-28.28	QP
12	21.0977	15.80	10.53	26.33	50.00	-23.67	AVG

END OF REPORT

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1