

# RF TEST REPORT

For

**Dongguan Zhongshi Xunjie Technology Co.,Ltd.**

**Product Name: Camera Clock**

**Test Model(s): XJ01**

**Report Reference No.** : DACE250106024RL001

**FCC ID** : 2BNJU-XJ010203

**Applicant's Name** : Dongguan Zhongshi Xunjie Technology Co.,Ltd.

**Address** : Room 101, No. 6, Lane 1, Xingwang Street, Huangjiang Town, Dongguan City, Guangdong Province

**Testing Laboratory** : Shenzhen DACE Testing Technology Co., Ltd.

**Address** : 102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

**Test Specification Standard** : 47 CFR Part 15.247

**Date of Receipt** : January 6, 2025

**Date of Test** : January 6, 2025 to January 14, 2025

**Date of Issue** : January 14, 2025

**Result** : Pass

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen DACE Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen DACE Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

## Apply for company information

<b>Applicant's Name</b>	:	Dongguan Zhongshi Xunjie Technology Co.,Ltd.
<b>Address</b>	:	Room 101, No. 6, Lane 1, Xingwang Street, Huangjiang Town, Dongguan City, Guangdong Province
<b>Product Name</b>	:	Camera Clock
<b>Test Model(s)</b>	:	XJ01
<b>Series Model(s)</b>	:	XJ02, XJ03
<b>Test Specification Standard(s)</b>	:	47 CFR Part 15.247

**NOTE1:**

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:

*Keren Huang*

Keren Huang/Test Engineer

January 14, 2025

Supervised by:

*Stone Yin*

Stone Yin/ projector Engineer

January 14, 2025

Approved by:

*Tom Chen*

Tom Chen / Manager

January 14, 2025

## Revision History Of Report

Version	Description	REPORT No.	Issue Date
V1.0	Original	DACE250106024RL001	January 14, 2025

## CONTENTS

<b>1 TEST SUMMARY .....</b>	<b>6</b>
1.1 TEST STANDARDS .....	6
1.2 SUMMARY OF TEST RESULT .....	6
<b>2 GENERAL INFORMATION .....</b>	<b>7</b>
2.1 CLIENT INFORMATION .....	7
2.2 DESCRIPTION OF DEVICE (EUT) .....	7
2.3 DESCRIPTION OF TEST MODES .....	8
2.4 DESCRIPTION OF SUPPORT UNITS .....	8
2.5 EQUIPMENTS USED DURING THE TEST .....	9
2.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	10
2.7 AUTHORIZATIONS .....	10
2.8 ANNOUNCEMENT .....	11
<b>3 EVALUATION RESULTS (EVALUATION) .....</b>	<b>12</b>
3.1 ANTENNA REQUIREMENT .....	12
3.1.1 Conclusion: .....	12
<b>4 RADIO SPECTRUM MATTER TEST RESULTS (RF) .....</b>	<b>13</b>
4.1 CONDUCTED EMISSION AT AC POWER LINE .....	13
4.1.1 E.U.T. Operation: .....	13
4.1.2 Test Setup Diagram: .....	13
4.1.3 Test Data: .....	14
4.2 6dB BANDWIDTH .....	16
4.2.1 E.U.T. Operation: .....	16
4.2.2 Test Setup Diagram: .....	16
4.2.3 Test Data: .....	17
4.3 MAXIMUM CONDUCTED OUTPUT POWER .....	18
4.3.1 E.U.T. Operation: .....	18
4.3.2 Test Setup Diagram: .....	18
4.3.3 Test Data: .....	19
4.4 POWER SPECTRAL DENSITY .....	20
4.4.1 E.U.T. Operation: .....	20
4.4.2 Test Setup Diagram: .....	20
4.4.3 Test Data: .....	20
4.5 EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS .....	21
4.5.1 E.U.T. Operation: .....	21
4.5.2 Test Setup Diagram: .....	21
4.5.3 Test Data: .....	21
4.6 BAND EDGE EMISSIONS (RADIATED) .....	22
4.6.1 E.U.T. Operation: .....	22
4.6.2 Test Setup Diagram: .....	22
4.6.3 Test Data: .....	23
4.7 EMISSIONS IN FREQUENCY BANDS (BELOW 1GHz) .....	31
4.7.1 E.U.T. Operation: .....	32
4.7.2 Test Data: .....	32
4.8 EMISSIONS IN FREQUENCY BANDS (ABOVE 1GHz) .....	34
4.8.1 E.U.T. Operation: .....	35
4.8.2 Test Setup Diagram: .....	35

4.8.3 Test Data:	35
<b>5 TEST SETUP PHOTOS</b>	<b>39</b>
<b>6 PHOTOS OF THE EUT</b>	<b>41</b>
<b>APPENDIX</b>	<b>51</b>
1. -6DB BANDWIDTH	51
2. DUTY CYCLE	58
3. MAX. OUTPUT POWER	65
4. POWER SPECTRAL DENSITY	66
5. BANDEDGE	73
6. SPURIOUS EMISSION	82

# 1 TEST SUMMARY

## 1.1 Test Standards

The tests were performed according to following standards:

**47 CFR Part 15.247:** Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

## 1.2 Summary of Test Result

Item	Method	Requirement	Result
Antenna requirement	/	47 CFR 15.203	Pass
Conducted Emission at AC power line	ANSI C63.10-2020 section 6.2	47 CFR 15.207(a)	Pass
6dB Bandwidth	ANSI C63.10-2020, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	ANSI C63.10-2020 section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	ANSI C63.10-2020, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	ANSI C63.10-2020 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Band edge emissions (Radiated)	ANSI C63.10-2020 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (below 1GHz)	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (above 1GHz)	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass

Note: 1.N/A -this device(EUT) is not applicable to this testing item

2. RF-conducted test results including cable loss.

## 2 GENERAL INFORMATION

### 2.1 Client Information

**Applicant's Name** : Dongguan Zhongshi Xunjie Technology Co.,Ltd.

**Address** : Room 101, No. 6, Lane 1, Xingwang Street, Huangjiang Town, Dongguan City, Guangdong Province

**Manufacturer** : Dongguan Zhongshi Xunjie Technology Co.,Ltd.

**Address** : Room 101, No. 6, Lane 1, Xingwang Street, Huangjiang Town, Dongguan City, Guangdong Province

### 2.2 Description of Device (EUT)

Product Name:	Camera Clock
Sample No.:	Q250106002-1
Model/Type reference:	XJ01
Series Model:	XJ02, XJ03
Model Difference:	There are multiple models of the product, with differences in the color of the appearance and customer requirements for different models in the market, resulting in multiple models. However, the internal circuit boards, PCBs, BOMs, and other electrical structures of these models are the same, and these differences will not affect RF&EMC performance. Therefore, the selected test model is XJ01 .
Trade Mark:	Dawnkky
Product Description:	Camera Clock
Power Supply:	DC3.7V from battery ; charging by DC5V 1A from type-c port
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz; 802.11n(HT40): 2422MHz to 2452MHz
Number of Channels:	802.11b/g/n(HT20): 11 Channels; 802.11n(HT40): 7 Channels
Modulation Type:	802.11b: DSSS(CCK, DQPSK, DBPSK); 802.11g: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n(HT20 and HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type:	FPC ANT
Antenna Gain:	1.82dBi
Hardware Version:	V1.0
Software Version:	SecureCRT

#### Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note: In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:


Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

## 2.3 Description of Test Modes

No	Title	Description
TM1	802.11b mode	Keep the EUT in 802.11b transmitting mode at lowest, middle and highest channel.
TM2	802.11g mode	Keep the EUT in 802.11g transmitting mode at lowest, middle and highest channel.
TM3	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20) transmitting mode at lowest, middle and highest channel.
TM4	802.11n(HT40) mode	Keep the EUT in 802.11n(HT40) transmitting mode at lowest, middle and highest channel.

Special software is used.

Special software:

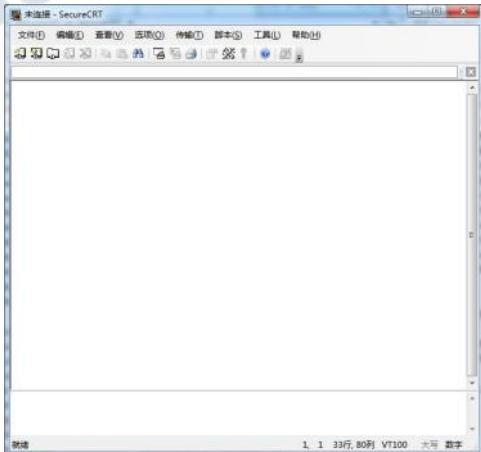

## 2.4 Description of Support Units

Title	Manufacturer	Model No.	Serial No.
Adapter	PHOTON	ATXC-069AC65B	/

## 2.5 Equipments Used During The Test

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Cable	SCHWARZ BECK	/	/	2024-03-20	2025-03-19
Pulse Limiter	SCHWARZ BECK	VTSD 9561-F Pulse limiter 10dB	561-G071	2024-12-06	2025-12-05
50ΩCoaxial Switch	Anritsu	MP59B	M20531	/	/
Test Receiver	Rohde & Schwarz	ESPI TEST RECEIVER	1164.6607K03-102109-MH	2024-06-12	2025-06-11
L.I.S.N	R&S	ESH3-Z5	831.5518.52	2023-12-12	2025-12-11
L.I.S.N	SCHWARZ BECK	NSLK 8126	05055	2024-06-14	2025-06-13
Pulse Limiter	CYBERTEK	EM5010A	/	2024-09-27	2025-09-26
EMI test software	EZ -EMC	EZ	V1.1.42	/	/

### Emissions in non-restricted frequency bands

6dB Bandwidth

Maximum Conducted Output Power

Power Spectral Density

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Test Software	Tachoy Information	RTS-01	V1.0.0	/	/
Power divider	MIDWEST	PWD-2533	SMA-79	2023-05-11	2026-05-10
RF Sensor Unit	Tachoy Information	TR1029-2	000001	/	/
Vector Signal Generator	Keysight	N5181A	MY50143455	2024-12-06	2025-12-05
Signal Generator	Keysight	N5182A	MY48180415	2024-12-06	2025-12-05
Spectrum Analyzer	Keysight	N9020A	MY53420323	2024-12-06	2025-12-05

**Band edge emissions (Radiated)**  
**Emissions in frequency bands (below 1GHz)**  
**Emissions in frequency bands (above 1GHz)**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test software	Farad	EZ -EMC	V1.1.42	/	/
Positioning Controller	MF	MF-7802	/	/	/
Amplifier(18-40G)	COM-POWER	AH-1840	10100008-1	2022-04-05	2025-04-04
Horn antenna	COM-POWER	AH-1840 (18-40G)	10100008	2023-04-05	2025-04-04
Loop antenna	ZHINAN	ZN30900C	ZN30900C	2024-06-14	2026-06-13
Cable(LF)#2	Schwarzbeck	/	/	2024-02-19	2025-02-18
Cable(LF)#1	Schwarzbeck	/	/	2024-02-19	2025-02-18
Cable(HF)#2	Schwarzbeck	AK9515E	96250	2024-03-20	2025-03-19
Cable(HF)#1	Schwarzbeck	SYV-50-3-1	/	2024-03-20	2025-03-19
Power amplifier(LF)	Schwarzbeck	BBV9743	9743-151	2024-06-12	2025-06-11
Power amplifier(HF)	Schwarzbeck	BBV9718	9718-282	2024-06-12	2025-06-11
Wideband radio communication tester	R&S	CMW500	113410	2024-06-12	2025-06-11
Spectrum Analyzer	R&S	FSP30	1321.3008K40-101729-jR	2024-06-12	2025-06-11
Test Receiver	R&S	ESCI 3	1166.5950K03-101431-Jq	2024-06-13	2025-06-12
Horn Antenna	Sunol Sciences	DRH-118	A091114	2023-05-13	2025-05-12
Broadband Antenna	Sunol Sciences	JB6 Antenna	A090414	2024-09-28	2026-09-27

## 2.6 Statement Of The Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Disturbance (0.15~30MHz)	±3.41dB
Occupied Bandwidth	±3.63%
RF conducted power	±0.733dB
RF power density	±0.234%
Conducted Spurious emissions	±1.98dB
Radiated Emission (Above 1GHz)	±5.46dB
Radiated Emission (Below 1GHz)	±5.79dB

Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2.7 Authorizations

Company Name:	Shenzhen DACE Testing Technology Co., Ltd.
Address:	102, Building H1 & 1/F, Building H, Hongfa Science and Technology Park, Tangtou, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997

Fax Number:	86-755-29113252
-------------	-----------------

**Identification of the Responsible Testing Location**

Company Name:	Shenzhen DACE Testing Technology Co., Ltd.
Address:	102, Building H1 & 1/F, Building H, Hongfa Science and Technology Park, Tangtou, Shiyan, Bao'An District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252
FCC Registration Number:	0032847402
Designation Number:	CN1342
Test Firm Registration No.:	778666
A2LA Certificate Number:	6270.01

**2.8 Announcement**


- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by DACE and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) We hereby declare that the laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant. the laboratory is not responsible for the accuracy of the information provided by the client(item 2.2). When the information provided by the customer may affect the effectiveness of the results, the responsibility lies with the customer, and the laboratory does not assume any responsibility.

### 3 Evaluation Results (Evaluation)

#### 3.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

##### 3.1.1 Conclusion:

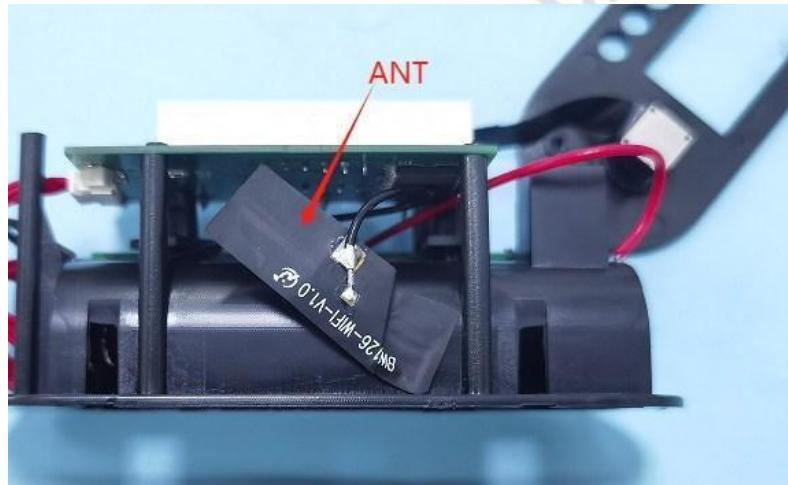

## 4 Radio Spectrum Matter Test Results (RF)

#### 4.1 Conducted Emission at AC power line


Test Requirement:	Refer to 47 CFR 15.207(a). Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN).																						
Test Limit:	<table border="1"> <thead> <tr> <th colspan="2">Frequency of emission (MHz)</th><th colspan="2">Conducted limit (dB<math>\mu</math>V)</th></tr> <tr> <th colspan="2"></th><th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td colspan="2">0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td colspan="2">0.5-5</td><td>56</td><td>46</td></tr> <tr> <td colspan="2">5-30</td><td>60</td><td>50</td></tr> </tbody> </table>			Frequency of emission (MHz)		Conducted limit (dB $\mu$ V)				Quasi-peak	Average	0.15-0.5		66 to 56*	56 to 46*	0.5-5		56	46	5-30		60	50
Frequency of emission (MHz)		Conducted limit (dB $\mu$ V)																					
		Quasi-peak	Average																				
0.15-0.5		66 to 56*	56 to 46*																				
0.5-5		56	46																				
5-30		60	50																				
	*Decreases with the logarithm of the frequency.																						
Test Method:	ANSI C63.10-2020 section 6.2																						
Procedure:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices																						

#### 4.1.1 E.U.T. Operation:

## Operating Environment:


Temperature:	22.7 °C	Humidity:	46 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1				

#### 4.1.2 Test Setup Diagram:

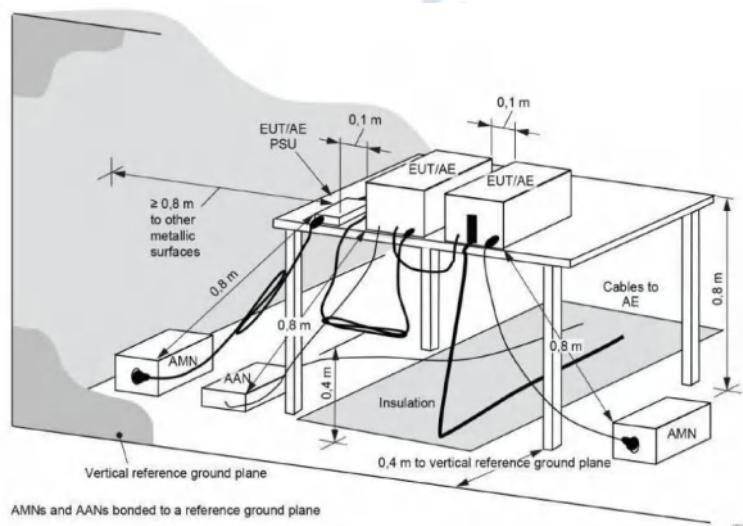


#### 4.1.3 Test Data:

TM1 / Line / Band: 2400-2483.5 MHz / BW: 20 / CH: L

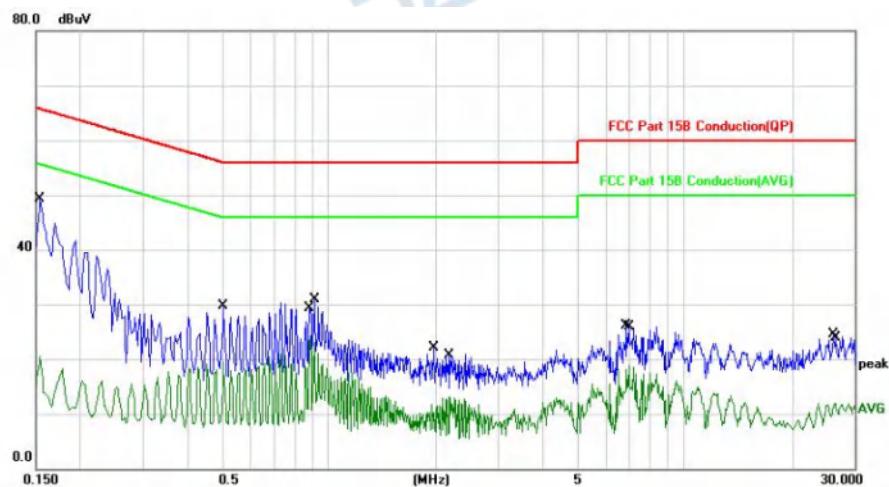

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1539	39.30	10.10	49.40	65.78	-16.38	QP	
2		0.1539	10.46	10.10	20.56	55.78	-35.22	AVG	
3		0.5060	19.67	10.08	29.75	56.00	-26.25	QP	
4		0.5060	9.34	10.08	19.42	46.00	-26.58	AVG	
5		0.8860	14.20	10.08	24.28	46.00	-21.72	AVG	
6		0.9100	20.85	10.08	30.93	56.00	-25.07	QP	
7		1.9700	12.21	9.99	22.20	56.00	-33.80	QP	
8		2.1740	3.17	10.01	13.18	46.00	-32.82	AVG	
9		6.8500	15.77	10.23	26.00	60.00	-34.00	QP	
10		6.9780	8.64	10.23	18.87	50.00	-31.13	AVG	
11		26.1940	13.51	10.90	24.41	60.00	-35.59	QP	
12		26.4500	1.06	10.91	11.97	50.00	-38.03	AVG	

TM1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 20 / CH: L

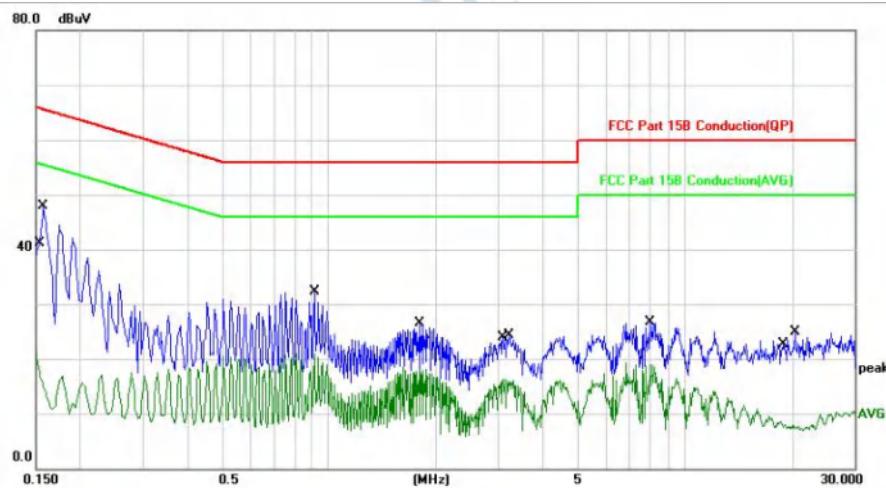

No.	Mk.	Freq.	Reading	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
			Level						
MHz		dBuV	dB	dBuV	dB	dBuV	dB		
1	0.1500	10.99	10.10	21.09	55.99	-34.90	-34.90	AVG	
2	*	0.1580	37.79	10.10	47.89	65.56	-17.67	QP	
3	0.9100	22.19	10.08	32.27	56.00	-23.73	-23.73	QP	
4	0.9100	10.77	10.08	20.85	46.00	-25.15	-25.15	AVG	
5	1.7940	16.51	10.01	26.52	56.00	-29.48	-29.48	QP	
6	1.7940	8.17	10.01	18.18	46.00	-27.82	-27.82	AVG	
7	3.0820	6.22	10.07	16.29	46.00	-29.71	-29.71	AVG	
8	3.2100	14.32	10.08	24.40	56.00	-31.60	-31.60	QP	
9	7.9860	16.42	10.27	26.69	60.00	-33.31	-33.31	QP	
10	7.9860	8.53	10.27	18.80	50.00	-31.20	-31.20	AVG	
11	18.6299	-2.04	10.56	8.52	50.00	-41.48	-41.48	AVG	
12	20.4780	14.21	10.61	24.82	60.00	-35.18	-35.18	QP	

## 4.2 6dB Bandwidth


Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	<p>11.8.1 Option 1</p> <p>The steps for the first option are as follows:</p> <ol style="list-style-type: none"> <li>Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.</li> <li>Set the VBW <math>\geq [3 \times \text{RBW}]</math>.</li> <li>Detector = peak.</li> <li>Trace mode = max-hold.</li> <li>Sweep = No faster than coupled (auto) time.</li> <li>Allow the trace to stabilize.</li> </ol> <p>g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.</p> <p>11.8.2 Option 2</p> <p>The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW <math>\geq 3 \times \text{RBW}</math>, and peak detector with maximum hold) is implemented by the instrumentation function.</p> <p>When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be <math>\geq 6</math> dB.</p>

### 4.2.1 E.U.T. Operation:

Operating Environment:				
Temperature:	22.7 °C	Humidity:	46 %	Atmospheric Pressure:
Pretest mode:	TM1, TM2, TM3, TM4			
Final test mode:	TM1, TM2, TM3, TM4			

### 4.2.2 Test Setup Diagram:



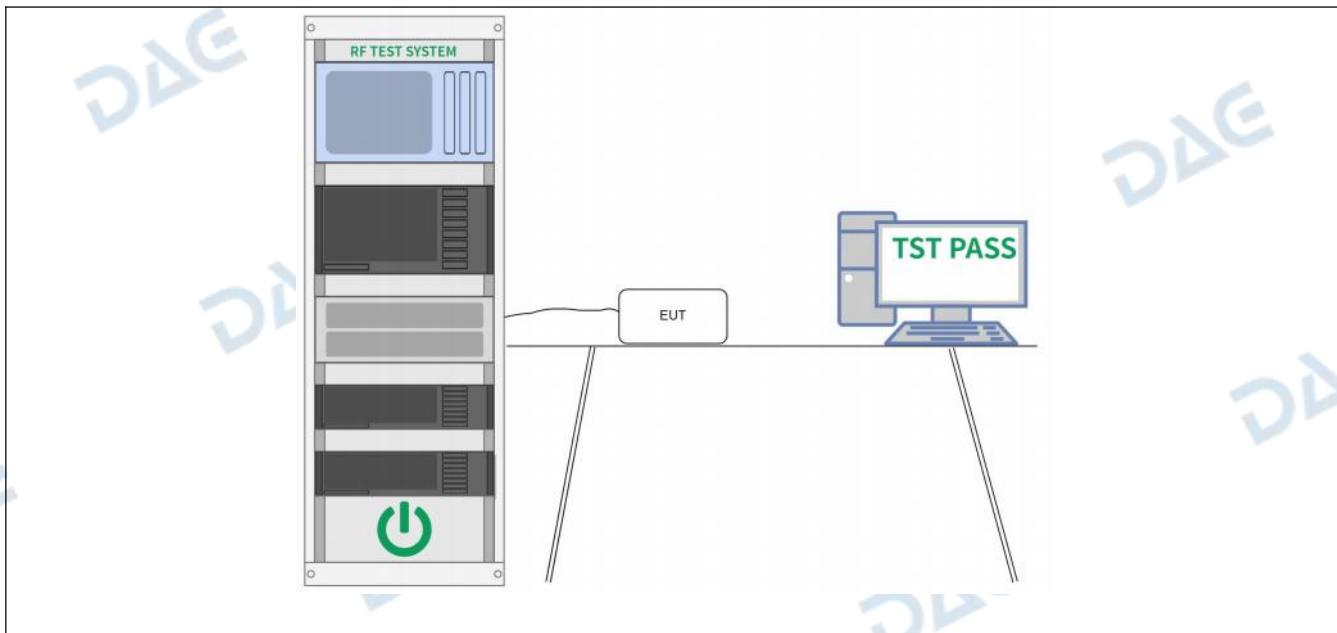

#### 4.2.3 Test Data:

Please Refer to Appendix for Details.

### 4.3 Maximum Conducted Output Power


Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2020 section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	<p>ANSI C63.10-2020, section 11.9.1 Maximum peak conducted output power</p> <p>Note:</p> <p>Per ANSI C63.10-2013, if there are two or more antennas, the conducted powers at Core 0, Core 1, ..., Core i were first measured separately, as shown in the section above (this product only have one antenna). The measured values were then summed in linear power units then converted back to dBm.</p> <p>Per ANSI C63.10-2013 Section 14.4.3.2.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.</p> <p>For correlated unequal antenna gain</p> $\text{Directional gain} = 10 \times \log[(10G1/20 + 10G2/20 + \dots + 10GN/20)^2 / NANT] \text{ dBi}$ <p>For completely uncorrelated unequal antenna gain</p> $\text{Directional gain} = 10 \times \log[(10G1/10 + 10G2/10 + \dots + 10GN/10) / NANT] \text{ dBi}$ <p>Sample Multiple antennas Calculation: Core 0 + Core 1 + ... Core i. = MIMO/CDD (i is the number of antennas)</p> $(\#VALUE! \text{ mW} + \text{ mW}) = \#VALUE! \text{ mW} = \text{ dBm}$ <p>Sample e.i.r.p. Calculation:</p> $\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$

#### 4.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.7 °C	Humidity:	46 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

#### 4.3.2 Test Setup Diagram:



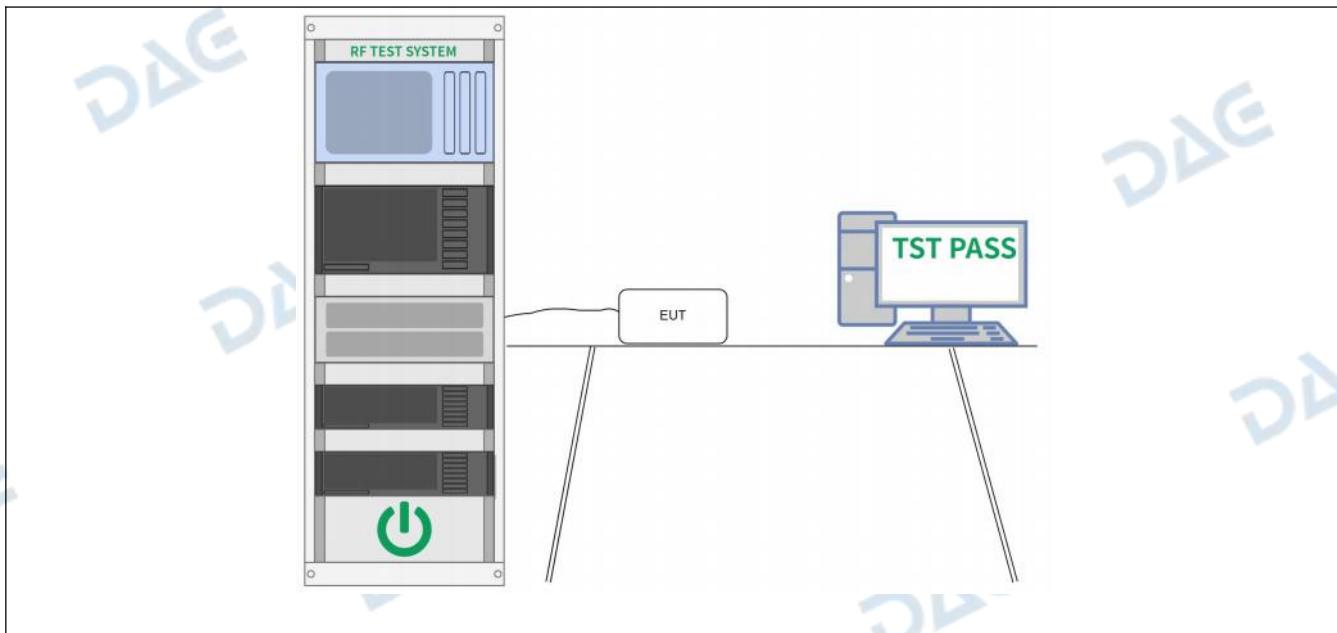

#### 4.3.3 Test Data:

Please Refer to Appendix for Details.


#### 4.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2020, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020, section 11.10, Maximum power spectral density level in the fundamental emission

##### 4.4.1 E.U.T. Operation:

Operating Environment:				
Temperature:	22.7 °C	Humidity:	46 %	Atmospheric Pressure: 102 kPa
Pretest mode:	TM1, TM2, TM3, TM4			
Final test mode:	TM1, TM2, TM3, TM4			

##### 4.4.2 Test Setup Diagram:

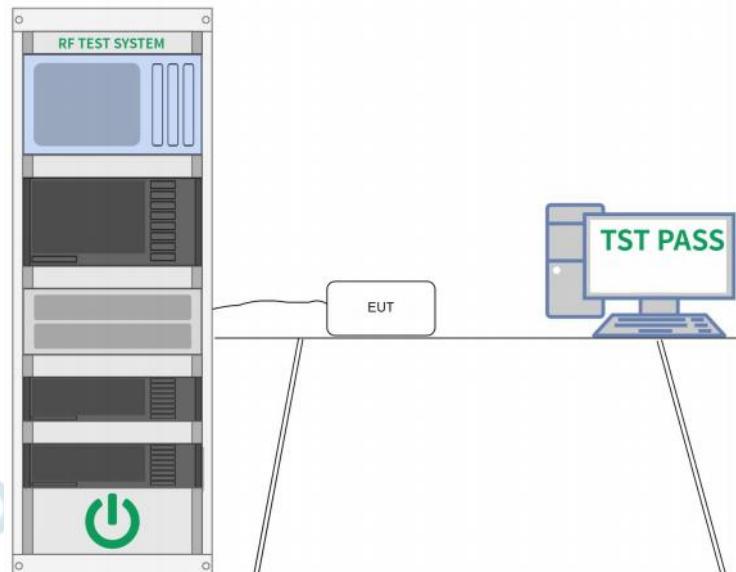

##### 4.4.3 Test Data:

Please Refer to Appendix for Details.


#### 4.5 Emissions in non-restricted frequency bands

Test Requirement:	47 CFR 15.247(d), 15.209, 15.205
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2020 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

##### 4.5.1 E.U.T. Operation:

Operating Environment:				
Temperature:	22.7 °C	Humidity:	46 %	Atmospheric Pressure:
Pretest mode:	TM1, TM2, TM3, TM4			
Final test mode:	TM1, TM2, TM3, TM4			

##### 4.5.2 Test Setup Diagram:

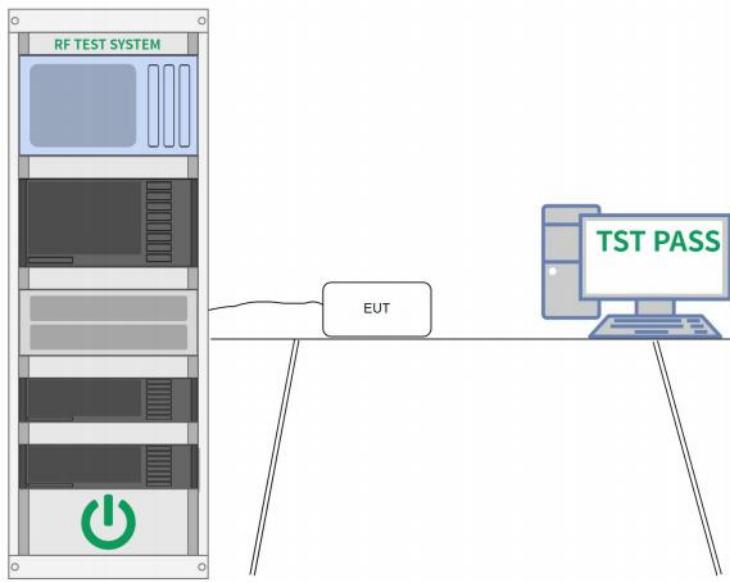

##### 4.5.3 Test Data:

Please Refer to Appendix for Details.

#### 4.6 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.


Test Method:	ANSI C63.10-2020 section 6.10
	KDB 558074 D01 15.247 Meas Guidance v05r02

Procedure:	ANSI C63.10-2020 section 6.10.5.2
------------	-----------------------------------

##### 4.6.1 E.U.T. Operation:


Operating Environment:				
Temperature:	22.7 °C	Humidity:	46 %	Atmospheric Pressure: 102 kPa
Pretest mode:	TM1			
Final test mode:	TM1			

##### 4.6.2 Test Setup Diagram:

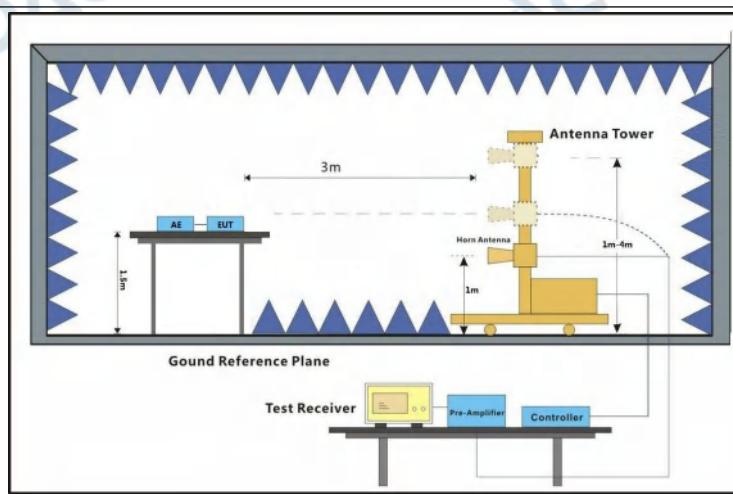


#### 4.6.3 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

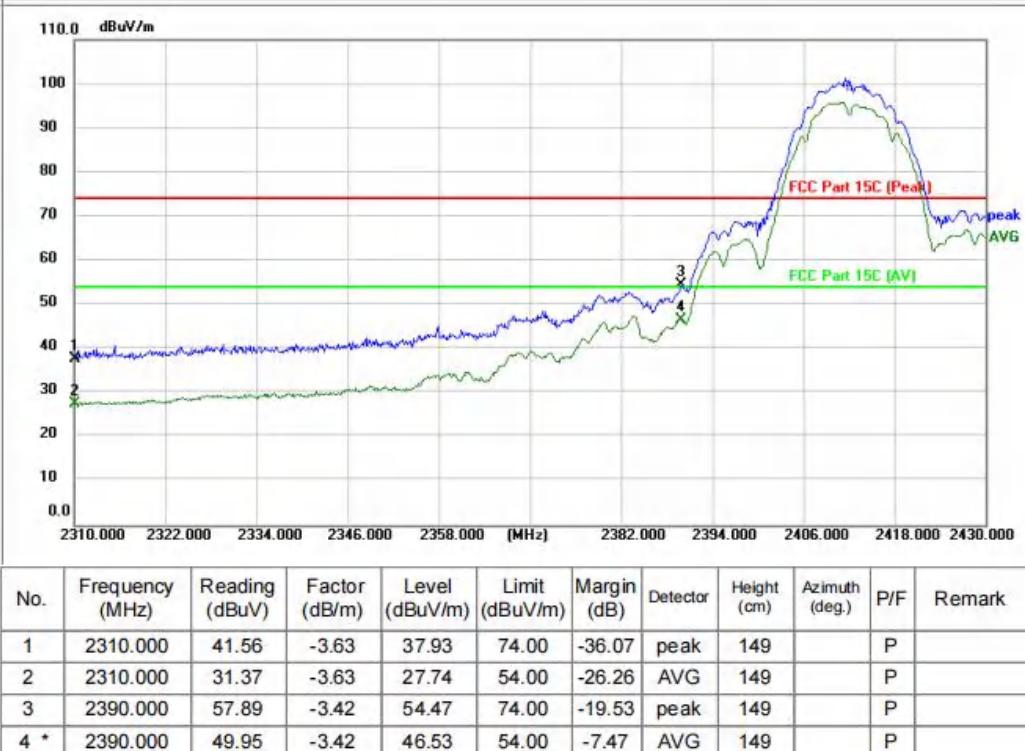

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

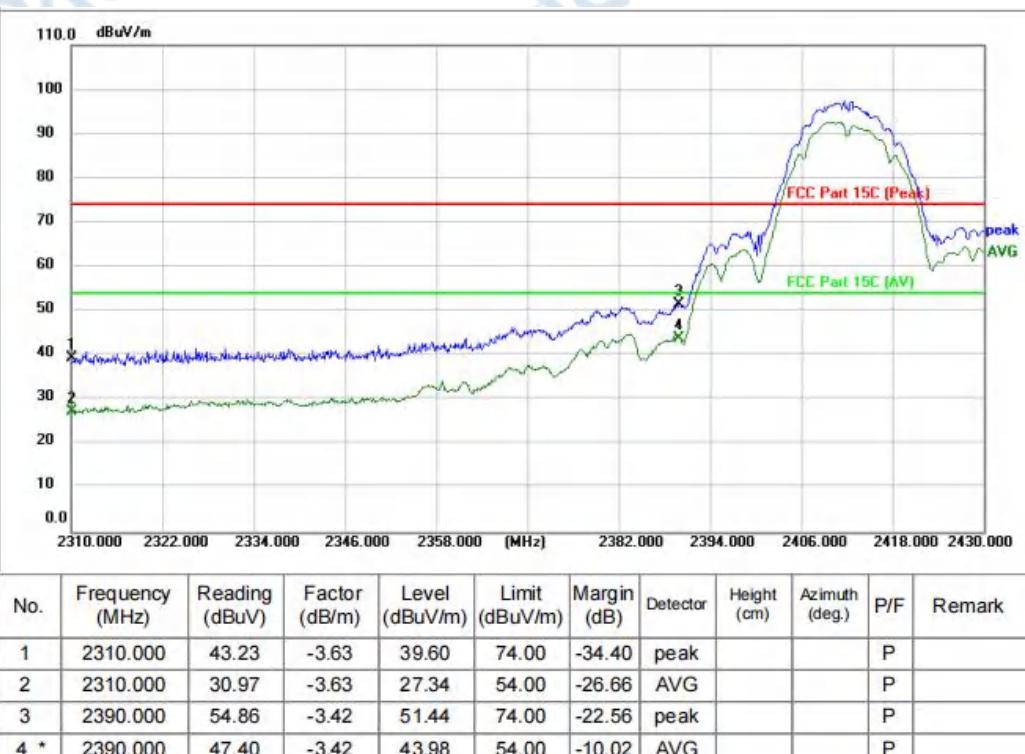

## TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	49.65	-3.17	46.48	74.00	-27.52	peak	149		P	
2 *	2483.500	40.47	-3.17	37.30	54.00	-16.70	AVG	149		P	
3	2500.000	46.93	-3.13	43.80	74.00	-30.20	peak	149		P	
4	2500.000	36.09	-3.13	32.96	54.00	-21.04	AVG	149		P	

## TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	46.39	-3.17	43.22	74.00	-30.78	peak	149		P	
2 *	2483.500	36.34	-3.17	33.17	54.00	-20.83	AVG	149		P	
3	2500.000	43.74	-3.13	40.61	74.00	-33.39	peak	149		P	
4	2500.000	33.62	-3.13	30.49	54.00	-23.51	AVG	149		P	

## TM2 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

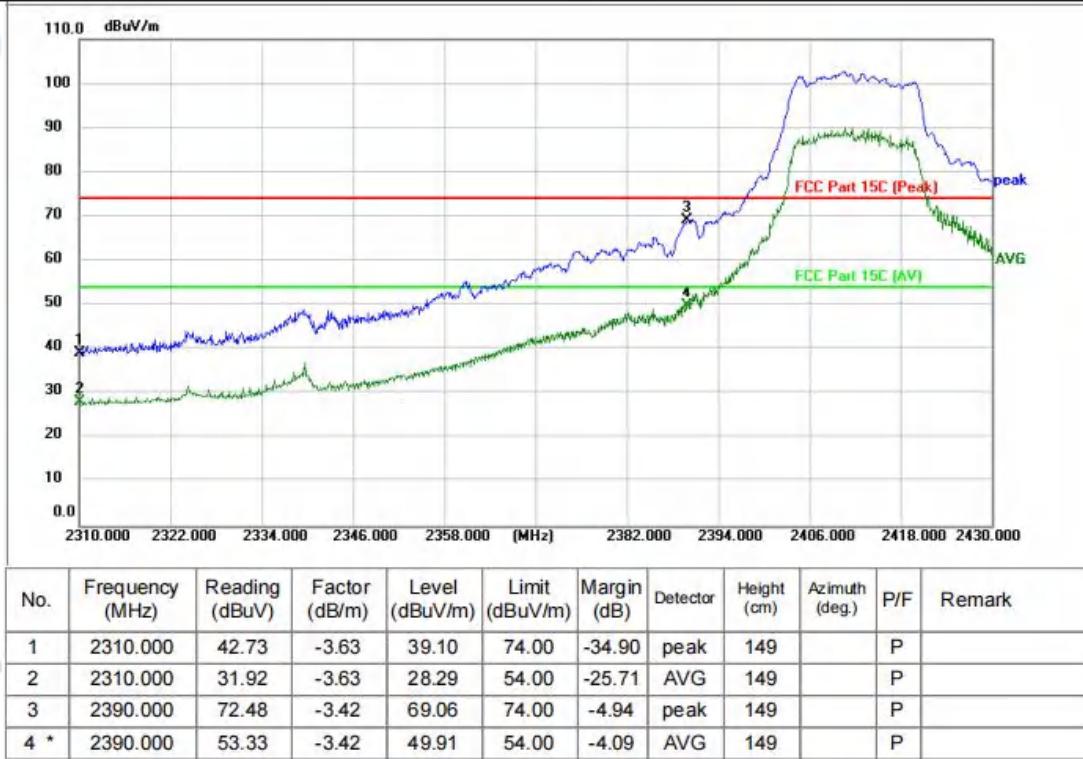


## TM2 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L



## TM2 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H



## TM2 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

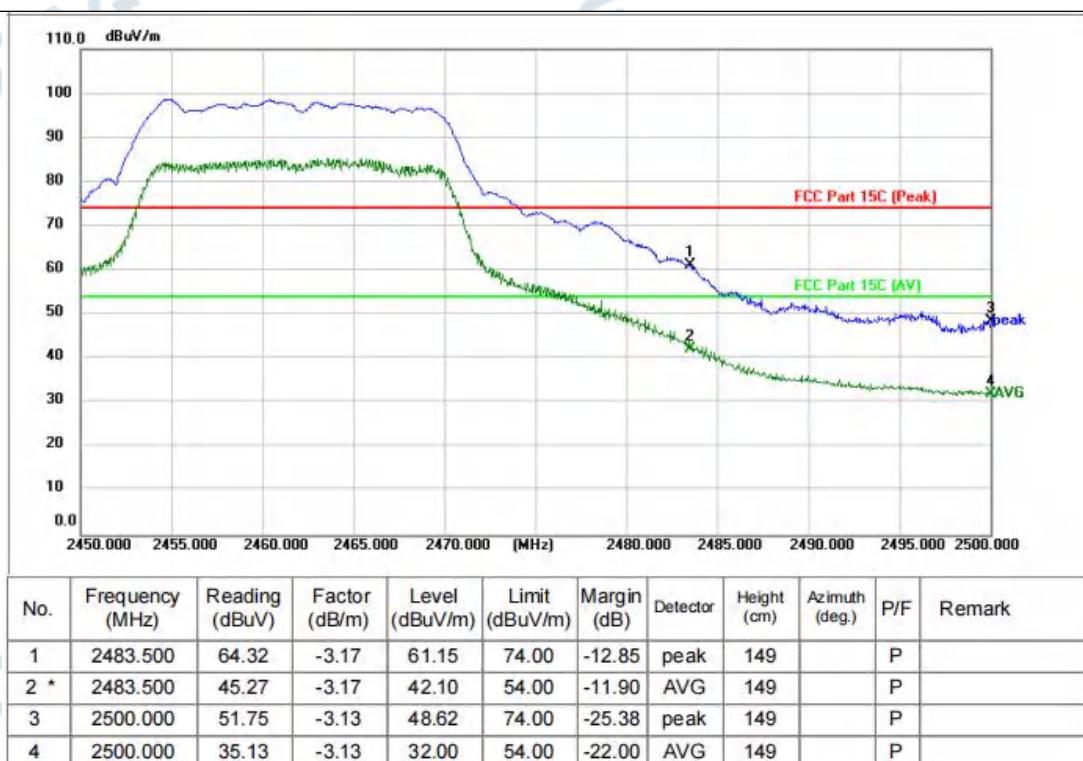

## TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	42.32	-3.63	38.69	74.00	-35.31	peak	149		P	
2	2310.000	30.39	-3.63	26.76	54.00	-27.24	AVG	149		P	
3 *	2390.000	76.84	-3.42	73.42	74.00	-0.58	peak	149		P	
4	2390.000	51.43	-3.42	48.01	54.00	-5.99	AVG	149		P	

## TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	41.54	-3.63	37.91	74.00	-36.09	peak	149		P	
2	2310.000	30.64	-3.63	27.01	54.00	-26.99	AVG	149		P	
3 *	2390.000	74.82	-3.42	71.40	74.00	-2.60	peak	149		P	
4	2390.000	49.84	-3.42	46.42	54.00	-7.58	AVG	149		P	


## TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

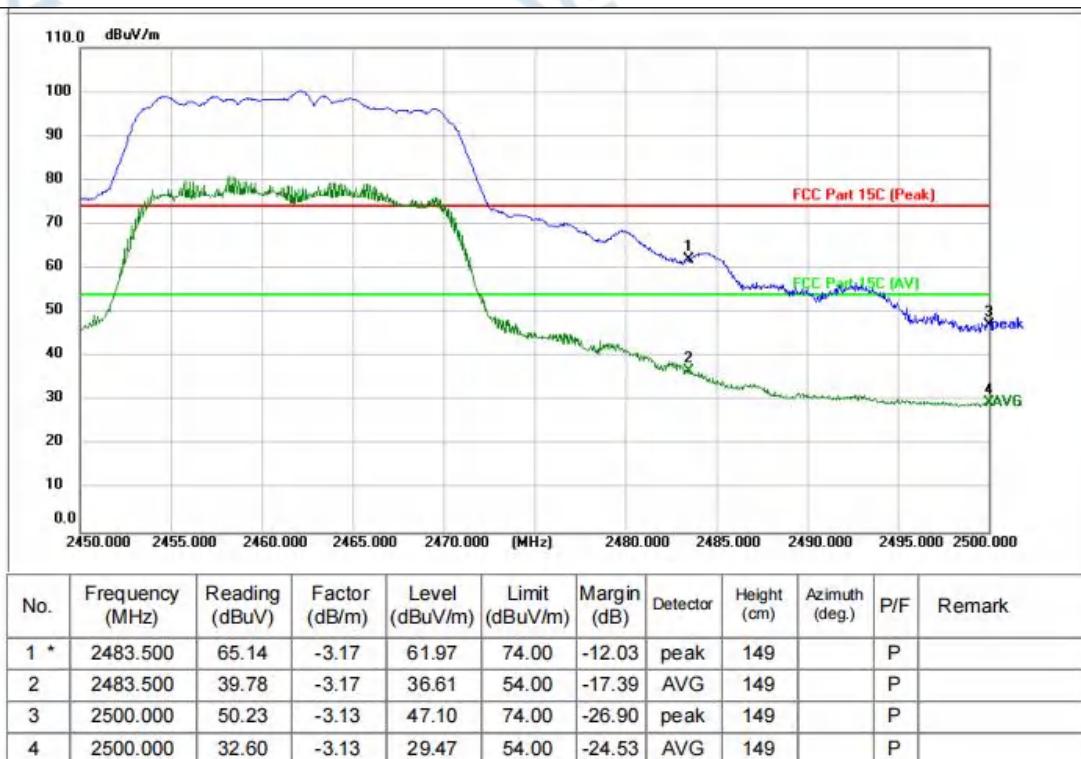


## TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

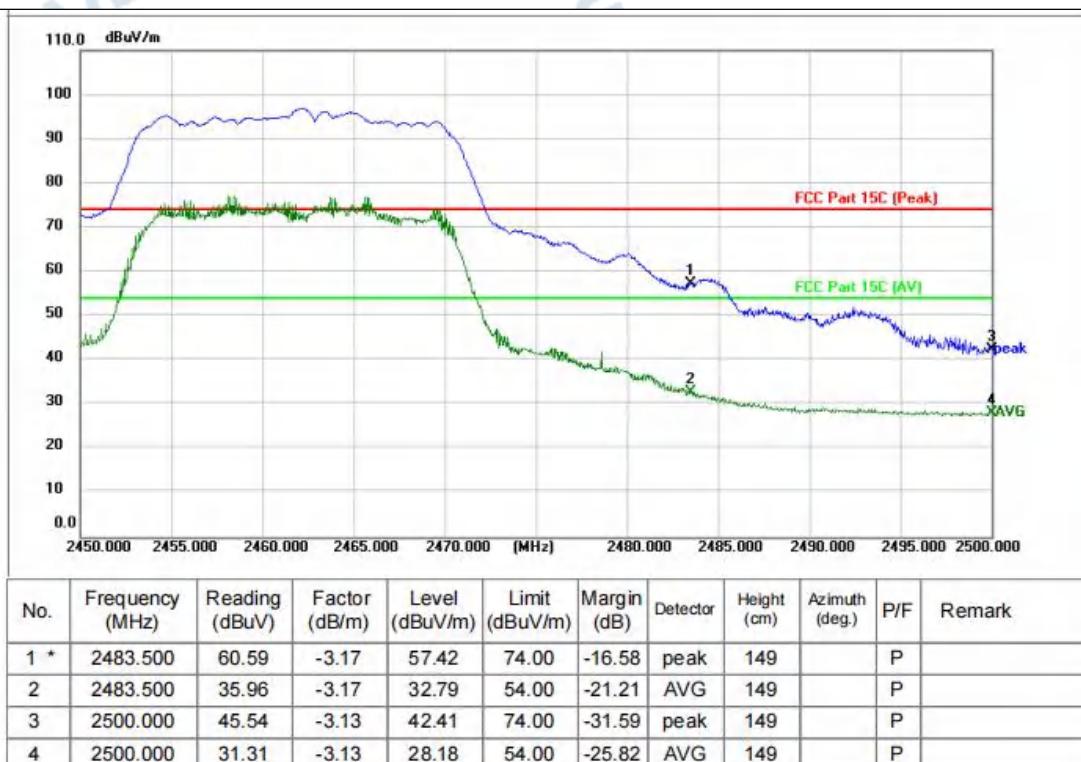


## T4 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 40 / CH: L

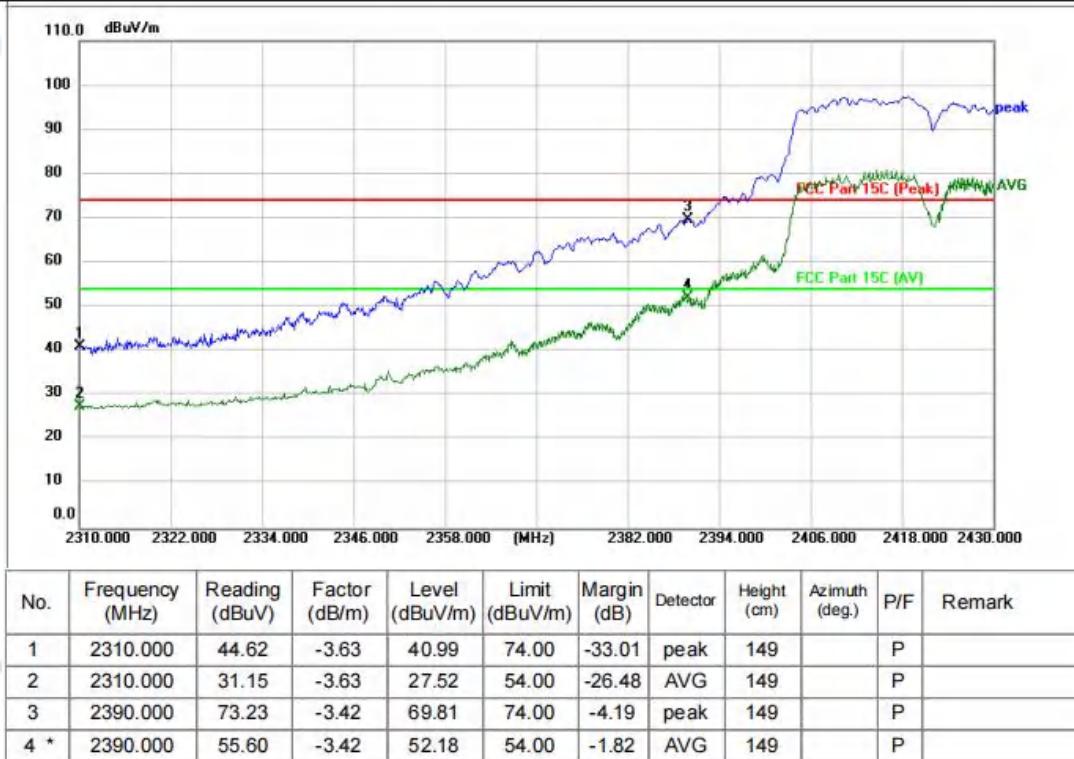


## TM4 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 40 / CH: L

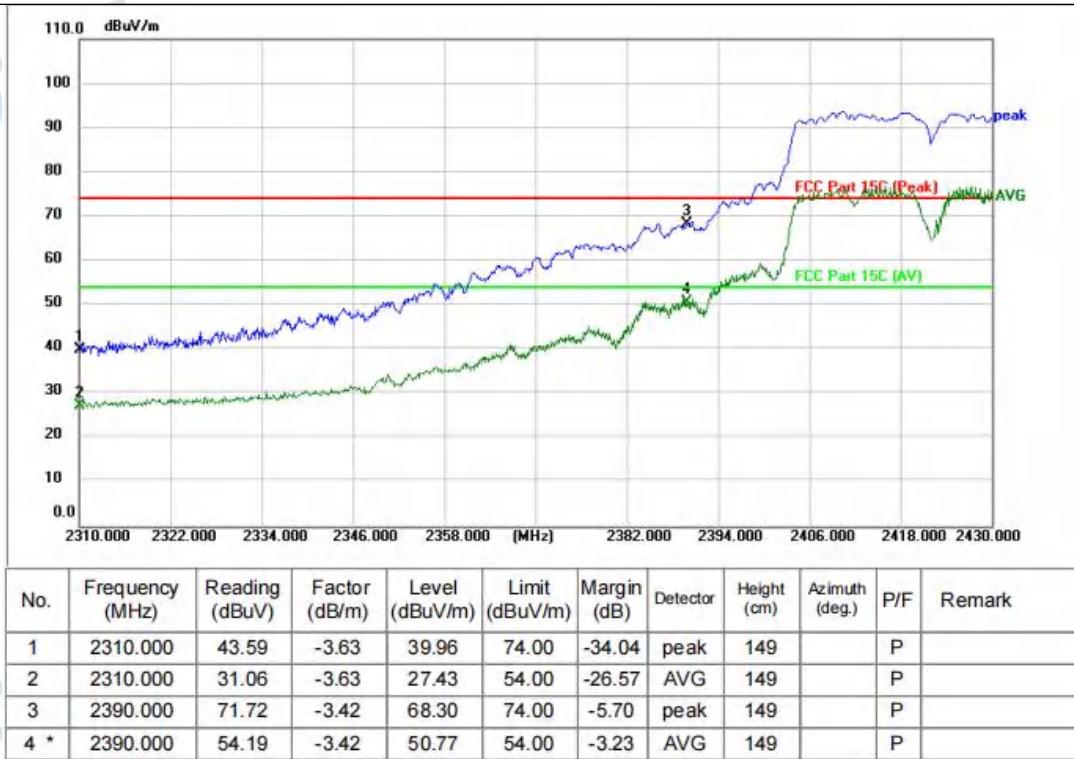

## TM4 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 40 / CH: H

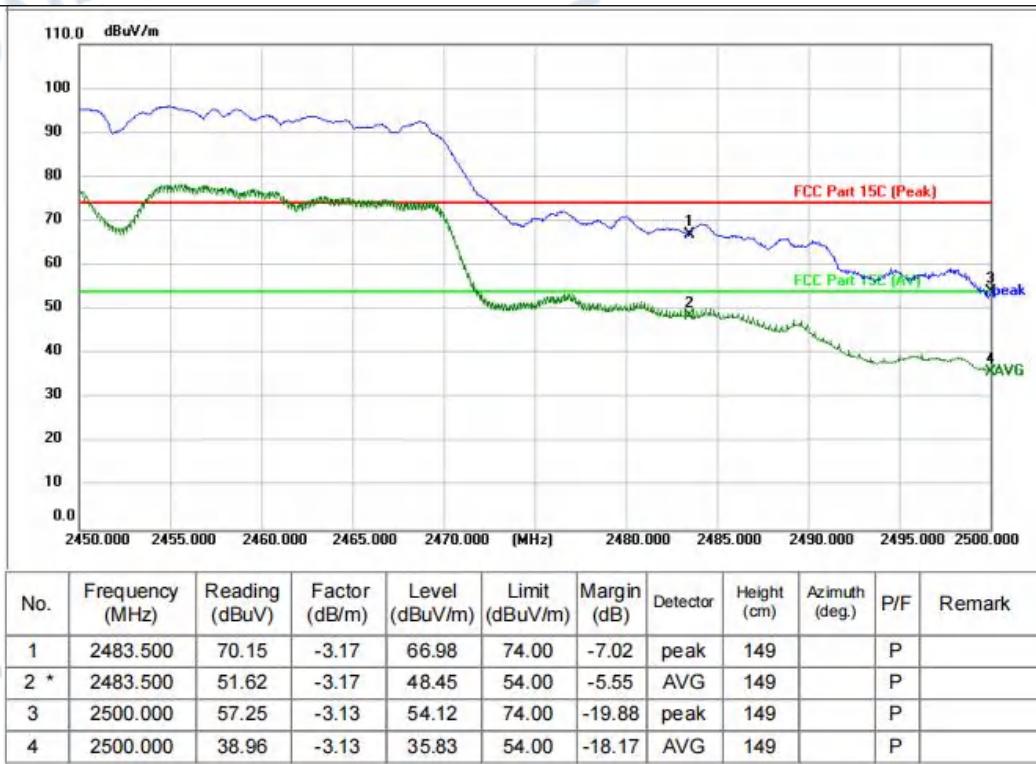

## TM4 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 40 / CH: H

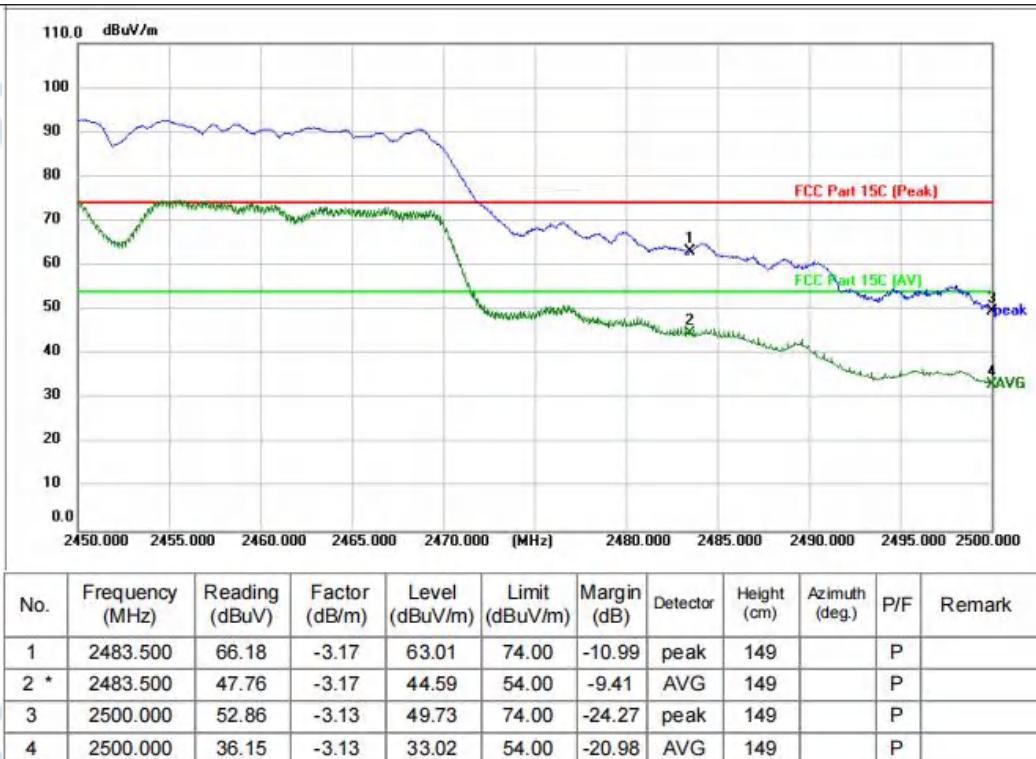

NOTE:1.The test software will only record the worst test angle and height, and only the worst case will be recorded in the test report.

2. Margin = Measurement Level - Limit ;Measurement Level=Test receiver reading + correction factor

#### 4.7 Emissions in frequency bands (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
<p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges.</p> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>			
Test Method:	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	<p>a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>h. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <p>1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.</p>		

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor "C  
 Preamplifier Factor  
 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.


#### 4.7.1 E.U.T. Operation:

Operating Environment:

Temperature:	22.7 °C	Humidity:	46 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1				


#### 4.7.2 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

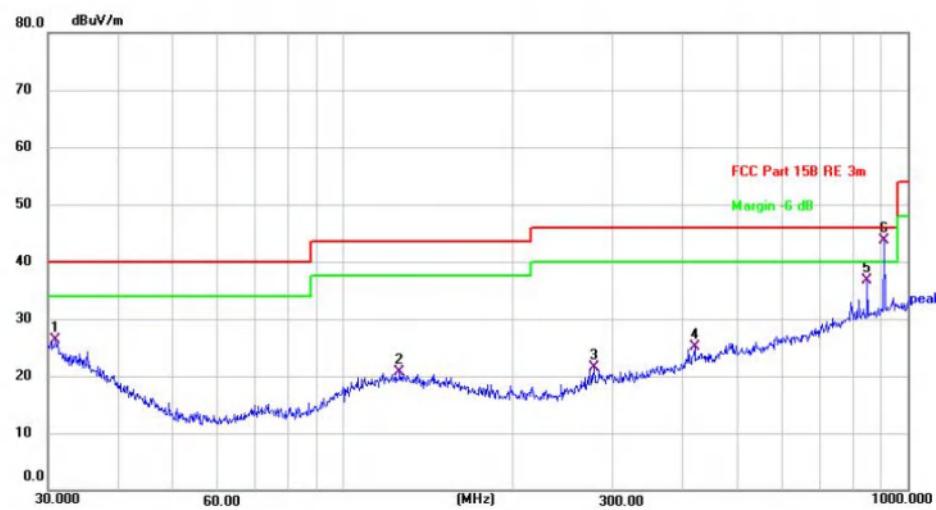

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	30.9619	26.35	-0.13	26.22	40.00	-13.78	QP	100		P	
2	125.8864	26.44	-5.65	20.79	43.50	-22.71	QP	100		P	
3	278.0668	27.59	-6.07	21.52	46.00	-24.48	QP	100		P	
4	419.1081	27.99	-2.92	25.07	46.00	-20.93	QP	100		P	
5	848.0563	32.06	4.70	36.76	46.00	-9.24	QP	100		P	
6 *	909.6667	37.59	6.12	43.71	46.00	-2.29	QP	100		P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

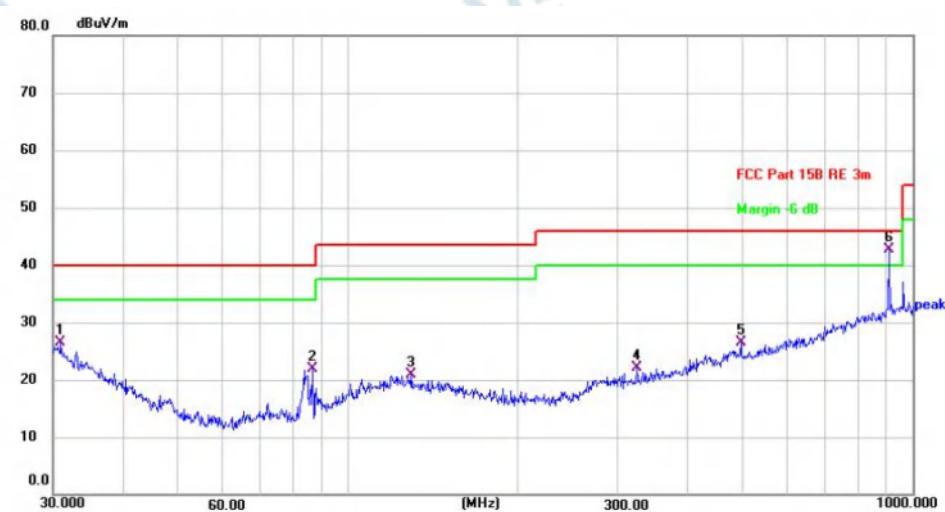

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	30.9619	26.55	-0.11	26.44	40.00	-13.56	QP	100		P	
2	86.5029	33.44	-11.61	21.83	40.00	-18.17	QP	100		P	
3	129.4677	26.48	-5.64	20.84	43.50	-22.66	QP	100		P	
4	324.4561	28.03	-5.89	22.14	46.00	-23.86	QP	100		P	
5	495.9344	27.81	-1.33	26.48	46.00	-19.52	QP	100		P	
6 *	906.4824	36.65	6.07	42.72	46.00	-3.28	QP	100		P	

NOTE:1.The test software will only record the worst test angle and height, and only the worst case will be recorded in the test report.

2. Margin = Measurement Level - Limit ;Measurement Level=Test receiver reading + correction factor

#### 4.8 Emissions in frequency bands (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
<p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges.</p> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>			
Test Method:	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	<p>a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>h. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <p>1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.</p>		


2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor "C  
Preamplifier Factor  
3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.

#### 4.8.1 E.U.T. Operation:

Operating Environment:


Temperature:	22.7 °C	Humidity:	46 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1				

#### 4.8.2 Test Setup Diagram:

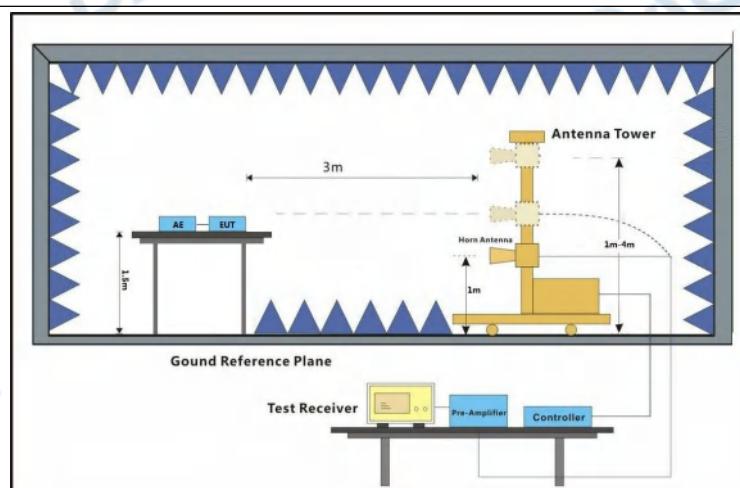


#### 4.8.3 Test Data:

## TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

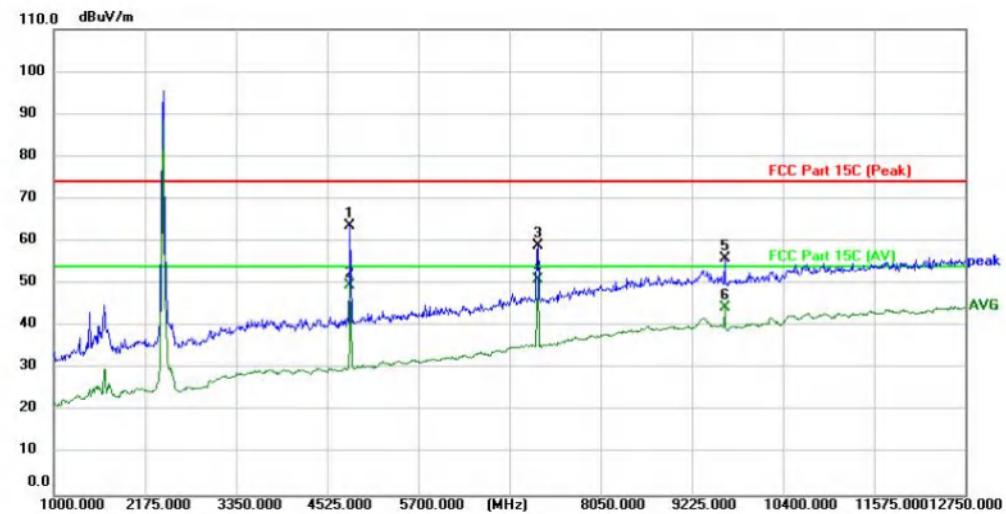


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4818.750	60.26	3.35	63.61	74.00	-10.39	peak	149		P	
2	4818.750	46.42	3.35	49.77	54.00	-4.23	AVG	149		P	
3	7239.250	48.55	10.42	58.97	74.00	-15.03	peak	149		P	
4 *	7239.250	40.46	10.42	50.88	54.00	-3.12	AVG	149		P	
5	9648.000	40.98	15.10	56.08	74.00	-17.92	peak	149		P	
6	9648.000	29.38	15.10	44.48	54.00	-9.52	AVG	149		P	

## TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

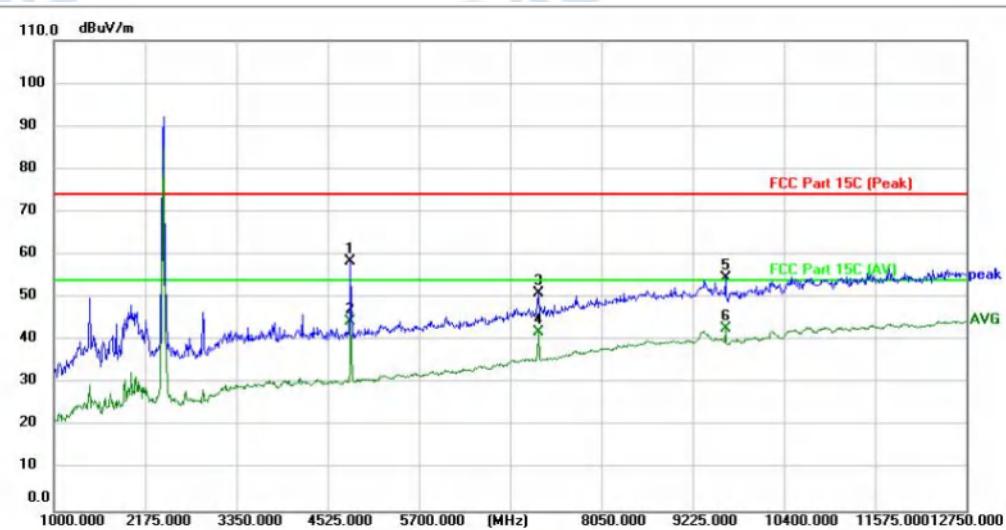


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4818.750	55.00	3.35	58.35	74.00	-15.65	peak	149		P	
2 *	4818.750	41.00	3.35	44.35	54.00	-9.65	AVG	149		P	
3	7239.250	40.47	10.42	50.89	74.00	-23.11	peak	149		P	
4	7239.250	31.48	10.42	41.90	54.00	-12.10	AVG	149		P	
5	9648.000	39.62	15.10	54.72	74.00	-19.28	peak	149		P	
6	9648.000	27.69	15.10	42.79	54.00	-11.21	AVG	149		P	

## TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: M

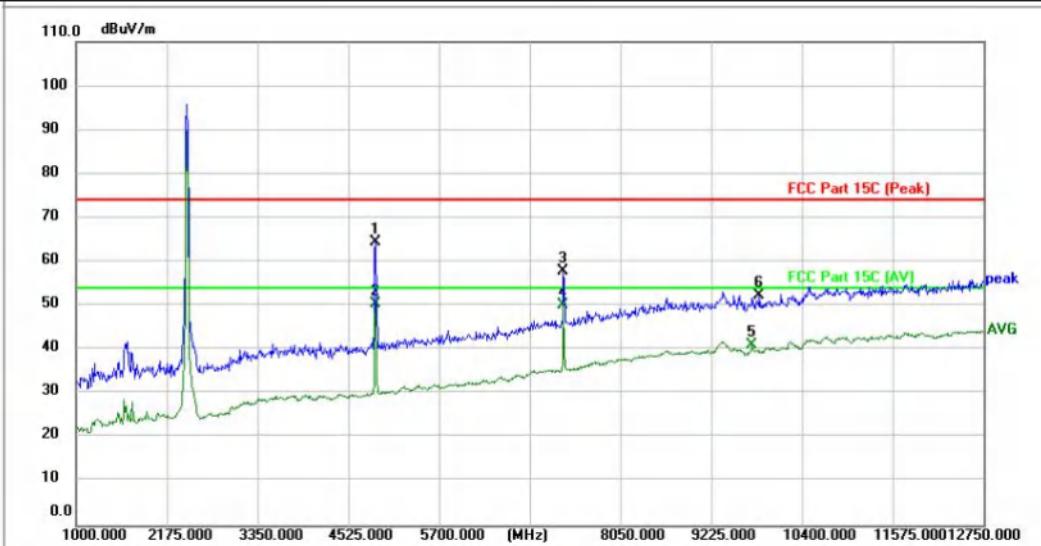


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4877.500	60.99	3.55	64.54	74.00	-9.46	peak	149		P	
2 *	4877.500	46.98	3.55	50.53	54.00	-3.47	AVG	149		P	
3	7309.750	47.29	10.55	57.84	74.00	-16.16	peak	149		P	
4	7309.750	39.69	10.55	50.24	54.00	-3.76	AVG	149		P	
5	9753.750	25.92	15.09	41.01	54.00	-12.99	AVG	149		P	
6	9847.750	37.37	15.10	52.47	74.00	-21.53	peak	149		P	

## TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: M

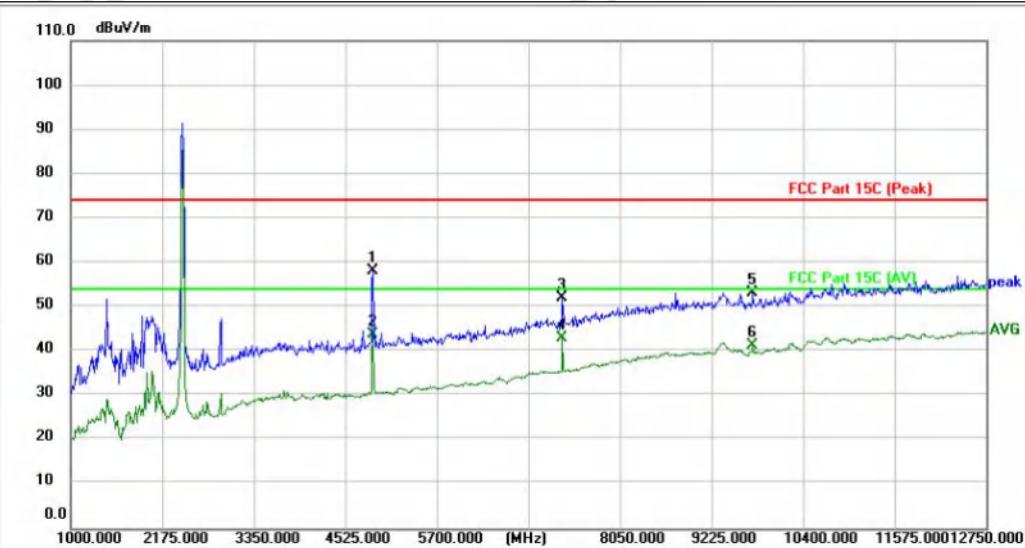


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4877.500	54.59	3.55	58.14	74.00	-15.86	peak	149		P	
2 *	4877.500	40.37	3.55	43.92	54.00	-10.08	AVG	149		P	
3	7309.750	41.46	10.55	52.01	74.00	-21.99	peak	149		P	
4	7309.750	32.40	10.55	42.95	54.00	-11.05	AVG	149		P	
5	9753.750	38.23	15.09	53.32	74.00	-20.68	peak	149		P	
6	9753.750	26.39	15.09	41.48	54.00	-12.52	AVG	149		P	

## TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

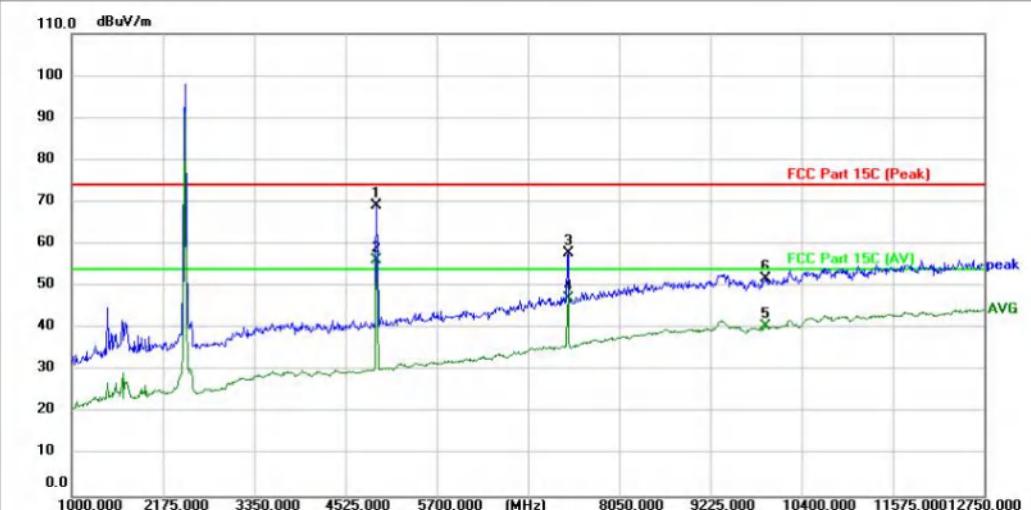

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4924.500	65.47	3.70	69.17	74.00	-4.83	peak	149		P	
2 *	4924.500	52.60	3.70	56.30	54.00	2.30	AVG	149		F	
3	7392.000	47.25	10.70	57.95	74.00	-16.05	peak	149		P	
4	7392.000	36.38	10.70	47.08	54.00	-6.92	AVG	149		P	
5	9930.000	25.60	15.09	40.69	54.00	-13.31	AVG	149		P	
6	9941.750	36.68	15.09	51.77	74.00	-22.23	peak	149		P	

## TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

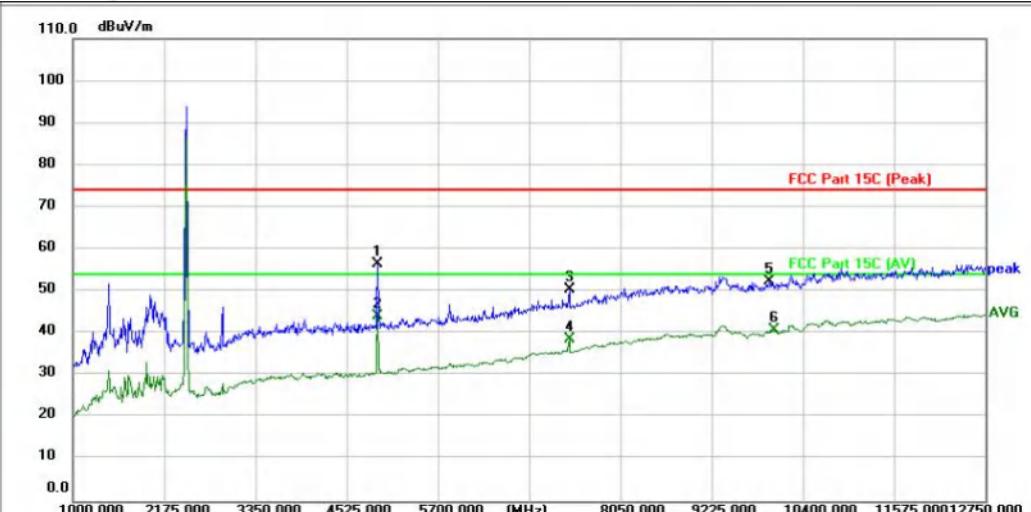

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4924.500	52.94	3.70	56.64	74.00	-17.36	peak	149		P	
2 *	4924.500	40.31	3.70	44.01	54.00	-9.99	AVG	149		P	
3	7392.000	39.65	10.70	50.35	74.00	-23.65	peak	149		P	
4	7392.000	28.01	10.70	38.71	54.00	-15.29	AVG	149		P	
5	9965.250	37.29	15.09	52.38	74.00	-21.62	peak	149		P	
6	10024.000	25.62	15.15	40.77	54.00	-13.23	AVG	149		P	

NOTE:1.The test software will only record the worst test angle and height, and only the worst case will be recorded in the test report.


2. Margin = Measurement Level - Limit ;Measurement Level=Test receiver reading + correction factor

## 5 TEST SETUP PHOTOS

Conducted Emission at AC power line



Emissions in frequency bands (below 1GHz)

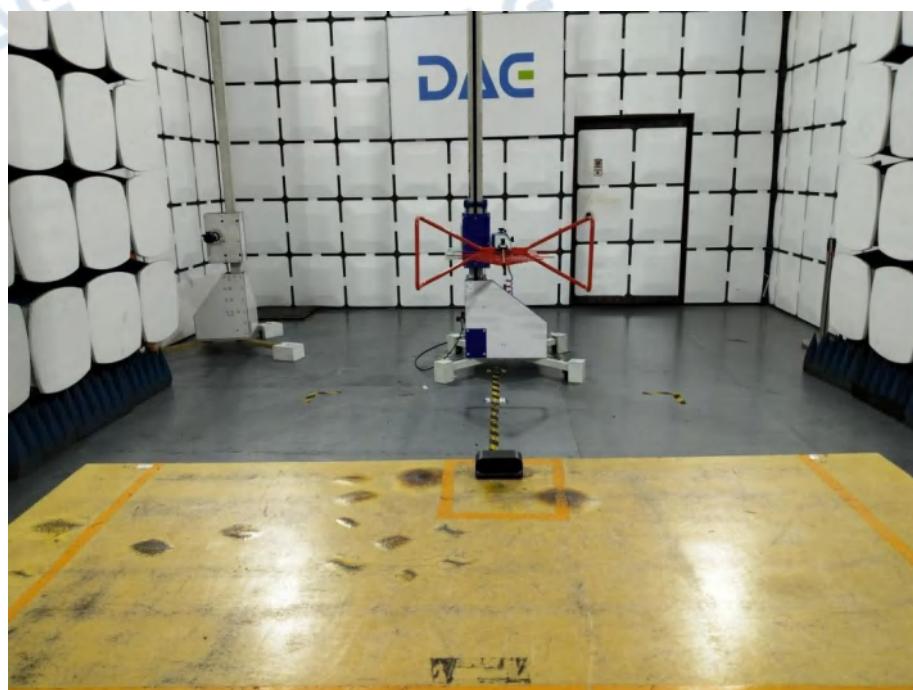

**Emissions in frequency bands (above 1GHz)**

## 6 PHOTOS OF THE EUT

External














**Internal**



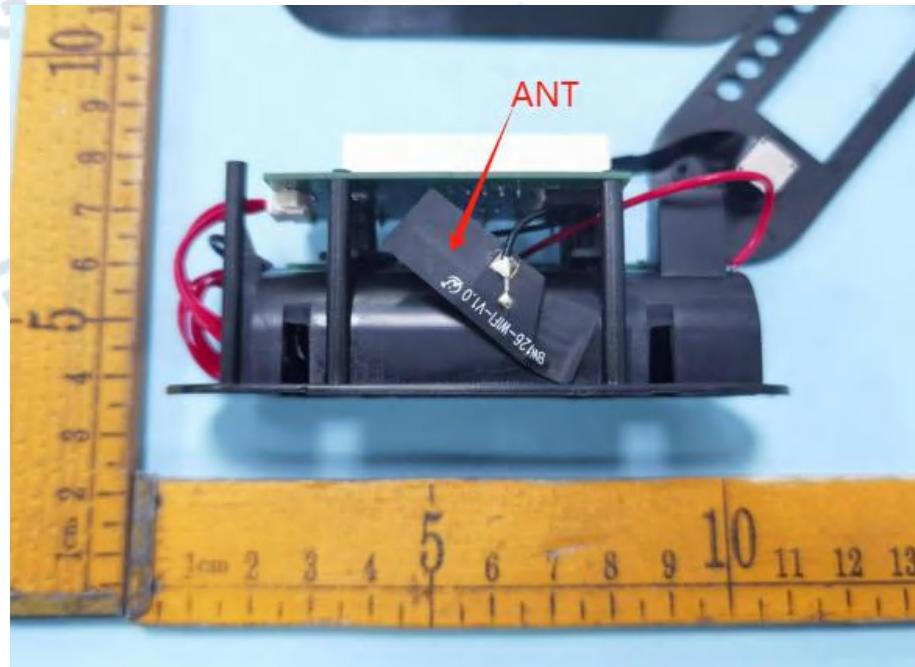

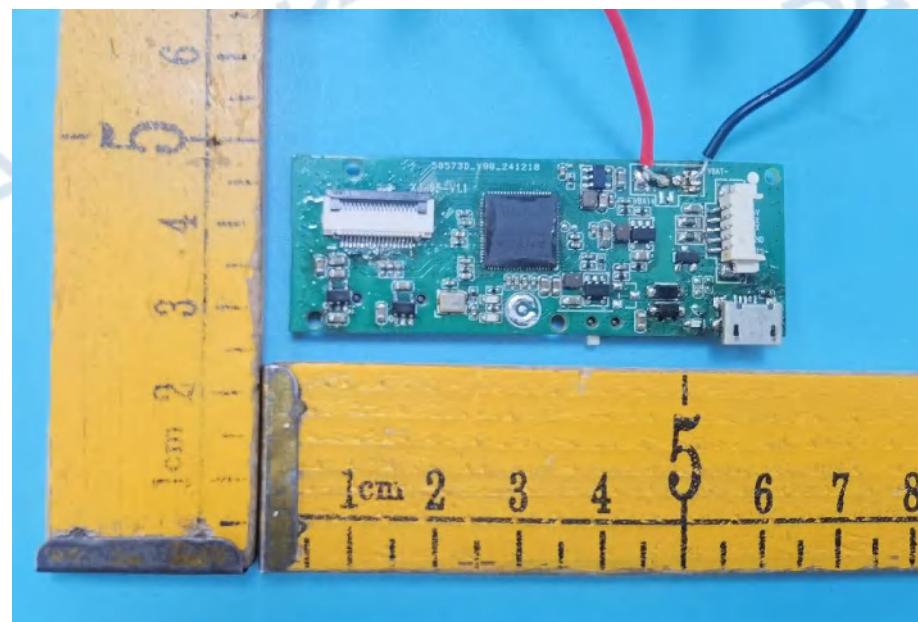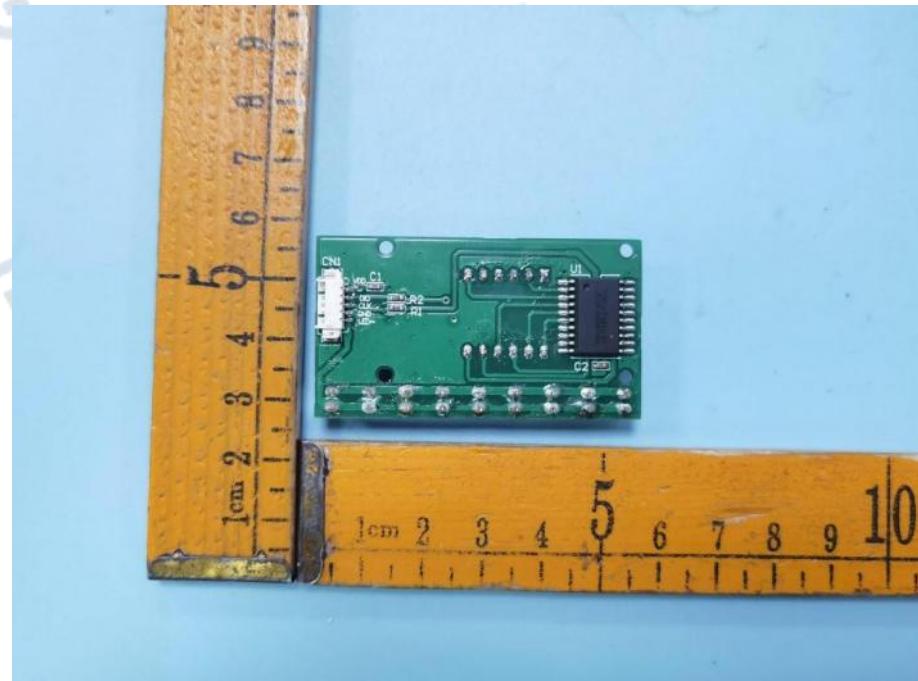

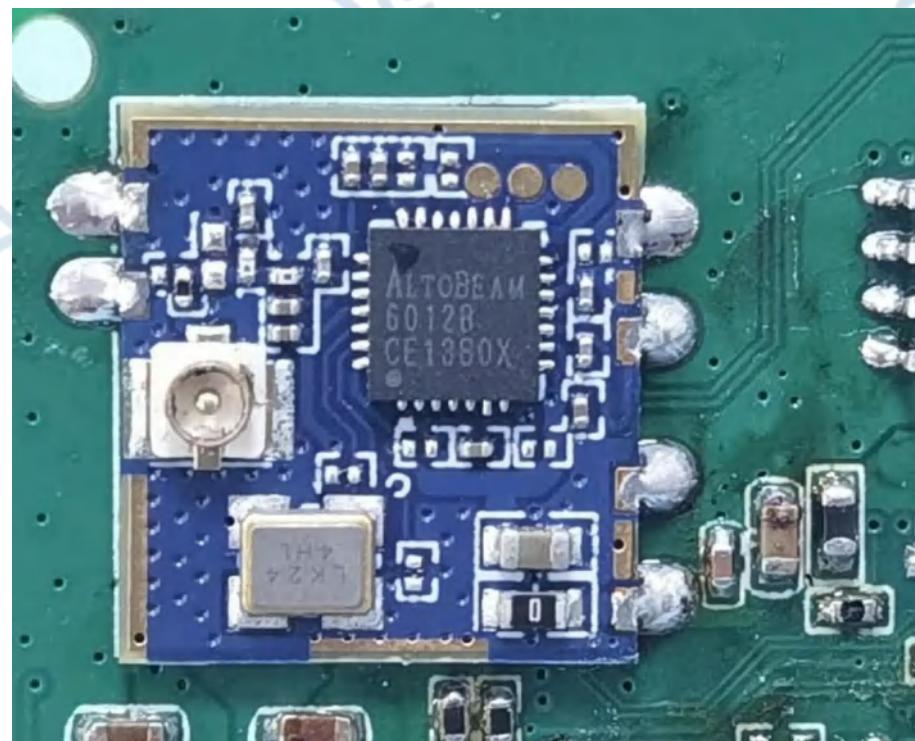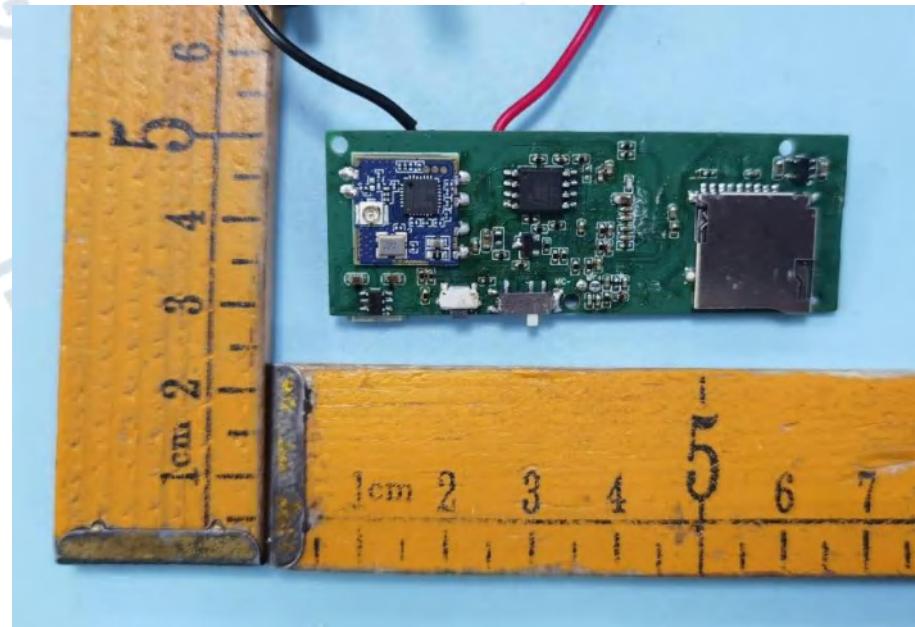








# Appendix



## 1. -6dB Bandwidth



Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT1	802.11b	2412.00	11.27	500	Pass
NVNT	ANT1	802.11b	2437.00	10.85	500	Pass
NVNT	ANT1	802.11b	2462.00	10.81	500	Pass
NVNT	ANT1	802.11g	2412.00	16.49	500	Pass
NVNT	ANT1	802.11g	2437.00	16.47	500	Pass
NVNT	ANT1	802.11g	2462.00	16.45	500	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	17.53	500	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	17.49	500	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	17.47	500	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	36.11	500	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	36.24	500	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	36.10	500	Pass


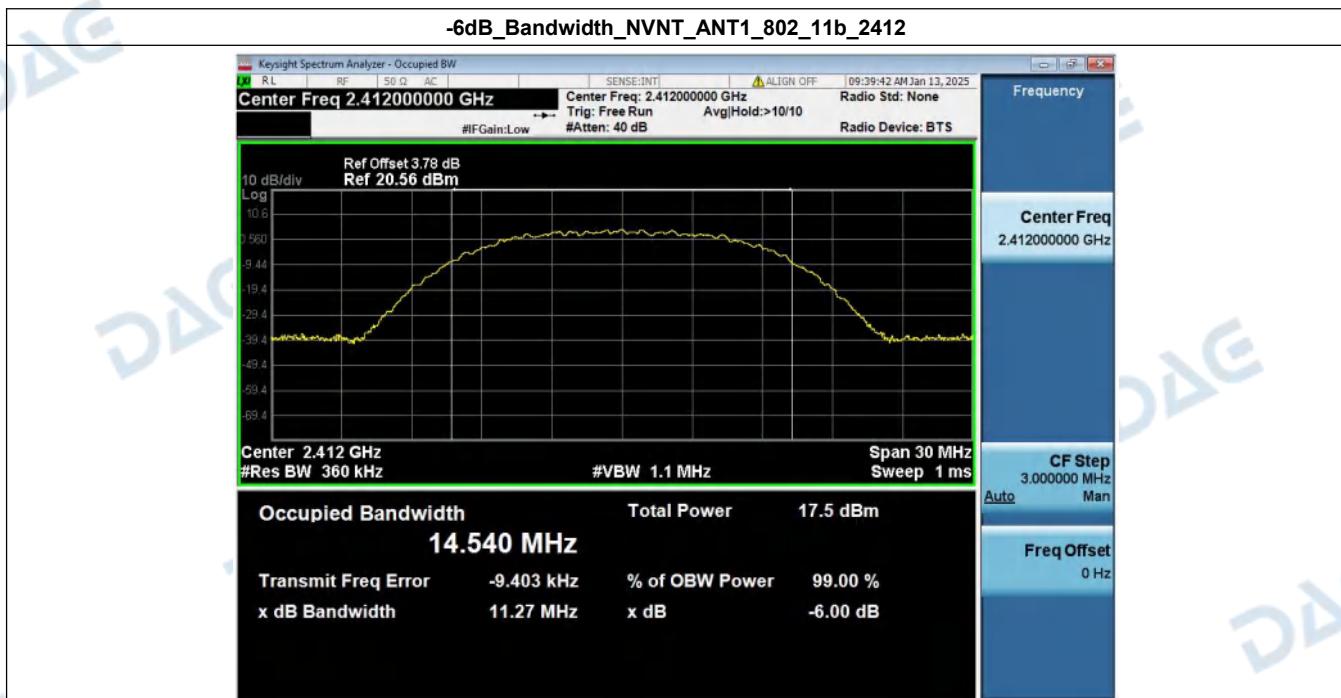


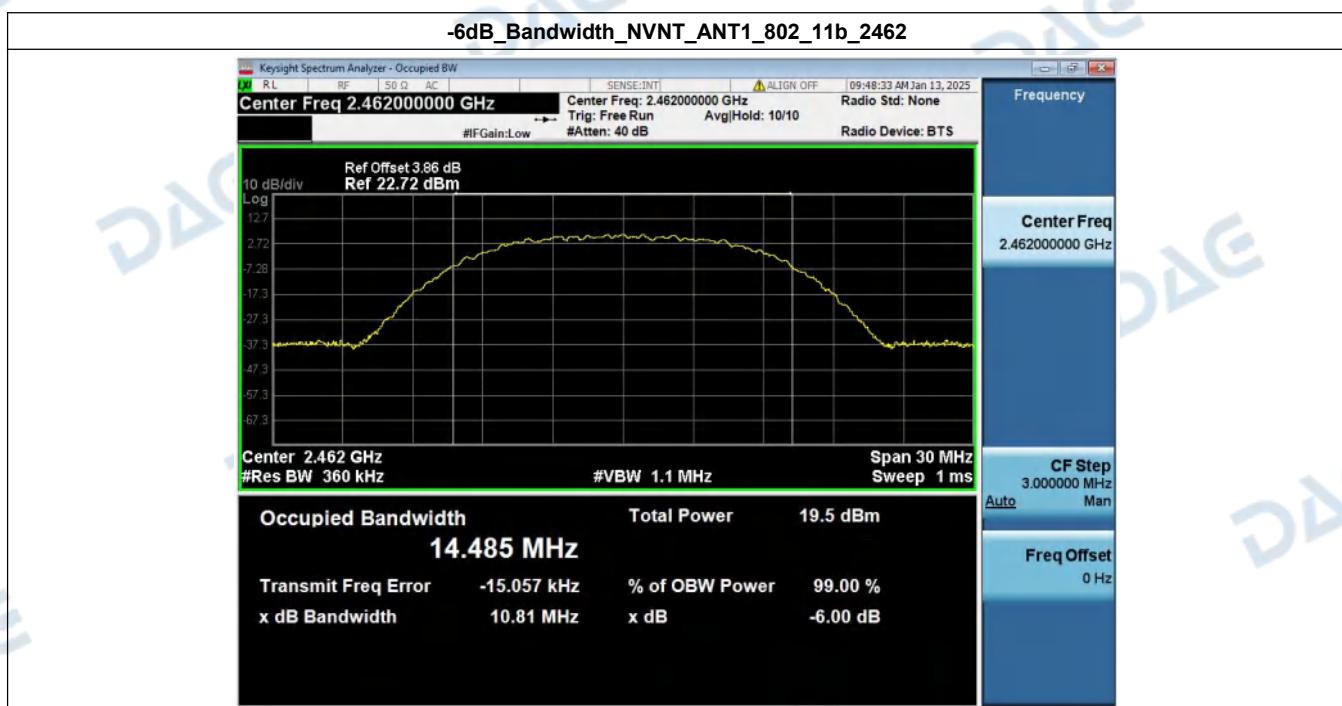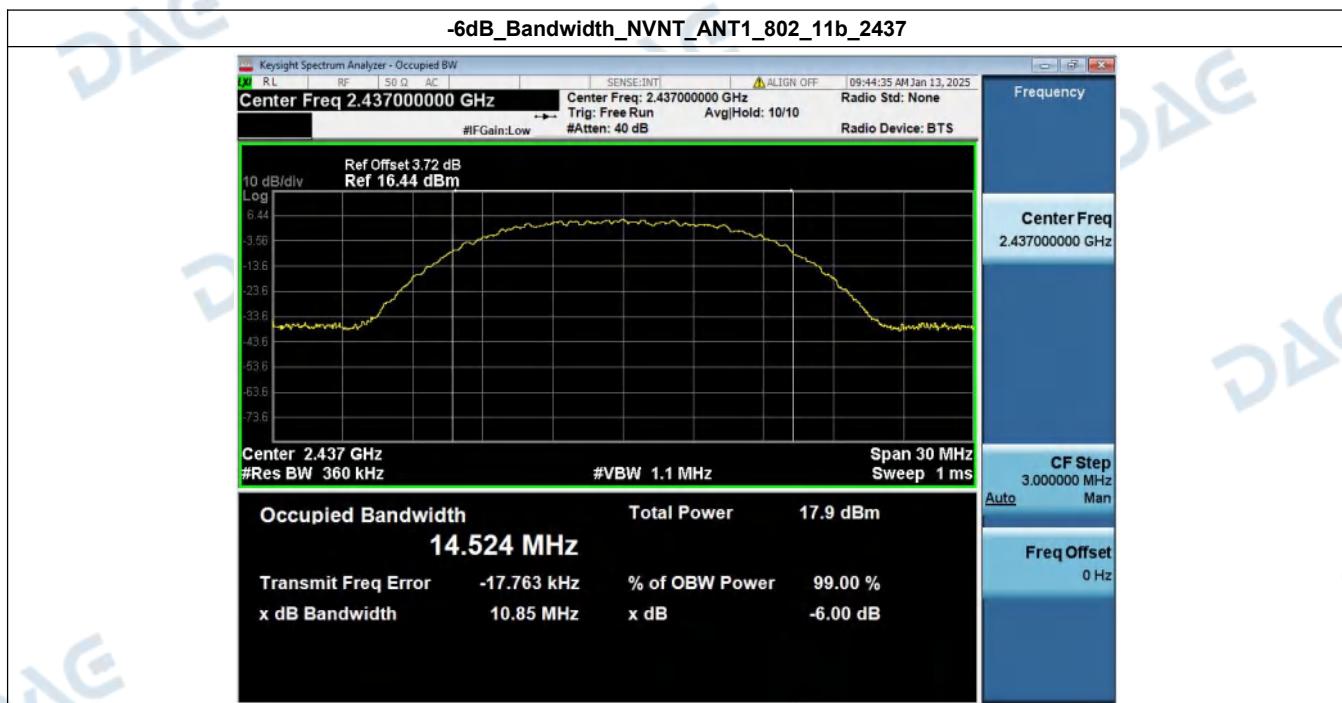


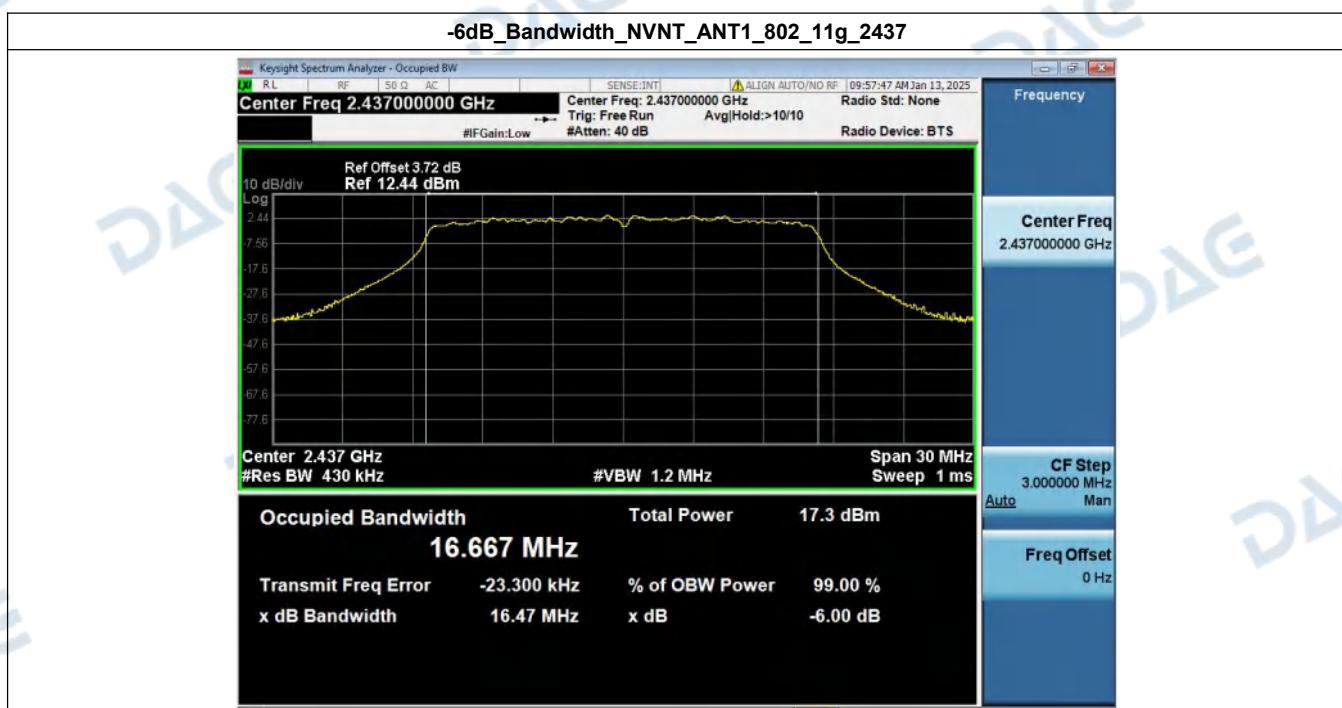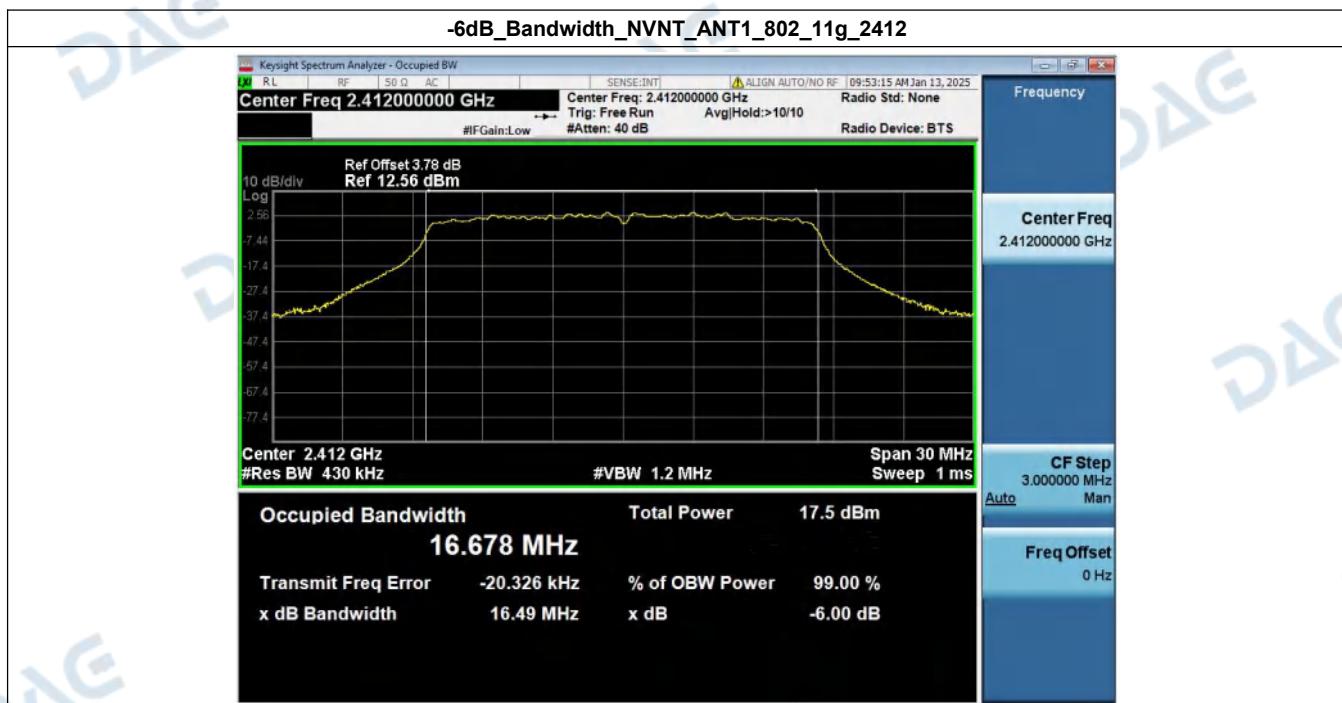

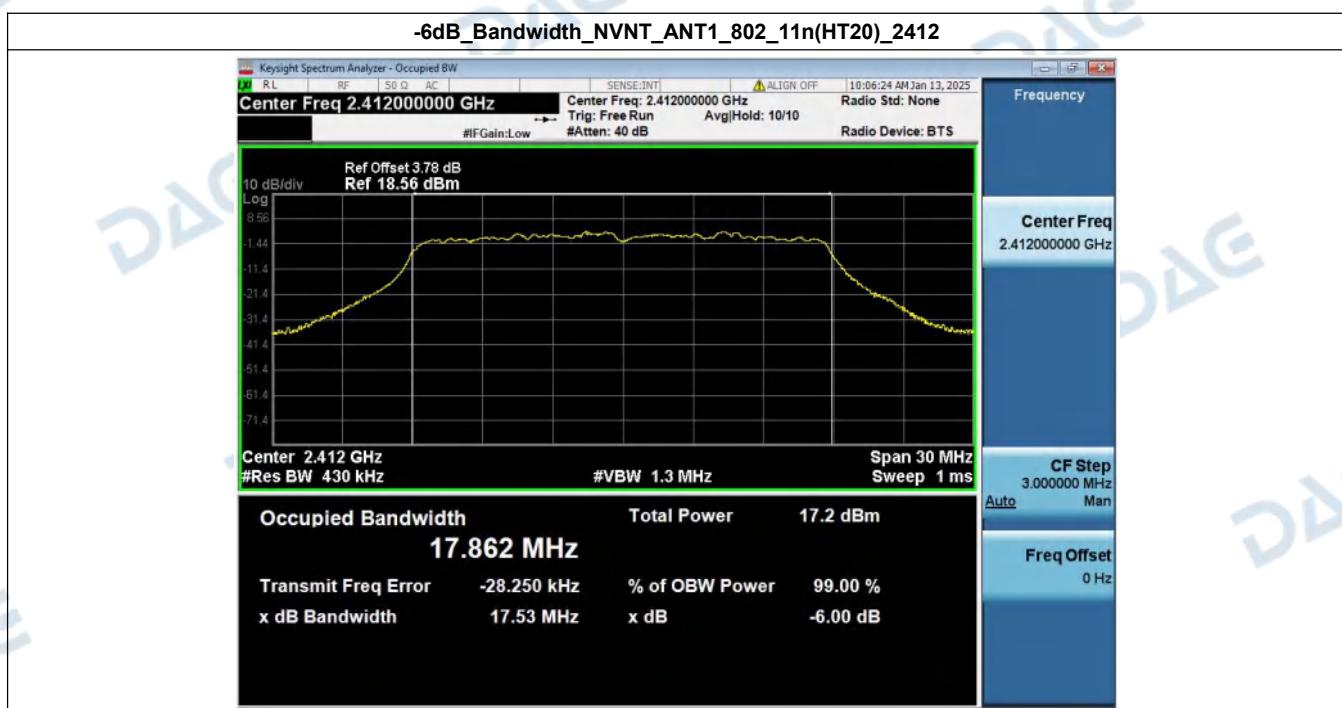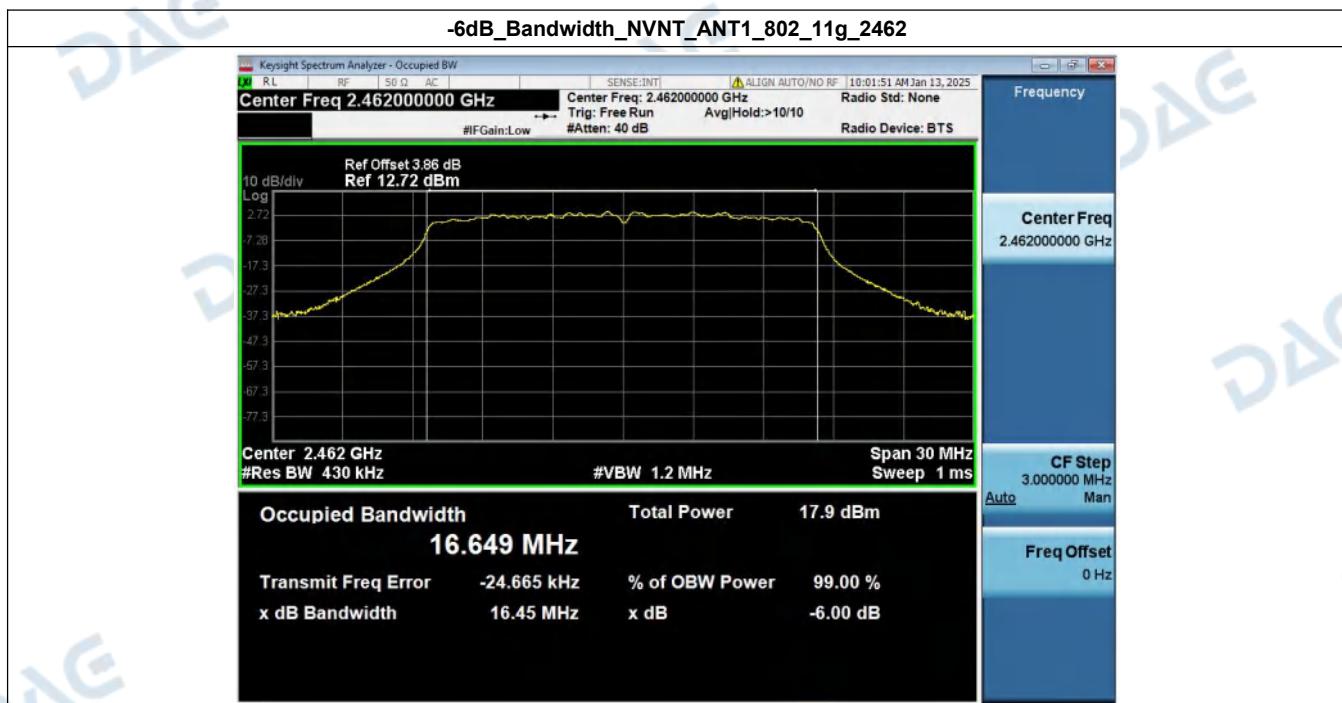

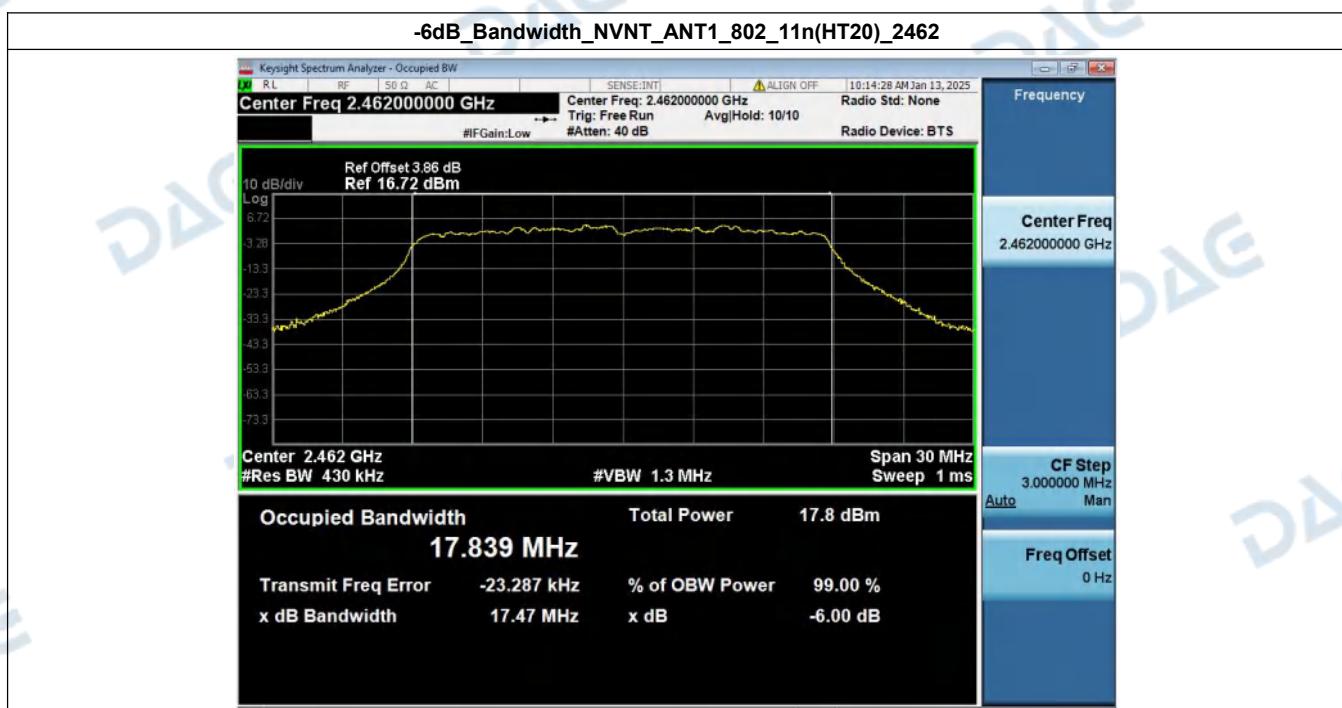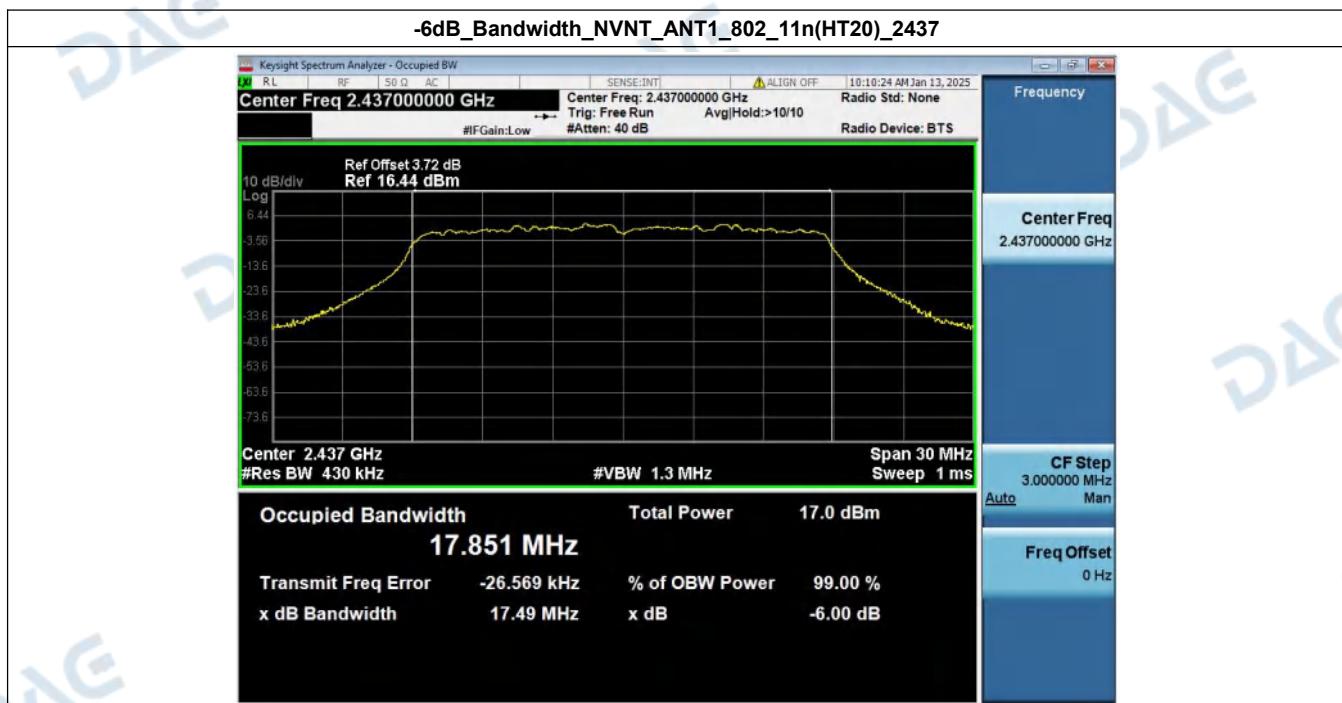


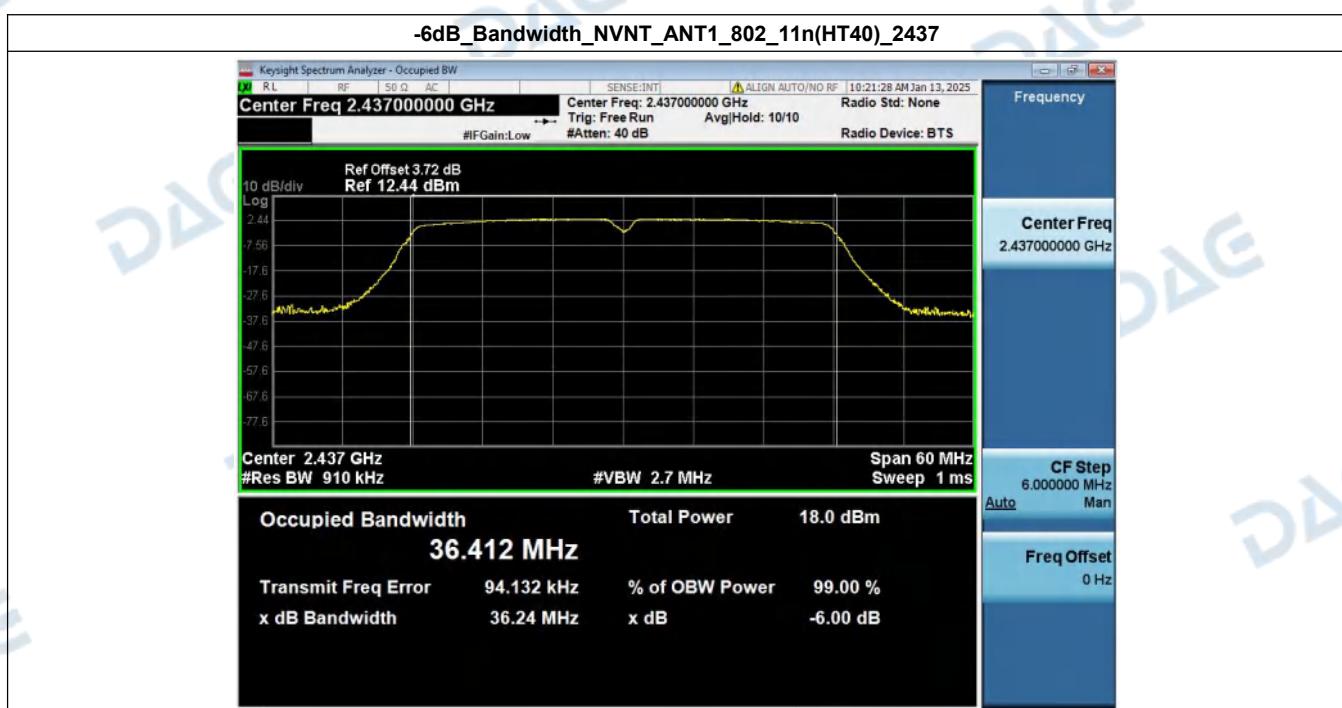
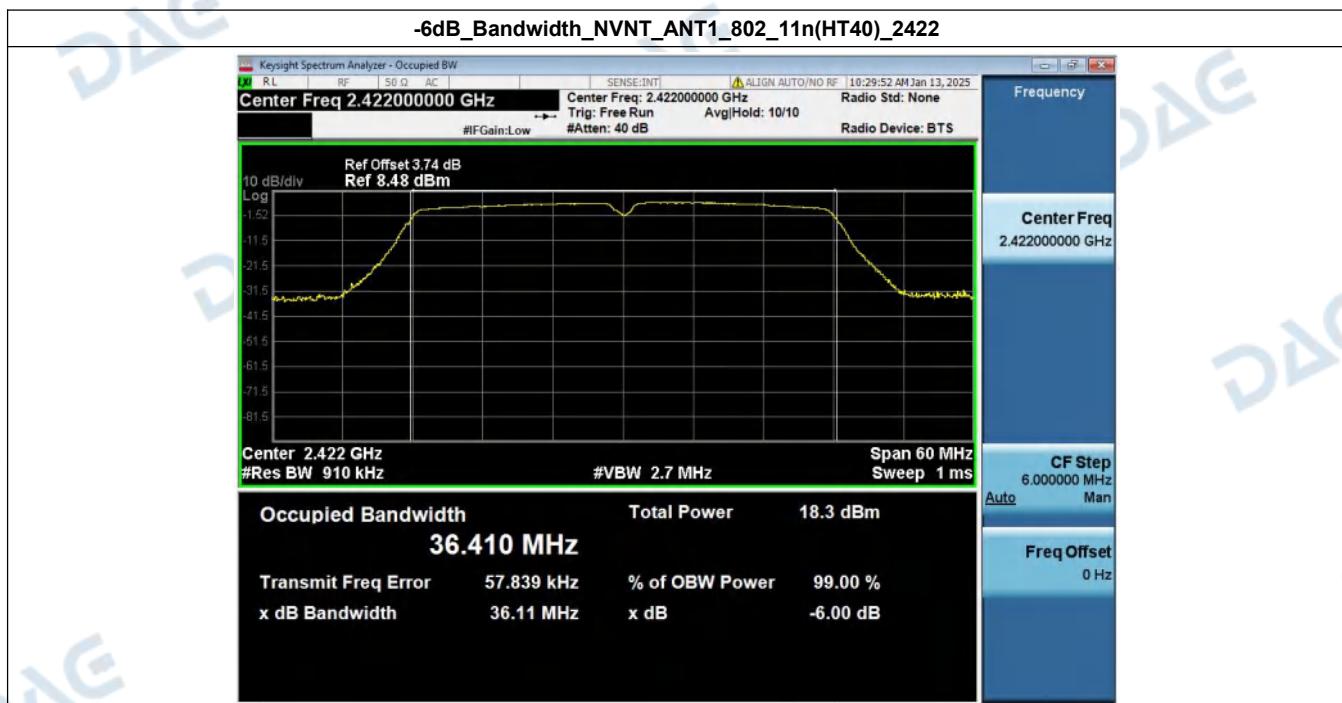



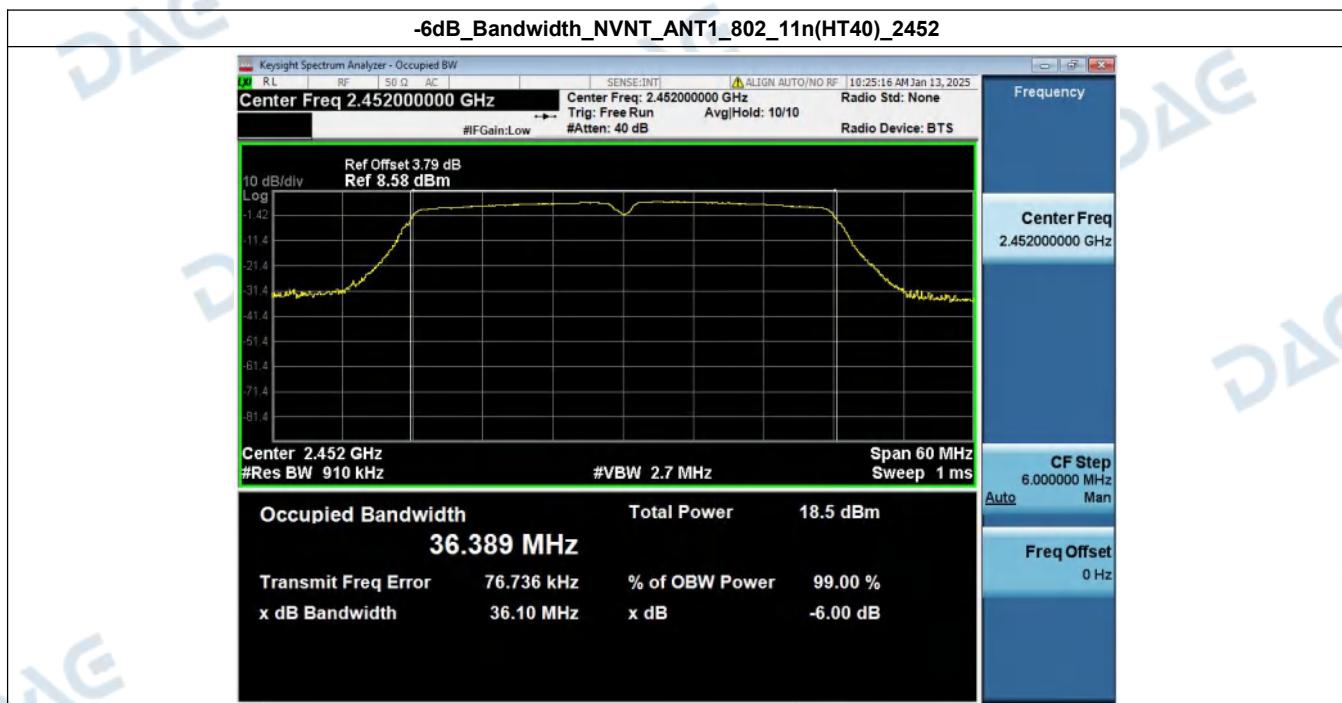




## 2. Duty Cycle



Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty factor(dB)
NVNT	ANT1	802.11b	2412.00	100	0.00
NVNT	ANT1	802.11b	2437.00	100	0.00
NVNT	ANT1	802.11b	2462.00	100	0.00
NVNT	ANT1	802.11g	2412.00	100	0.00
NVNT	ANT1	802.11g	2437.00	100	0.00
NVNT	ANT1	802.11g	2462.00	100	0.00
NVNT	ANT1	802.11n(HT20)	2412.00	100	0.00
NVNT	ANT1	802.11n(HT20)	2437.00	100	0.00
NVNT	ANT1	802.11n(HT20)	2462.00	100	0.00
NVNT	ANT1	802.11n(HT40)	2422.00	100	0.00
NVNT	ANT1	802.11n(HT40)	2437.00	100	0.00
NVNT	ANT1	802.11n(HT40)	2452.00	100	0.00


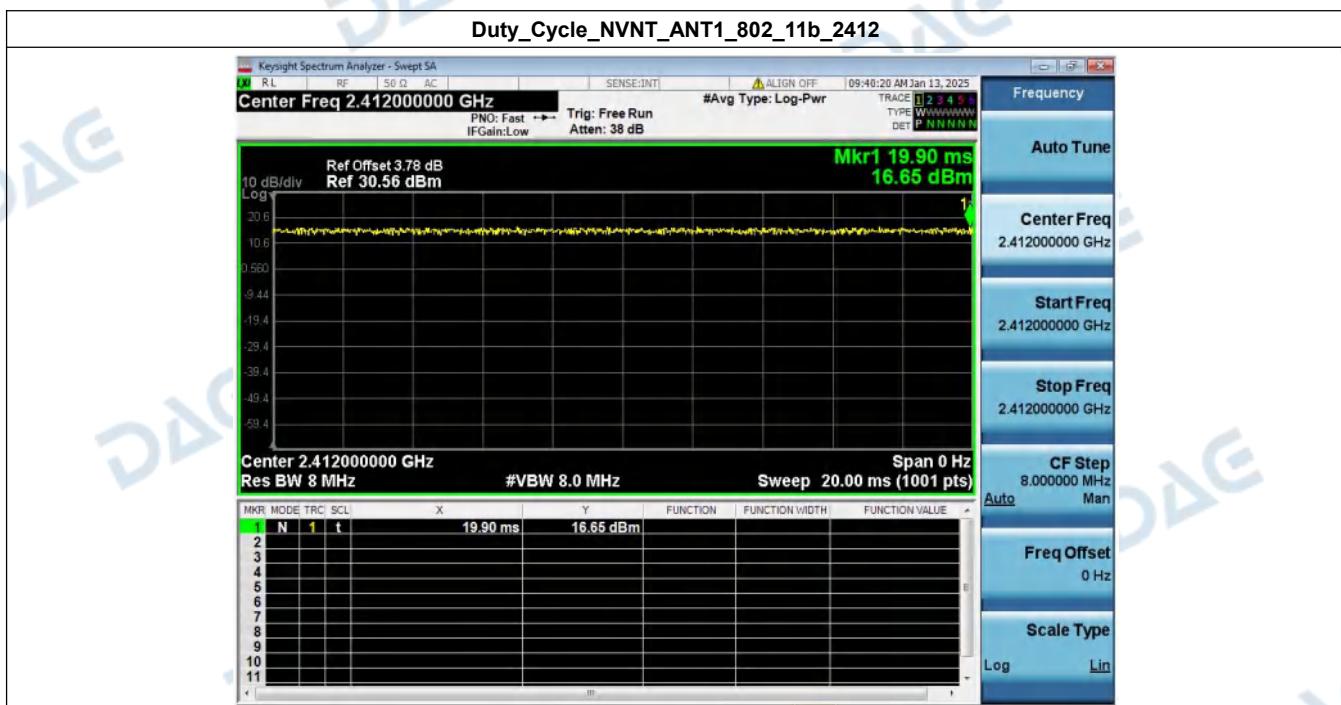


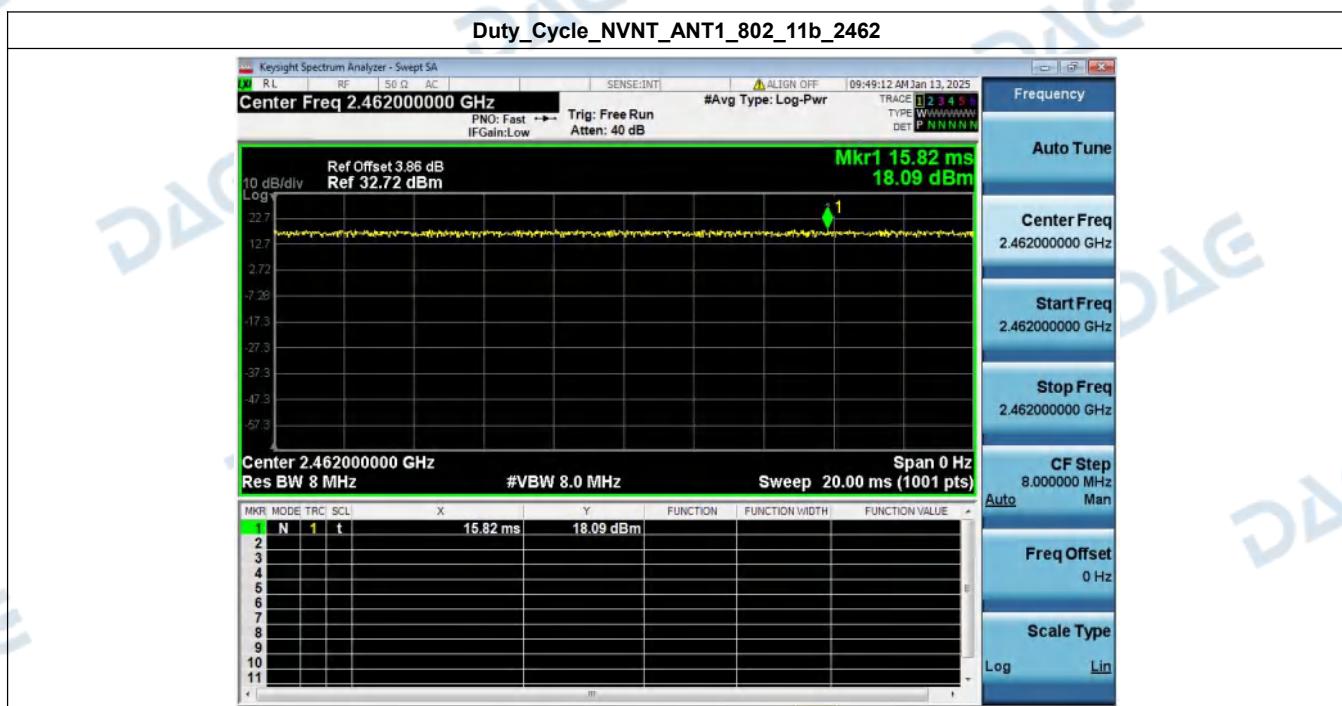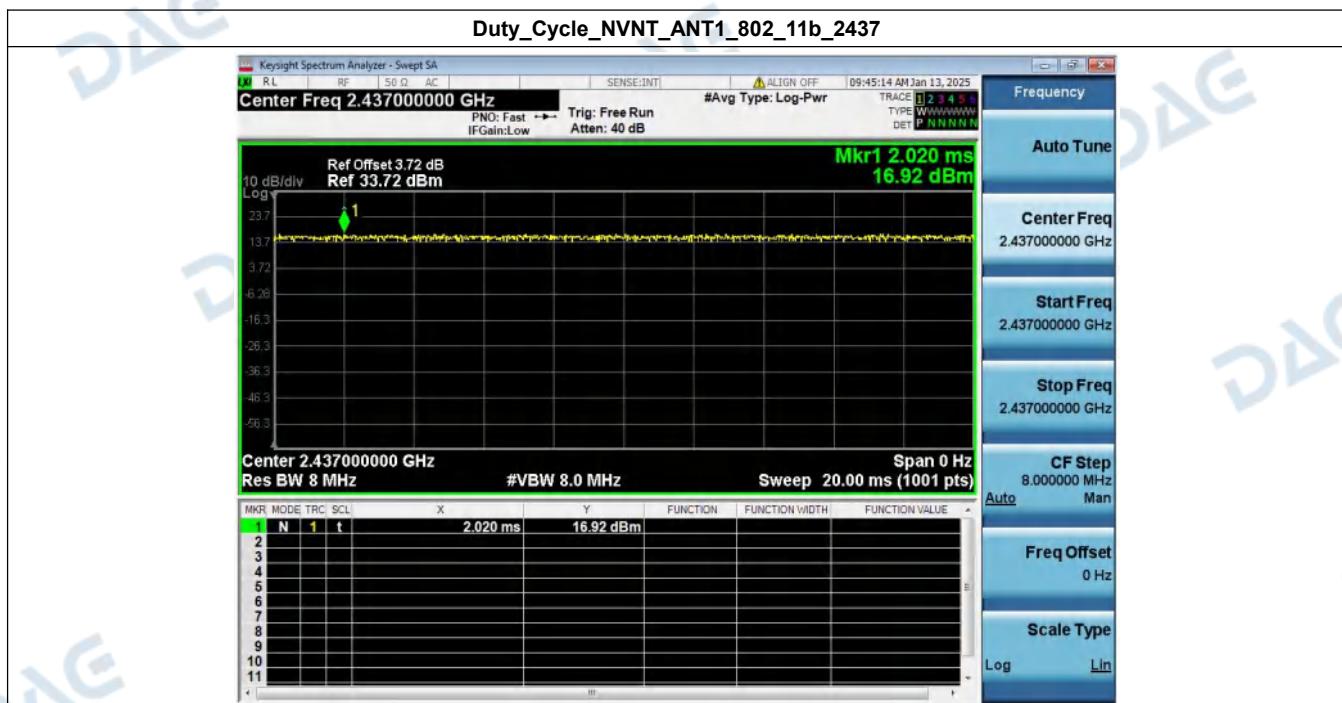


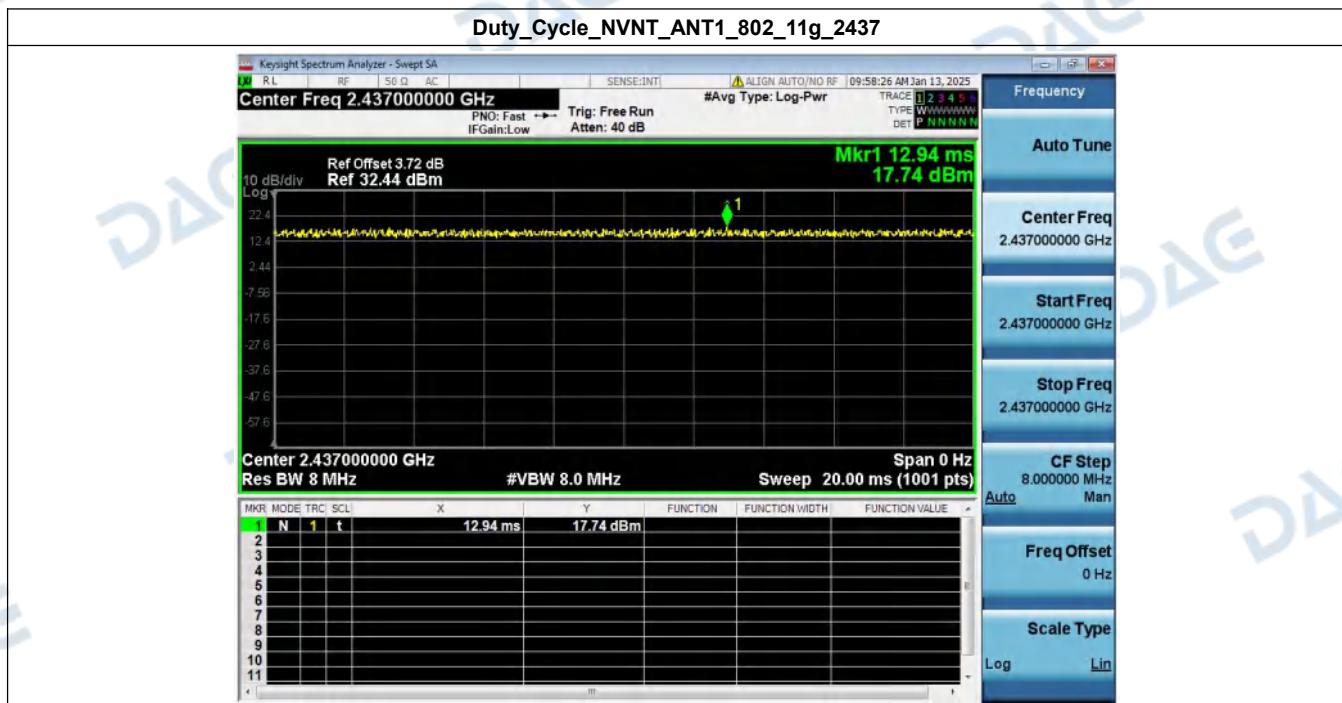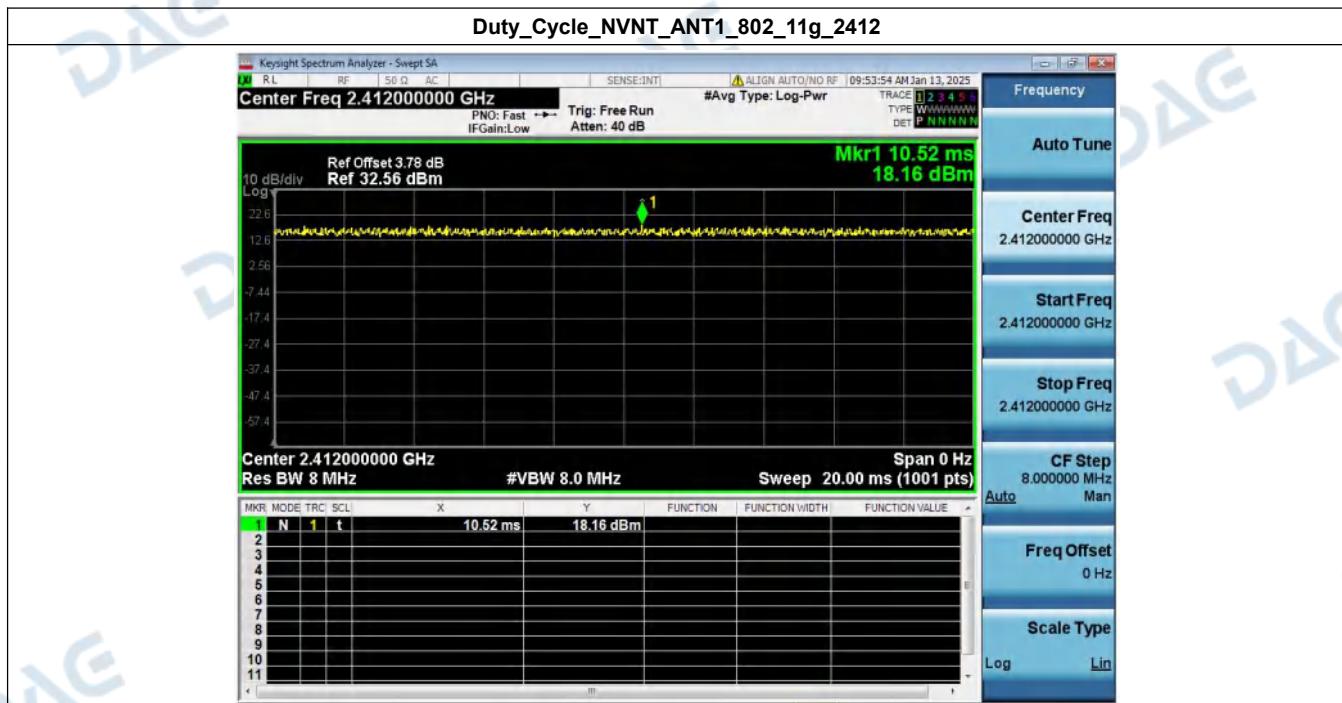

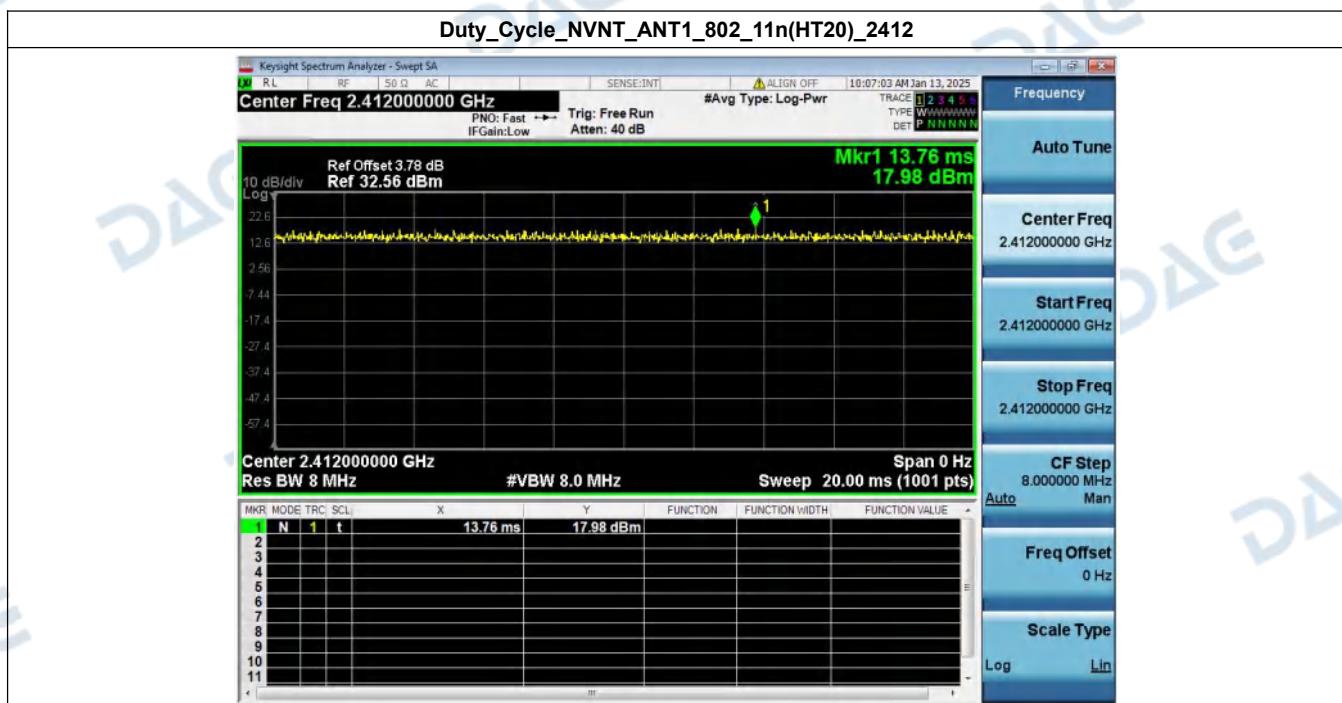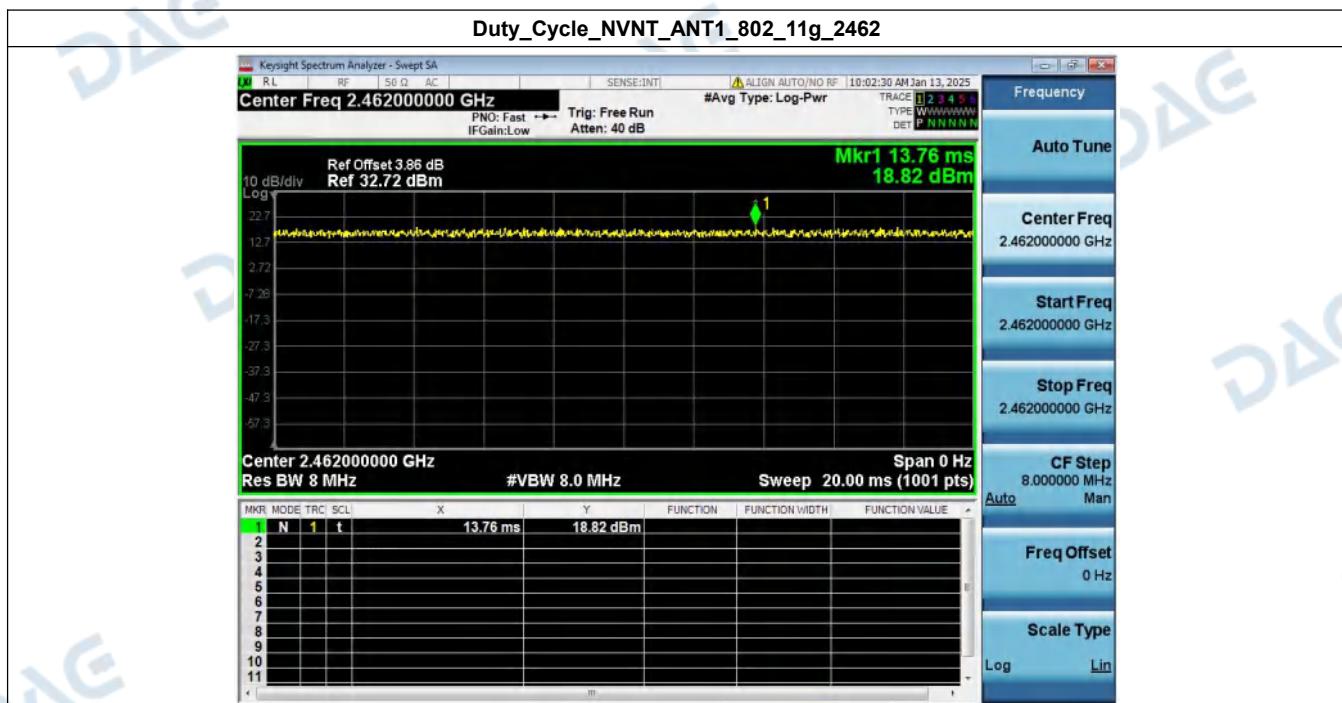

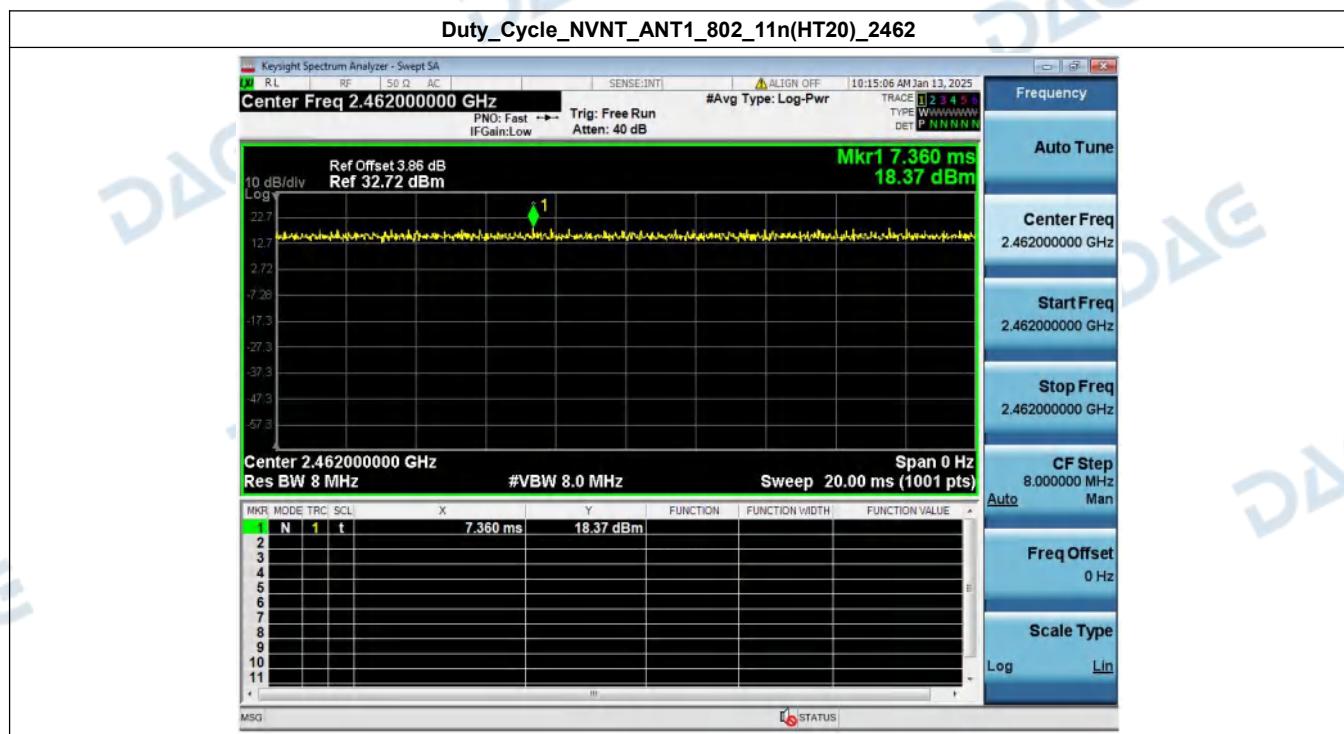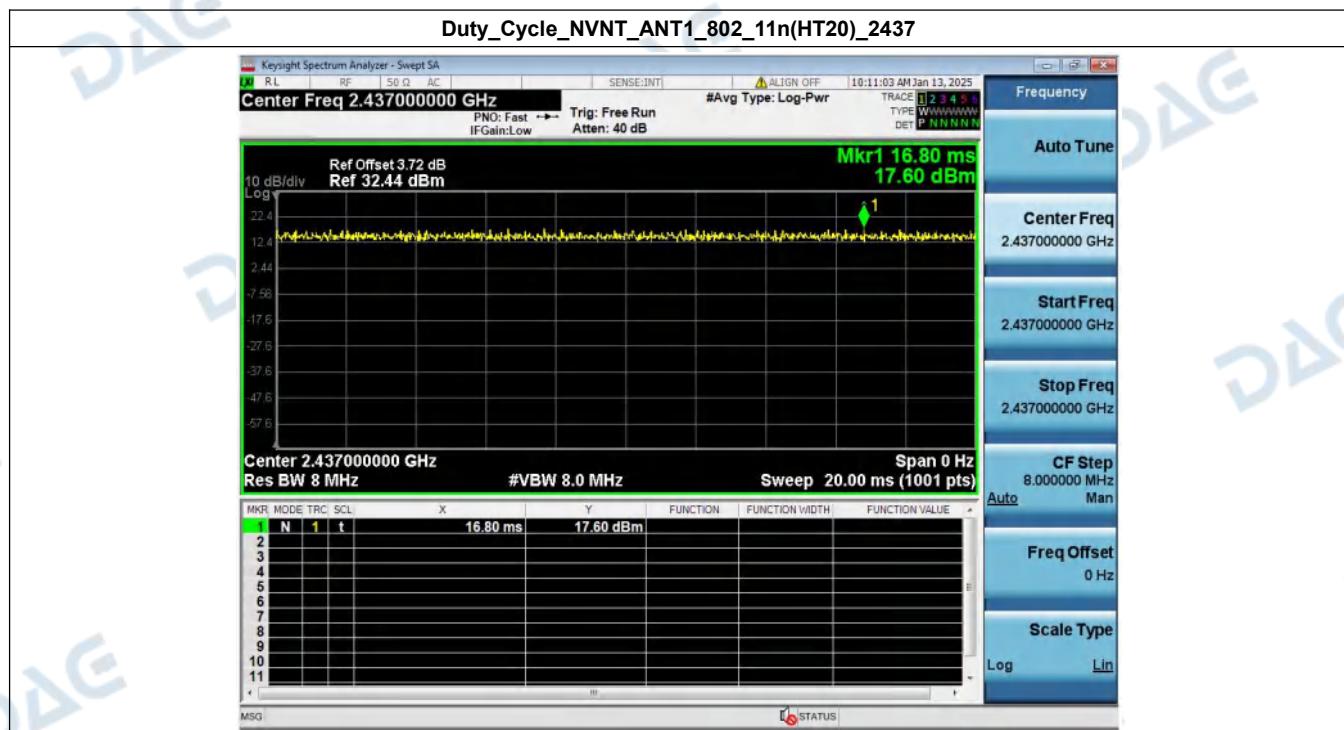

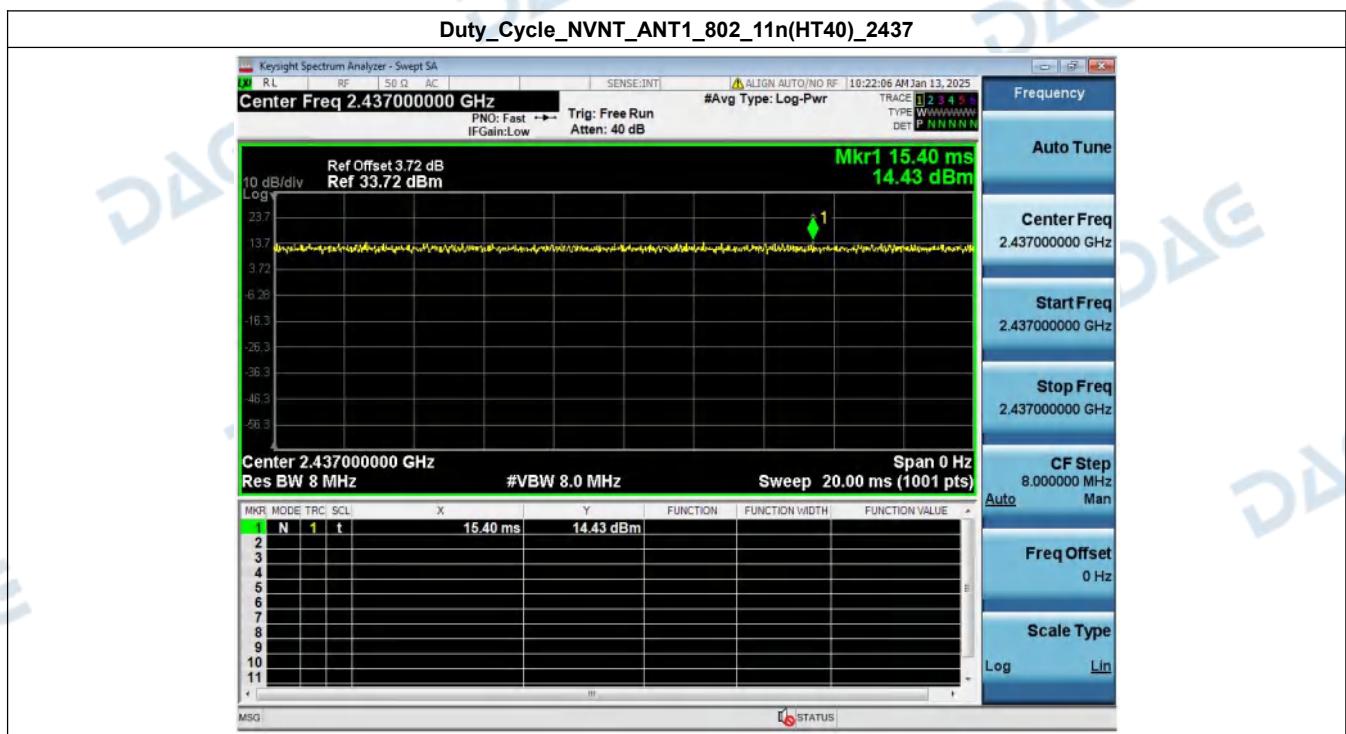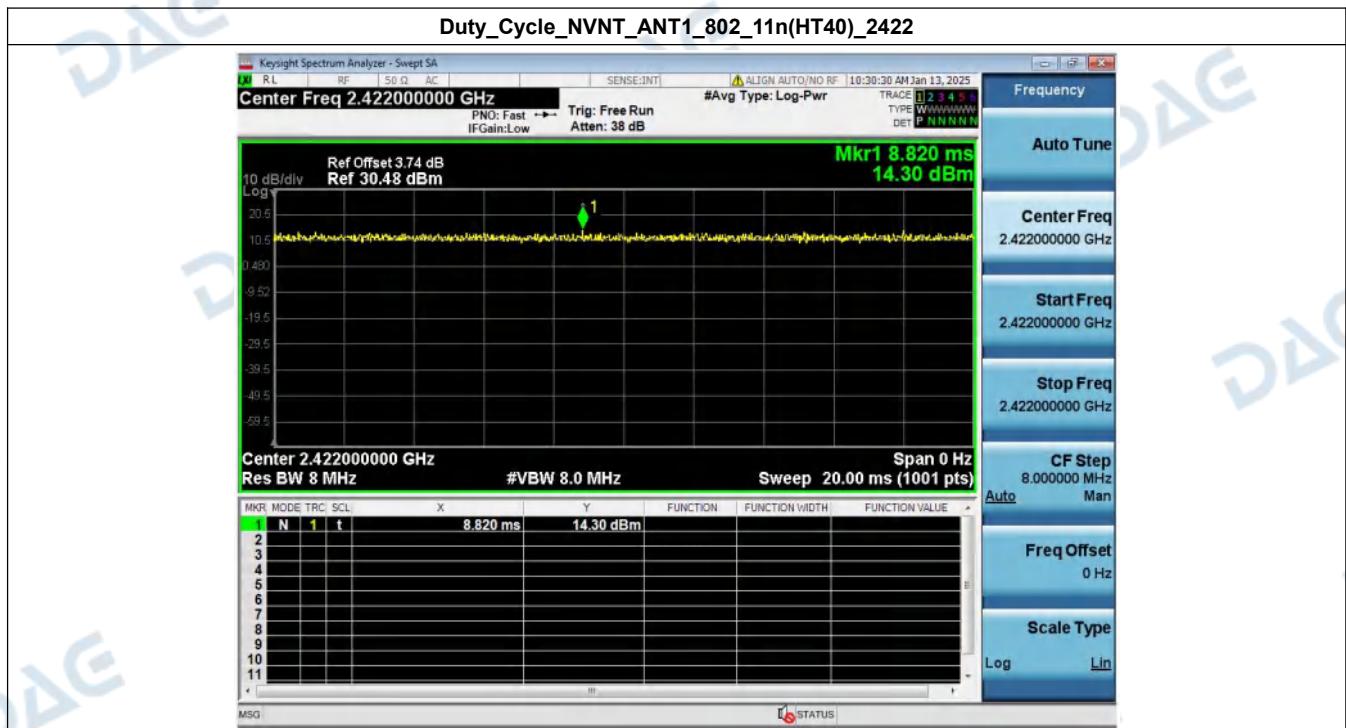

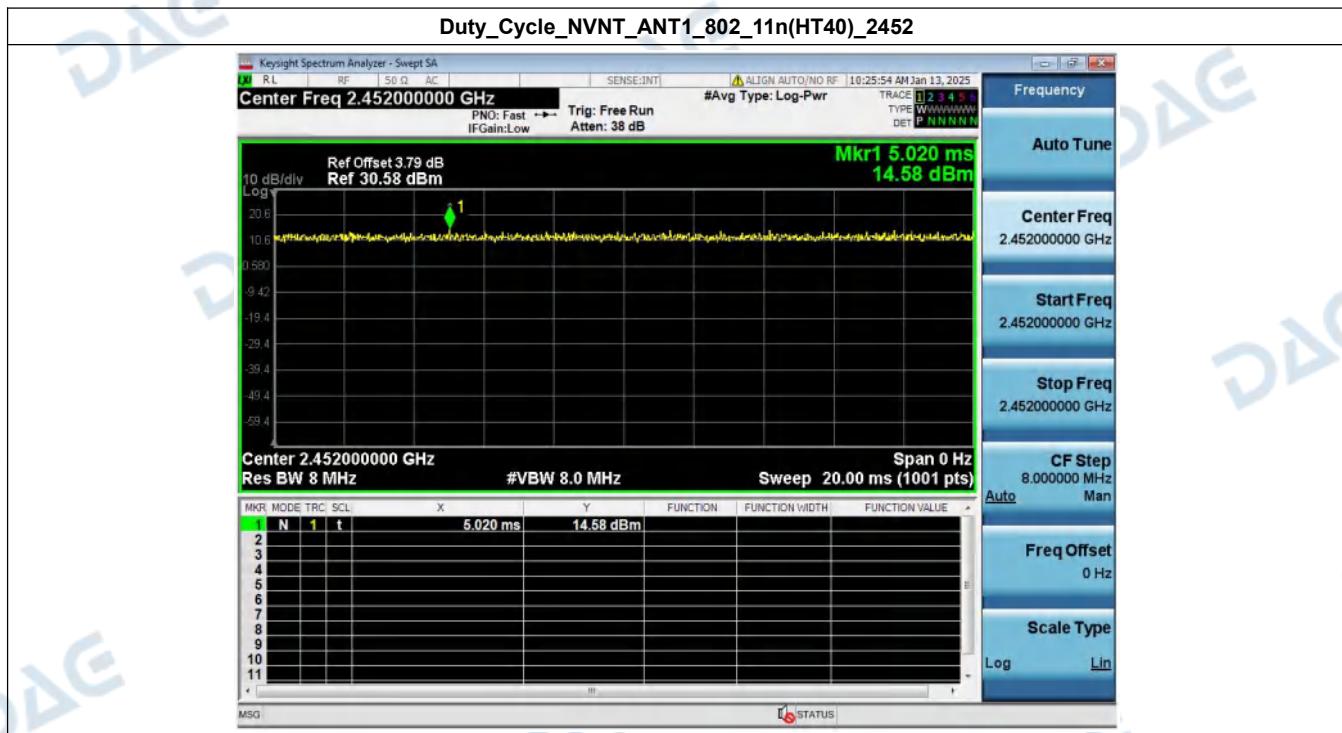


### 3. MAX. Output Power



Condition	Antenna	Modulation	Frequency (MHz)	Detector	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	Peak	17.55	0.00	17.55	30	Pass
NVNT	ANT1	802.11b	2437.00	Peak	17.90	0.00	17.90	30	Pass
NVNT	ANT1	802.11b	2462.00	Peak	19.30	0.00	19.30	30	Pass
NVNT	ANT1	802.11g	2412.00	Peak	17.81	0.00	17.81	30	Pass
NVNT	ANT1	802.11g	2437.00	Peak	17.60	0.00	17.60	30	Pass
NVNT	ANT1	802.11g	2462.00	Peak	18.45	0.00	18.45	30	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	Peak	17.07	0.00	17.07	30	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	Peak	17.01	0.00	17.01	30	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	Peak	17.66	0.00	17.66	30	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	Peak	16.83	0.00	16.83	30	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	Peak	16.80	0.00	16.80	30	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	Peak	17.12	0.00	17.12	30	Pass



#### 4. Power Spectral Density



Condition	Antenna	Modulation	Frequency (MHz)	SA_PSD (dBm/30kHz)	Duty factor(dB)	RB factor(dB)	PSD(dBm/3kHz)	limit(dBm/3kHz)	Result
NVNT	ANT1	802.11b	2412.00	-3.42	0.00	-10.00	-13.42	8	Pass
NVNT	ANT1	802.11b	2437.00	-3.85	0.00	-10.00	-13.85	8	Pass
NVNT	ANT1	802.11b	2462.00	-2.27	0.00	-10.00	-12.27	8	Pass
NVNT	ANT1	802.11g	2412.00	-6.23	0.00	-10.00	-16.23	8	Pass
NVNT	ANT1	802.11g	2437.00	-6.33	0.00	-10.00	-16.32	8	Pass
NVNT	ANT1	802.11g	2462.00	-5.48	0.00	-10.00	-15.48	8	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	-6.42	0.00	-10.00	-16.42	8	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	-6.58	0.00	-10.00	-16.58	8	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	-6.09	0.00	-10.00	-16.09	8	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	-8.65	0.00	-10.00	-18.65	8	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	-9.18	0.00	-10.00	-19.18	8	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	-7.73	0.00	-10.00	-17.73	8	Pass


PSD(dBm/3kHz)=SA\_PSD(dBm/30kHz) +Duty factor+RB factor; RB factor=10\*log(3/30)=-10dB


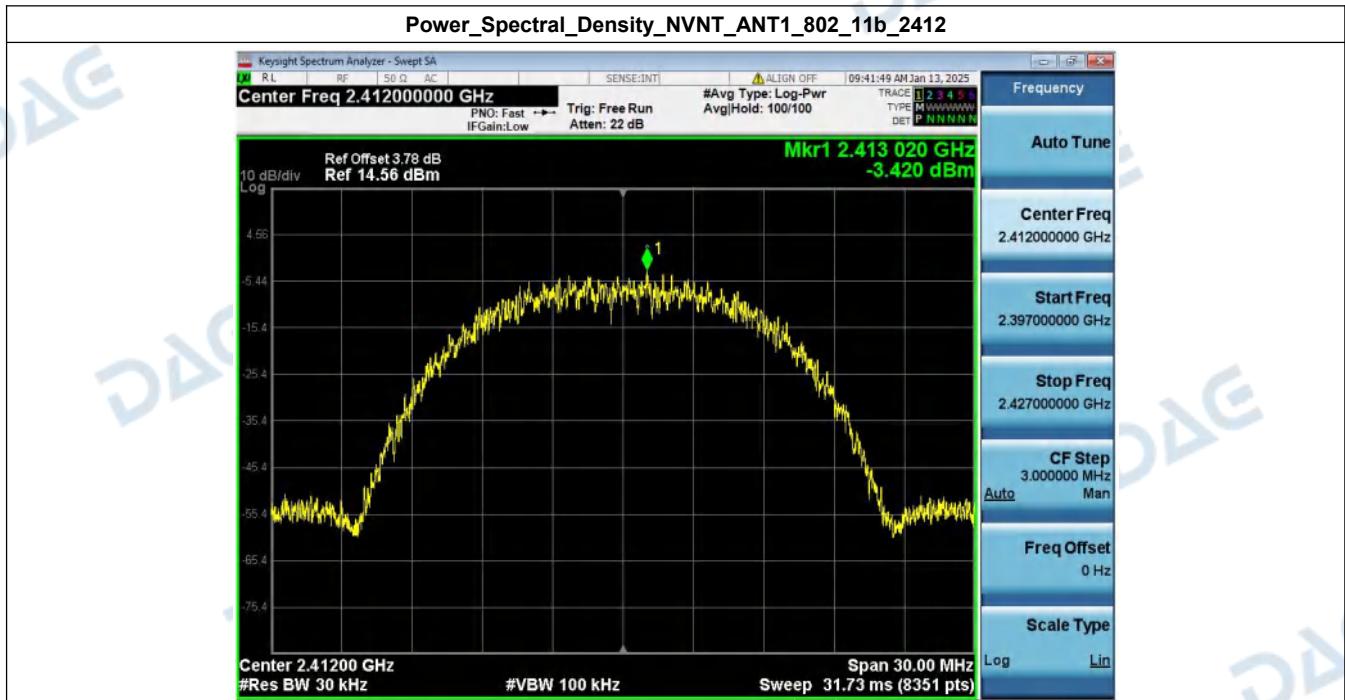


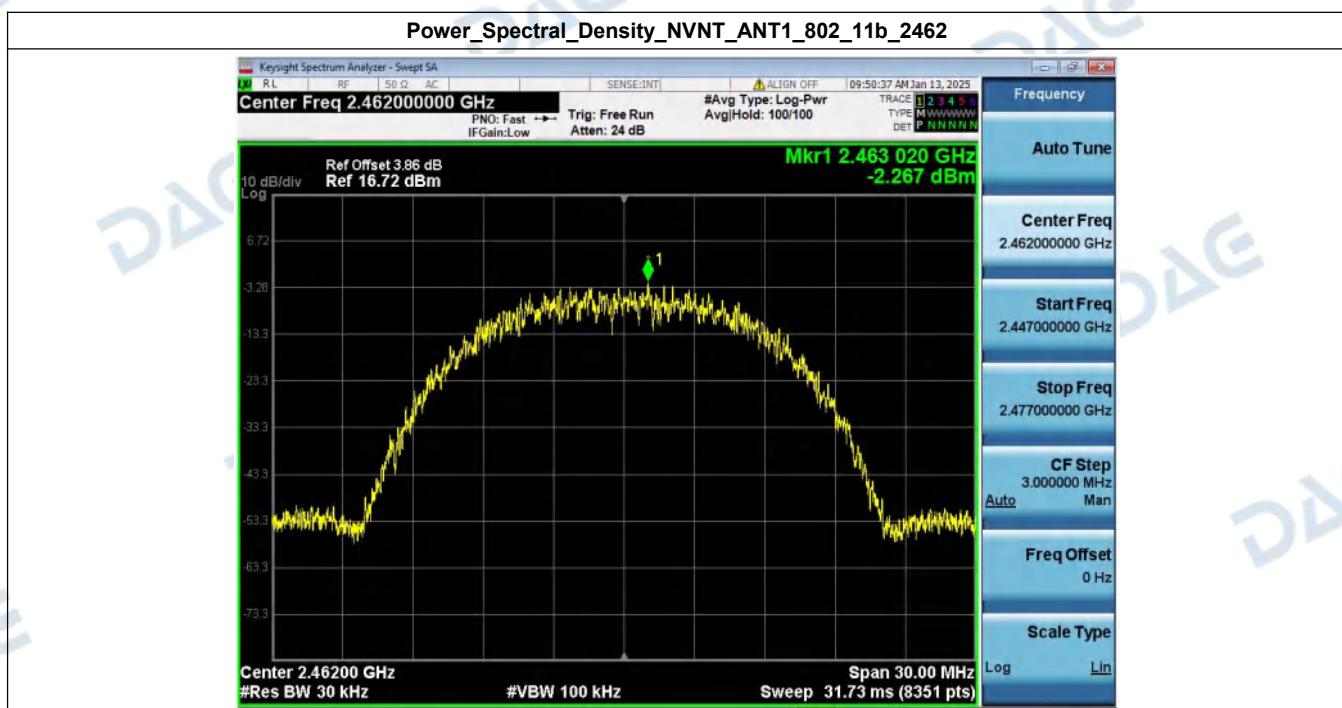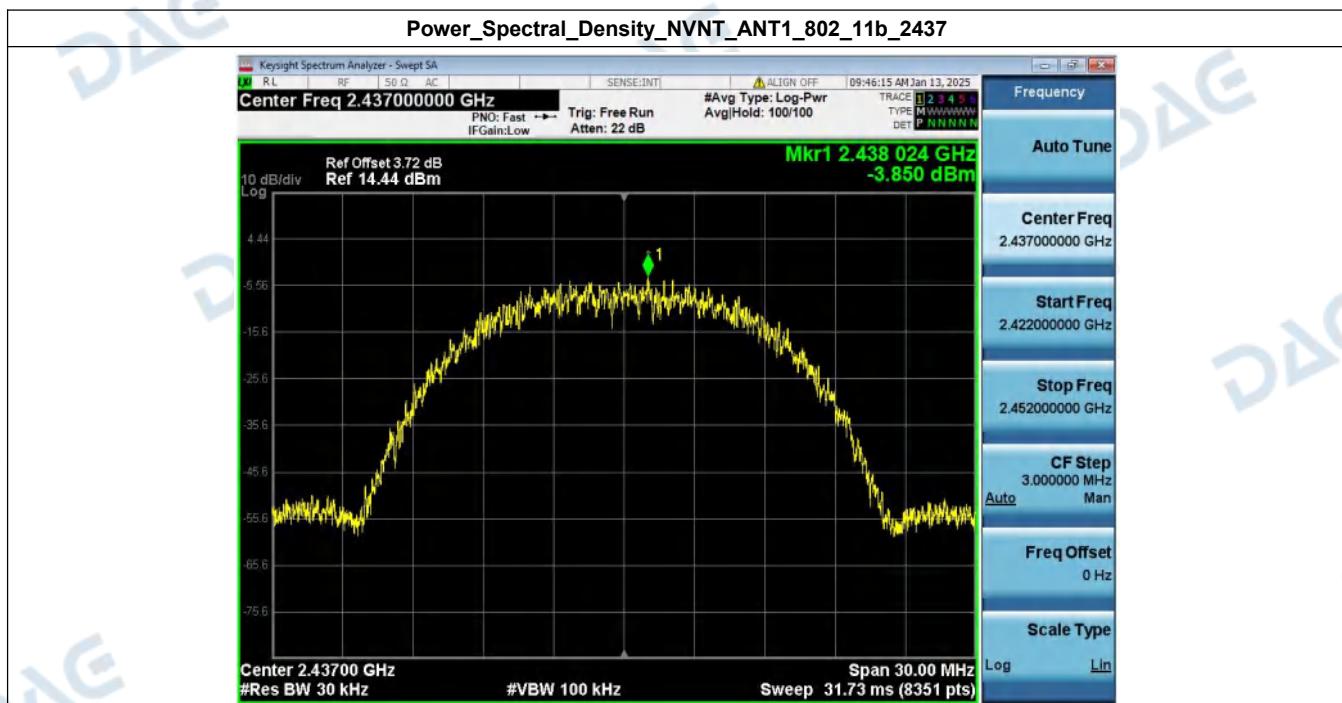


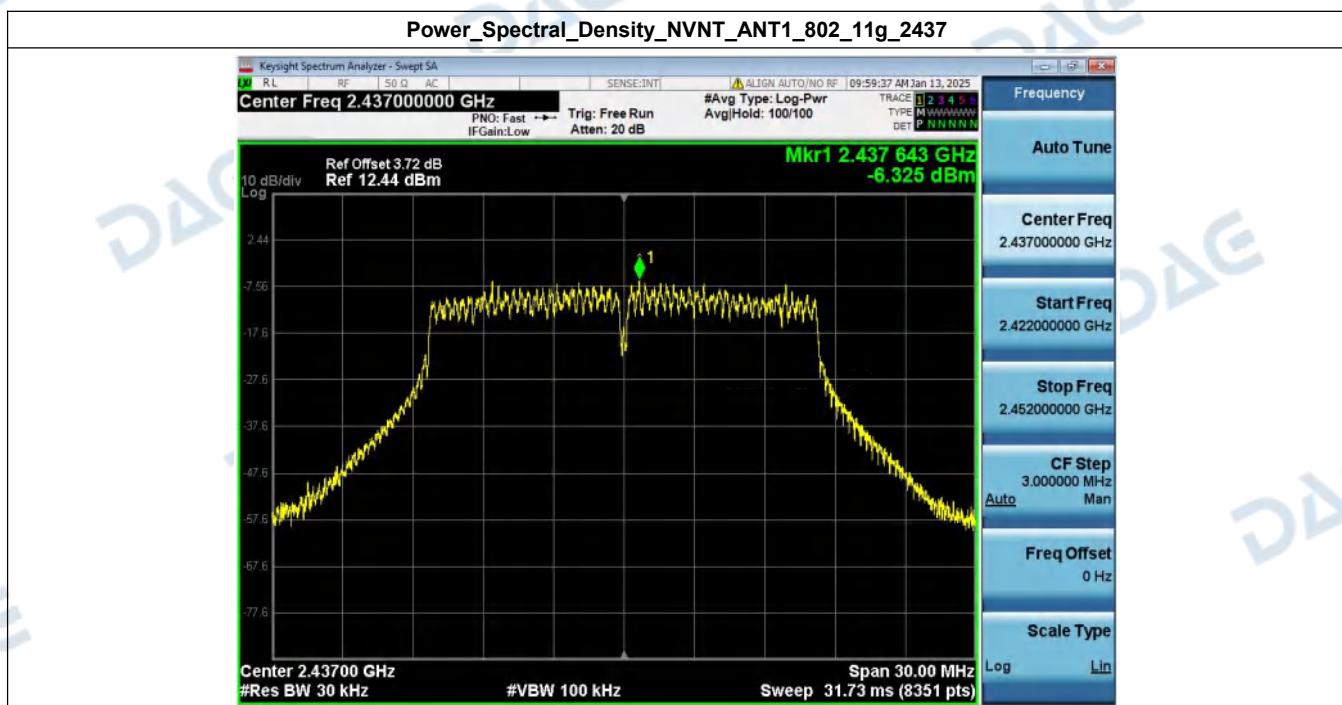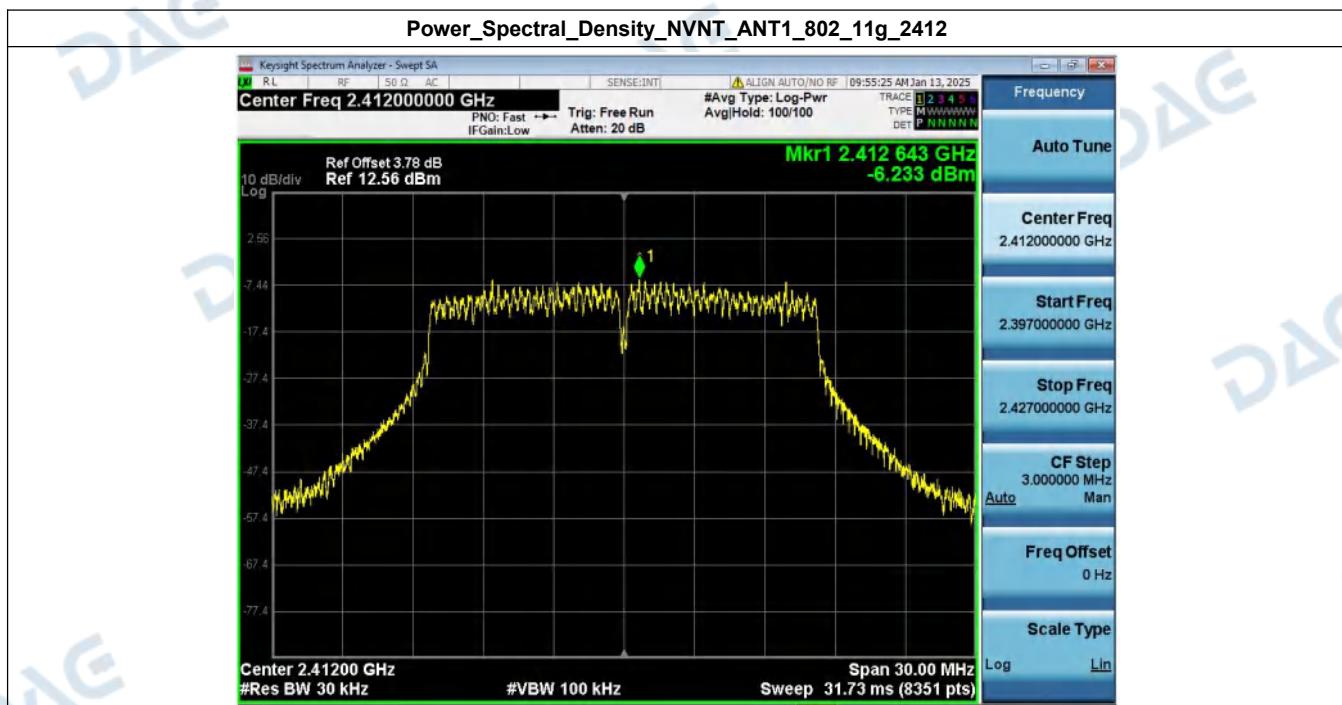

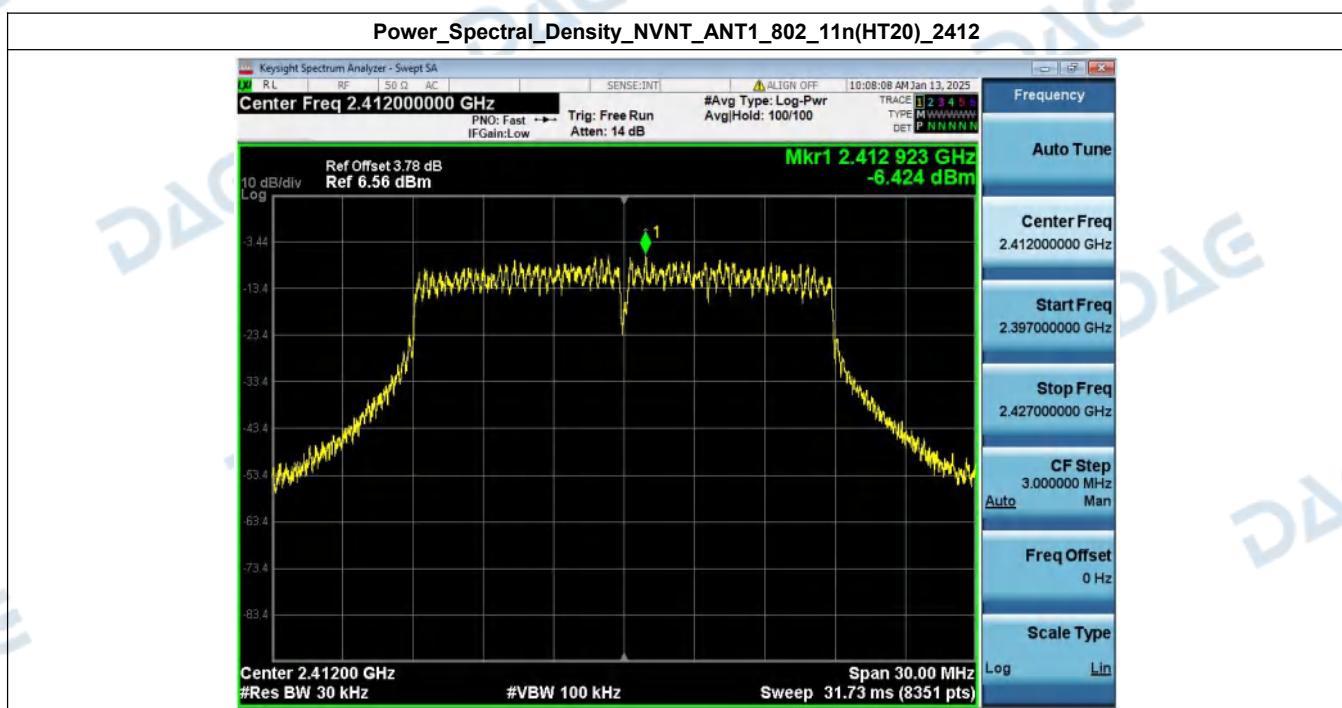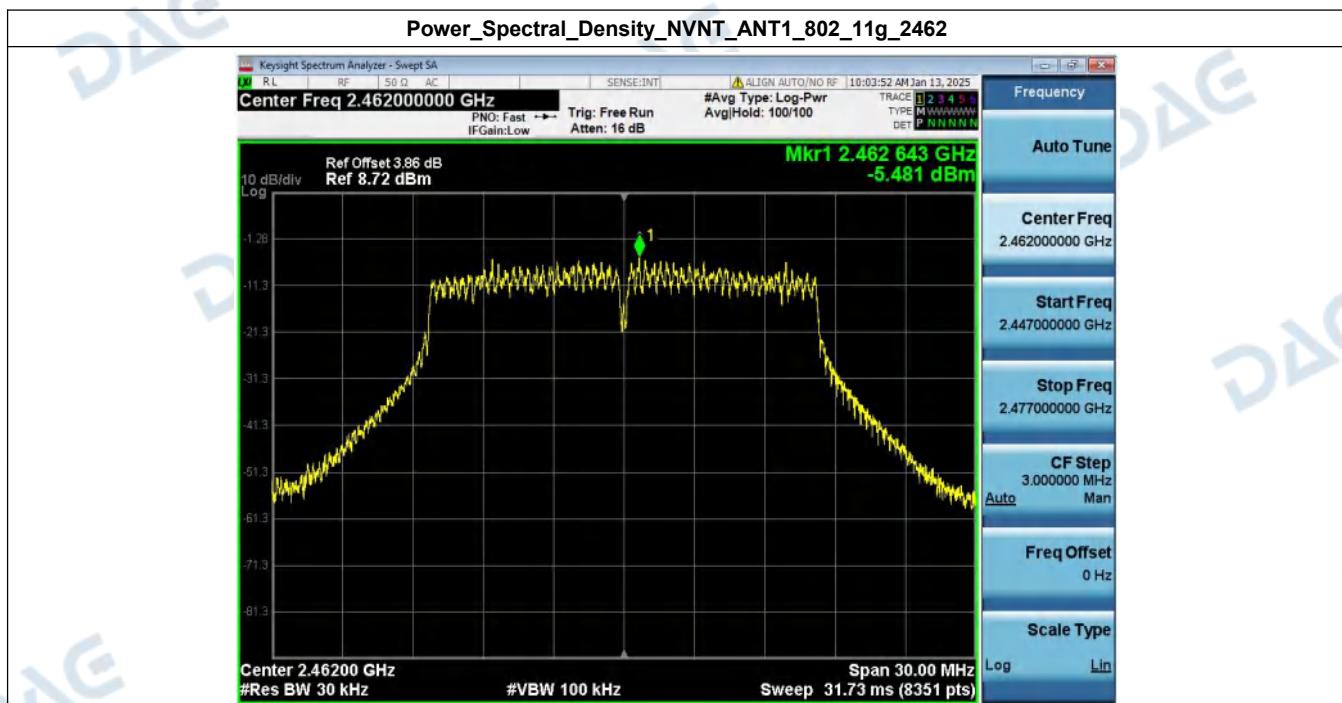

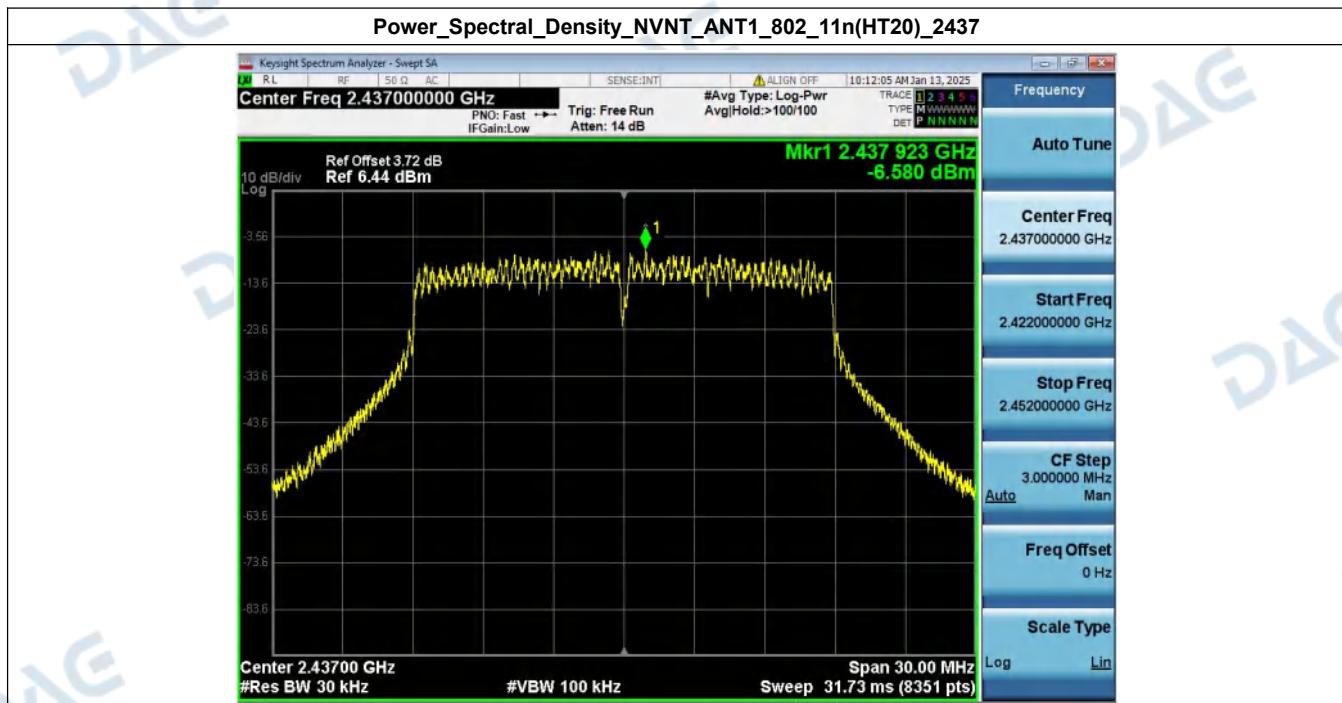


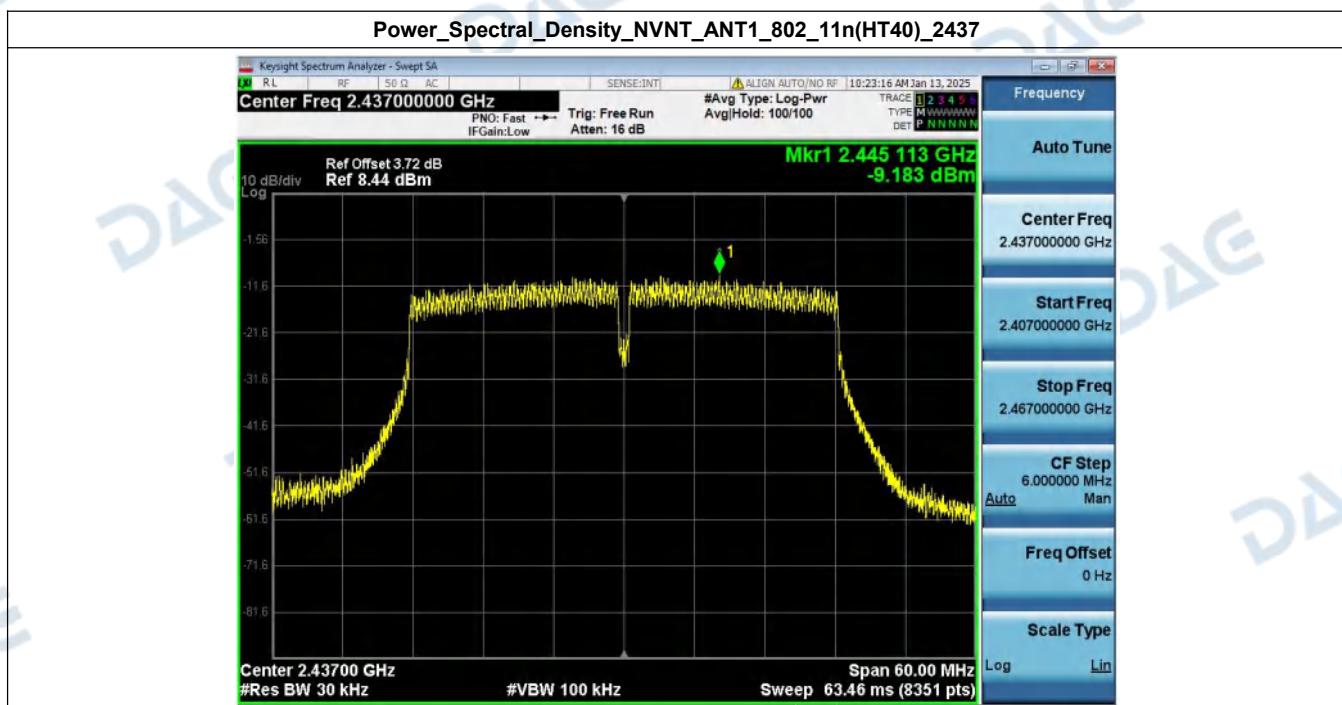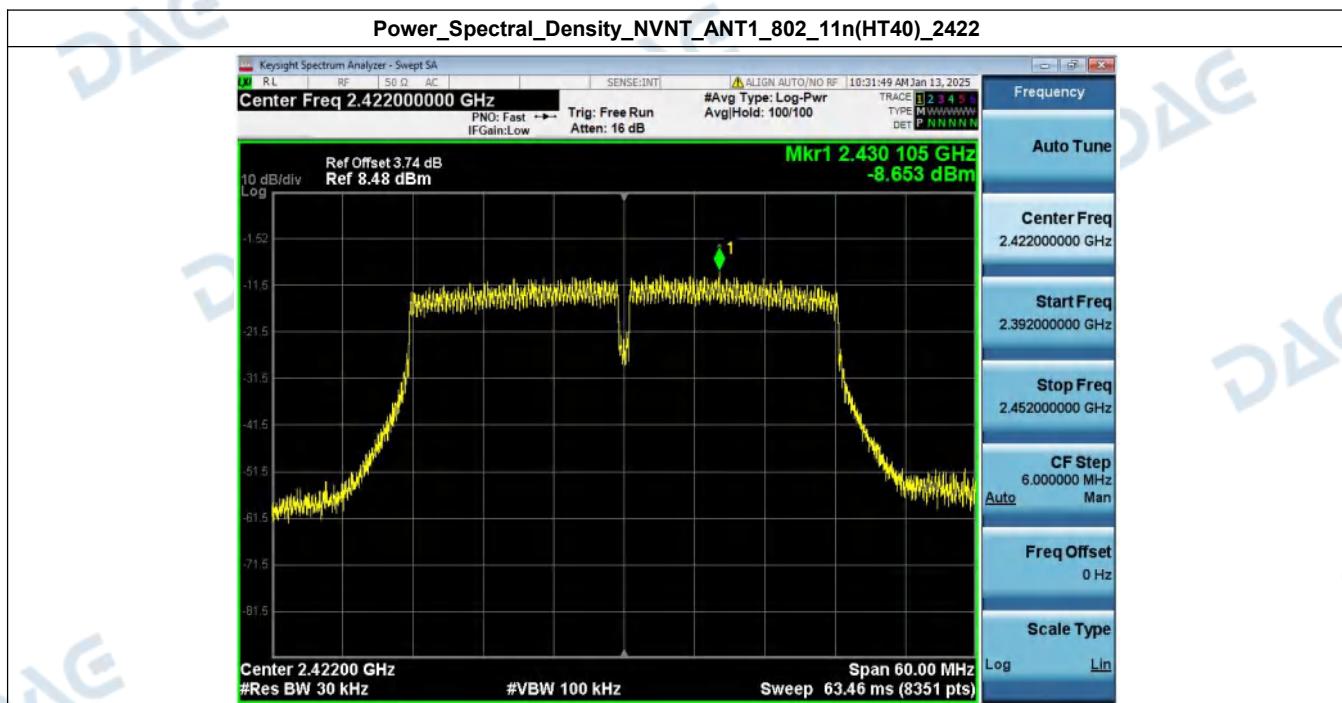


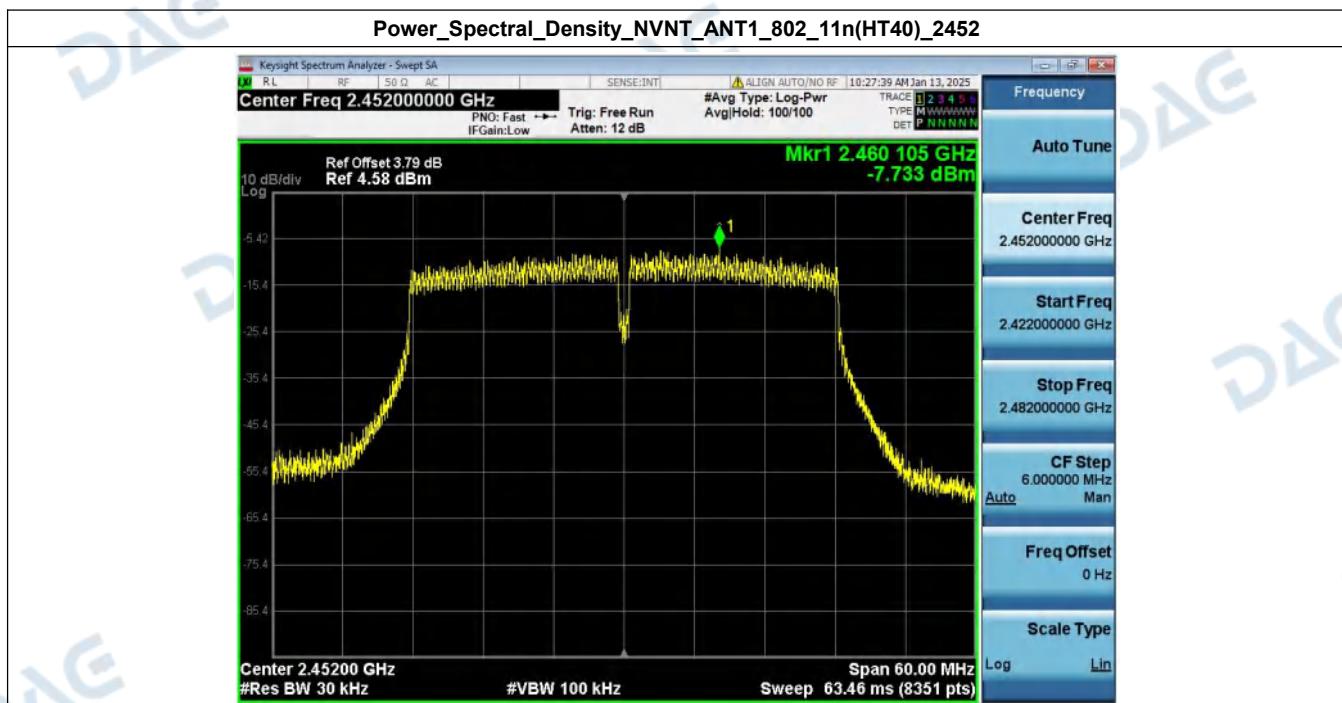


## 5. Bandedge

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_freq(MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412	2398.928	1.061	-46.669	-28.939	Pass
NVNT	ANT1	802.11b	2462	2486.176	2.105	-55.662	-27.895	Pass
NVNT	ANT1	802.11g	2412	2399.936	-2.87	-41.215	-32.87	Pass
NVNT	ANT1	802.11g	2462	2484.208	-1.766	-54.313	-31.766	Pass
NVNT	ANT1	802.11n(HT20)	2412	2399.936	-3.481	-39.765	-33.481	Pass
NVNT	ANT1	802.11n(HT20)	2462	2484.352	-2.561	-53.465	-32.561	Pass
NVNT	ANT1	802.11n(HT40)	2422	2399.892	-7.661	-43.697	-37.661	Pass
NVNT	ANT1	802.11n(HT40)	2452	2484.156	-6.951	-53.498	-36.951	Pass

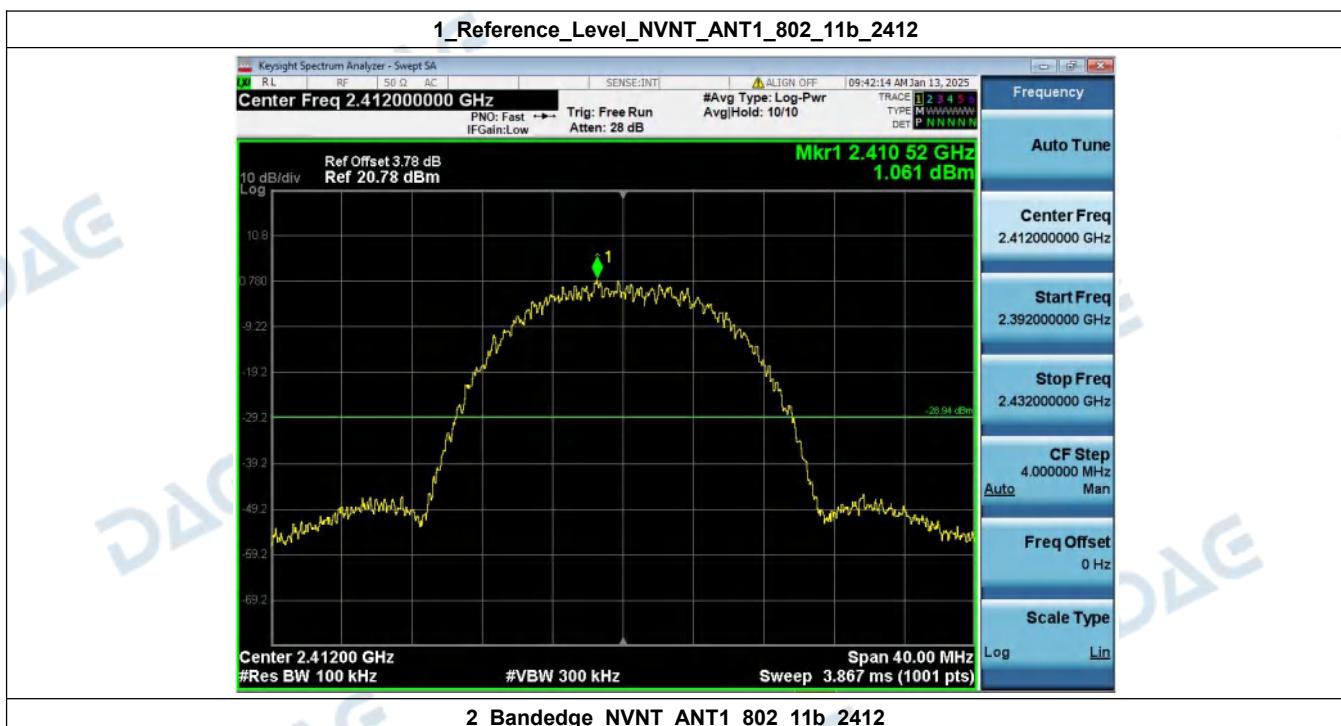

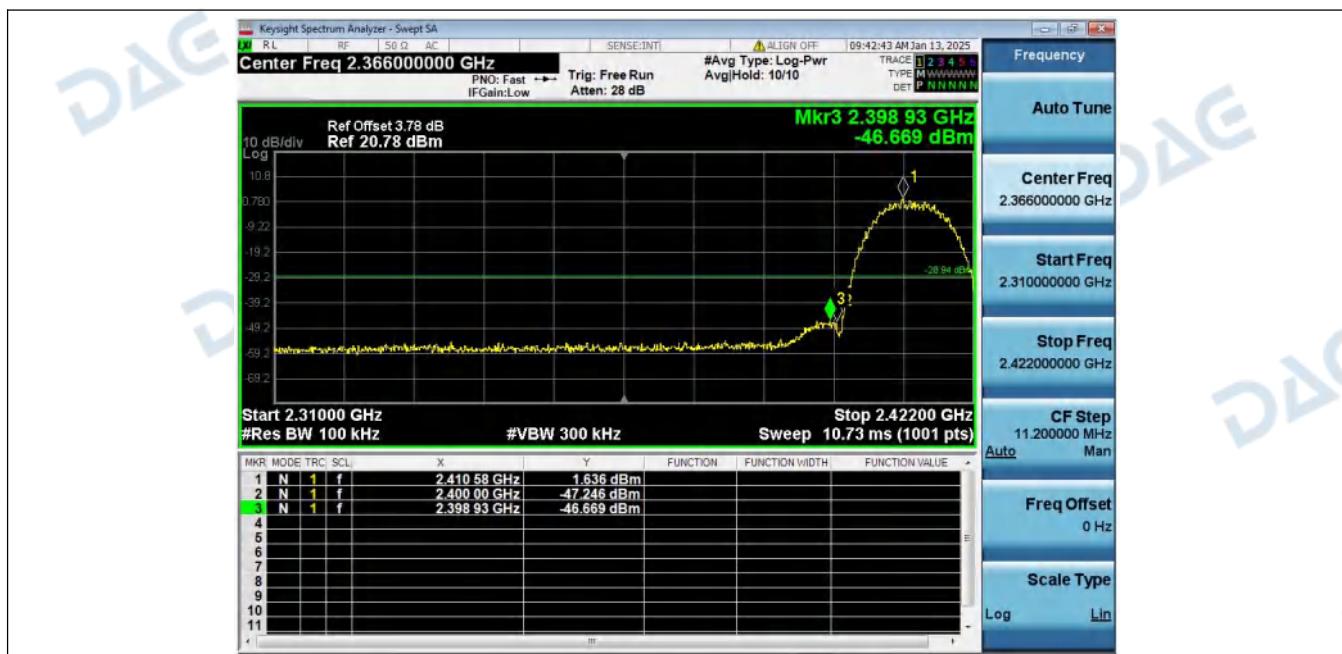

## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11b\_2462

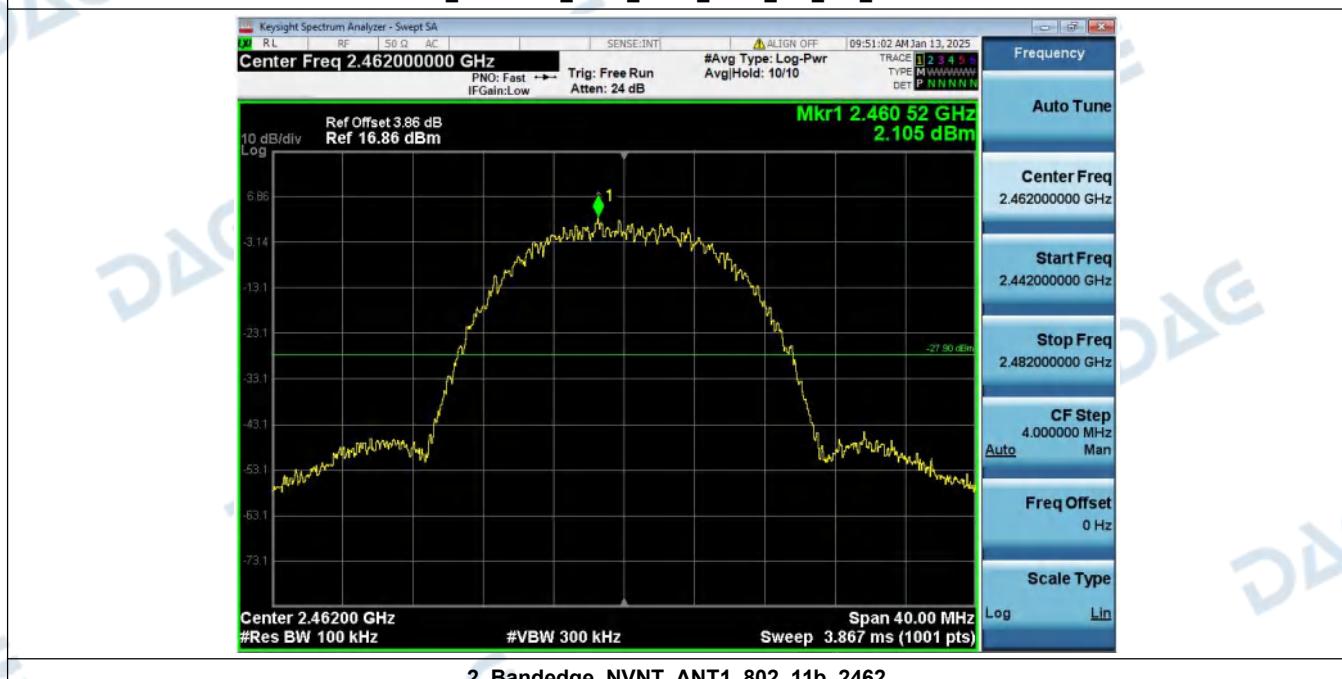

## 2\_Bandedge\_NVNT\_ANT1\_802\_11b\_2462




## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11g\_2412




## 2\_Bandedge\_NVNT\_ANT1\_802\_11g\_2412





## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11g\_2462

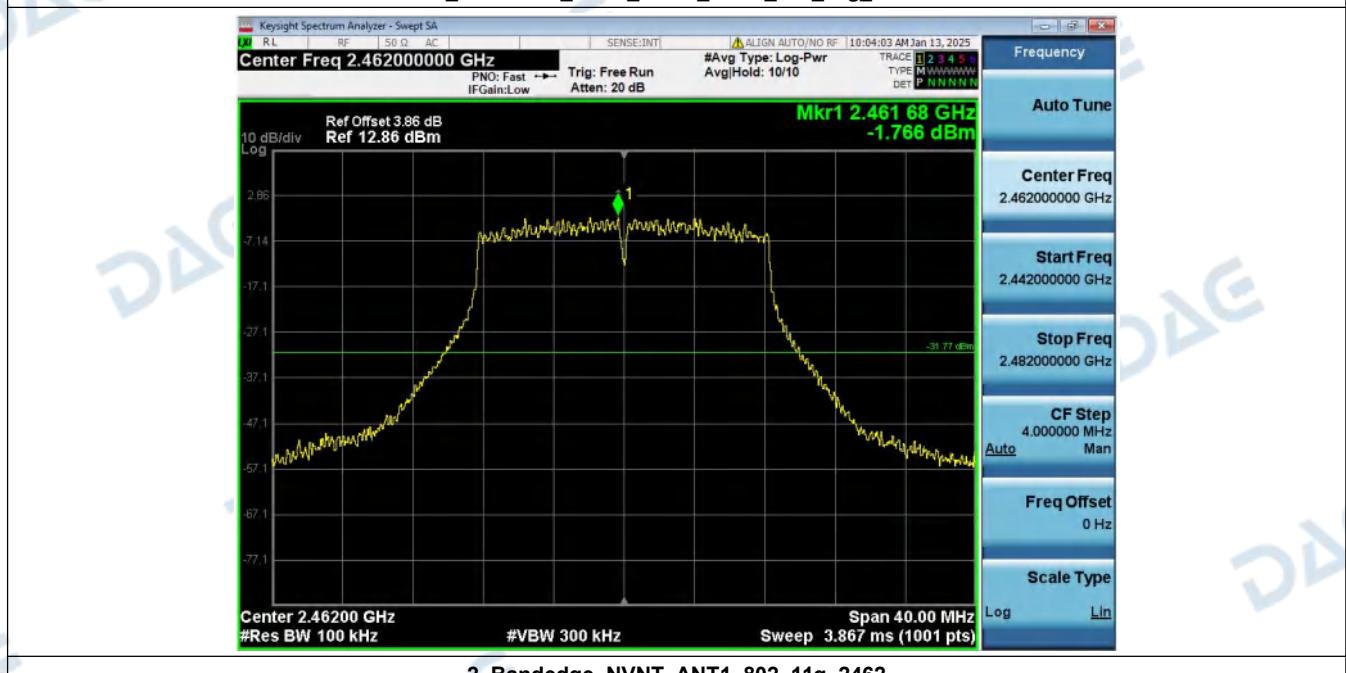


## 2\_Bandedge\_NVNT\_ANT1\_802\_11g\_2462

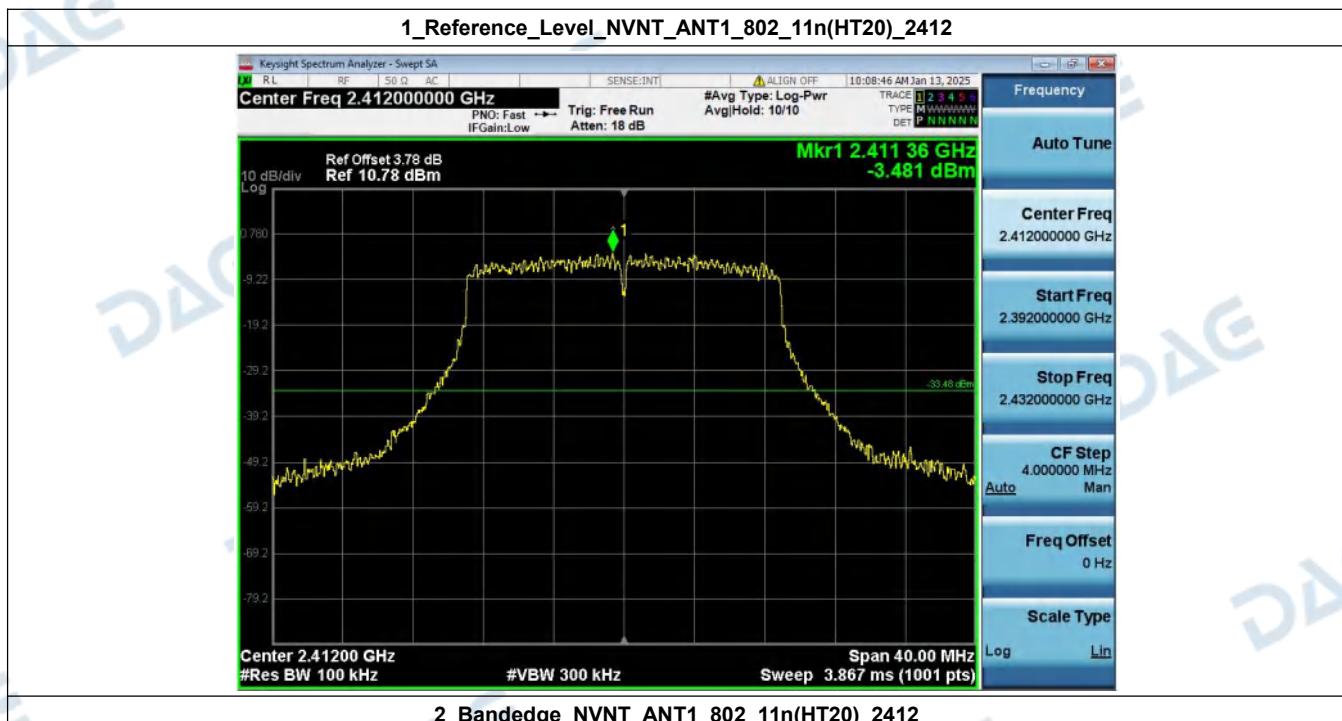


## 2\_Bandedge\_NVNT\_ANT1\_802\_11n(HT20)\_2412

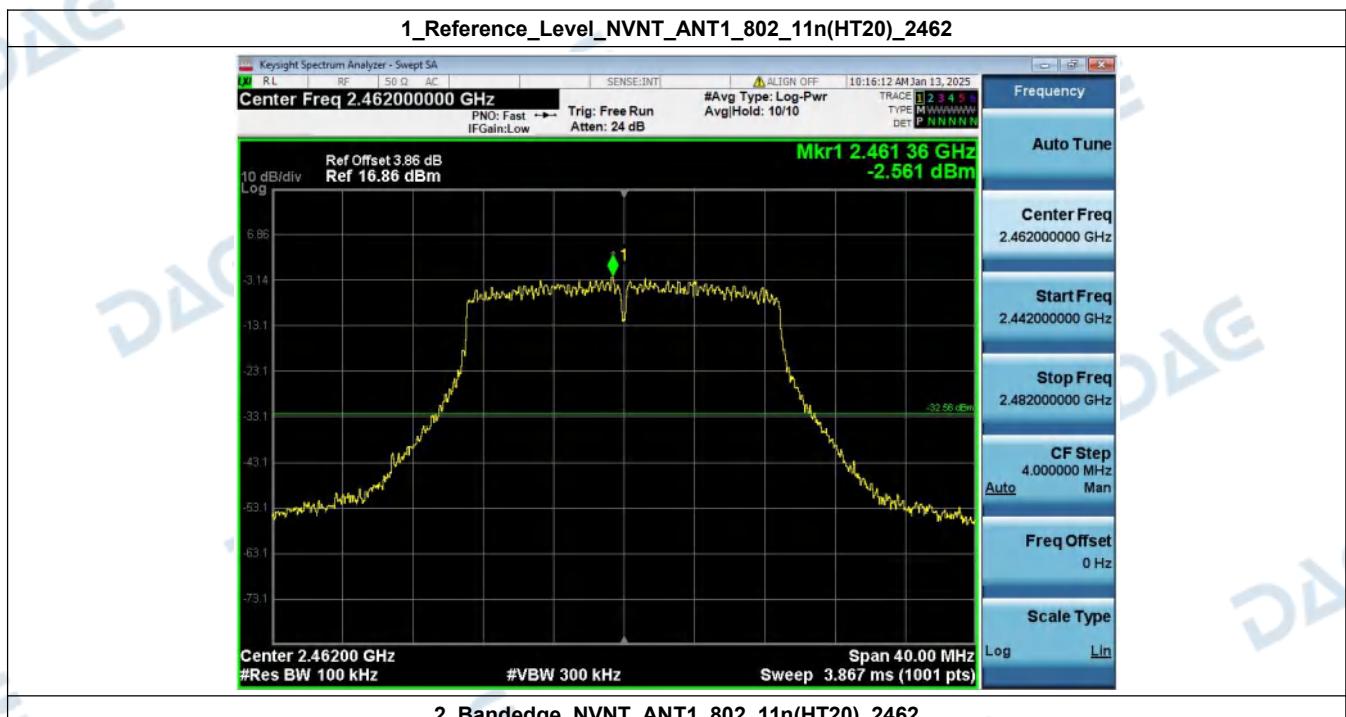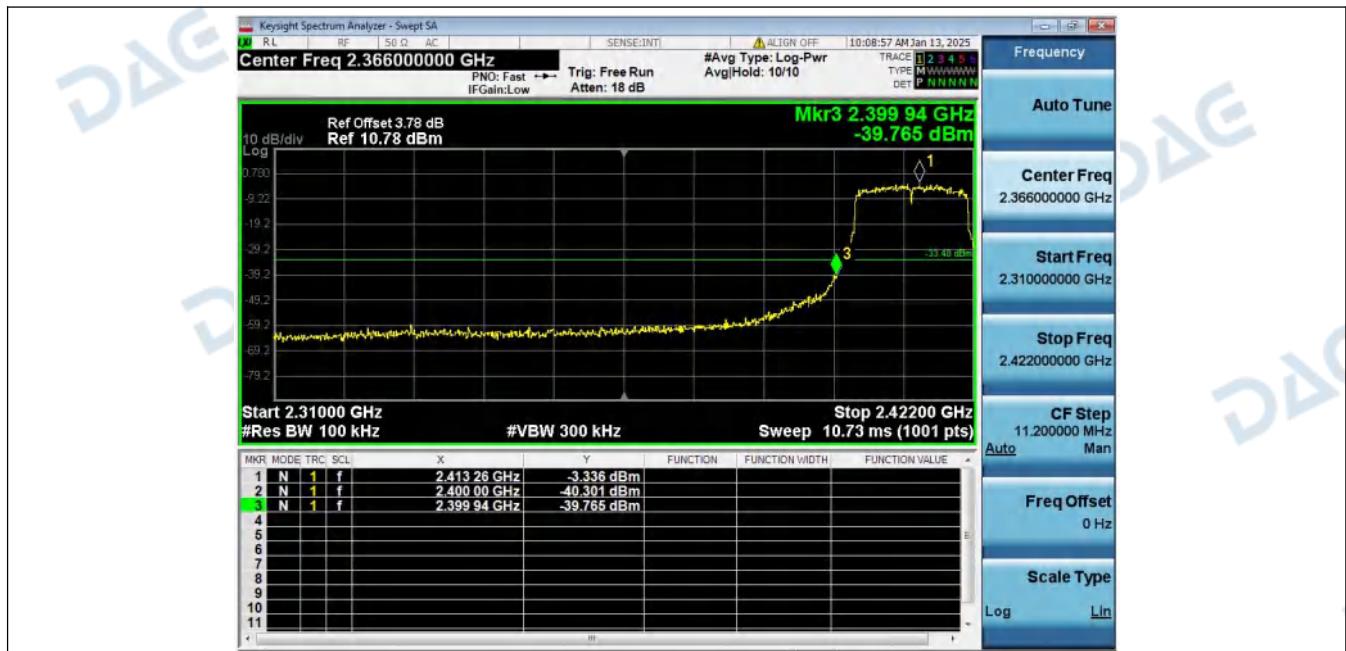

## 2\_Bandedge\_NVNT\_ANT1\_802\_11n(HT20)\_2462

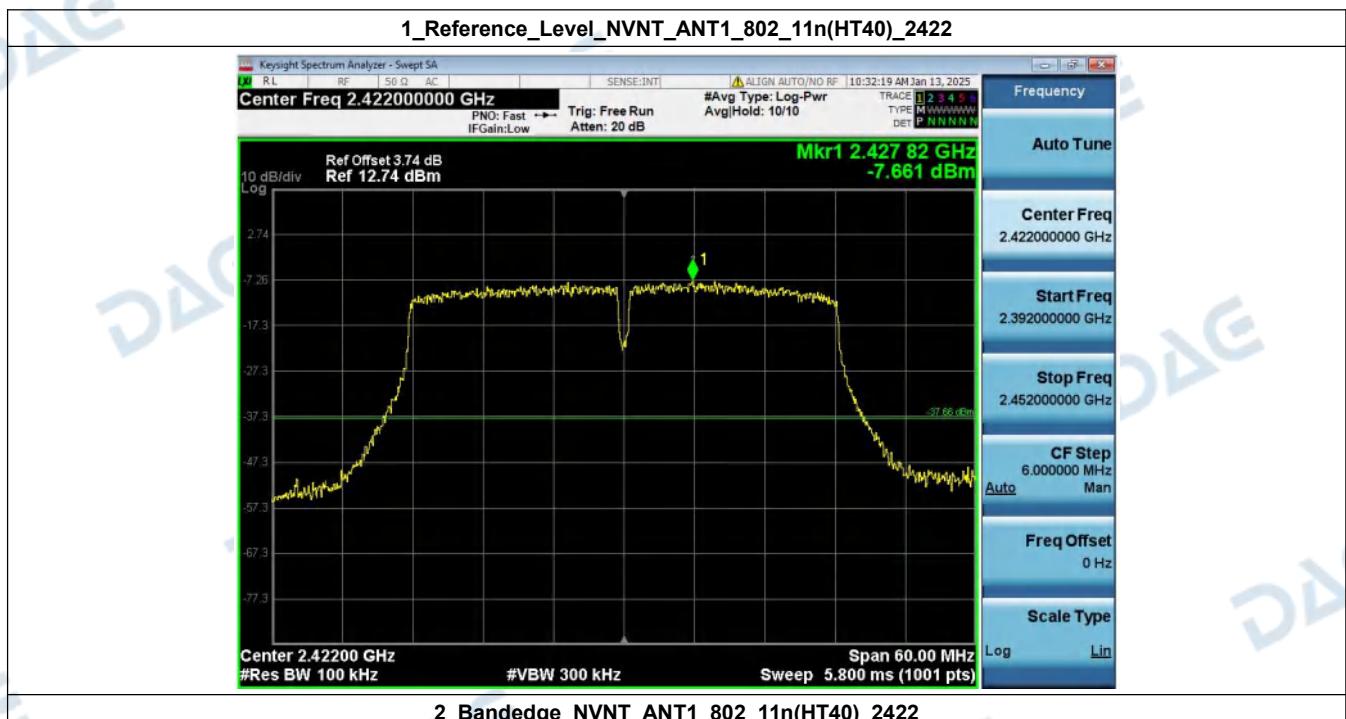

## 2\_Bandedge\_NVNT\_ANT1\_802\_11n(HT40)\_2422

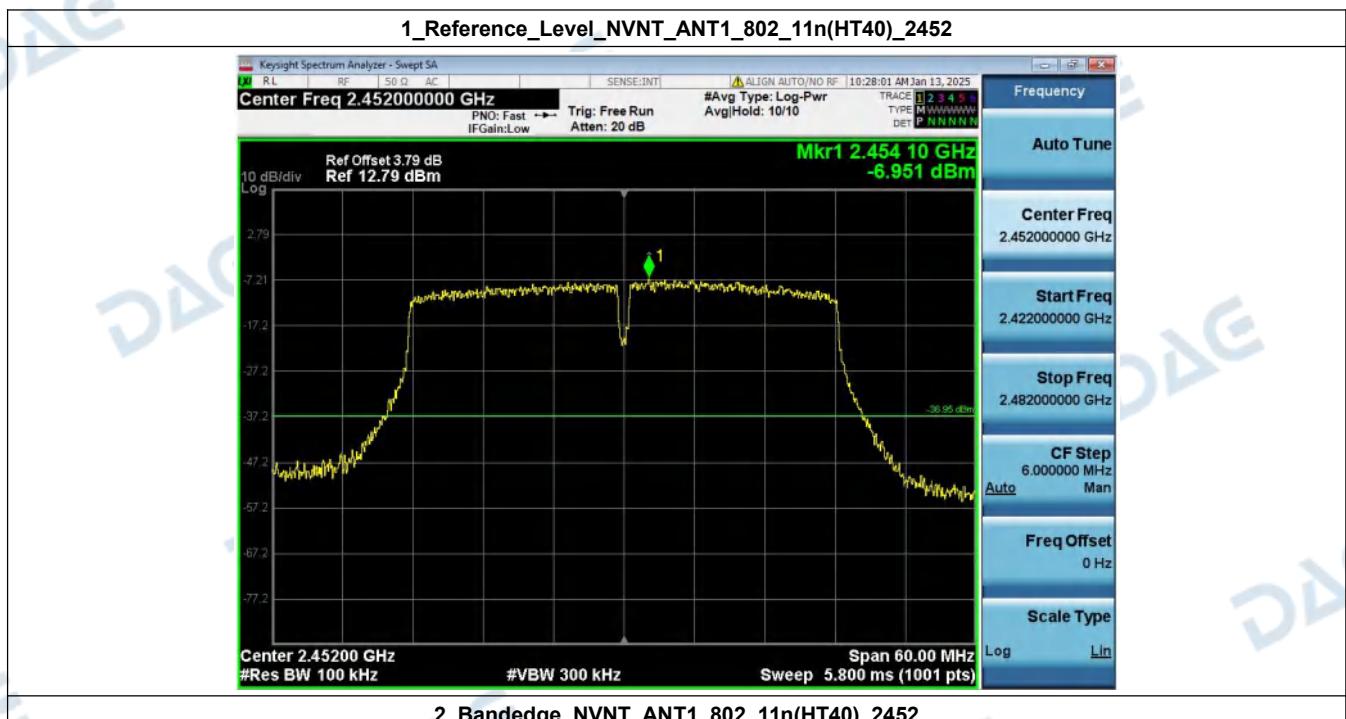


## 2\_Bandedge\_NVNT\_ANT1\_802\_11n(HT40)\_2452




## 6. Spurious Emission

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_freq(MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412	24995.006	1.061	-41.621	-28.939	Pass
NVNT	ANT1	802.11b	2437	24992.509	1.339	-41.439	-28.661	Pass
NVNT	ANT1	802.11b	2462	24478.127	2.105	-45.562	-27.895	Pass
NVNT	ANT1	802.11g	2412	24965.042	-2.87	-46.051	-32.87	Pass
NVNT	ANT1	802.11g	2437	24985.018	-3.347	-45.306	-33.347	Pass
NVNT	ANT1	802.11g	2462	24438.175	-1.766	-49.632	-31.766	Pass
NVNT	ANT1	802.11n(HT20)	2412	24995.006	-3.481	-51.041	-33.481	Pass
NVNT	ANT1	802.11n(HT20)	2437	24982.521	-4.055	-50.383	-34.055	Pass
NVNT	ANT1	802.11n(HT20)	2462	24498.103	-2.561	-45.131	-32.561	Pass
NVNT	ANT1	802.11n(HT40)	2422	24513.085	-7.661	-49.368	-37.661	Pass
NVNT	ANT1	802.11n(HT40)	2437	24555.534	-7.255	-54.267	-37.255	Pass
NVNT	ANT1	802.11n(HT40)	2452	24450.66	-6.951	-48.871	-36.951	Pass


1\_Reference\_Level\_NVNT\_ANT1\_802\_11b\_2412

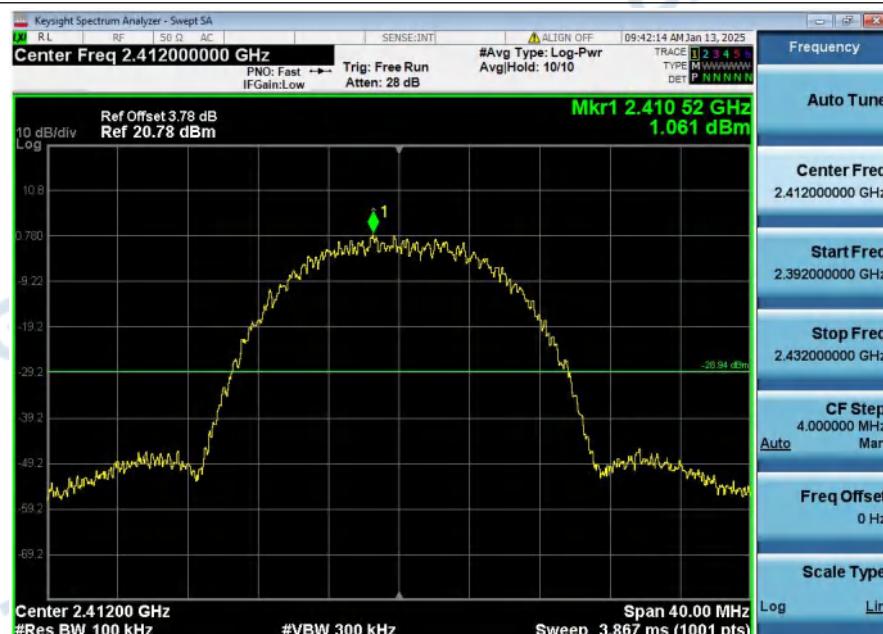


2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11b\_2412

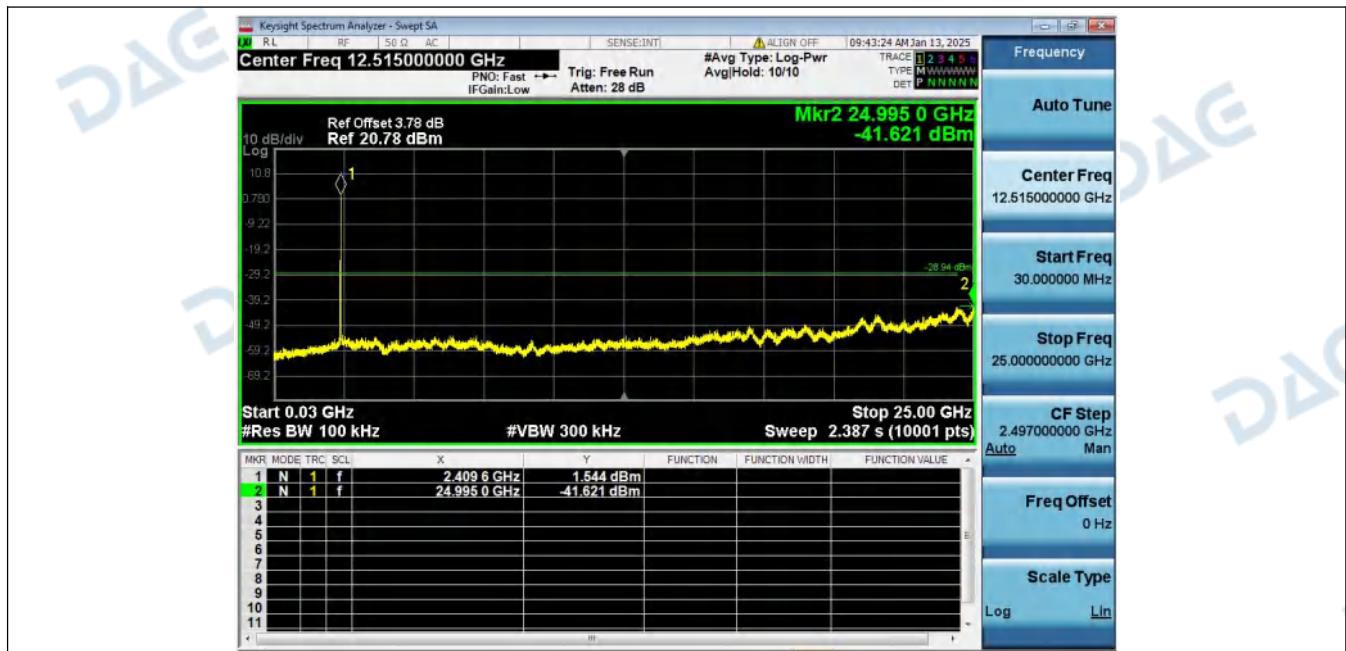


## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11b\_2437

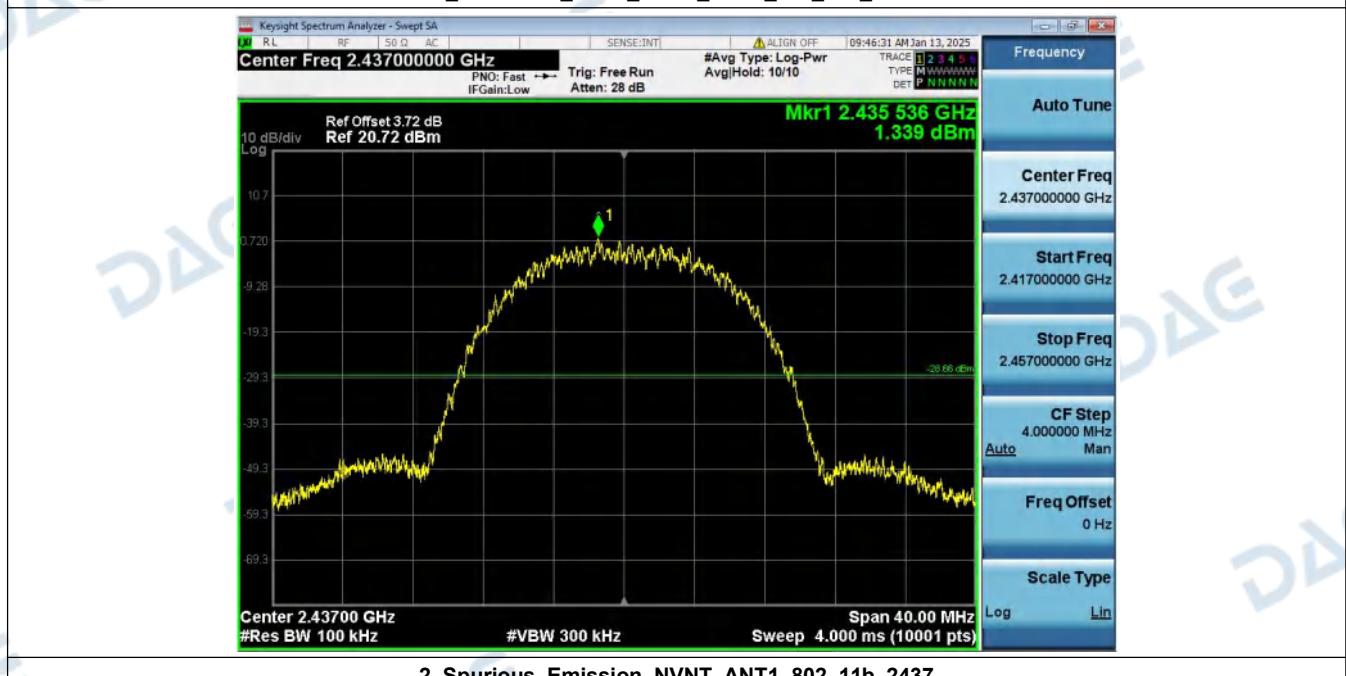

## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11b\_2437

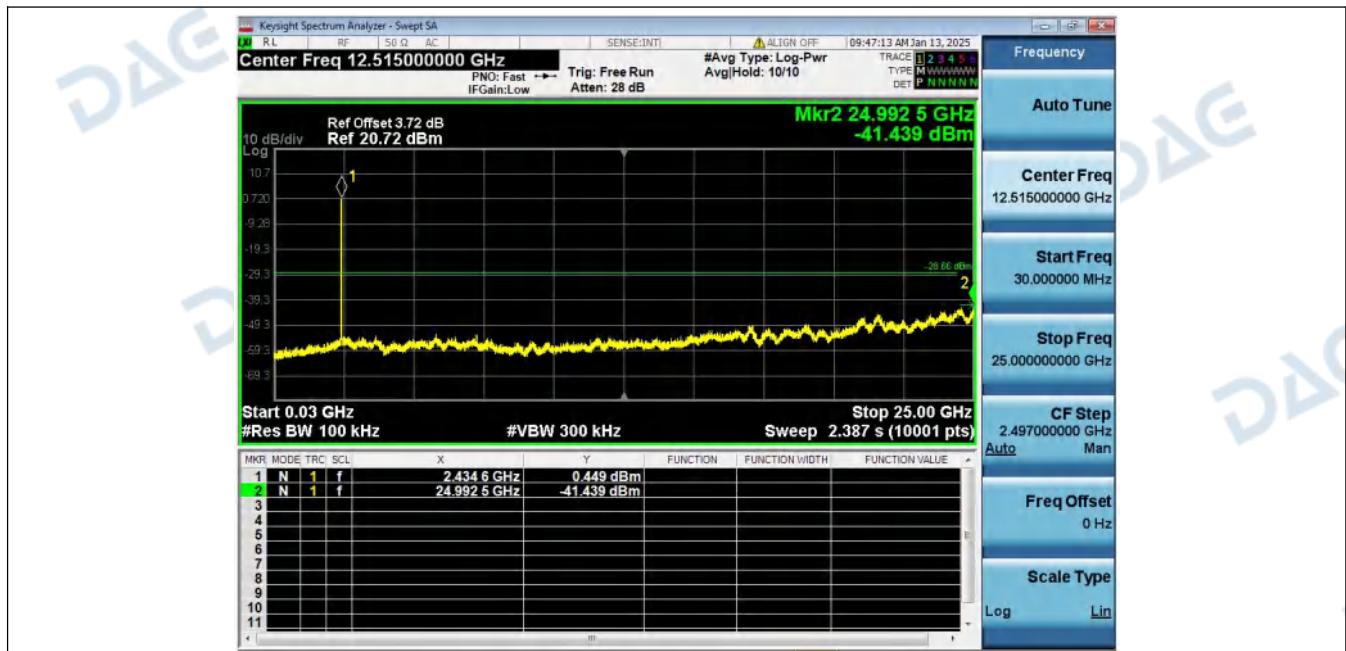

### 1\_Reference\_Level\_NVNT\_ANT1\_802\_11b\_2462

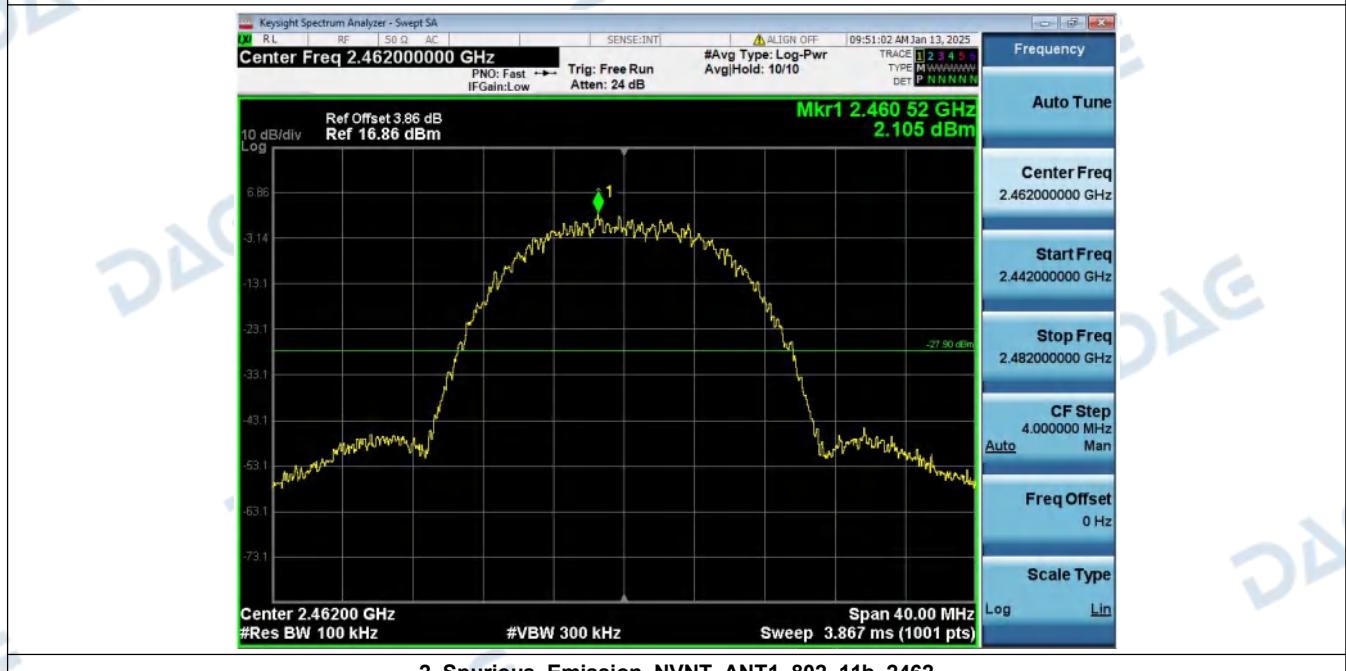

### 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11b\_2462




## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11g\_2412




## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11g\_2412




### 1\_Reference\_Level\_NVNT\_ANT1\_802\_11g\_2437

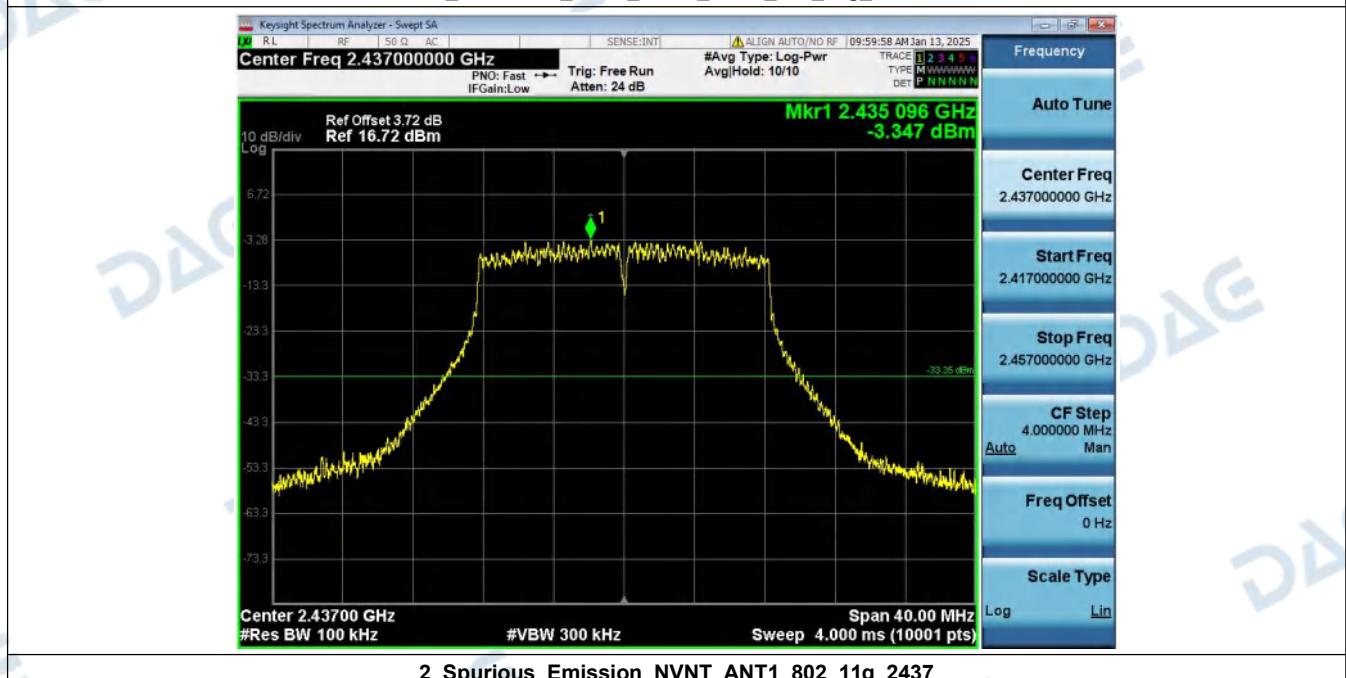



### 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11g\_2437

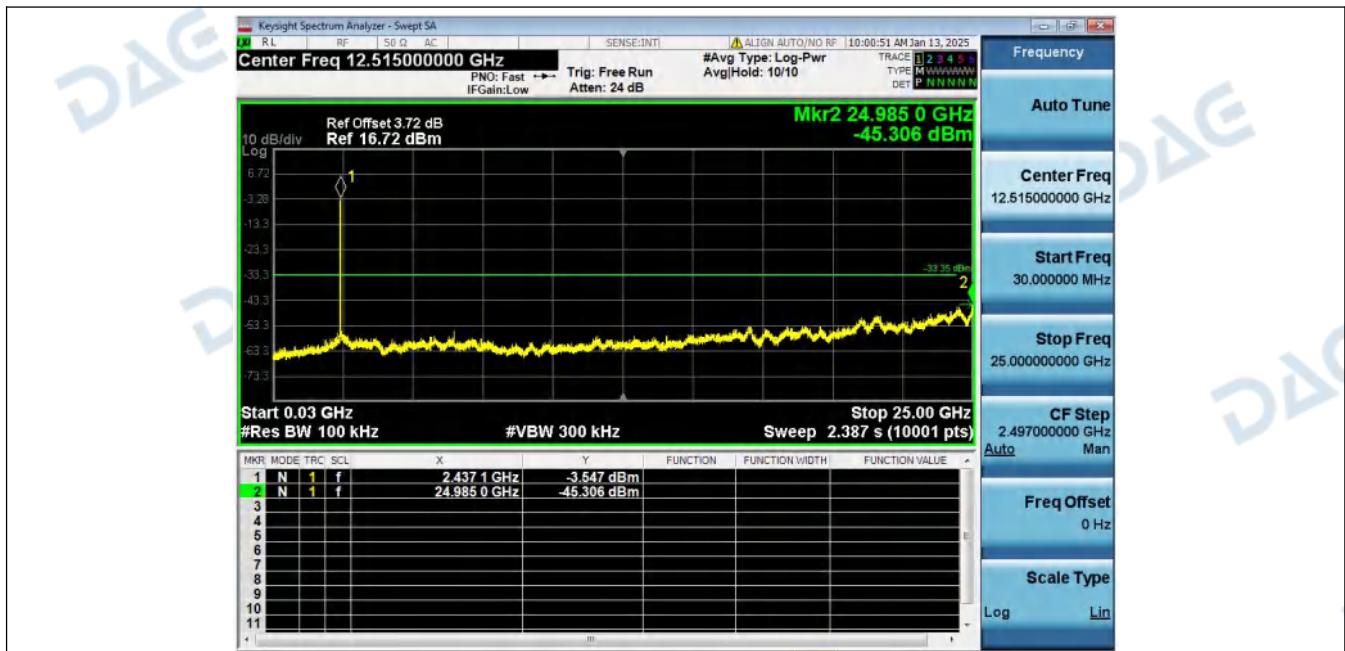


## 1\_Reference\_Level\_NVNT\_ANT1\_802\_11g\_2462


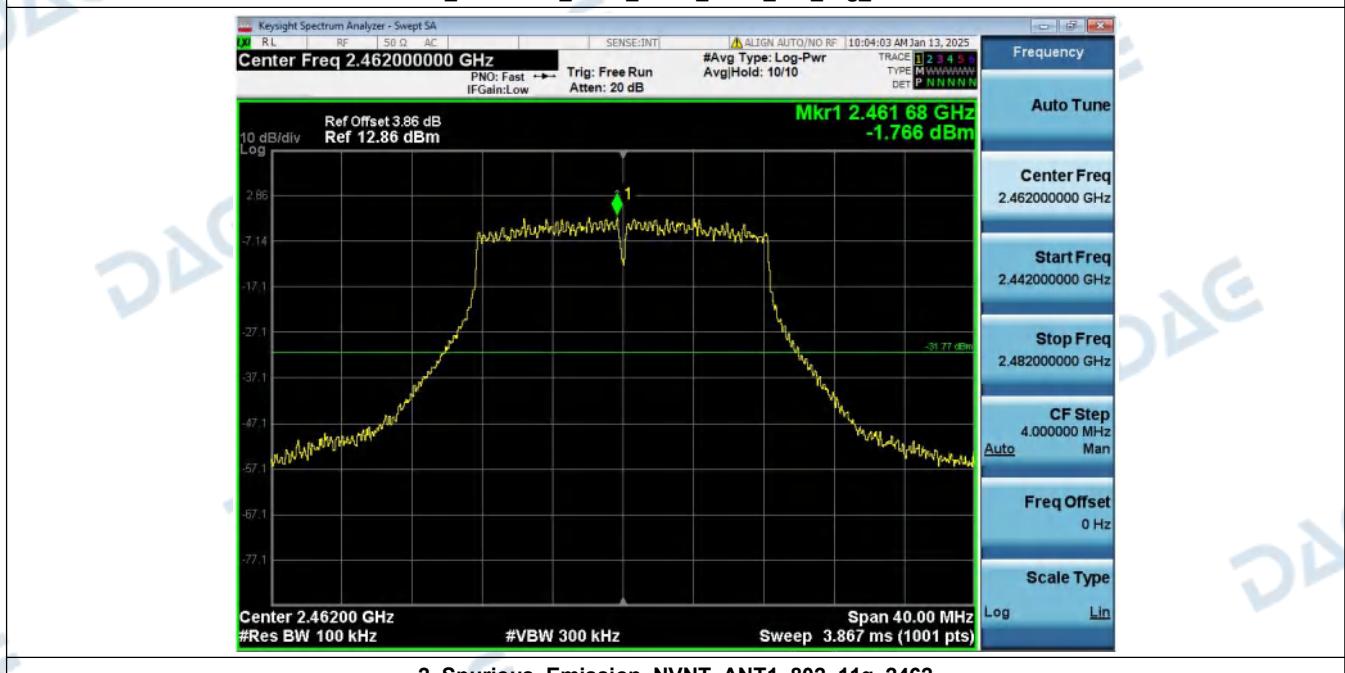


## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11g\_2462

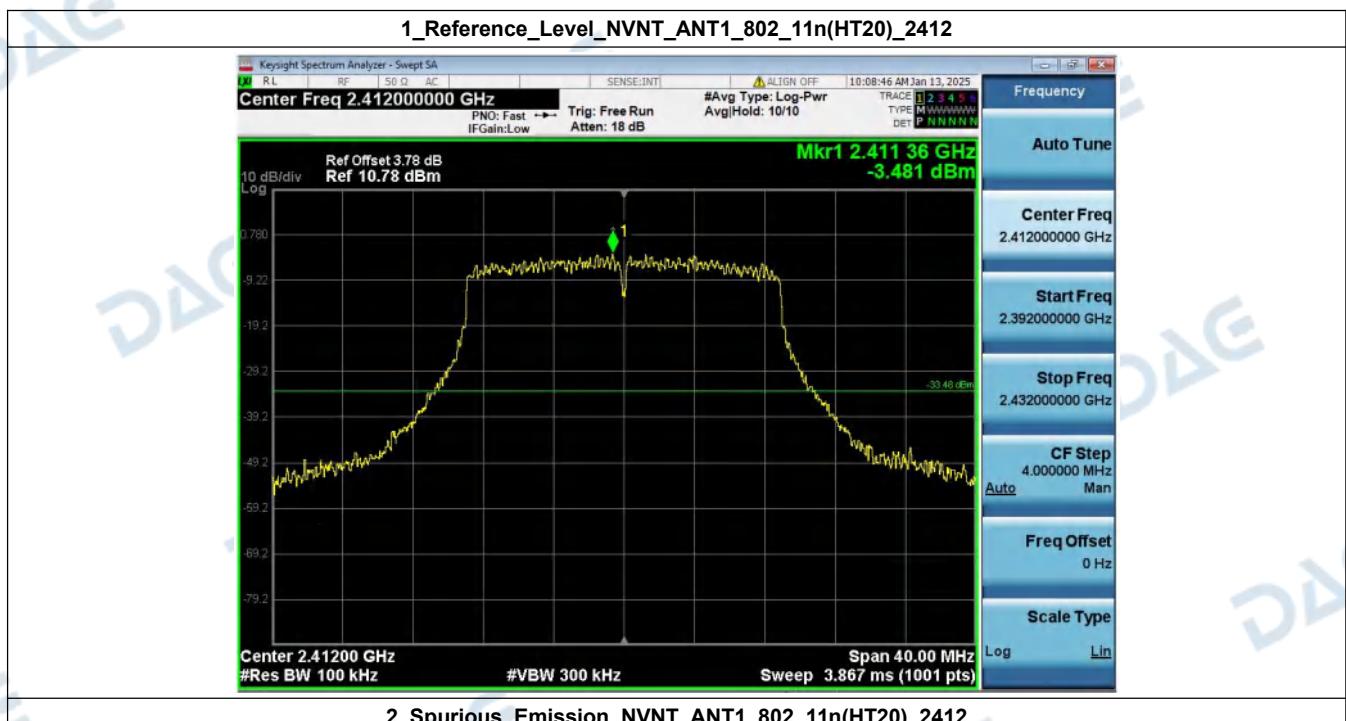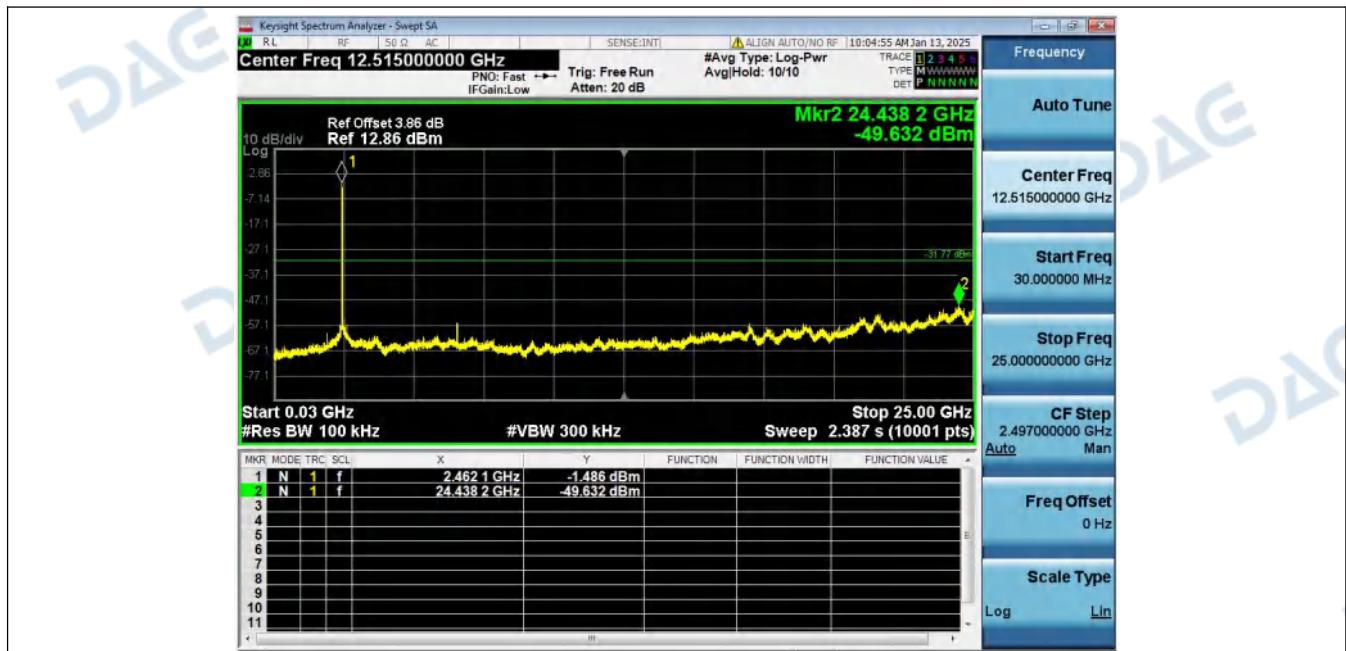


2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT20)\_2412

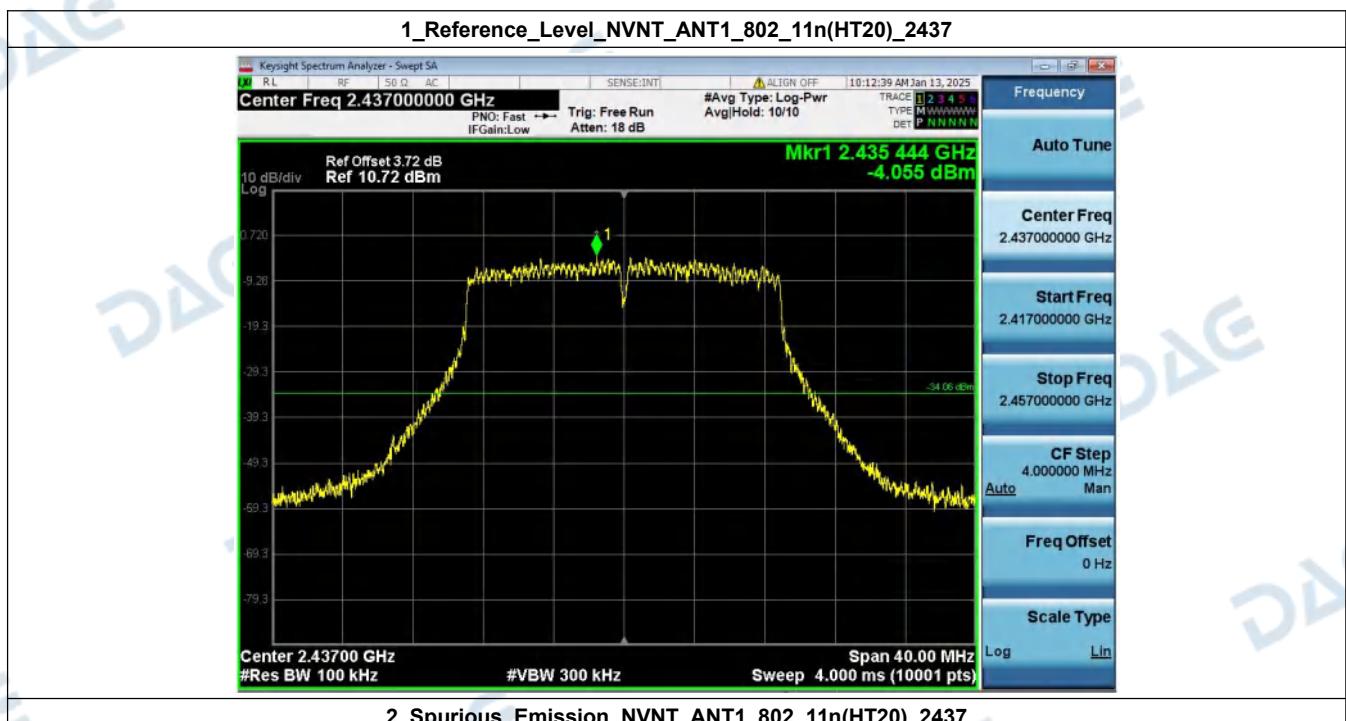


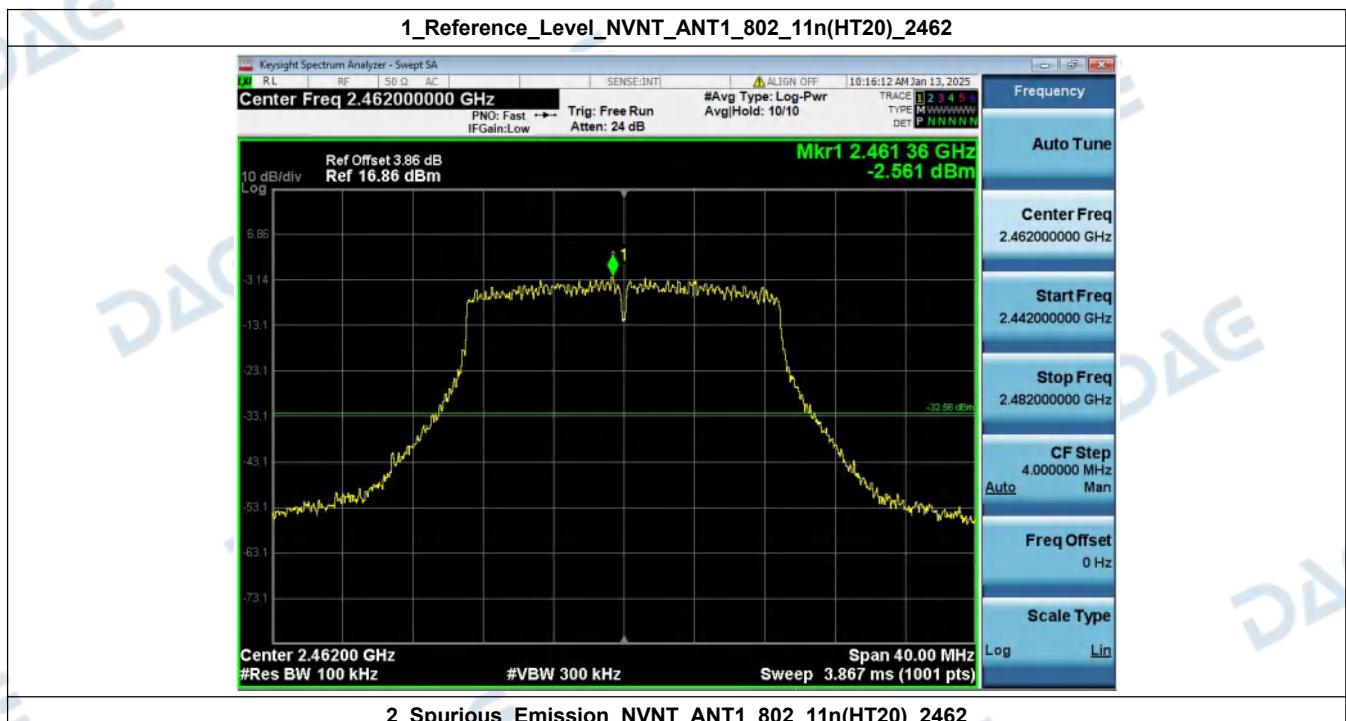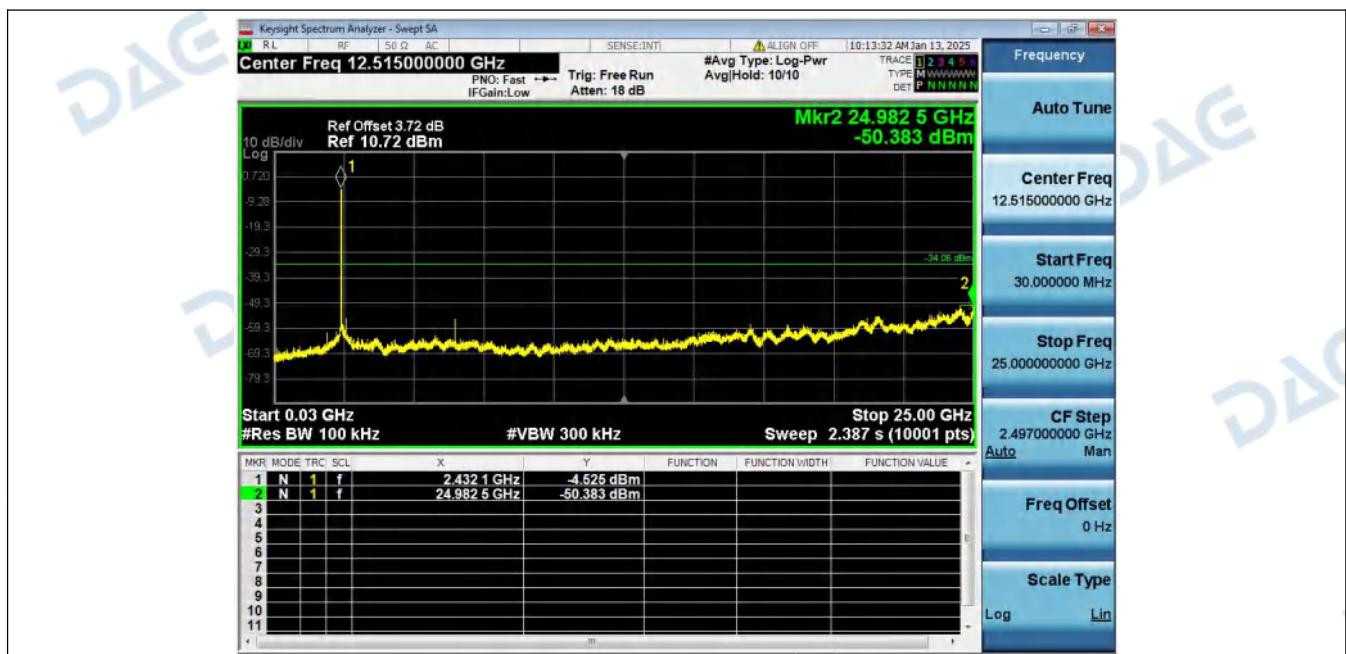


## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT20)\_2462

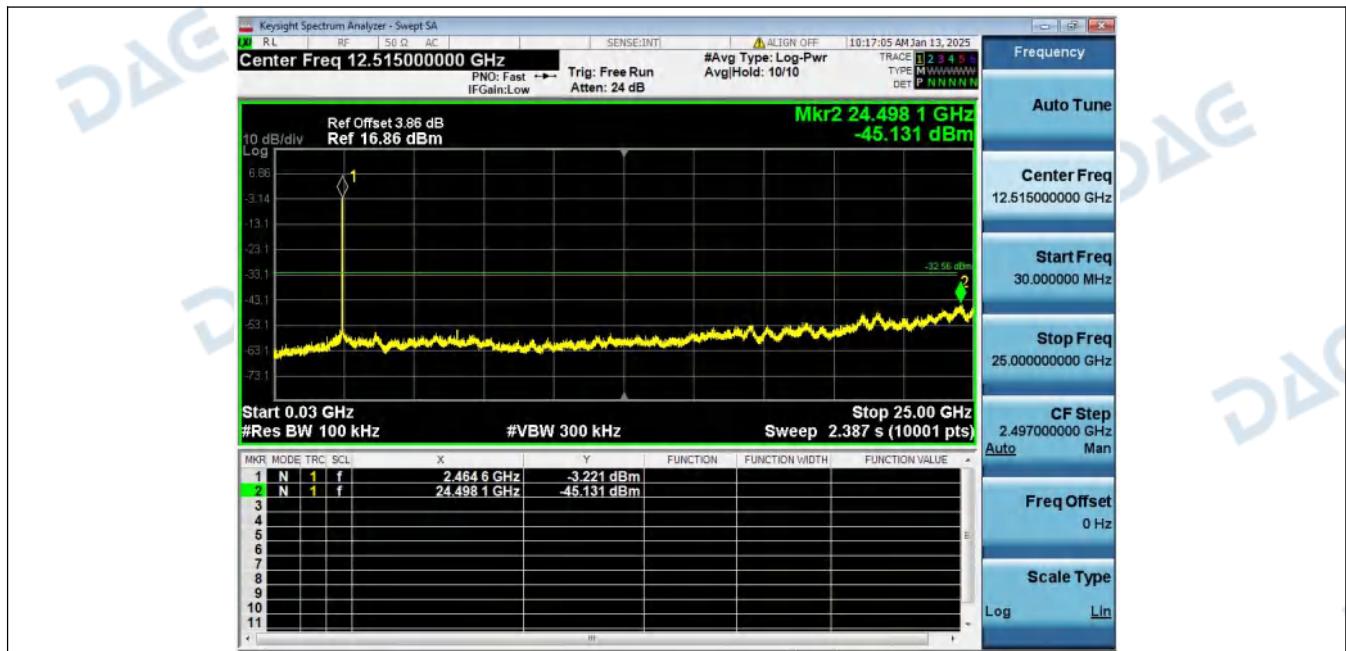


## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT40)\_2422

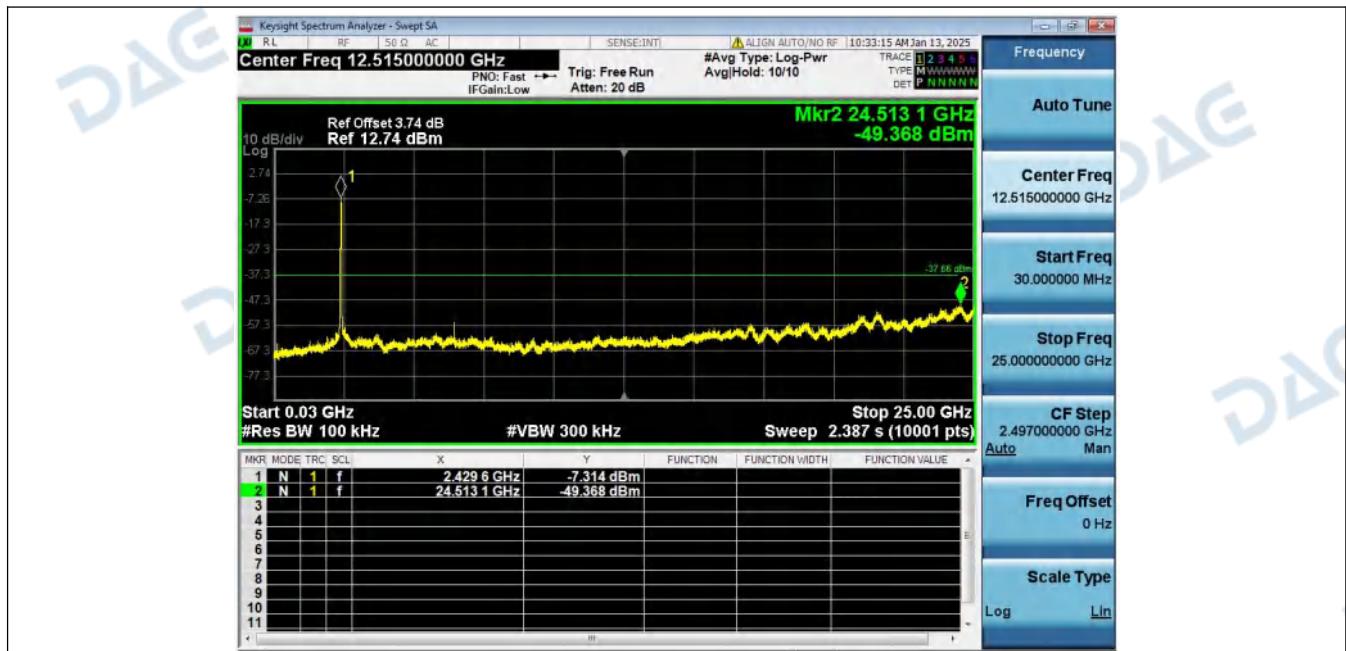

2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT40)\_2437

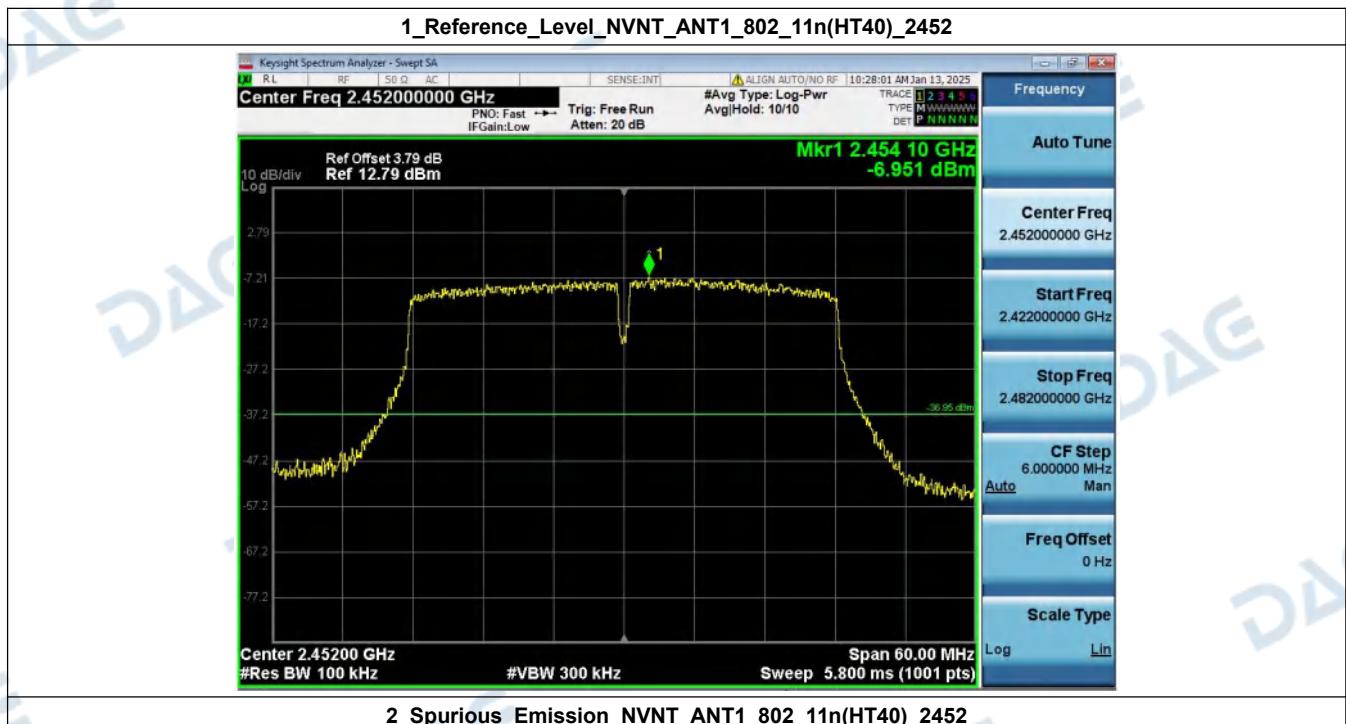

## 2\_Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT40)\_2452

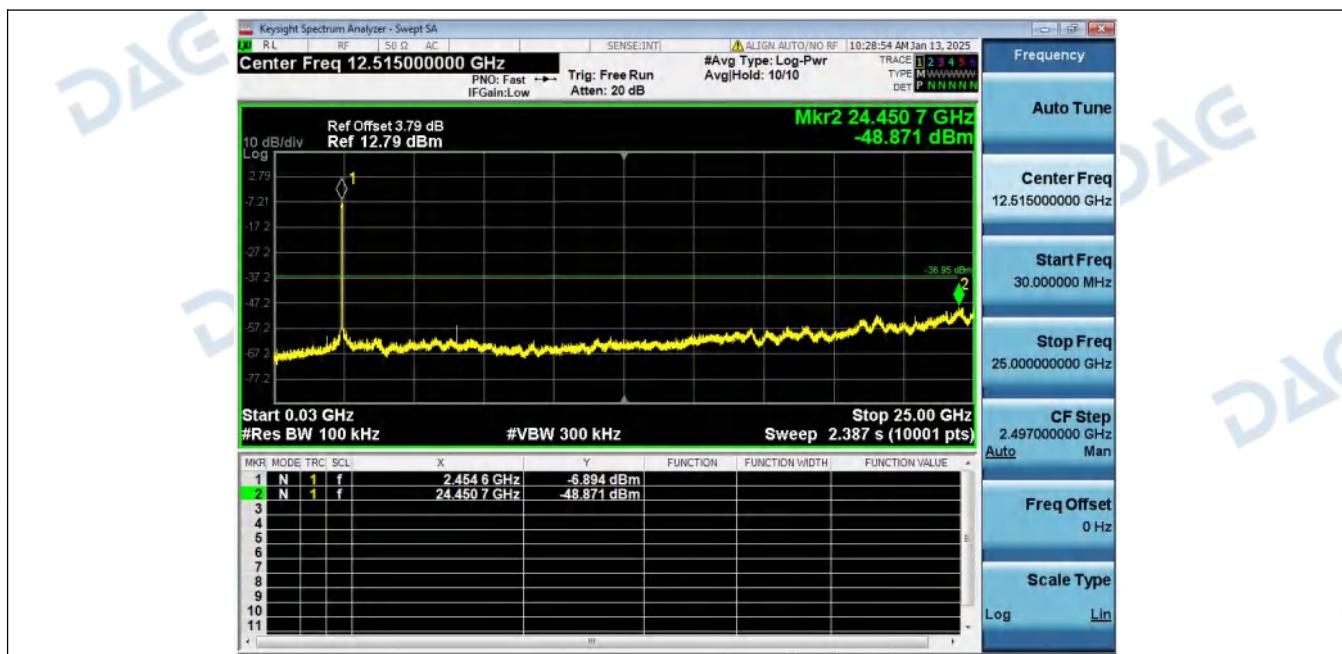

\*\*\*\*\* End of Report \*\*\*\*\*