



1 Duty Cycle


1.1 Test Result

Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor	1/T (kHz)
BLE 1M	2402	85.6	0.68	0.47
BLE 1M	2440	85.56	0.68	0.47
BLE 1M	2480	85.6	0.68	0.47
BLE 2M	2402	43.61	3.6	0.93
BLE 2M	2440	43.6	3.61	0.93
BLE 2M	2480	43.61	3.6	0.93

1.2 Test Graphs

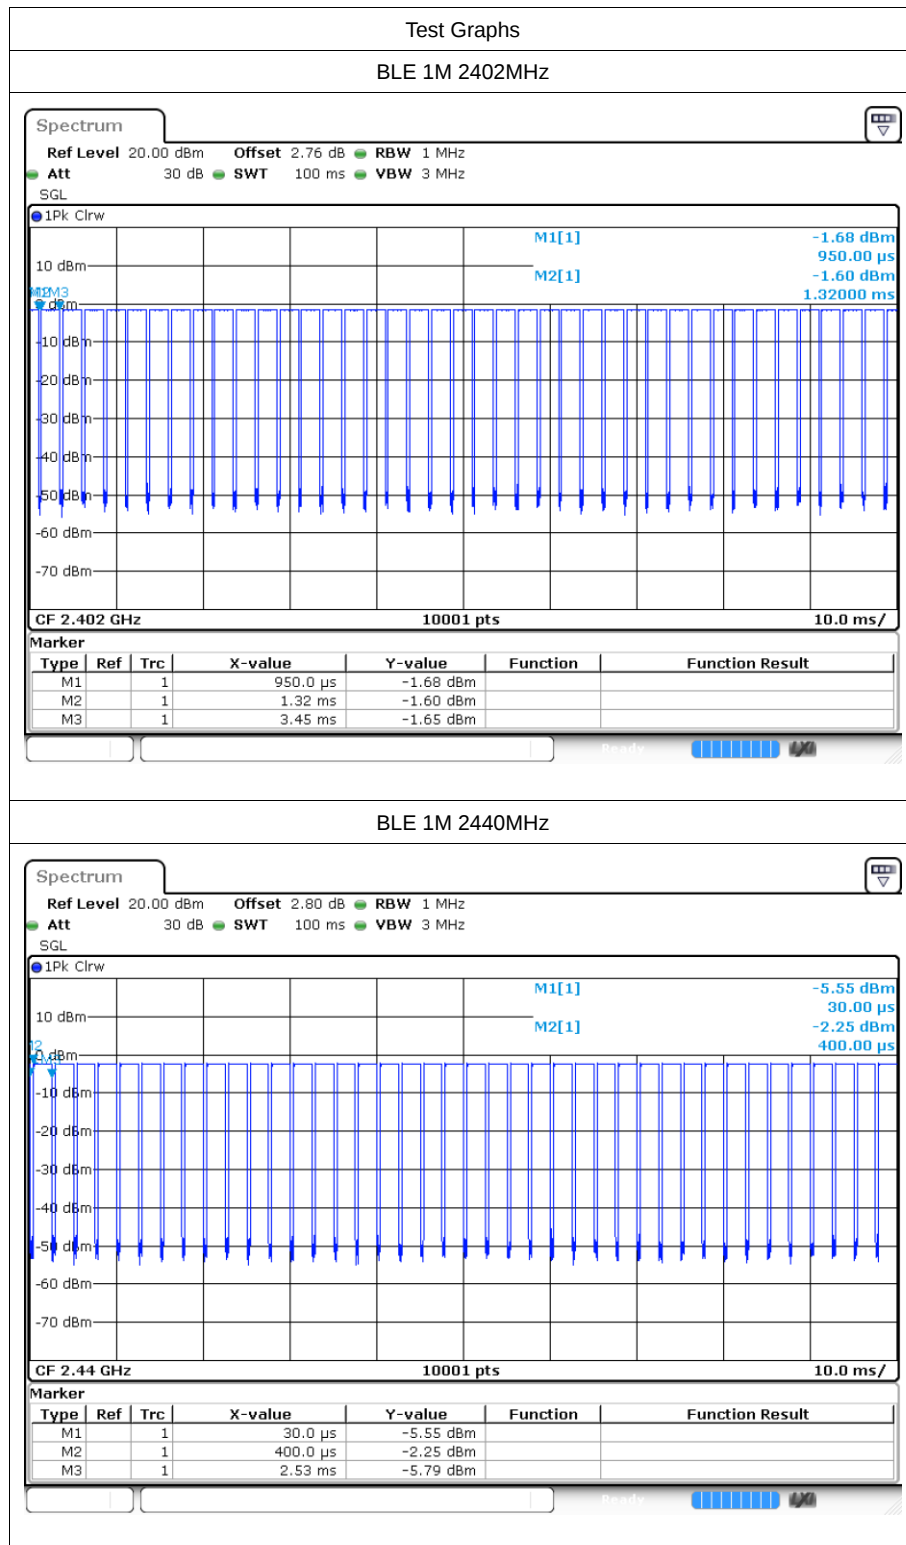

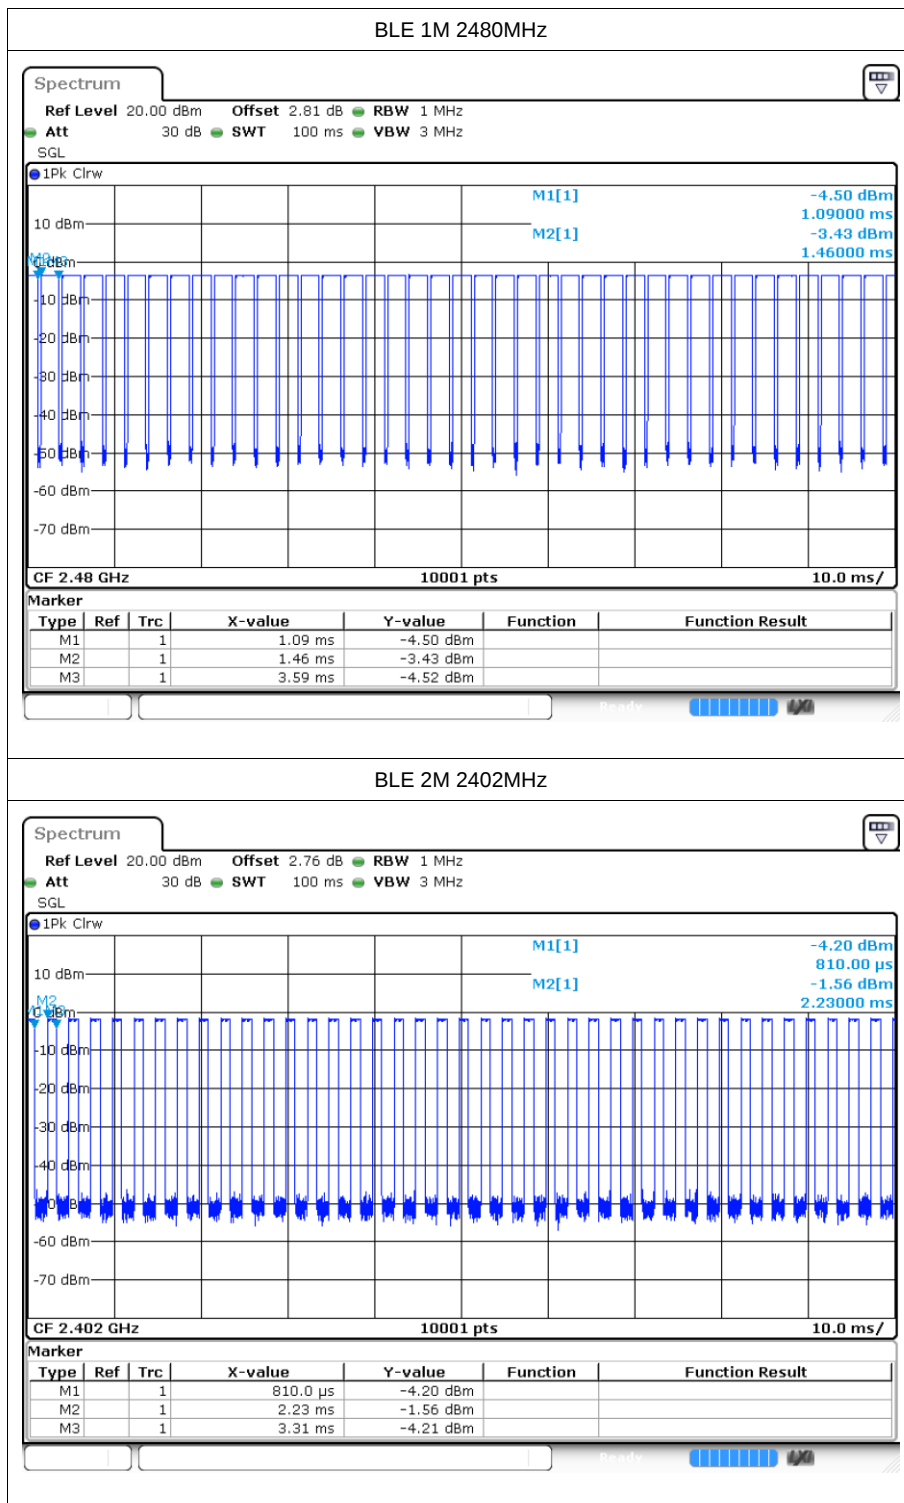

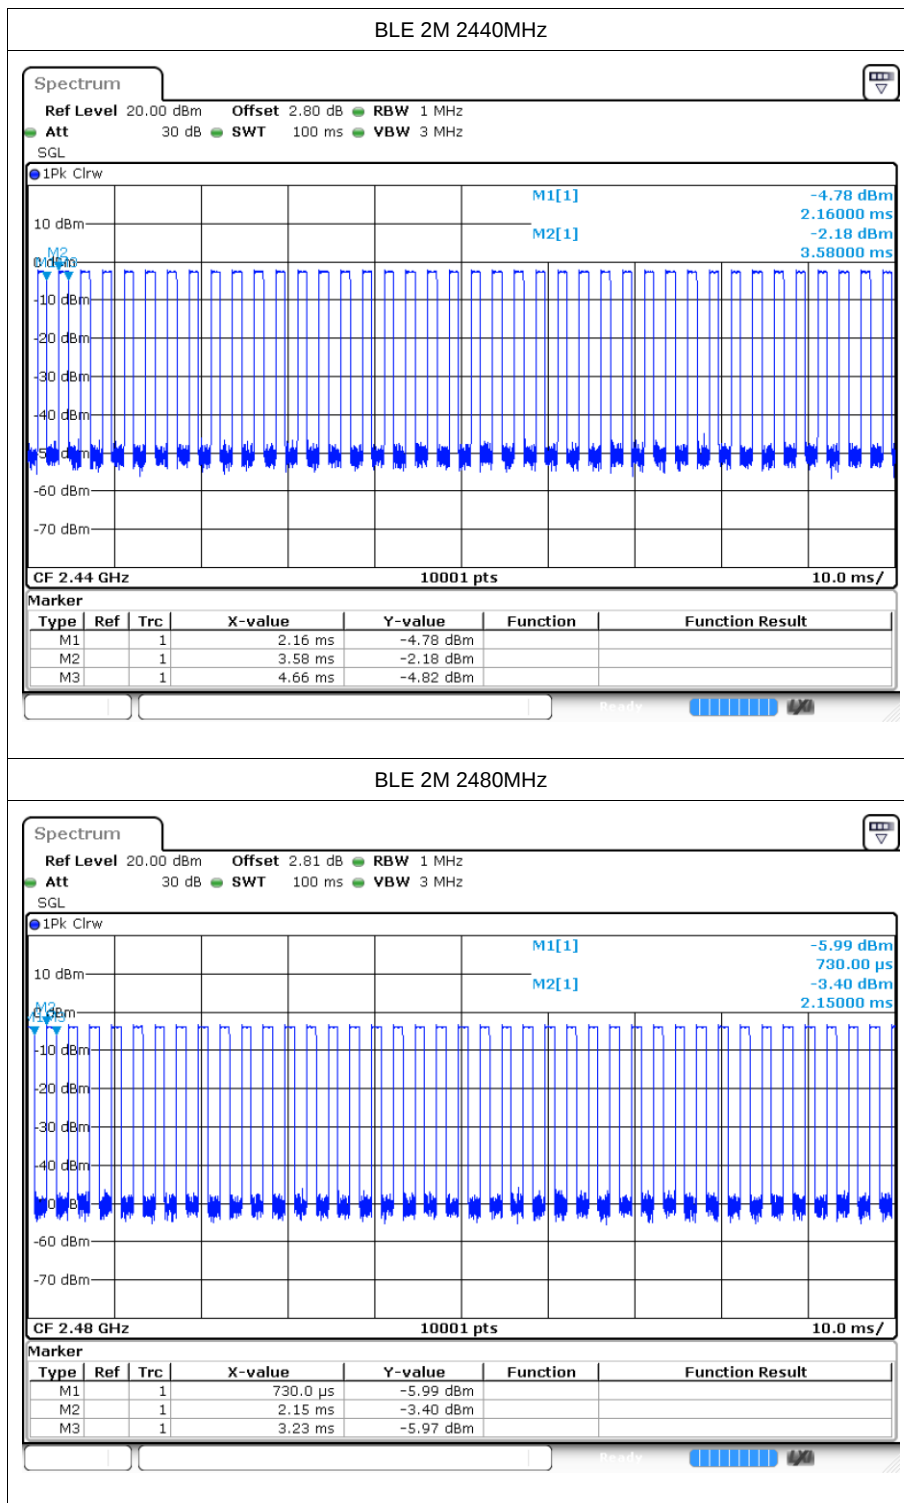



2 Maximum Conducted Output Power


2.1 Test Result

Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	-1.53	30	Pass
BLE 1M	2440	-2.22	30	Pass
BLE 1M	2480	-3.49	30	Pass
BLE 2M	2402	-1.52	30	Pass
BLE 2M	2440	-2.17	30	Pass
BLE 2M	2480	-3.42	30	Pass

2.2 Test Graphs

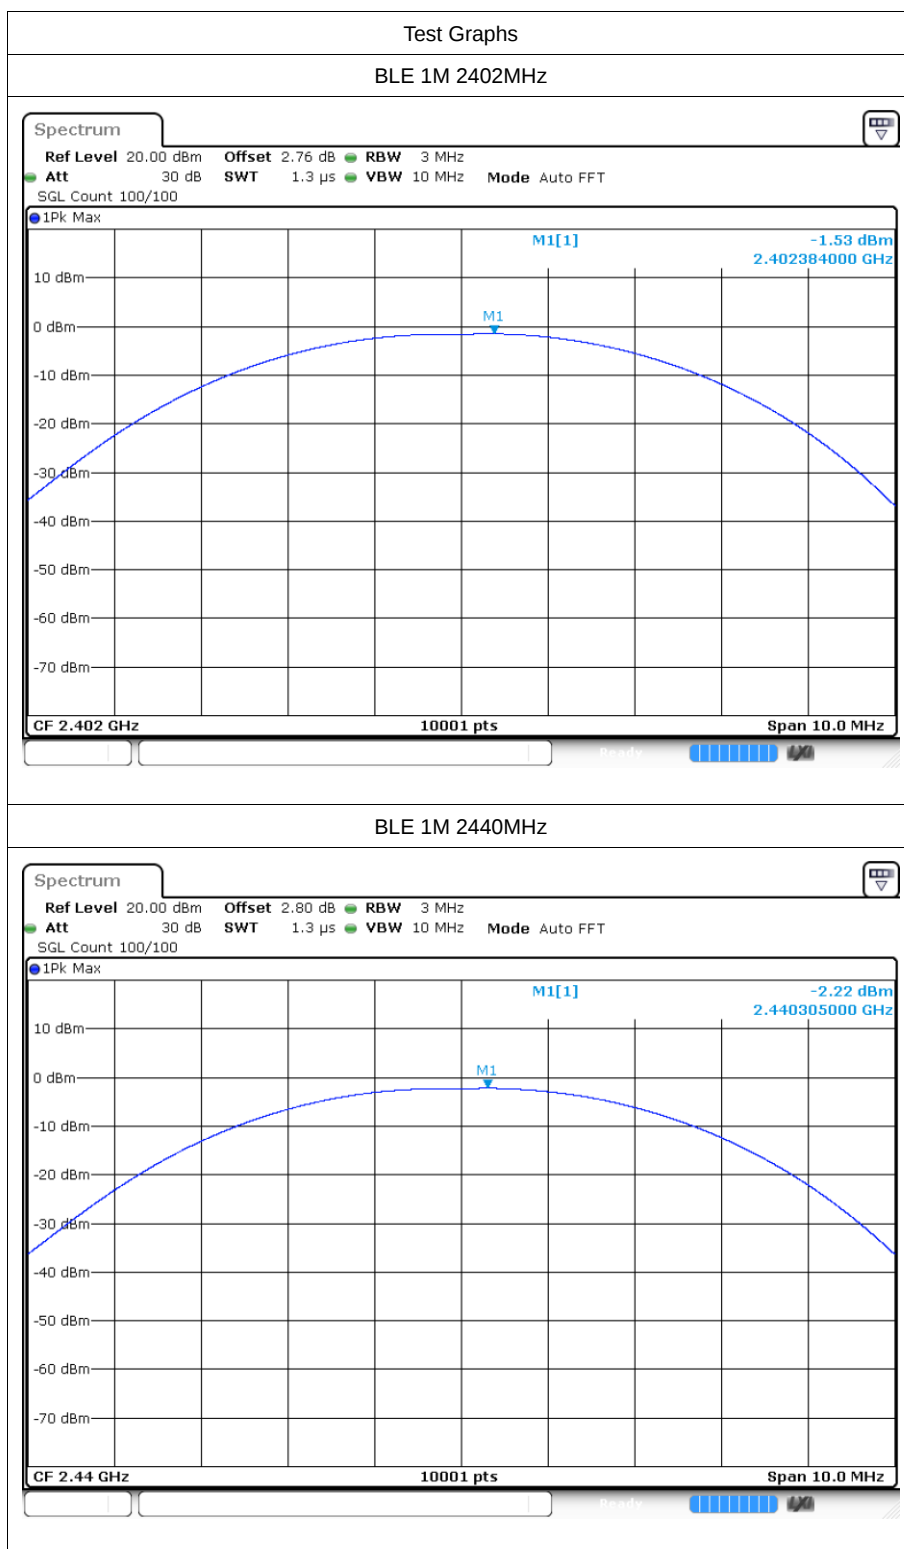

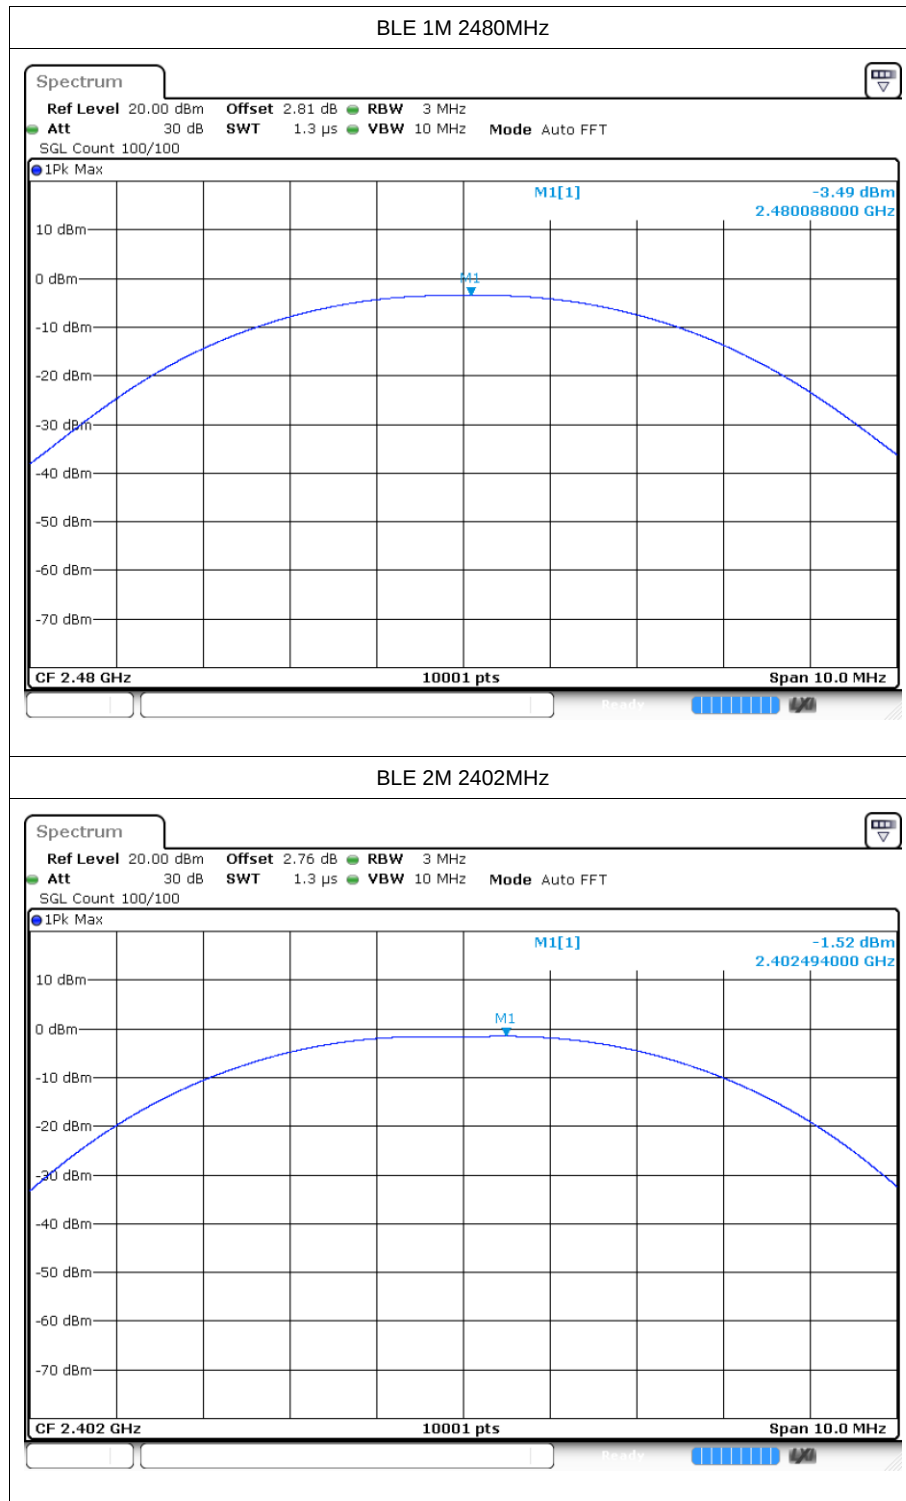

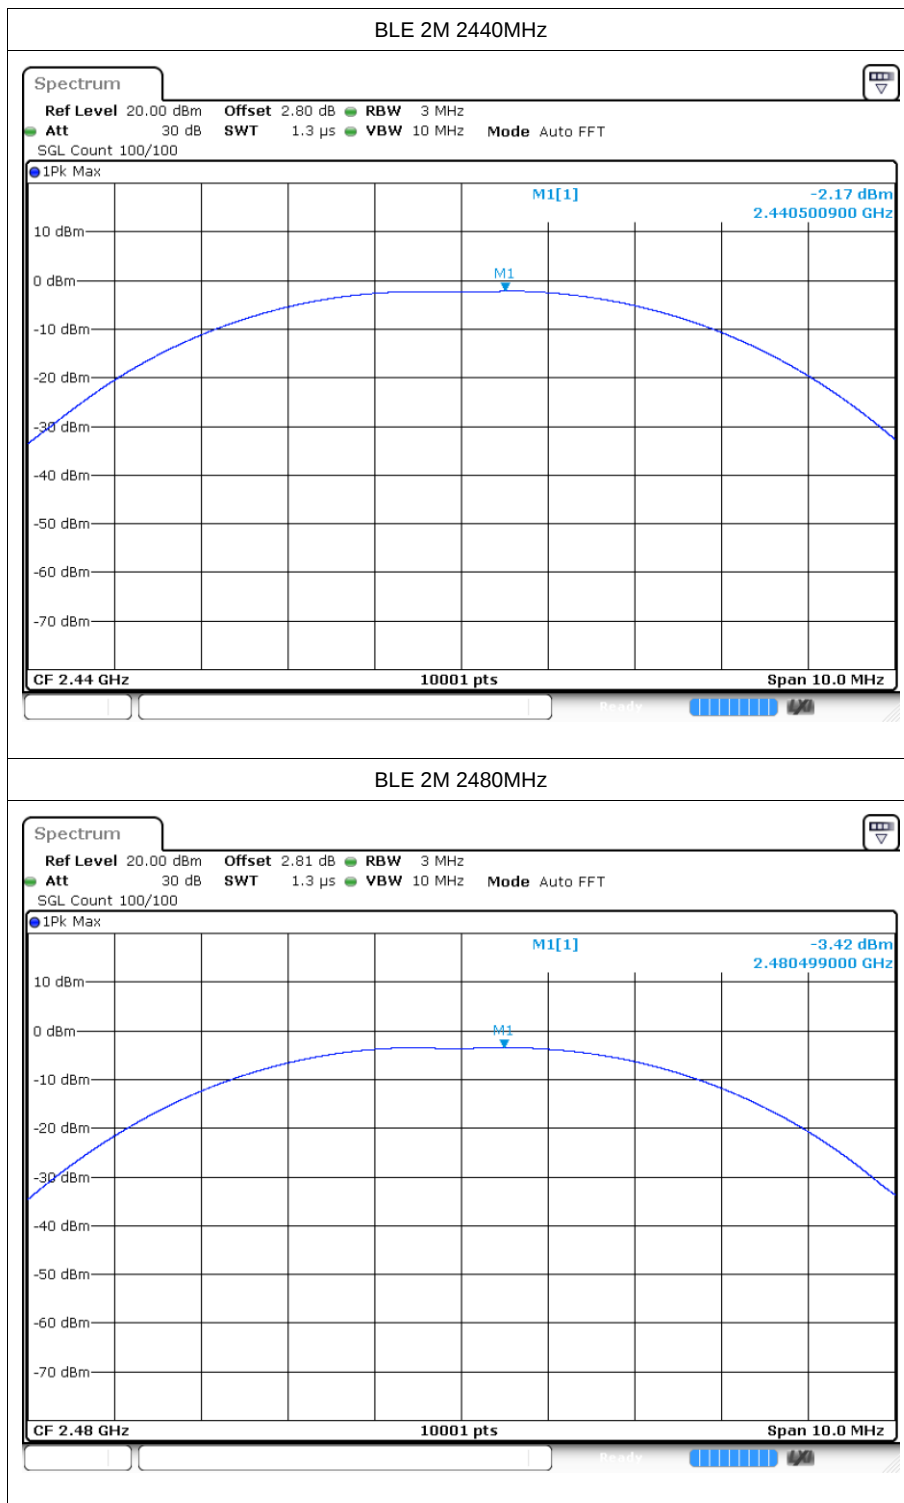



3 -6dB Bandwidth


3.1 Test Result

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
BLE 1M	2402	0.685	0.5	Pass
BLE 1M	2440	0.66	0.5	Pass
BLE 1M	2480	0.706	0.5	Pass
BLE 2M	2402	1.356	0.5	Pass
BLE 2M	2440	1.156	0.5	Pass
BLE 2M	2480	1.321	0.5	Pass

3.2 Test Graphs

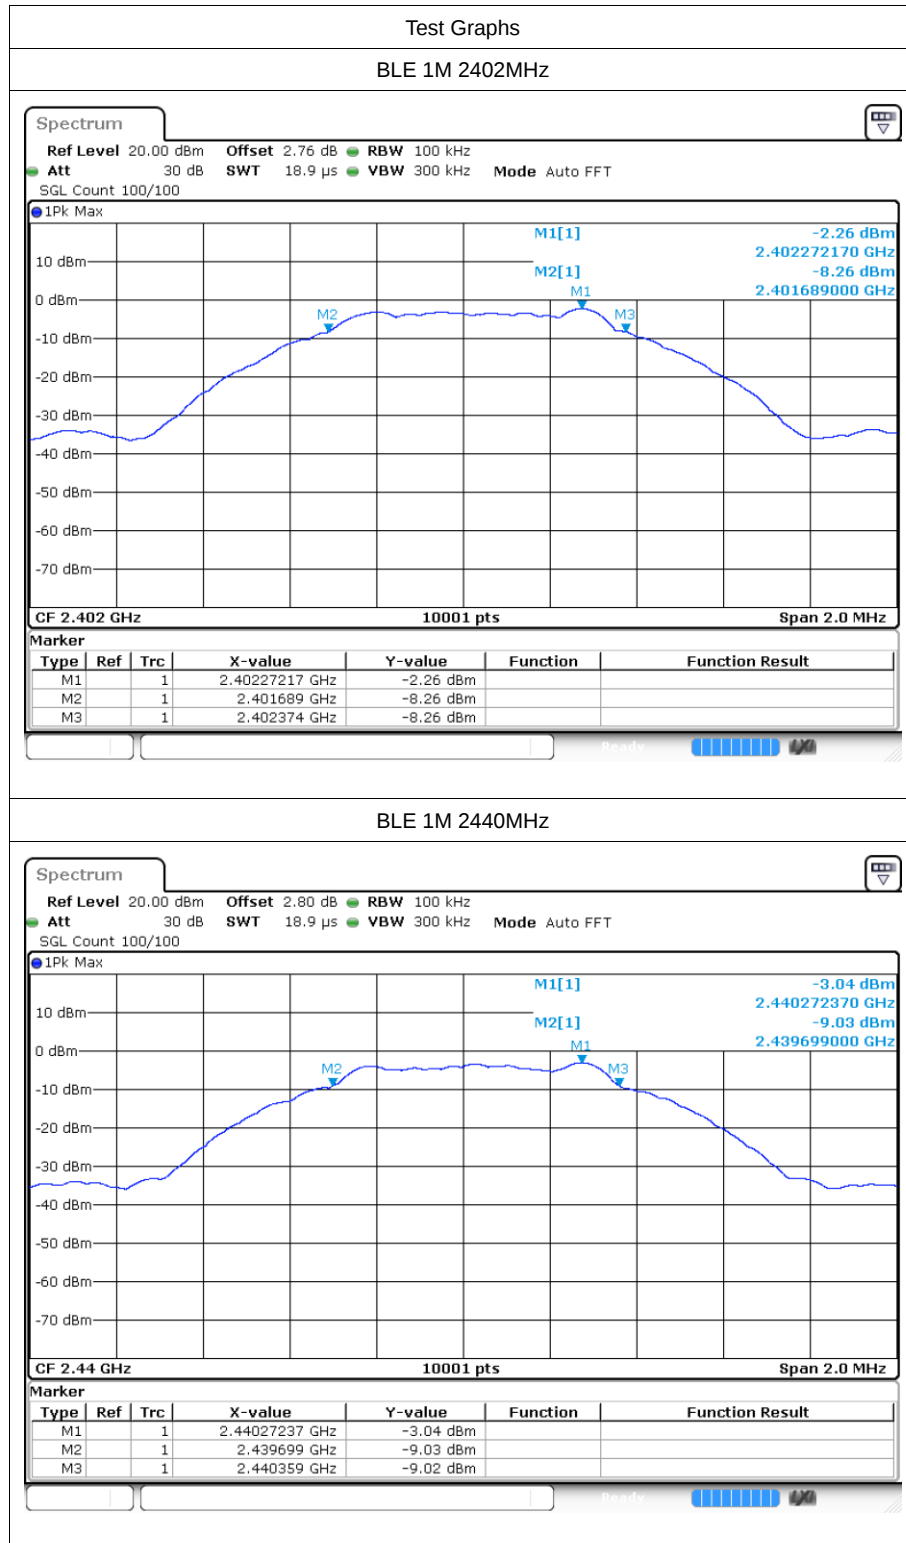

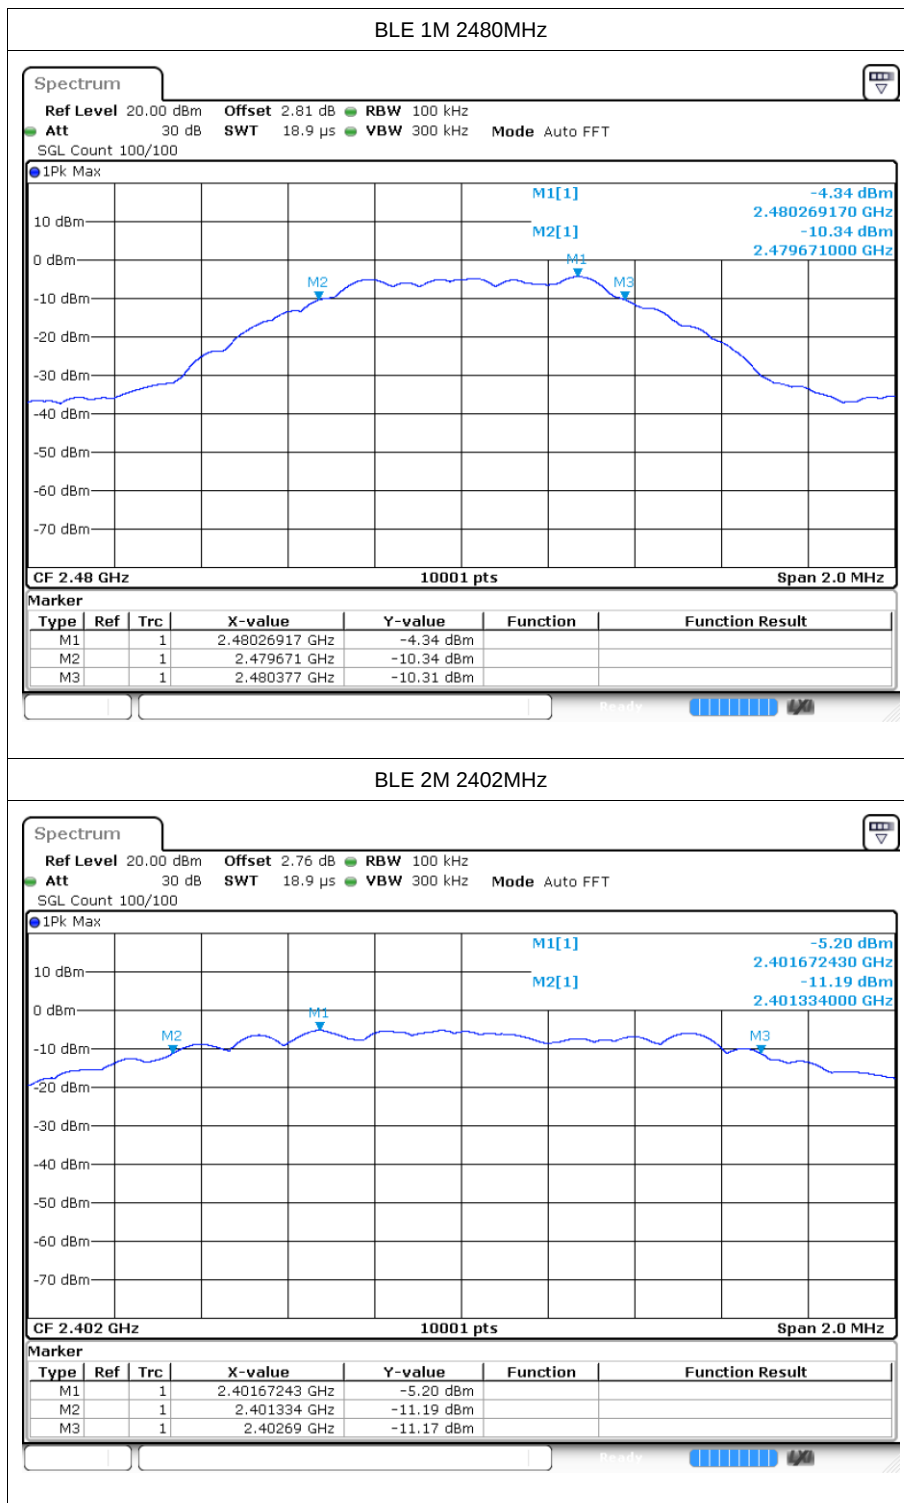

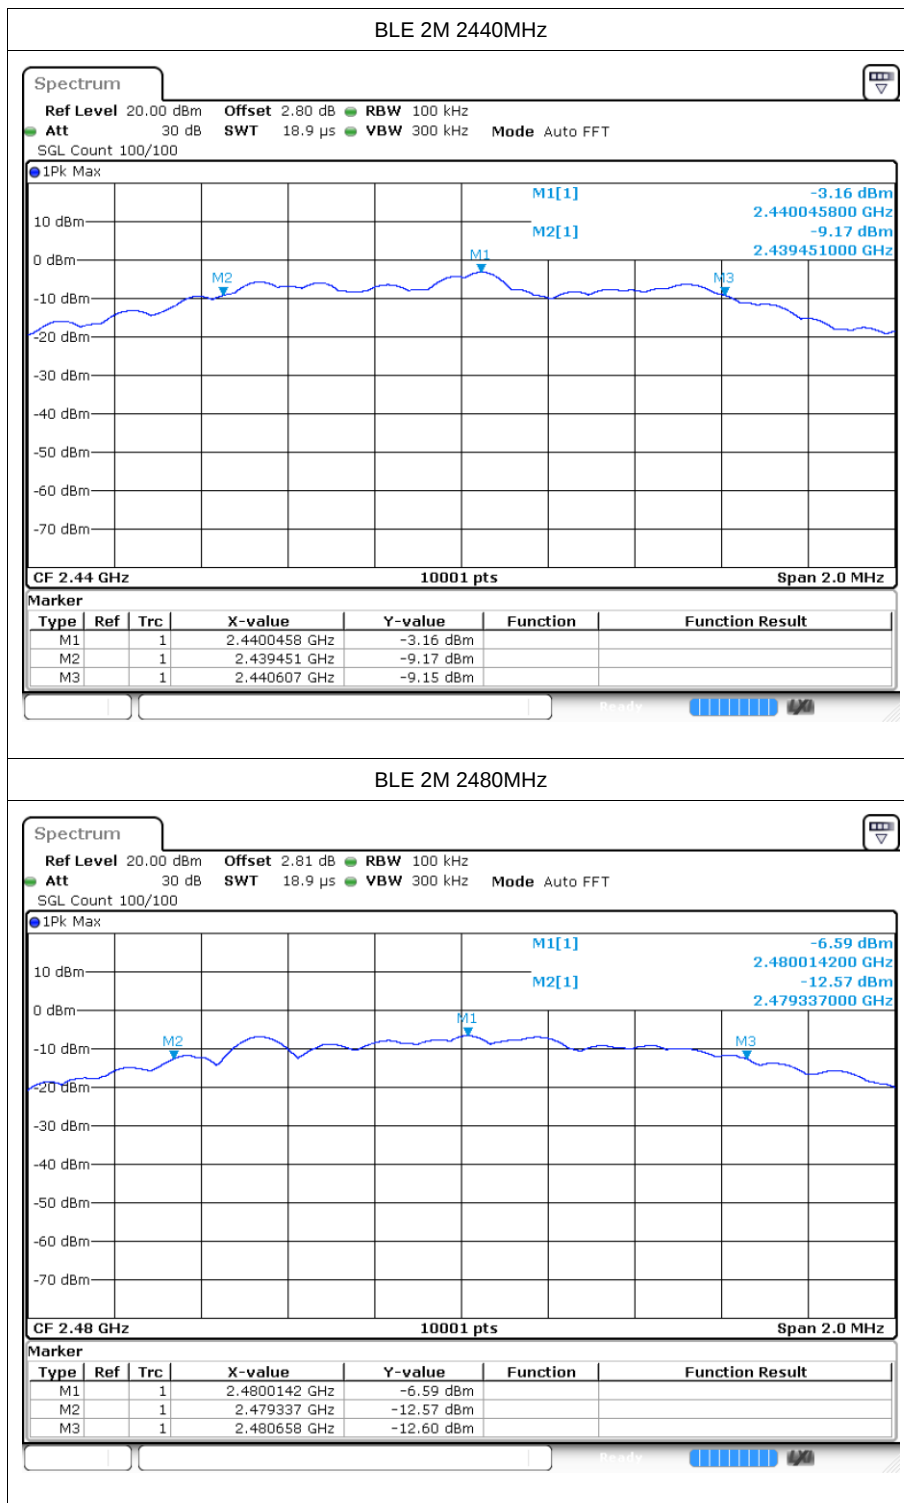



4 Maximum Power Spectral Density Level


4.1 Test Result

Mode	Frequency (MHz)	Conducted PSD (dBm/3-100kHz)	Limit (dBm/3kHz)	Verdict
BLE 1M	2402	-18.12	≤ 8	Pass
BLE 1M	2440	-18.78	≤ 8	Pass
BLE 1M	2480	-20.1	≤ 8	Pass
BLE 2M	2402	-21.22	≤ 8	Pass
BLE 2M	2440	-22.1	≤ 8	Pass
BLE 2M	2480	-23.26	≤ 8	Pass

4.2 Test Graphs

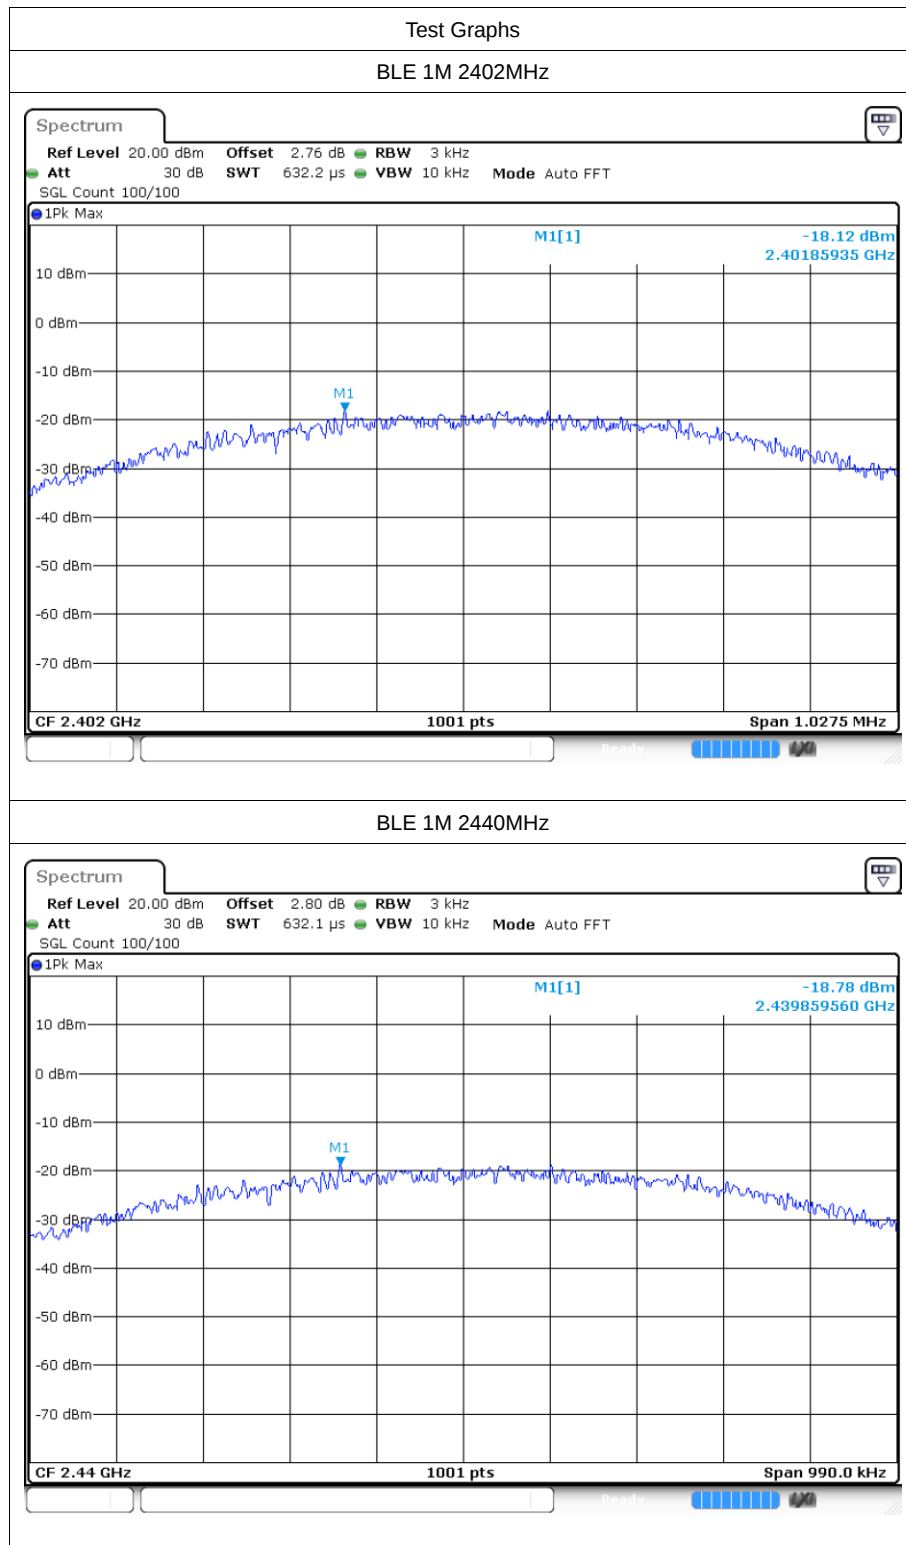

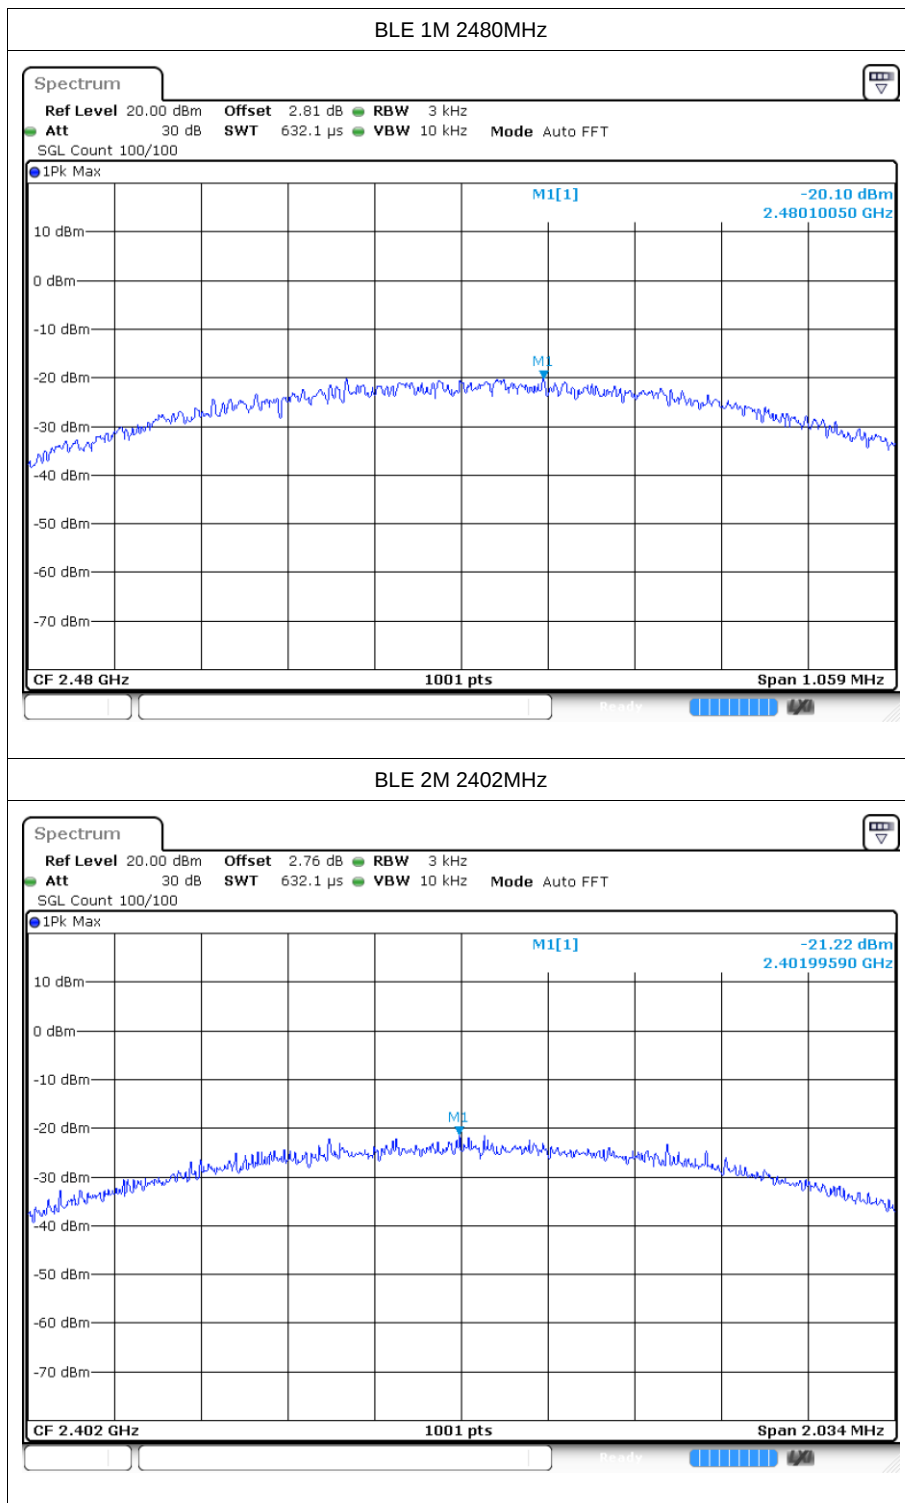

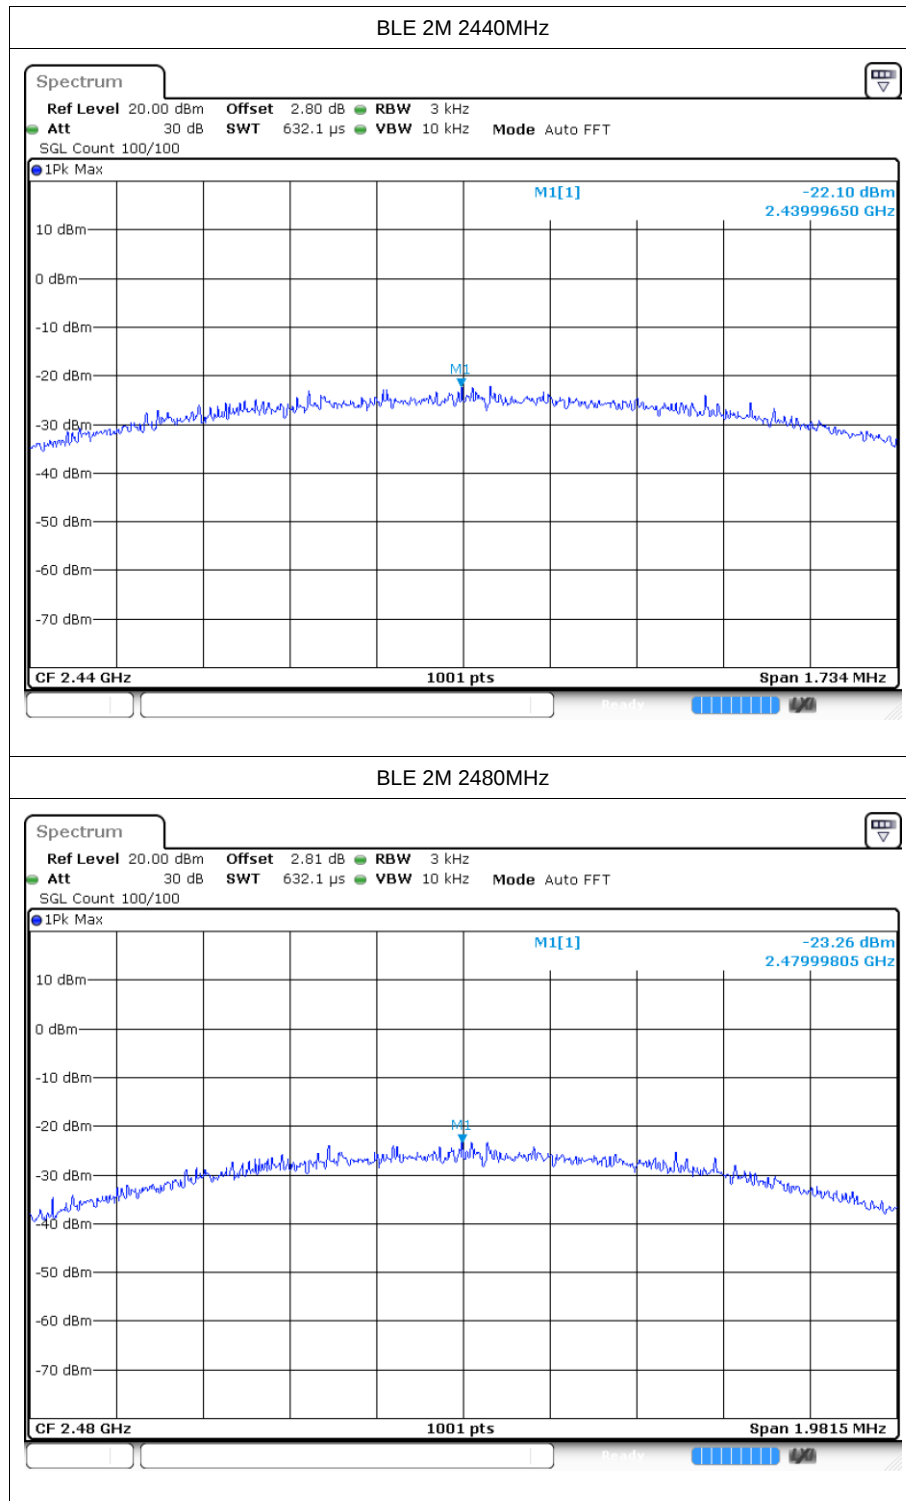



5 Band Edge


5.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-50.17	-20	Pass
BLE 1M	2480	-50.81	-20	Pass
BLE 2M	2402	-49.82	-20	Pass
BLE 2M	2480	-48.85	-20	Pass

5.2 Test Graphs

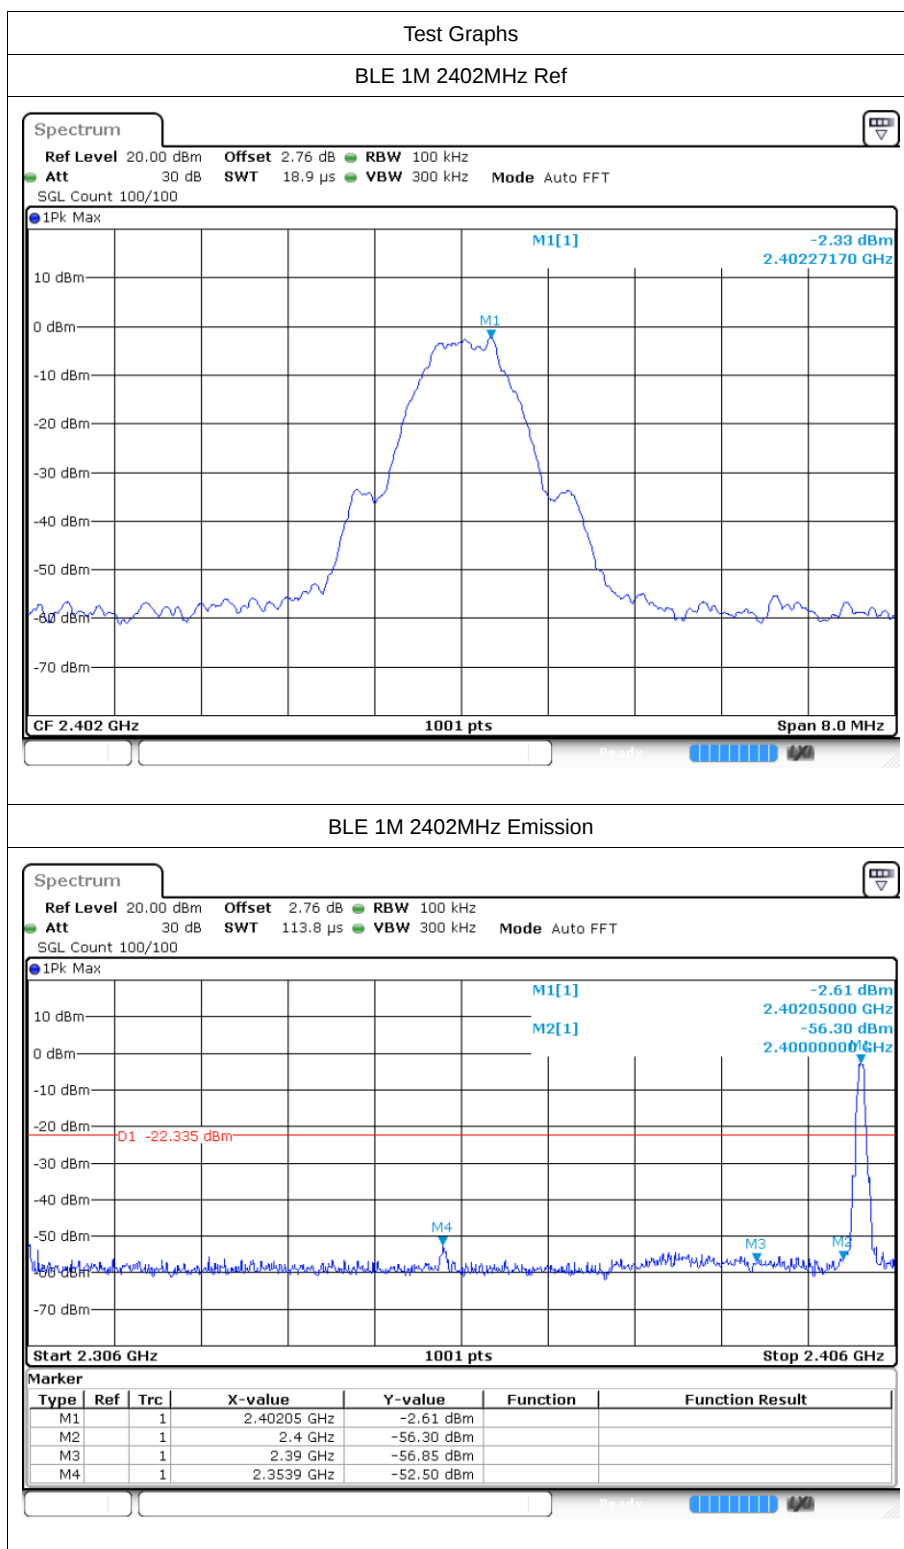

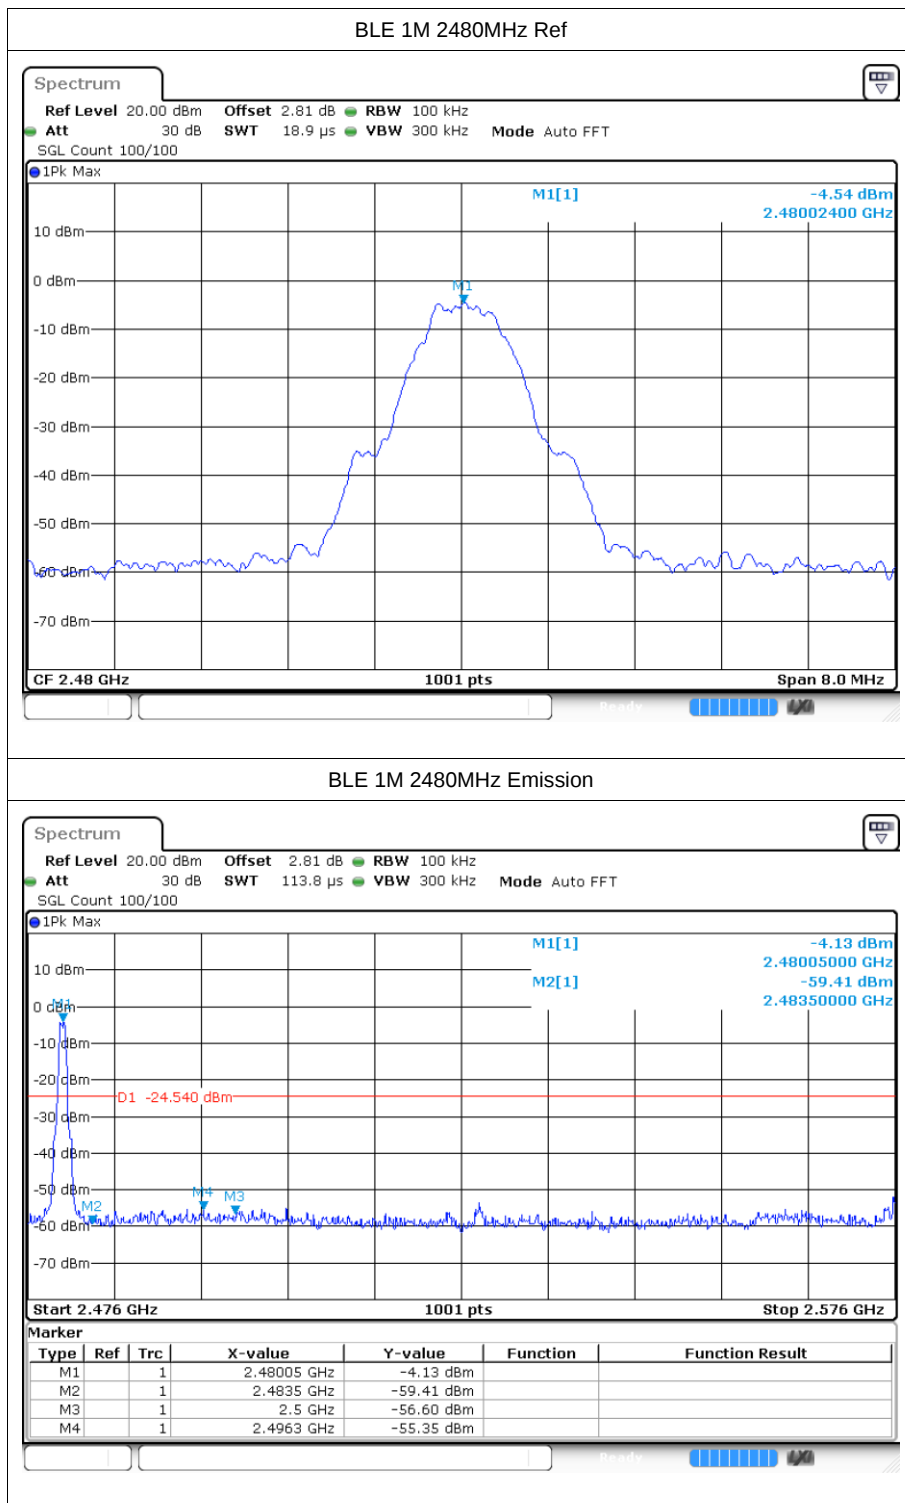

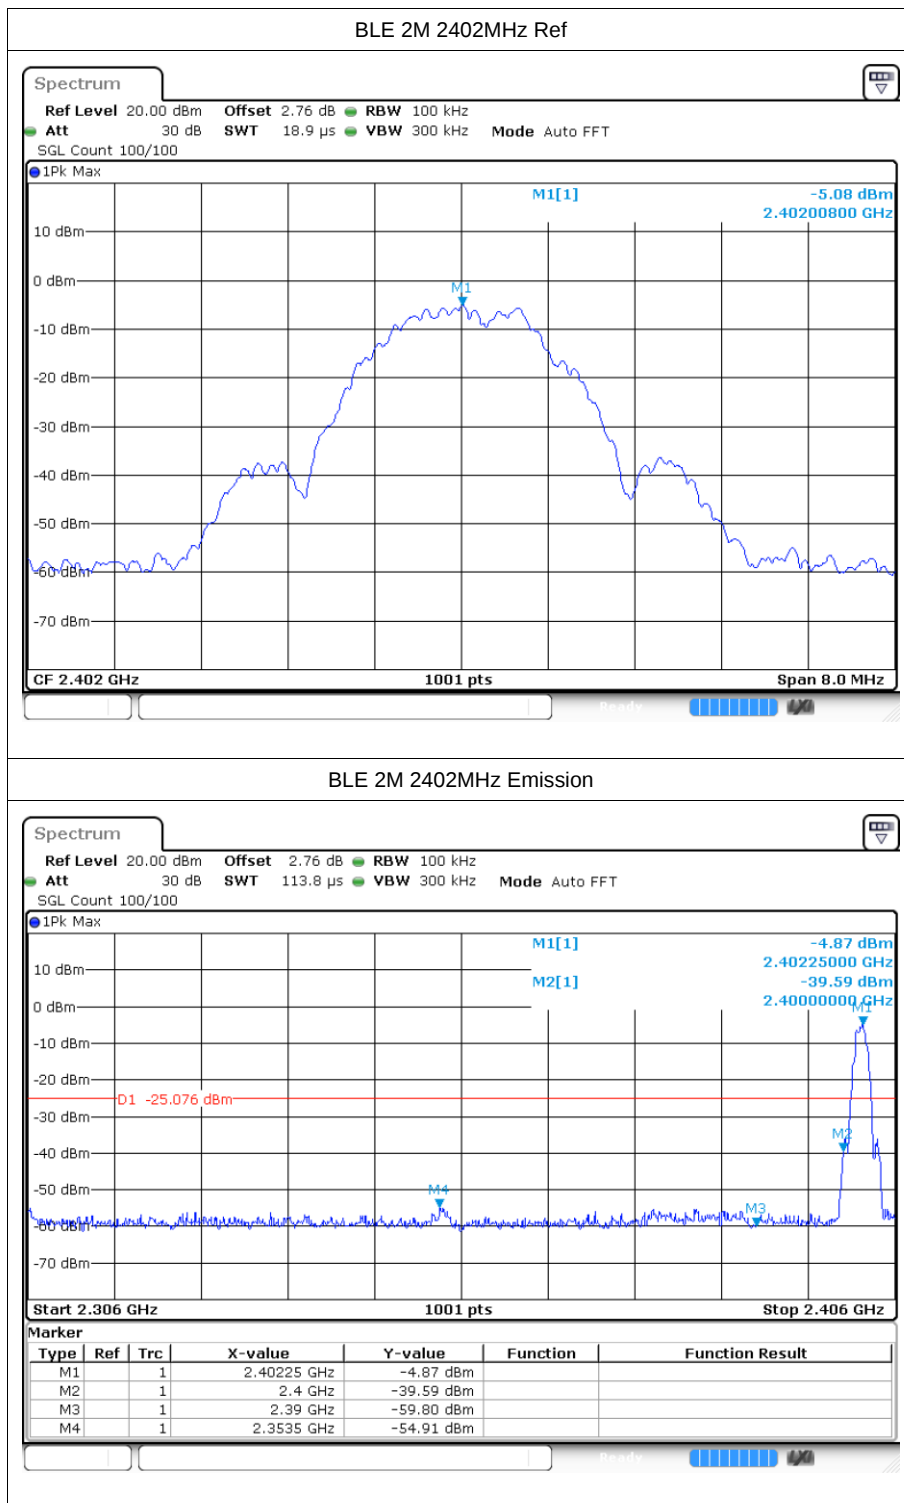

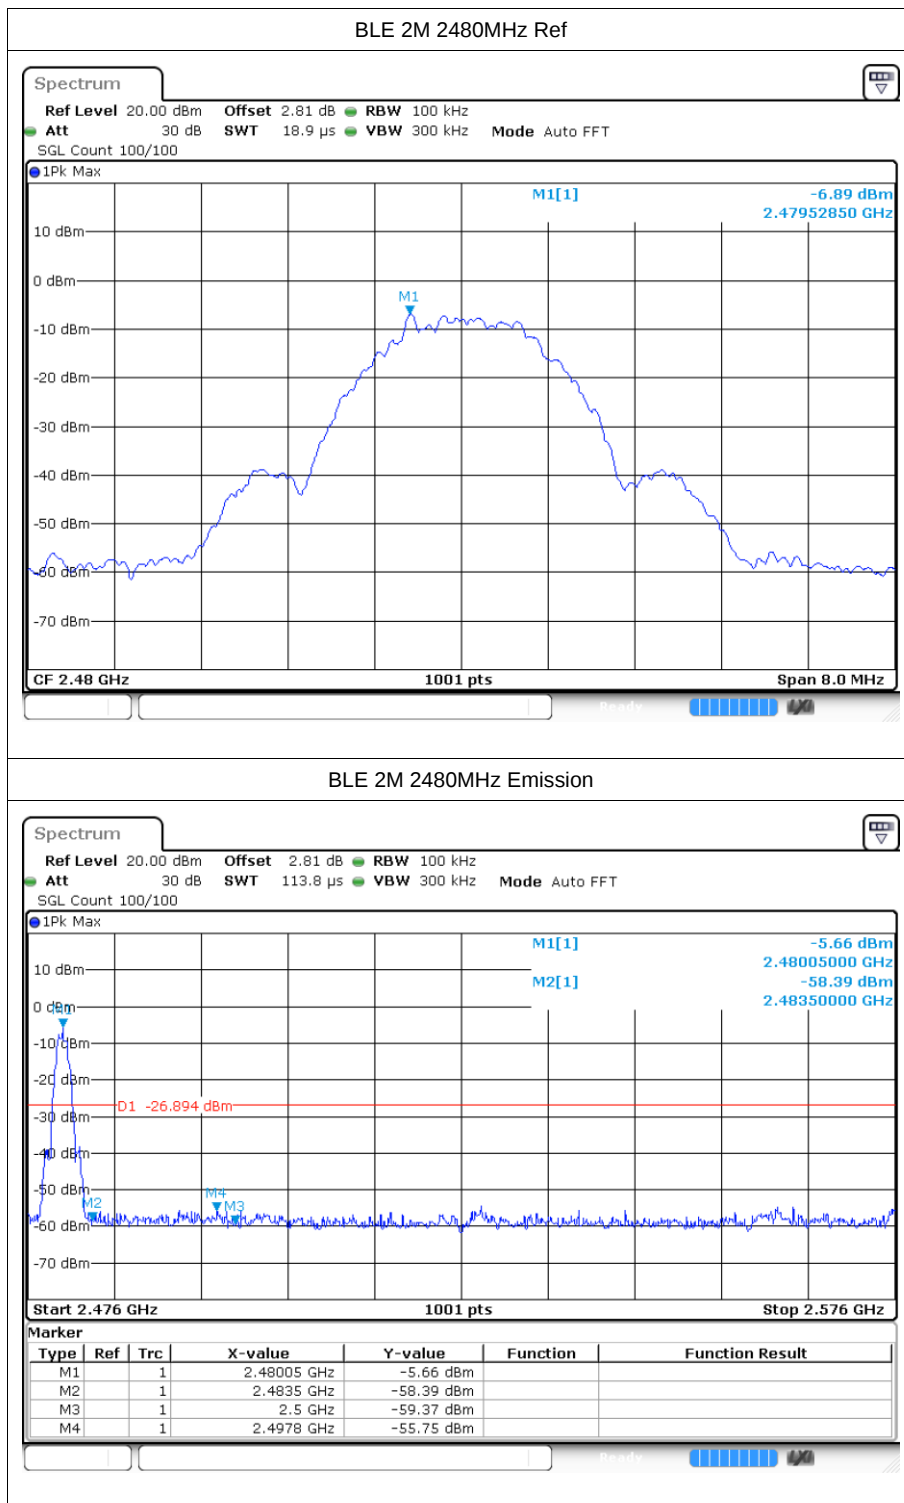

6 Conducted RF Spurious Emission

6.1 Test Result

Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-40.25	-20	Pass
BLE 1M	2440	-39.1	-20	Pass
BLE 1M	2480	-39.6	-20	Pass
BLE 2M	2402	-40.2	-20	Pass
BLE 2M	2440	-37.89	-20	Pass
BLE 2M	2480	-38.49	-20	Pass

6.2 Test Graphs

