



FCC Test Report

Test Report**On Behalf of****Yuzhong District Dading Changhong Commercial and Trade Bank****For****Smart Light Sound Machine****Model No.: G63****FCC ID: 2BNLJ-G63**

Prepared For: **Yuzhong District Dading Changhong Commercial and Trade Bank**
14-5, Building 1, No. 77, Tiger Scorpion Road, Shiyou Road Street, Yuzhong District, Chongqing, China

Prepared By: **Shenzhen HUAK Testing Technology Co., Ltd.**
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: **Dec. 30, 2024 ~ Jan. 15, 2025**

Date of Report: **Jan. 15, 2025**

Report Number: **HK2412308176-2E**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Test Result Certification

Applicant's Name : Yuzhong District Dading Changhong Commercial and Trade Bank

Address : 14-5, Building 1, No. 77, Tiger Scorpion Road, Shiyou Road
Street, Yuzhong District, Chongqing, China

Manufacturer's Name : Dongguan Yanfeng Intelligent Technology Co., Ltd

Address : Room 102, Building 2, No. 4, Jizhi North Road, Humen Town,
Dongguan City, Guangdong Province, China

Product Description

Trade Mark : N/A

Product Name : Smart Light Sound Machine

Model and/or Type Reference: G63

Standards : FCC Rules and Regulations Part 15 Subpart C (Section 15.209),
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test

Date (s) of Performance of Tests : Dec. 30, 2024 ~ Jan. 15, 2025

Date of Issue : Jan. 15, 2025

Test Result : Pass

Testing Engineer : 

(Len Liao)

Technical Manager : 

(Sliver Wan)

Authorized Signatory : 

(Jason Zhou)

**Table of Contents****Page**

| | |
|---|----|
| 1 . Test Summary | 5 |
| 1.1 Test Procedures and Results | 5 |
| 1.2 Information of the Test Laboratory | 5 |
| 1.3 Measurement Uncertainty | 5 |
| 2. General Information | 6 |
| 2.1 General Description of EUT | 6 |
| 2.2 Carrier Frequency of Channels | 7 |
| 2.3 Operation of EUT during Testing | 7 |
| 2.4 Description of Test Setup | 8 |
| 2.5 Description of Support Units | 9 |
| 2.6 Measurement Instruments List | 10 |
| 3. Conducted Emission Test | 11 |
| 3.1 Block Diagram of Test Setup | 11 |
| 3.2 Conducted Power Line Emission Limit | 11 |
| 3.3 Test Procedure | 11 |
| 3.4 Test Result | 12 |
| 4. Radiated Emissions | 14 |
| 4.1 Block Diagram of Test Setup | 14 |
| 4.2 Rules and Specifications | 15 |
| 4.3 Test Procedure | 16 |
| 4.4 Test Result | 17 |
| 5. Antenna Requirement | 20 |
| 6. Photographs of Test | 21 |
| 7. Photos of the EUT | 23 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

**** Modified History ****

| Revision | Description | Issued Data | Remark |
|--------------|-----------------------------|---------------|------------|
| Revision 1.0 | Initial Test Report Release | Jan. 15, 2025 | Jason Zhou |
| | | | |
| | | | |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



1. Test Summary

1.1 Test Procedures and Results

| DESCRIPTION OF TEST | SECTION NUMBER | RESULT |
|--------------------------|----------------|-----------|
| CONDUCTED EMISSIONS TEST | 15.207 | COMPLIANT |
| RADIATED EMISSION TEST | 15.209 | COMPLIANT |
| ANTENNA REQUIREMENT | 15.203 | COMPLIANT |

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2 Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

1.3 Measurement Uncertainty

Measurement Uncertainty

| | |
|---|---------------|
| Conducted Emission Expanded Uncertainty | = 2.71dB, k=2 |
| Radiated emission expanded uncertainty(9kHz-30MHz) | = 3.90dB, k=2 |
| Radiated emission expanded uncertainty(30MHz-1000MHz) | = 3.90dB, k=2 |
| Radiated emission expanded uncertainty(Above 1GHz) | = 4.28dB, k=2 |



2. General Information

2.1 General Description of EUT

| | |
|----------------------|--|
| Equipment: | Smart Light Sound Machine |
| Model Name: | G63 |
| Series Models: | N/A |
| Model Difference: | N/A |
| Trade Mark: | N/A |
| FCC ID: | 2BNLJ-G63 |
| Antenna Type: | Coil Antenna |
| Operation Frequency: | 112KHz~205KHz |
| Test Frequency: | 115KHz |
| Number of Channels: | 1 |
| Modulation Type: | ASK |
| Power Source: | Input: DC5V/2A, 9V/2A Wireless Output: 5W Battery: DC3.7V, 160mAh |
| Power Rating: | Input: DC5V/2A, 9V/2A Wireless Output: 5W Battery: DC3.7V, 160mAh |
| Note: | <ol style="list-style-type: none">1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.2. Antenna gain Refer to the antenna specifications.3. The cable loss data is obtained from the supplier.4. The test results in the report only apply to the tested sample. |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



2.2 Carrier Frequency of Channels

| Operation Frequency each of channel | |
|-------------------------------------|-----------|
| Channel | Frequency |
| Middle CH | 115KHz |

2.3 Operation of EUT during Testing

| Test Item | Test mode | Description |
|---------------------------------|-----------|---|
| Radiated & Conducted Test Cases | Mode 1 | AC/DC Adapter + EUT + Mobile Phone (Battery Status: <1%) |
| | Mode 2 | AC/DC Adapter + EUT + Mobile Phone (Battery Status: <50%) |
| | Mode 3 | AC/DC Adapter + EUT + Mobile Phone (Battery Status: >95%) |

Note:

1. All modes and configurations above have been tested, Only the result of the worst case was recorded in the report, the worst-case configuration is Mode 1.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The Mobile Phone provided by Lab.
4. According to the manufacturer's design principle, the wireless charging power will reach its maximum when the client device's battery level is between 1% and 10%.



2.4 Description of Test Setup

Operation of EUT during conducted testing and radiation testing:



The sample was placed (0.8m (30MHz~1GHz), 0.8m (9KHz~30MHz)) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



2.5 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Trade Mark | Model/Type No. | Specification | Note |
|------|---------------------------|------------|----------------|---|------------|
| 1 | Smart Light Sound Machine | N/A | G63 | N/A | EUT |
| 2 | USB Cable | N/A | N/A | Length: 20cm | Accessory |
| 3 | Adapter | N/A | CD289 | Input: AC100-240V, 50/60Hz, 2A Max USB-C1 Output: DC5V/3A, 9V3A, 12V/3A, 15V/3A, 20V/5A, 28V/5A 140W MAX USB-C2 Output: DC5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A 100W MAX USB-A Output: DC5V/4.5A, 4.5V/5A, 5V/3A, 9V/2A, 12V/1.5A 22.5W MAX Total Output: 140W Max | Peripheral |
| 4 | Mobile Phone | Apple | iPhone 13 | N/A | Peripheral |
| | | | | | |
| | | | | | |

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



2.6 Measurement Instruments List

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------|-----------------|-----------------|------------|---------------|---------------|
| 1. | L.I.S.N. | R&S | ENV216 | HKE-002 | Feb. 20, 2024 | 1 Year |
| 2. | L.I.S.N. | R&S | ENV216 | HKE-059 | Feb. 20, 2024 | 1 Year |
| 3. | EMI Test Receiver | R&S | ESR | HKE-005 | Feb. 20, 2024 | 1 Year |
| 4. | Spectrum analyzer | Agilent | N9020A | HKE-048 | Feb. 20, 2024 | 1 Year |
| 5. | Spectrum analyzer | R&S | FSV3044 | HKE-126 | Feb. 20, 2024 | 1 Year |
| 6. | Preamplifier | EMCI | EMC051845S | HKE-006 | Feb. 20, 2024 | 1 Year |
| 7. | Preamplifier | Schwarzbeck | BBV 9743 | HKE-016 | Feb. 20, 2024 | 1 Year |
| 8. | Preamplifier | A.H. Systems | SAS-574 | HKE-182 | Feb. 20, 2024 | 1 Year |
| 9. | 6dB Attenuator | Pasternack | 6db | HKE-184 | Feb. 20, 2024 | 1 Year |
| 10. | EMI Test Receiver | Rohde & Schwarz | ESR-7 | HKE-010 | Feb. 20, 2024 | 1 Year |
| 11. | Broadband Antenna | Schwarzbeck | VULB9168 | HKE-167 | Feb. 21, 2024 | 2 Year |
| 12. | Loop Antenna | COM-POWER | AL-130R | HKE-014 | Feb. 21, 2024 | 2 Year |
| 13. | Horn Antenna | Schwarzbeck | 9120D | HKE-013 | Feb. 21, 2024 | 2 Year |
| 14. | EMI Test Software | Tonscend | JS32-CE 2.5.0.6 | HKE-081 | / | / |
| 15. | EMI Test Software | Tonscend | JS32-RE 5.0.0 | HKE-082 | / | / |
| 16. | 10dB Attenuator | Schwarzbeck | VTSD9561F | HKE-153 | Feb. 20, 2024 | 1 Year |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



3. Conducted Emission Test

3.1 Block Diagram of Test Setup

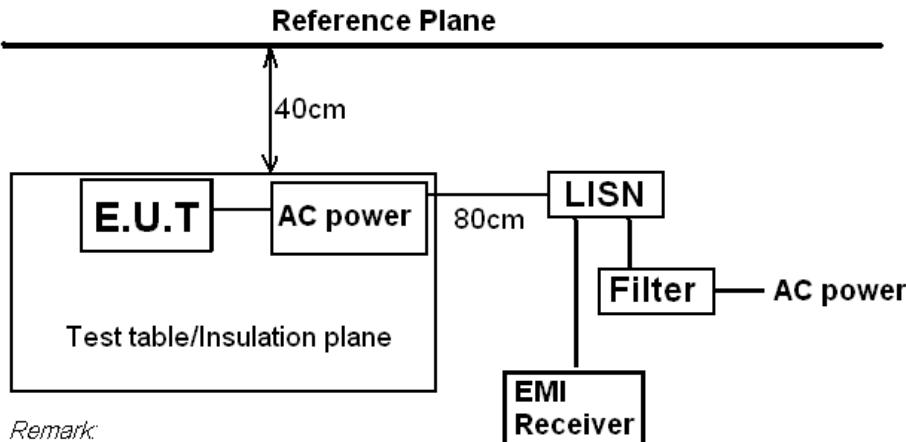

Remark:

E.U.T: Equipment Under Test

LISN: Line Impedance Stabilization Network

Test table height=0.8m

3.2 Conducted Power Line Emission Limit

According to FCC Part 15.207(a)

| Frequency (MHz) | Maximum RF Line Voltage (dB μ V) | | | |
|--------------------|--------------------------------------|------|---------|--------|
| | CLASS A | | CLASS B | |
| | Q.P. | Ave. | Q.P. | Ave. |
| 0.15 - 0.50 | 79 | 66 | 66-56* | 56-46* |
| 0.50 - 5.00 | 73 | 60 | 56 | 46 |
| 5.00 - 30.0 | 73 | 60 | 60 | 50 |

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207 Line Conducted Emission Limit is same as above table.

3.3 Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.




3.4 Test Result

PASS

All the test modes completed for test. Only the worst result of Full Load was reported as below:

Test Specification: Line

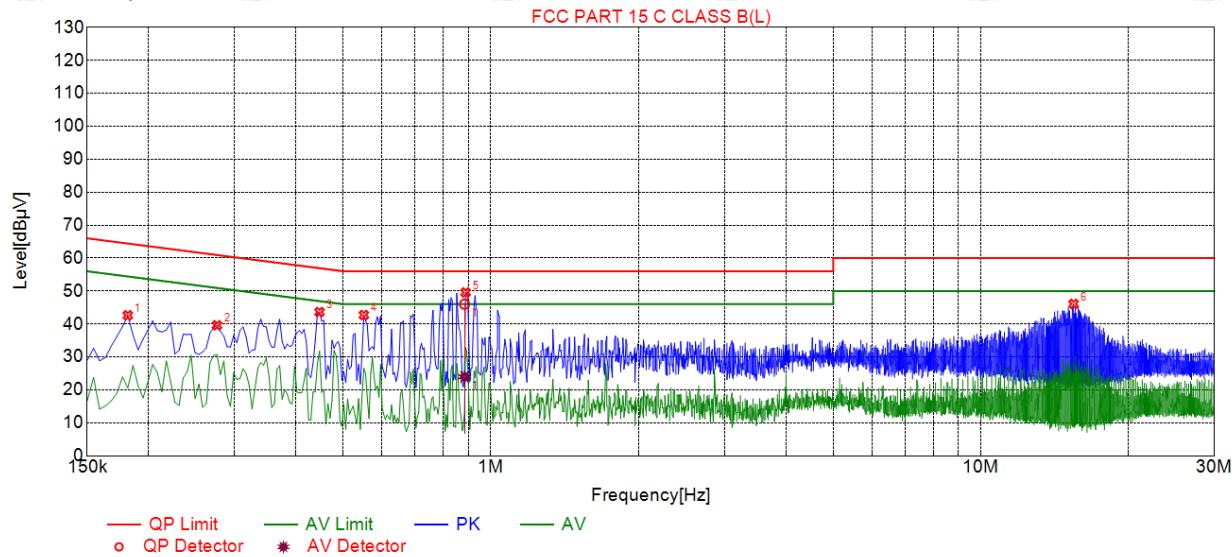

Suspected List

| NO. | Freq. [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Reading [dBμV] | Detector | Type |
|-----|-------------|--------------|-------------|--------------|-------------|----------------|----------|------|
| 1 | 0.1815 | 42.62 | 19.86 | 64.42 | 21.80 | 22.76 | PK | L |
| 2 | 0.2760 | 39.62 | 19.84 | 60.94 | 21.32 | 19.78 | PK | L |
| 3 | 0.4470 | 43.63 | 19.85 | 56.93 | 13.30 | 23.78 | PK | L |
| 4 | 0.5505 | 42.72 | 19.86 | 56.00 | 13.28 | 22.86 | PK | L |
| 5 | 0.8880 | 49.57 | 19.87 | 56.00 | 6.43 | 29.70 | PK | L |
| 6 | 15.4770 | 46.10 | 19.81 | 60.00 | 13.90 | 26.29 | PK | L |

Final Data List

| NO. | Freq. [MHz] | Correction factor[dB] | QP Value [dBμV] | QP Limit [dBμV] | QP Margin [dB] | QP Reading [dBμV] | AV Value [dBμV] | AV Limit [dBμV] | AV Margin [dB] | AV Reading [dBμV] | Type |
|-----|-------------|-----------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|-------------------|------|
| 1 | 0.8836 | 19.87 | 46.02 | 56.00 | 9.98 | 26.15 | 23.95 | 46.00 | 22.05 | 4.08 | L |


Remark: Margin = Limit – Level

Correction factor = Cable lose + ISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

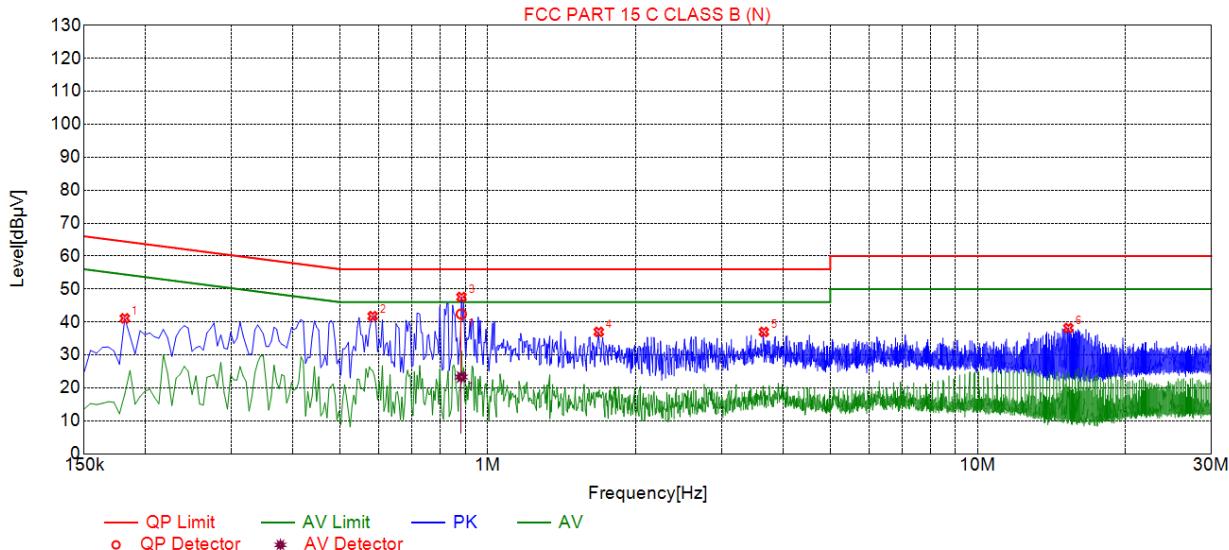

Suspected List

| NO. | Freq. [MHz] | Level [dB μ V] | Factor [dB] | Limit [dB μ V] | Margin [dB] | Reading [dB μ V] | Detector | Type |
|-----|-------------|--------------------|-------------|--------------------|-------------|----------------------|----------|------|
| 1 | 0.1815 | 41.11 | 19.75 | 64.42 | 23.31 | 21.36 | PK | N |
| 2 | 0.5820 | 41.76 | 19.74 | 56.00 | 14.24 | 22.02 | PK | N |
| 3 | 0.8835 | 47.59 | 19.74 | 56.00 | 8.41 | 27.85 | PK | N |
| 4 | 1.6845 | 36.99 | 19.82 | 56.00 | 19.01 | 17.17 | PK | N |
| 5 | 3.6600 | 36.98 | 19.97 | 56.00 | 19.02 | 17.01 | PK | N |
| 6 | 15.3150 | 38.16 | 19.81 | 60.00 | 21.84 | 18.35 | PK | N |

Final Data List

| NO. | Freq. [MHz] | Correction factor [dB] | QP Value [dB μ V] | QP Limit [dB μ V] | QP Margin [dB] | QP Reading [dB μ V] | AV Value [dB μ V] | AV Limit [dB μ V] | AV Margin [dB] | AV Reading [dB μ V] | Type |
|-----|-------------|------------------------|-----------------------|-----------------------|----------------|-------------------------|-----------------------|-----------------------|----------------|-------------------------|------|
| 1 | 0.8825 | 19.74 | 42.41 | 56.00 | 13.59 | 22.67 | 23.31 | 46.00 | 22.69 | 3.57 | N |

Remark: Margin = Limit – Level



Correction factor = Cable loss + ISN insertion loss

Level = Test receiver reading + correction factor



4. Radiated Emissions

4.1 Block Diagram of Test Setup

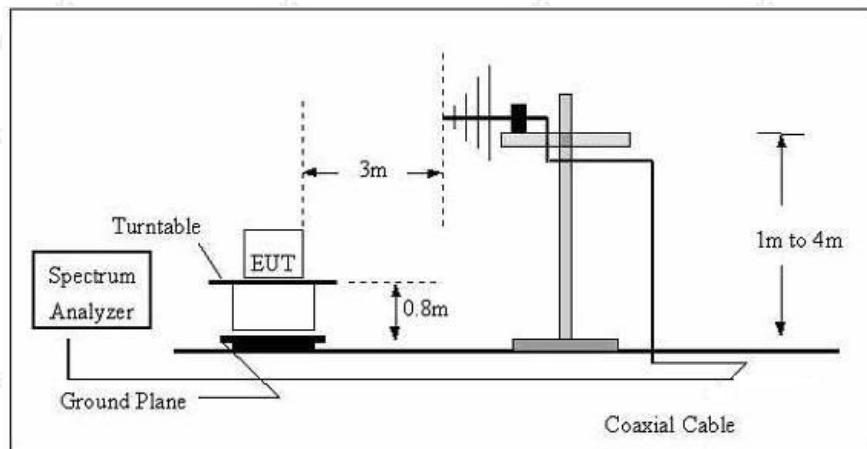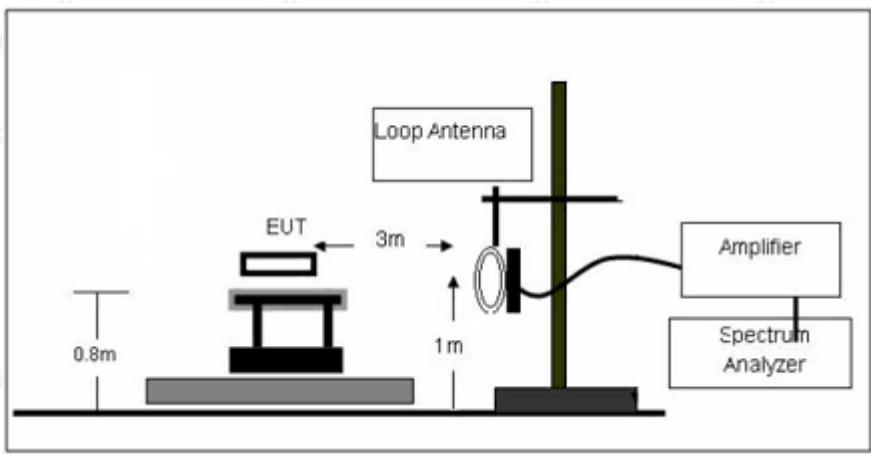

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



4.2 Rules and Specifications

CFR 47 Part 15, section 15.205

Only spurious emissions are permitted in any of the frequency bands listed the tables in these sections.

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| \1\ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (\2) |
| 13.36-13.41 | | | |

CFR 47 Part 15, section 15.209

The emissions from an intentional radiator shall not exceed the limits in the tables in these sections using an average detector.

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100** | 3 |
| 88-216 | 150** | 3 |
| 216-960 | 200** | 3 |
| Above 960 | 500 | 3 |

Limit calculation and transfer to 3m distance as showed in the following table:

| Frequency (MHz) | Limit (dBuV/m) | Distance (m) |
|-----------------|---------------------------------|--------------|
| 0.009-0.490 | 20log(2400/F(KHz))+40log(300/3) | 3 |
| 0.490-1.705 | 20log(24000/F(KHz))+40log(30/3) | 3 |
| 1.705-30.0 | 69.5 | 3 |
| 30-88 | 40.0 | 3 |
| 88-216 | 43.5 | 3 |
| 216-960 | 46.0 | 3 |
| Above 960 | 54.0 | 3 |

CFR 47 Part 15, section 15.35

When average radiated emission measurements are specified, the limit on the peak level of the radio Frequency emission is 20dB above the maximum permitted average emission limit.

| Transmitter Spurious Emissions 9KHz-30MHz | | | |
|---|----------|------------|--------------|
| | 9-150KHz | 150-490KHz | 490KHz-30MHz |
| Resolution Bandwidth | 200Hz | 9KHz | 9KHz |
| Video Bandwidth | 600Hz | 30KHz | 30KHz |
| Detector | Peak | Peak | Peak |
| Trace Mode | Max Hold | Max Hold | Max Hold |
| Sweep Time | Auto | Auto | Auto |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>



4.3 Test Procedure

Measurement distance 3m

For the measurement range up to 30MHz in the following plots the field strength result from 3m Distance measurement are extrapolated to 300m and 30m distance respectively, by 40dB/decade, According to part 15.31(f)(2), per antenna factor scaling.

Measurements below 1000MHz are performed with a peak detector and compared to average limits, Measurements with an average detector are not required.

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.




4.4 Test Result

PASS

Note: All the test modes completed for test. Only the worst result Full Load was reported as below:

For 9KHz - 30MHz

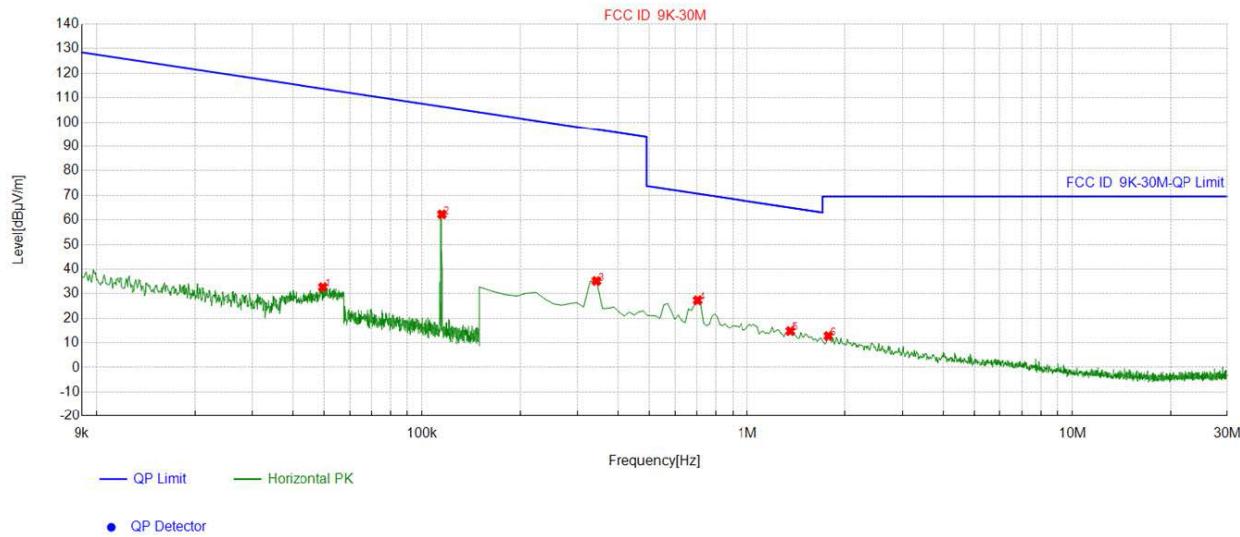

Suspected List


| NO. | Freq. [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----|----------------|----------------|---------------------------|-------------------------|-------------------------|----------------|
| 1 | 0.049628 | -10.38 | 43.07 | 32.69 | 113.68 | 80.99 |
| 2 | 0.114944 | -10.61 | 72.72 | 62.11 | 106.39 | 44.28 |
| 3 | 0.344122 | -11.29 | 46.46 | 35.17 | 96.87 | 61.70 |
| 4 | 0.702501 | -10.95 | 38.27 | 27.32 | 70.68 | 43.36 |
| 5 | 1.35953 | -10.51 | 25.33 | 14.82 | 64.96 | 50.14 |
| 6 | 1.777639 | -10.49 | 23.30 | 12.81 | 69.50 | 56.69 |

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



For 30MHz-1GHz

Antenna polarity: H

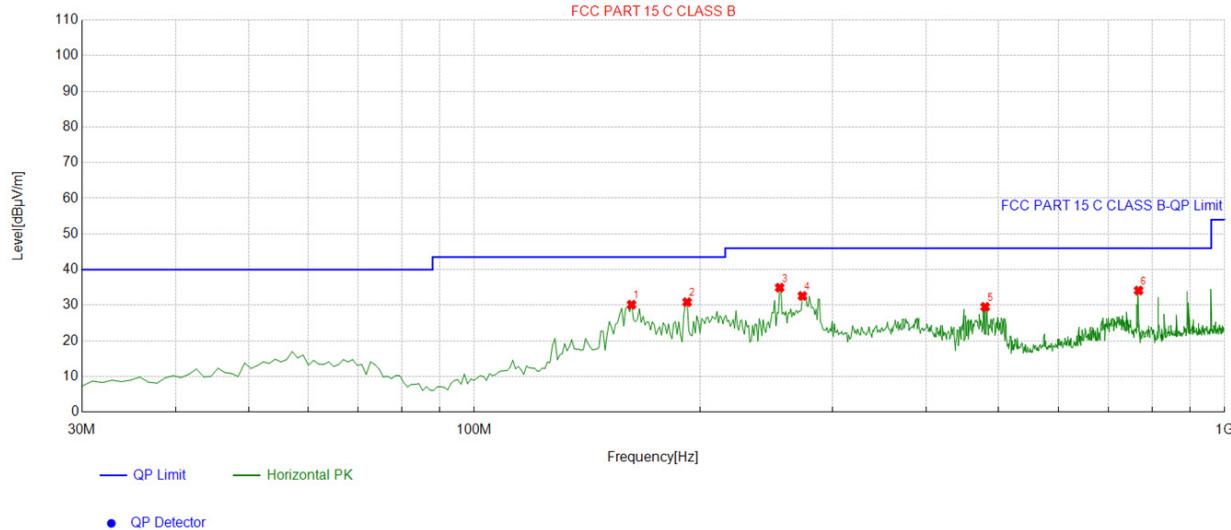


Suspected List

| NO. | Freq. [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-------------|-------------|------------------------|----------------------|----------------------|-------------|-------------|-----------|------------|
| 1 | 162.05205 | -17.59 | 47.74 | 30.15 | 43.50 | 13.35 | 100 | 256 | Horizontal |
| 2 | 192.15215 | -15.74 | 46.60 | 30.86 | 43.50 | 12.64 | 100 | 223 | Horizontal |
| 3 | 255.26526 | -13.62 | 48.55 | 34.93 | 46.00 | 11.07 | 100 | 115 | Horizontal |
| 4 | 273.71371 | -12.65 | 45.25 | 32.60 | 46.00 | 13.40 | 100 | 93 | Horizontal |
| 5 | 479.55956 | -8.27 | 37.80 | 29.53 | 46.00 | 16.47 | 100 | 99 | Horizontal |
| 6 | 767.93793 | -4.54 | 38.66 | 34.12 | 46.00 | 11.88 | 100 | 190 | Horizontal |

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



Antenna polarity: V

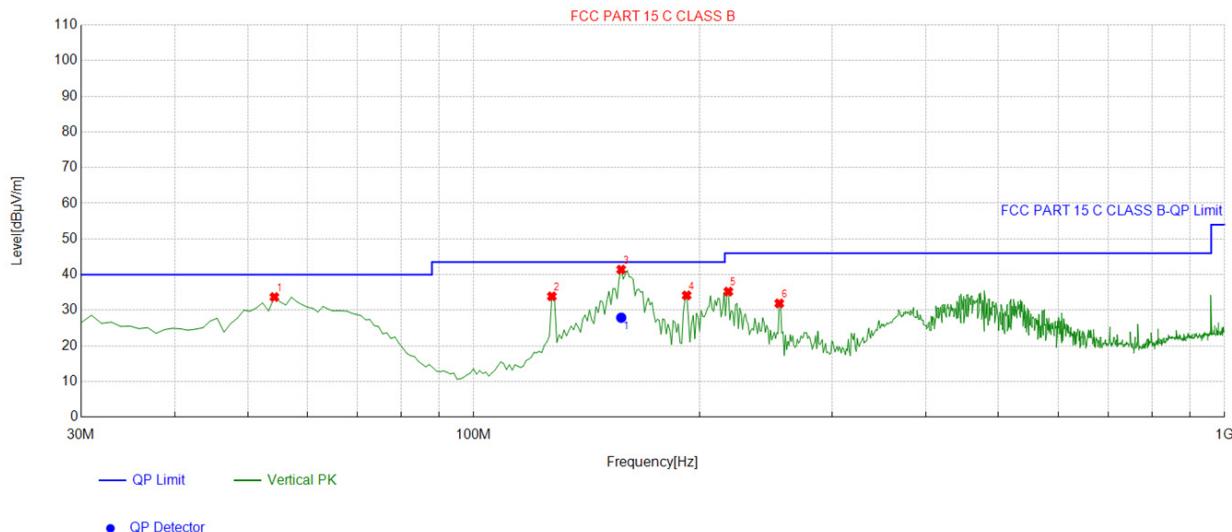**Suspected List**

| NO. | Freq. [MHz] | Factor [dB] | Reading [dB μ V/m] | Level [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|----------------|----------------|---------------------------|-------------------------|-------------------------|----------------|----------------|--------------|----------|
| 1 | 54.274274 | -13.50 | 47.20 | 33.70 | 40.00 | 6.30 | 100 | 154 | Vertical |
| 2 | 127.09709 | -17.13 | 51.02 | 33.89 | 43.50 | 9.61 | 100 | 88 | Vertical |
| 3 | 157.19719 | -17.77 | 59.17 | 41.40 | 43.50 | 2.10 | 100 | 250 | Vertical |
| 4 | 192.15215 | -15.74 | 49.90 | 34.16 | 43.50 | 9.34 | 100 | 44 | Vertical |
| 5 | 218.36836 | -14.63 | 49.85 | 35.22 | 46.00 | 10.78 | 100 | 19 | Vertical |
| 6 | 255.26526 | -13.62 | 45.53 | 31.91 | 46.00 | 14.09 | 100 | 49 | Vertical |

Final Data List

| NO. | Freq. [MHz] | Factor [dB] | QP Reading [dB μ V/m] | QP Value [dB μ V/m] | QP Limit [dB μ V/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|----------------|----------------|------------------------------|----------------------------|----------------------------|-------------------|----------------|--------------|----------|
| 1 | 157.1971 | -17.77 | 45.68 | 27.91 | 43.50 | 15.59 | 100 | 250 | Vertical |

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



5. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction



The antenna used in this product is a Coil Antenna, which permanently attached. It conforms to the standard requirements.

Antenna

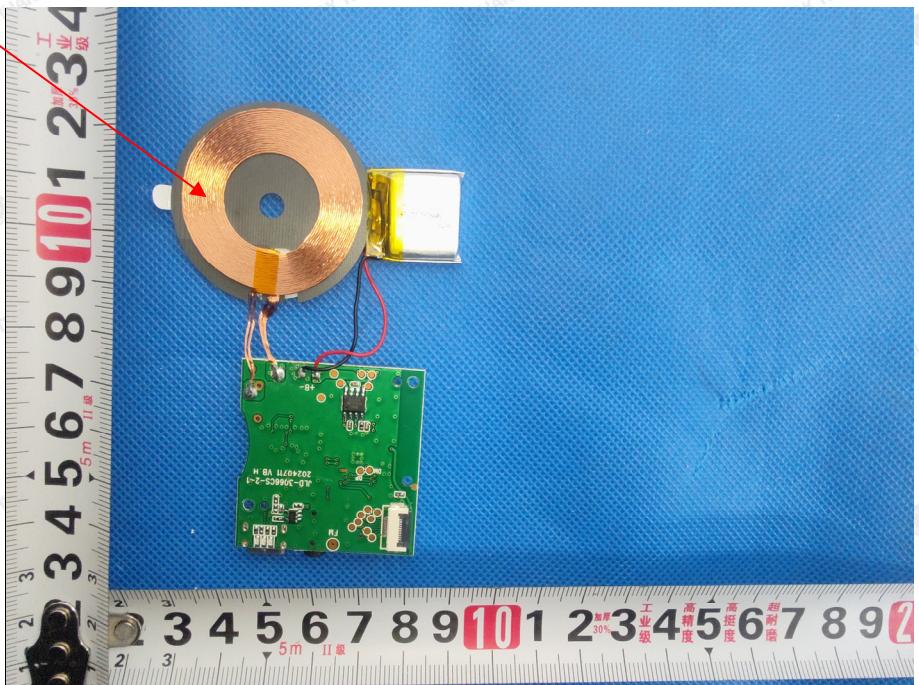



6. Photographs of Test

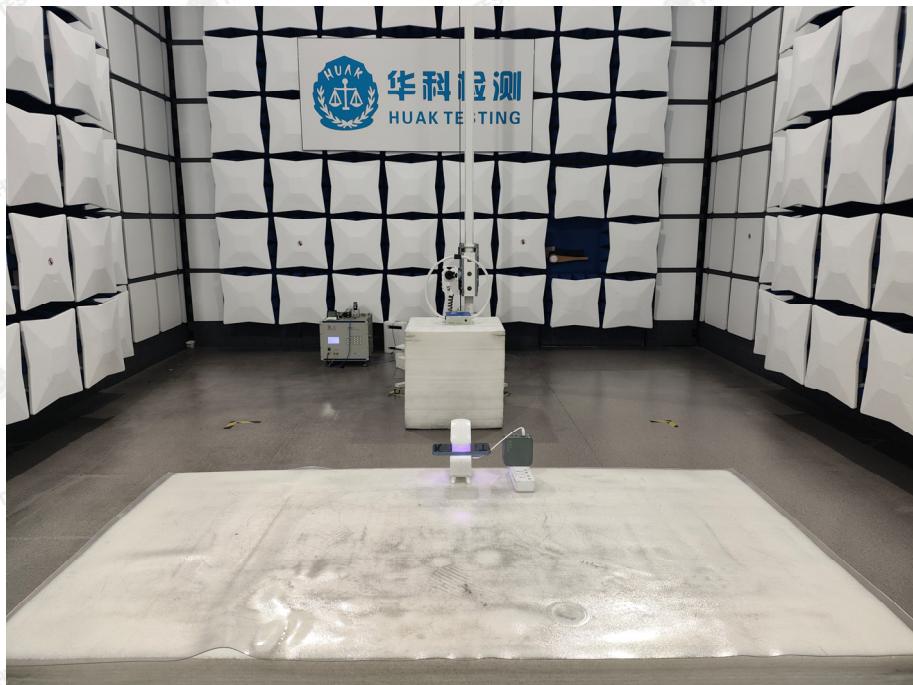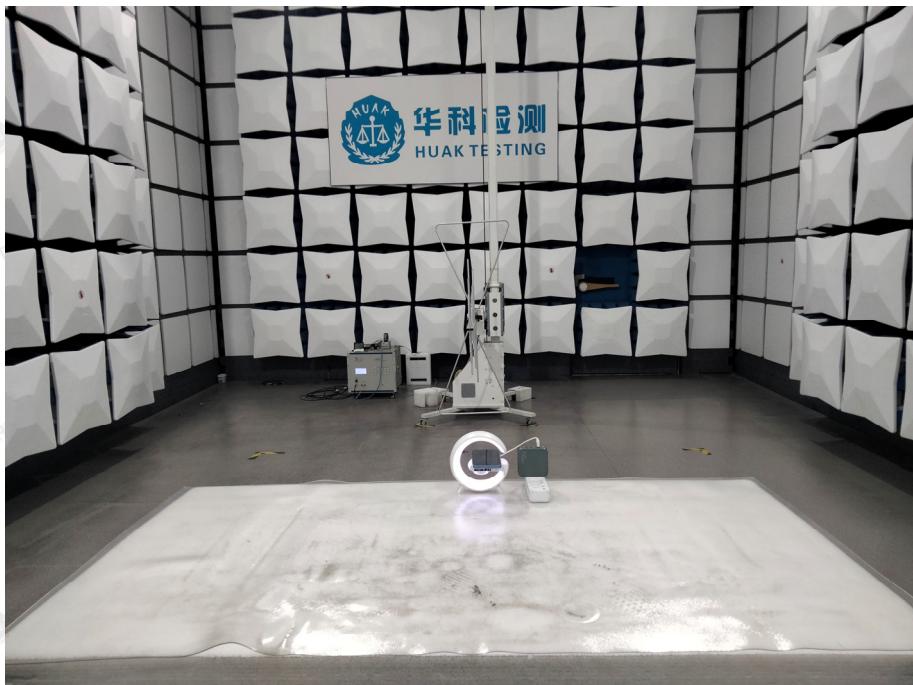Radiated Emission

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Conducted Emission**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



7. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----