

# TEST REPORT

|                                        |                                                                                                                                                                         |                                                                                       |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| FCC ID. .... :                         | 2BNNN-G10                                                                                                                                                               |                                                                                       |
| Test Report No..... :                  | TCT250123E003                                                                                                                                                           |                                                                                       |
| Date of issue..... :                   | Mar. 24, 2025                                                                                                                                                           |                                                                                       |
| Testing laboratory .....               | SHENZHEN TONGCE TESTING LAB                                                                                                                                             |                                                                                       |
| Testing location/ address:             | 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China                    |                                                                                       |
| Applicant's name..... :                | WaveCraft Studio LLC                                                                                                                                                    |                                                                                       |
| Address..... :                         | 1 Mason Ln, Irvine, CALIFORNIA 92618, United States                                                                                                                     |                                                                                       |
| Manufacturer's name ... :              | WaveCraft Studio LLC                                                                                                                                                    |                                                                                       |
| Address..... :                         | 1 Mason Ln, Irvine, CALIFORNIA 92618, United States                                                                                                                     |                                                                                       |
| Standard(s) .....                      | FCC CFR Title 47 Part 15 Subpart E Section 15.407<br>KDB 662911 D01 Multiple Transmitter Output v02r01<br>KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 |                                                                                       |
| Product Name..... :                    | Window Cam G10                                                                                                                                                          |                                                                                       |
| Trade Mark .....                       | N/A                                                                                                                                                                     |                                                                                       |
| Model/Type reference..... :            | G10S, G10G, G10, A-CW8341C-H, CW8341C                                                                                                                                   |                                                                                       |
| Rating(s)..... :                       | Refer to EUT description of page 3                                                                                                                                      |                                                                                       |
| Date of receipt of test item .....     | Jan. 23, 2025                                                                                                                                                           |                                                                                       |
| Date (s) of performance of test..... : | Jan. 23, 2025 ~ Mar. 24, 2025                                                                                                                                           |                                                                                       |
| Tested by (+signature) ... :           | Yannie ZHONG                                                                                                                                                            |  |
| Check by (+signature).... :            | Beryl ZHAO                                                                                                                                                              |  |
| Approved by (+signature):              | Tomsin                                                                                                                                                                  |  |

**General disclaimer:**

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

## TABLE OF CONTENTS

|                                                      |          |
|------------------------------------------------------|----------|
| <b>1. General Product Information .....</b>          | <b>3</b> |
| 1.1. EUT description .....                           | 3        |
| 1.2. Model(s) list.....                              | 3        |
| 1.3. Test Frequency .....                            | 4        |
| <b>2. Test Result Summary .....</b>                  | <b>5</b> |
| <b>3. General Information.....</b>                   | <b>6</b> |
| 3.1. Test environment and mode.....                  | 6        |
| 3.2. Description of Support Units.....               | 7        |
| <b>4. Facilities and Accreditations .....</b>        | <b>8</b> |
| 4.1. Facilities .....                                | 8        |
| 4.2. Location .....                                  | 8        |
| 4.3. Measurement Uncertainty.....                    | 8        |
| <b>5. Test Results and Measurement Data .....</b>    | <b>9</b> |
| 5.1. Antenna requirement .....                       | 9        |
| 5.2. Conducted Emission.....                         | 10       |
| 5.3. Maximum Conducted Output Power .....            | 14       |
| 5.4. 6dB Emission Bandwidth.....                     | 16       |
| 5.5. 26dB Bandwidth and 99% Occupied Bandwidth ..... | 17       |
| 5.6. Power Spectral Density.....                     | 18       |
| 5.7. Band edge .....                                 | 19       |
| 5.8. Unwanted Emissions .....                        | 30       |
| 5.9. Frequency Stability Measurement .....           | 45       |
| <b>Appendix A: Test Result of Conducted Test</b>     |          |
| <b>Appendix B: Photographs of Test Setup</b>         |          |
| <b>Appendix C: Photographs of EUT</b>                |          |

## 1. General Product Information

### 1.1. EUT description

|                             |                                                                                                                                                                                                                                       |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name.....:          | Window Cam G10                                                                                                                                                                                                                        |
| Model/Type reference.....:  | G10S                                                                                                                                                                                                                                  |
| Sample Number.....:         | TCT250123E001-0101                                                                                                                                                                                                                    |
| Operation Frequency .....   | Band 1: 5180 MHz ~ 5240 MHz<br>Band 3: 5745 MHz ~ 5825 MHz                                                                                                                                                                            |
| Channel Bandwidth.....:     | 802.11a: 20MHz<br>802.11n: 20MHz, 40MHz<br>802.11ac: 20MHz, 40MHz<br>802.11ax: 20MHz, 40MHz                                                                                                                                           |
| Modulation Technology ..... | Orthogonal Frequency Division Multiplexing (OFDM)                                                                                                                                                                                     |
| Modulation Type.....:       | 256QAM, 64QAM, 16QAM, BPSK, QPSK                                                                                                                                                                                                      |
| Antenna Type.....:          | Chip Antenna                                                                                                                                                                                                                          |
| Antenna Gain.....:          | Band 1: 1.77dBi<br>Band 3: 2.04dBi                                                                                                                                                                                                    |
| Rating(s).....:             | Adapter Information 1/2:<br>MODEL: BS05A-0501000US<br>INPUT: AC 100-240V, 50/60Hz, 0.25A Max<br>OUTPUT: DC 5V, 1000mA<br>Adapter Information 3:<br>Model: CS-0501000<br>Input: AC 100-240V, 50/60Hz, 0.5A Max.<br>Output: DC 5V, 1.0A |

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

### 1.2. Model(s) list

| No.          | Model No.                       | Tested with                         |
|--------------|---------------------------------|-------------------------------------|
| 1            | G10S                            | <input checked="" type="checkbox"/> |
| Other models | G10G, G10, A-CW8341C-H, CW8341C | <input type="checkbox"/>            |

Note: G10S is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names, image pixel, flash memory capacity and product appearance color. So the test data of G10S can represent the remaining models.

### 1.3. Test Frequency

#### Band 1

| 20MHz   |           | 40MHz   |           |
|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency |
| 36      | 5180      | 38      | 5190      |
| 40      | 5200      | 46      | 5230      |
| 48      | 5240      |         |           |

#### Band 3

| 20MHz   |           | 40MHz   |           |
|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency |
| 149     | 5745      | 151     | 5755      |
| 157     | 5785      | 159     | 5795      |
| 165     | 5825      |         |           |

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

## 2. Test Result Summary

| Requirement                                     | CFR 47 Section | Result |
|-------------------------------------------------|----------------|--------|
| Antenna requirement                             | §15.203        | PASS   |
| AC Power Line Conducted Emission                | §15.207        | PASS   |
| Maximum Conducted Output Power                  | §15.407(a)     | PASS   |
| 6dB Emission Bandwidth                          | §15.407(a)     | PASS   |
| 26dB Emission Bandwidth& 99% Occupied Bandwidth | §15.407(a)     | PASS   |
| Power Spectral Density                          | §15.407(a)     | PASS   |
| Restricted Bands around fundamental frequency   | §15.407(b)     | PASS   |
| Radiated Emission                               | §15.407(b)     | PASS   |
| Frequency Stability                             | §15.407(g)     | PASS   |

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. For the band 5.15-5.25GHz, EUT meet the requirements of 15.407(a)(ii).

### 3. General Information

#### 3.1. Test environment and mode

| Operating Environment:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                |                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-------------------|
| Condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Conducted Emission                                                                             | Radiated Emission |
| Temperature:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 24.8 °C                                                                                        | 24.9 °C           |
| Humidity:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 54 % RH                                                                                        | 50 % RH           |
| Atmospheric Pressure:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 1010 mbar                                                                                      | 1010 mbar         |
| Test Software:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                |                   |
| Software Information:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | SSCOM V5.13.1                                                                                  |                   |
| Power Level:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 10                                                                                             |                   |
| Test Mode:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                |                   |
| Engineer mode:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Keep the EUT in continuous transmitting by select channel and modulations with max duty cycle. |                   |
| The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. |                                                                                                |                   |

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

**Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.**

| Mode            | Data rate |
|-----------------|-----------|
| 802.11a         | 6 Mbps    |
| 802.11n(HT20)   | 6.5 Mbps  |
| 802.11n(HT40)   | 13.5 Mbps |
| 802.11ac(VHT20) | 6.5 Mbps  |
| 802.11ac(VHT40) | 13.5 Mbps |
| 802.11ax(HE20)  | 6.5Mbps   |
| 802.11ax(HE40)  | 13.5Mbps  |

### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Equipment | Model No. | Serial No. | FCC ID | Trade Name |
|-----------|-----------|------------|--------|------------|
| /         | /         | /          | /      | /          |

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

## 4. Facilities and Accreditations

### 4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Innovation, Science and Economic Development Canada for radio equipment testing.

### 4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

### 4.3. Measurement Uncertainty


The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                                    | MU            |
|-----|-----------------------------------------|---------------|
| 1   | Conducted Emission                      | $\pm 3.10$ dB |
| 2   | RF power, conducted                     | $\pm 0.12$ dB |
| 3   | Spurious emissions, conducted           | $\pm 0.11$ dB |
| 4   | All emissions, radiated(<1 GHz)         | $\pm 4.56$ dB |
| 5   | All emissions, radiated(1 GHz - 18 GHz) | $\pm 4.22$ dB |
| 6   | All emissions, radiated(18 GHz- 40 GHz) | $\pm 4.36$ dB |

## 5. Test Results and Measurement Data

### 5.1. Antenna requirement

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                      | FCC Part15 C Section 15.203 /247(c) |
| <p>15.203 requirement:<br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> |                                     |
| <b>E.U.T Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                     |
| <p>The WIFI antenna is chip antenna which permanently attached, and the best case gain of the antenna is 2.04dBi of UNII-3.</p>                                                                                                                                                                                                                                                                                                                                                   |                                     |

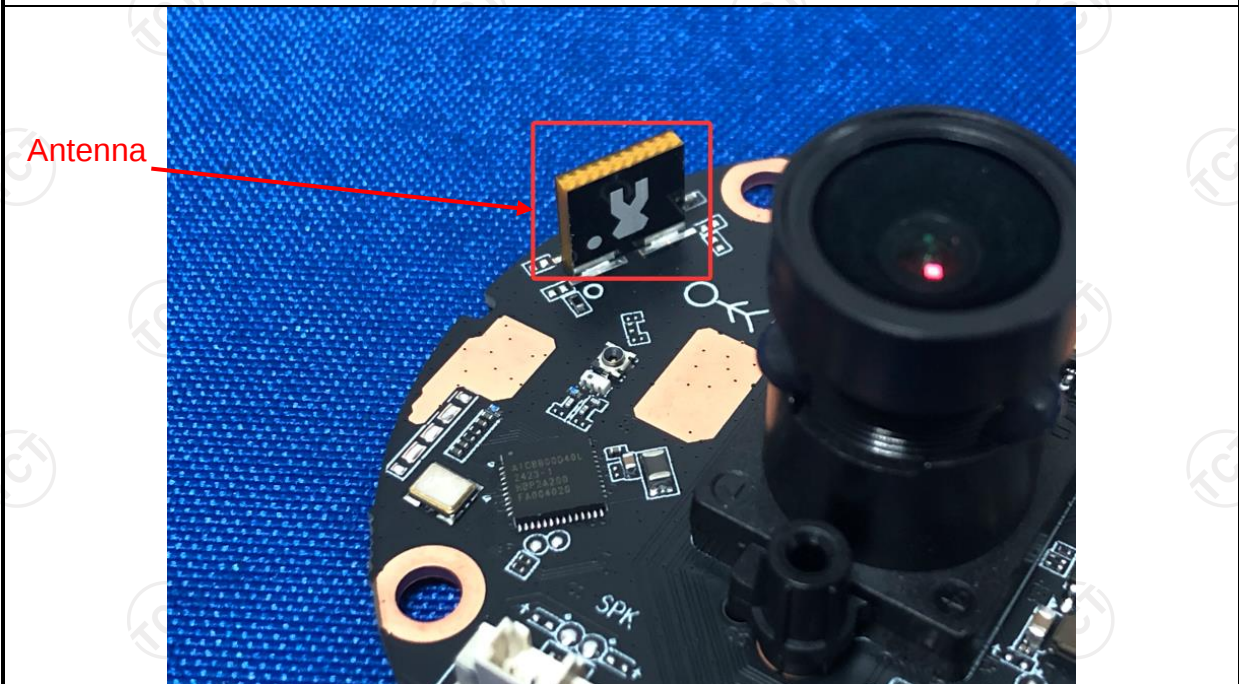

## 5.2. Conducted Emission

### 5.2.1. Test Specification

| Test Requirement:     | FCC Part15 C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Test Method:          | ANSI C63.10:2020                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Frequency Range:      | 150 kHz to 30 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Receiver setup:       | RBW=9 kHz, VBW=30 kHz, Sweep time=auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Limits:               | <table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                                               | Frequency range (MHz) | Limit (dBuV) |  | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dBuV)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
|                       | Quasi-peak                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Average               |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 0.15-0.5              | 66 to 56*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 56 to 46*             |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 0.5-5                 | 56                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 46                    |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 5-30                  | 60                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 50                    |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Test Setup:           | <div><p>Reference Plane</p><p>40cm</p><p>E.U.T</p><p>AC power</p><p>80cm</p><p>LISN</p><p>Filter</p><p>AC power</p><p>EMI Receiver</p><p>Test table/Insulation plane</p><p>Remark:<br/>E.U.T: Equipment Under Test<br/>LISN: Line Impedance Stabilization Network<br/>Test table height=0.8m</p></div>                                                                                                                                                                                                                                                                                                                                                                                                                               |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Test Mode:            | Transmitting Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Test Procedure:       | <div><div>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.</div></div> |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
| Test Result:          | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |


## 5.2.2. Test Instruments

| Conducted Emission Shielding Room Test Site (843) |              |           |               |               |               |
|---------------------------------------------------|--------------|-----------|---------------|---------------|---------------|
| Equipment                                         | Manufacturer | Model     | Serial Number | Date of Cal.  | Due Date      |
| EMI Test Receiver                                 | R&S          | ESCI3     | 100898        | Jun. 27, 2024 | Jun. 26, 2025 |
| LISN                                              | Schwarzbeck  | NSLK 8126 | 8126453       | Jan. 21, 2025 | Jan. 20, 2026 |
| Attenuator                                        | N/A          | 10dB      | 164080        | Jun. 27, 2024 | Jun. 26, 2025 |
| Line-5                                            | TCT          | CE-05     | /             | Jun. 27, 2024 | Jun. 26, 2025 |
| EMI Test Software                                 | EZ_EMG       | EMEC-3A1  | 1.1.4.2       | /             | /             |

## 5.2.3. Test data

Please refer to following diagram for individual

### Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

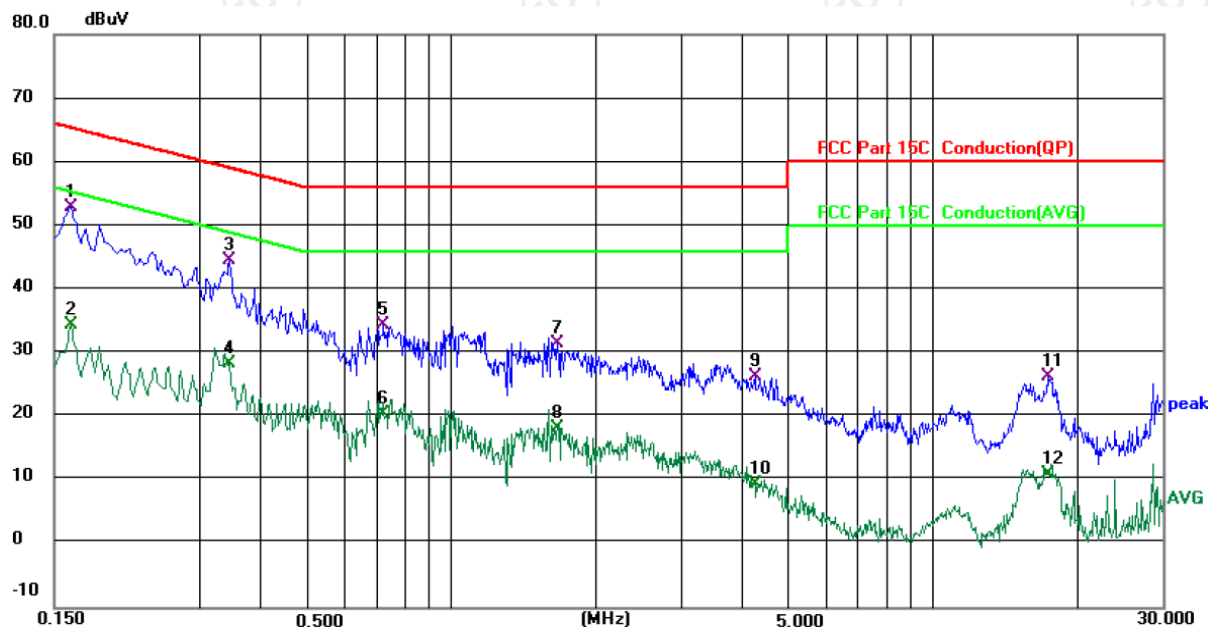

Site 844 Shielding Room

Phase: L1

Temperature: 24.8 (°C)

Humidity: 54 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120V/60Hz

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBμV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBμV | Limit<br>dBμV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   | *   | 0.1620       | 43.04                    | 9.95                    | 52.99                    | 65.36         | -12.37     | QP       |         |
| 2   |     | 0.1620       | 24.45                    | 9.95                    | 34.40                    | 55.36         | -20.96     | AVG      |         |
| 3   |     | 0.3457       | 34.61                    | 9.93                    | 44.54                    | 59.07         | -14.53     | QP       |         |
| 4   |     | 0.3457       | 18.34                    | 9.93                    | 28.27                    | 49.07         | -20.80     | AVG      |         |
| 5   |     | 0.7258       | 24.60                    | 9.90                    | 34.50                    | 56.00         | -21.50     | QP       |         |
| 6   |     | 0.7258       | 10.66                    | 9.90                    | 20.56                    | 46.00         | -25.44     | AVG      |         |
| 7   |     | 1.6700       | 21.57                    | 9.99                    | 31.56                    | 56.00         | -24.44     | QP       |         |
| 8   |     | 1.6700       | 8.33                     | 9.99                    | 18.32                    | 46.00         | -27.68     | AVG      |         |
| 9   |     | 4.2900       | 16.23                    | 10.12                   | 26.35                    | 56.00         | -29.65     | QP       |         |
| 10  |     | 4.2900       | -0.72                    | 10.12                   | 9.40                     | 46.00         | -36.60     | AVG      |         |
| 11  |     | 17.3460      | 15.91                    | 10.52                   | 26.43                    | 60.00         | -33.57     | QP       |         |
| 12  |     | 17.3460      | 0.59                     | 10.52                   | 11.11                    | 50.00         | -38.89     | AVG      |         |

#### Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

## Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

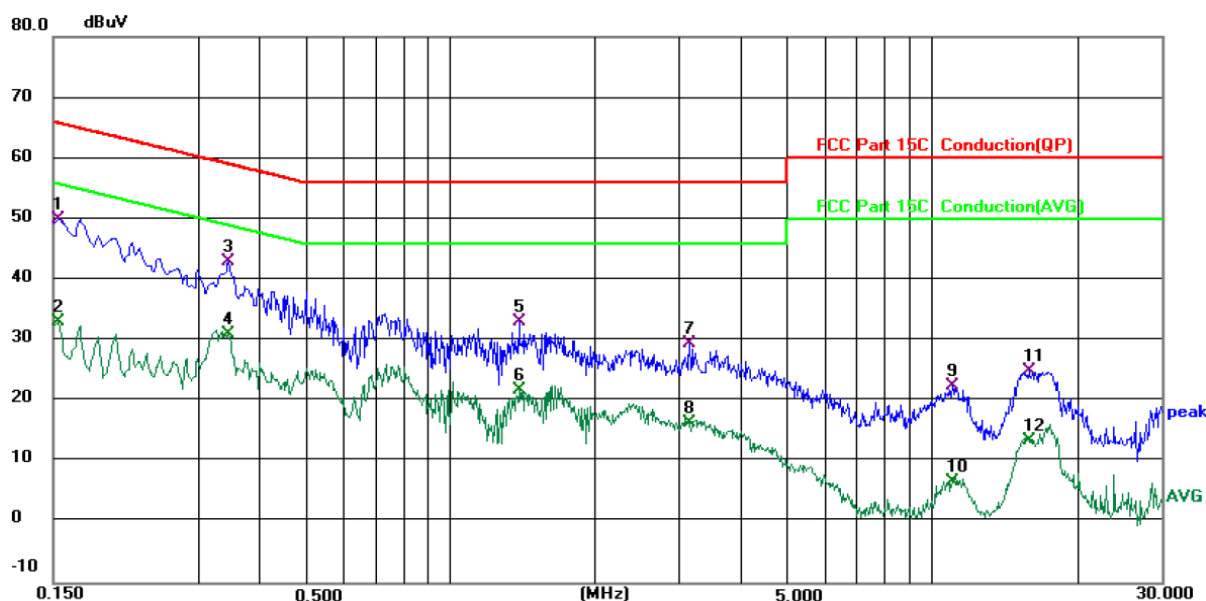

Site 844 Shielding Room

Phase: **N**

Temperature: 24.8 (°C)

Humidity: 54 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120V/60Hz

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Over   |          |         |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz     | dBμV          | dB             | dBμV        | dBμV  | dB     | Detector | Comment |
| 1   | *   | 0.1539  | 40.08         | 9.94           | 50.02       | 65.79 | -15.77 | QP       |         |
| 2   |     | 0.1539  | 23.04         | 9.94           | 32.98       | 55.79 | -22.81 | AVG      |         |
| 3   |     | 0.3457  | 33.07         | 9.93           | 43.00       | 59.07 | -16.07 | QP       |         |
| 4   |     | 0.3457  | 21.08         | 9.93           | 31.01       | 49.07 | -18.06 | AVG      |         |
| 5   |     | 1.3900  | 22.98         | 10.00          | 32.98       | 56.00 | -23.02 | QP       |         |
| 6   |     | 1.3900  | 11.89         | 10.00          | 21.89       | 46.00 | -24.11 | AVG      |         |
| 7   |     | 3.1538  | 19.36         | 10.07          | 29.43       | 56.00 | -26.57 | QP       |         |
| 8   |     | 3.1538  | 6.28          | 10.07          | 16.35       | 46.00 | -29.65 | AVG      |         |
| 9   |     | 11.0579 | 12.09         | 10.37          | 22.46       | 60.00 | -37.54 | QP       |         |
| 10  |     | 11.0579 | -3.64         | 10.37          | 6.73        | 50.00 | -43.27 | AVG      |         |
| 11  |     | 15.9500 | 14.44         | 10.50          | 24.94       | 60.00 | -35.06 | QP       |         |
| 12  |     | 15.9500 | 2.98          | 10.50          | 13.48       | 50.00 | -36.52 | AVG      |         |

### Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Measurements were conducted in all three channels (high, middle, low) and all modulation (802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ax(HE20), 802.11ax(HE40)) and the worst case Mode (Lowest channel and 802.11a) was submitted only. And the test data in this project is powered by adapter 1 which is in the worse case.

## 5.3. Maximum Conducted Output Power

### 5.3.1. Test Specification

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |      |                                                                                   |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------------------------------------------------------------------------------|
| <b>Test Requirement:</b> | FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046                                                                                                                                                                                                                                                                                                                                                                                                                                                              |      |                                                                                   |
| <b>Test Method:</b>      | KDB662911 D01 Multiple Transmitter Output v02r01<br>KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E                                                                                                                                                                                                                                                                                                                                                                                            |      |                                                                                   |
| <b>Limit:</b>            | Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Band | Limit                                                                             |
|                          | 5180 - 5240                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      | 24dBm(250mW) for client device                                                    |
|                          | 5260 - 5320                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      | 24dBm(250mW) or 11 dBm + 10 log B, B is the 26 dB emission bandwidth in megahertz |
|                          | 5470 - 5725                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      | 24dBm(250mW) or 11 dBm + 10 log B, B is the 26 dB emission bandwidth in megahertz |
|                          | 5745 - 5825                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      | 30dBm(1W)                                                                         |
| <b>Test Setup:</b>       |  <p>The diagram illustrates the test setup. On the left is a green rectangular device labeled 'Power meter'. A black line representing an RF cable connects it to a yellow rectangular device on the right labeled 'EUT'.</p>                                                                                                                                                                                                    |      |                                                                                   |
| <b>Test Mode:</b>        | Transmitting mode with modulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |      |                                                                                   |
| <b>Test Procedure:</b>   | <ol style="list-style-type: none"> <li>1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a</li> <li>2. The RF output of EUT was connected to the power meter by RF cable. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>5. Measure the conducted output power and record the results in the test report.</li> </ol> |      |                                                                                   |
| <b>Test Result:</b>      | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |      |                                                                                   |

### 5.3.2. Test Instruments

| Equipment         | Manufacturer | Model     | Serial Number | Date of Cal.  | Due Date      |
|-------------------|--------------|-----------|---------------|---------------|---------------|
| Spectrum Analyzer | Agilent      | N9020A    | MY49100619    | Jun. 27, 2024 | Jun. 26, 2025 |
| Power Meter       | Agilent      | E4418B    | MY45100357    | Jun. 27, 2024 | Jun. 26, 2025 |
| Power Sensor      | Agilent      | 8184A     | MY41096530    | Jun. 27, 2024 | Jun. 26, 2025 |
| Combiner Box      | Ascentest    | AT890-RFB | /             | /             | /             |

## 5.4. 6dB Emission Bandwidth

### 5.4.1. Test Specification

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Requirement:</b> | FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Test Method:</b>      | KDB662911 D01 Multiple Transmitter Output v02r01<br>KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Limit:</b>            | >500kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Test Setup:</b>       |  <p style="text-align: center;">Spectrum Analyzer                      EUT</p>                                                                                                                                                                                                                                                                                                                                                        |
| <b>Test Mode:</b>        | Transmitting mode with modulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Test Procedure:</b>   | <ol style="list-style-type: none"> <li>1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.</li> <li>4. Measure and record the results in the test report.</li> </ol> |
| <b>Test Result:</b>      | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

### 5.4.2. Test Instruments

| Equipment         | Manufacturer | Model No. | Serial Number | Date of Cal.  | Due Date      |
|-------------------|--------------|-----------|---------------|---------------|---------------|
| Spectrum Analyzer | Agilent      | N9020A    | MY49100619    | Jun. 27, 2024 | Jun. 26, 2025 |
| Combiner Box      | Ascentest    | AT890-RFB | /             | /             | /             |

## 5.5. 26dB Bandwidth and 99% Occupied Bandwidth

### 5.5.1. Test Specification

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Requirement:</b> | 47 CFR Part 15C Section 15.407 (a)& Part 2 J Section 2.1049                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Test Method:</b>      | KDB662911 D01 Multiple Transmitter Output v02r01<br>KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D                                                                                                                                                                                                                                                                                                                                                          |
| <b>Limit:</b>            | No restriction limits                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Test Setup:</b>       |  <p>Spectrum Analyzer                      EUT</p>                                                                                                                                                                                                                                                                                                                                               |
| <b>Test Mode:</b>        | Transmitting mode with modulation                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Test Procedure:</b>   | <ol style="list-style-type: none"> <li>1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW. Set the Video bandwidth (VBW) = 3 *RBW. In order to make an accurate measurement.</li> <li>4. Measure and record the results in the test report.</li> </ol> |
| <b>Test Result:</b>      | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

### 5.5.2. Test Instruments

| Equipment         | Manufacturer | Model No. | Serial Number | Date of Cal.  | Due Date      |
|-------------------|--------------|-----------|---------------|---------------|---------------|
| Spectrum Analyzer | Agilent      | N9020A    | MY49100619    | Jun. 27, 2024 | Jun. 26, 2025 |
| Combiner Box      | Ascentest    | AT890-RFB | /             | /             | /             |

## 5.6. Power Spectral Density

### 5.6.1. Test Specification


|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Requirement:</b> | FCC Part15 E Section 15.407 (a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Test Method:</b>      | KDB662911 D01 Multiple Transmitter Output v02r01<br>KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Limit:</b>            | $\leq 11.00\text{dBm/MHz}$ for Band 1 5150MHz-5250MHz(client device)<br>$\leq 11.00\text{dBm/MHz}$ for Band 2A&2C 5250-5350&5470-5725<br>$\leq 30.00\text{dBm/500KHz}$ for Band 3 5725MHz-5850MHz<br>The e.i.r.p spectral density for Band 1 5150MHz – 5250 MHz should not exceed 10dBm/MHz                                                                                                                                                                                                                                                                                       |
| <b>Test Setup:</b>       |  <p style="text-align: center;">Spectrum Analyzer                      EUT</p>                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Test Mode:</b>        | Transmitting mode with modulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Test Procedure:</b>   | 1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.<br>1. Set RBW = 510 kHz/1 MHz, VBW $\geq 3 \times$ RBW, Sweep time = Auto, Detector = RMS.<br>2. Allow the sweeps to continue until the trace stabilizes.<br>3. Use the peak marker function to determine the maximum amplitude level.<br>4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment. |
| <b>Test Result:</b>      | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

### 5.6.2. Test Instruments

| Equipment         | Manufacturer | Model No. | Serial Number | Date of Cal.  | Due Date      |
|-------------------|--------------|-----------|---------------|---------------|---------------|
| Spectrum Analyzer | Agilent      | N9020A    | MY49100619    | Jun. 27, 2024 | Jun. 26, 2025 |
| Combiner Box      | Ascentest    | AT890-RFB | /             | /             | /             |

## 5.7. Band edge

### 5.7.1. Test Specification
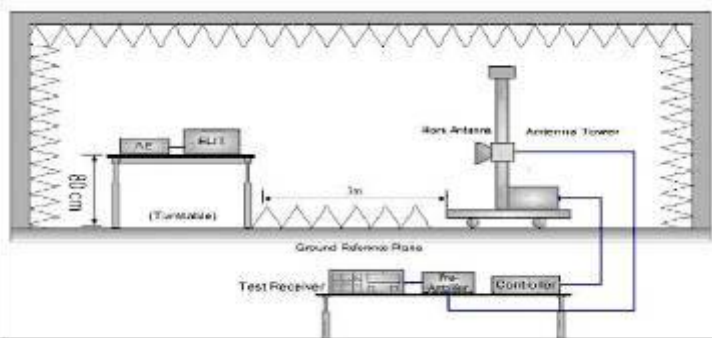
| Test Requirement:                                                                                                                       | FCC CFR47 Part 15E Section 15.407                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                 |                 |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|-----------------|-----------------|--------|----------|-----------|---------|-----------|--------|-----------|---------|-----------|---------|-----------|--------|-----------|---------|--------|-----|
| Test Method:                                                                                                                            | ANSI C63.10:2020                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |                 |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
| Limit:                                                                                                                                  | In un-restricted band:<br>For Band 1&2A&2C: -27dBm/MHz<br>For Band 3:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                 |                 |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
|                                                                                                                                         | <table><tr><th>Frequency (MHz)</th><th>Limit (dBm/MHz)</th><th>Frequency (MHz)</th><th>Limit (dBm/MHz)</th></tr><tr><td>&lt; 5650</td><td>-27</td><td>5850~5855</td><td>27~15.6</td></tr><tr><td>5650~5700</td><td>-27~10</td><td>5855~5875</td><td>15.6~10</td></tr><tr><td>5700~5720</td><td>10~15.6</td><td>5875~5925</td><td>10~-27</td></tr><tr><td>5720~5725</td><td>15.6~27</td><td>&gt; 5925</td><td>-27</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Frequency (MHz) | Limit (dBm/MHz) | Frequency (MHz) | Limit (dBm/MHz) | < 5650 | -27      | 5850~5855 | 27~15.6 | 5650~5700 | -27~10 | 5855~5875 | 15.6~10 | 5700~5720 | 10~15.6 | 5875~5925 | 10~-27 | 5720~5725 | 15.6~27 | > 5925 | -27 |
|                                                                                                                                         | Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Limit (dBm/MHz) | Frequency (MHz) | Limit (dBm/MHz) |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
|                                                                                                                                         | < 5650                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | -27             | 5850~5855       | 27~15.6         |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
|                                                                                                                                         | 5650~5700                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | -27~10          | 5855~5875       | 15.6~10         |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
| 5700~5720                                                                                                                               | 10~15.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 5875~5925       | 10~-27          |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
| 5720~5725                                                                                                                               | 15.6~27                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | > 5925          | -27             |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
| E[dBμV/m] = EIRP[dBm] + 95.2 @3m                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                 |                 |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
| In restricted band:                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                 |                 |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
| <table><tr><th>Detector</th><th>Limit@3m</th></tr><tr><td>Peak</td><td>74dBμV/m</td></tr><tr><td>AVG</td><td>54dBμV/m</td></tr></table> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Detector        | Limit@3m        | Peak            | 74dBμV/m        | AVG    | 54dBμV/m |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
| Detector                                                                                                                                | Limit@3m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                 |                 |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
| Peak                                                                                                                                    | 74dBμV/m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                 |                 |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
| AVG                                                                                                                                     | 54dBμV/m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                 |                 |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
| Test Setup:                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                 |                 |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
| Test Mode:                                                                                                                              | Transmitting mode with modulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                 |                 |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |
| Test Procedure:                                                                                                                         | <p>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold</p> |                 |                 |                 |                 |        |          |           |         |           |        |           |         |           |         |           |        |           |         |        |     |


|                     |                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     | <p>Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi peak or average method as specified and then reported in a data sheet.</p> |
| <b>Test Result:</b> | PASS                                                                                                                                                                                                                                                                                                                                                                       |

### 5.7.2. Test Instruments

| Radiated Emission Test Site (966) |              |               |                |               |               |
|-----------------------------------|--------------|---------------|----------------|---------------|---------------|
| Equipment                         | Manufacturer | Model         | Serial Number  | Date of Cal.  | Due Date      |
| EMI Test Receiver                 | R&S          | ESCI7         | 100529         | Jan. 21, 2025 | Jan. 20, 2026 |
| Spectrum Analyzer                 | R&S          | FSQ40         | 200061         | Jun. 27, 2024 | Jun. 26, 2025 |
| Pre-amplifier                     | SKET         | LNPA_0118G-45 | SK2021012102   | Jan. 21, 2025 | Jan. 20, 2026 |
| Pre-amplifier                     | SKET         | LNPA_1840G-50 | SK202109203500 | Jan. 21, 2025 | Jan. 20, 2026 |
| Pre-amplifier                     | HP           | 8447D         | 2727A05017     | Jun. 27, 2024 | Jun. 26, 2025 |
| Loop antenna                      | Schwarzbeck  | FMZB1519B     | 00191          | Jun. 27, 2024 | Jun. 26, 2025 |
| Broadband Antenna                 | Schwarzbeck  | VULB9163      | 340            | Jun. 29, 2024 | Jun. 28, 2025 |
| Horn Antenna                      | Schwarzbeck  | BBHA 9120D    | 631            | Jun. 29, 2024 | Jun. 28, 2025 |
| Horn Antenna                      | Schwarzbeck  | BBHA 9170     | 00956          | Jan. 23, 2025 | Jan. 22, 2026 |
| Coaxial cable                     | SKET         | RE-03-D       | /              | Jun. 27, 2024 | Jun. 26, 2025 |
| Coaxial cable                     | SKET         | RE-03-M       | /              | Jun. 27, 2024 | Jun. 26, 2025 |
| Coaxial cable                     | SKET         | RE-03-L       | /              | Jun. 27, 2024 | Jun. 26, 2025 |
| Coaxial cable                     | SKET         | RE-04-D       | /              | Jun. 27, 2024 | Jun. 26, 2025 |
| Coaxial cable                     | SKET         | RE-04-M       | /              | Jun. 27, 2024 | Jun. 26, 2025 |
| Coaxial cable                     | SKET         | RE-04-L       | /              | Jun. 27, 2024 | Jun. 26, 2025 |
| Antenna Mast                      | Keleto       | RE-AM         | /              | /             | /             |
| EMI Test Software                 | EZ_EMCC      | FA-03A2 RE+   | 1.1.4.2        | /             | /             |

## 5.7.3. Test Data

### AX20-5180

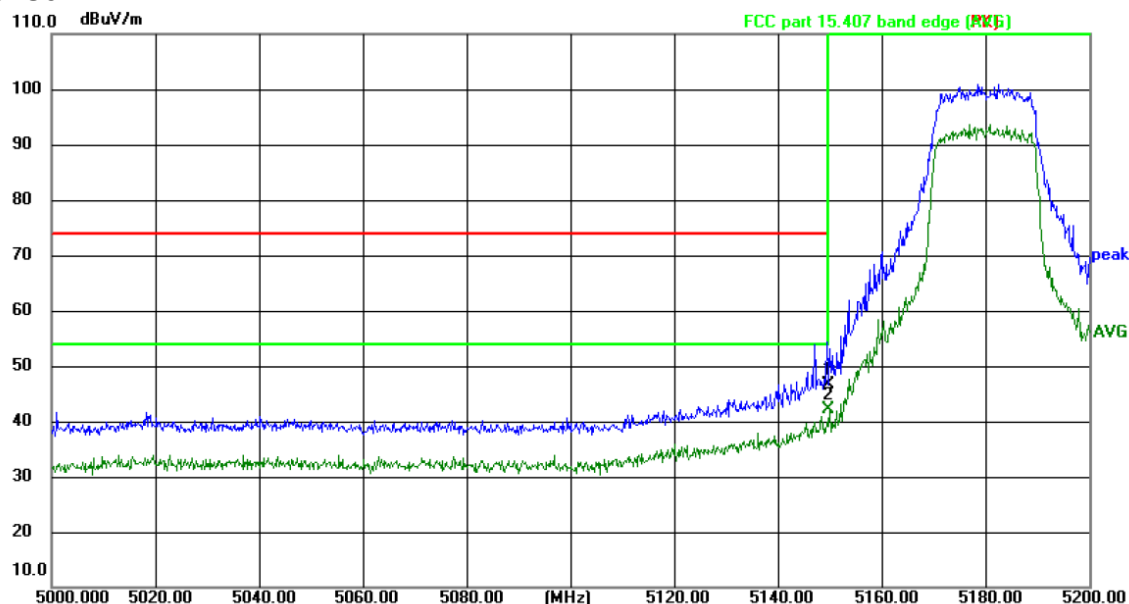

Site: 3m Anechoic Chamber

Polarization: **Horizontal**


Temperature: 23.5(°C)

Humidity: 47 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 5150.000        | 54.57          | -7.87         | 46.70          | 74.00          | -27.30      | peak     | P   |        |
| 2 * | 5150.000        | 50.10          | -7.87         | 42.23          | 54.00          | -11.77      | AVG      | P   |        |

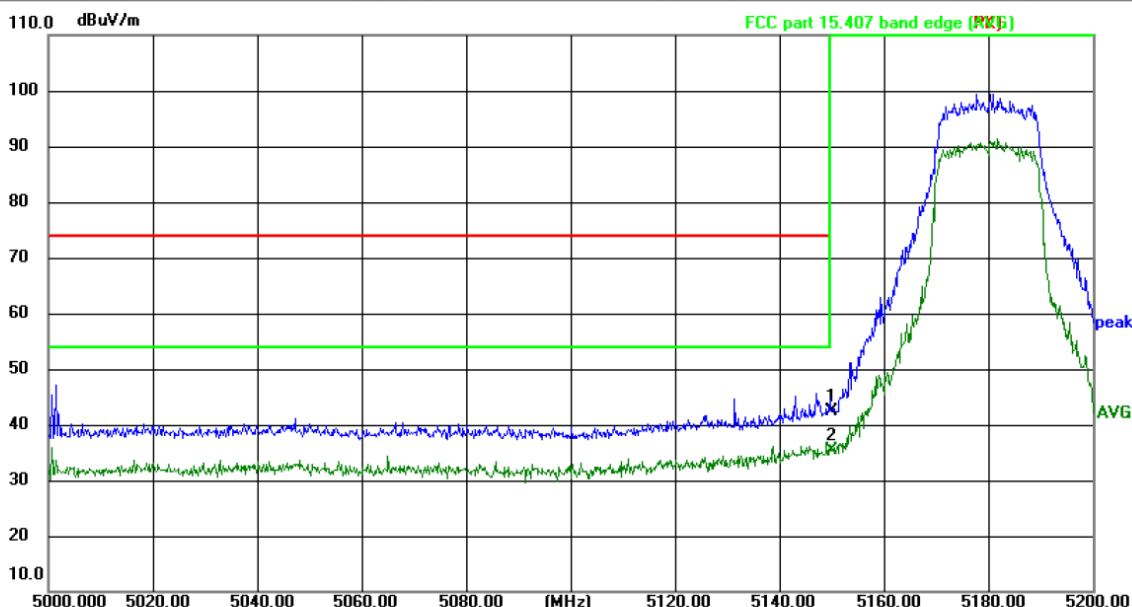

Site: 3m Anechoic Chamber

Polarization: **Vertical**

Temperature: 23.5(°C)


Humidity: 47 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 5150.000        | 50.16          | -7.87         | 42.29          | 74.00          | -31.71      | peak     | P   |        |
| 2 * | 5150.000        | 43.37          | -7.87         | 35.50          | 54.00          | -18.50      | AVG      | P   |        |


## AX40-5190

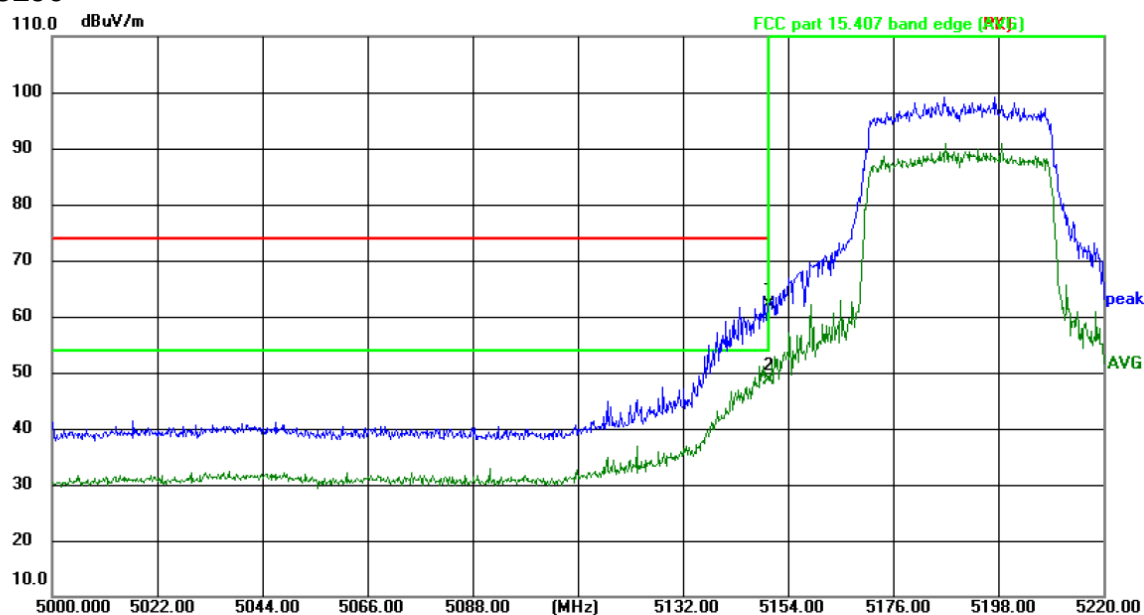

Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 23.5(°C) Humidity: 47 %

Limit: FCC part 15.407 band edge (PK) Power: AC 120 V/60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 5150.000        | 70.11          | -7.87         | 62.24          | 74.00          | -11.76      | peak     | P   |        |
| 2 * | 5150.000        | 56.38          | -7.87         | 48.51          | 54.00          | -5.49       | AVG      | P   |        |

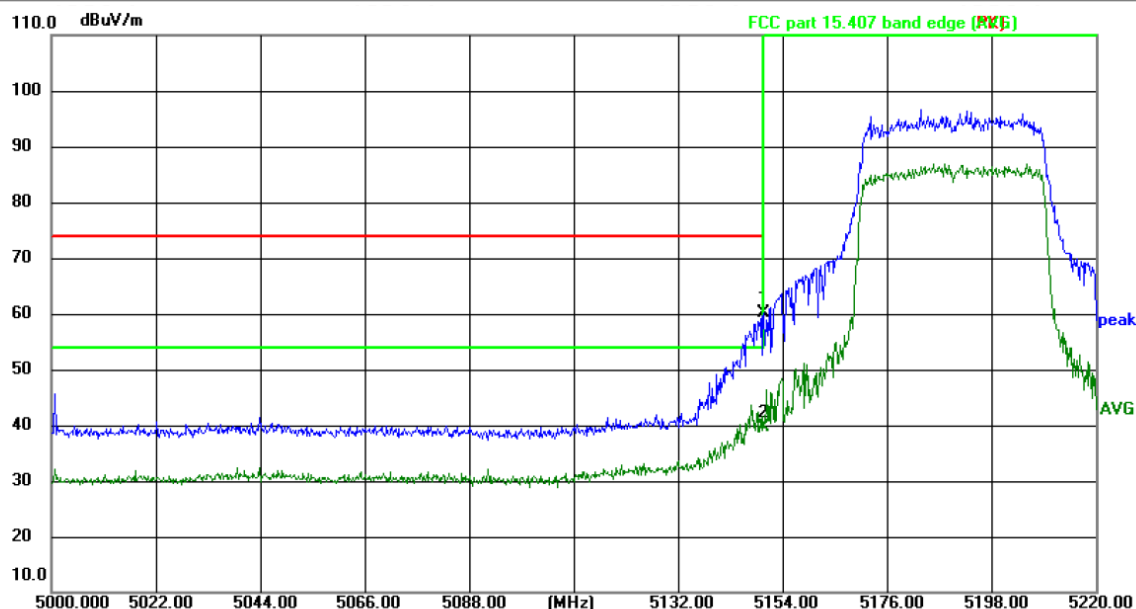


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 23.5(°C) Humidity: 47 %

Limit: FCC part 15.407 band edge (PK) Power: AC 120 V/60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 5150.000        | 68.03          | -7.87         | 60.16          | 74.00          | -13.84      | peak     | P   |        |
| 2   | 5150.000        | 47.58          | -7.87         | 39.71          | 54.00          | -14.29      | AVG      | P   |        |

## AX20-5240

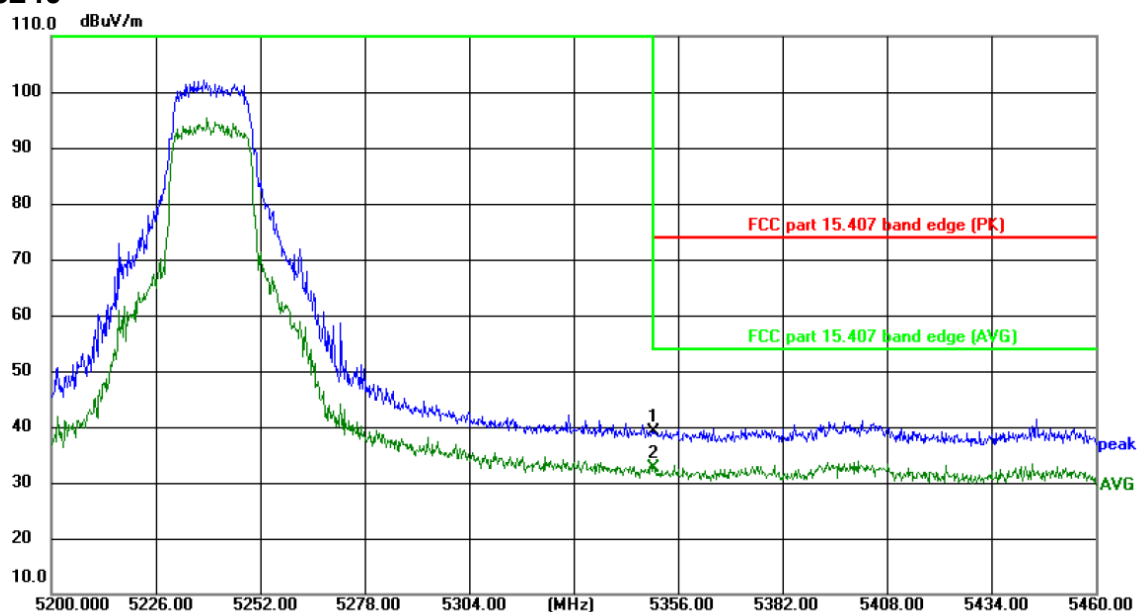


Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 23.5(°C) Humidity: 47 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 5350.000        | 46.88          | -7.67         | 39.21          | 74.00          | -34.79      | peak     | P   |        |
| 2 * | 5350.000        | 40.27          | -7.67         | 32.60          | 54.00          | -21.40      | AVG      | P   |        |

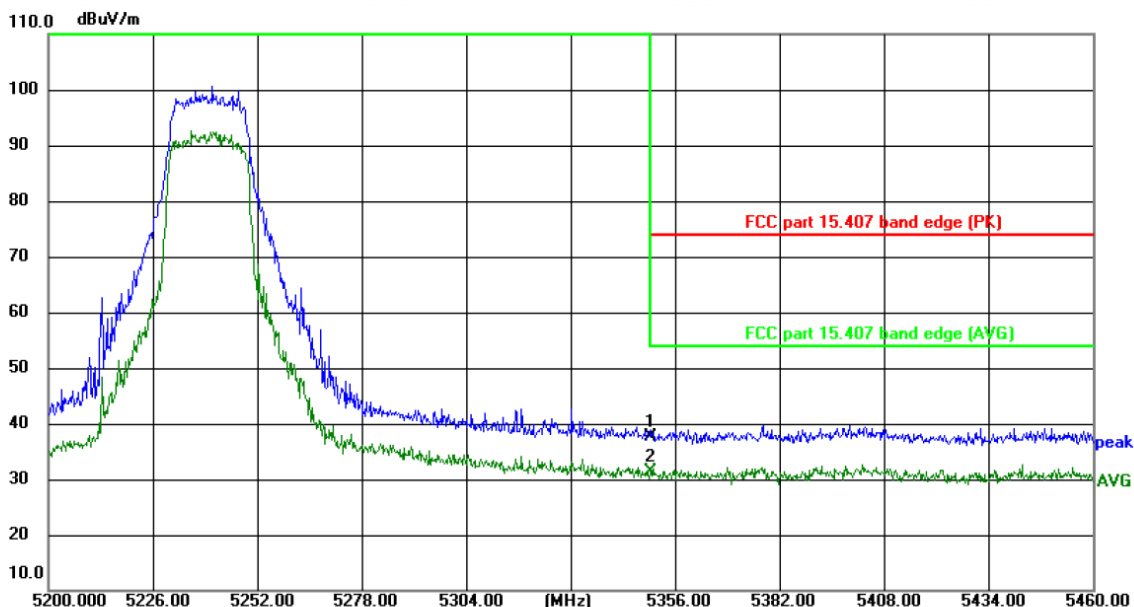


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 23.5(°C) Humidity: 47 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 5350.000        | 45.18          | -7.67         | 37.51          | 74.00          | -36.49      | peak     | P   |        |
| 2 * | 5350.000        | 39.09          | -7.67         | 31.42          | 54.00          | -22.58      | AVG      | P   |        |

## AX40-5230

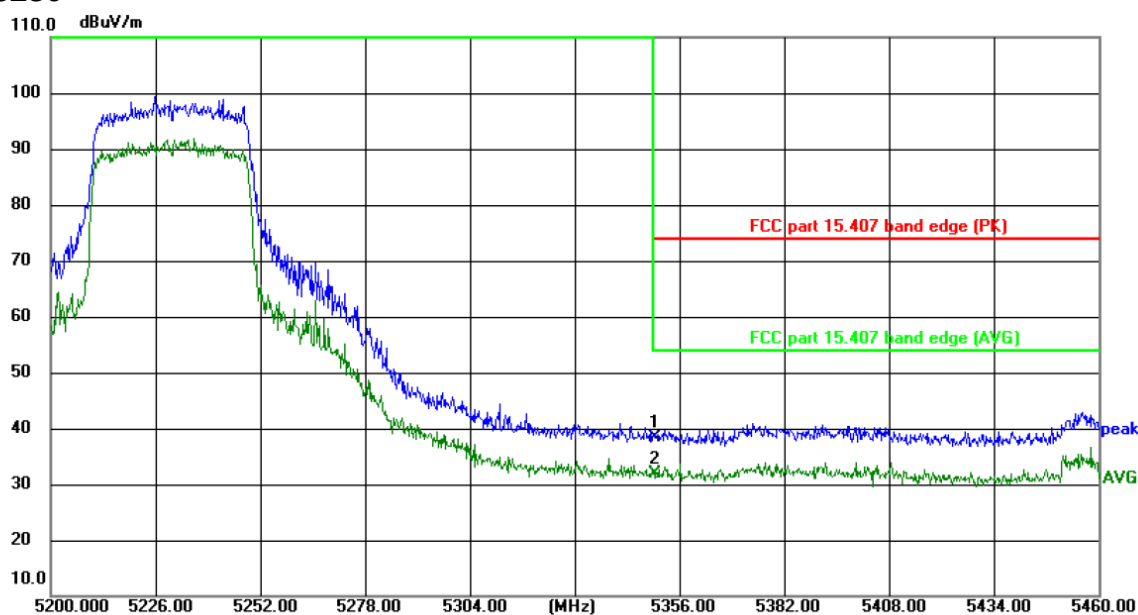


Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 23.5(°C) Humidity: 47 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 5350.000        | 45.97          | -7.67         | 38.30          | 74.00          | -35.70      | peak     | P   |        |
| 2 * | 5350.000        | 39.67          | -7.67         | 32.00          | 54.00          | -22.00      | AVG      | P   |        |

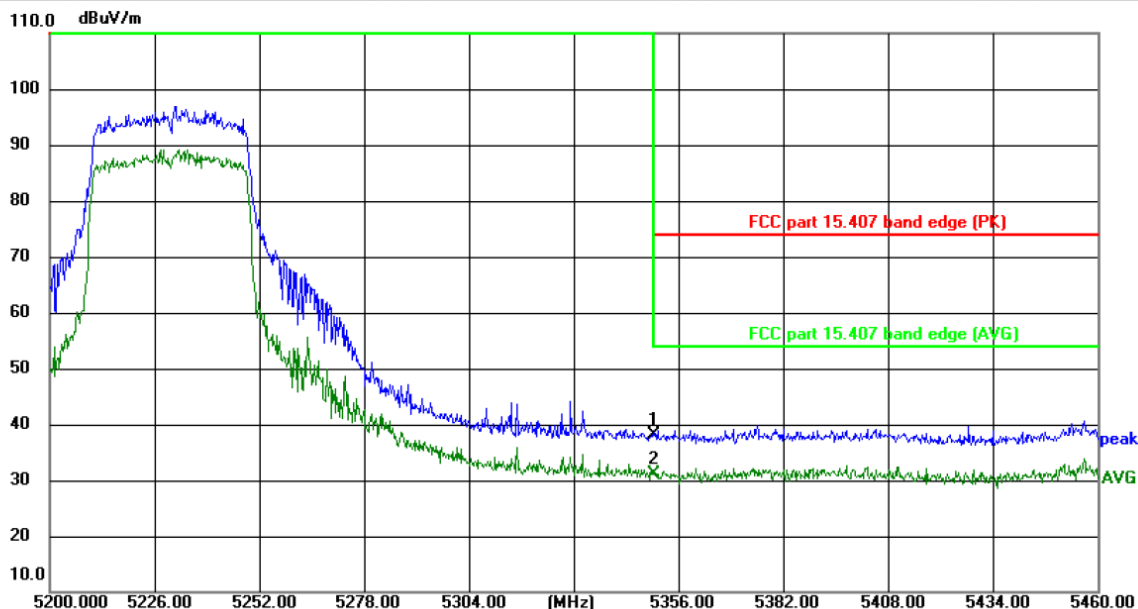


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 23.5(°C) Humidity: 47 %

Limit: FCC part 15.407 band edge (PK)

Power: AC 120 V/60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 5350.000        | 45.75          | -7.67         | 38.08          | 74.00          | -35.92      | peak     | P   |        |
| 2 * | 5350.000        | 38.69          | -7.67         | 31.02          | 54.00          | -22.98      | AVG      | P   |        |


## AX20-5745

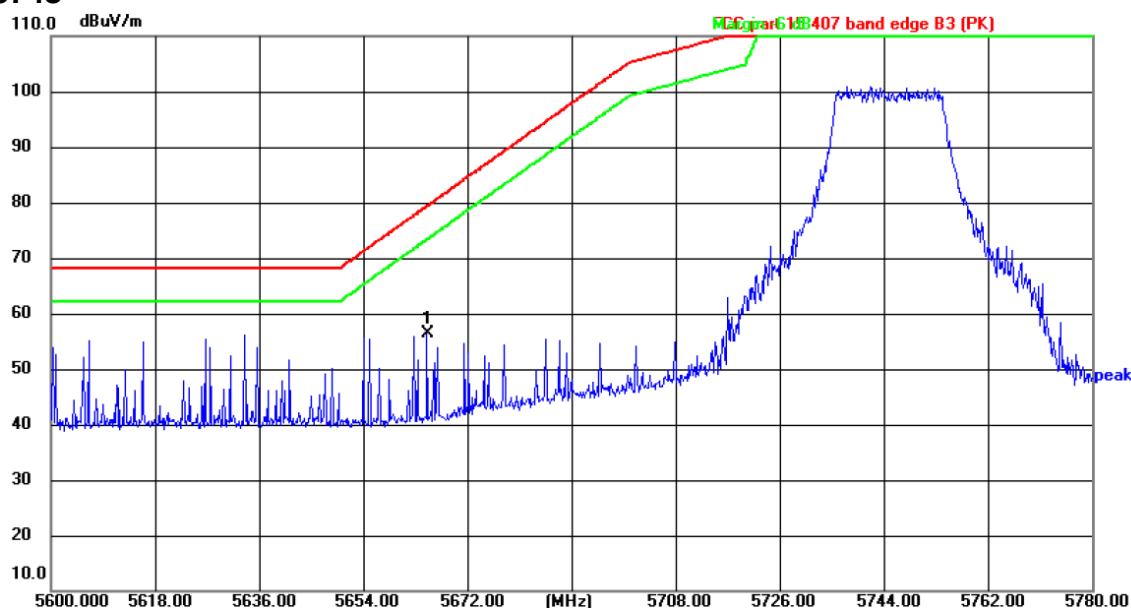

Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 23.5(°C) Humidity: 47 %

Limit: FCC part 15.407 band edge B3 (PK) Power: AC 120 V/60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 5665.142        | 63.26          | -6.98         | 56.28          | 79.41          | -23.13      | peak     | P   |        |

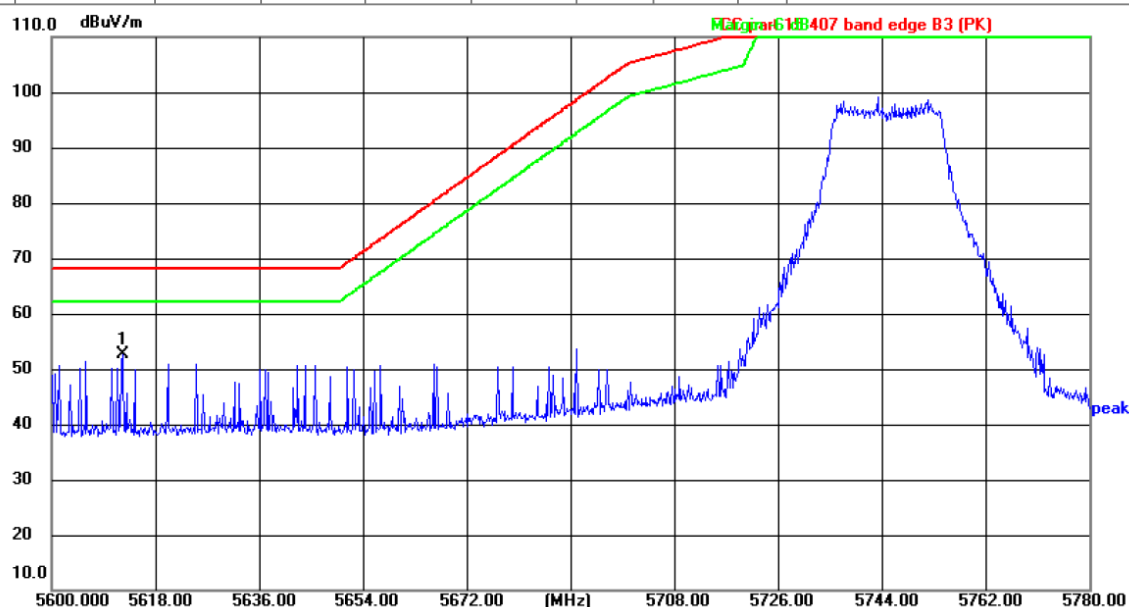


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 23.5(°C) Humidity: 47 %

Limit: FCC part 15.407 band edge B3 (PK) Power: AC 120 V/60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 5612.294        | 59.68          | -7.17         | 52.51          | 68.20          | -15.69      | peak     | P   |        |


## AX40-5755

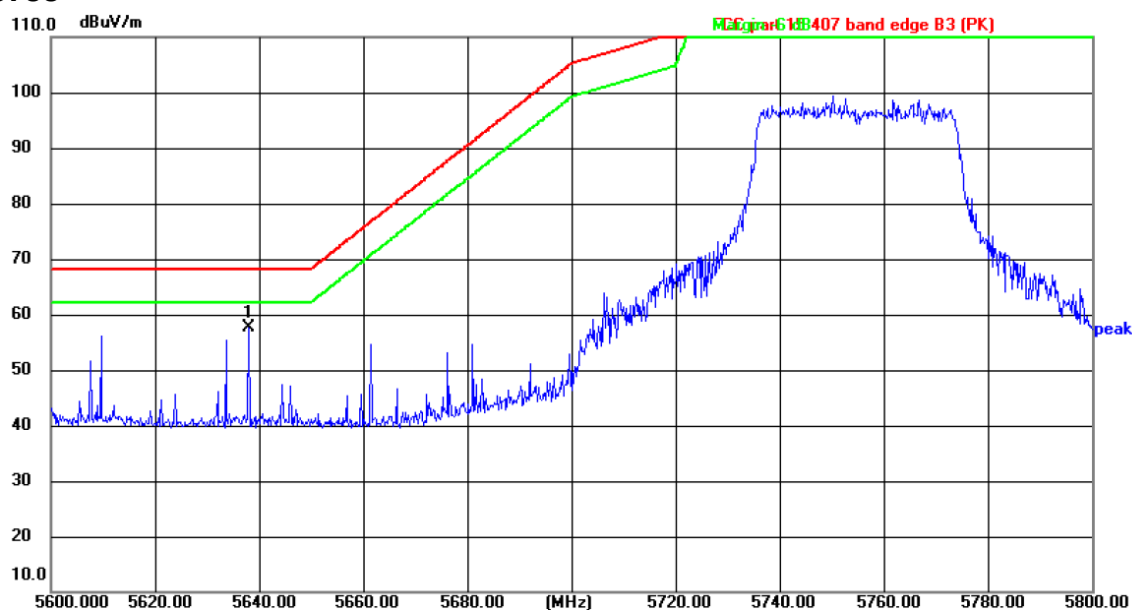

Site: 3m Anechoic Chamber Polarization: **Horizontal** Temperature: 23.5(°C) Humidity: 47 %

Limit: FCC part 15.407 band edge B3 (PK) Power: AC 120 V/60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 5638.060        | 64.65          | -7.07         | 57.58          | 68.20          | -10.62      | peak     | P   |        |


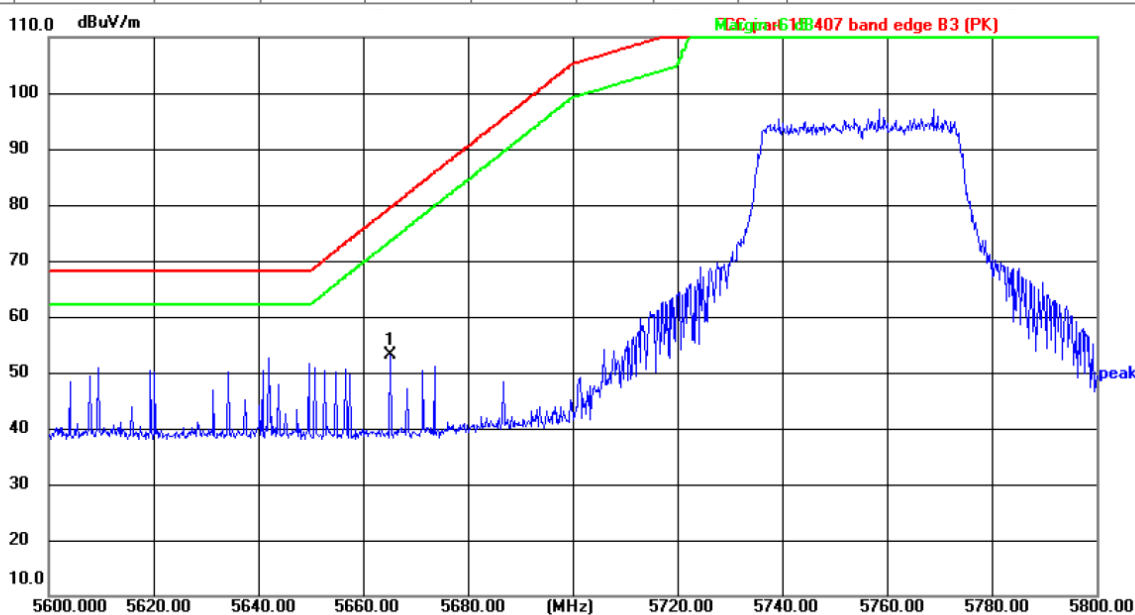


Site: 3m Anechoic Chamber Polarization: **Vertical** Temperature: 23.5(°C) Humidity: 47 %


Limit: FCC part 15.407 band edge B3 (PK) Power: AC 120 V/60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1 * | 5665.240        | 60.04          | -6.98         | 53.06          | 79.48          | -26.42      | peak     | P   |        |

## AX20-5825

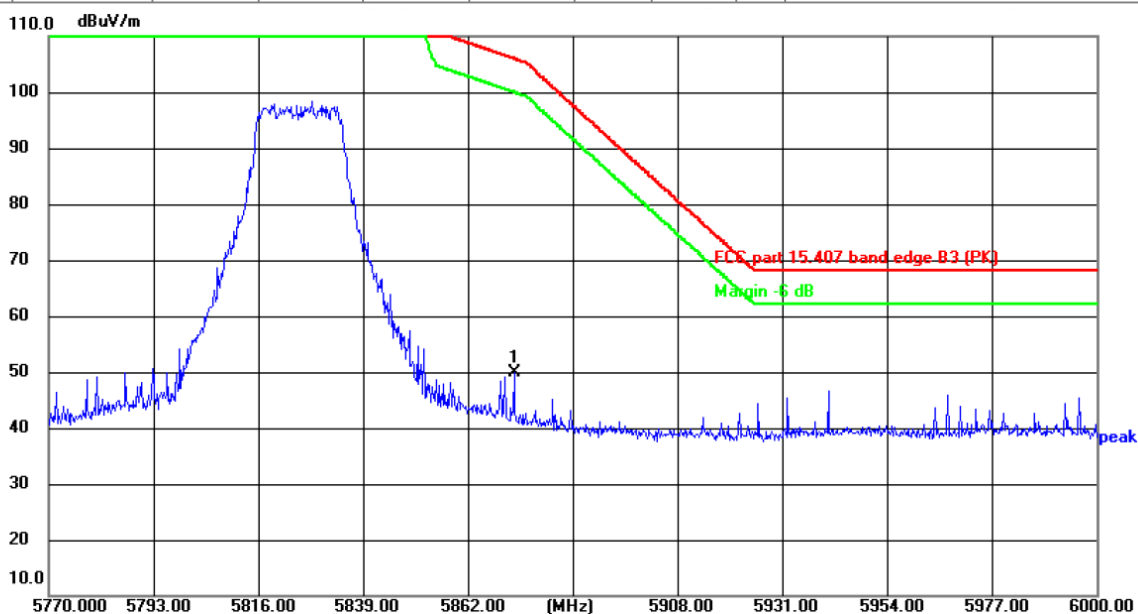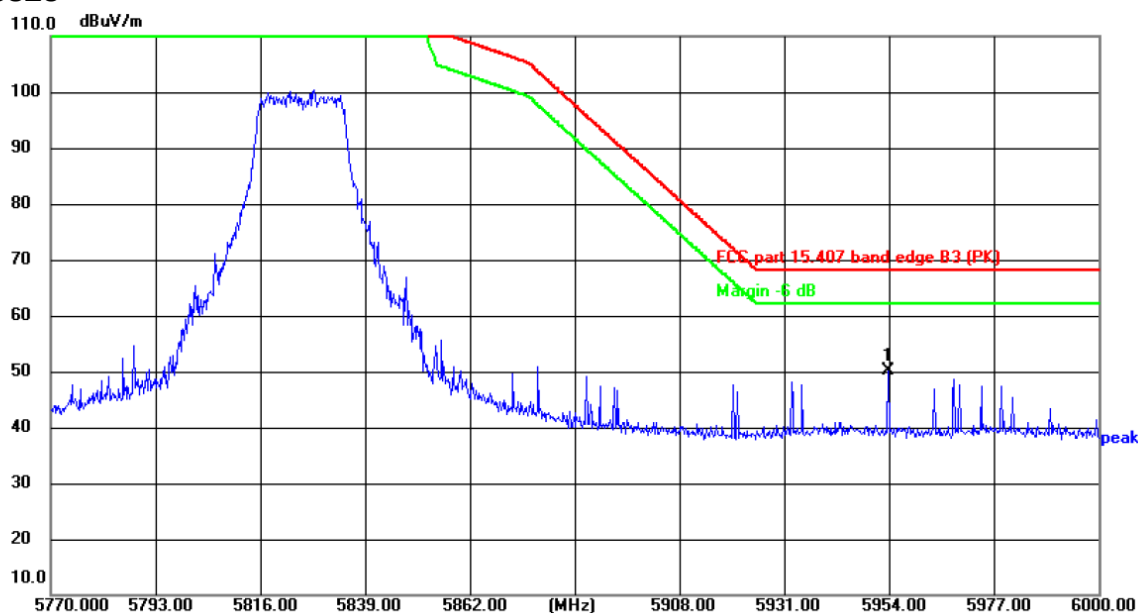


## AX40-5795

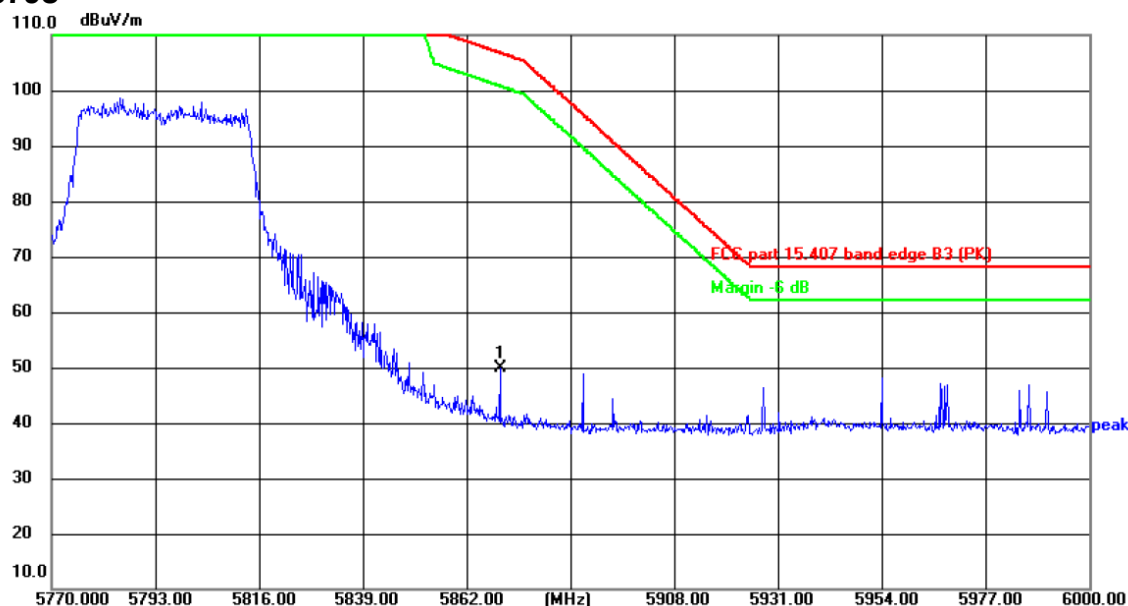


Note: All modulation (802.11a, 802.11n, 802.11ac, 802.11ax) have been tested, only the worst case in 802.11ax be reported.


## 5.8. Unwanted Emissions

### 5.8.1. Test Specification
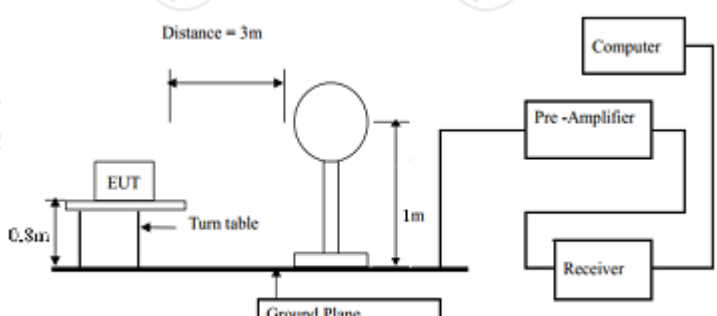
|                       |                                                                                                                                                                                             |            |                                   |                               |                  |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------|-------------------------------|------------------|
| Test Requirement:     | FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205                                                                                                                                          |            |                                   |                               |                  |
| Test Method:          | KDB 789033 D02 v02r01                                                                                                                                                                       |            |                                   |                               |                  |
| Frequency Range:      | 9kHz to 40GHz                                                                                                                                                                               |            |                                   |                               |                  |
| Measurement Distance: | 3 m                                                                                                                                                                                         |            |                                   |                               |                  |
| Antenna Polarization: | Horizontal & Vertical                                                                                                                                                                       |            |                                   |                               |                  |
| Operation mode:       | Transmitting mode with modulation                                                                                                                                                           |            |                                   |                               |                  |
| Receiver Setup:       | Frequency                                                                                                                                                                                   | Detector   | RBW                               | VBW                           | Remark           |
|                       | 9kHz- 150kHz                                                                                                                                                                                | Quasi-peak | 200Hz                             | 1kHz                          | Quasi-peak Value |
|                       | 150kHz- 30MHz                                                                                                                                                                               | Quasi-peak | 9kHz                              | 30kHz                         | Quasi-peak Value |
|                       | 30MHz-1GHz                                                                                                                                                                                  | Quasi-peak | 120KHz                            | 300KHz                        | Quasi-peak Value |
|                       | Above 1GHz                                                                                                                                                                                  | Peak       | 1MHz                              | 3MHz                          | Peak Value       |
| Peak                  |                                                                                                                                                                                             | 1MHz       | 10Hz                              | Average Value                 |                  |
| Limit:                | Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,<br>In restricted bands: |            |                                   |                               |                  |
|                       | Frequency                                                                                                                                                                                   |            | Detector                          |                               | Limit@3m         |
|                       | Above 1G                                                                                                                                                                                    |            | Peak                              |                               | 74dBµV/m         |
|                       |                                                                                                                                                                                             |            | AVG                               |                               | 54dBµV/m         |
|                       | Frequency                                                                                                                                                                                   |            | Field Strength (microvolts/meter) | Measurement Distance (meters) |                  |
|                       | 0.009-0.490                                                                                                                                                                                 |            | 2400/F(KHz)                       | 300                           |                  |
|                       | 0.49 -1.705                                                                                                                                                                                 |            | 24000/F(KHz)                      | 3                             |                  |
|                       | 1.705-30                                                                                                                                                                                    |            | 30                                | 30                            |                  |
|                       | 30-88                                                                                                                                                                                       |            | 100                               | 3                             |                  |
|                       | 88-216                                                                                                                                                                                      |            | 150                               | 3                             |                  |
| 216-960               |                                                                                                                                                                                             | 200        | 3                                 |                               |                  |
| Above 960             |                                                                                                                                                                                             | 500        | 3                                 |                               |                  |
| Test setup:           | In un-restricted bands: 68.2dBuV/m                                                                                                                                                          |            |                                   |                               |                  |
|                       | For radiated emissions below 30MHz                                                                                                                                                          |            |                                   |                               |                  |
| Test setup:           |                                                                                                         |            |                                   |                               |                  |
|                       | 30MHz to 1GHz                                                                                                                                                                               |            |                                   |                               |                  |

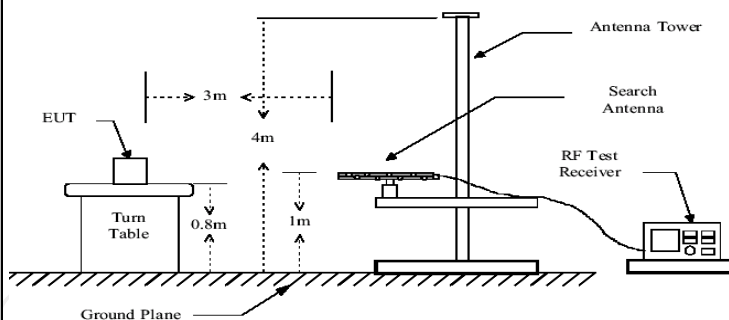

Above 1GHz

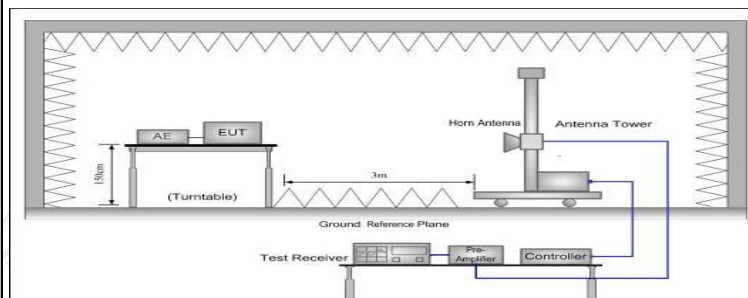

## Test Procedure:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

## Test results:

PASS


## 5.8.2. Test Instruments

| Radiated Emission Test Site (966) |              |               |                |               |               |
|-----------------------------------|--------------|---------------|----------------|---------------|---------------|
| Equipment                         | Manufacturer | Model         | Serial Number  | Date of Cal.  | Due Date      |
| EMI Test Receiver                 | R&S          | ESCI7         | 100529         | Jan. 21, 2025 | Jan. 20, 2026 |
| Spectrum Analyzer                 | R&S          | FSQ40         | 200061         | Jun. 27, 2024 | Jun. 26, 2025 |
| Pre-amplifier                     | SKET         | LNPA_0118G-45 | SK2021012102   | Jan. 21, 2025 | Jan. 20, 2026 |
| Pre-amplifier                     | SKET         | LNPA_1840G-50 | SK202109203500 | Jan. 21, 2025 | Jan. 20, 2026 |
| Pre-amplifier                     | HP           | 8447D         | 2727A05017     | Jun. 27, 2024 | Jun. 26, 2025 |
| Loop antenna                      | Schwarzbeck  | FMZB1519B     | 00191          | Jun. 27, 2024 | Jun. 26, 2025 |
| Broadband Antenna                 | Schwarzbeck  | VULB9163      | 340            | Jun. 29, 2024 | Jun. 28, 2025 |
| Horn Antenna                      | Schwarzbeck  | BBHA 9120D    | 631            | Jun. 29, 2024 | Jun. 28, 2025 |
| Horn Antenna                      | Schwarzbeck  | BBHA 9170     | 00956          | Jan. 23, 2025 | Jan. 22, 2026 |
| Coaxial cable                     | SKET         | RE-03-D       | /              | Jun. 27, 2024 | Jun. 26, 2025 |
| Coaxial cable                     | SKET         | RE-03-M       | /              | Jun. 27, 2024 | Jun. 26, 2025 |
| Coaxial cable                     | SKET         | RE-03-L       | /              | Jun. 27, 2024 | Jun. 26, 2025 |
| Coaxial cable                     | SKET         | RE-04-D       | /              | Jun. 27, 2024 | Jun. 26, 2025 |
| Coaxial cable                     | SKET         | RE-04-M       | /              | Jun. 27, 2024 | Jun. 26, 2025 |
| Coaxial cable                     | SKET         | RE-04-L       | /              | Jun. 27, 2024 | Jun. 26, 2025 |
| Antenna Mast                      | Keleto       | RE-AM         | /              | /             | /             |
| EMI Test Software                 | EZ_EMG       | FA-03A2 RE+   | 1.1.4.2        | /             | /             |

## 5.8.3. Test Data

Please refer to following diagram for individual  
Below 1GHz

Horizontal:

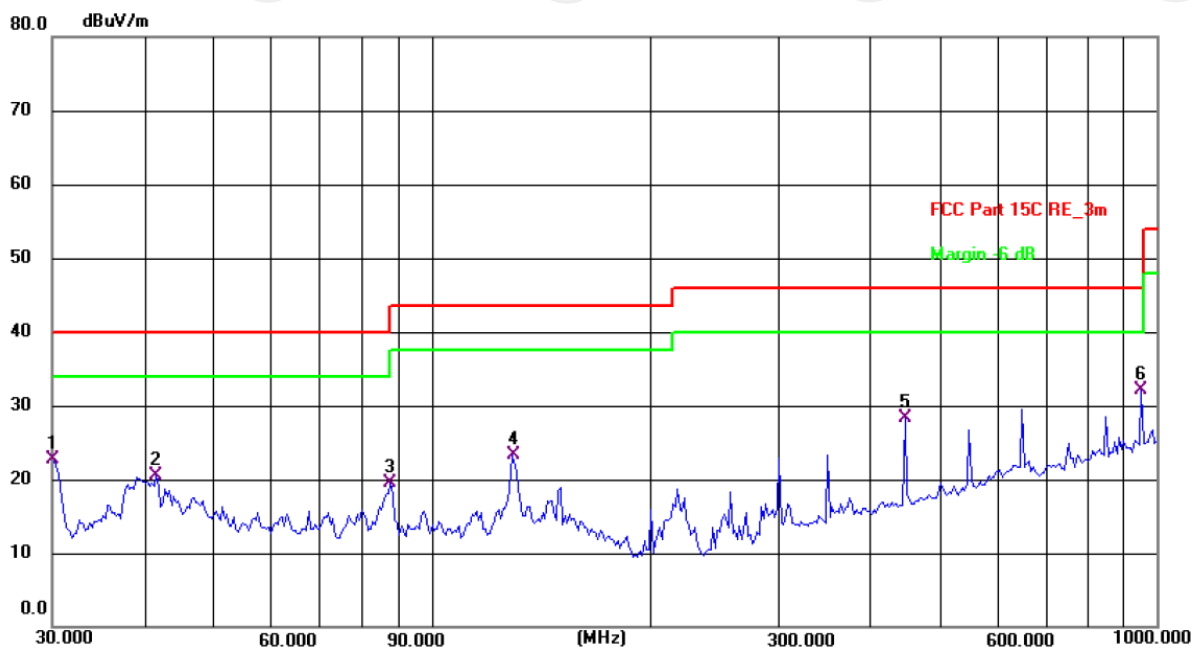

Site: 3m Anechoic Chamber1

Polarization: **Horizontal**

Temperature: 24.9(C)


Humidity: 50 %

Limit: FCC Part 15C RE\_3m

Power: AC 120 V/ 60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 30.0000         | 35.58          | -12.90        | 22.68          | 40.00          | -17.32      | QP       | P   |        |
| 2   | 41.7129         | 32.58          | -12.09        | 20.49          | 40.00          | -19.51      | QP       | P   |        |
| 3   | 87.7245         | 36.12          | -16.62        | 19.50          | 40.00          | -20.50      | QP       | P   |        |
| 4   | 129.0142        | 35.90          | -12.65        | 23.25          | 43.50          | -20.25      | QP       | P   |        |
| 5   | 449.5557        | 36.68          | -8.30         | 28.38          | 46.00          | -17.62      | QP       | P   |        |
| 6 * | 952.0937        | 31.88          | 0.28          | 32.16          | 46.00          | -13.84      | QP       | P   |        |

Vertical:

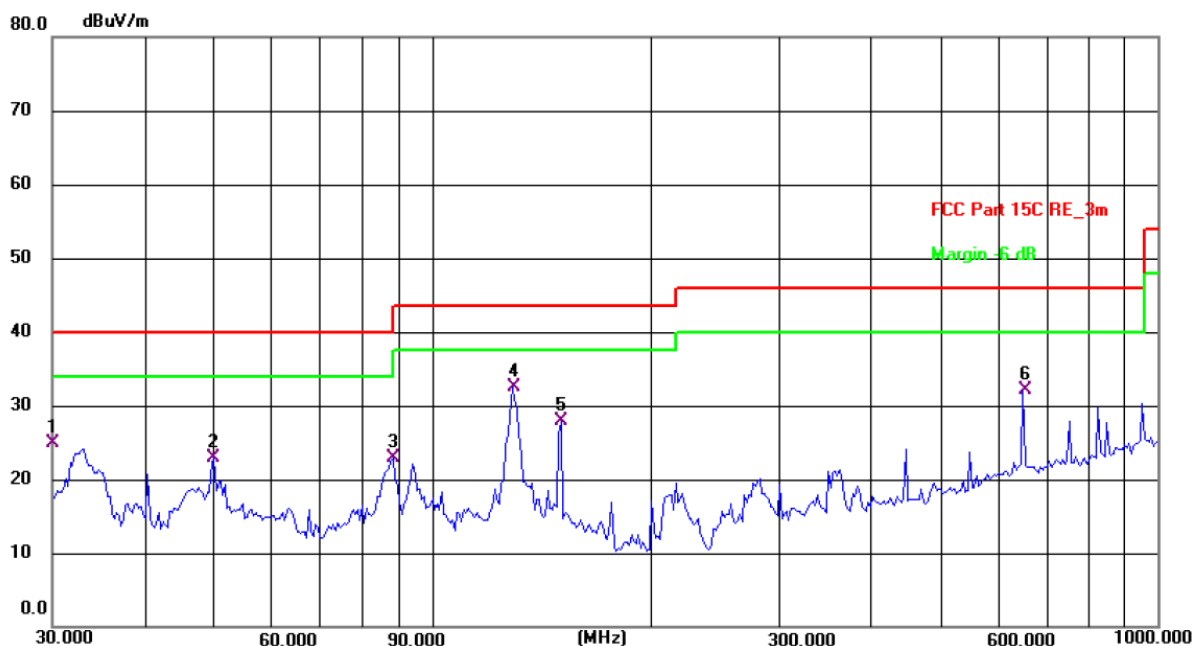

Site: 3m Anechoic Chamber1

Polarization: **Vertical**

Temperature: 24.9(C)

Humidity: 50 %

Limit: FCC Part 15C RE\_3m

Power: AC 120 V/ 60 Hz

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|--------|
| 1   | 30.0000         | 37.78          | -12.90        | 24.88          | 40.00          | -15.12      | QP       | P   |        |
| 2   | 50.0566         | 35.19          | -12.28        | 22.91          | 40.00          | -17.09      | QP       | P   |        |
| 3   | 88.3421         | 39.64          | -16.67        | 22.97          | 43.50          | -20.53      | QP       | P   |        |
| 4 * | 129.0144        | 45.15          | -12.65        | 32.50          | 43.50          | -11.00      | QP       | P   |        |
| 5   | 150.5377        | 39.17          | -11.27        | 27.90          | 43.50          | -15.60      | QP       | P   |        |
| 6   | 651.9416        | 36.15          | -4.01         | 32.14          | 46.00          | -13.86      | QP       | P   |        |

**Note:** 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) and all modulation (802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ax(HE20), 802.11ax(HE40)) and the worst case Mode (Lowest channel and 802.11a) was submitted only. And the test data in this project is powered by adapter 1 which is in the worse case.

3.Measurement (dBμV) = Reading level + Correction Factor, correction Factor= Antenna Factor + Cable loss – Pre-amplifier.

| Modulation Type: Band 1 |               |                     |                   |                          |                |             |                     |                   |             |
|-------------------------|---------------|---------------------|-------------------|--------------------------|----------------|-------------|---------------------|-------------------|-------------|
| 11a CH36: 5180MHz       |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)         | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                         |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10360                   | H             | 52.14               | ---               | 1.78                     | 53.92          | ---         | 68.2                | ---               | -14.28      |
| 15540                   | H             | 39.07               | ---               | 5.21                     | 44.28          | ---         | 74                  | 54                | -9.72       |
| ---                     | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10360                   | V             | 50.36               | ---               | 1.78                     | 52.14          | ---         | 68.2                | ---               | -16.06      |
| 15540                   | V             | 40.85               | ---               | 5.21                     | 46.06          | ---         | 74                  | 54                | -7.94       |
| ---                     | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11a CH40: 5200MHz       |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)         | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                         |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10400                   | H             | 51.53               | ---               | 1.83                     | 53.36          | ---         | 68.2                | ---               | -14.84      |
| 15600                   | H             | 38.28               | ---               | 5.23                     | 43.51          | ---         | 74                  | 54                | -10.49      |
| ---                     | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10400                   | V             | 52.12               | ---               | 1.83                     | 53.95          | ---         | 68.2                | ---               | -14.25      |
| 15600                   | V             | 39.79               | ---               | 5.23                     | 45.02          | ---         | 74                  | 54                | -8.98       |
| ---                     | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11a CH48: 5240MHz       |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)         | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                         |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10480                   | H             | 52.69               | ---               | 1.85                     | 54.54          | ---         | 68.2                | ---               | -13.66      |
| 15720                   | H             | 39.04               | ---               | 5.25                     | 44.29          | ---         | 74                  | 54                | -9.71       |
| ---                     | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10480                   | V             | 51.17               | ---               | 1.85                     | 53.02          | ---         | 68.2                | ---               | -15.18      |
| 15720                   | V             | 39.23               | ---               | 5.25                     | 44.48          | ---         | 74                  | 54                | -9.52       |
| ---                     | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11n(HT20) CH36: 5180MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)         | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                         |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10360                   | H             | 50.47               | ---               | 1.78                     | 52.25          | ---         | 68.2                | ---               | -15.95      |
| 15540                   | H             | 39.82               | ---               | 5.21                     | 45.03          | ---         | 74                  | 54                | -8.97       |
| ---                     | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10360                   | V             | 51.13               | ---               | 1.78                     | 52.91          | ---         | 68.2                | ---               | -15.29      |
| 15540                   | V             | 37.58               | ---               | 5.21                     | 42.79          | ---         | 74                  | 54                | -11.21      |
| ---                     | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |

| 11n(HT20) CH40: 5200MHz |               |                     |                   |                          |                |             |                     |                   |             |
|-------------------------|---------------|---------------------|-------------------|--------------------------|----------------|-------------|---------------------|-------------------|-------------|
| Frequency (MHz)         | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                         |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10400                   | H             | 52.04               | ---               | 1.83                     | 53.87          | ---         | 68.2                | ---               | -14.33      |
| 15600                   | H             | 39.18               | ---               | 5.23                     | 44.41          | ---         | 74                  | 54                | -9.59       |
| ---                     | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10400                   | V             | 49.25               | ---               | 1.83                     | 51.08          | ---         | 68.2                | ---               | -17.12      |
| 15600                   | V             | 38.66               | ---               | 5.23                     | 43.89          | ---         | 74                  | 54                | -10.11      |
| ---                     | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11n(HT20) CH48: 5240MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)         | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                         |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10480                   | H             | 51.26               | ---               | 1.85                     | 53.11          | ---         | 68.2                | ---               | -15.09      |
| 15720                   | H             | 39.37               | ---               | 5.25                     | 44.62          | ---         | 74                  | 54                | -9.38       |
| ---                     | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10480                   | V             | 50.81               | ---               | 1.85                     | 52.66          | ---         | 68.2                | ---               | -15.54      |
| 15720                   | V             | 38.03               | ---               | 5.25                     | 43.28          | ---         | 74                  | 54                | -10.72      |
| ---                     | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11n(HT40) CH38: 5190MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)         | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                         |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10380                   | H             | 52.47               | ---               | 1.80                     | 54.27          | ---         | 68.2                | ---               | -13.93      |
| 15570                   | H             | 41.15               | ---               | 5.22                     | 46.37          | ---         | 74                  | 54                | -7.63       |
| ---                     | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10380                   | V             | 52.83               | ---               | 1.80                     | 54.63          | ---         | 68.2                | ---               | -13.57      |
| 15570                   | V             | 39.69               | ---               | 5.22                     | 44.91          | ---         | 74                  | 54                | -9.09       |
| ---                     | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11n(HT40) CH46: 5230MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)         | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                         |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10460                   | H             | 52.81               | ---               | 1.85                     | 54.66          | ---         | 68.2                | ---               | -13.54      |
| 15690                   | H             | 37.14               | ---               | 5.08                     | 42.22          | ---         | 74                  | 54                | -11.78      |
| ---                     | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10460                   | V             | 50.27               | ---               | 1.85                     | 52.12          | ---         | 68.2                | ---               | -16.08      |
| 15690                   | V             | 38.09               | ---               | 5.08                     | 43.17          | ---         | 74                  | 54                | -10.83      |
| ---                     | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |

| 11ac(VHT20) CH36: 5180MHz |               |                     |                   |                          |                |             |                     |                   |             |
|---------------------------|---------------|---------------------|-------------------|--------------------------|----------------|-------------|---------------------|-------------------|-------------|
| Frequency (MHz)           | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                           |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10360                     | H             | 51.48               | ---               | 1.78                     | 53.26          | ---         | 68.2                | ---               | -14.94      |
| 15540                     | H             | 37.52               | ---               | 5.21                     | 42.73          | ---         | 74                  | 54                | -11.27      |
| ---                       | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10360                     | V             | 50.14               | ---               | 1.78                     | 51.92          | ---         | 68.2                | ---               | -16.28      |
| 15540                     | V             | 38.23               | ---               | 5.21                     | 43.44          | ---         | 74                  | 54                | -10.56      |
| ---                       | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ac(VHT20) CH40: 5200MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)           | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                           |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10400                     | H             | 51.24               | ---               | 1.83                     | 53.07          | ---         | 68.2                | ---               | -15.13      |
| 15600                     | H             | 38.96               | ---               | 5.23                     | 44.19          | ---         | 74                  | 54                | -9.81       |
| ---                       | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10400                     | V             | 52.01               | ---               | 1.83                     | 53.84          | ---         | 68.2                | ---               | -14.36      |
| 15600                     | V             | 39.75               | ---               | 5.23                     | 44.98          | ---         | 74                  | 54                | -9.02       |
| ---                       | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ac(VHT20) CH48:5240     |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)           | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                           |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10480                     | H             | 50.17               | ---               | 1.85                     | 52.02          | ---         | 68.2                | ---               | -16.18      |
| 15720                     | H             | 38.04               | ---               | 5.25                     | 43.29          | ---         | 74                  | 54                | -10.71      |
| ---                       | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10480                     | V             | 50.96               | ---               | 1.85                     | 52.81          | ---         | 68.2                | ---               | -15.39      |
| 15720                     | V             | 39.43               | ---               | 5.25                     | 44.68          | ---         | 74                  | 54                | -9.32       |
| ---                       | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ac(VHT40) CH38:5190     |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)           | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                           |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10380                     | H             | 50.21               | ---               | 1.80                     | 52.01          | ---         | 68.2                | ---               | -16.19      |
| 15570                     | H             | 38.59               | ---               | 5.22                     | 43.81          | ---         | 74                  | 54                | -10.19      |
| ---                       | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10380                     | V             | 53.77               | ---               | 1.80                     | 55.57          | ---         | 68.2                | ---               | -12.63      |
| 15570                     | V             | 38.03               | ---               | 5.22                     | 43.25          | ---         | 74                  | 54                | -10.75      |
| ---                       | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |

| 11ac(VHT40) CH46:5230    |               |                     |                   |                          |                |             |                     |                   |             |
|--------------------------|---------------|---------------------|-------------------|--------------------------|----------------|-------------|---------------------|-------------------|-------------|
| Frequency (MHz)          | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                          |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10460                    | H             | 52.01               | ---               | 1.85                     | 53.86          | ---         | 68.2                | ---               | -14.34      |
| 15690                    | H             | 37.47               | ---               | 5.08                     | 42.55          | ---         | 74                  | 54                | -11.45      |
| ---                      | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10460                    | V             | 52.83               | ---               | 1.85                     | 54.68          | ---         | 68.2                | ---               | -13.52      |
| 15690                    | V             | 39.25               | ---               | 5.08                     | 44.33          | ---         | 74                  | 54                | -9.67       |
| ---                      | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ax(HE20) CH36: 5180MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)          | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                          |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10360                    | H             | 52.13               | ---               | 1.78                     | 53.91          | ---         | 68.2                | ---               | -14.29      |
| 15540                    | H             | 39.47               | ---               | 5.21                     | 44.68          | ---         | 74                  | 54                | -9.32       |
| ---                      | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10360                    | V             | 52.55               | ---               | 1.78                     | 54.33          | ---         | 68.2                | ---               | -13.87      |
| 15540                    | V             | 38.68               | ---               | 5.21                     | 43.89          | ---         | 74                  | 54                | -10.11      |
| ---                      | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ax(HE20) CH40: 5200MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)          | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                          |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10400                    | H             | 51.05               | ---               | 1.83                     | 52.88          | ---         | 68.2                | ---               | -15.32      |
| 15600                    | H             | 38.23               | ---               | 5.23                     | 43.46          | ---         | 74                  | 54                | -10.54      |
| ---                      | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10400                    | V             | 52.71               | ---               | 1.83                     | 54.54          | ---         | 68.2                | ---               | -13.66      |
| 15600                    | V             | 38.85               | ---               | 5.23                     | 44.08          | ---         | 74                  | 54                | -9.92       |
| ---                      | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ax(HE20) CH48:5240     |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)          | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                          |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10480                    | H             | 53.23               | ---               | 1.85                     | 55.08          | ---         | 68.2                | ---               | -13.12      |
| 15720                    | H             | 38.47               | ---               | 5.25                     | 43.72          | ---         | 74                  | 54                | -10.28      |
| ---                      | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10480                    | V             | 52.96               | ---               | 1.85                     | 54.81          | ---         | 68.2                | ---               | -13.39      |
| 15720                    | V             | 37.02               | ---               | 5.25                     | 42.27          | ---         | 74                  | 54                | -11.73      |
| ---                      | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |

| 11ax(HE40) CH38:5190 |               |                     |                   |                          |                |             |                     |                   |             |
|----------------------|---------------|---------------------|-------------------|--------------------------|----------------|-------------|---------------------|-------------------|-------------|
| Frequency (MHz)      | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                      |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10380                | H             | 54.69               | ---               | 1.80                     | 56.49          | ---         | 68.2                | ---               | -11.71      |
| 15570                | H             | 38.41               | ---               | 5.22                     | 43.63          | ---         | 74                  | 54                | -10.37      |
| ---                  | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10380                | V             | 54.05               | ---               | 1.80                     | 55.85          | ---         | 68.2                | ---               | -12.35      |
| 15570                | V             | 37.24               | ---               | 5.22                     | 42.46          | ---         | 74                  | 54                | -11.54      |
| ---                  | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ax(HE40) CH46:5230 |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)      | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                      |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 10460                | H             | 53.17               | ---               | 1.85                     | 55.02          | ---         | 68.2                | ---               | -13.18      |
| 15690                | H             | 37.38               | ---               | 5.08                     | 42.46          | ---         | 74                  | 54                | -11.54      |
| ---                  | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 10460                | V             | 50.21               | ---               | 1.85                     | 52.06          | ---         | 68.2                | ---               | -16.14      |
| 15690                | V             | 37.96               | ---               | 5.08                     | 43.04          | ---         | 74                  | 54                | -10.96      |
| ---                  | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |

**Note:**

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

| Modulation Type: Band 3  |               |                     |                   |                          |                |             |                     |                   |             |
|--------------------------|---------------|---------------------|-------------------|--------------------------|----------------|-------------|---------------------|-------------------|-------------|
| 11a CH149: 5745MHz       |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)          | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                          |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11490                    | H             | 42.56               | ---               | 2.48                     | 45.04          | ---         | 74                  | 54                | -8.96       |
| 17235                    | H             | 51.04               | ---               | 6.50                     | 57.54          | ---         | 68.2                | ---               | -10.66      |
| ---                      | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11490                    | V             | 42.27               | ---               | 2.48                     | 44.75          | ---         | 74                  | 54                | -9.25       |
| 17235                    | V             | 51.44               | ---               | 6.50                     | 57.94          | ---         | 68.2                | ---               | -10.26      |
| ---                      | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11a CH157: 5785MHz       |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)          | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                          |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11570                    | H             | 41.17               | ---               | 2.42                     | 43.59          | ---         | 74                  | 54                | -10.41      |
| 17355                    | H             | 52.62               | ---               | 7.03                     | 59.65          | ---         | 68.2                | ---               | -8.55       |
| ---                      | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11570                    | V             | 40.53               | ---               | 2.42                     | 42.95          | ---         | 74                  | 54                | -11.05      |
| 17355                    | V             | 52.21               | ---               | 7.03                     | 59.24          | ---         | 68.2                | ---               | -8.96       |
| ---                      | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11a CH165: 5825MHz       |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)          | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                          |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11650                    | H             | 40.35               | ---               | 2.41                     | 42.76          | ---         | 74                  | 54                | -11.24      |
| 17475                    | H             | 50.14               | ---               | 7.41                     | 57.55          | ---         | 68.2                | ---               | -10.65      |
| ---                      | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11650                    | V             | 41.68               | ---               | 2.41                     | 44.09          | ---         | 74                  | 54                | -9.91       |
| 17475                    | V             | 50.26               | ---               | 7.41                     | 57.67          | ---         | 68.2                | ---               | -10.53      |
| ---                      | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11n(HT20) CH149: 5745MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)          | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                          |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11490                    | H             | 41.97               | ---               | 2.48                     | 44.45          | ---         | 74                  | 54                | -9.55       |
| 17235                    | H             | 52.23               | ---               | 6.50                     | 58.73          | ---         | 68.2                | ---               | -9.47       |
| ---                      | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11490                    | V             | 41.47               | ---               | 2.48                     | 43.95          | ---         | 74                  | 54                | -10.05      |
| 17235                    | V             | 51.08               | ---               | 6.50                     | 57.58          | ---         | 68.2                | ---               | -10.62      |
| ---                      | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |

| 11n(HT20) CH157: 5785MHz |               |                     |                   |                          |                |             |                     |                   |             |
|--------------------------|---------------|---------------------|-------------------|--------------------------|----------------|-------------|---------------------|-------------------|-------------|
| Frequency (MHz)          | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                          |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11570                    | H             | 41.35               | ---               | 2.42                     | 43.77          | ---         | 74                  | 54                | -10.23      |
| 17355                    | H             | 51.02               | ---               | 7.03                     | 58.05          | ---         | 68.2                | ---               | -10.15      |
| ---                      | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11570                    | V             | 41.17               | ---               | 2.42                     | 43.59          | ---         | 74                  | 54                | -10.41      |
| 17355                    | V             | 50.59               | ---               | 7.03                     | 57.62          | ---         | 68.2                | ---               | -10.58      |
| ---                      | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11n(HT20) CH165: 5825MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)          | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                          |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11650                    | H             | 41.84               | ---               | 2.41                     | 44.25          | ---         | 74                  | 54                | -9.75       |
| 17475                    | H             | 50.18               | ---               | 7.41                     | 57.59          | ---         | 68.2                | ---               | -10.61      |
| ---                      | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11650                    | V             | 41.96               | ---               | 2.41                     | 44.37          | ---         | 74                  | 54                | -9.63       |
| 17475                    | V             | 52.45               | ---               | 7.41                     | 59.86          | ---         | 68.2                | ---               | -8.34       |
| ---                      | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11n(HT40) CH151: 5755MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)          | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                          |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11510                    | H             | 41.56               | ---               | 2.47                     | 44.03          | ---         | 74                  | 54                | -9.97       |
| 17265                    | H             | 51.81               | ---               | 6.62                     | 58.43          | ---         | 68.2                | ---               | -9.77       |
| ---                      | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11510                    | V             | 41.45               | ---               | 2.47                     | 43.92          | ---         | 74                  | 54                | -10.08      |
| 17265                    | V             | 52.16               | ---               | 6.62                     | 58.78          | ---         | 68.2                | ---               | -9.42       |
| ---                      | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11n(HT40) CH159: 5795MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)          | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                          |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11590                    | H             | 41.96               | ---               | 2.40                     | 44.36          | ---         | 74                  | 54                | -9.64       |
| 17385                    | H             | 50.41               | ---               | 7.15                     | 57.56          | ---         | 68.2                | ---               | -10.64      |
| ---                      | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11590                    | V             | 41.75               | ---               | 2.40                     | 44.15          | ---         | 74                  | 54                | -9.85       |
| 17385                    | V             | 52.24               | ---               | 7.15                     | 59.39          | ---         | 68.2                | ---               | -8.81       |
| ---                      | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |

| 11ac(VHT20) CH149: 5745MHz |               |                     |                   |                          |                |             |                     |                   |             |
|----------------------------|---------------|---------------------|-------------------|--------------------------|----------------|-------------|---------------------|-------------------|-------------|
| Frequency (MHz)            | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                            |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11490                      | H             | 40.34               | ---               | 2.48                     | 42.82          | ---         | 74                  | 54                | -11.18      |
| 17235                      | H             | 52.15               | ---               | 6.50                     | 58.65          | ---         | 68.2                | ---               | -9.55       |
| ---                        | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11490                      | V             | 41.66               | ---               | 2.48                     | 44.14          | ---         | 74                  | 54                | -9.86       |
| 17235                      | V             | 50.27               | ---               | 6.50                     | 56.77          | ---         | 68.2                | ---               | -11.43      |
| ---                        | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ac(VHT20) CH157: 5785MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)            | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                            |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11570                      | H             | 41.56               | ---               | 2.42                     | 43.98          | ---         | 74                  | 54                | -10.02      |
| 17355                      | H             | 52.41               | ---               | 7.03                     | 59.44          | ---         | 68.2                | ---               | -8.76       |
| ---                        | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11570                      | V             | 40.29               | ---               | 2.42                     | 42.71          | ---         | 74                  | 54                | -11.29      |
| 17355                      | V             | 51.76               | ---               | 7.03                     | 58.79          | ---         | 68.2                | ---               | -9.41       |
| ---                        | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ac(VHT20) CH165: 5825MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)            | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                            |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11650                      | H             | 41.15               | ---               | 2.41                     | 43.56          | ---         | 74                  | 54                | -10.44      |
| 17475                      | H             | 51.63               | ---               | 7.41                     | 59.04          | ---         | 68.2                | ---               | -9.16       |
| ---                        | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11650                      | V             | 40.85               | ---               | 2.41                     | 43.26          | ---         | 74                  | 54                | -10.74      |
| 17475                      | V             | 52.52               | ---               | 7.41                     | 59.93          | ---         | 68.2                | ---               | -8.27       |
| ---                        | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ac(VHT40) CH151: 5755MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)            | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                            |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11510                      | H             | 40.15               | ---               | 2.47                     | 42.62          | ---         | 74                  | 54                | -11.38      |
| 17265                      | H             | 50.62               | ---               | 6.62                     | 57.24          | ---         | 68.2                | ---               | -10.96      |
| ---                        | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11510                      | V             | 41.81               | ---               | 2.47                     | 44.28          | ---         | 74                  | 54                | -9.72       |
| 17265                      | V             | 50.25               | ---               | 6.62                     | 56.87          | ---         | 68.2                | ---               | -11.33      |
| ---                        | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |

| 11ac(VHT40) CH159: 5795MHz |               |                     |                   |                          |                |             |                     |                   |             |
|----------------------------|---------------|---------------------|-------------------|--------------------------|----------------|-------------|---------------------|-------------------|-------------|
| Frequency (MHz)            | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                            |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11590                      | H             | 41.45               | ---               | 2.40                     | 43.85          | ---         | 74                  | 54                | -10.15      |
| 17385                      | H             | 51.18               | ---               | 7.15                     | 58.33          | ---         | 68.2                | ---               | -9.87       |
| ---                        | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11590                      | V             | 40.74               | ---               | 2.40                     | 43.14          | ---         | 74                  | 54                | -10.86      |
| 17385                      | V             | 52.03               | ---               | 7.15                     | 59.18          | ---         | 68.2                | ---               | -9.02       |
| ---                        | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ax(HE20) CH149: 5745MHz  |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)            | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                            |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11490                      | H             | 41.47               | ---               | 2.48                     | 43.95          | ---         | 74                  | 54                | -10.05      |
| 17235                      | H             | 52.63               | ---               | 6.50                     | 59.13          | ---         | 68.2                | ---               | -9.07       |
| ---                        | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11490                      | V             | 40.91               | ---               | 2.48                     | 43.39          | ---         | 74                  | 54                | -10.61      |
| 17235                      | V             | 51.04               | ---               | 6.50                     | 57.54          | ---         | 68.2                | ---               | -10.66      |
| ---                        | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ax(HE20) CH157: 5785MHz  |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)            | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                            |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11570                      | H             | 41.54               | ---               | 2.42                     | 43.96          | ---         | 74                  | 54                | -10.04      |
| 17355                      | H             | 50.13               | ---               | 7.03                     | 57.16          | ---         | 68.2                | ---               | -11.04      |
| ---                        | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11570                      | V             | 42.94               | ---               | 2.42                     | 45.36          | ---         | 74                  | 54                | -8.64       |
| 17355                      | V             | 51.63               | ---               | 7.03                     | 58.66          | ---         | 68.2                | ---               | -9.54       |
| ---                        | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ax(HE20) CH165: 5825MHz  |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)            | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                            |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11650                      | H             | 40.36               | ---               | 2.41                     | 42.77          | ---         | 74                  | 54                | -11.23      |
| 17475                      | H             | 50.82               | ---               | 7.41                     | 58.23          | ---         | 68.2                | ---               | -9.97       |
| ---                        | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11650                      | V             | 41.57               | ---               | 2.41                     | 43.98          | ---         | 74                  | 54                | -10.02      |
| 17475                      | V             | 50.66               | ---               | 7.41                     | 58.07          | ---         | 68.2                | ---               | -10.13      |
| ---                        | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |


| 11ax(HE40) CH151: 5755MHz |               |                     |                   |                          |                |             |                     |                   |             |
|---------------------------|---------------|---------------------|-------------------|--------------------------|----------------|-------------|---------------------|-------------------|-------------|
| Frequency (MHz)           | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                           |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11510                     | H             | 41.37               | ---               | 2.47                     | 43.84          | ---         | 74                  | 54                | -10.16      |
| 17265                     | H             | 52.04               | ---               | 6.62                     | 58.66          | ---         | 68.2                | ---               | -9.54       |
| ---                       | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11510                     | V             | 41.69               | ---               | 2.47                     | 44.16          | ---         | 74                  | 54                | -9.84       |
| 17265                     | V             | 51.85               | ---               | 6.62                     | 58.47          | ---         | 68.2                | ---               | -9.73       |
| ---                       | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11ax(HE40) CH159: 5795MHz |               |                     |                   |                          |                |             |                     |                   |             |
| Frequency (MHz)           | Ant. Pol. H/V | Peak reading (dBμV) | AV reading (dBμV) | Correction Factor (dB/m) | Emission Level |             | Peak limit (dBμV/m) | AV limit (dBμV/m) | Margin (dB) |
|                           |               |                     |                   |                          | Peak (dBμV/m)  | AV (dBμV/m) |                     |                   |             |
| 11590                     | H             | 40.26               | ---               | 2.40                     | 42.66          | ---         | 74                  | 54                | -11.34      |
| 17385                     | H             | 50.78               | ---               | 7.15                     | 57.93          | ---         | 68.2                | ---               | -10.27      |
| ---                       | H             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |
| 11590                     | V             | 40.39               | ---               | 2.40                     | 42.79          | ---         | 74                  | 54                | -11.21      |
| 17385                     | V             | 50.44               | ---               | 7.15                     | 57.59          | ---         | 68.2                | ---               | -10.61      |
| ---                       | V             | ---                 | ---               | ---                      | ---            | ---         | ---                 | ---               | ---         |

**Note:**

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

## 5.9. Frequency Stability Measurement

### 5.9.1. Test Specification
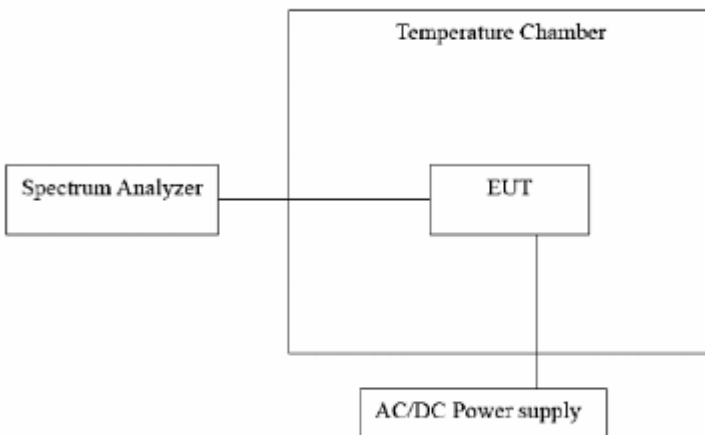
|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Requirement:</b> | FCC Part15 Section 15.407(g) &Part2 J Section 2.1055                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Test Method:</b>      | ANSI C63.10:2020                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Limit:</b>            | The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.                                                                                                                                                                                                                                                                                                                |
| <b>Test Setup:</b>       |  <pre> graph LR     SA[Spectrum Analyzer] --- EUT[EUT]     subgraph TC [Temperature Chamber]         EUT     end     EUT --- P[AC/DC Power supply]             </pre>                                                                                                                                                                                                                                                                                                                                                               |
| <b>Test Procedure:</b>   | The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record. |
| <b>Test Result:</b>      | PASS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Remark:</b>           | Pre-scan was performed at all models(11a,11n,11ac, 11ax), the worst case (11ax) was found and test data was shown in this report.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

### 5.9.2. Test Instruments

| Equipment                                   | Manufacturer | Model   | Serial Number | Date of Cal.  | Due Date      |
|---------------------------------------------|--------------|---------|---------------|---------------|---------------|
| Spectrum Analyzer                           | Agilent      | N9020A  | MY49100619    | Jun. 27, 2024 | Jun. 26, 2025 |
| DC power supply                             | Kingrang     | KR3005K | /             | Jun. 27, 2024 | Jun. 26, 2025 |
| Programable tempratuce and humidity chamber | JQ           | JQ-2000 | 510101234     | Jun. 27, 2024 | Jun. 26, 2025 |

Test plots as follows:

| Test mode:       |                           | 802.11ax(HE20)             | Frequency(MHz):     | 5180   |
|------------------|---------------------------|----------------------------|---------------------|--------|
| Temperature (°C) | Voltage(V <sub>AC</sub> ) | Measurement Frequency(MHz) | Delta Frequency(Hz) | Result |
| 45               | 120V                      | 5180                       | 0                   | PASS   |
| 35               |                           | 5180                       | 0                   | PASS   |
| 25               |                           | 5180.02                    | 20000               | PASS   |
| 15               |                           | 5180                       | 0                   | PASS   |
| 5                |                           | 5180.02                    | 20000               | PASS   |
| 0                |                           | 5180                       | 0                   | PASS   |
| 25               | 102V                      | 5180                       | 0                   | PASS   |
|                  | 120V                      | 5180                       | 0                   | PASS   |
|                  | 138V                      | 5180                       | 0                   | PASS   |

| Test mode:       |                           | 802.11ax(HE20)             | Frequency(MHz):     | 5200   |
|------------------|---------------------------|----------------------------|---------------------|--------|
| Temperature (°C) | Voltage(V <sub>AC</sub> ) | Measurement Frequency(MHz) | Delta Frequency(Hz) | Result |
| 45               | 120V                      | 5200                       | 0                   | PASS   |
| 35               |                           | 5200                       | 0                   | PASS   |
| 25               |                           | 5200                       | 0                   | PASS   |
| 15               |                           | 5200.02                    | 20000               | PASS   |
| 5                |                           | 5200                       | 0                   | PASS   |
| 0                |                           | 5200                       | 0                   | PASS   |
| 25               | 102V                      | 5200                       | 0                   | PASS   |
|                  | 120V                      | 5200                       | 0                   | PASS   |
|                  | 138V                      | 5200                       | 0                   | PASS   |

| Test mode:       |                           | 802.11ax(HE20)             | Frequency(MHz):     | 5240   |
|------------------|---------------------------|----------------------------|---------------------|--------|
| Temperature (°C) | Voltage(V <sub>AC</sub> ) | Measurement Frequency(MHz) | Delta Frequency(Hz) | Result |
| 45               | 120V                      | 5240                       | 0                   | PASS   |
| 35               |                           | 5240                       | 0                   | PASS   |
| 25               |                           | 5240                       | 0                   | PASS   |
| 15               |                           | 5240                       | 0                   | PASS   |
| 5                |                           | 5240                       | 0                   | PASS   |
| 0                |                           | 5240                       | 0                   | PASS   |
| 25               | 102V                      | 5240.02                    | 20000               | PASS   |
|                  | 120V                      | 5240                       | 0                   | PASS   |
|                  | 138V                      | 5240                       | 0                   | PASS   |

| Test mode:       |                           | 802.11ax(HE20)             | Frequency(MHz):     | 5745   |
|------------------|---------------------------|----------------------------|---------------------|--------|
| Temperature (°C) | Voltage(V <sub>AC</sub> ) | Measurement Frequency(MHz) | Delta Frequency(Hz) | Result |
| 45               | 120V                      | 5745.02                    | 20000               | PASS   |
| 35               |                           | 5745                       | 0                   | PASS   |
| 25               |                           | 5745                       | 0                   | PASS   |
| 15               |                           | 5745                       | 0                   | PASS   |
| 5                |                           | 5745.02                    | 20000               | PASS   |
| 0                |                           | 5745.02                    | 20000               | PASS   |
| 25               | 102V                      | 5745                       | 0                   | PASS   |
|                  | 120V                      | 5745.02                    | 20000               | PASS   |
|                  | 138V                      | 5745                       | 0                   | PASS   |

| Test mode:       |                           | 802.11ax(HE20)             | Frequency(MHz):     | 5785   |
|------------------|---------------------------|----------------------------|---------------------|--------|
| Temperature (°C) | Voltage(V <sub>AC</sub> ) | Measurement Frequency(MHz) | Delta Frequency(Hz) | Result |
| 45               | 120V                      | 5785.02                    | 20000               | PASS   |
| 35               |                           | 5785.02                    | 20000               | PASS   |
| 25               |                           | 5785.02                    | 20000               | PASS   |
| 15               |                           | 5785.02                    | 20000               | PASS   |
| 5                |                           | 5785.02                    | 20000               | PASS   |
| 0                |                           | 5785                       | 0                   | PASS   |
| 25               | 102V                      | 5785                       | 0                   | PASS   |
|                  | 120V                      | 5785                       | 0                   | PASS   |
|                  | 138V                      | 5785                       | 0                   | PASS   |

| Test mode:       |                           | 802.11ax(HE20)             | Frequency(MHz):     | 5825   |
|------------------|---------------------------|----------------------------|---------------------|--------|
| Temperature (°C) | Voltage(V <sub>AC</sub> ) | Measurement Frequency(MHz) | Delta Frequency(Hz) | Result |
| 45               | 120V                      | 5825                       | 0                   | PASS   |
| 35               |                           | 5825                       | 0                   | PASS   |
| 25               |                           | 5825.02                    | 20000               | PASS   |
| 15               |                           | 5825.02                    | 20000               | PASS   |
| 5                |                           | 5825                       | 0                   | PASS   |
| 0                |                           | 5825.02                    | 20000               | PASS   |
| 25               | 102V                      | 5825.02                    | 20000               | PASS   |
|                  | 120V                      | 5825                       | 0                   | PASS   |
|                  | 138V                      | 5825.02                    | 20000               | PASS   |

| Test mode:       |                           | 802.11ax(HE40)             | Frequency(MHz):     | 5190   |
|------------------|---------------------------|----------------------------|---------------------|--------|
| Temperature (°C) | Voltage(V <sub>AC</sub> ) | Measurement Frequency(MHz) | Delta Frequency(Hz) | Result |
| 45               | 120V                      | 5190                       | 0                   | PASS   |
| 35               |                           | 5190.04                    | 40000               | PASS   |
| 25               |                           | 5190                       | 0                   | PASS   |
| 15               |                           | 5190                       | 0                   | PASS   |
| 5                |                           | 5190                       | 0                   | PASS   |
| 0                |                           | 5190                       | 0                   | PASS   |
| 25               | 102V                      | 5190                       | 0                   | PASS   |
|                  | 120V                      | 5190                       | 0                   | PASS   |
|                  | 138V                      | 5190                       | 0                   | PASS   |

| Test mode:       |                           | 802.11ax(HE40)             | Frequency(MHz):     | 5230   |
|------------------|---------------------------|----------------------------|---------------------|--------|
| Temperature (°C) | Voltage(V <sub>AC</sub> ) | Measurement Frequency(MHz) | Delta Frequency(Hz) | Result |
| 45               | 120V                      | 5230                       | 0                   | PASS   |
| 35               |                           | 5230                       | 0                   | PASS   |
| 25               |                           | 5230                       | 0                   | PASS   |
| 15               |                           | 5230.04                    | 40000               | PASS   |
| 5                |                           | 5230                       | 0                   | PASS   |
| 0                |                           | 5230                       | 0                   | PASS   |
| 25               | 102V                      | 5230                       | 0                   | PASS   |
|                  | 120V                      | 5230                       | 0                   | PASS   |
|                  | 138V                      | 5230                       | 0                   | PASS   |

| Test mode:       |                           | 802.11ax(HE40)             | Frequency(MHz):     | 5755   |
|------------------|---------------------------|----------------------------|---------------------|--------|
| Temperature (°C) | Voltage(V <sub>AC</sub> ) | Measurement Frequency(MHz) | Delta Frequency(Hz) | Result |
| 45               | 120V                      | 5755.04                    | 40000               | PASS   |
| 35               |                           | 5755.04                    | 40000               | PASS   |
| 25               |                           | 5755.04                    | 40000               | PASS   |
| 15               |                           | 5755                       | 0                   | PASS   |
| 5                |                           | 5755.04                    | 40000               | PASS   |
| 0                |                           | 5755.04                    | 40000               | PASS   |
| 25               | 102V                      | 5755.04                    | 40000               | PASS   |
|                  | 120V                      | 5755.04                    | 40000               | PASS   |
|                  | 138V                      | 5755.04                    | 40000               | PASS   |

| Test mode:       |                           | 802.11ax(HE40)             | Frequency(MHz):     | 5795   |
|------------------|---------------------------|----------------------------|---------------------|--------|
| Temperature (°C) | Voltage(V <sub>AC</sub> ) | Measurement Frequency(MHz) | Delta Frequency(Hz) | Result |
| 45               | 120V                      | 5795                       | 0                   | PASS   |
| 35               |                           | 5795                       | 0                   | PASS   |
| 25               |                           | 5795.04                    | 40000               | PASS   |
| 15               |                           | 5795.04                    | 40000               | PASS   |
| 5                |                           | 5795                       | 0                   | PASS   |
| 0                |                           | 5795.04                    | 40000               | PASS   |
| 25               | 102V                      | 5795                       | 0                   | PASS   |
|                  | 120V                      | 5795                       | 0                   | PASS   |
|                  | 138V                      | 5795                       | 0                   | PASS   |


## Appendix A: Test Result of Conducted Test

### Duty Cycle


| Condition | Mode | Frequency (MHz) | Duty Cycle (%) | Correction Factor (dB) |
|-----------|------|-----------------|----------------|------------------------|
| NVNT      | a    | 5180            | 97.0           | 0.13                   |
| NVNT      | a    | 5200            | 98.7           | 0                      |
| NVNT      | a    | 5240            | 98.3           | 0                      |
| NVNT      | n20  | 5180            | 98.0           | 0                      |
| NVNT      | n20  | 5200            | 98.2           | 0                      |
| NVNT      | n20  | 5240            | 98.8           | 0                      |
| NVNT      | n40  | 5190            | 98.0           | 0                      |
| NVNT      | n40  | 5230            | 99.6           | 0                      |
| NVNT      | ac20 | 5180            | 96.7           | 0.15                   |
| NVNT      | ac20 | 5200            | 99.4           | 0                      |
| NVNT      | ac20 | 5240            | 98.8           | 0                      |
| NVNT      | ac40 | 5190            | 98.2           | 0                      |
| NVNT      | ac40 | 5230            | 98.6           | 0                      |
| NVNT      | ax20 | 5180            | 97.1           | 0.13                   |
| NVNT      | ax20 | 5200            | 97.9           | 0.09                   |
| NVNT      | ax20 | 5240            | 96.3           | 0.16                   |
| NVNT      | ax40 | 5190            | 98.9           | 0                      |
| NVNT      | ax40 | 5230            | 99.2           | 0                      |
| NVNT      | a    | 5745            | 99.7           | 0                      |
| NVNT      | a    | 5785            | 99.0           | 0                      |
| NVNT      | a    | 5825            | 98.3           | 0                      |
| NVNT      | n20  | 5745            | 97.8           | 0.10                   |
| NVNT      | n20  | 5785            | 98.7           | 0                      |
| NVNT      | n20  | 5825            | 98.3           | 0                      |
| NVNT      | n40  | 5755            | 99.6           | 0                      |
| NVNT      | n40  | 5795            | 99.1           | 0                      |
| NVNT      | ac20 | 5745            | 98.0           | 0                      |
| NVNT      | ac20 | 5785            | 98.2           | 0                      |
| NVNT      | ac20 | 5825            | 97.8           | 0.1                    |
| NVNT      | ac40 | 5755            | 99.2           | 0                      |
| NVNT      | ac40 | 5795            | 98.5           | 0                      |
| NVNT      | ax20 | 5745            | 97.9           | 0.09                   |
| NVNT      | ax20 | 5785            | 97.7           | 0.10                   |
| NVNT      | ax20 | 5825            | 97.8           | 0.10                   |
| NVNT      | ax40 | 5755            | 99.3           | 0                      |
| NVNT      | ax40 | 5795            | 99.4           | 0                      |

## Test Graphs


### Duty Cycle NVNT a 5180MHz

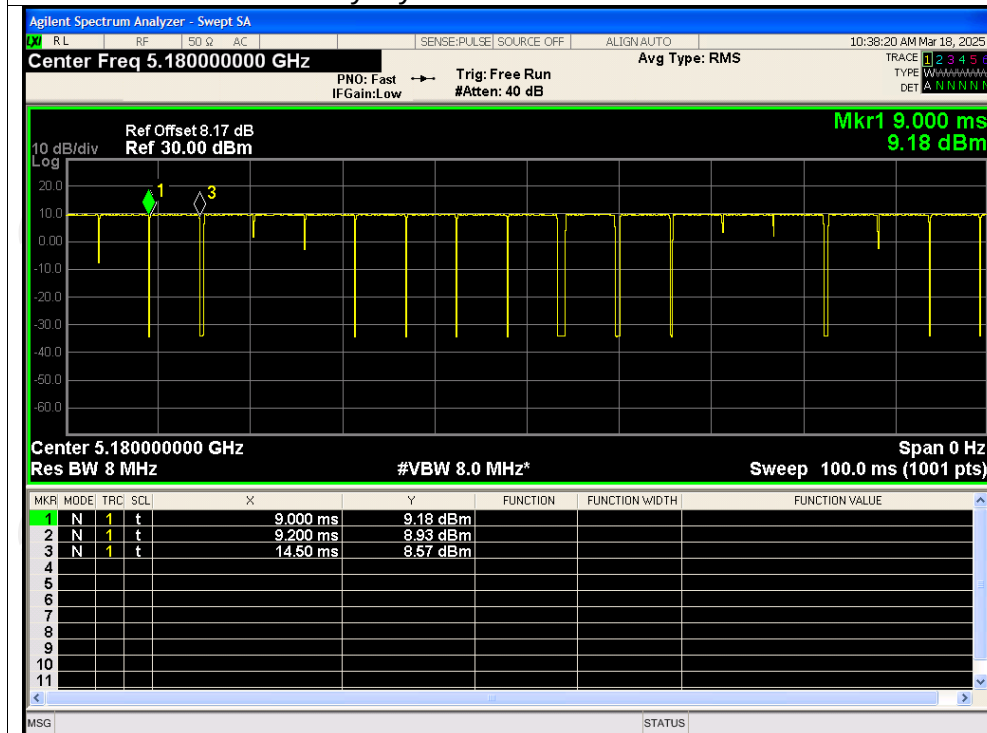


### Duty Cycle NVNT a 5200MHz

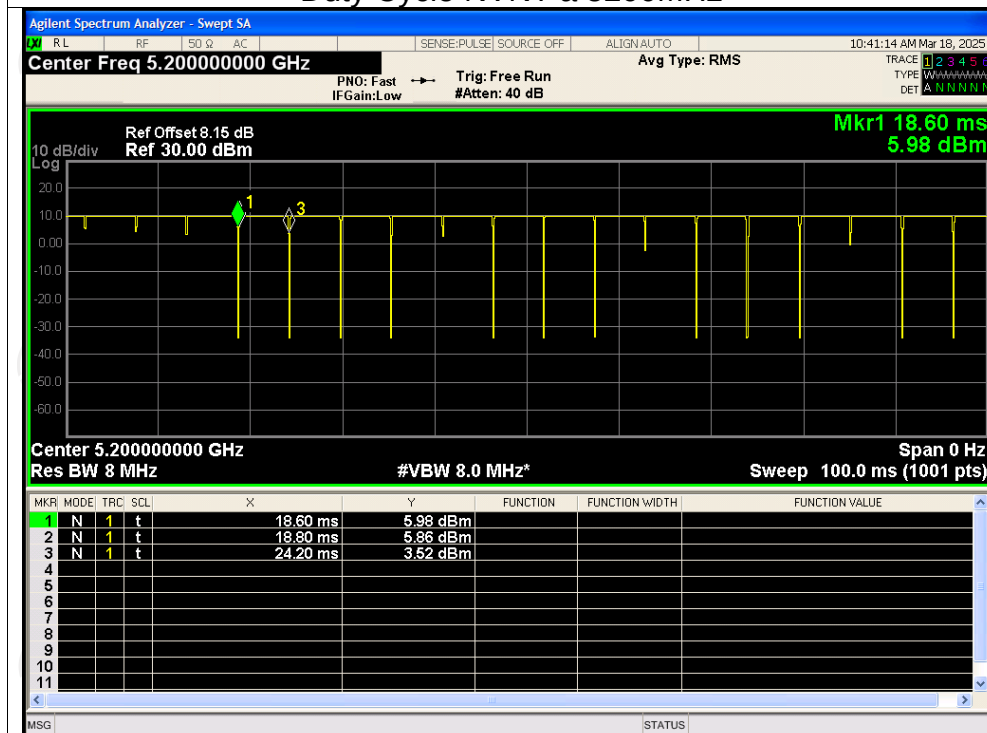


## Duty Cycle NVNT a 5240MHz

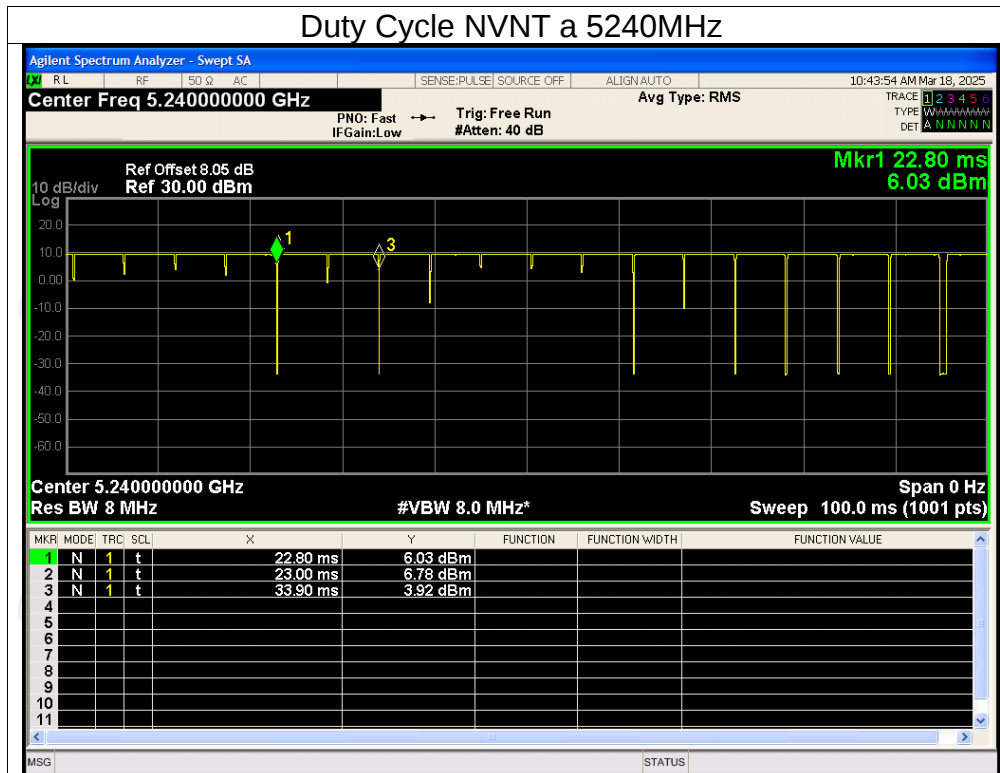


## Duty Cycle NVNT n20 5180MHz

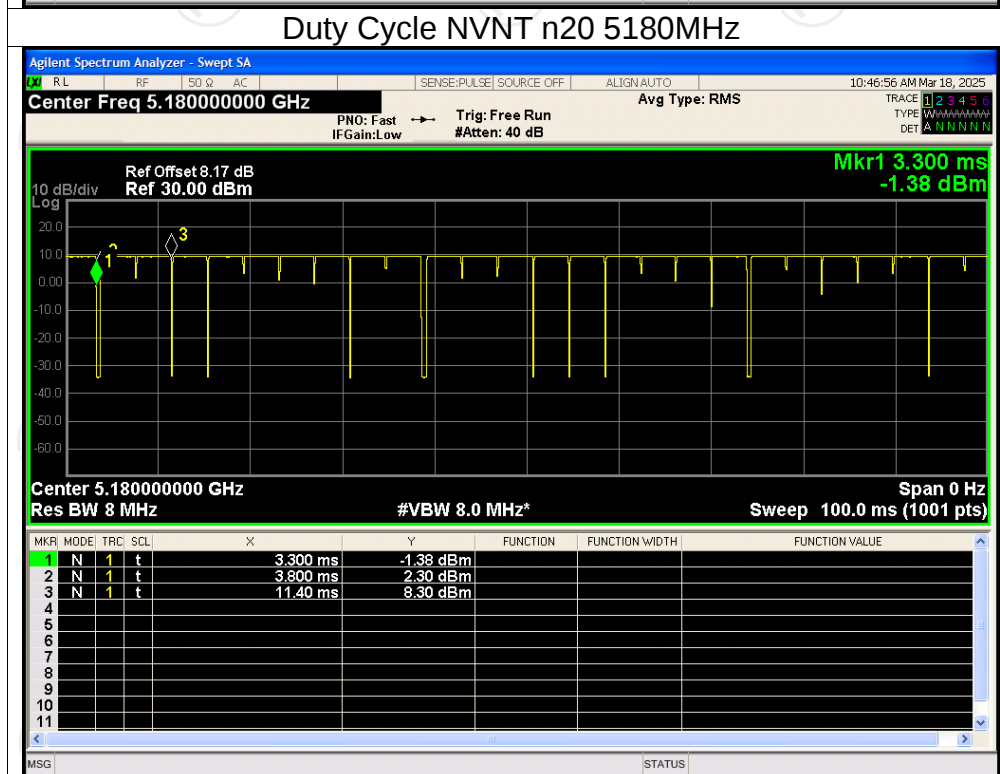


## Duty Cycle NVNT n20 5200MHz

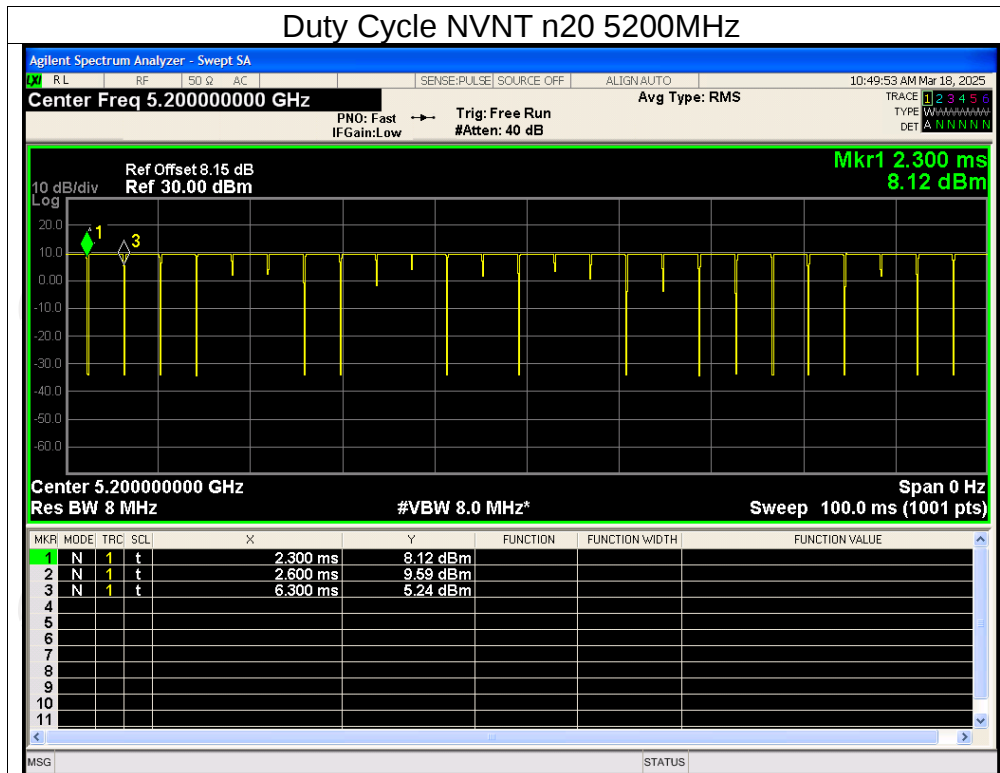


## Duty Cycle NVNT n20 5240MHz

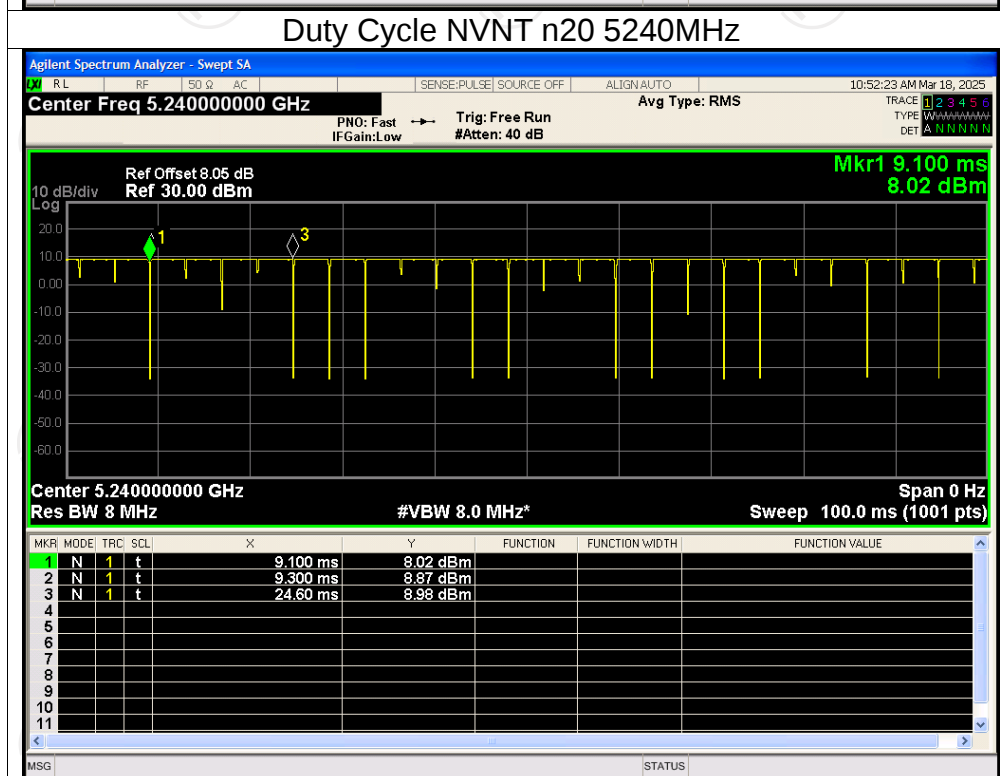


## Duty Cycle NVNT n40 5190MHz

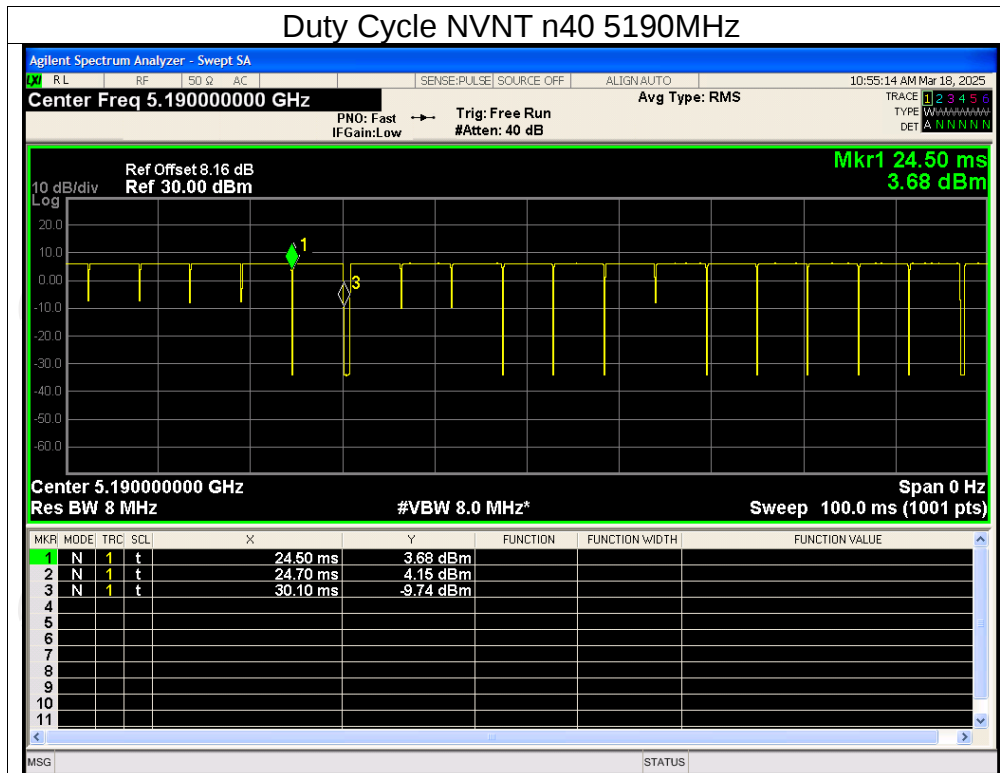


## Duty Cycle NVNT n40 5230MHz

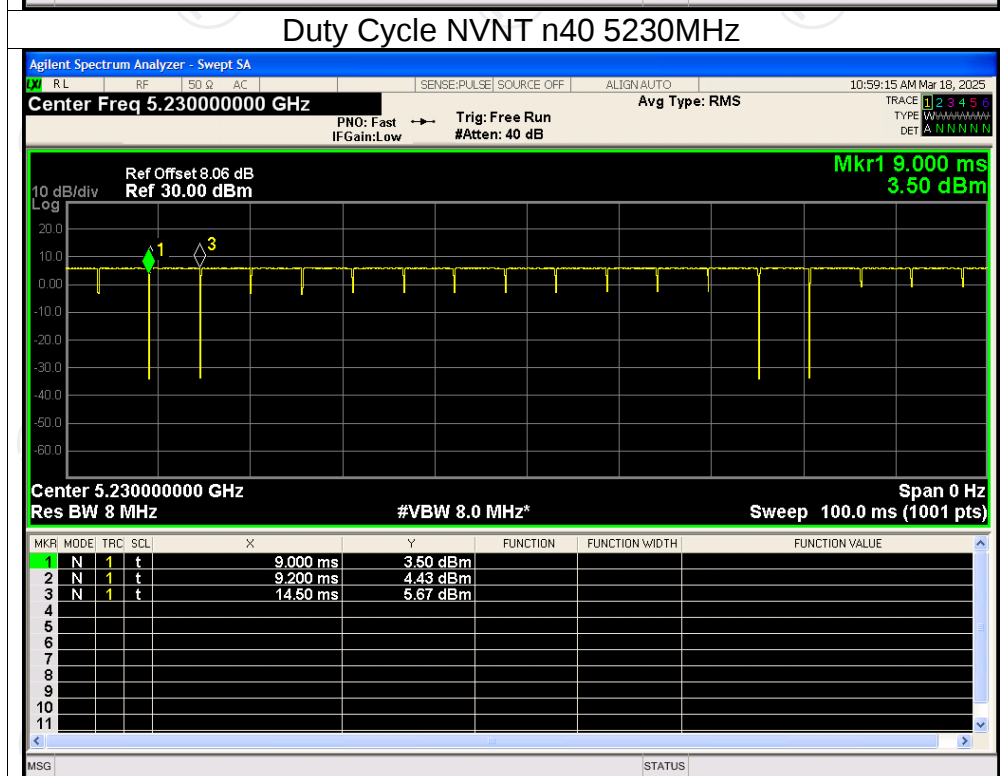


## Duty Cycle NVNT ac20 5180MHz

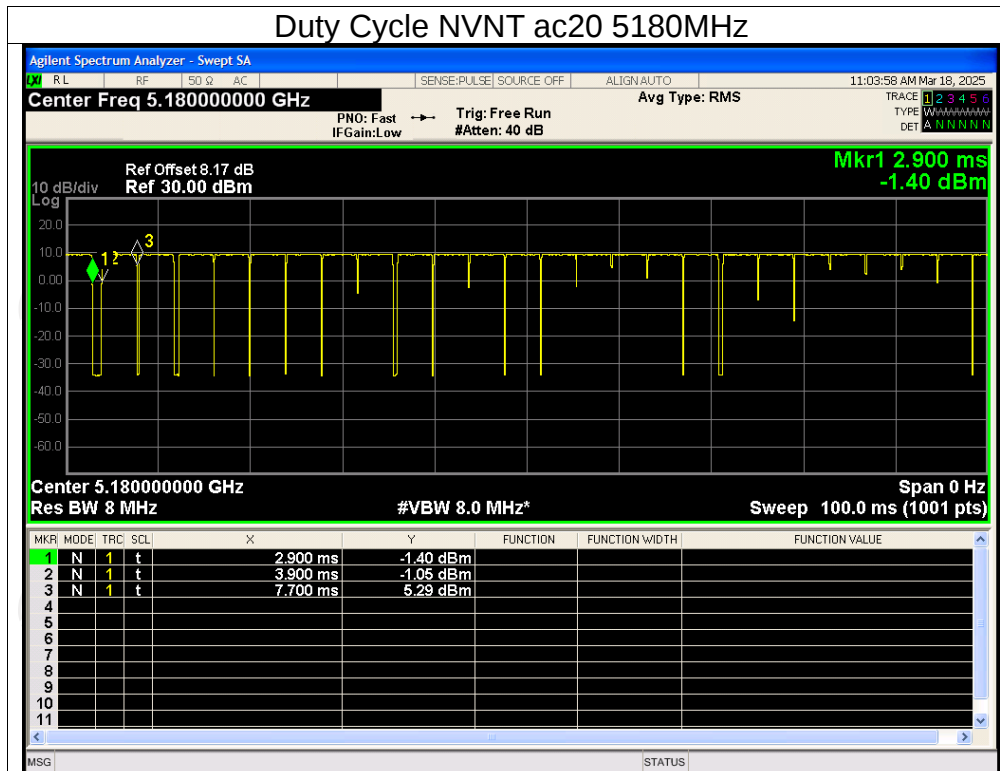


## Duty Cycle NVNT ac20 5200MHz

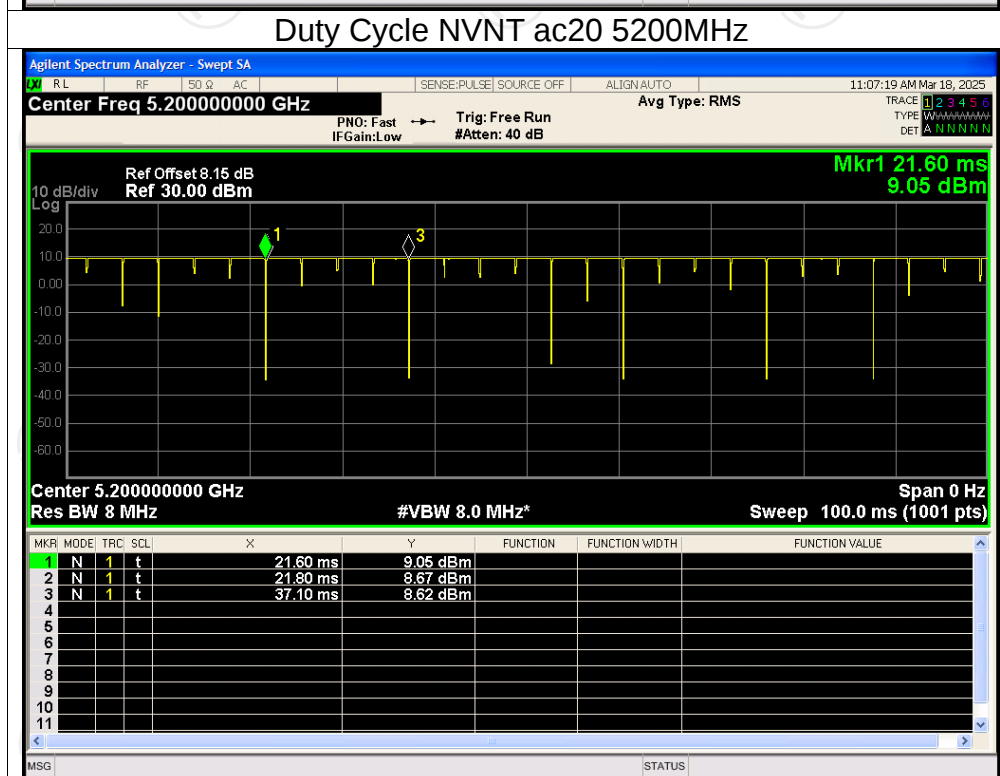


## Duty Cycle NVNT ac20 5240MHz

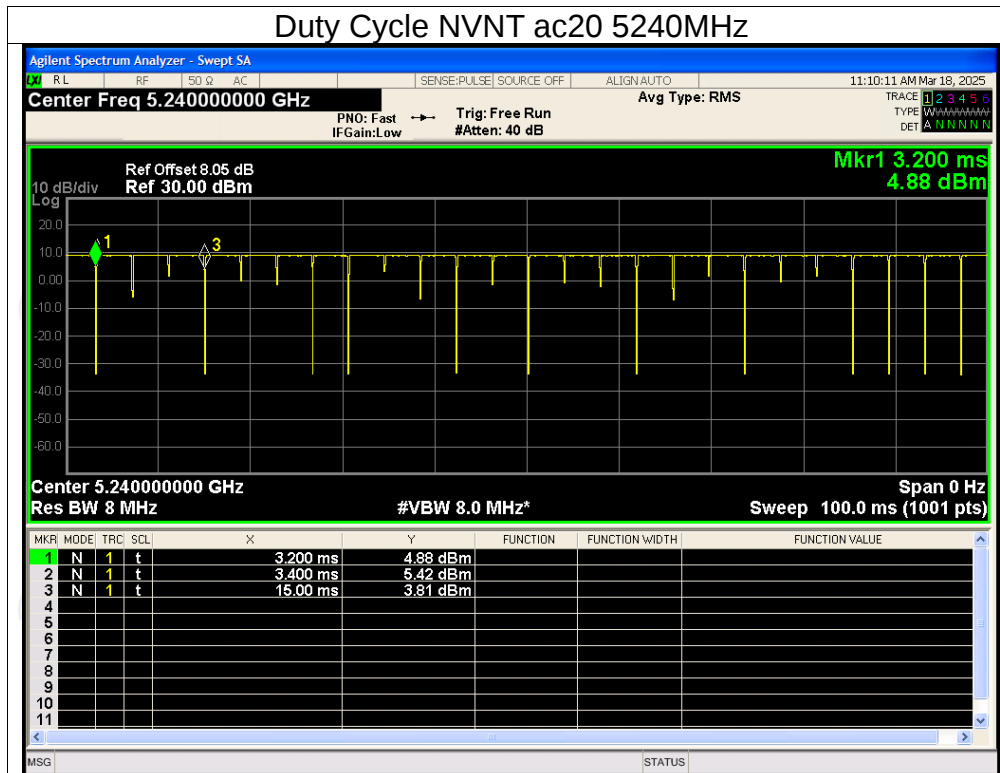


## Duty Cycle NVNT ac40 5190MHz

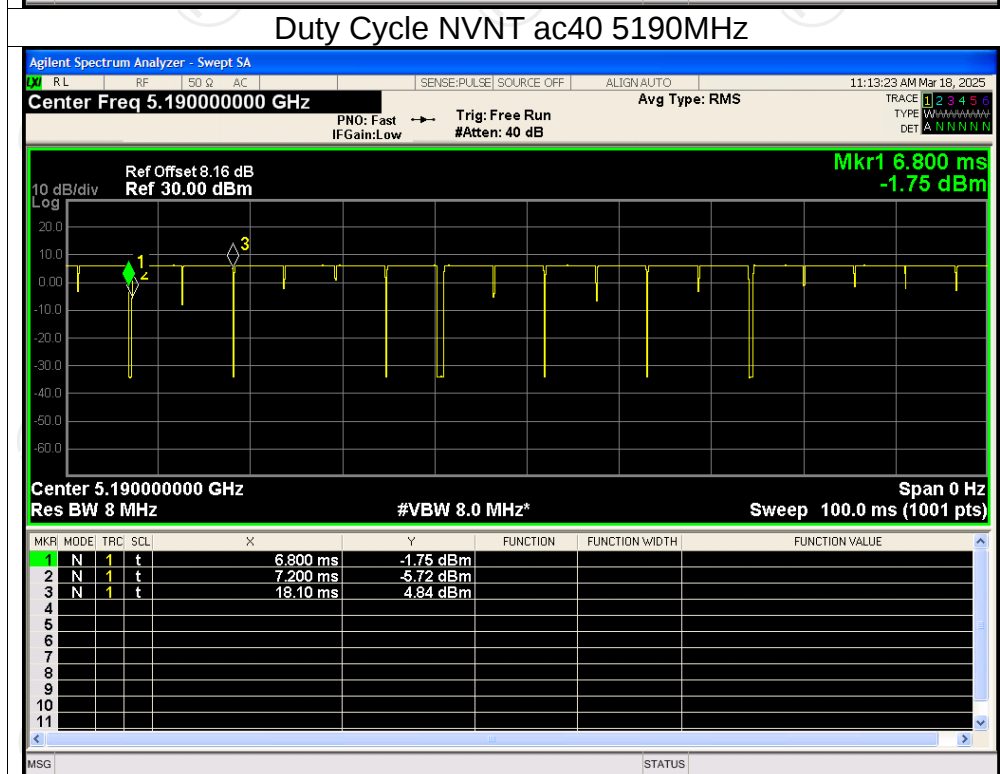


## Duty Cycle NVNT ac40 5230MHz

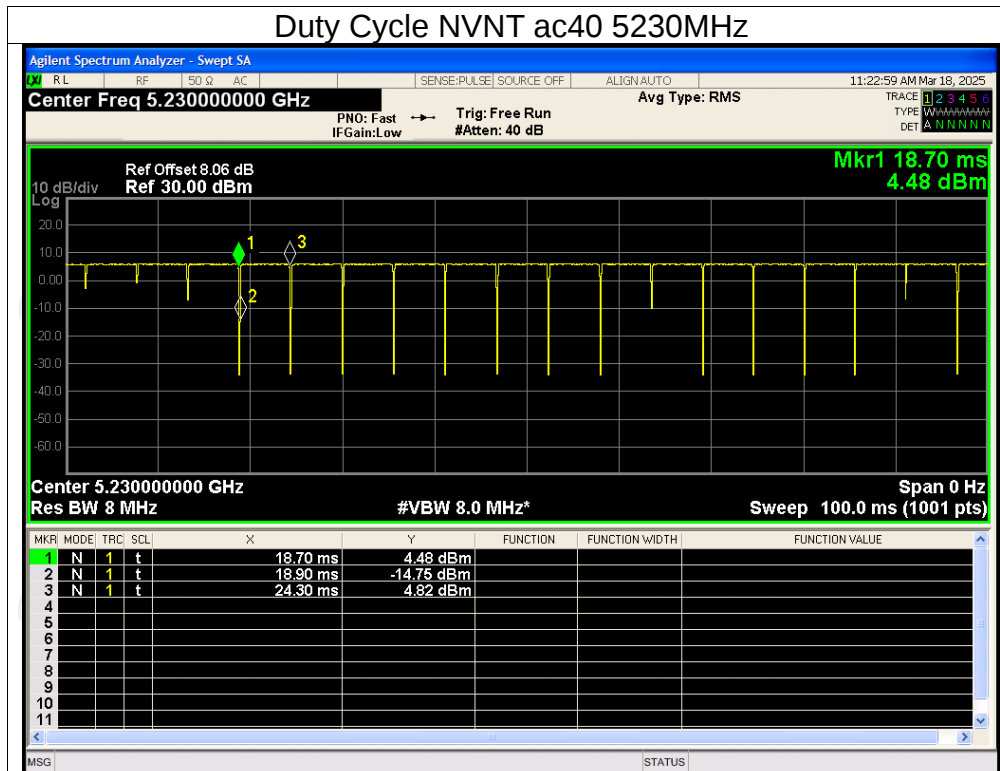


## Duty Cycle NVNT ax20 5180MHz

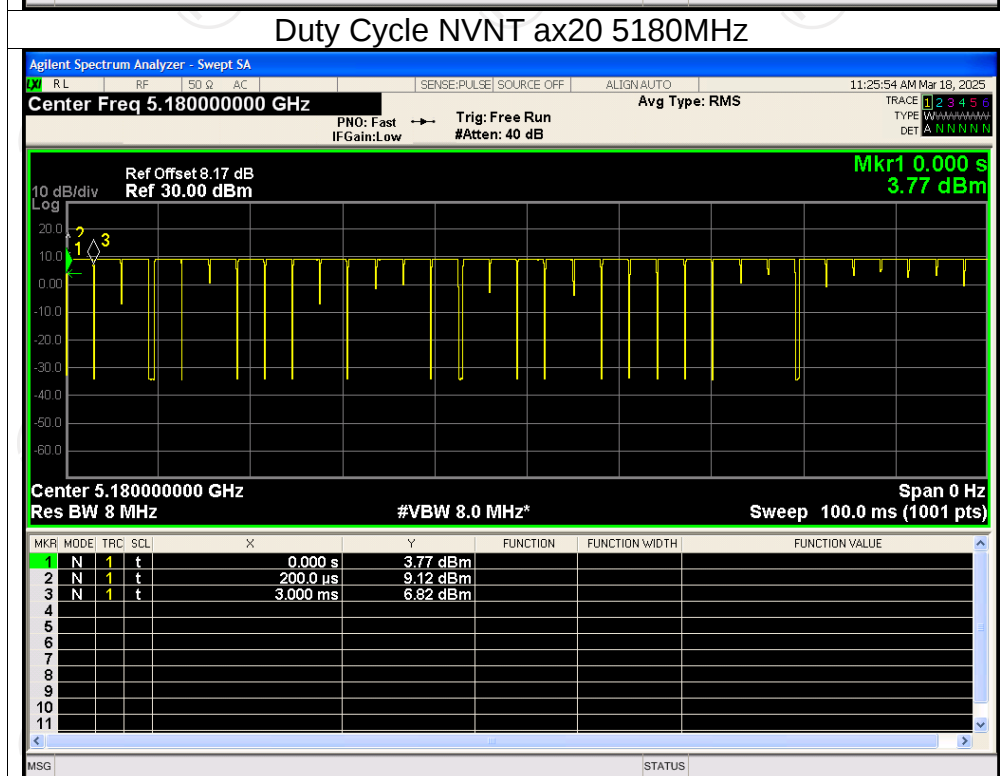


## Duty Cycle NVNT ax20 5200MHz

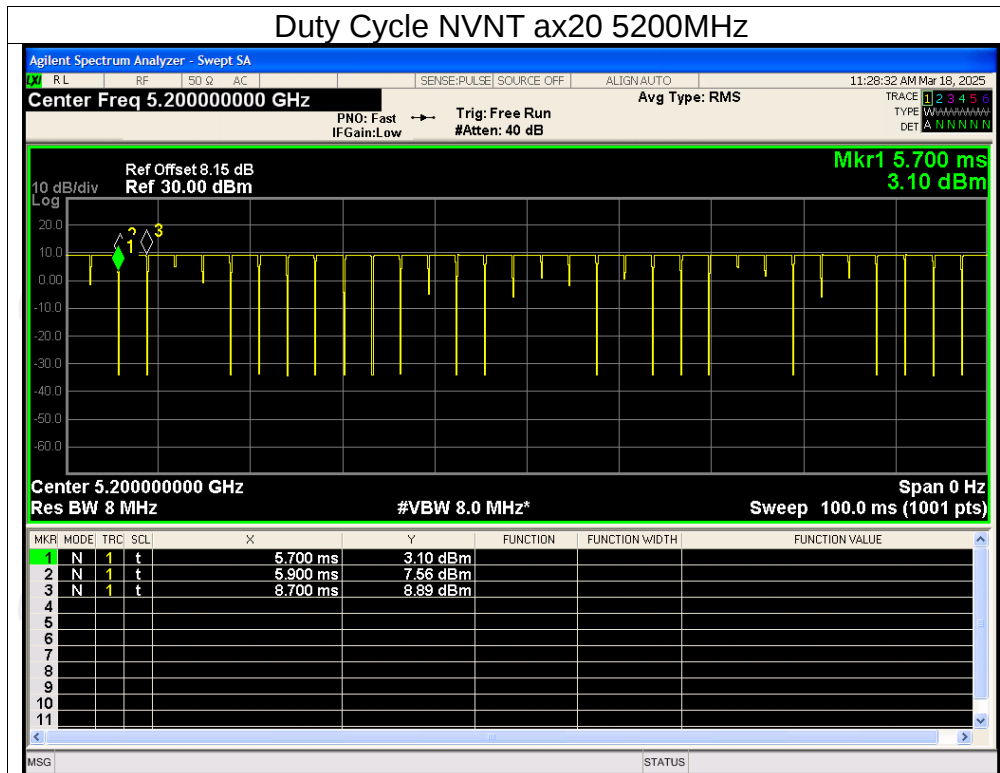


## Duty Cycle NVNT ax20 5240MHz

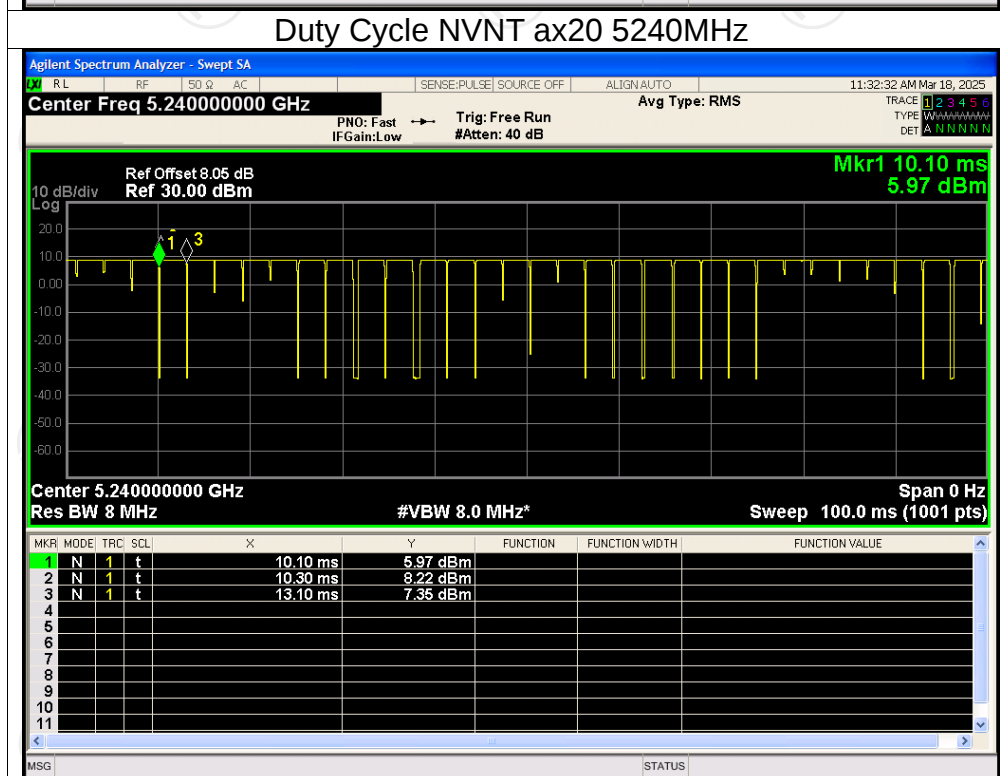


## Duty Cycle NVNT ax40 5190MHz

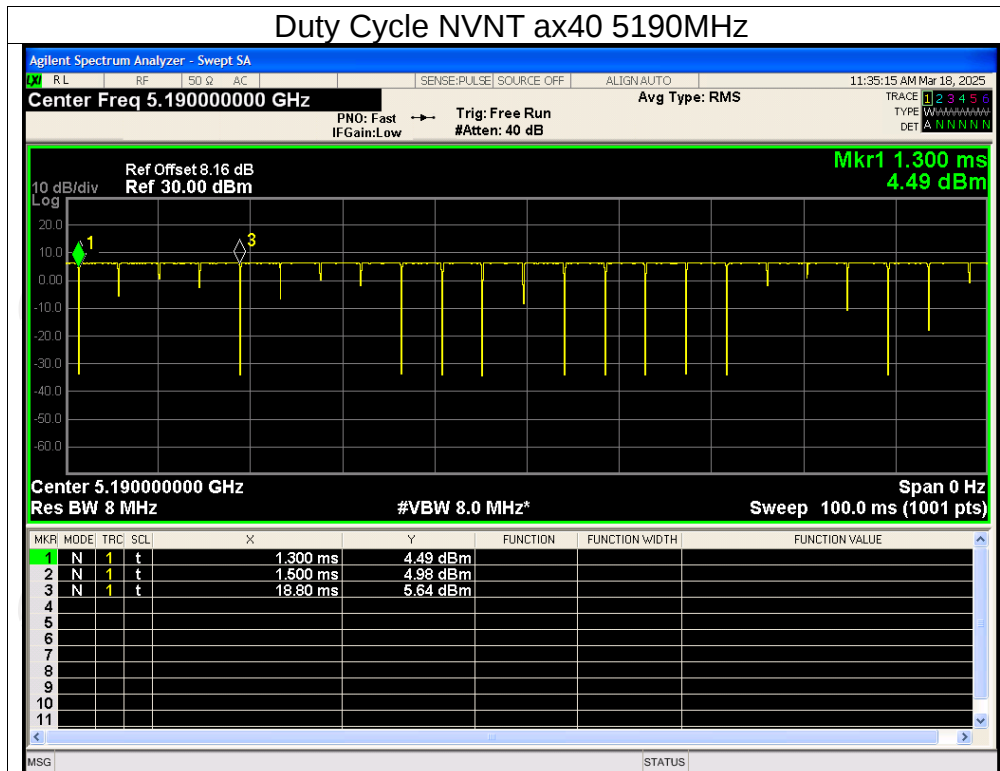


## Duty Cycle NVNT ax40 5230MHz

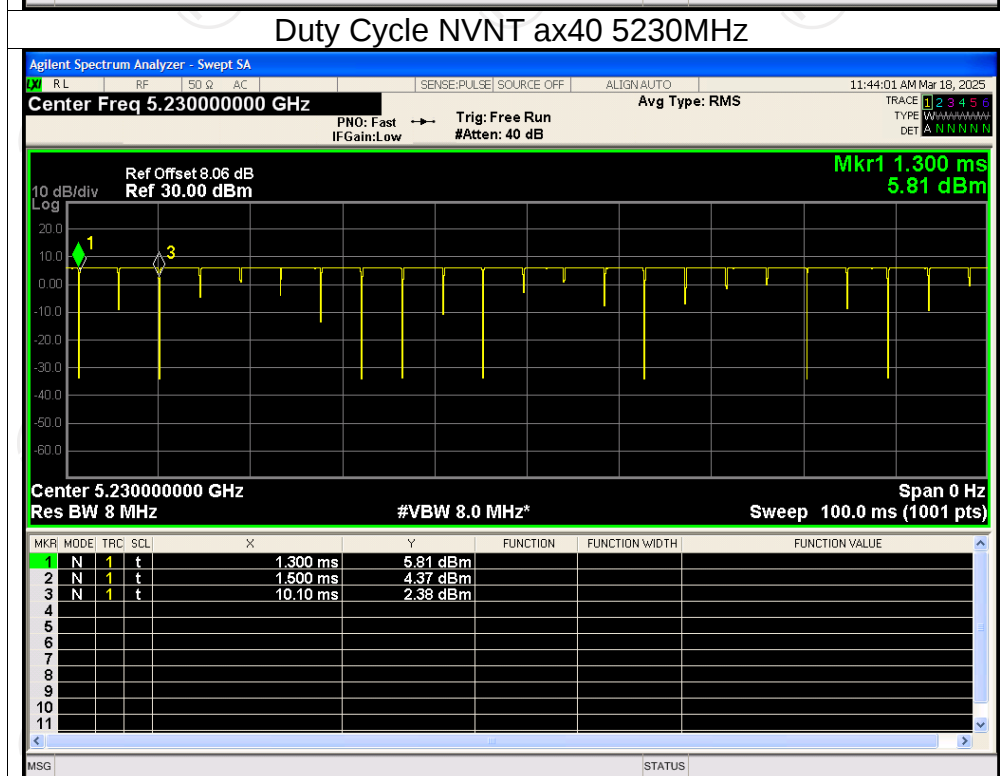


## Duty Cycle NVNT a 5745MHz

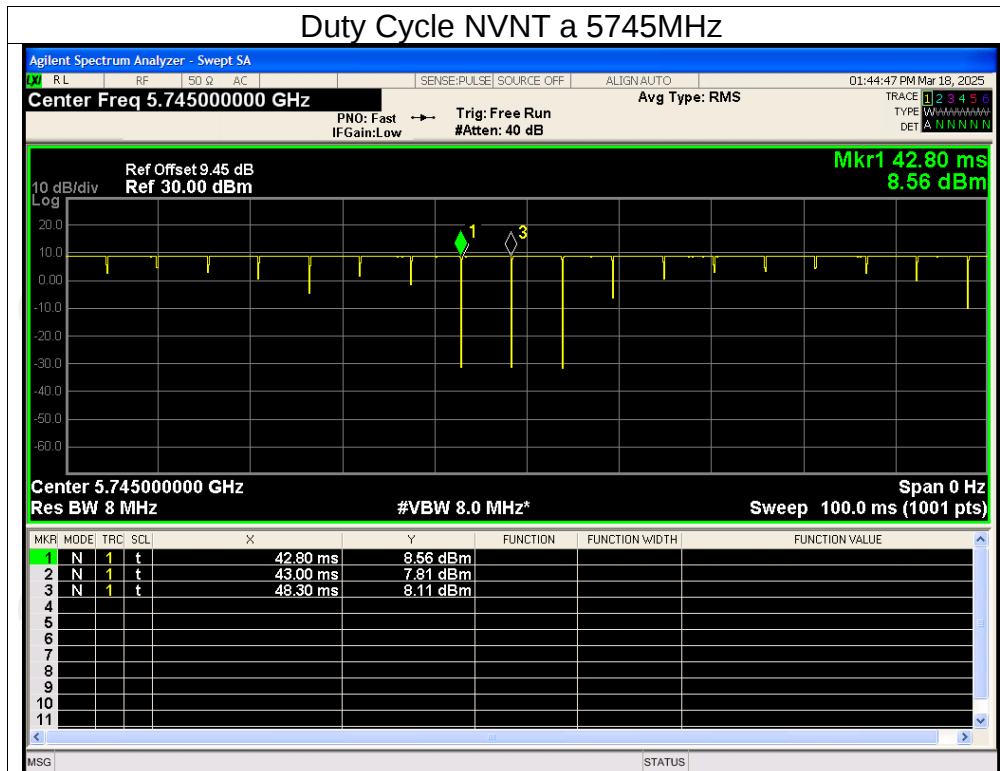


## Duty Cycle NVNT a 5785MHz

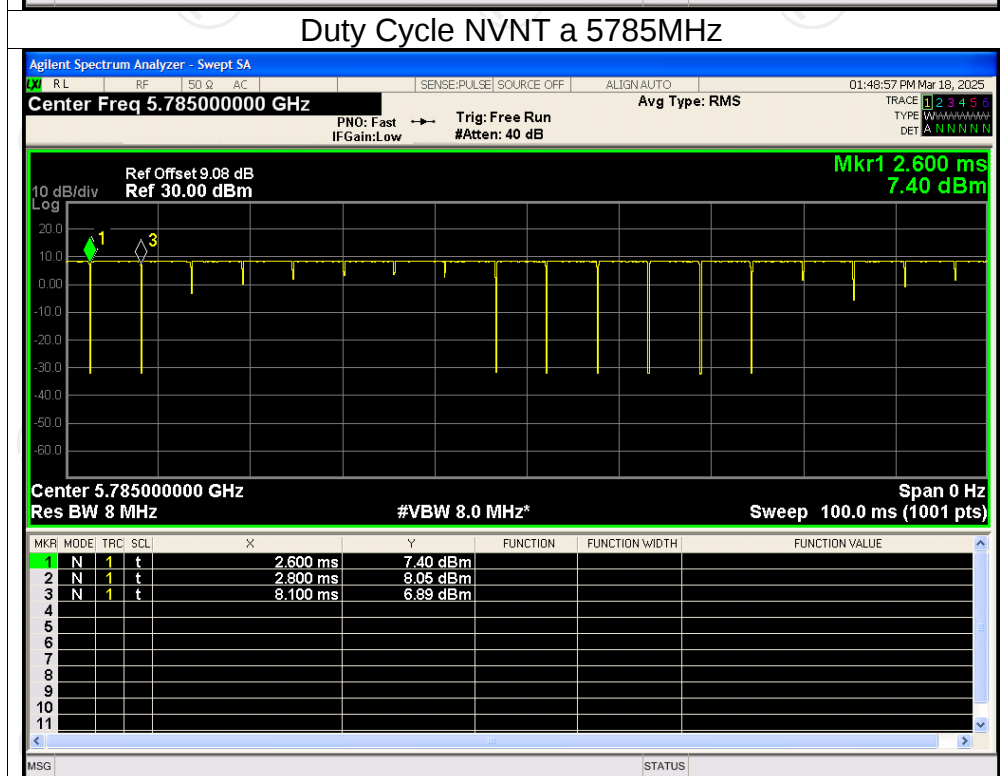


## Duty Cycle NVNT a 5825MHz

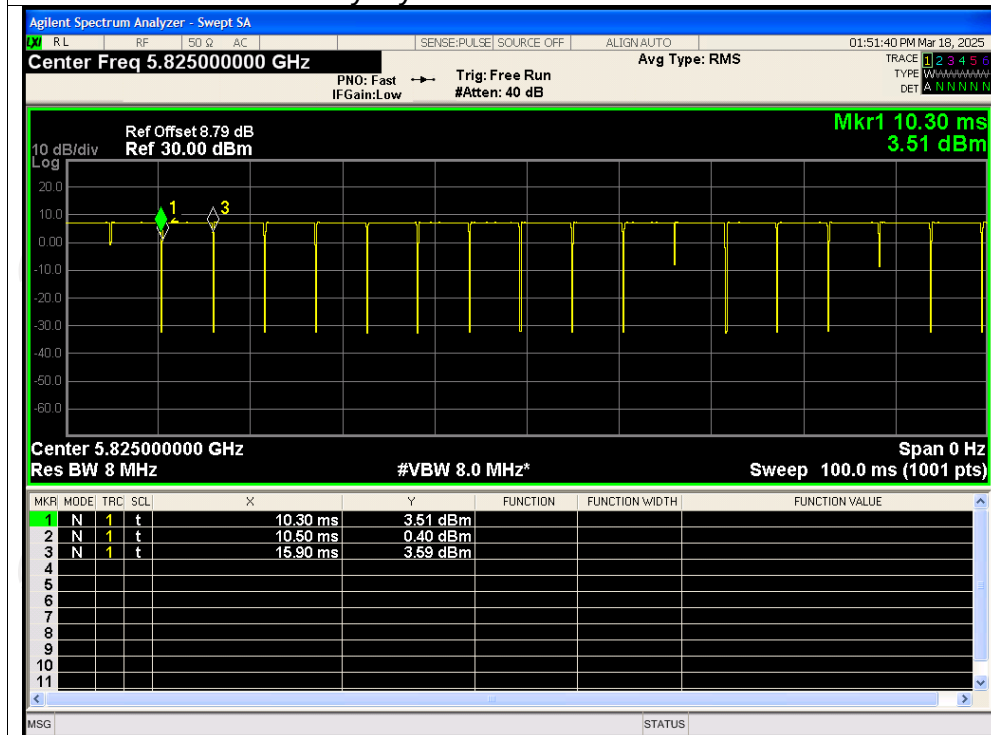


## Duty Cycle NVNT n20 5745MHz

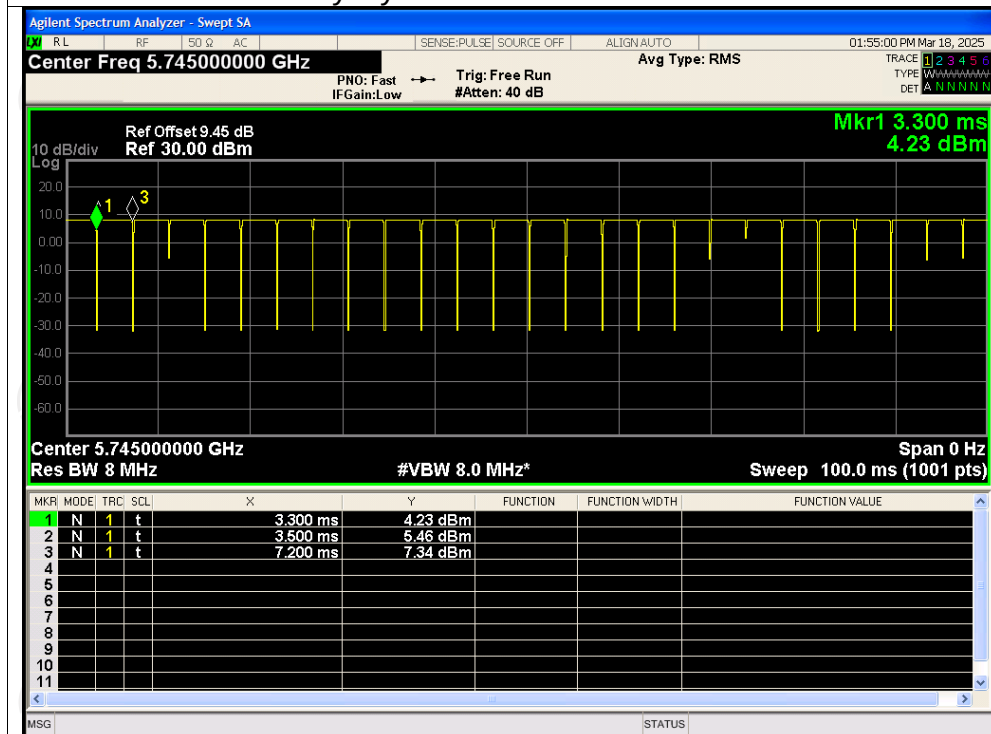


## Duty Cycle NVNT n20 5785MHz

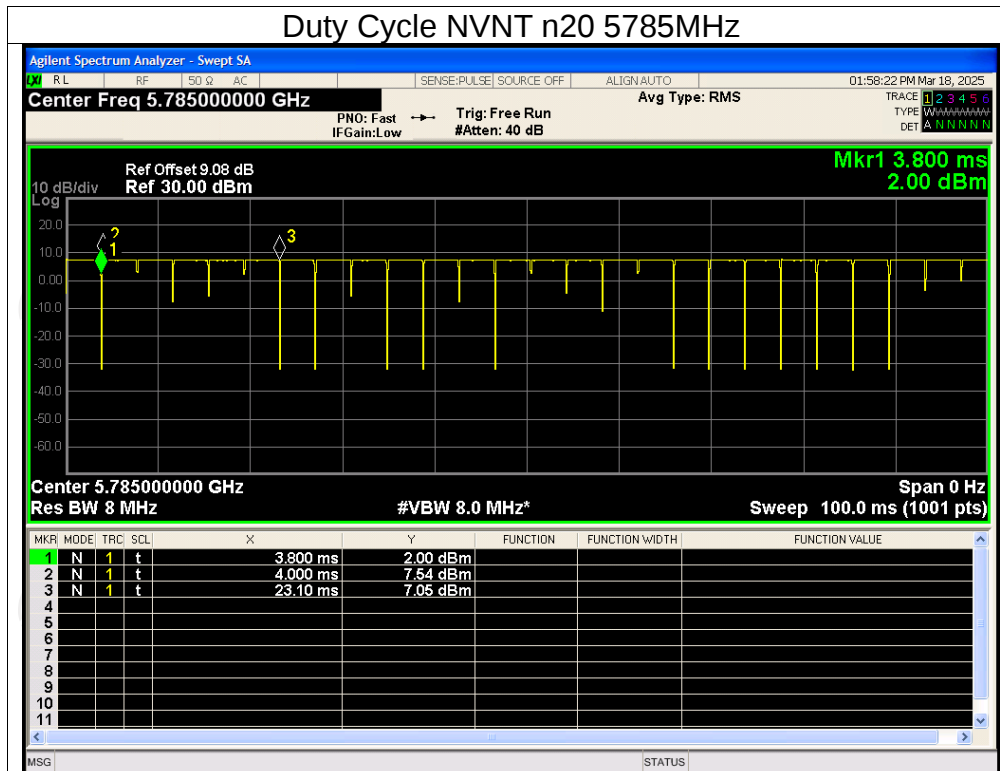


## Duty Cycle NVNT n20 5825MHz

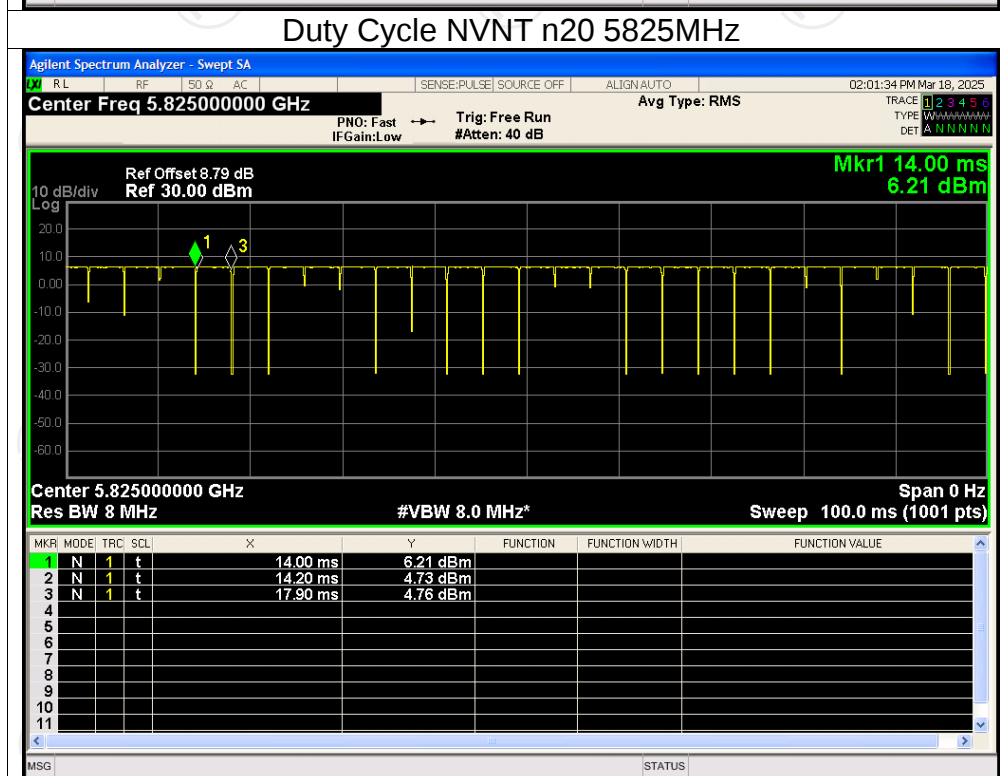


## Duty Cycle NVNT n40 5755MHz

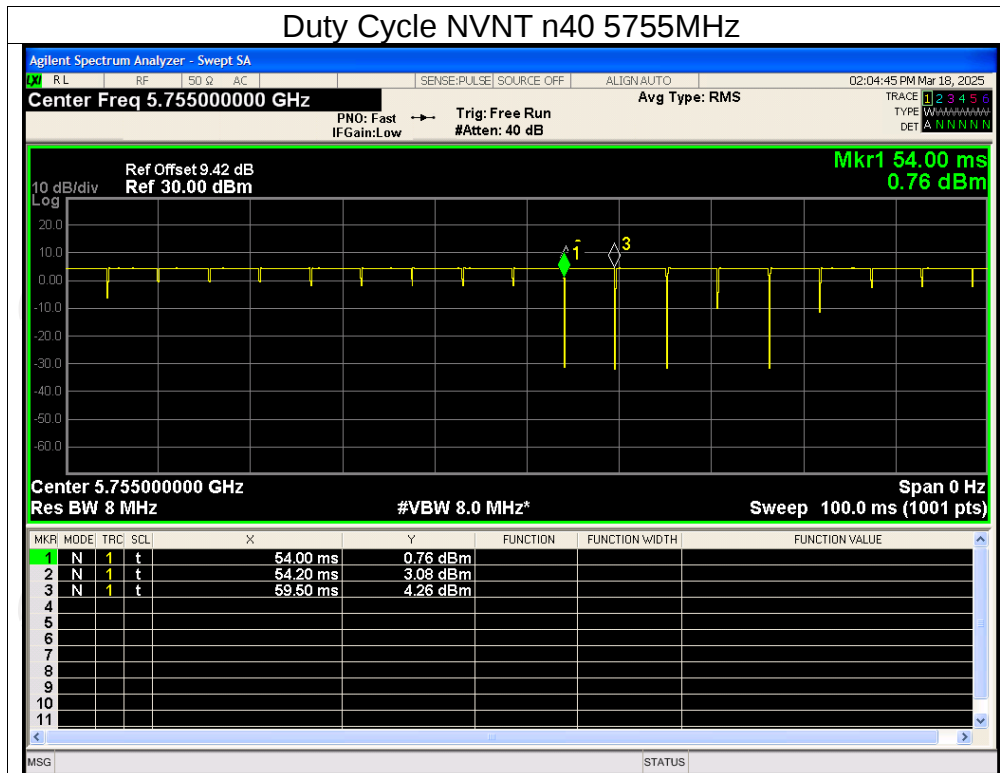


## Duty Cycle NVNT n40 5795MHz

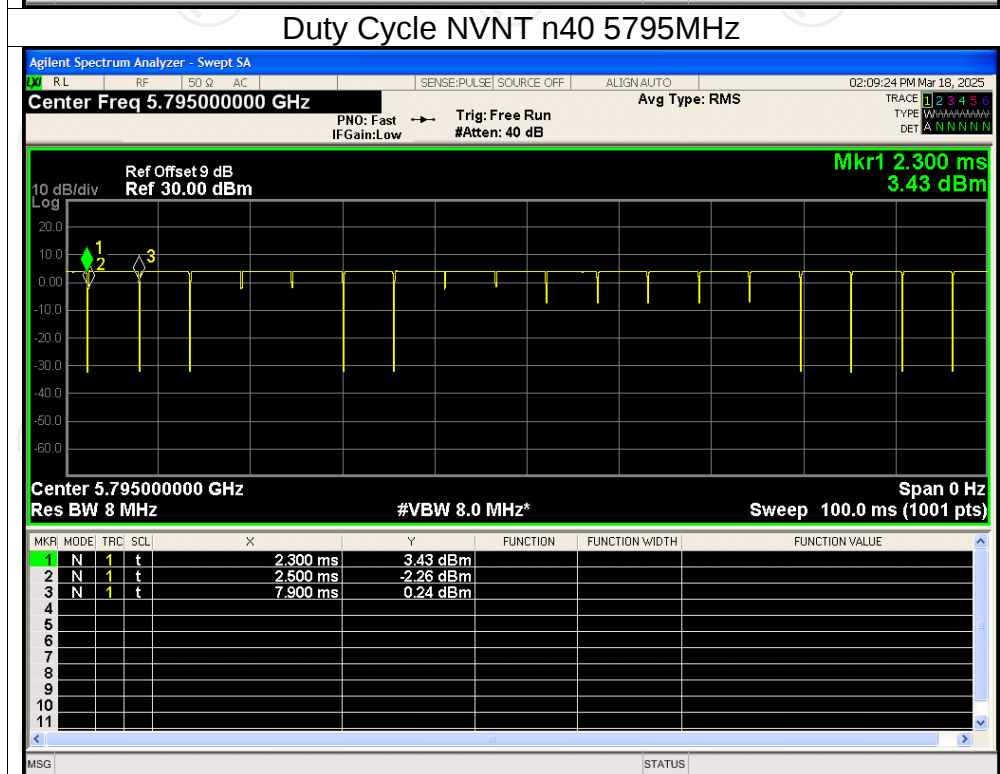


## Duty Cycle NVNT ac20 5745MHz

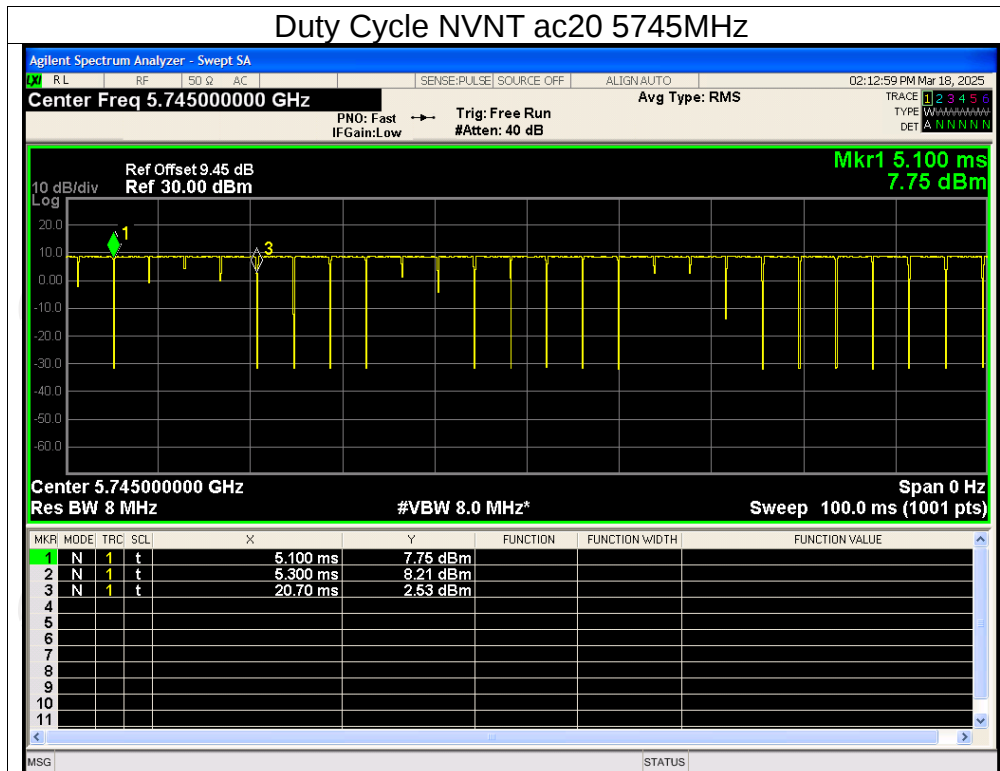


## Duty Cycle NVNT ac20 5785MHz

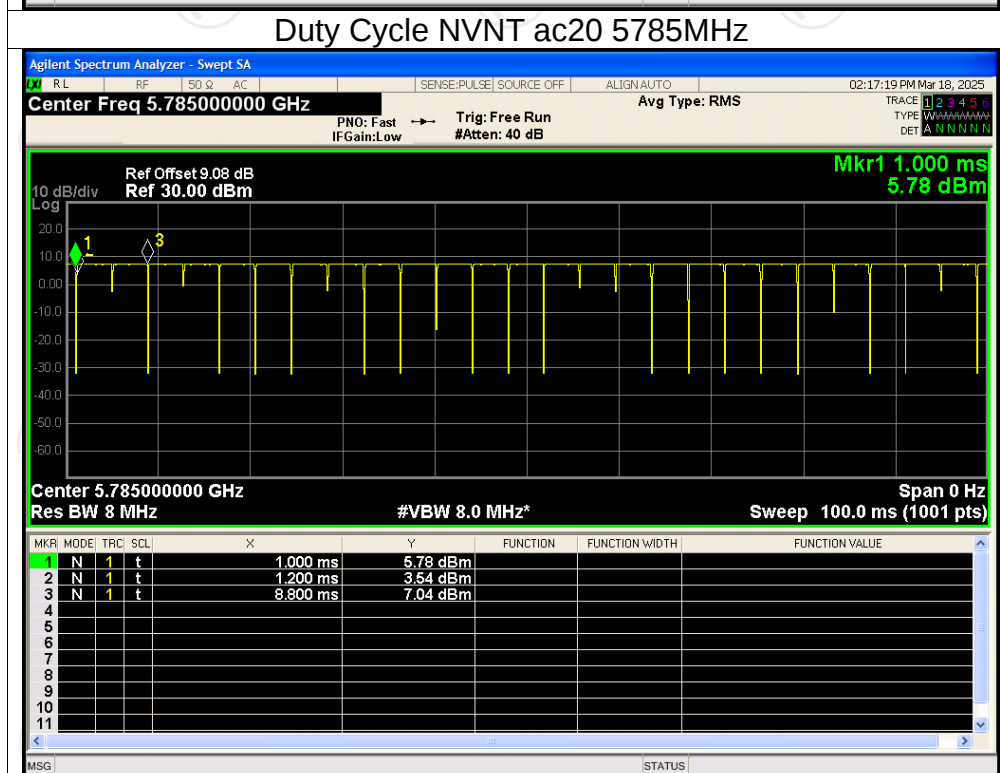


## Duty Cycle NVNT ac20 5825MHz

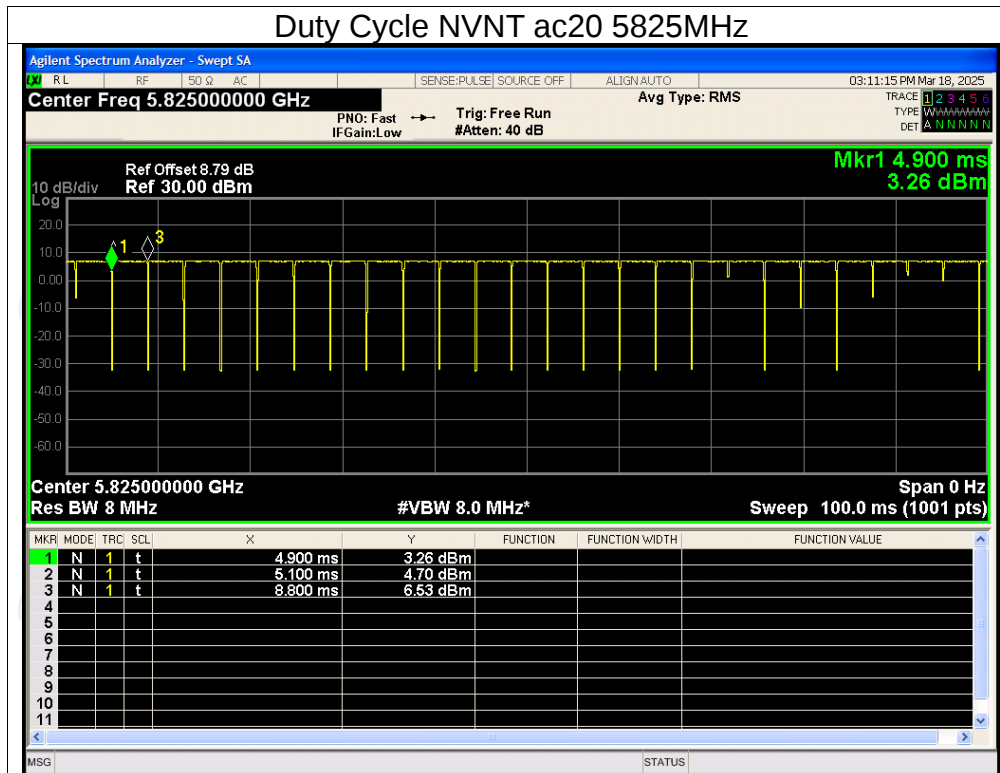


## Duty Cycle NVNT ac40 5755MHz

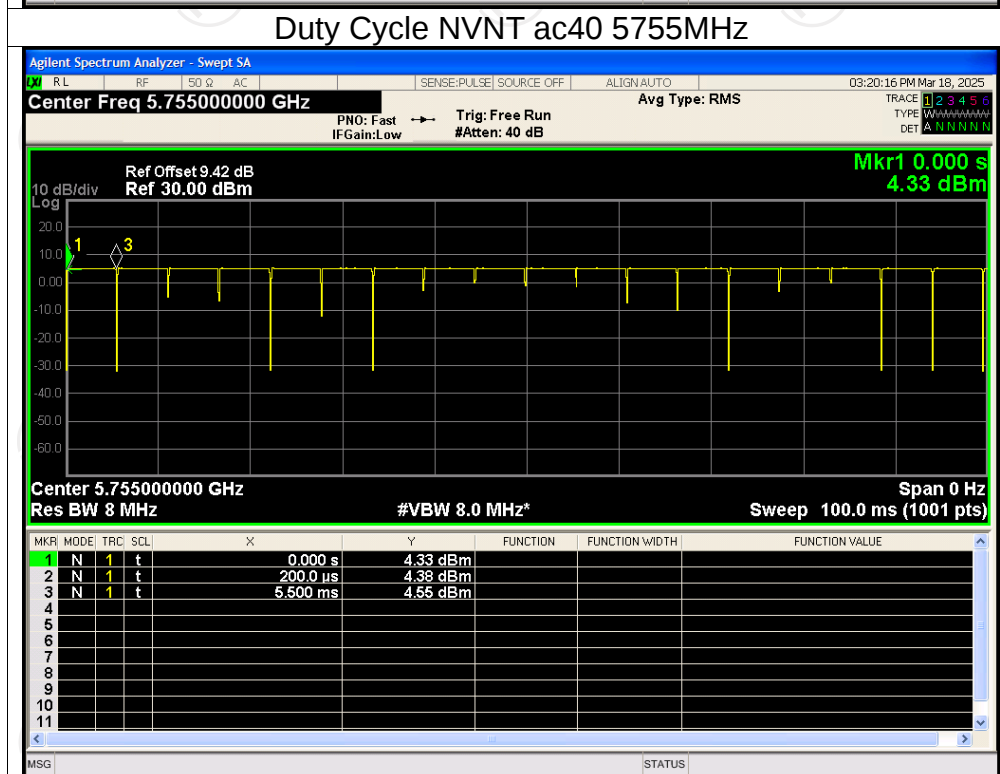


## Duty Cycle NVNT ac40 5795MHz

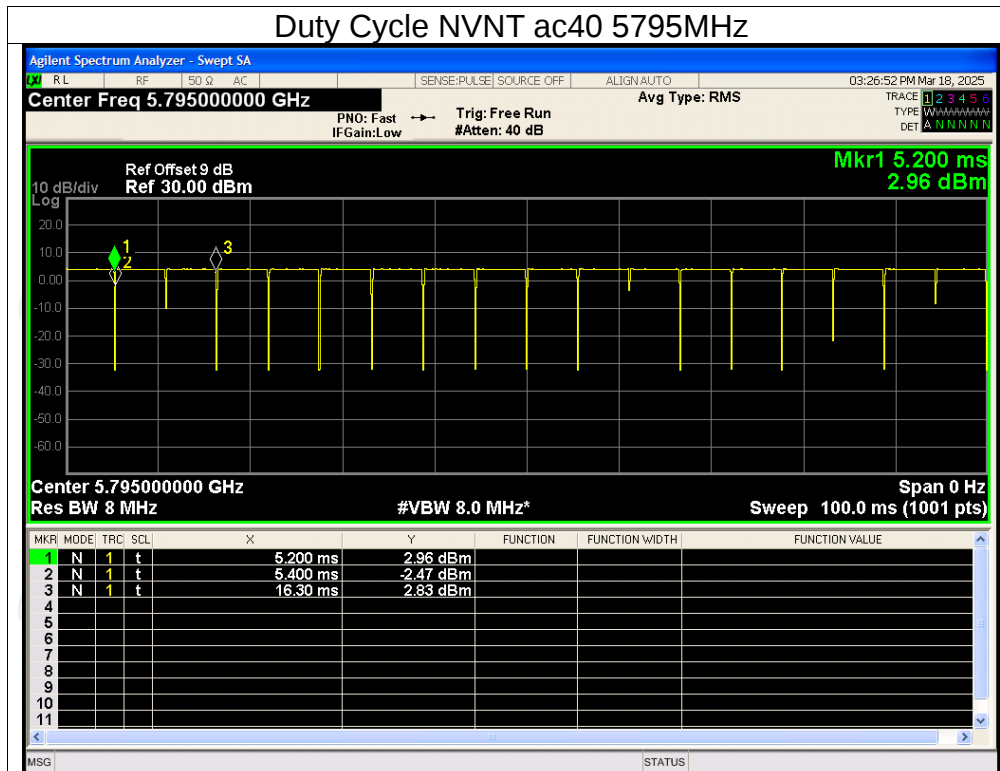


## Duty Cycle NVNT ax20 5745MHz

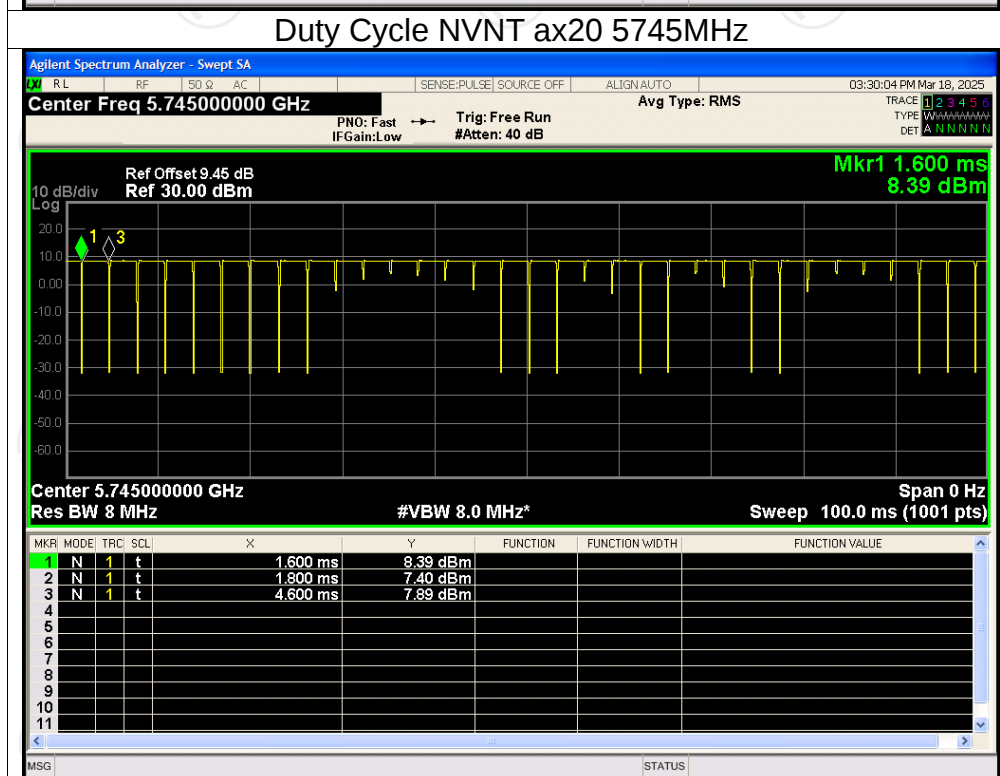


## Duty Cycle NVNT ax20 5785MHz

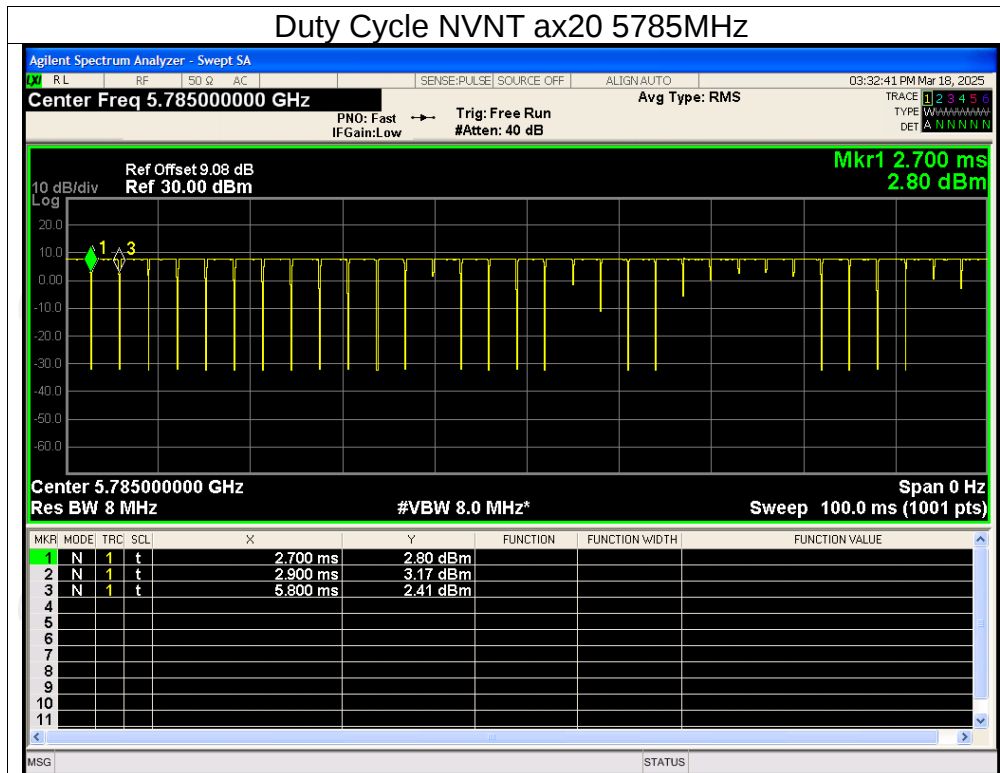


## Duty Cycle NVNT ax20 5825MHz

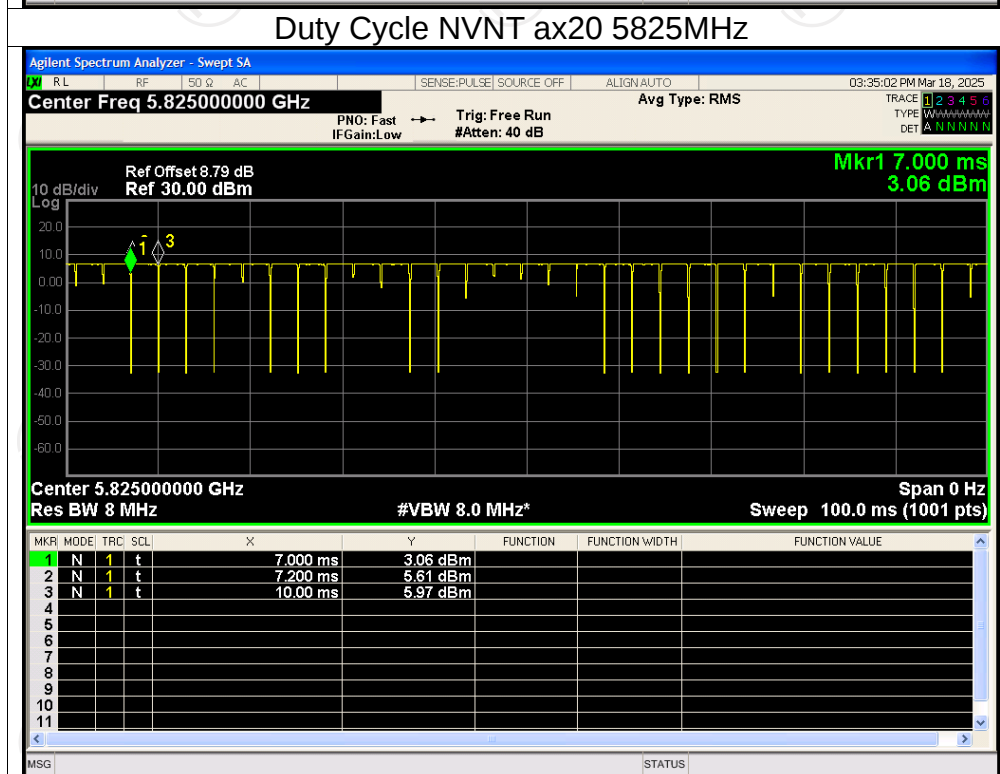

## Duty Cycle NVNT ax40 5755MHz

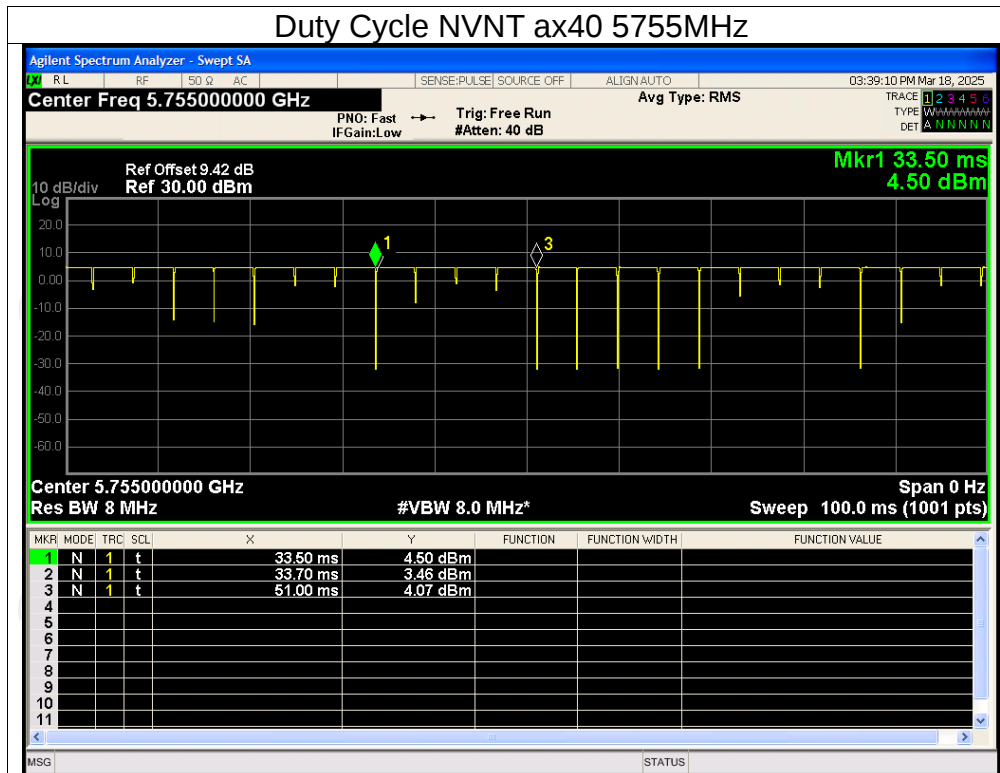

## Duty Cycle NVNT ax40 5795MHz

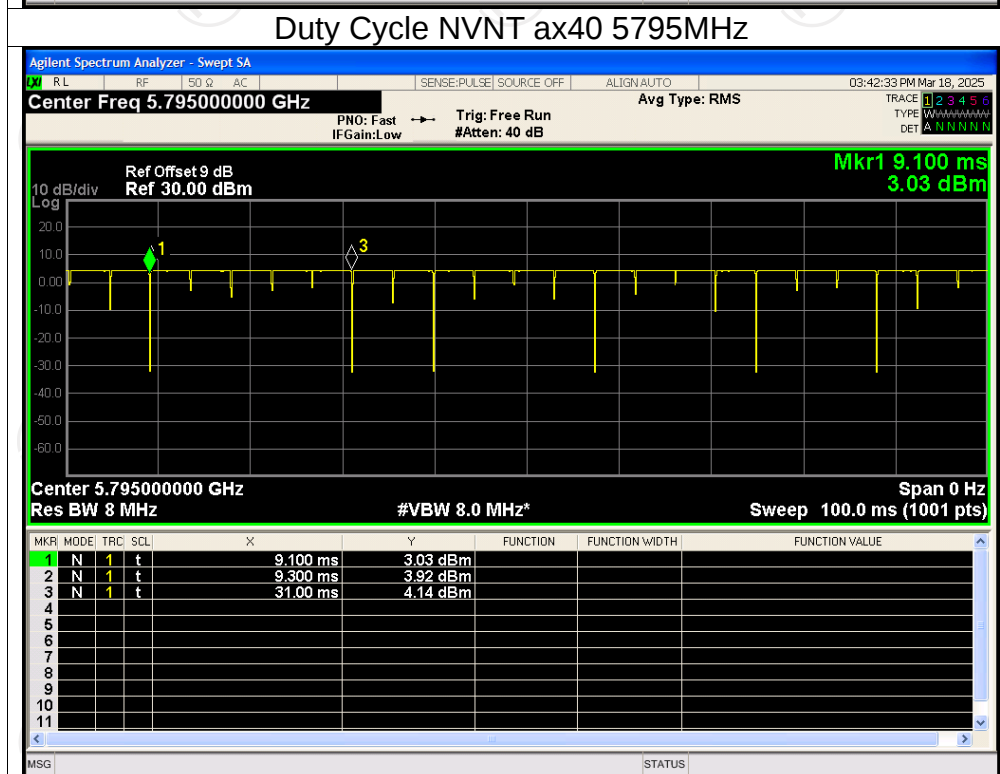


## Maximum Conducted Output Power


| Condition | Mode | Frequency (MHz) | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | a    | 5180            | 12.59                 | 0.13             | 12.72             | 24          | Pass    |
| NVNT      | a    | 5200            | 12.71                 | 0                | 12.71             | 24          | Pass    |
| NVNT      | a    | 5240            | 12.26                 | 0                | 12.26             | 24          | Pass    |
| NVNT      | n20  | 5180            | 12.54                 | 0                | 12.54             | 24          | Pass    |
| NVNT      | n20  | 5200            | 12.49                 | 0                | 12.49             | 24          | Pass    |
| NVNT      | n20  | 5240            | 12.17                 | 0                | 12.17             | 24          | Pass    |
| NVNT      | n40  | 5190            | 12.47                 | 0                | 12.47             | 24          | Pass    |
| NVNT      | n40  | 5230            | 12.32                 | 0                | 12.32             | 24          | Pass    |
| NVNT      | ac20 | 5180            | 12.48                 | 0.15             | 12.63             | 24          | Pass    |
| NVNT      | ac20 | 5200            | 12.47                 | 0                | 12.47             | 24          | Pass    |
| NVNT      | ac20 | 5240            | 12.11                 | 0                | 12.11             | 24          | Pass    |
| NVNT      | ac40 | 5190            | 12.42                 | 0                | 12.42             | 24          | Pass    |
| NVNT      | ac40 | 5230            | 12.35                 | 0                | 12.35             | 24          | Pass    |
| NVNT      | ax20 | 5180            | 12.20                 | 0.13             | 12.33             | 24          | Pass    |
| NVNT      | ax20 | 5200            | 12.41                 | 0.09             | 12.50             | 24          | Pass    |
| NVNT      | ax20 | 5240            | 12.01                 | 0.16             | 12.17             | 24          | Pass    |
| NVNT      | ax40 | 5190            | 12.54                 | 0                | 12.54             | 24          | Pass    |
| NVNT      | ax40 | 5230            | 12.31                 | 0                | 12.31             | 24          | Pass    |
| NVNT      | a    | 5745            | 12.18                 | 0                | 12.18             | 30          | Pass    |
| NVNT      | a    | 5785            | 11.64                 | 0                | 11.64             | 30          | Pass    |
| NVNT      | a    | 5825            | 10.44                 | 0                | 10.44             | 30          | Pass    |
| NVNT      | n20  | 5745            | 11.79                 | 0.10             | 11.89             | 30          | Pass    |
| NVNT      | n20  | 5785            | 11.01                 | 0                | 11.01             | 30          | Pass    |
| NVNT      | n20  | 5825            | 9.92                  | 0                | 9.92              | 30          | Pass    |
| NVNT      | n40  | 5755            | 11.86                 | 0                | 11.86             | 30          | Pass    |
| NVNT      | n40  | 5795            | 11.17                 | 0                | 11.17             | 30          | Pass    |
| NVNT      | ac20 | 5745            | 12.20                 | 0                | 12.20             | 30          | Pass    |
| NVNT      | ac20 | 5785            | 10.88                 | 0                | 10.88             | 30          | Pass    |
| NVNT      | ac20 | 5825            | 10.49                 | 0.10             | 10.59             | 30          | Pass    |
| NVNT      | ac40 | 5755            | 12.20                 | 0                | 12.20             | 30          | Pass    |
| NVNT      | ac40 | 5795            | 11.21                 | 0                | 11.21             | 30          | Pass    |
| NVNT      | ax20 | 5745            | 12.41                 | 0.09             | 12.50             | 30          | Pass    |
| NVNT      | ax20 | 5785            | 11.45                 | 0.1              | 11.55             | 30          | Pass    |
| NVNT      | ax20 | 5825            | 10.42                 | 0.1              | 10.52             | 30          | Pass    |
| NVNT      | ax40 | 5755            | 11.64                 | 0                | 11.64             | 30          | Pass    |
| NVNT      | ax40 | 5795            | 11.29                 | 0                | 11.29             | 30          | Pass    |

## Test Graphs


### Power NVNT a 5180MHz

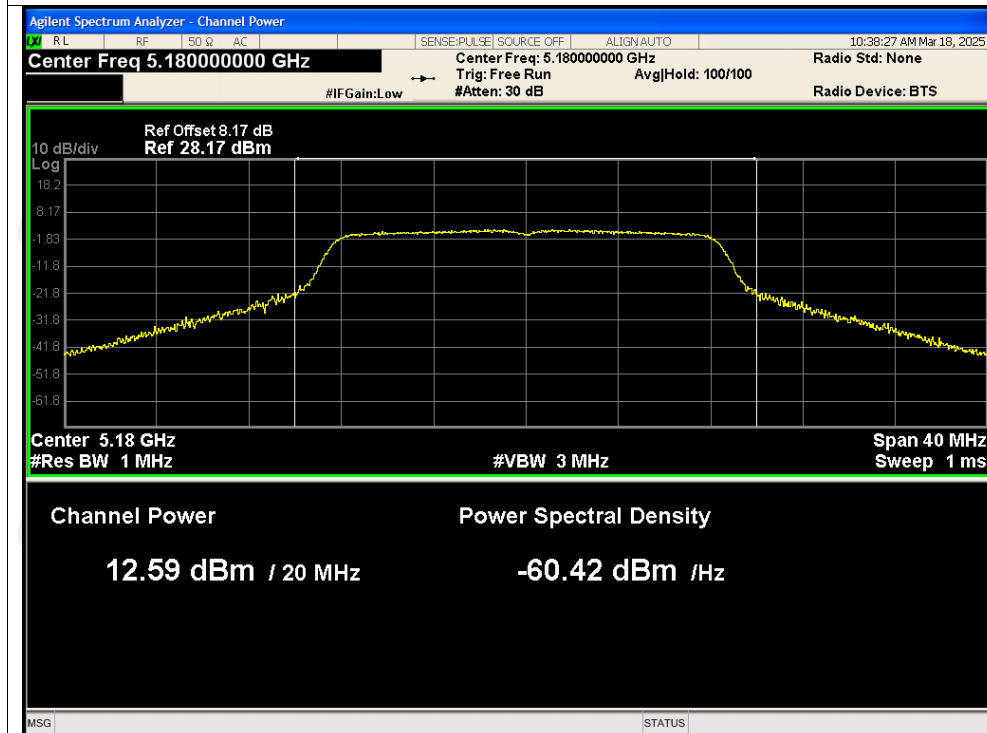


### Power NVNT a 5200MHz

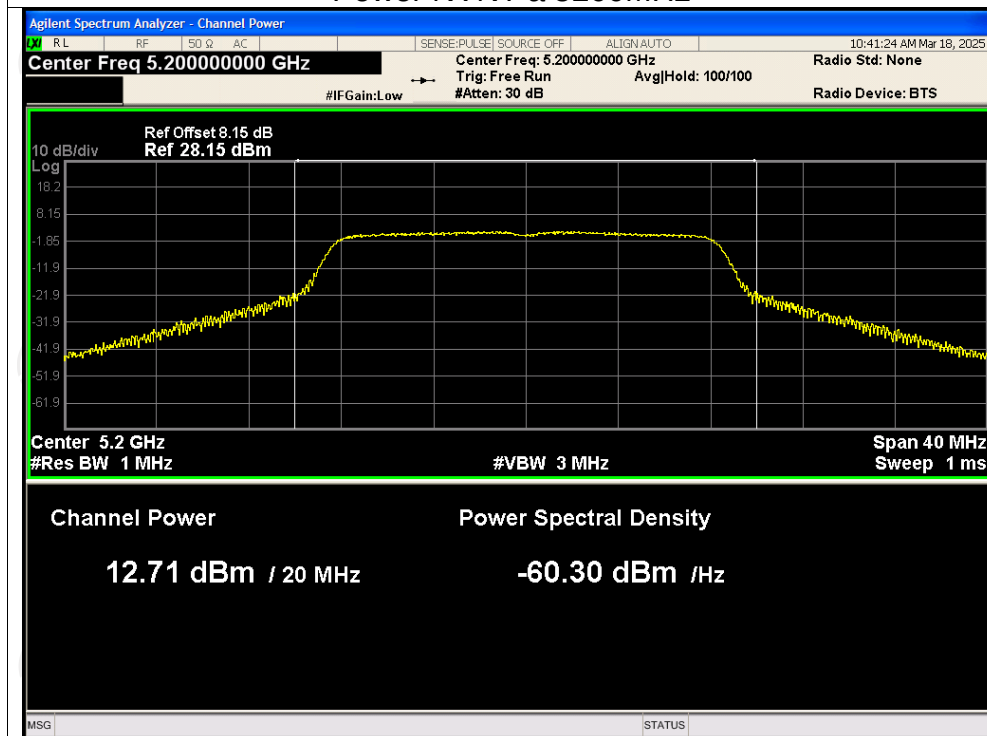


## Power NVNT a 5240MHz

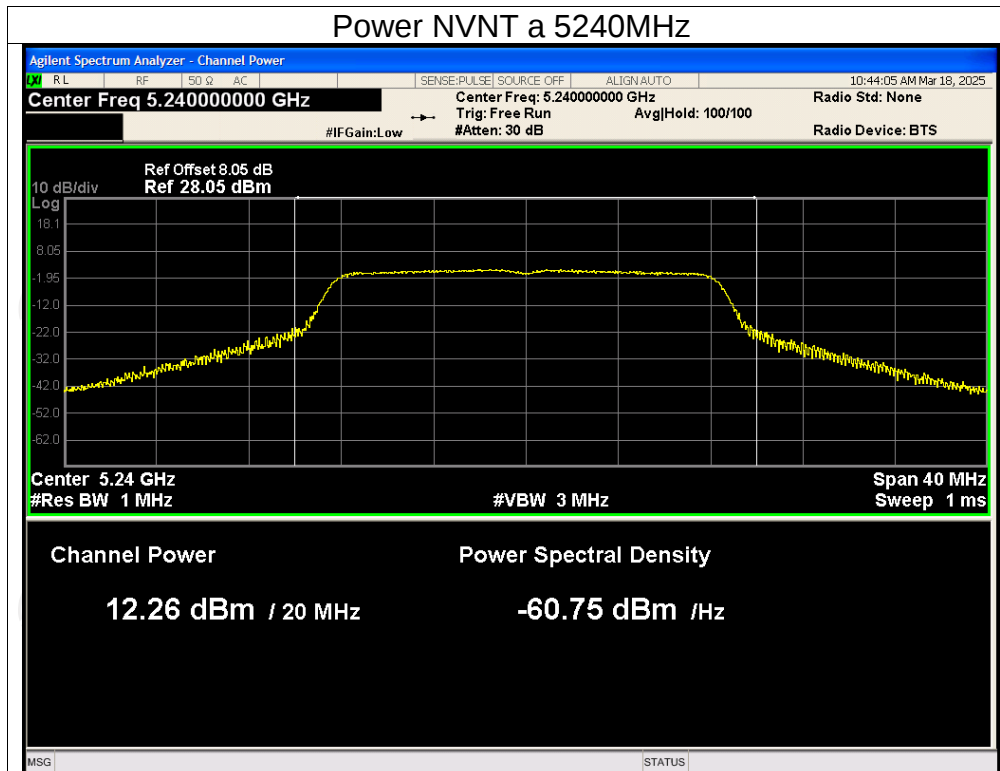


## Power NVNT n20 5180MHz

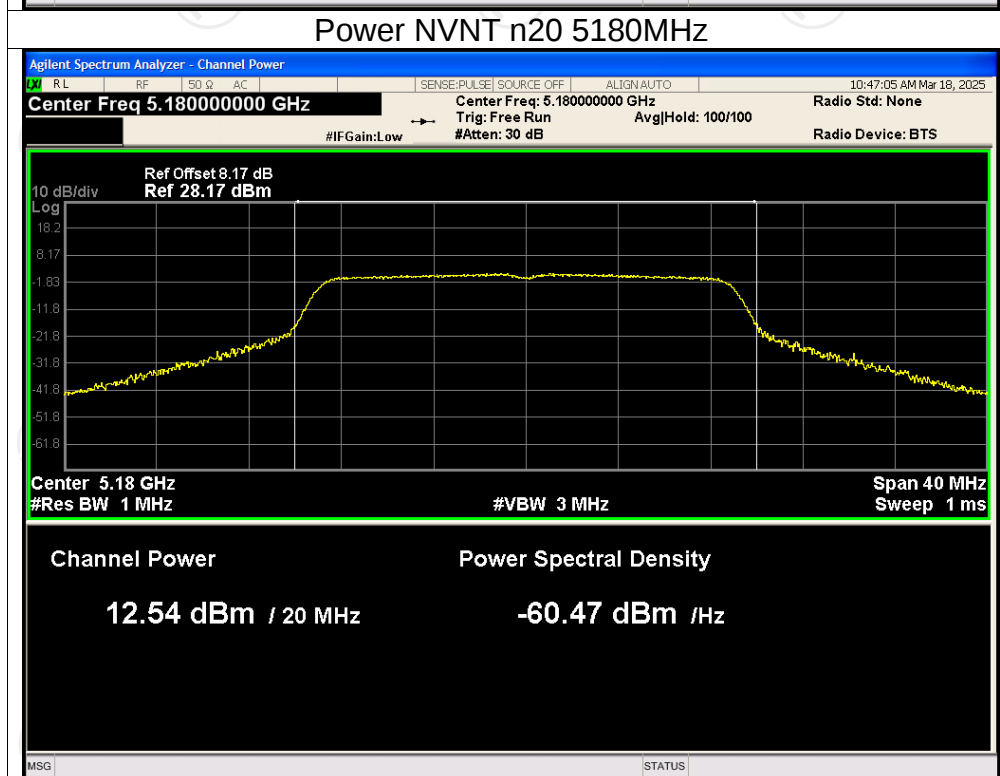


## Power NVNT n20 5200MHz

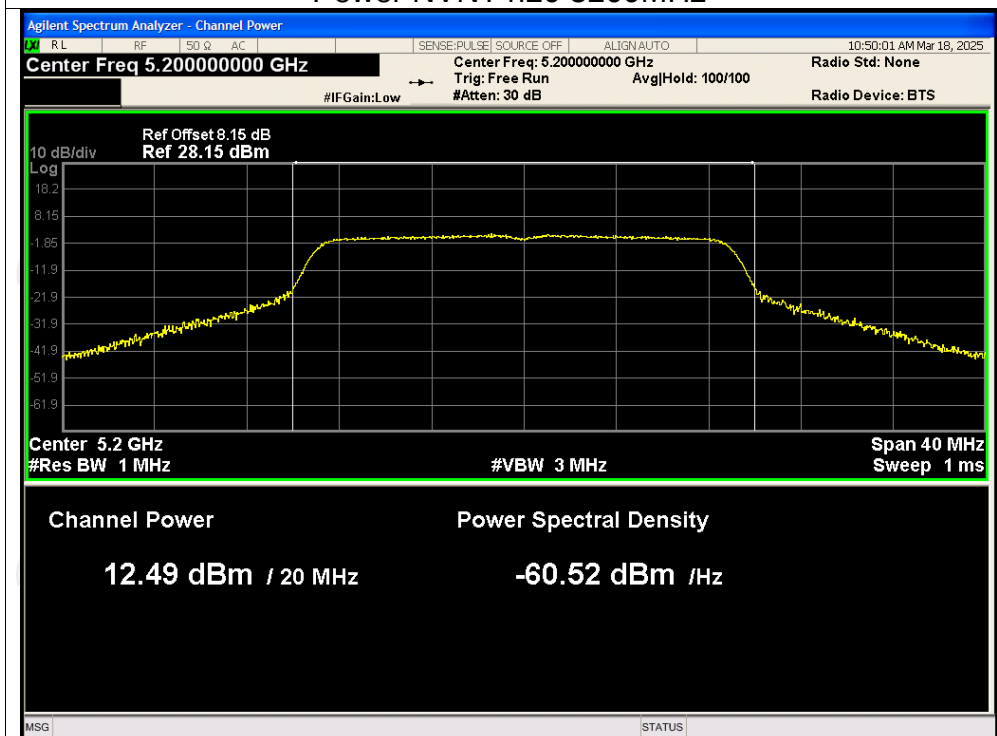


## Power NVNT n20 5240MHz

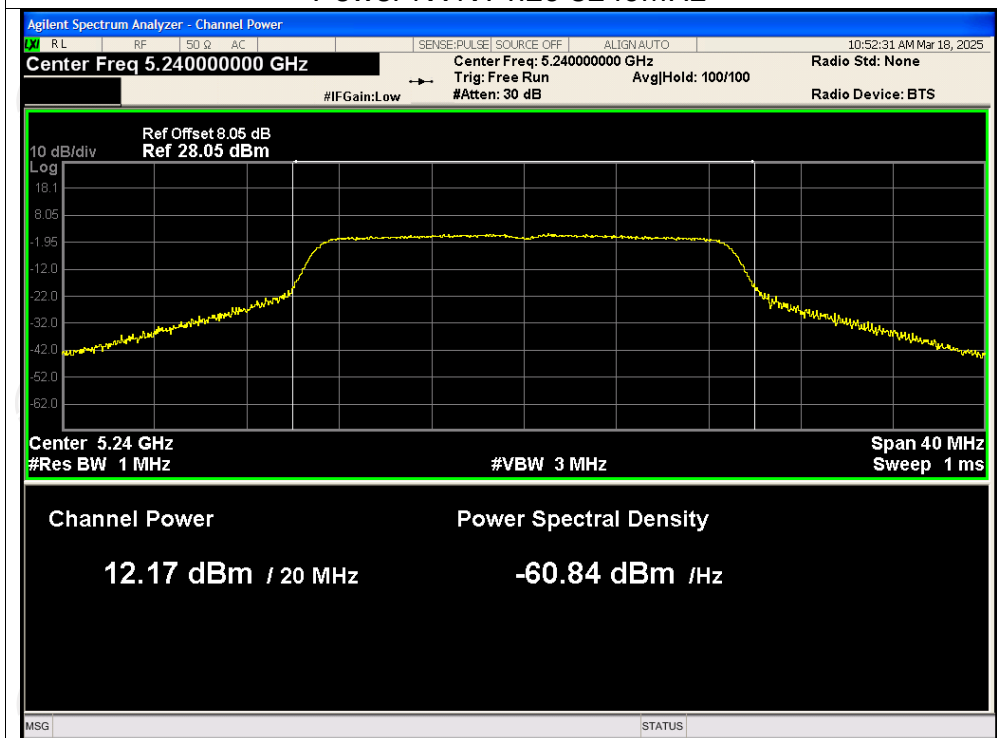


## Power NVNT n40 5190MHz

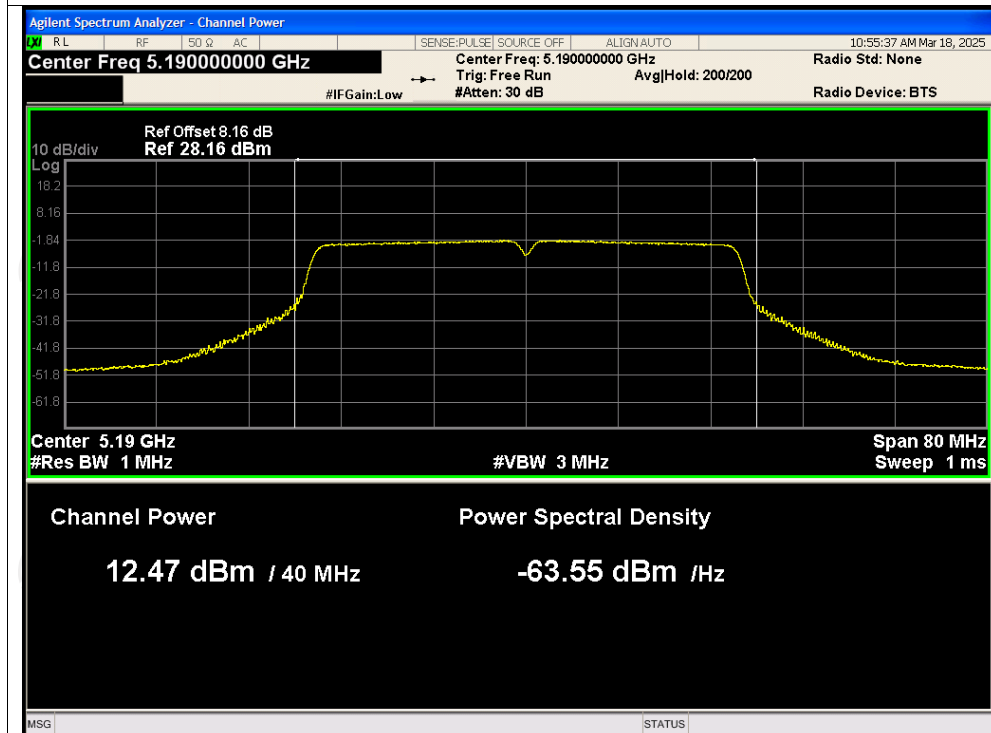


## Power NVNT n40 5230MHz

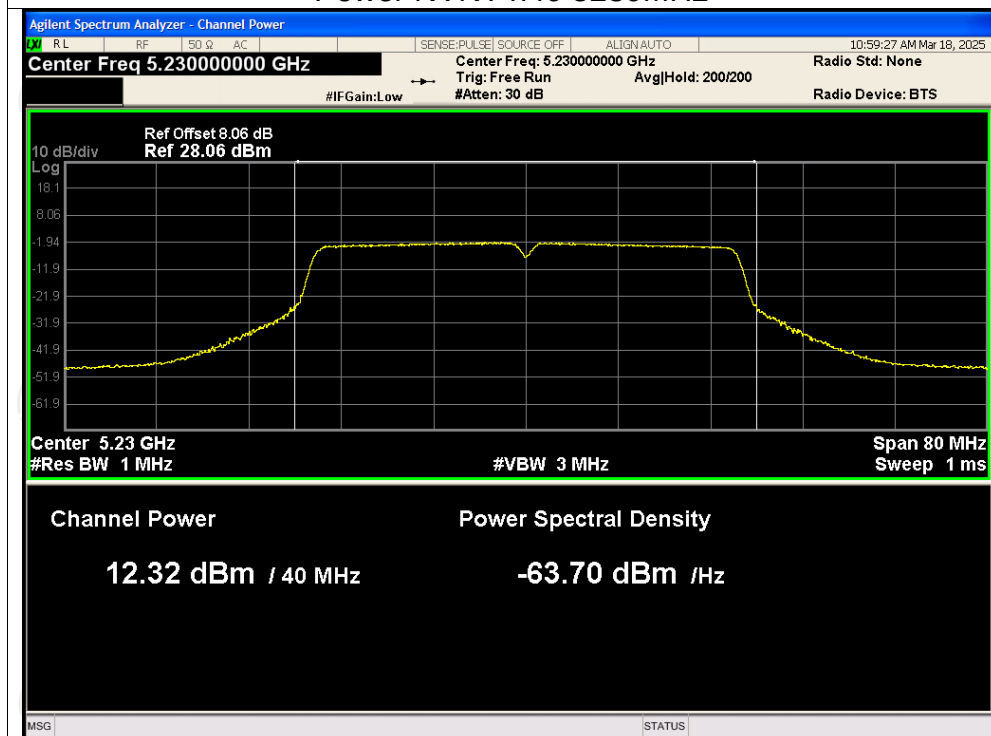


## Power NVNT ac20 5180MHz

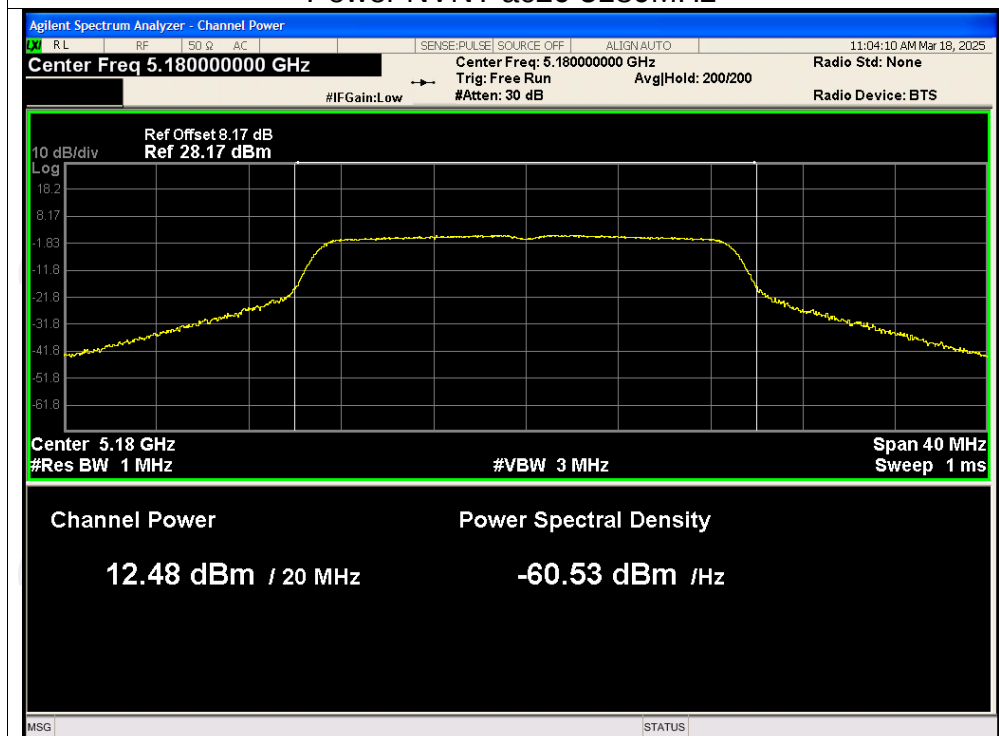


## Power NVNT ac20 5200MHz

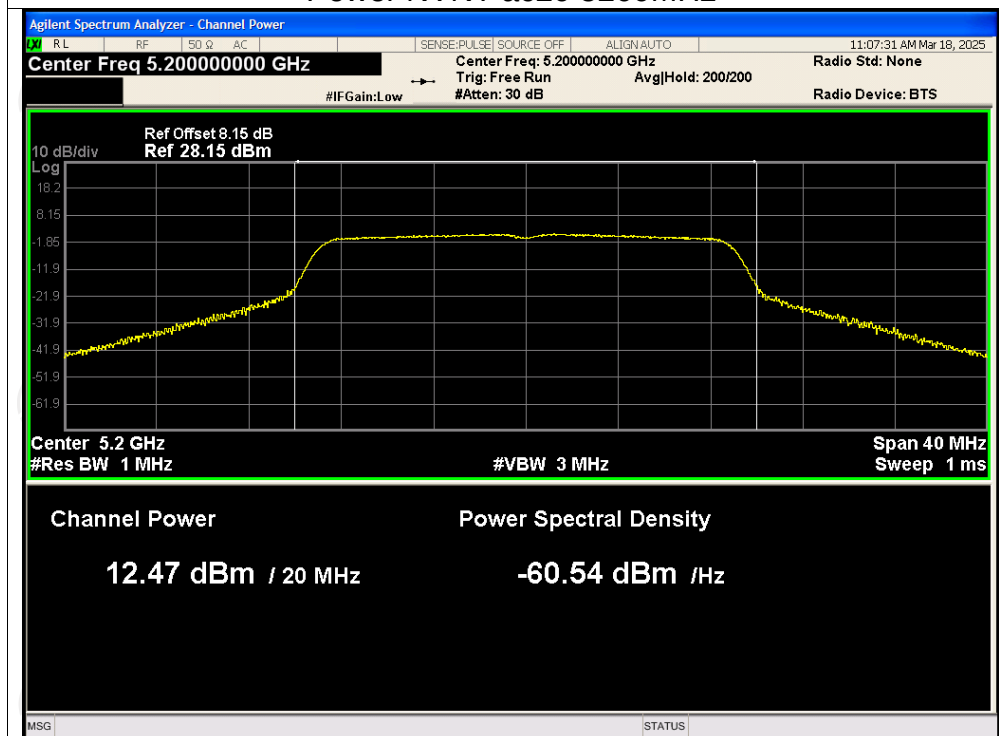


## Power NVNT ac20 5240MHz

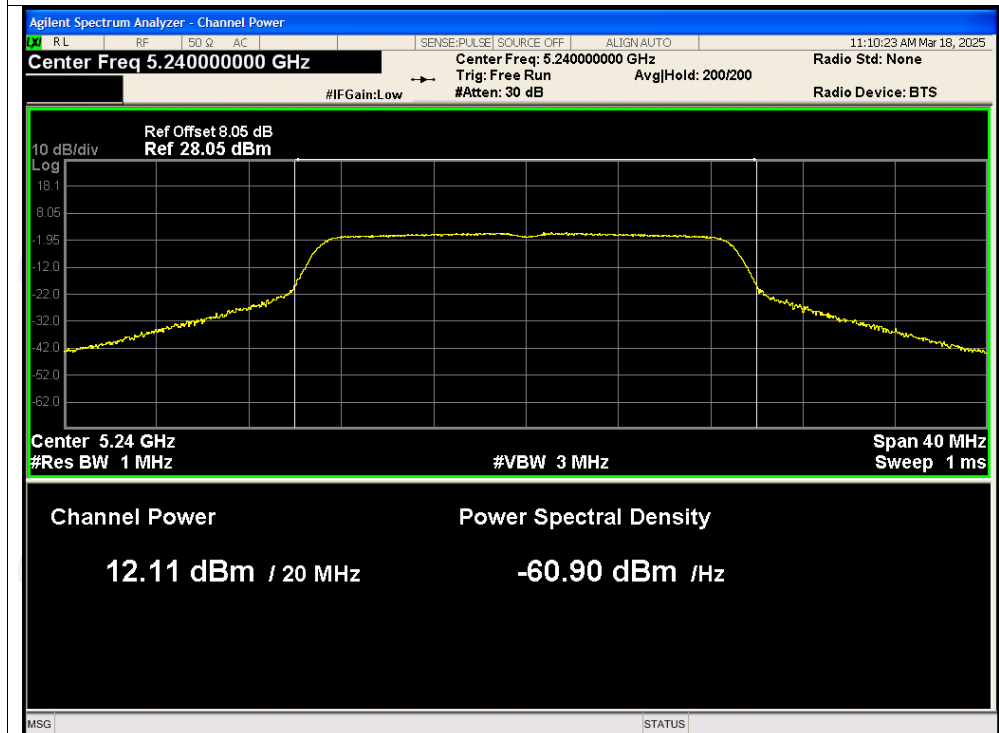


## Power NVNT ac40 5190MHz

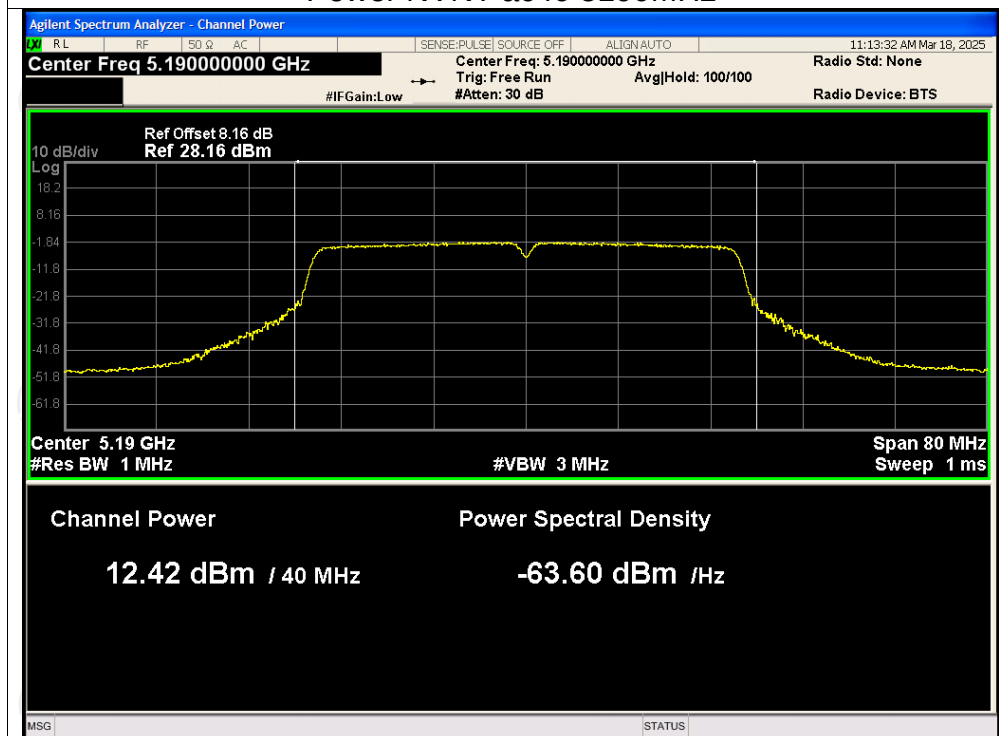


## Power NVNT ac40 5230MHz

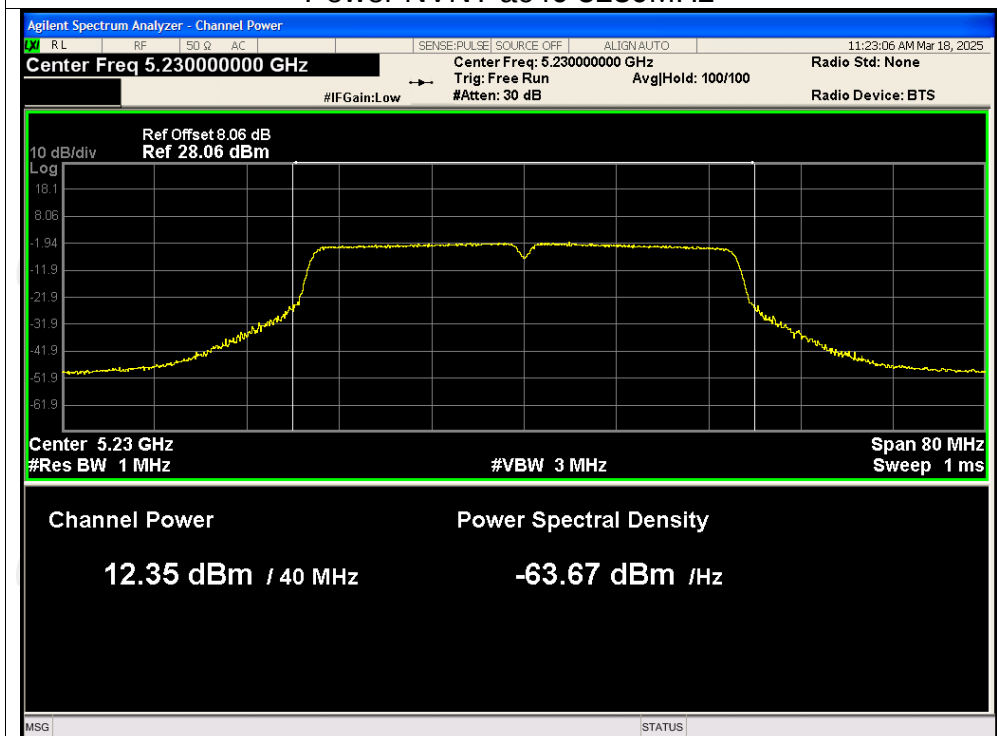


## Power NVNT ax20 5180MHz

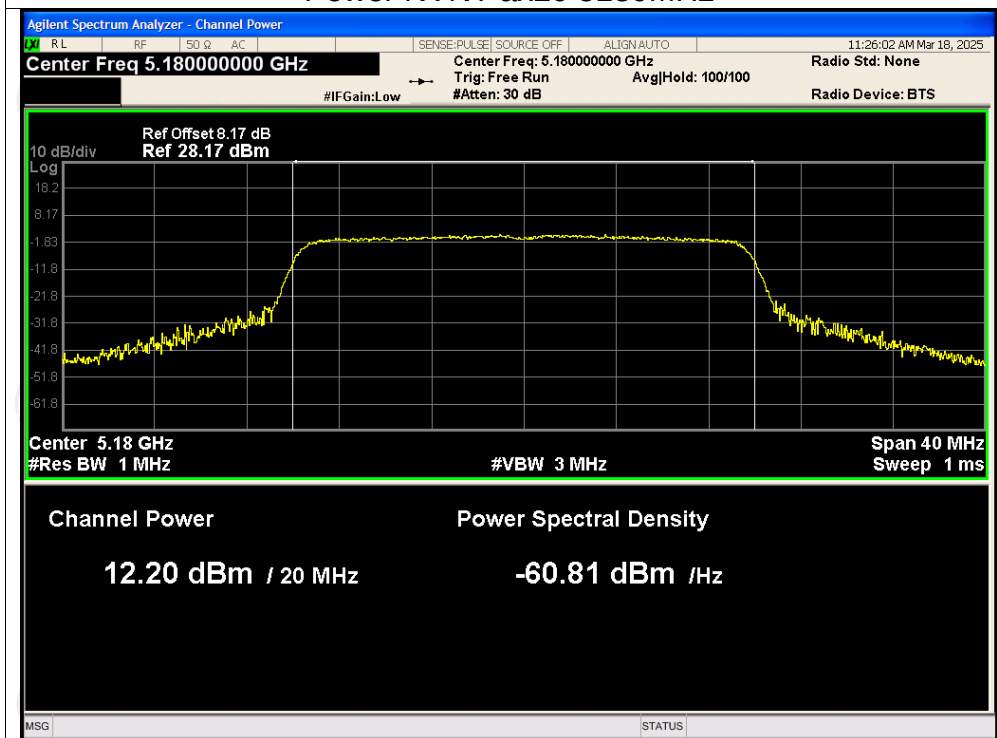


## Power NVNT ax20 5200MHz

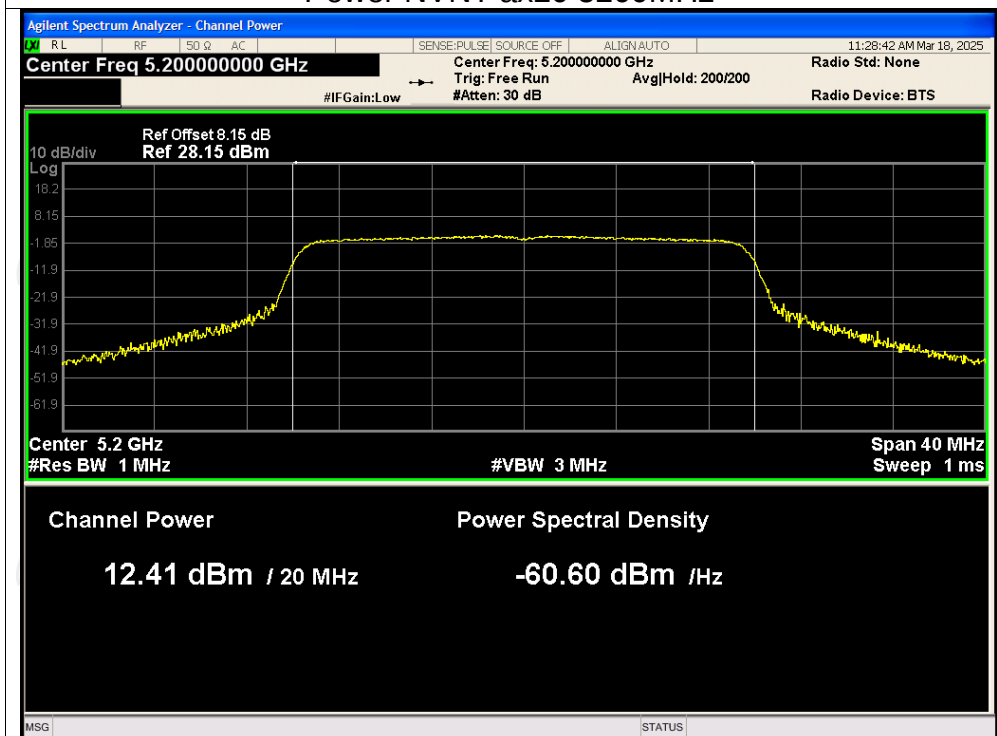


## Power NVNT ax20 5240MHz

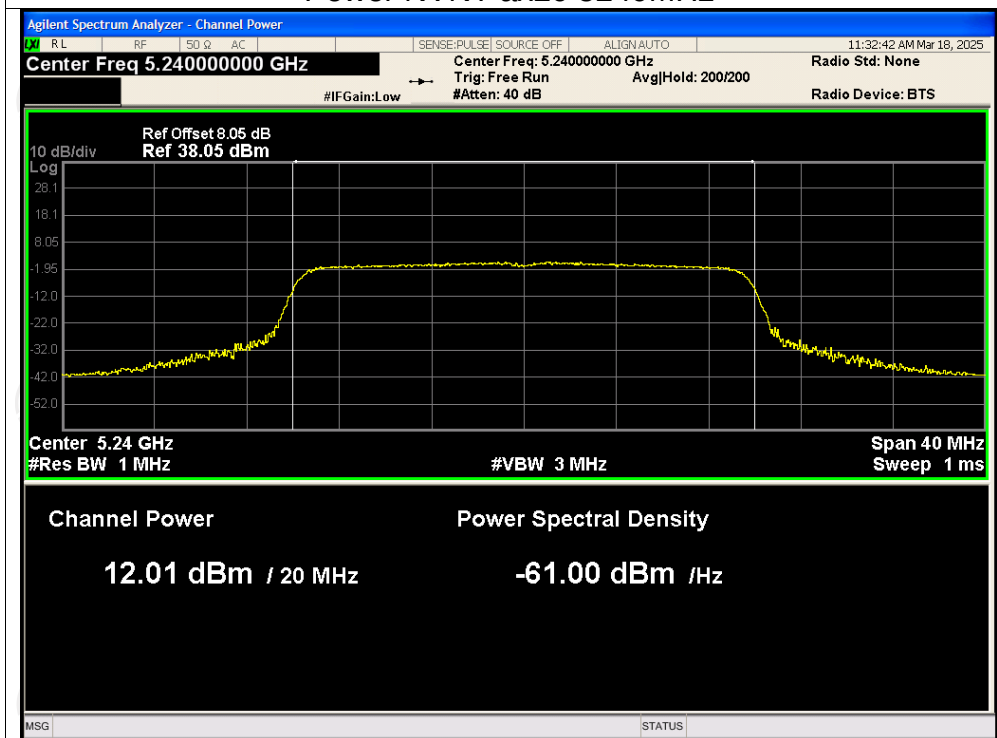


## Power NVNT ax40 5190MHz

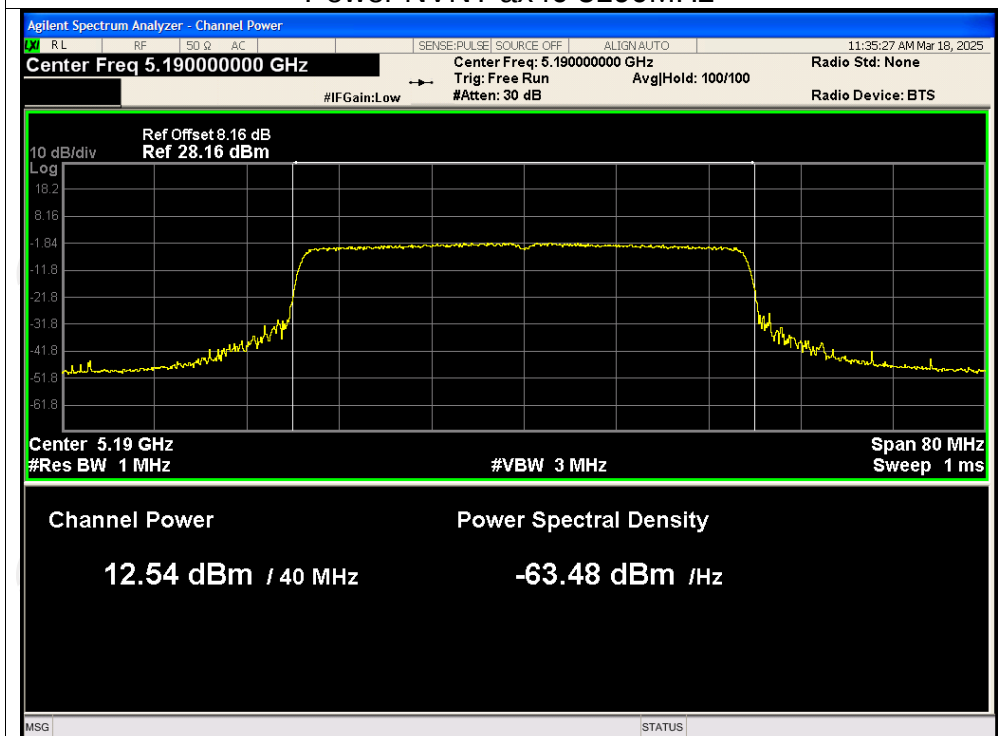


## Power NVNT ax40 5230MHz

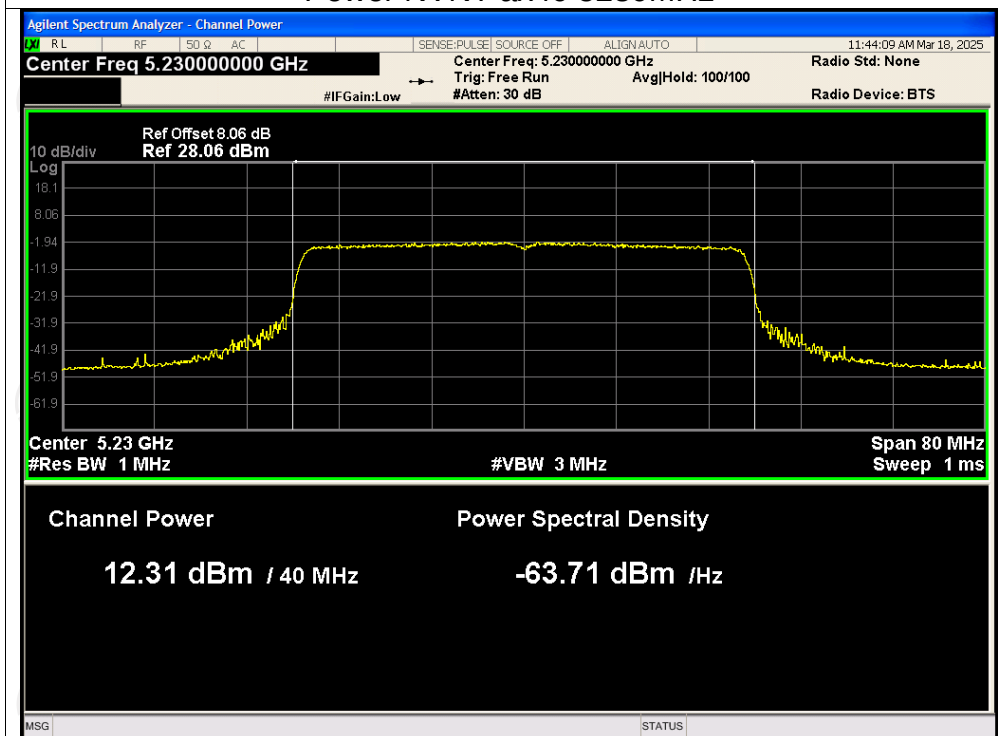


## Power NVNT a 5745MHz

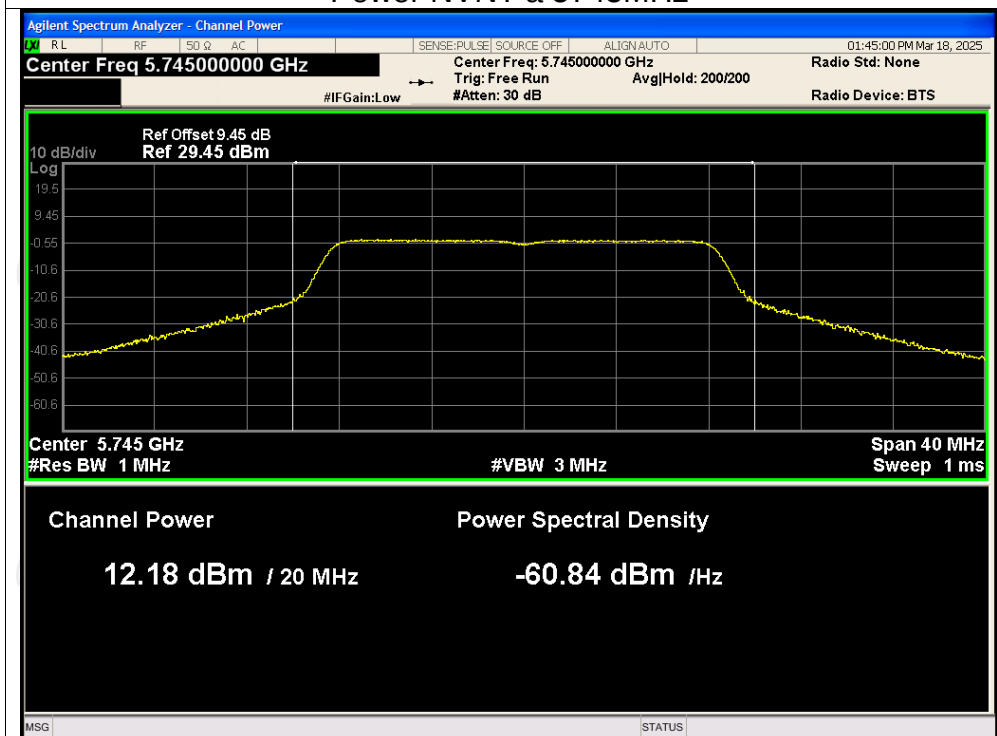


## Power NVNT a 5785MHz

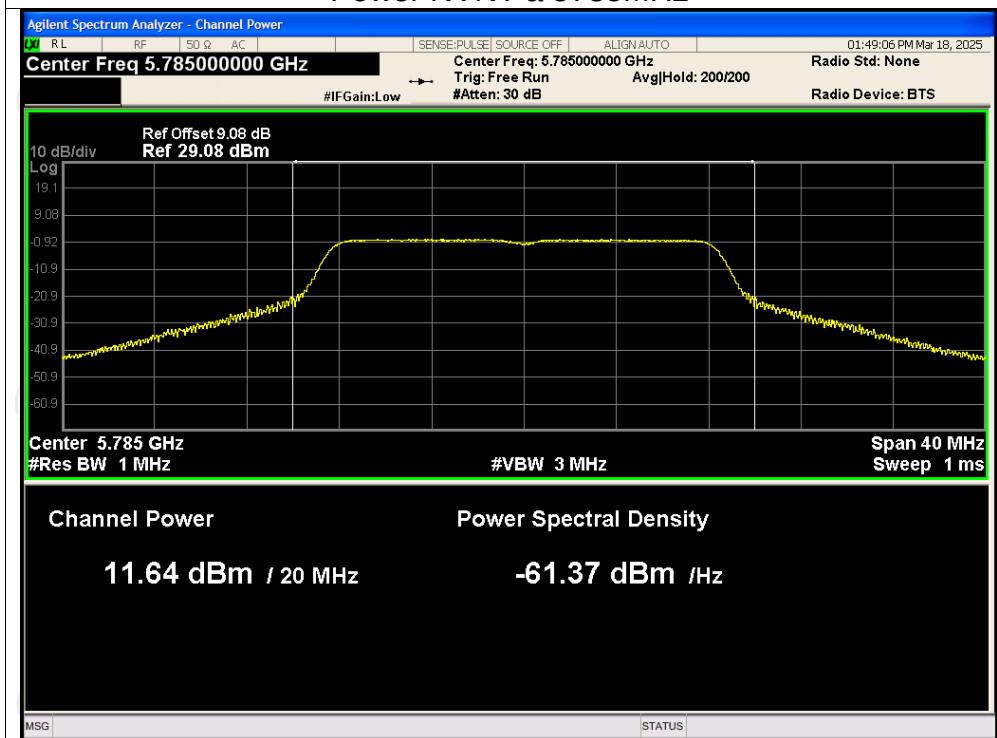


## Power NVNT a 5825MHz

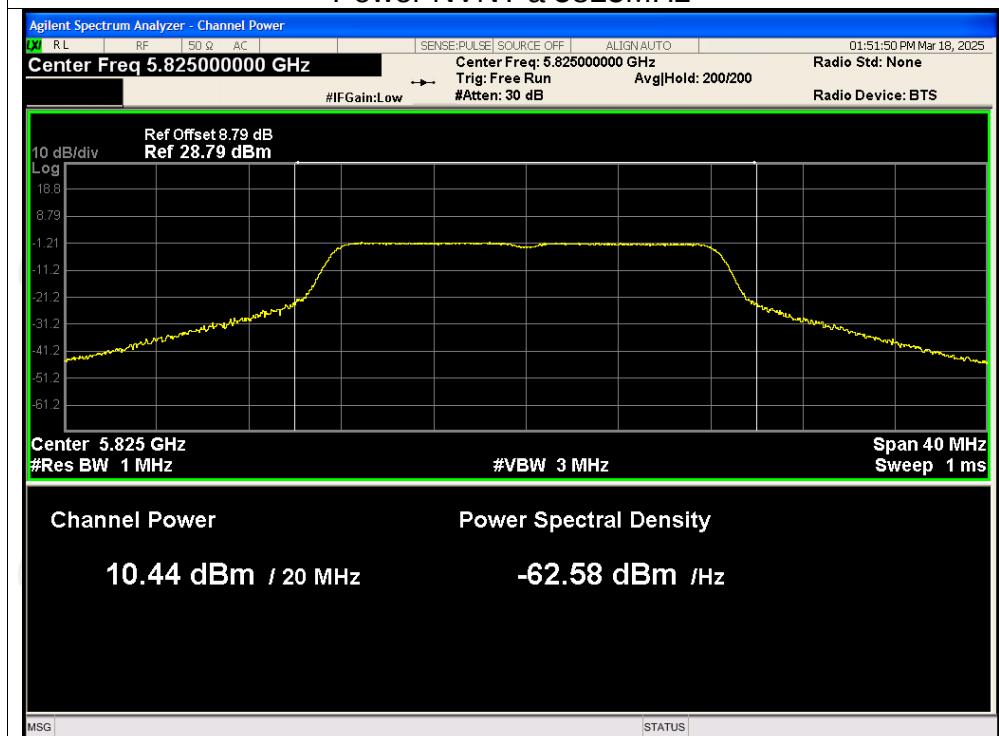


## Power NVNT n20 5745MHz

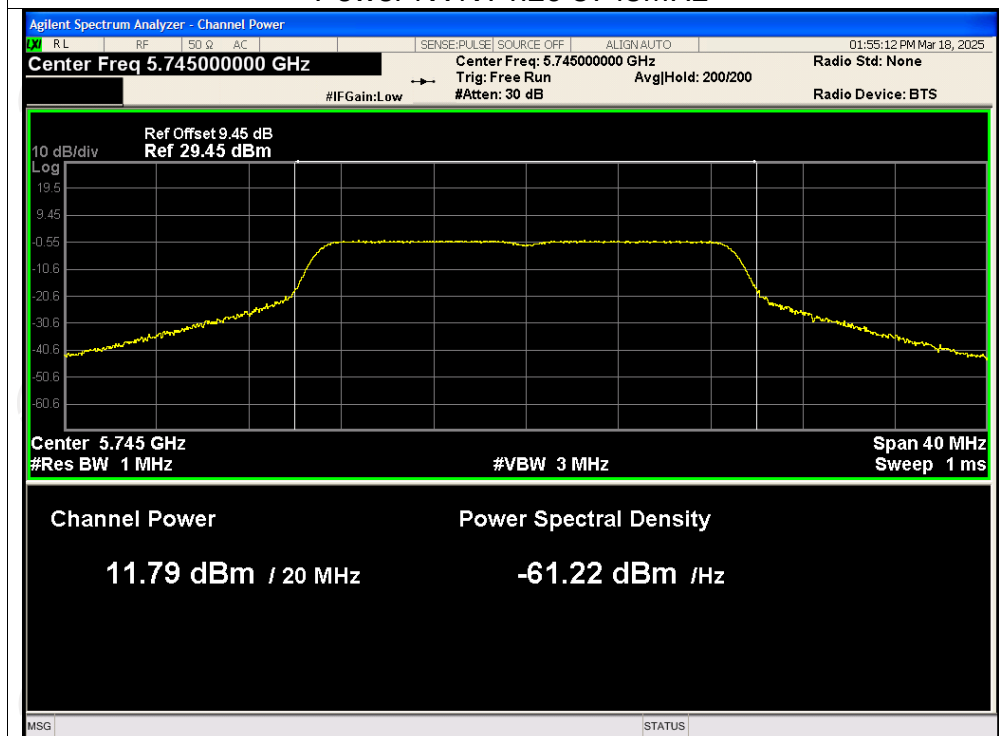


## Power NVNT n20 5785MHz

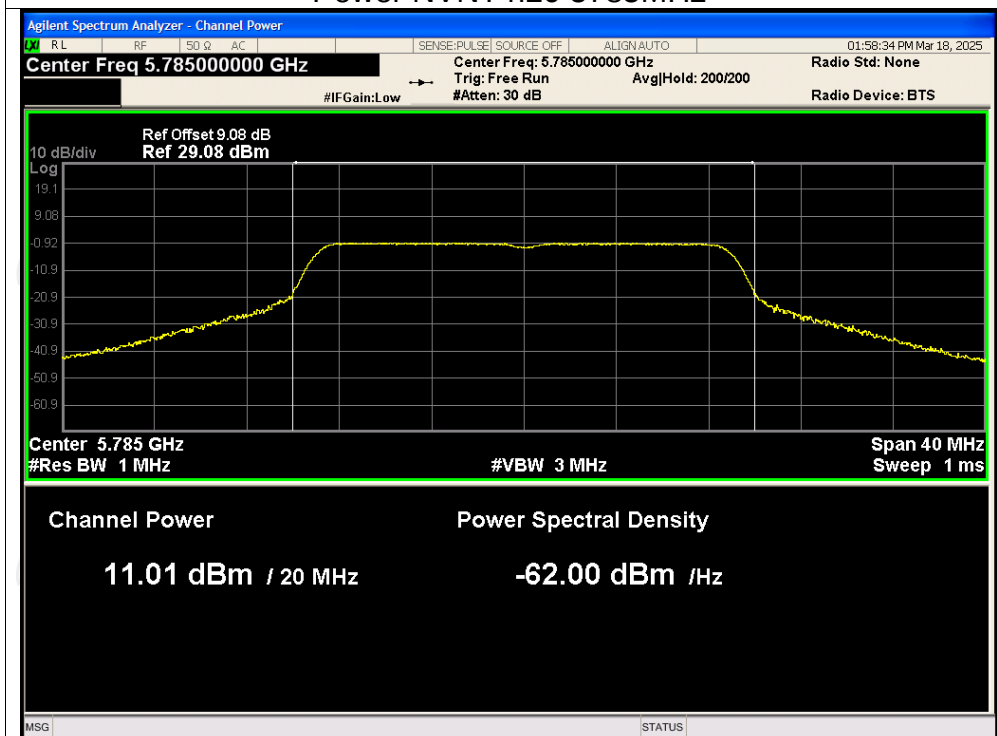


## Power NVNT n20 5825MHz

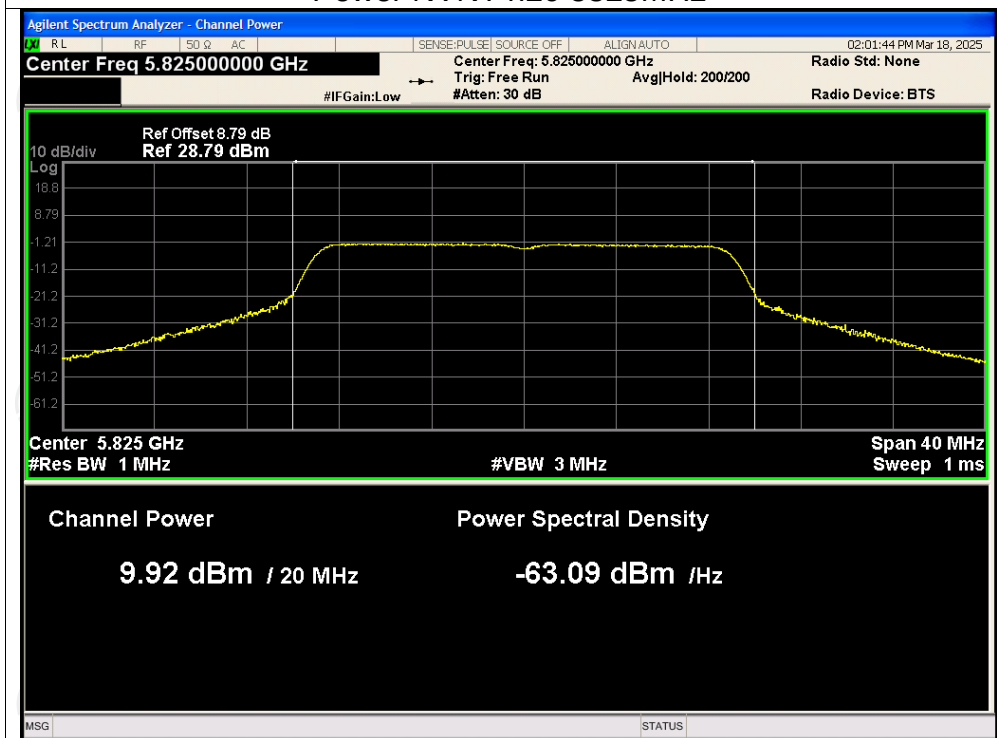


## Power NVNT n40 5755MHz

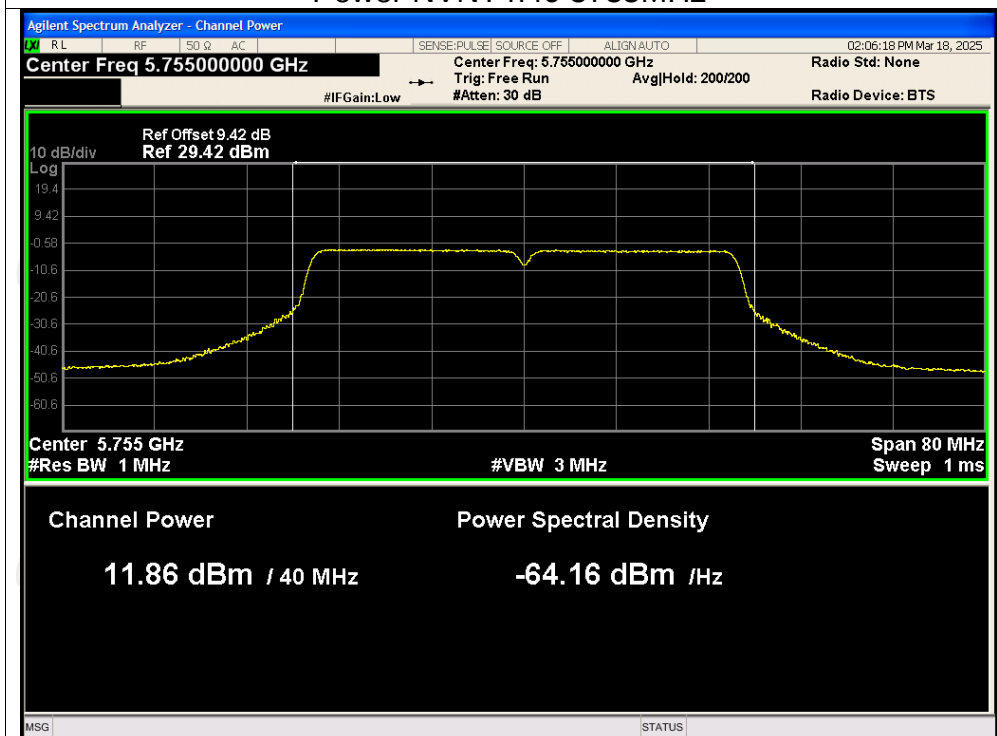


## Power NVNT n40 5795MHz

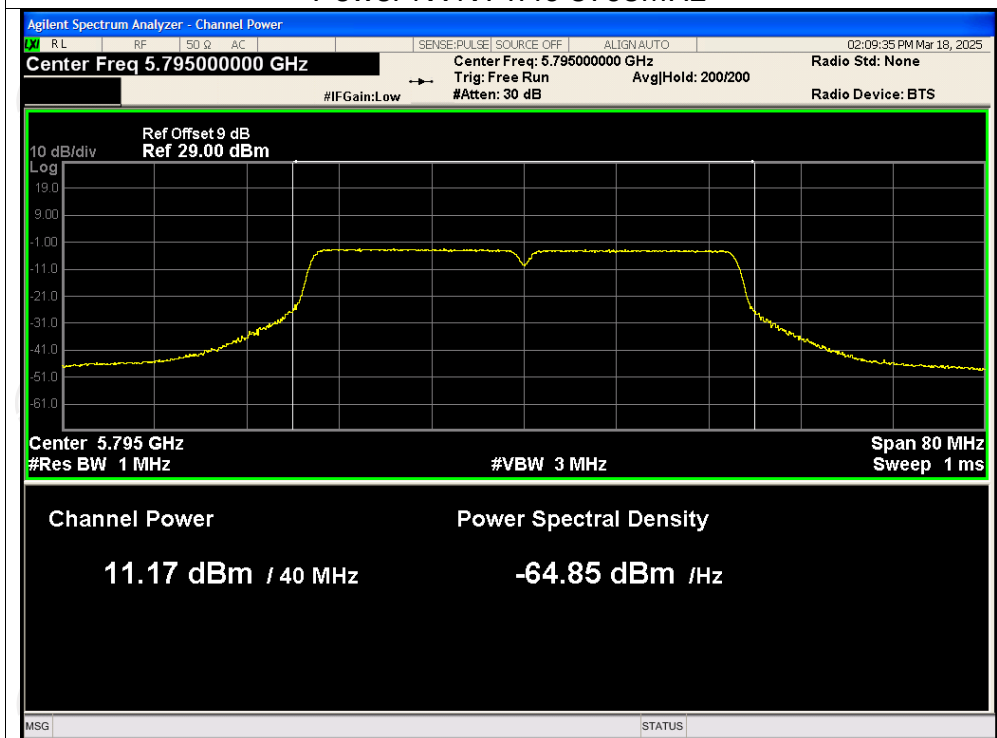


## Power NVNT ac20 5745MHz

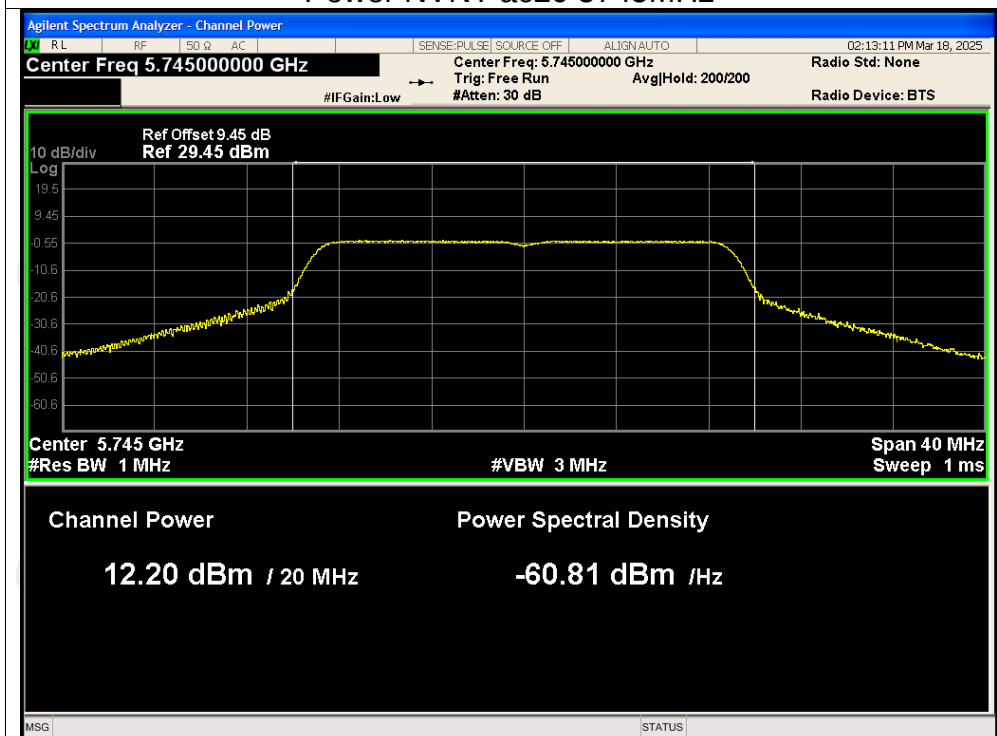

## Power NVNT ac20 5785MHz

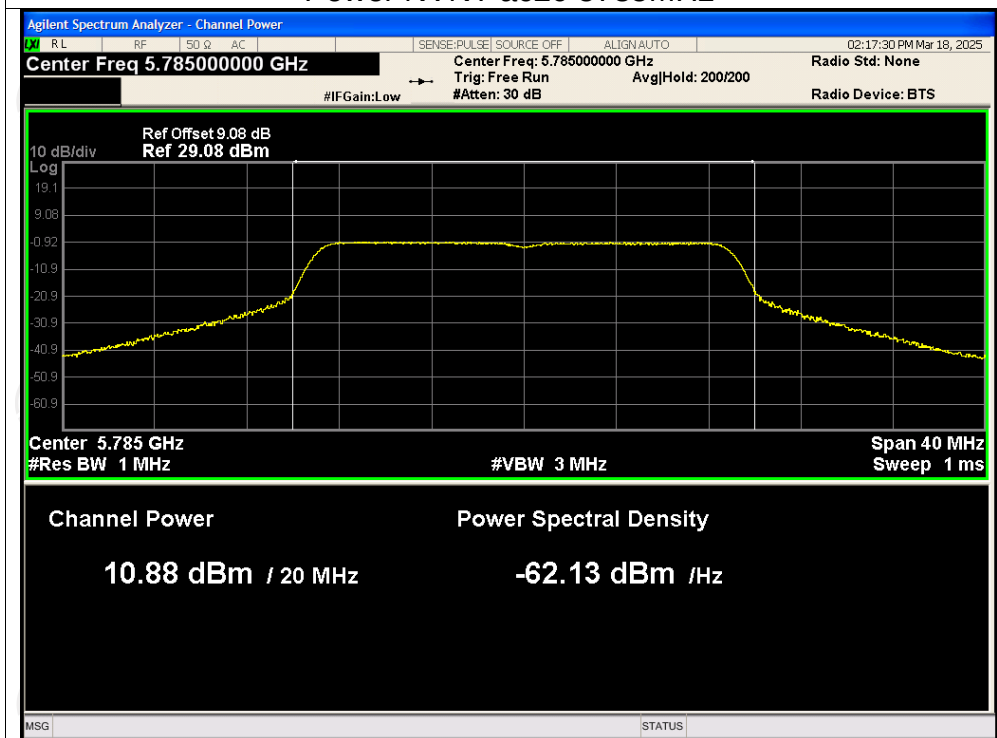

## Power NVNT ac20 5825MHz

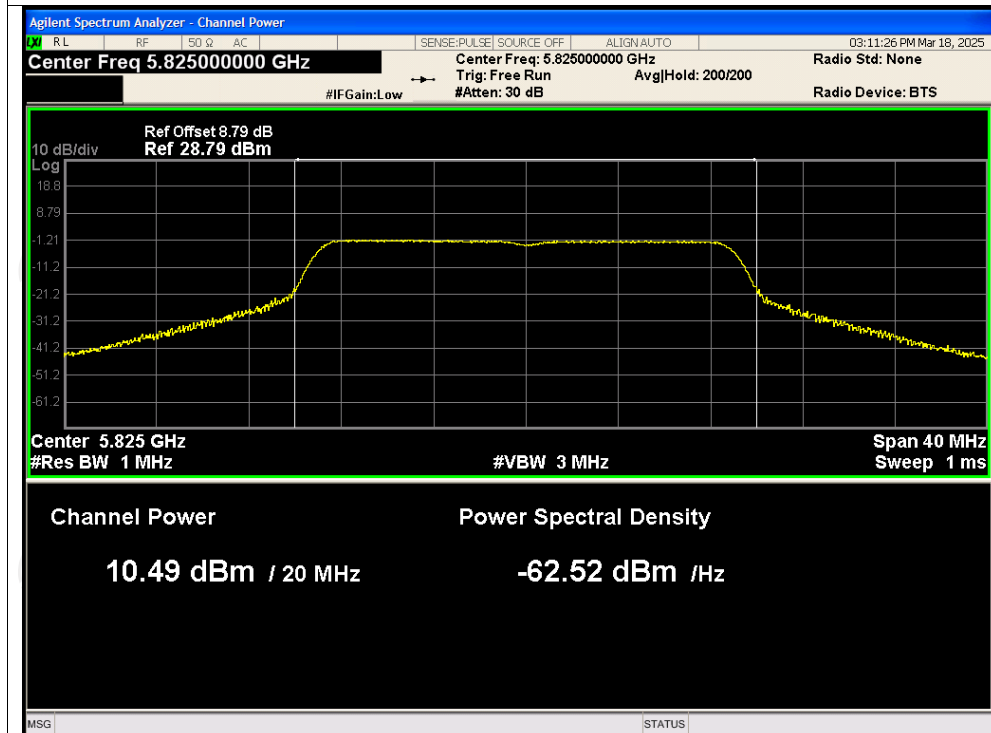

## Power NVNT ac40 5755MHz

