



## 8 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247


Test Method : ANSI C63.10:2013

Test Limit  
Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### Test Setup

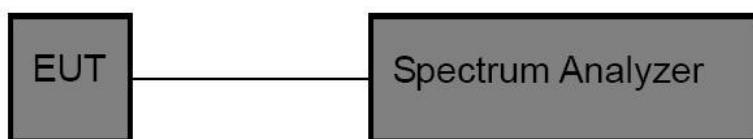

### Test Result

Ant0:

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant0	2402	0.648	2401.680	2402.328	0.5	PASS
BLE_1M	Ant0	2440	0.656	2439.676	2440.332	0.5	PASS
BLE_1M	Ant0	2480	0.692	2479.652	2480.344	0.5	PASS

Ant2:

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant2	2402	0.716	2401.648	2402.364	0.5	PASS
BLE_1M	Ant2	2440	0.656	2439.676	2440.332	0.5	PASS
BLE_1M	Ant2	2480	0.664	2479.672	2480.336	0.5	PASS



Report No.: PTC25010900703E-FC02

Ant4:

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant4	2402	0.700	2401.648	2402.348	0.5	PASS
BLE_1M	Ant4	2440	0.672	2439.672	2440.344	0.5	PASS
BLE_1M	Ant4	2480	0.720	2479.644	2480.364	0.5	PASS


## Test Graphs:


Ant0:





Ant2:

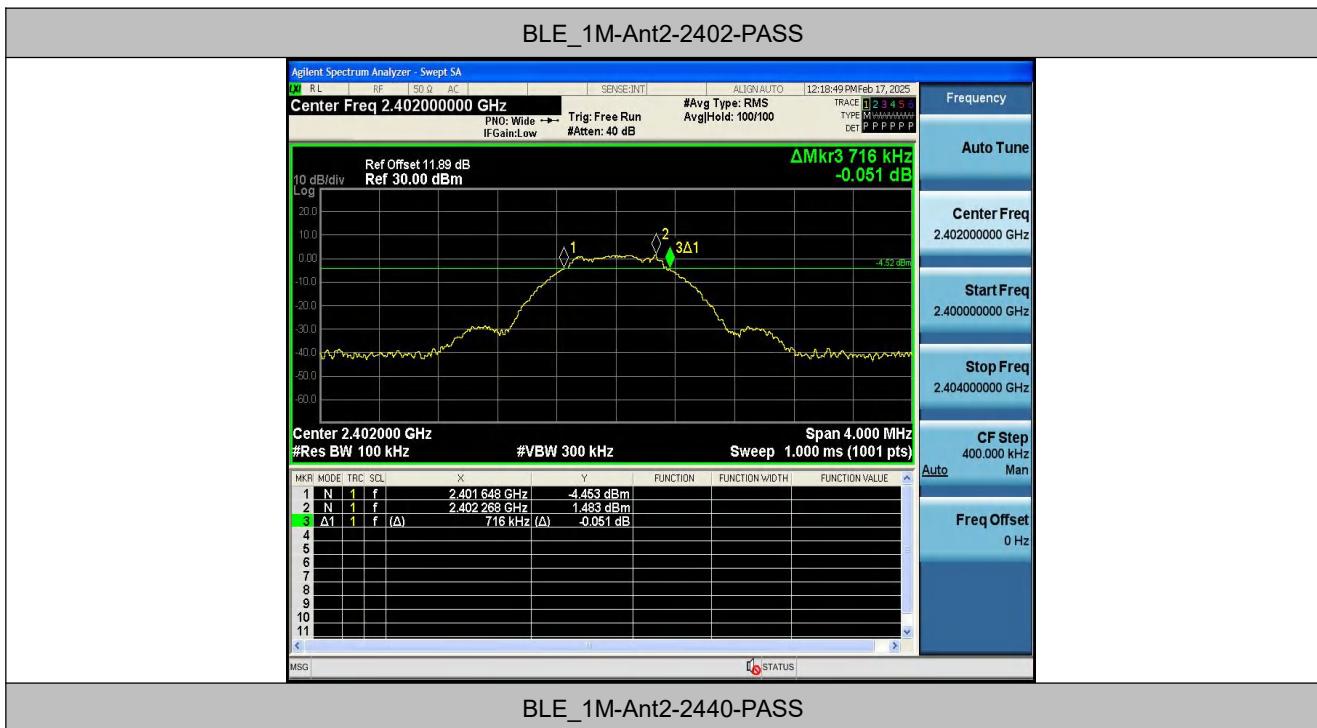

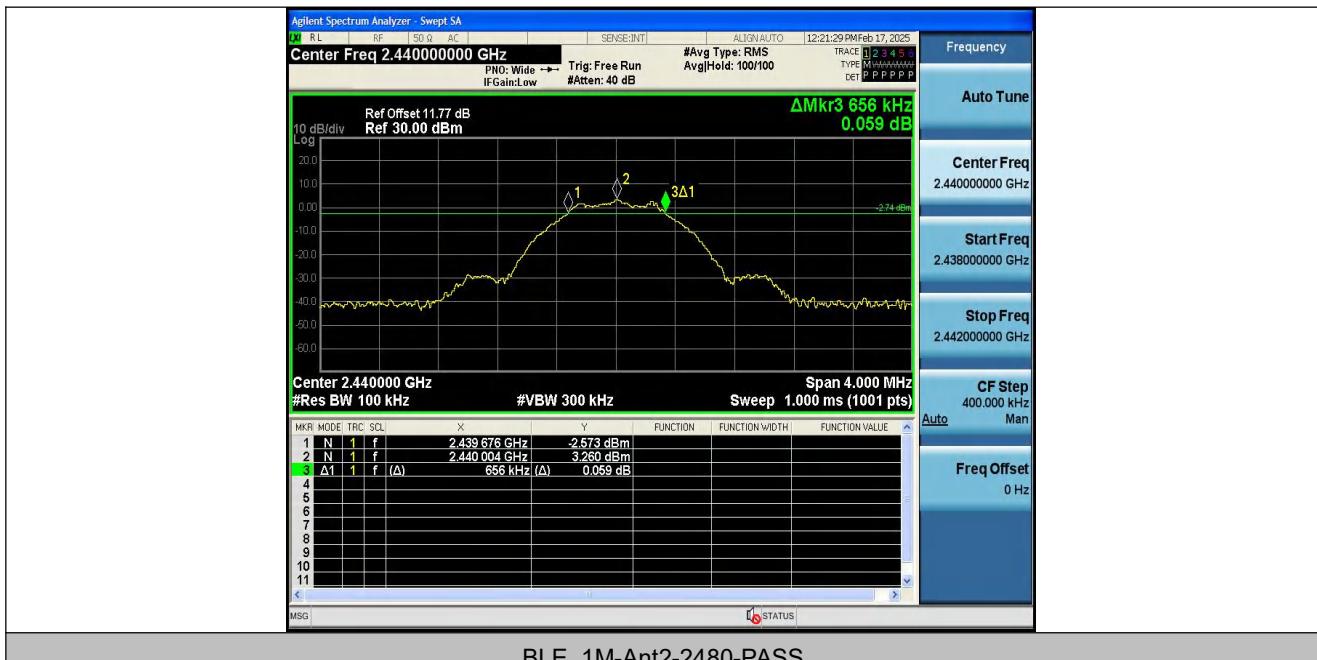

BLE\_1M-Ant2-2480-PASS



BLE\_2M-Ant2-2402-PASS

Ant4:





Report No.: PTC25010900703E-FC02





## 9 Maximum Peak Output Power

Test Requirement : FCC CFR47 Part 15 Section 15.247


Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

### 9.1 Test Procedure

1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.

### 9.2 Test Setup

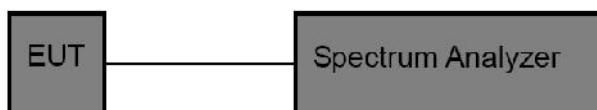

### 9.3 Test Result

Ant0:

TestMode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant0	2402	2.98	≤30	PASS
BLE_1M	Ant0	2440	3.61	≤30	PASS
BLE_1M	Ant0	2480	4.35	≤30	PASS

Ant2:

TestMode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant2	2402	2.87	≤30	PASS
BLE_1M	Ant2	2440	3.47	≤30	PASS
BLE_1M	Ant2	2480	4.23	≤30	PASS




Report No.: PTC25010900703E-FC02

Ant4:

TestMode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant4	2402	2.82	≤30	PASS
BLE_1M	Ant4	2440	3.45	≤30	PASS
BLE_1M	Ant4	2480	4.2	≤30	PASS


## Test Graphs:

Ant0:

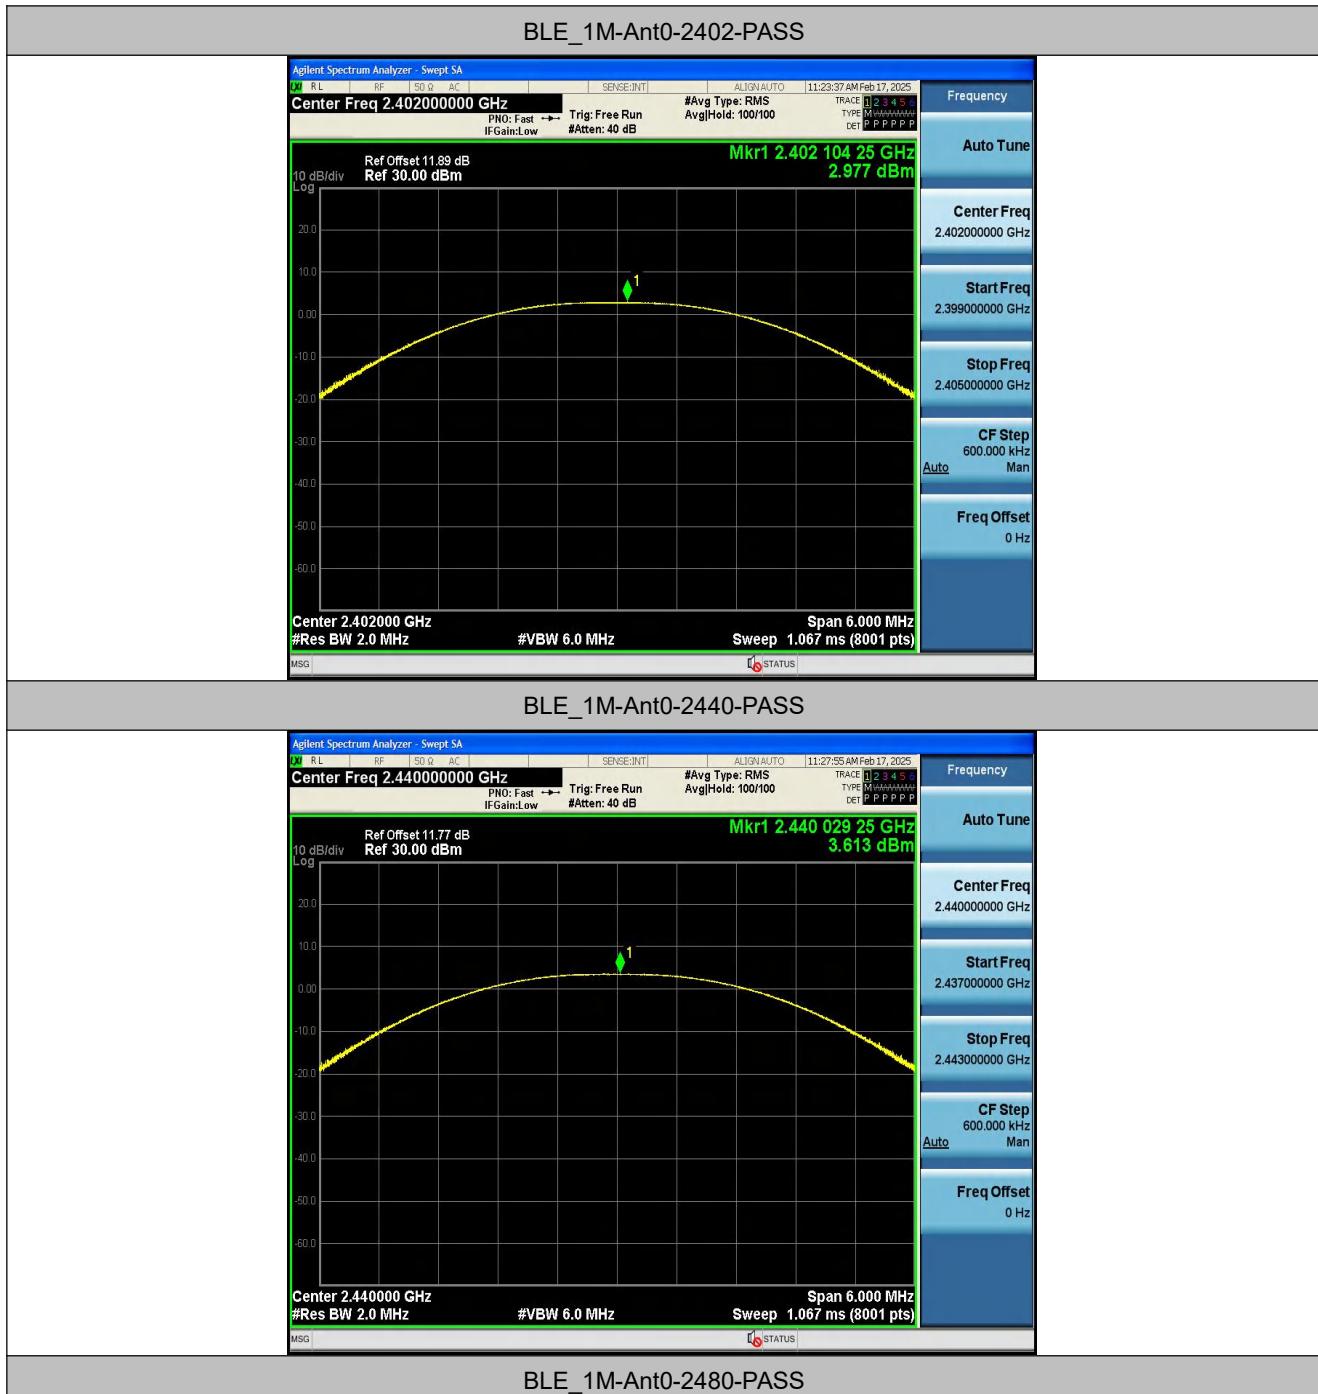





Report No.: PTC25010900703E-FC02

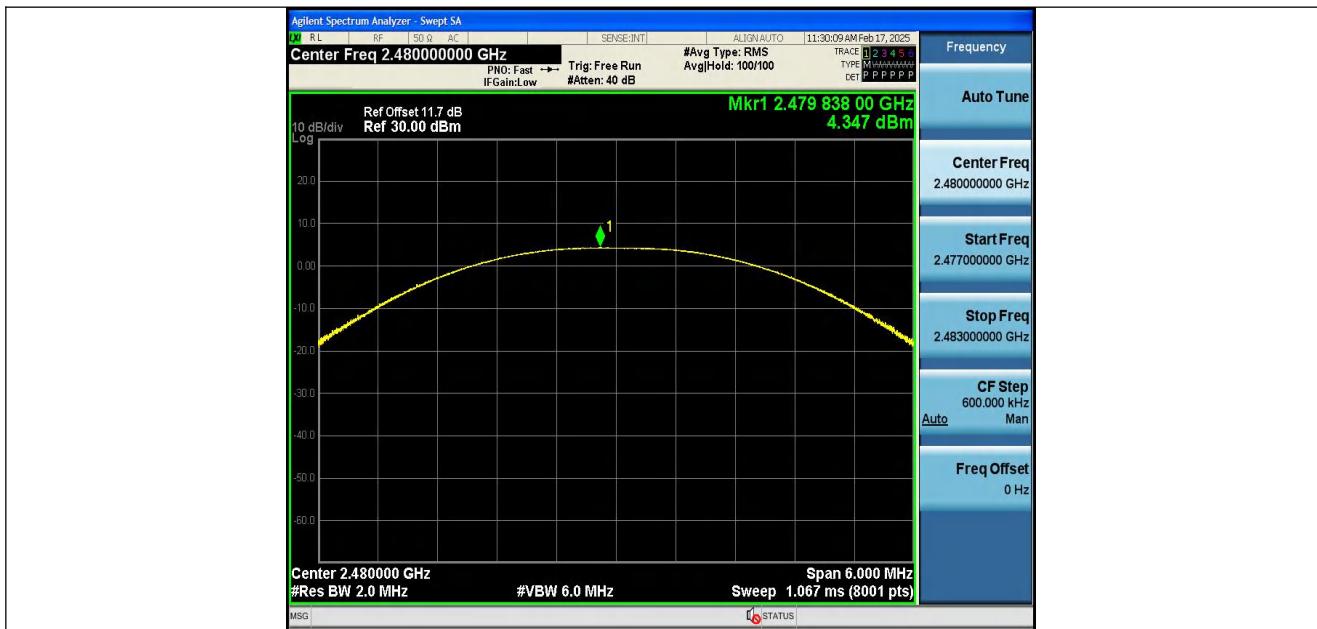


Ant2:

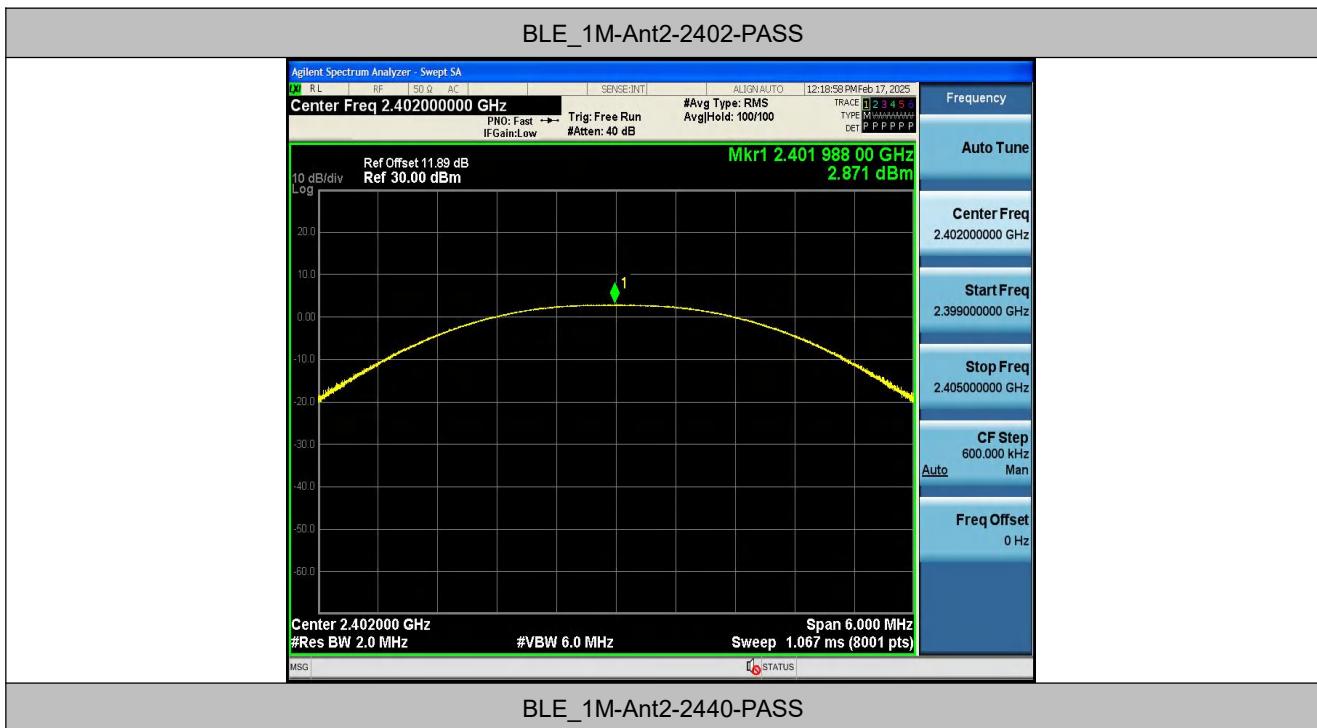

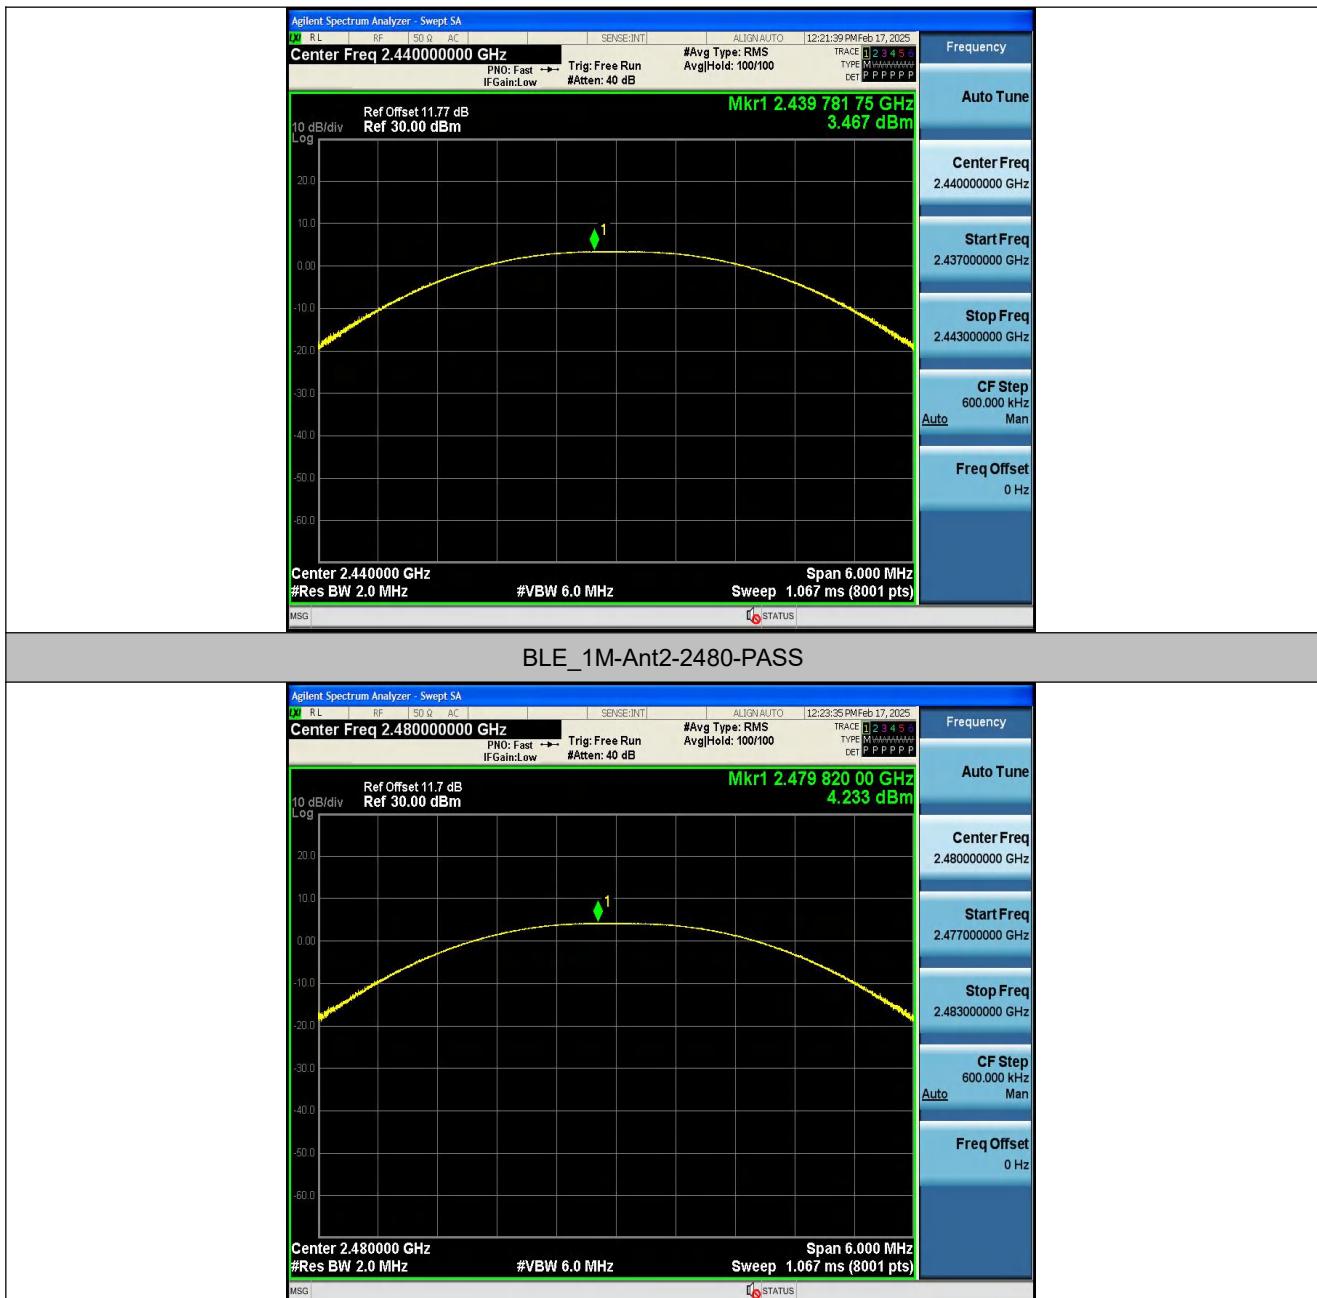

Ant4:

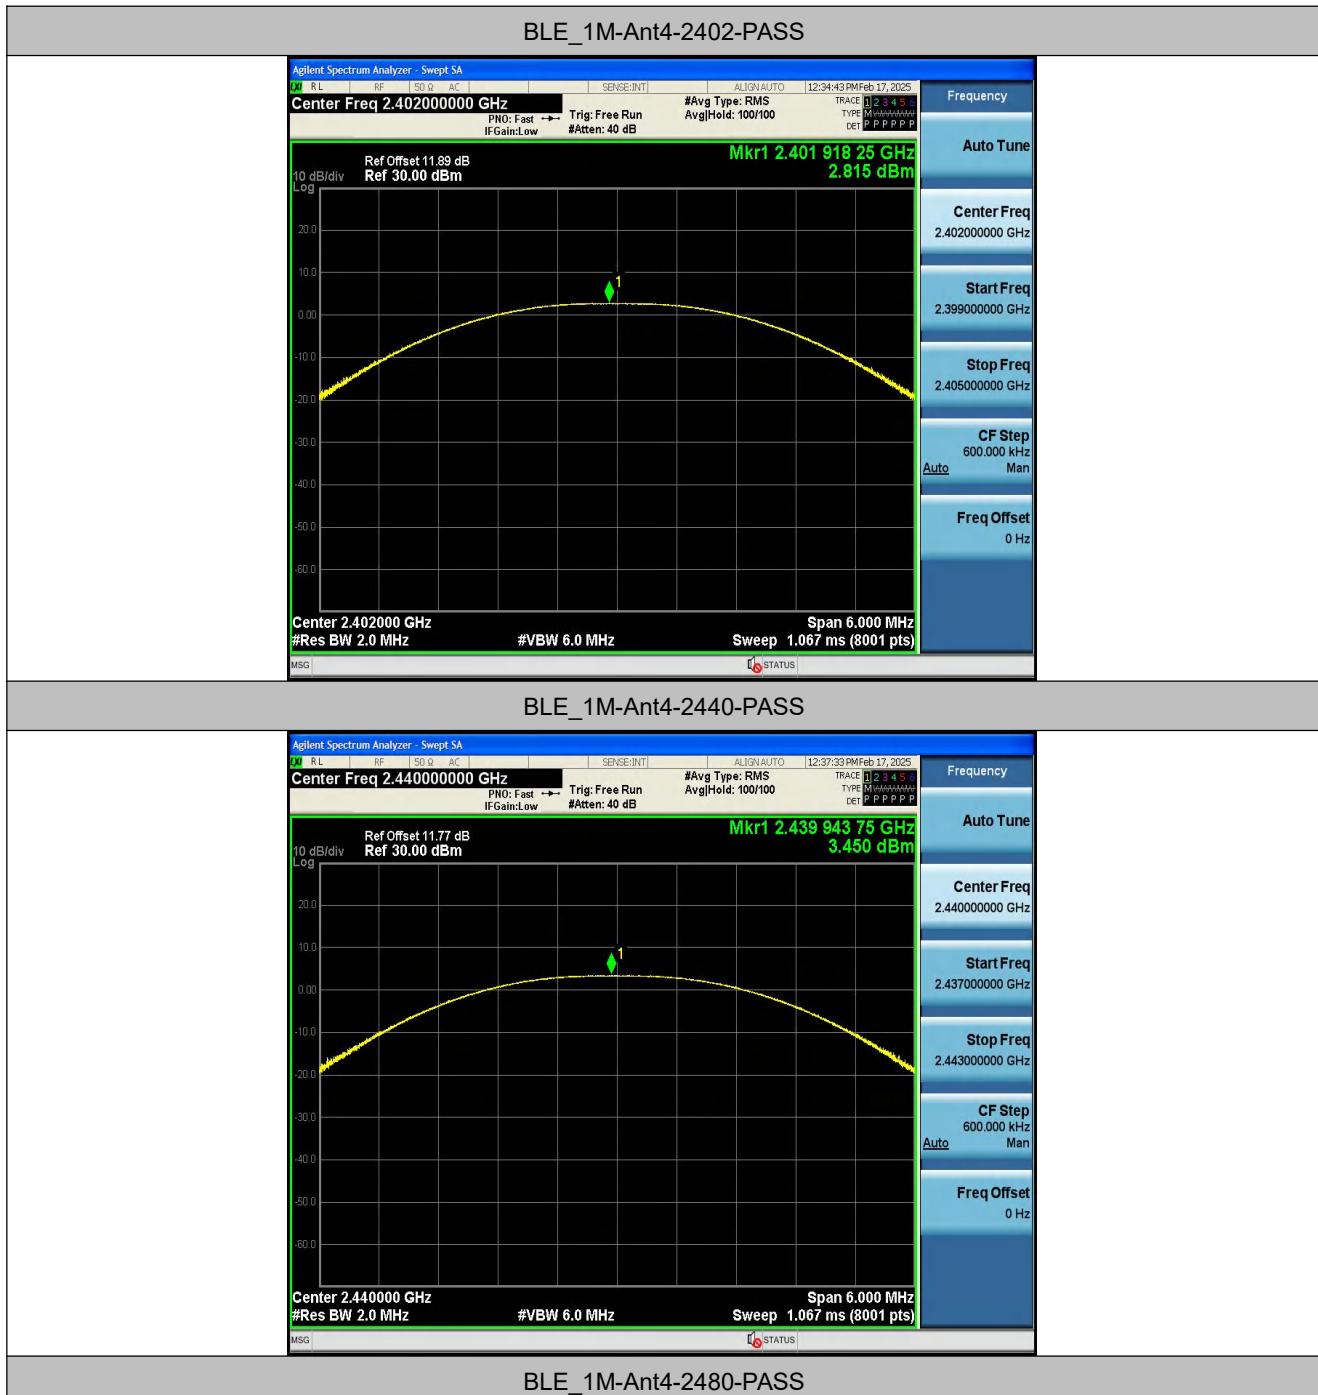



Report No.: PTC25010900703E-FC02




## 10 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 10.2 Test Setup

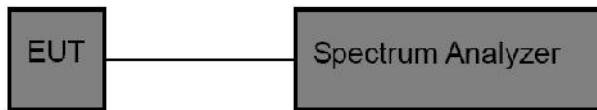

### 10.3 Test Result

Ant0:

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant0	2402	-12.03	≤8.00	PASS
BLE_1M	Ant0	2440	-11.41	≤8.00	PASS
BLE_1M	Ant0	2480	-12.05	≤8.00	PASS

Ant2:

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant2	2402	-13.43	≤8.00	PASS
BLE_1M	Ant2	2440	-11.92	≤8.00	PASS
BLE_1M	Ant2	2480	-12.28	≤8.00	PASS




Report No.: PTC25010900703E-FC02

Ant4:

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant4	2402	-13.09	≤8.00	PASS
BLE_1M	Ant4	2440	-12.81	≤8.00	PASS
BLE_1M	Ant4	2480	-10.74	≤8.00	PASS

## Test Graphs:

Ant0:

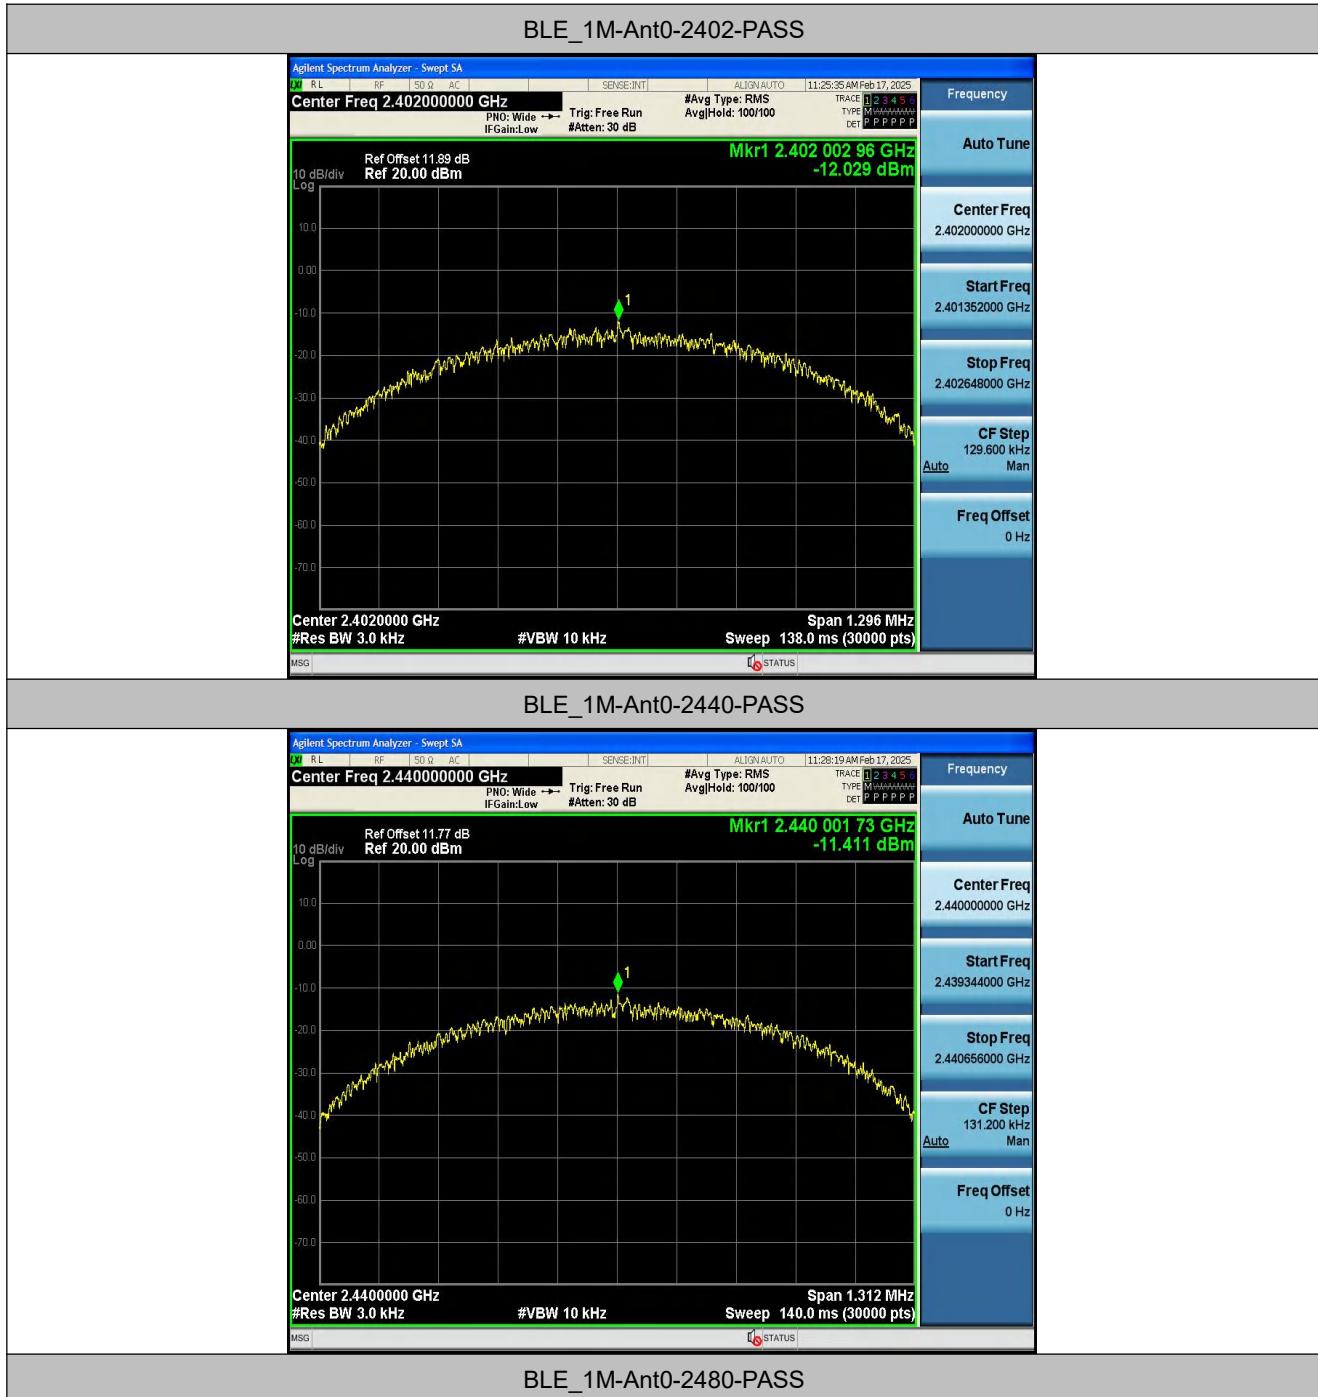




Report No.: PTC25010900703E-FC02



Ant2:

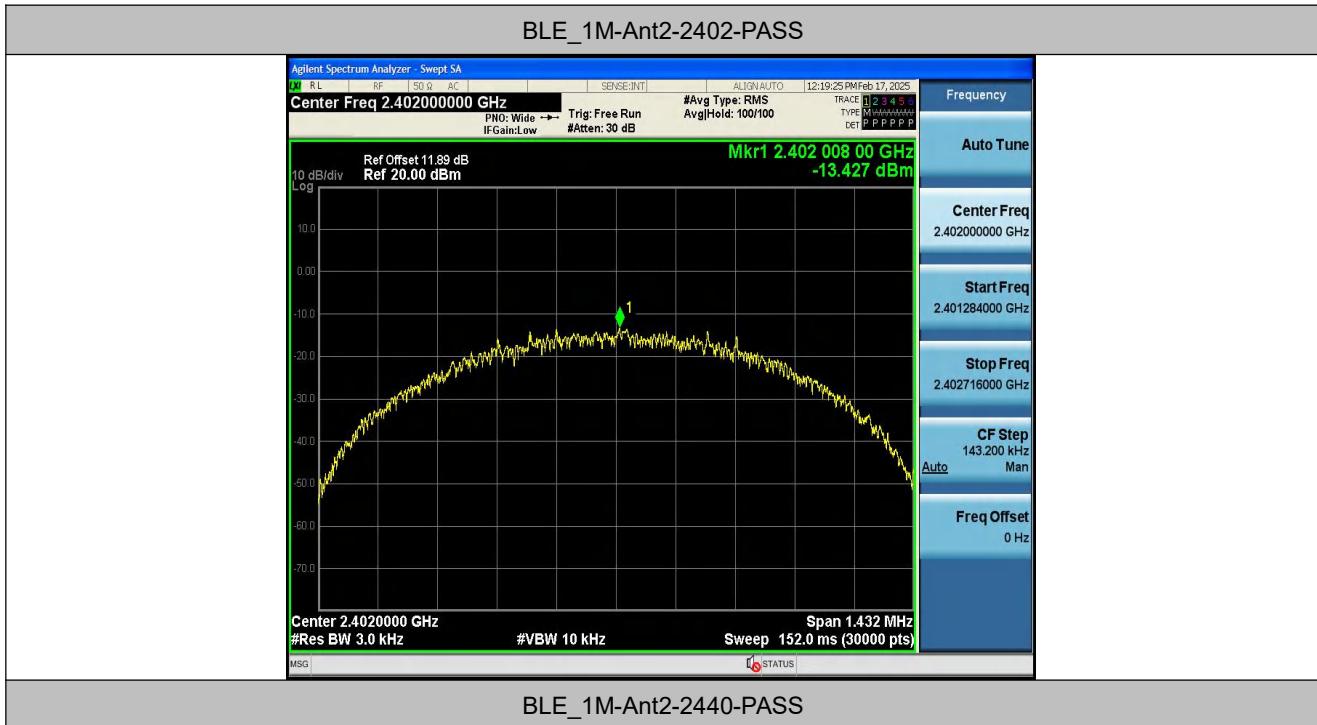




### BLE\_1M-Ant2-2480-PASS



Ant4:

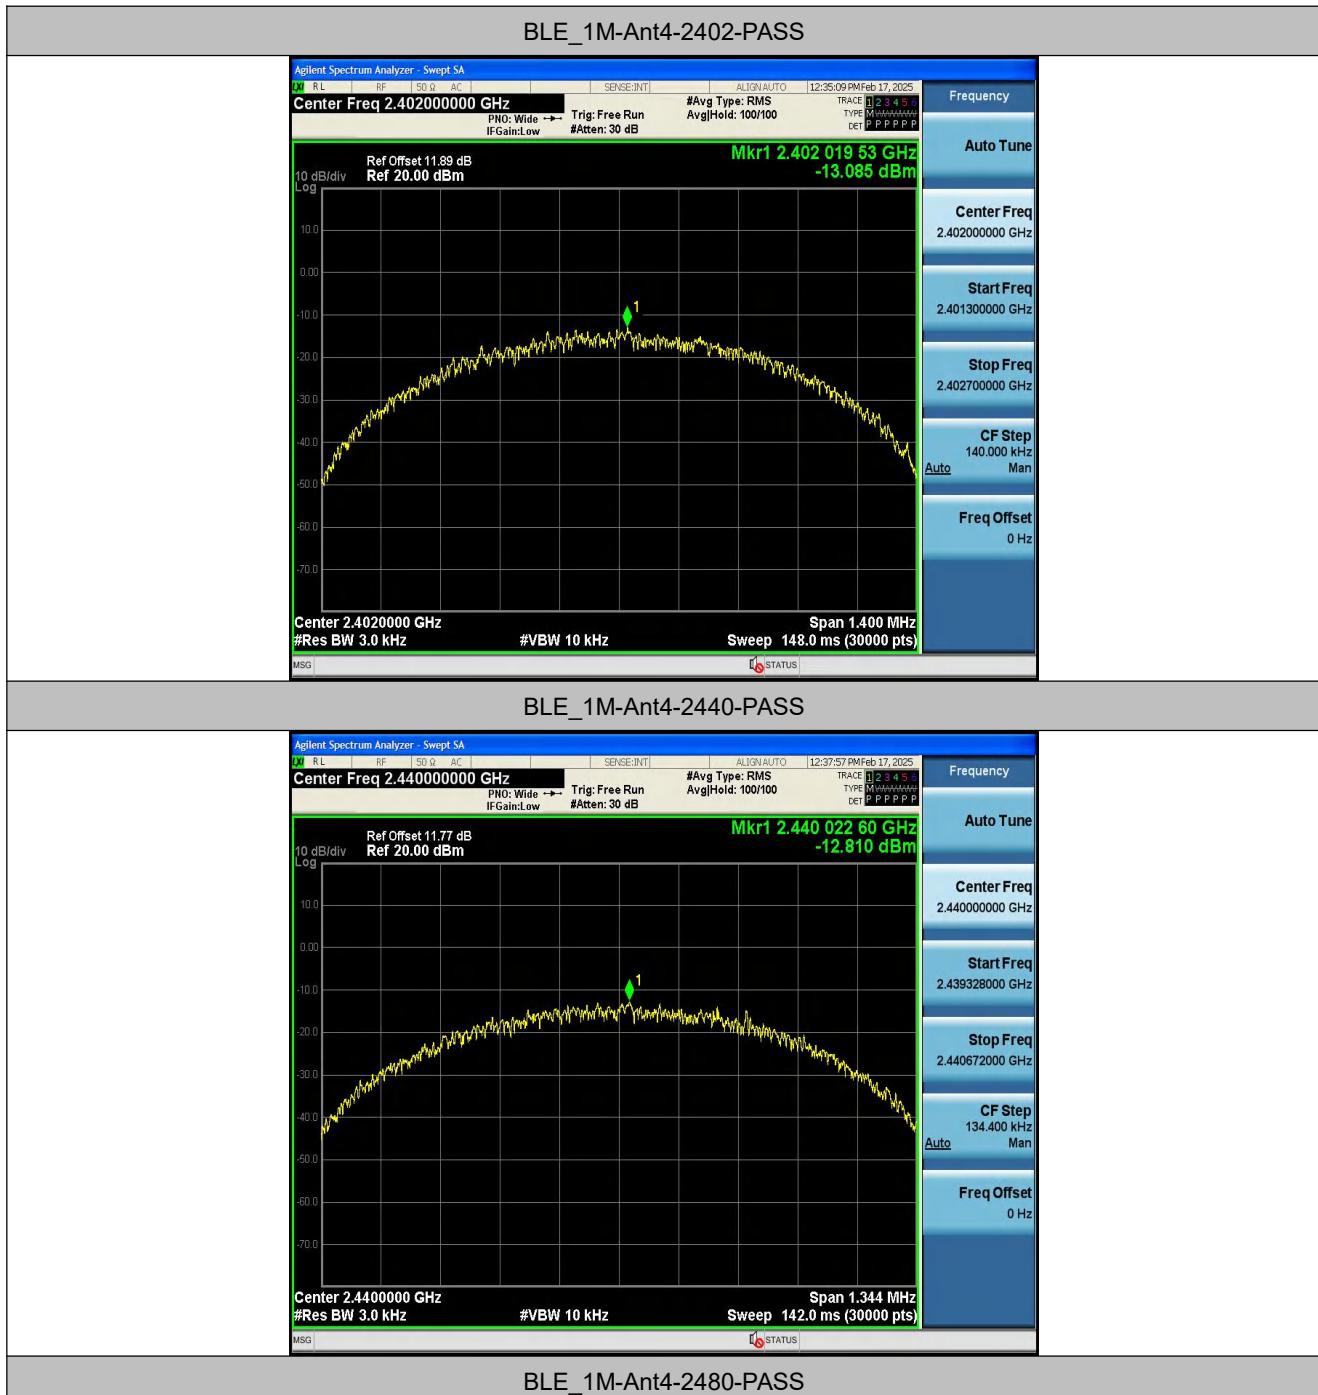



Report No.: PTC25010900703E-FC02





## 11 Antenna Application

### 11.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 11.2 Result

The EUT'S antenna, permanent attached antenna, is External antenna. The antenna's gain is 3.15 dBi and meets the requirement.

## 12 Test Setup

Conducted Emissions



Radiated Spurious Emissions  
Test Frequency From Below 30MHz




Test frequency from Above 1GHz




## 13 EUT Photos




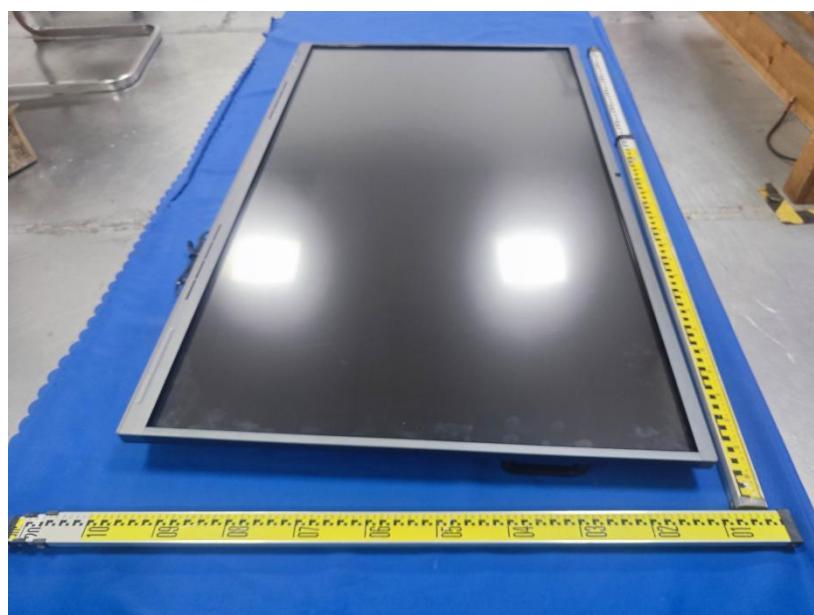










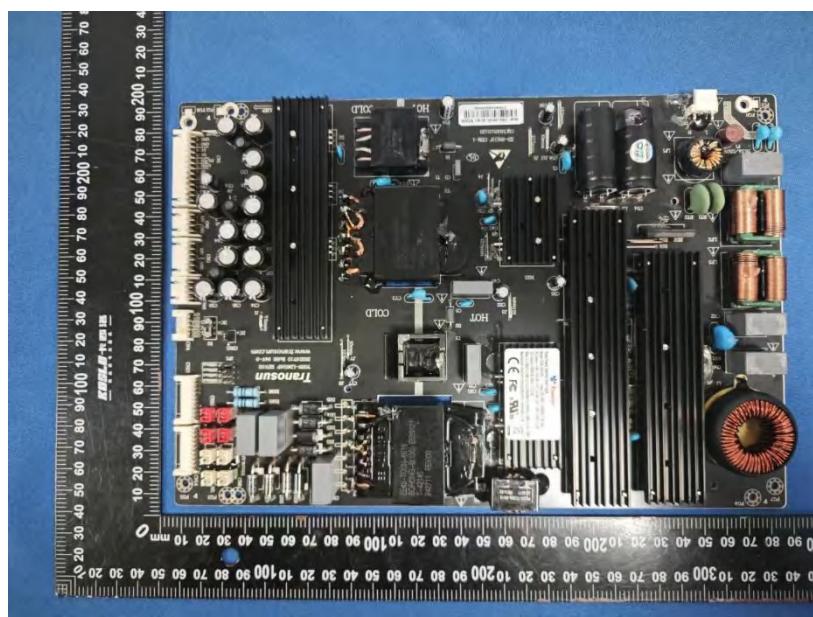



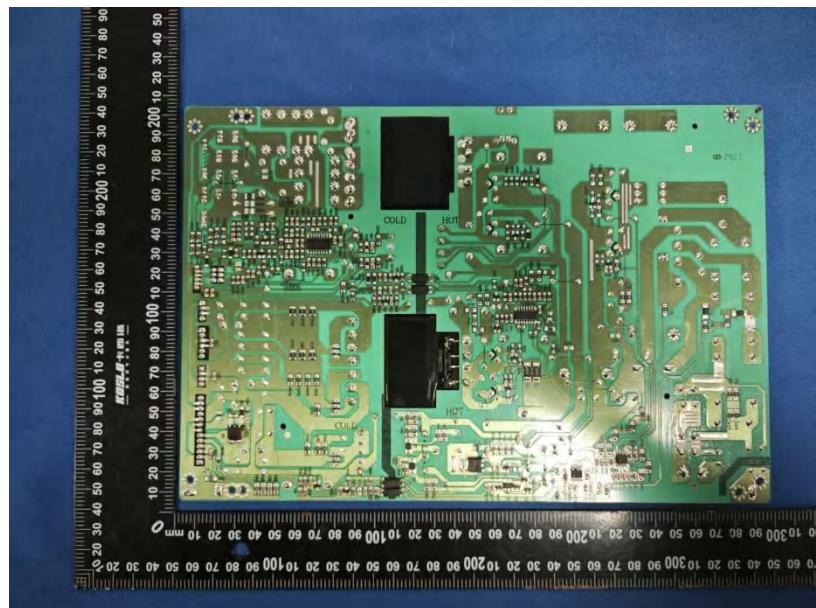


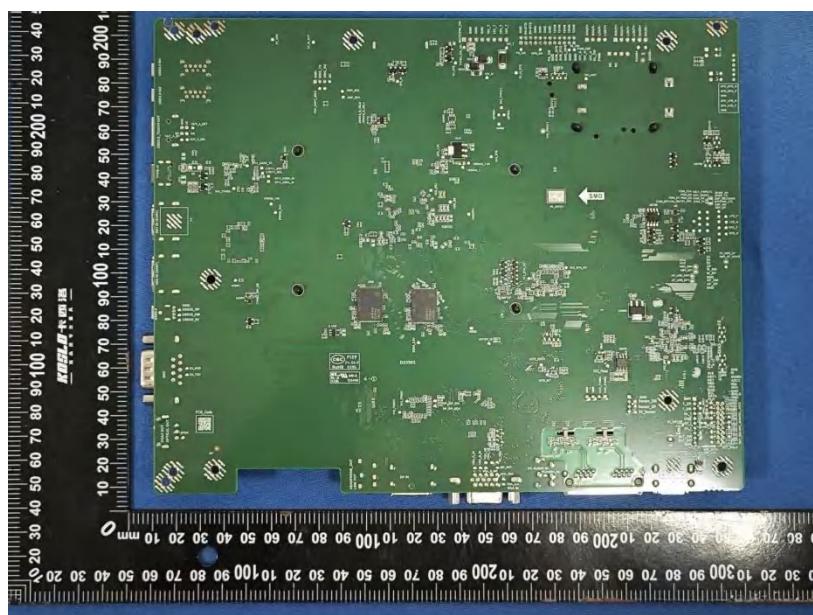

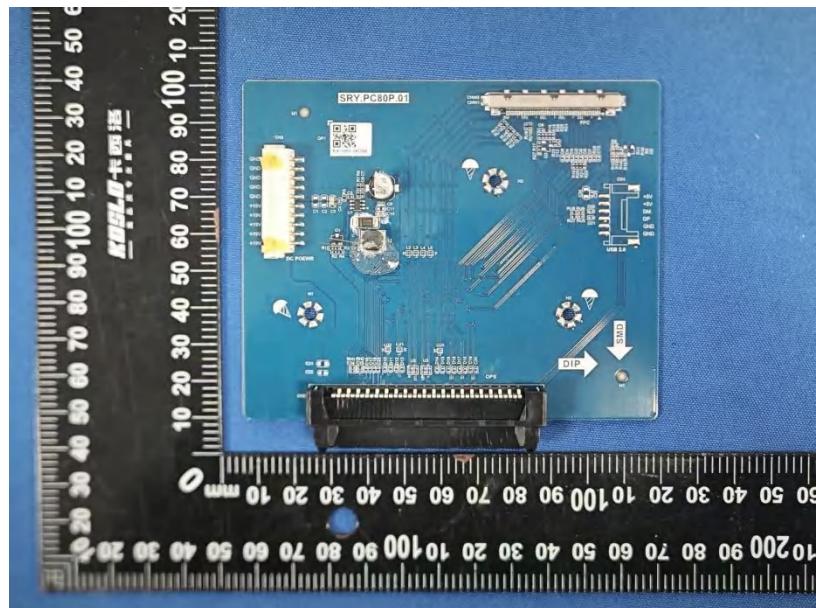

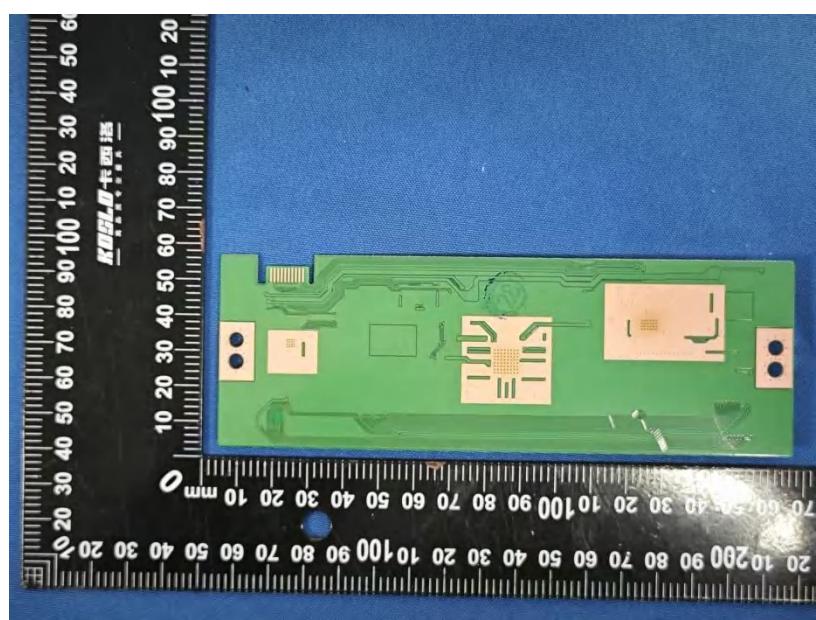
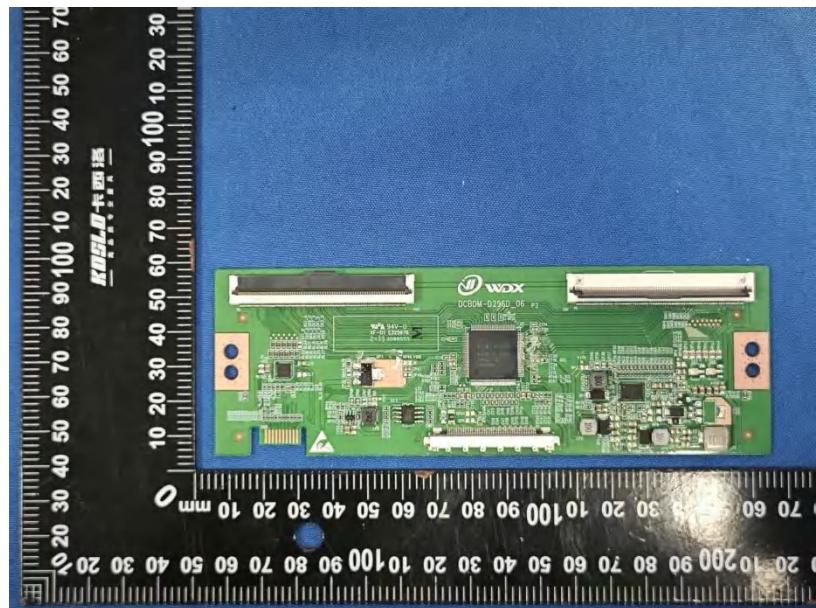


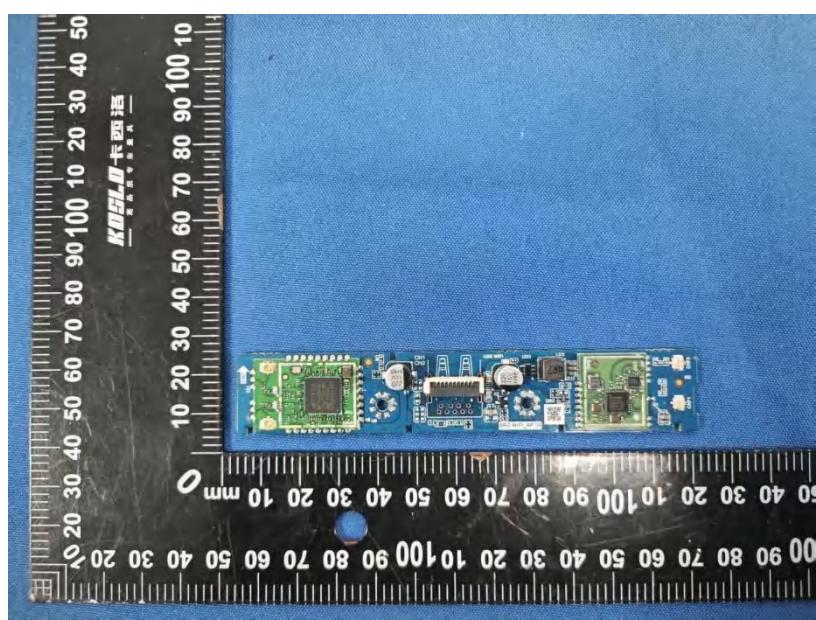
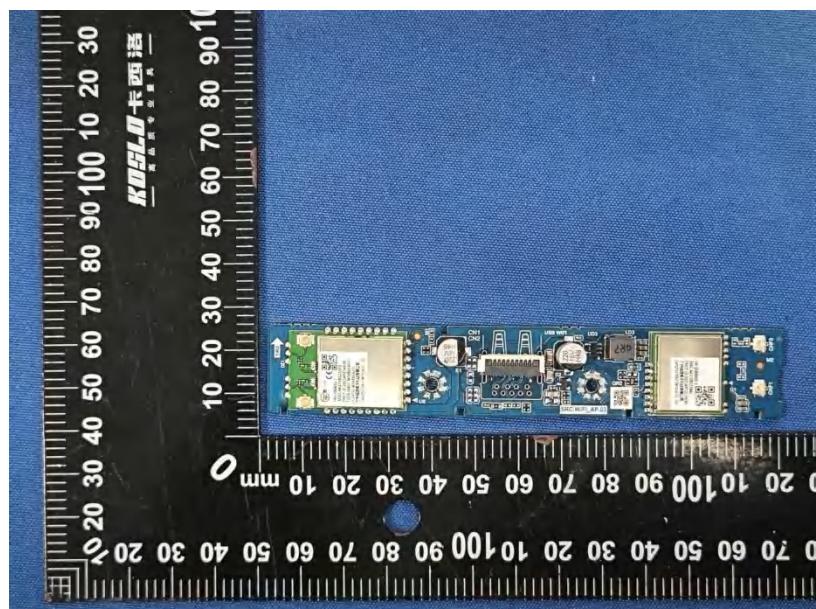


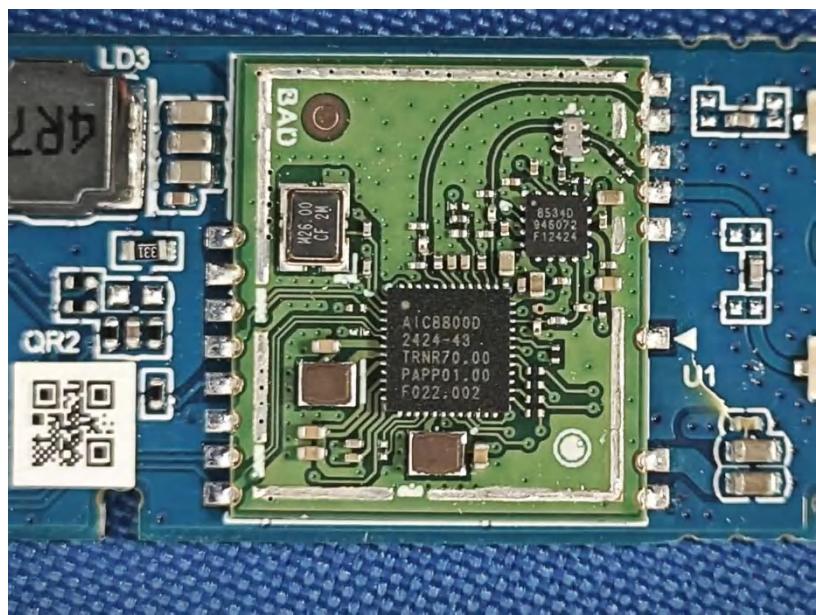
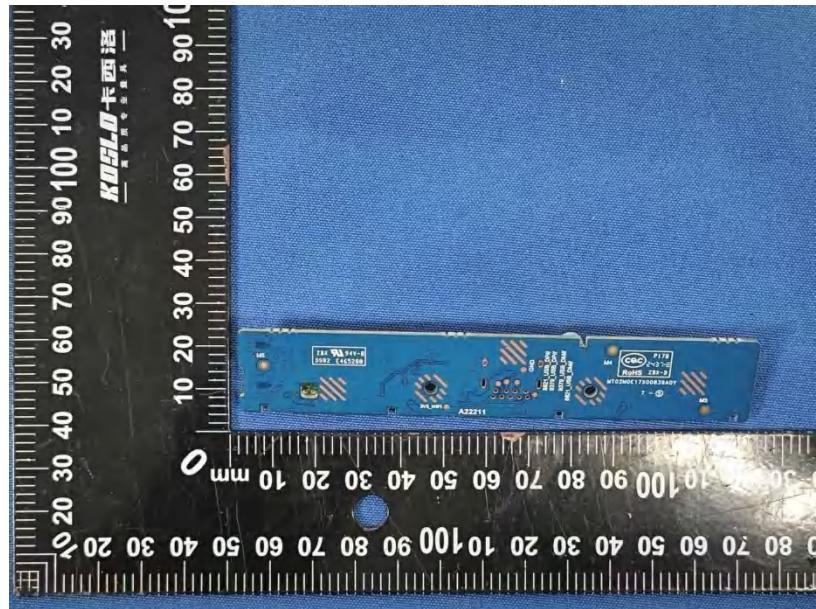








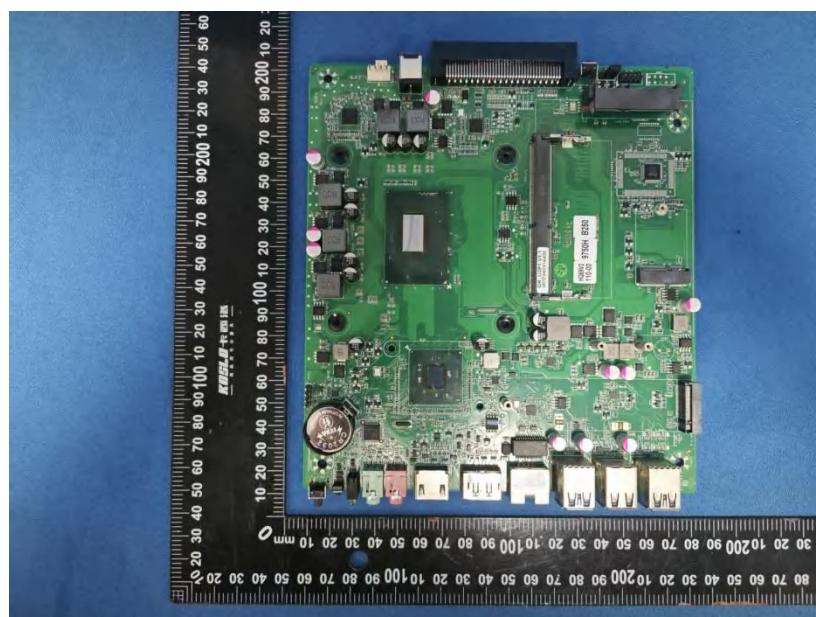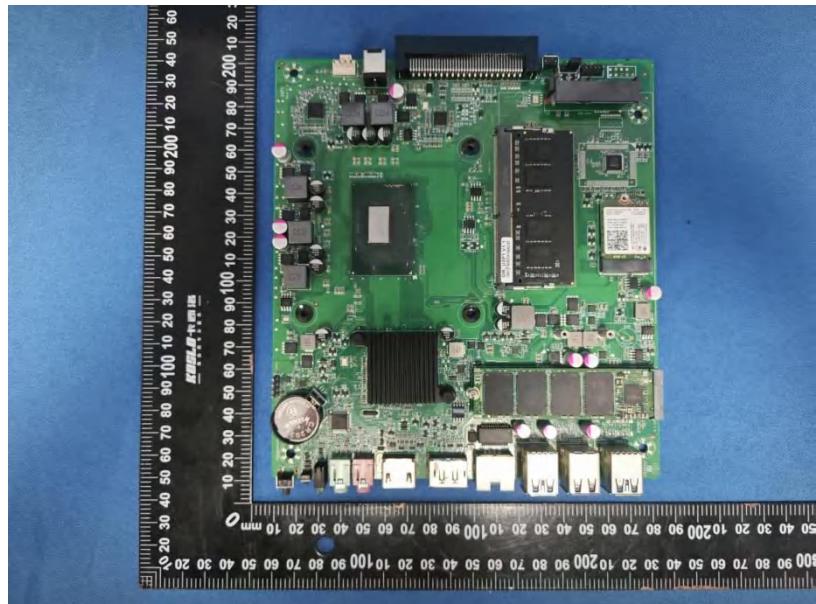


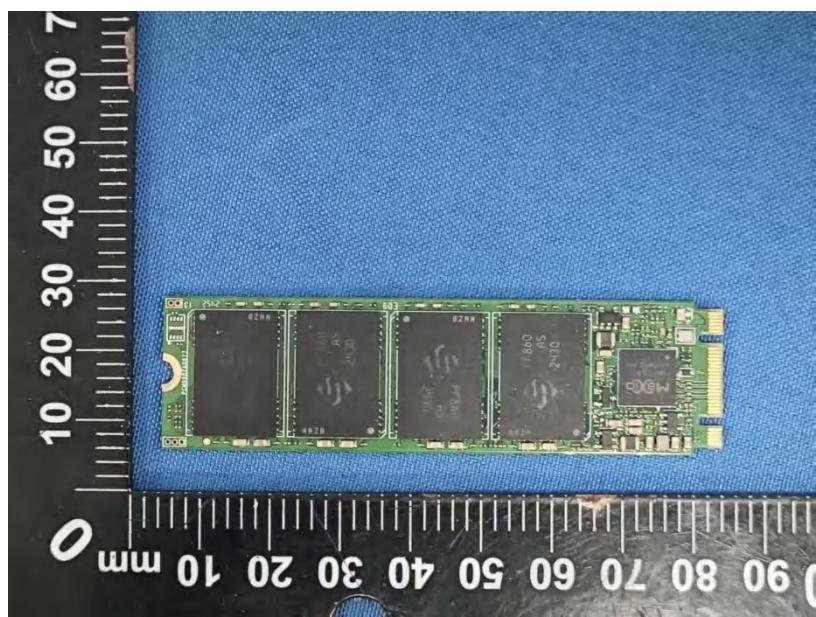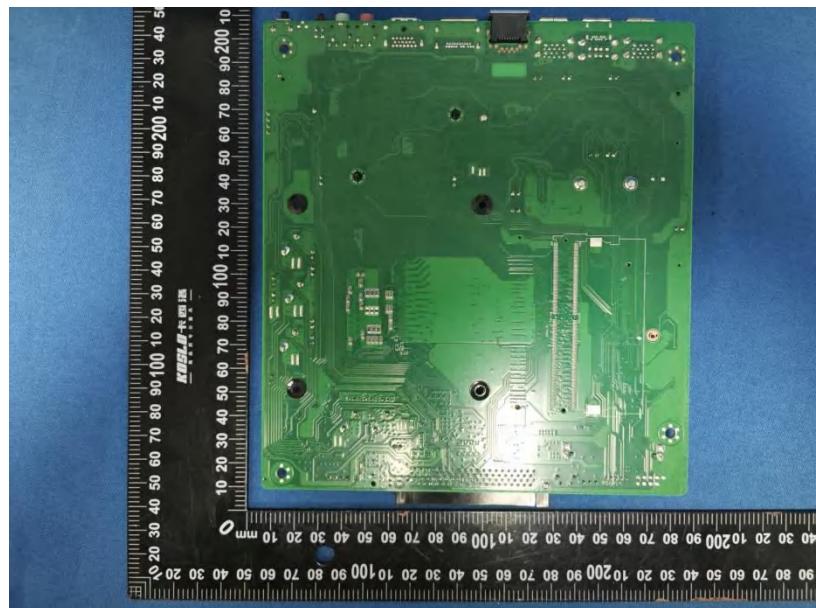

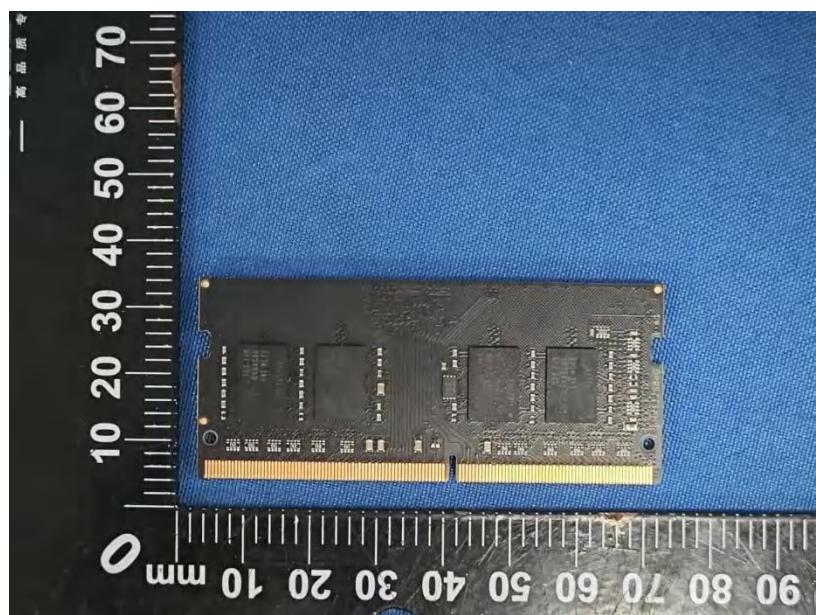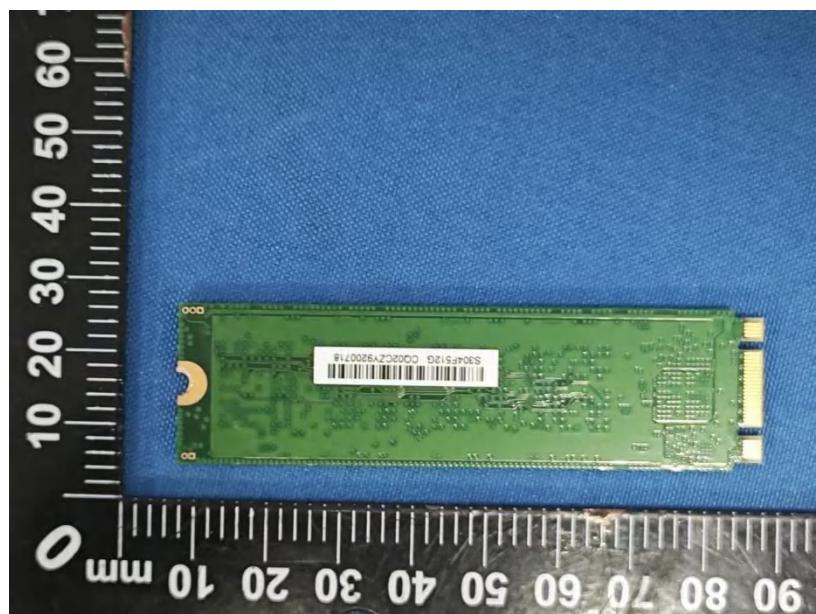

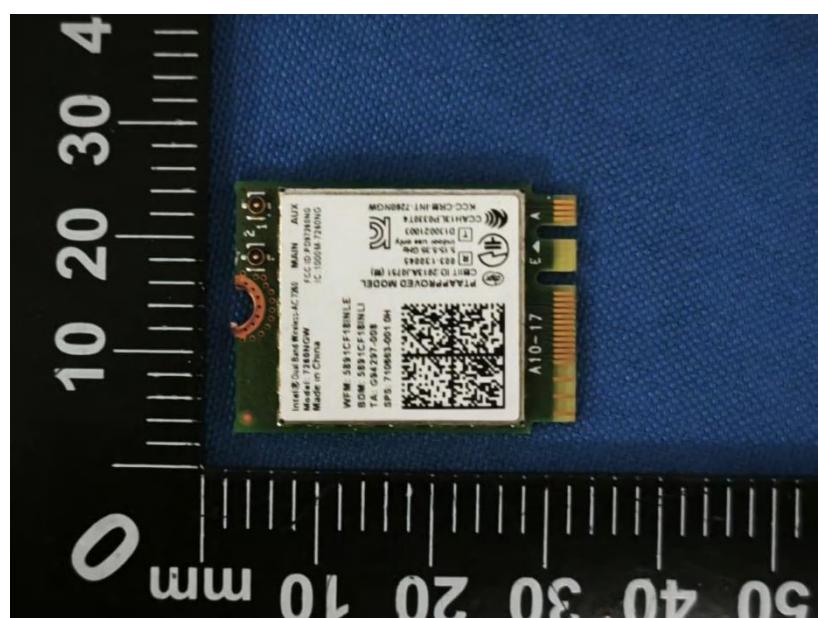

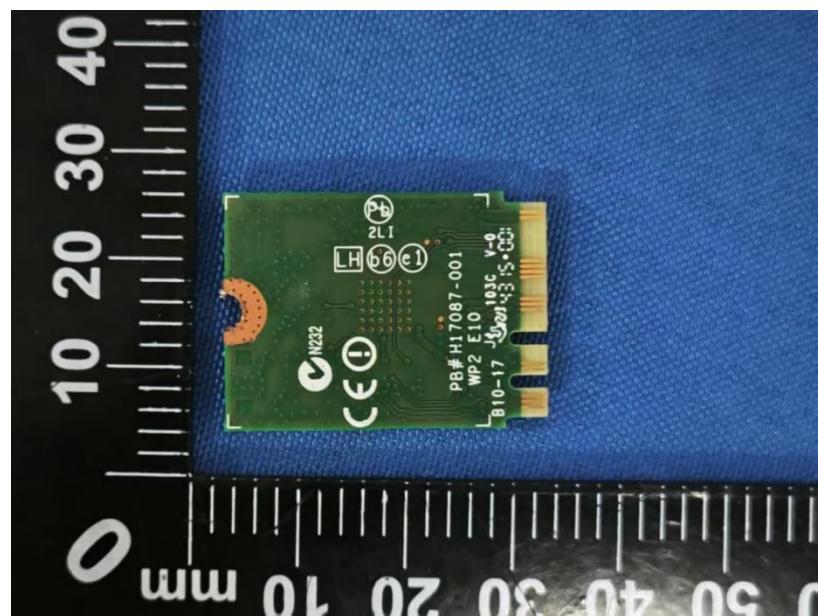

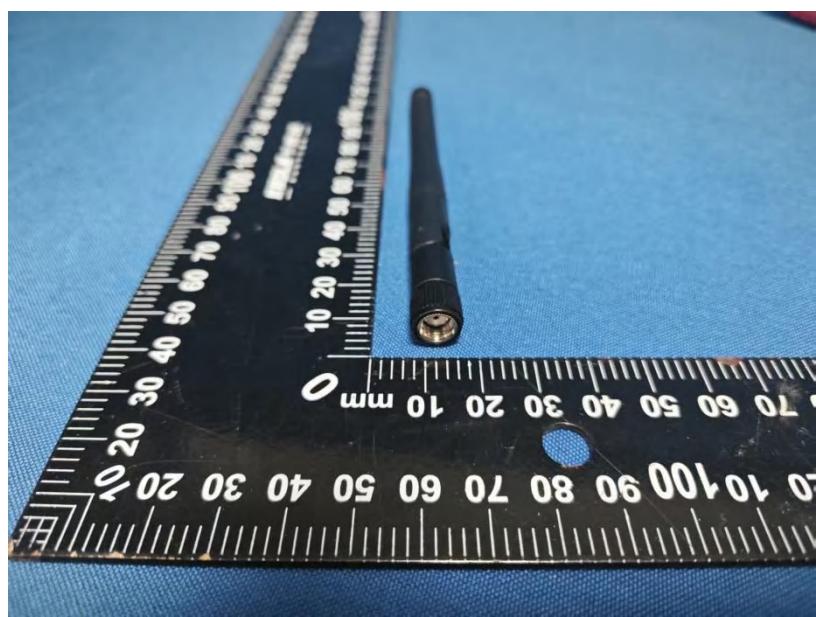

\*\*\*\*\*THE END REPORT\*\*\*\*\*