



FCC TEST REPORT

FCC ID: 2BNOECHNYHR-ZNBB

Product	:	Ltelligent whitebard
Model Name	:	YHR6500
Serial model	:	YHR4900,YHR5500,YHR7500,YHR8500
Brand	:	N/A
Report No.	:	PTC25010900703E-FC04
Prepared for		
Suzhou Yuhuarong Optoelectronics Technology Co., Ltd		
Suzhou Wuzhong Economic Development Zone, Yuexi Street, Qianzhu Road No. 3, Building 8, second floor east		
Prepared by		
Precise Testing & Certification Co., Ltd		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



1 TEST RESULT CERTIFICATION

Applicant's name : Suzhou Yuhuarong Optoelectronics Technology Co., Ltd
Address : Suzhou Wuzhong Economic Development Zone, Yuexi Street,
Qianzhu Road No. 3, Building 8, second floor east
Manufacture's name : Suzhou Yuhuarong Optoelectronics Technology Co., Ltd
Address : Suzhou Wuzhong Economic Development Zone, Yuexi Street,
Qianzhu Road No. 3, Building 8, second floor east
Product name : Ltelligent whitebard
Model name : YHR6500
Serial model : YHR4900,YHR5500,YHR7500,YHR8500
Standards : FCC CFR47 Part 15 Section 15.407
Test procedure : ANSI C63.10:2013
Test Date : Jan. 15, 2025 to Feb. 18, 2025
Date of Issue : Feb. 18, 2025
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink, appearing to read 'Jack Zhou'.

Jack zhou / Engineer

Technical Manager:

A handwritten signature in black ink, appearing to read 'Simon Pu'.

Simon Pu / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.	6
3.2 CHANNEL LIST	8
3.3 TEST SITE	9
4 EQUIPMENT DURING TEST	10
4.1 EQUIPMENTS LIST	10
4.2 MEASUREMENT UNCERTAINTY	12
4.3 DESCRIPTION OF SUPPORT UNITS	13
5 CONDUCTED EMISSION	14
5.1 E.U.T. OPERATION	14
5.2 EUT SETUP	14
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
5.4 MEASUREMENT PROCEDURE	15
5.5 CONDUCTED EMISSION LIMIT	15
5.6 MEASUREMENT DESCRIPTION	15
5.7 CONDUCTED EMISSION TEST RESULT	15
6 RADIATED SPURIOUS EMISSIONS	18
6.1 EUT OPERATION	19
6.2 TEST SETUP	20
6.3 SPECTRUM ANALYZER SETUP	21
6.4 TEST PROCEDURE	22
6.5 SUMMARY OF TEST RESULTS	23
6.6 BAND EDGE MEASUREMENTS	29
6.7 RESTRICTED BAND	67
7 EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	69
7.1 TEST PROCEDURE	69
7.2 TEST SETUP	70
7.3 TEST RESULT	70



8 MAXIMUM CONDUCTED OUTPUT POWER.....	115
8.1 TEST SETUP	115
8.2 TEST PROCEDURE	115
8.3 TEST RESULT	116
9 POWER SPECTRAL DENSITY	119
9.1 TEST PROCEDURE	120
9.2 TEST SETUP	120
9.3 TEST RESULT	121
9.4 ANTENNA REQUIREMENT	166
9.5 RESULT	166
10 FREQUENCY STABILITY	167
10.1 TEST PROCEDURE	167
10.2 TEST SETUP	167
10.3 TEST RESULT	168
11 TEST SETUP	176
12 EUT PHOTOS	178



2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.407(b)	PASS
Emission and Occupied Bandwidth	15.407(a)(e)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Frequency stability	15.407 (g)	PASS
Antenna Requirement	15.203	PASS



3 General Information

3.1 General Description of E.U.T.

Product Name	:	Intelligent whiteboard
Model Name	:	YHR6500
Serial Model	:	YHR4900,YHR5500,YHR7500,YHR8500
Test Model	:	YHR6500
Difference description	:	Only different size, other exactly the same
Specification	:	802.11a/n HT20/HT40/ac20/ac40/ac80
Operation Frequency	:	5G Wi-Fi:5180-5240 MHz
Number of Channel	:	4 channels for 802.11a/n20/ac20 5180-5240 MHz 2 channels for 802.11n40/ac40 5180-5240 MHz 1 channels for 802.11ac80 5180-5240 MHz
Type of Modulation	:	OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n/a/ac
Antenna installation	:	Ant0:External antenna Ant1:External antenna Ant2:External antenna Ant3:External antenna Ant4:External antenna Ant5:External antenna
Antenna Gain	:	Ant0:3.58 dBi Ant1:3.58 dBi Ant2:3.58 dBi Ant3:3.58 dBi Ant4:3.58 dBi Ant5:3.58 dBi
Rated Power Supply	:	AC100V ~ 240 V,50/60Hz 150W
Hardware Version	:	N/A
Software Version	:	N/A



Report No.: PTC25010900703E-FC04

Test sample No.	:	PTC25010900703E-1/2, PTC25010900703E-2/2
-----------------	---	--



3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11a: 6 Mbps; 802.11n (HT20): MCS0; 802.11ac: MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 a/N20/N40/AC20/AC40/AC80

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210		



The maximum duty cycle as following table:

Test Mode	Duty Cycle(%)
802.11a	100%
802.11n/ac20	100%
802.11n/ac40	100%

3.3 Test Site

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A

FCC Designation Number: CN1219



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-26.5GHz	Aug.15, 2024	1 Year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug.15, 2024	1 Year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug.15, 2024	1 Year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug.15, 2024	1 Year
Test S/W	Tonscend	JS1120-3	/	/	/	/

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESPI7	101671	9KHz-7GHz	Aug.15, 2024	1 Year
Loop Antenna	Schwarzbeck	FMZB 1519	192	9 KHz -30MHz	Aug.15, 2024	1 Year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug.15, 2024	1 Year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug.15, 2024	1 Year
Cable	IMRO	AK-9515E(9m)	Cable-L	9KHz-3GHz	Aug.15, 2024	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV40	6625-01-588-5515	9KHz-40GHz	Aug.15, 2024	1 Year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug.15, 2024	1 Year



Report No.: PTC25010900703E-FC04

Power Amplifier	ZHINAN	ZN3380C	15002	1GHz-26.5GHz	Aug.15, 2024	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-1066	15GHz-40GHz	Jul. 19, 2024	1 Year
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Jul. 19, 2024	1 Year
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug.15, 2024	1 Year
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug.15, 2024	1 Year
Test S/W	Tonscend	TS+	/	/	/	/

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug.15, 2024	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-30MHz	Aug.15, 2024	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-30MHz	Aug.15, 2024	1 Year
Limiter	R&S	ESH3-Z2	0357.8810.54-102808-NB	0Hz-30MHz	Aug.15, 2024	1 Year
RF Switch	DIAMOND ANTENNA	CX-210	/	0.09MHz-6GHz	Mar. 22,2024	1 Year
Test S/W	Tonscend	JS32-CE	/	/	/	/



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9kHz~30MHz)	$\pm 3.15\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~18GHz)	$\pm 4.74\text{dB}$
Radiated Emission(18GHz~40GHz)	$\pm 3.20\text{dB}$



Report No.: PTC25010900703E-FC04

4.3 Description of Support Units

Equipment	Model No.	Series No.	Parameters
N/A	N/A	N/A	N/A

5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207

Test Method : ANSI C63.10: 2013

Test Result : PASS

Frequency Range : 150kHz to 30MHz

Class/Severity : Class B

5.1 E.U.T. Operation

Operating Environment :


Temperature : 23.9 °C

Humidity : 51.4 % RH


Atmospheric Pressure : 101.21kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

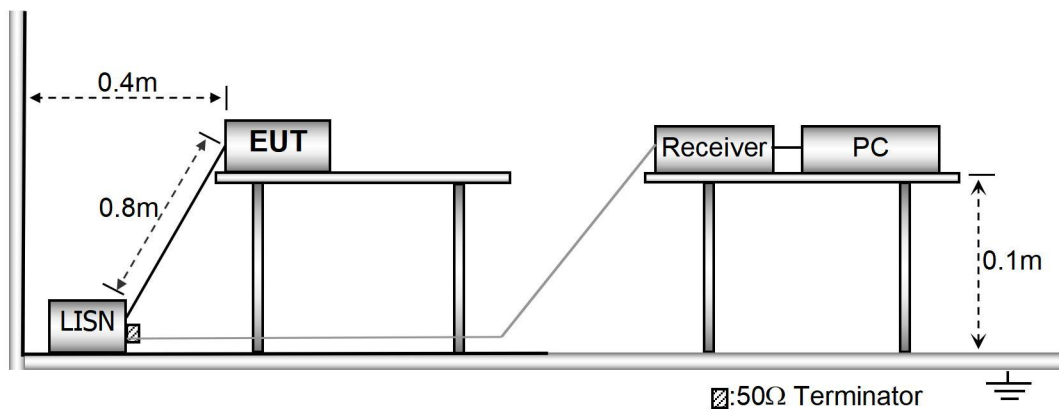

5.3 Test SET-UP (Block Diagram of Configuration)

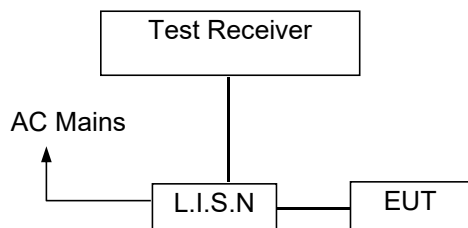

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.1m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


5.7 Conducted Emission Test Result

Pass.

All the modulation modes were tested the data of the worst mode (AC 120V/60Hz, TX 5180MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.




Line-AC 120V/60Hz

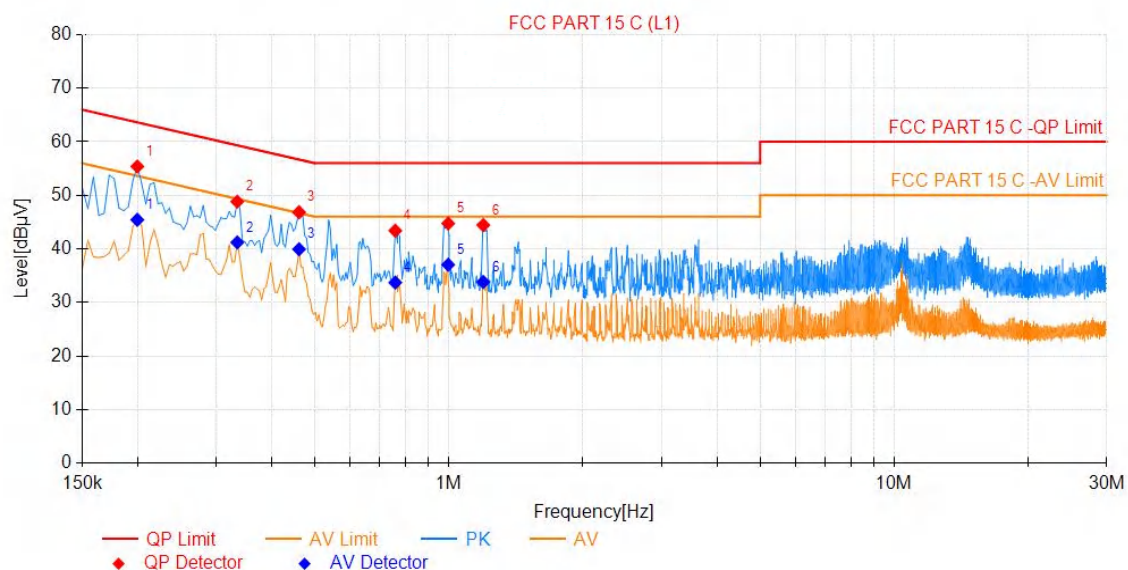

Final Data List											
NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.200	35.94	19.45	55.39	63.63	8.24	25.99	45.44	53.63	8.19	PASS
2	0.335	29.20	19.62	48.82	59.34	10.52	21.58	41.20	49.34	8.14	PASS
3	0.461	27.23	19.61	46.84	56.68	9.84	20.32	39.93	46.68	6.75	PASS
4	0.758	23.79	19.61	43.40	56.00	12.60	14.10	33.71	46.00	12.29	PASS
5	0.996	25.23	19.51	44.74	56.00	11.26	17.54	37.05	46.00	8.95	PASS
6	1.194	24.78	19.67	44.45	56.00	11.55	14.15	33.82	46.00	12.18	PASS

Neutral-AC 120V/60Hz

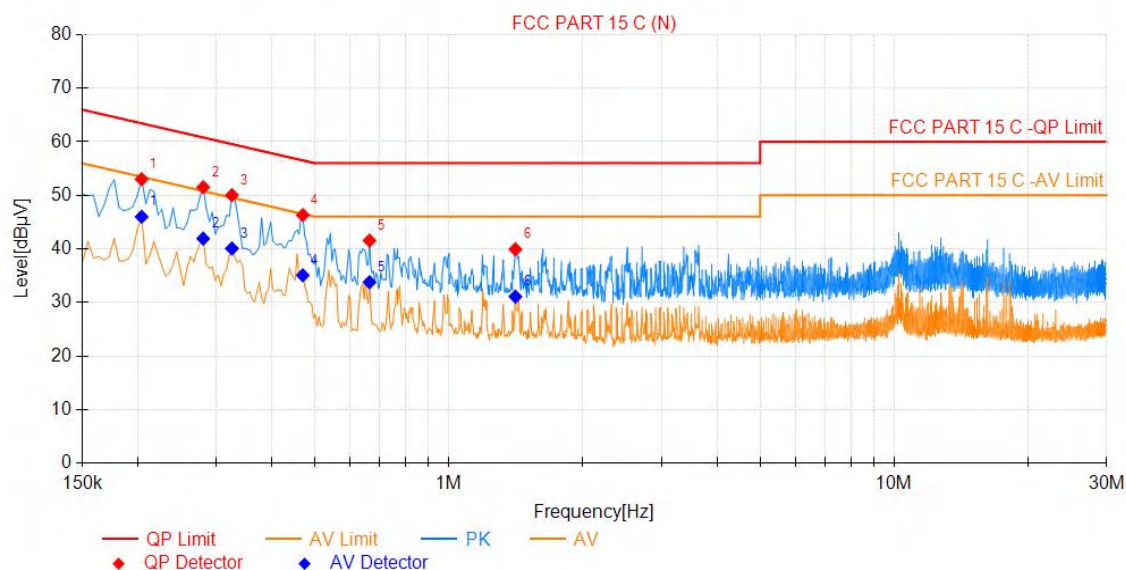

Final Data List											
NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.204	33.57	19.44	53.01	63.45	10.44	26.56	46.00	53.45	7.45	PASS
2	0.281	32.02	19.50	51.52	60.80	9.28	22.41	41.91	50.80	8.89	PASS
3	0.326	30.45	19.58	50.03	59.57	9.54	20.49	40.07	49.57	9.50	PASS
4	0.470	26.75	19.57	46.32	56.52	10.20	15.49	35.06	46.52	11.46	PASS
5	0.663	21.83	19.72	41.55	56.00	14.45	14.05	33.77	46.00	12.23	PASS
6	1.410	20.32	19.60	39.92	56.00	16.08	11.49	31.09	46.00	14.91	PASS

Note: QP Margin[dB]= QP Limit[dBμV]- QP Value[dBμV], AV Margin[dB]= AV Limit[dBμV]- AV Value[dBμV].



6 Radiated Spurious Emissions

Test Requirement	:	FCC CFR47 Part 15 Section 15.209 & 15.407(b)
Test Method	:	ANSI C63.10:2013
Test Result	:	PASS
Measurement Distance	:	3m
Limit		

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

Further.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits. As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz



As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature:	:	24.5 °C
Humidity:	:	52 % RH
Atmospheric Pressure:	:	101.3kPa
Test Voltage	:	AC 120V 60Hz


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

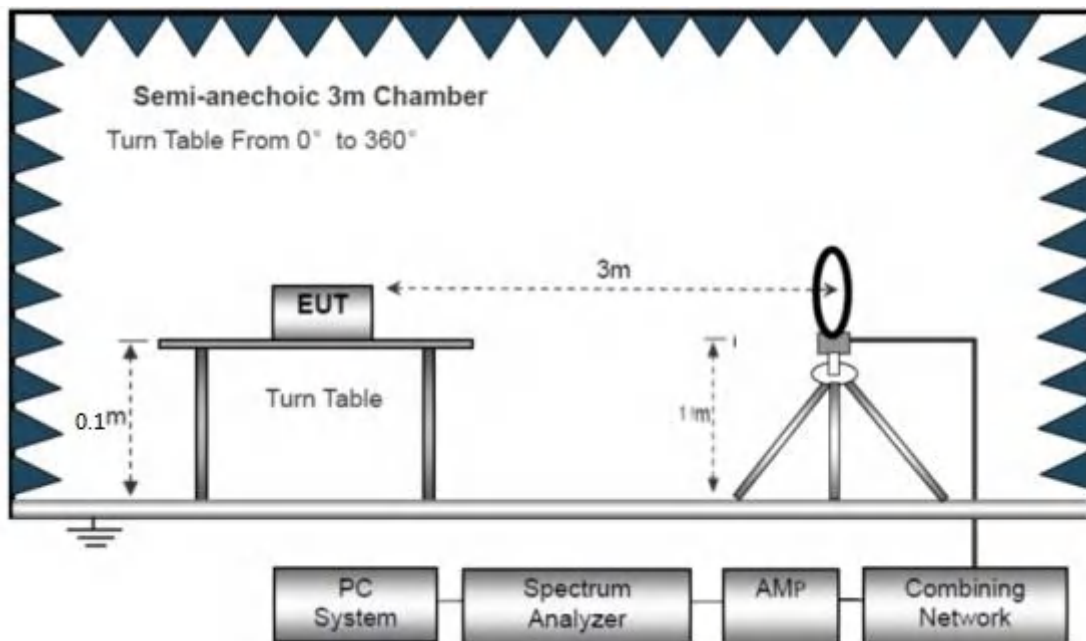

The test setup for emission measurement from 30 MHz to 1 GHz.

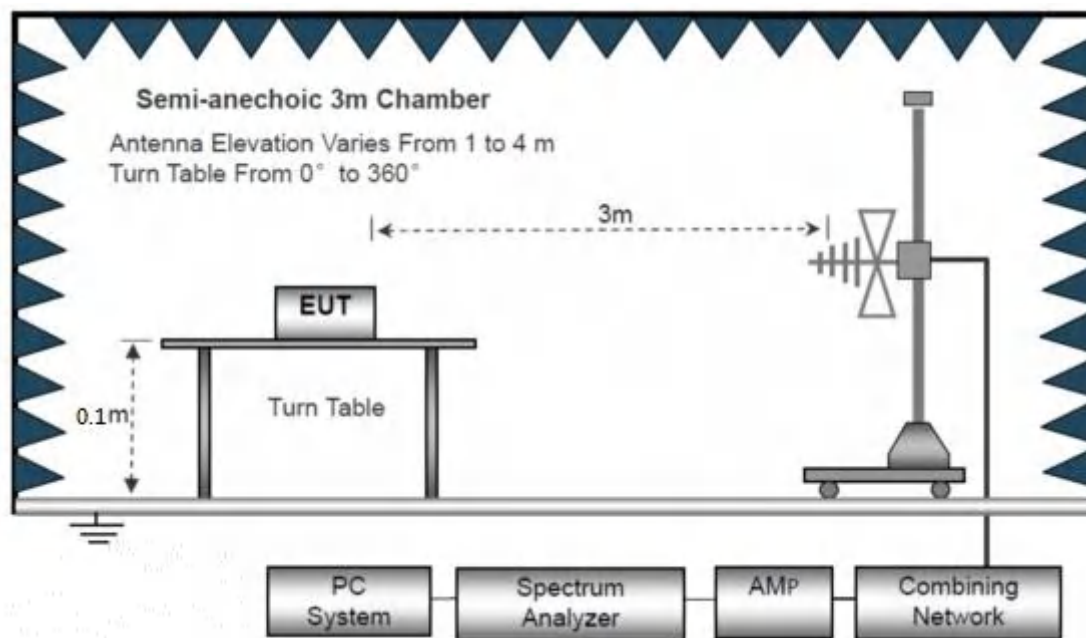

The test setup for emission measurement above 1 GHz

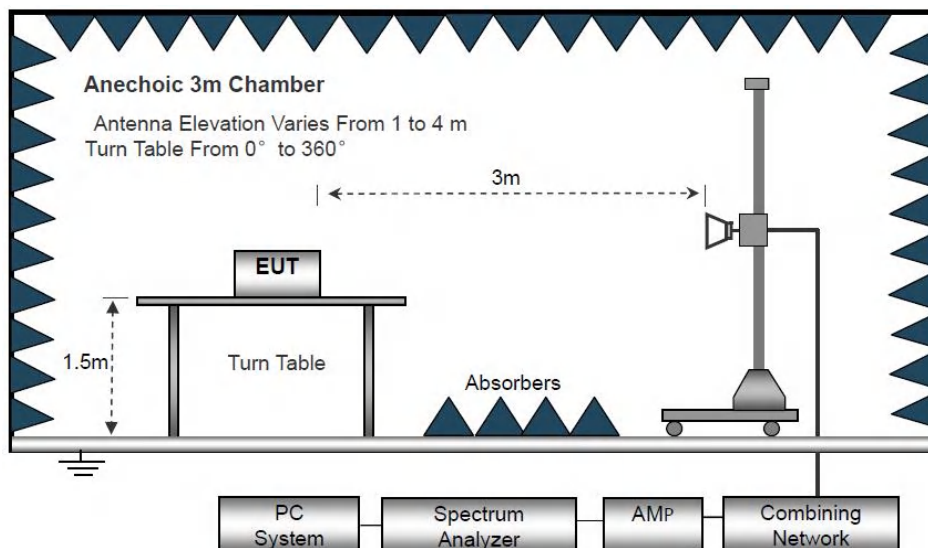

6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room



6.5 Summary of Test Results


Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11a) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:



Antenna Polarization: Horizontal(CH36)

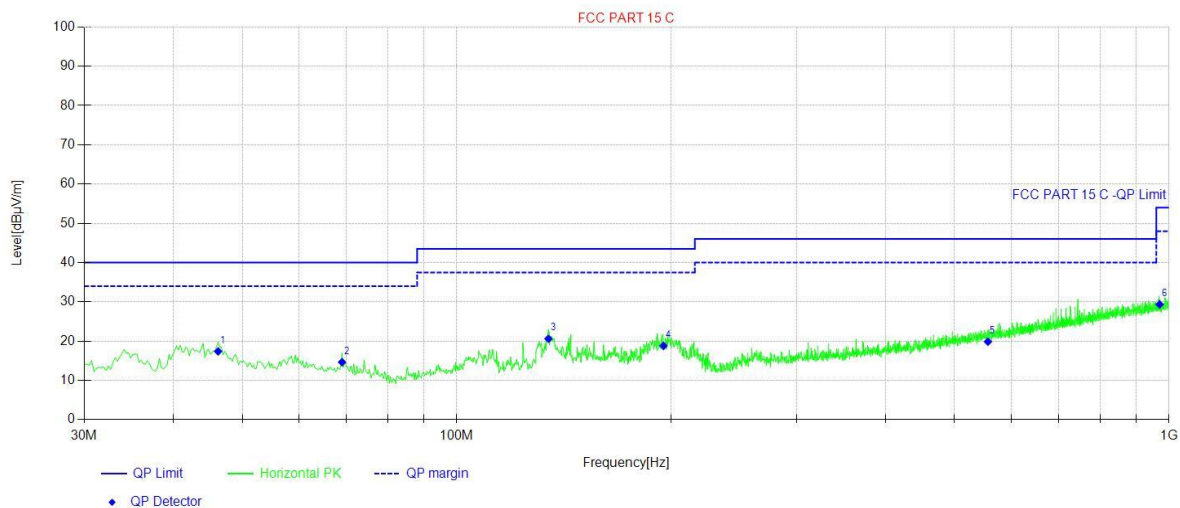


Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	46.25	34.84	-17.45	17.39	40.00	22.61	Horizontal	PASS
2	69.04	33.73	-19.09	14.64	40.00	25.36	Horizontal	PASS
3	134.52	37.53	-16.92	20.61	43.50	22.89	Horizontal	PASS
4	195.14	37.27	-18.48	18.79	43.50	24.71	Horizontal	PASS
5	556.95	29.16	-9.29	19.87	46.00	26.13	Horizontal	PASS
6	970.17	31.21	-1.86	29.35	54.00	24.65	Horizontal	PASS

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor



Antenna Polarization: Vertical (CH36)

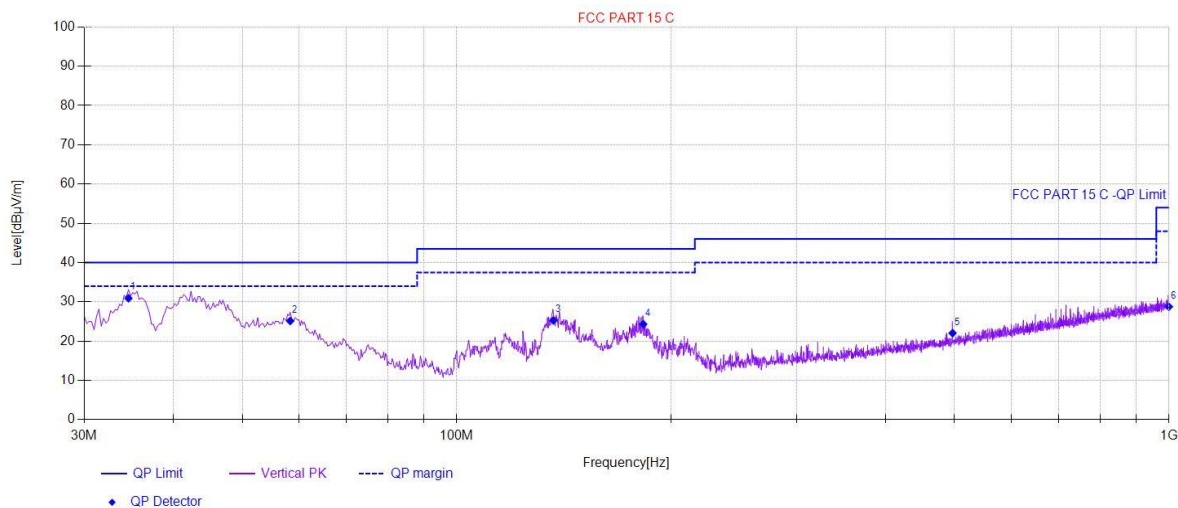

Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	34.61	49.06	-18.14	30.92	40.00	9.08	Vertical	PASS
2	58.37	43.02	-17.89	25.13	40.00	14.87	Vertical	PASS
3	136.70	42.03	-16.77	25.26	43.50	18.24	Vertical	PASS
4	182.78	41.78	-17.46	24.32	43.50	19.18	Vertical	PASS
5	496.81	32.74	-10.71	22.03	46.00	23.97	Vertical	PASS
6	999.76	30.1	-1.33	28.77	54.00	25.23	Vertical	PASS

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Note: only the worst case recorded in the report.



Test Frequency: From 1GHz to 40GHz

Pre-scan all test modes

Only the worst case Main test data.

802.11a

Test Mode: 5180					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	47.38	35.22	5.36	31.25	56.71	68.2	-11.49	V
15540	42.08	35.96	7.85	30.63	55.26	68.2	-12.94	V
20720	43.02	39.12	8.56	34.95	55.75	68.2	-12.45	V
10360	48.58	34.12	5.36	31.25	56.81	68.2	-11.39	H
15540	42.54	36.52	7.85	30.63	56.28	68.2	-11.92	H
20720	43.09	40.01	8.56	34.95	56.71	68.2	-11.49	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	33.26	35.22	5.36	31.25	42.59	54	-11.41	V
15540	30.19	35.96	7.85	30.63	43.37	54	-10.63	V
20720	27.90	39.12	8.56	34.95	40.63	54	-13.37	V
10360	32.80	34.12	5.36	31.25	41.03	54	-12.97	H
15540	24.61	36.52	7.85	30.63	38.35	54	-15.65	H
20720	27.01	40.01	8.56	34.95	40.63	54	-13.37	H



802.11a

Test Mode:5200					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	47.89	35.63	5.36	31.25	57.63	68.2	-10.57	V
15600	43.37	35.91	7.85	30.63	56.50	68.2	-11.70	V
20800	44.14	39.67	8.56	34.95	57.42	68.2	-10.78	V
10400	47.14	34.25	5.36	31.25	55.50	68.2	-12.70	H
15600	42.10	37.02	7.85	30.63	56.34	68.2	-11.86	H
20800	43.54	38.88	8.56	34.95	56.03	68.2	-12.17	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	33.95	35.63	5.36	31.25	43.69	54	-10.31	V
15600	28.86	35.91	7.85	30.63	41.99	54	-12.01	V
20800	29.23	39.67	8.56	34.95	42.51	54	-11.49	V
10400	33.23	34.25	5.36	31.25	41.59	54	-12.41	H
15600	28.96	37.02	7.85	30.63	43.20	54	-10.80	H
20800	29.92	38.88	8.56	34.95	42.41	54	-11.59	H



802.11a

Test Mode:5240					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	45.55	34.68	5.36	31.25	54.34	68.2	-13.86	V
17520	43.07	36.52	7.85	30.63	56.81	68.2	-11.39	V
20960	44.04	38.77	8.56	34.95	56.42	68.2	-11.78	V
10480	47.13	33.99	5.36	31.25	55.23	68.2	-12.97	H
17520	45.39	36.84	7.85	30.63	59.45	68.2	-8.75	H
20960	46.28	39.93	8.56	34.95	59.82	68.2	-8.38	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	33.21	34.68	5.36	31.25	42.00	54	-12.00	V
17520	28.93	36.52	7.85	30.63	42.67	54	-11.33	V
20960	29.75	38.77	8.56	34.95	42.13	54	-11.87	V
10480	32.00	33.99	5.36	31.25	40.10	54	-13.90	H
17520	27.38	36.84	7.85	30.63	41.44	54	-12.56	H
20960	29.51	39.93	8.56	34.95	43.05	54	-10.95	H

Note:

1. The testing has been conformed to 10*5240MHz=52400MHz.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Emission Level-Limit
4. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.
5. $E[dB \mu V/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$, for $EIPR[dBm] = -27\text{dBm}$.



6.6 Band edge measurements

Test Result:

Ant0:

TestMode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant0	Low	5180	-41.13	≤ -27	PASS
11A	Ant0	High	5240	-40.77	≤ -27	PASS
11N20SISO	Ant0	Low	5180	-41.22	≤ -27	PASS
11N20SISO	Ant0	High	5240	-40.84	≤ -27	PASS
11N40SISO	Ant0	Low	5190	-39.67	≤ -27	PASS
11N40SISO	Ant0	High	5230	-41.03	≤ -27	PASS
11AC20SISO	Ant0	Low	5180	-41.45	≤ -27	PASS
11AC20SISO	Ant0	High	5240	-40.29	≤ -27	PASS
11AC40SISO	Ant0	Low	5190	-40.79	≤ -27	PASS
11AC40SISO	Ant0	High	5230	-40.99	≤ -27	PASS
11AC80SISO	Ant0	Low	5210	-40.91	≤ -27	PASS
11AC80SISO	Ant0	High	5210	-40.97	≤ -27	PASS

Ant1:

TestMode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-41.42	≤ -27	PASS
11A	Ant1	High	5240	-40.31	≤ -27	PASS
11N20SISO	Ant1	Low	5180	-41.47	≤ -27	PASS
11N20SISO	Ant1	High	5240	-41.07	≤ -27	PASS
11N40SISO	Ant1	Low	5190	-41.11	≤ -27	PASS
11N40SISO	Ant1	High	5230	-41.1	≤ -27	PASS
11AC20SISO	Ant1	Low	5180	-40.54	≤ -27	PASS
11AC20SISO	Ant1	High	5240	-41.07	≤ -27	PASS
11AC40SISO	Ant1	Low	5190	-40.79	≤ -27	PASS
11AC40SISO	Ant1	High	5230	-40.77	≤ -27	PASS
11AC80SISO	Ant1	Low	5210	-40.62	≤ -27	PASS
11AC80SISO	Ant1	High	5210	-41.23	≤ -27	PASS

Ant2:

TestMode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant2	Low	5180	-40.54	≤ -27	PASS
11A	Ant2	High	5240	-41.06	≤ -27	PASS
11N20SISO	Ant2	Low	5180	-40.66	≤ -27	PASS
11N20SISO	Ant2	High	5240	-40.81	≤ -27	PASS
11N40SISO	Ant2	Low	5190	-40.95	≤ -27	PASS
11N40SISO	Ant2	High	5230	-40.31	≤ -27	PASS
11AC20SISO	Ant2	Low	5180	-41.35	≤ -27	PASS
11AC20SISO	Ant2	High	5240	-41.09	≤ -27	PASS
11AC40SISO	Ant2	Low	5190	-40.13	≤ -27	PASS
11AC40SISO	Ant2	High	5230	-40.66	≤ -27	PASS
11AC80SISO	Ant2	Low	5210	-41.24	≤ -27	PASS
11AC80SISO	Ant2	High	5210	-40.29	≤ -27	PASS



Ant3:

TestMode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant3	Low	5180	-41.38	≤ -27	PASS
11A	Ant3	High	5240	-41.15	≤ -27	PASS
11N20SISO	Ant3	Low	5180	-40.98	≤ -27	PASS
11N20SISO	Ant3	High	5240	-40.77	≤ -27	PASS
11N40SISO	Ant3	Low	5190	-41.13	≤ -27	PASS
11N40SISO	Ant3	High	5230	-40.61	≤ -27	PASS
11AC20SISO	Ant3	Low	5180	-41.15	≤ -27	PASS
11AC20SISO	Ant3	High	5240	-40.86	≤ -27	PASS
11AC40SISO	Ant3	Low	5190	-41.38	≤ -27	PASS
11AC40SISO	Ant3	High	5230	-40.89	≤ -27	PASS
11AC80SISO	Ant3	Low	5210	-40.8	≤ -27	PASS
11AC80SISO	Ant3	High	5210	-40.57	≤ -27	PASS

Ant4:

TestMode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant4	Low	5180	-40.72	≤ -27	PASS
11A	Ant4	High	5240	-39.44	≤ -27	PASS
11N20SISO	Ant4	Low	5180	-40.36	≤ -27	PASS
11N20SISO	Ant4	High	5240	-40.93	≤ -27	PASS
11N40SISO	Ant4	Low	5190	-41.26	≤ -27	PASS
11N40SISO	Ant4	High	5230	-40.98	≤ -27	PASS
11AC20SISO	Ant4	Low	5180	-41.12	≤ -27	PASS
11AC20SISO	Ant4	High	5240	-39.91	≤ -27	PASS
11AC40SISO	Ant4	Low	5190	-40.16	≤ -27	PASS
11AC40SISO	Ant4	High	5230	-41.11	≤ -27	PASS
11AC80SISO	Ant4	Low	5210	-40.86	≤ -27	PASS
11AC80SISO	Ant4	High	5210	-40.96	≤ -27	PASS

Ant5:


TestMode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant5	Low	5180	-41.04	≤ -27	PASS
11A	Ant5	High	5240	-40.14	≤ -27	PASS
11N20SISO	Ant5	Low	5180	-40.87	≤ -27	PASS
11N20SISO	Ant5	High	5240	-40.87	≤ -27	PASS
11N40SISO	Ant5	Low	5190	-41.43	≤ -27	PASS
11N40SISO	Ant5	High	5230	-40.29	≤ -27	PASS
11AC20SISO	Ant5	Low	5180	-40.91	≤ -27	PASS
11AC20SISO	Ant5	High	5240	-41.09	≤ -27	PASS
11AC40SISO	Ant5	Low	5190	-41.17	≤ -27	PASS
11AC40SISO	Ant5	High	5230	-40.95	≤ -27	PASS
11AC80SISO	Ant5	Low	5210	-40.88	≤ -27	PASS
11AC80SISO	Ant5	High	5210	-40.92	≤ -27	PASS




Test Graphs:

Ant0:

11A-Ant0-5180-PASS

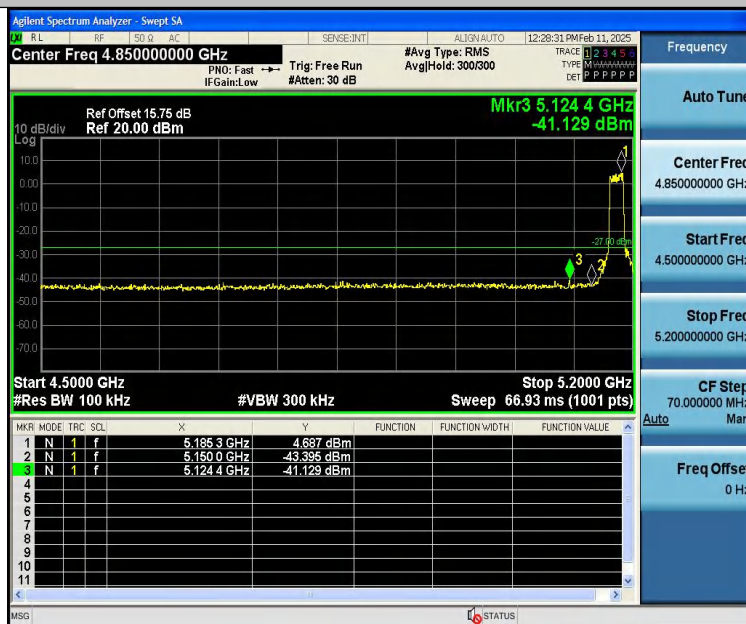


11A-Ant0-5240-PASS

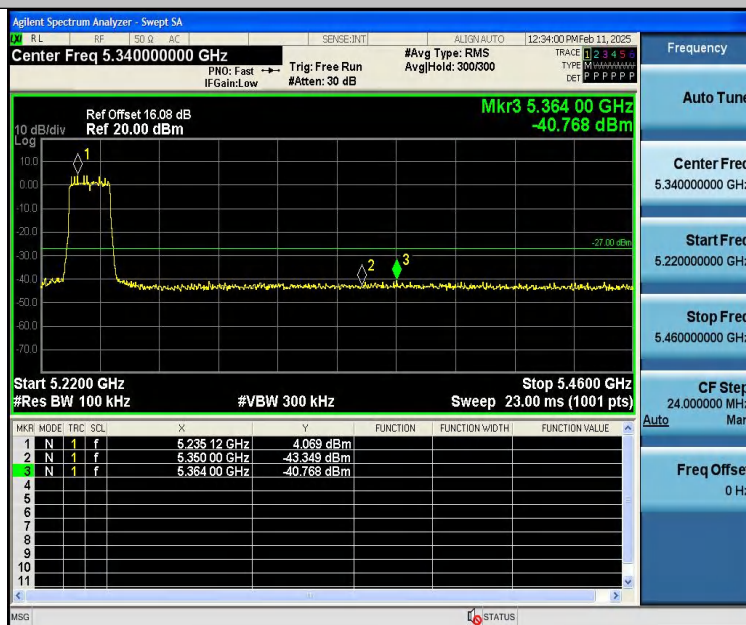


11N20SISO-Ant0-5180-PASS




11N20SISO-Ant0-5240-PASS

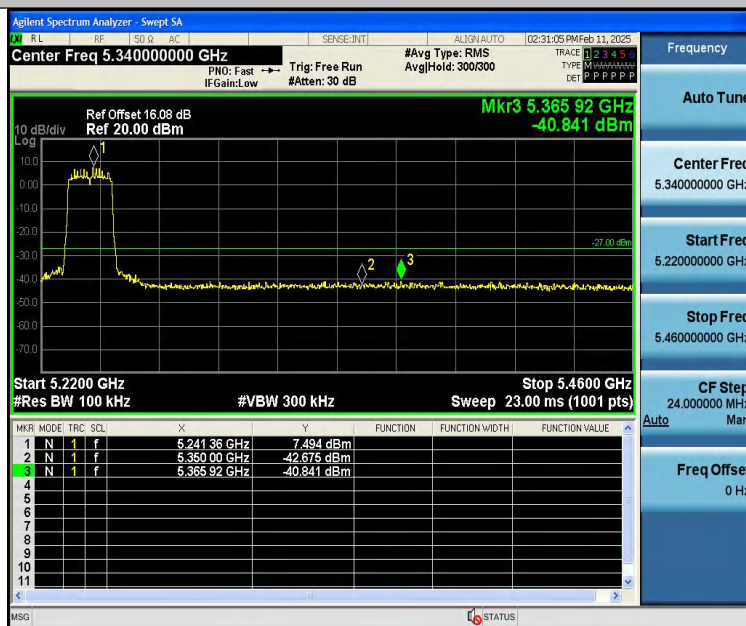

11N40SISO-Ant0-5190-PASS

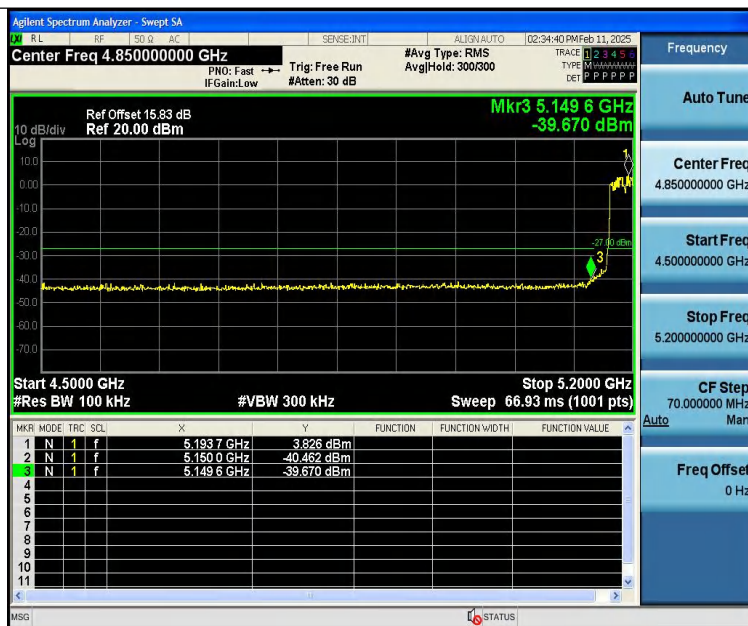

11N40SISO-Ant0-5230-PASS

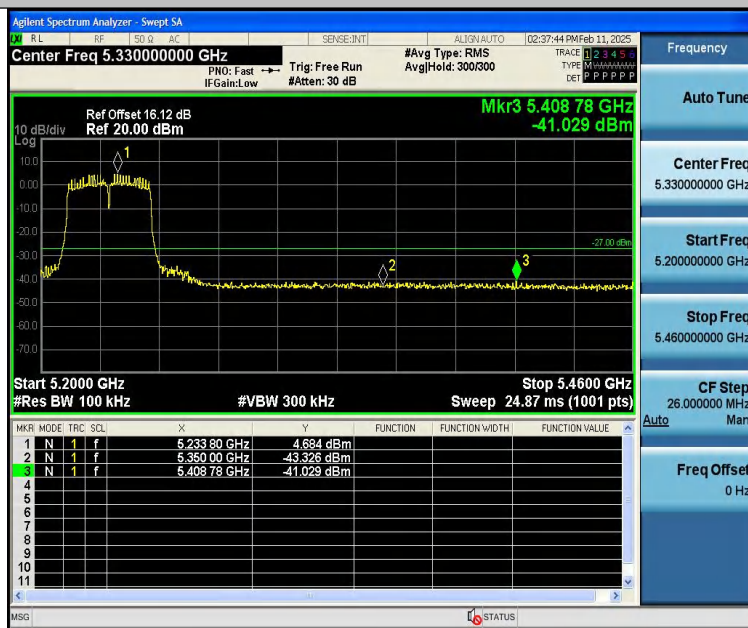

11AC20SISO-Ant0-5180-PASS



11AC20SISO-Ant0-5240-PASS




11AC40SISO-Ant0-5190-PASS




11AC40SISO-Ant0-5230-PASS



11AC80SISO-Ant0-5210-PASS

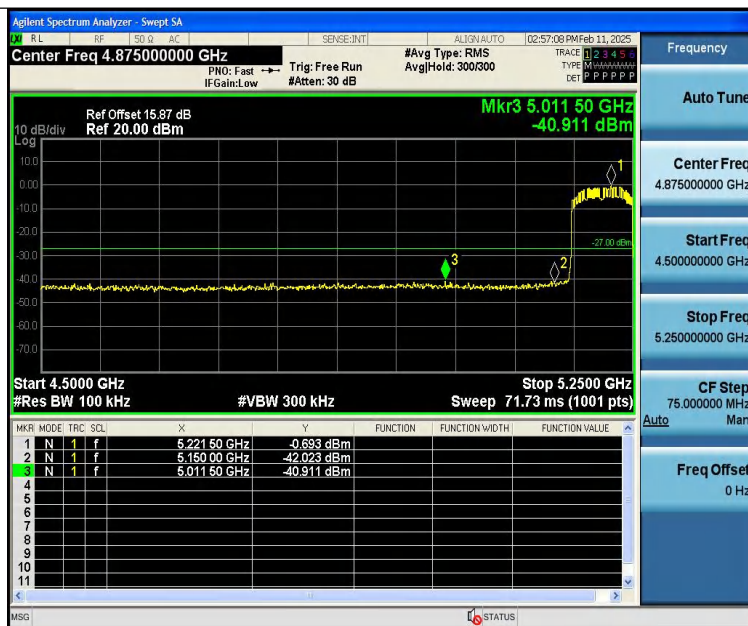


11AC80SISO-Ant0-5210-PASS

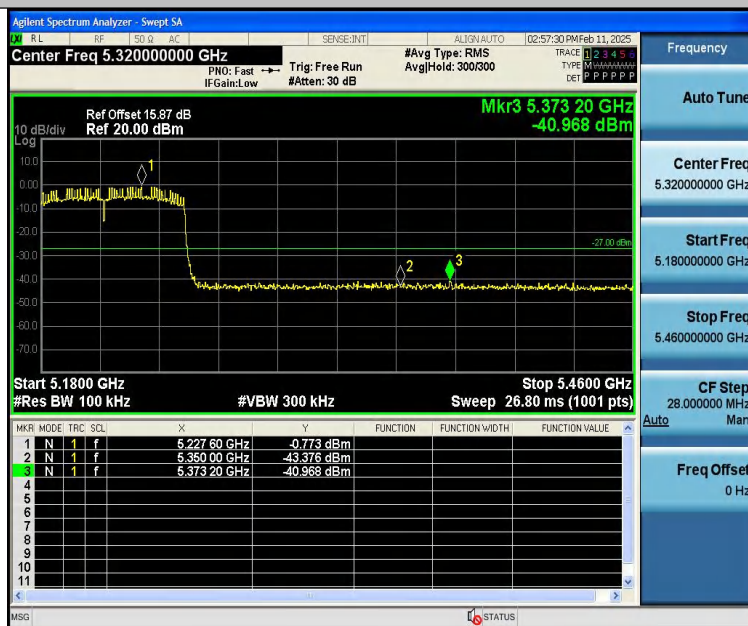




Ant1:


11A-Ant1-5180-PASS

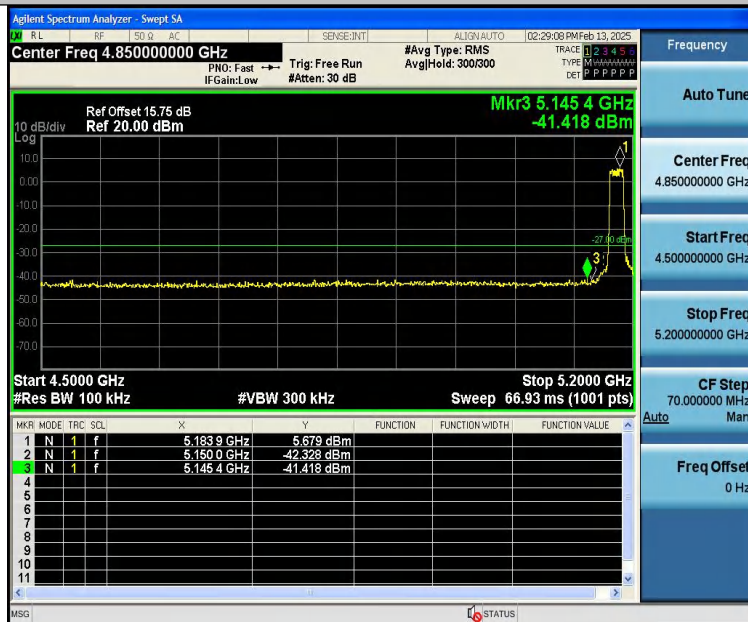


11A-Ant1-5240-PASS

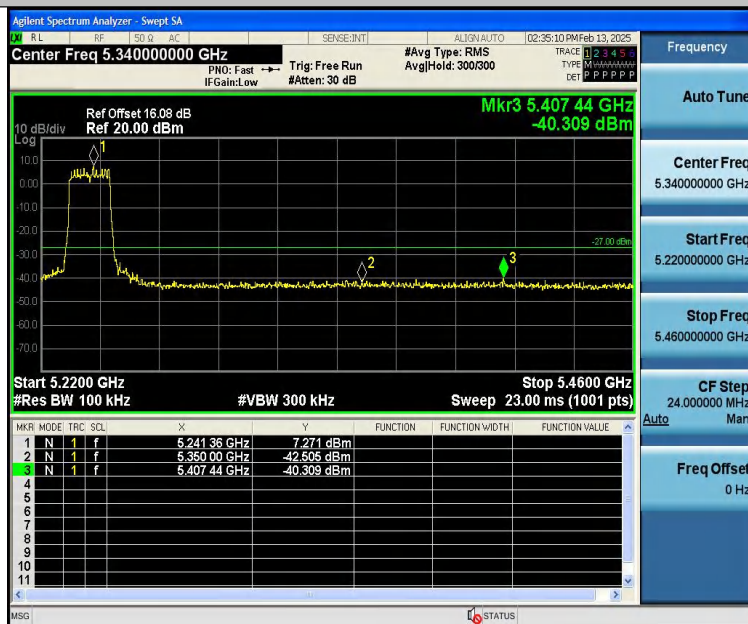


11N20SISO-Ant1-5180-PASS

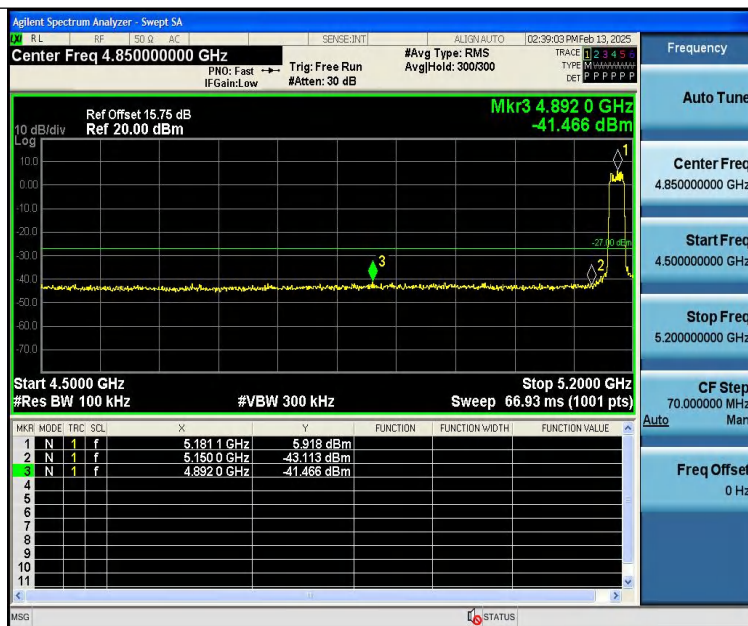

11N20SISO-Ant1-5240-PASS

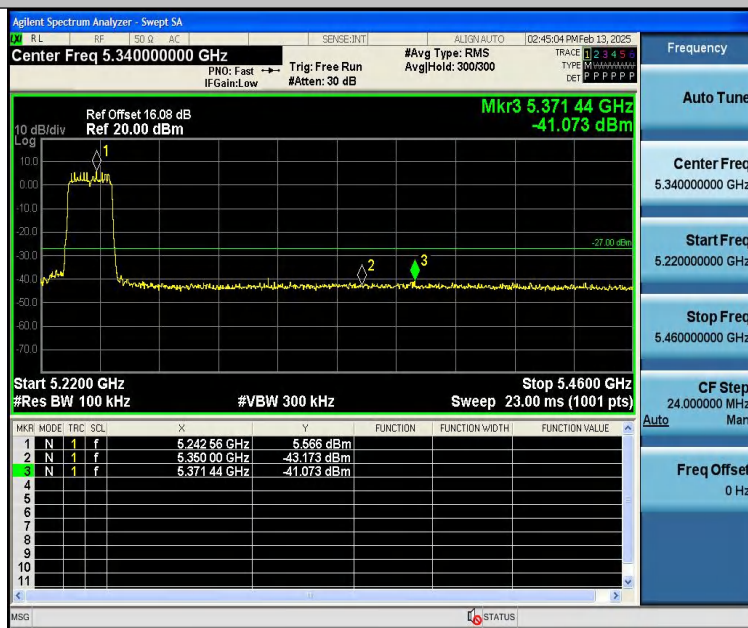

11N40SISO-Ant1-5190-PASS

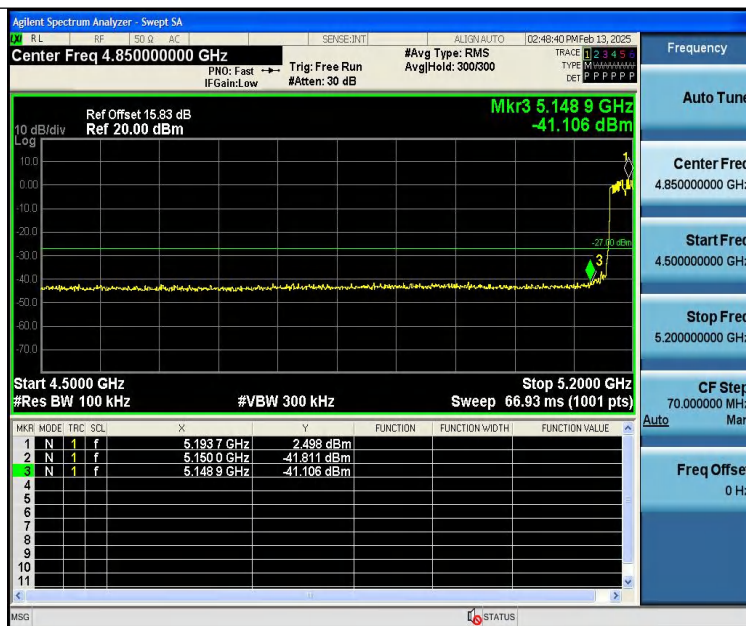


11N40SISO-Ant1-5230-PASS




11AC20SISO-Ant1-5180-PASS




11AC20SISO-Ant1-5240-PASS

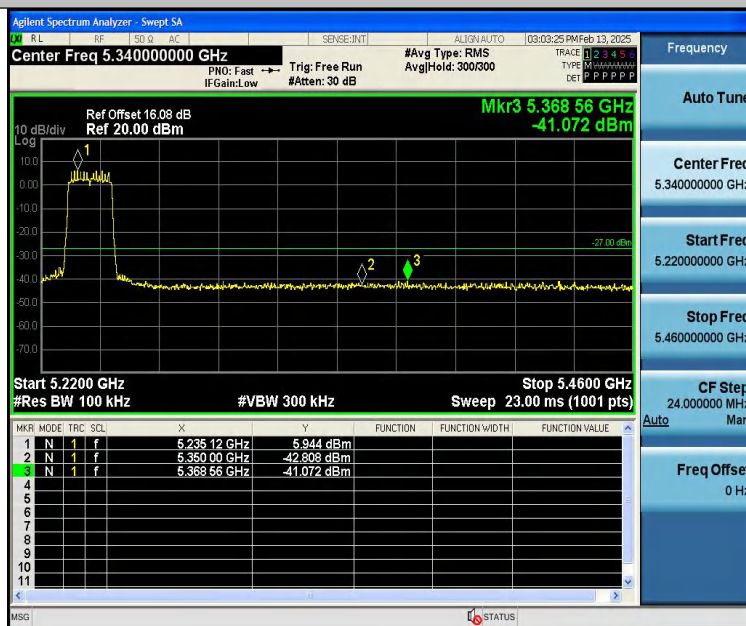

11AC40SISO-Ant1-5190-PASS

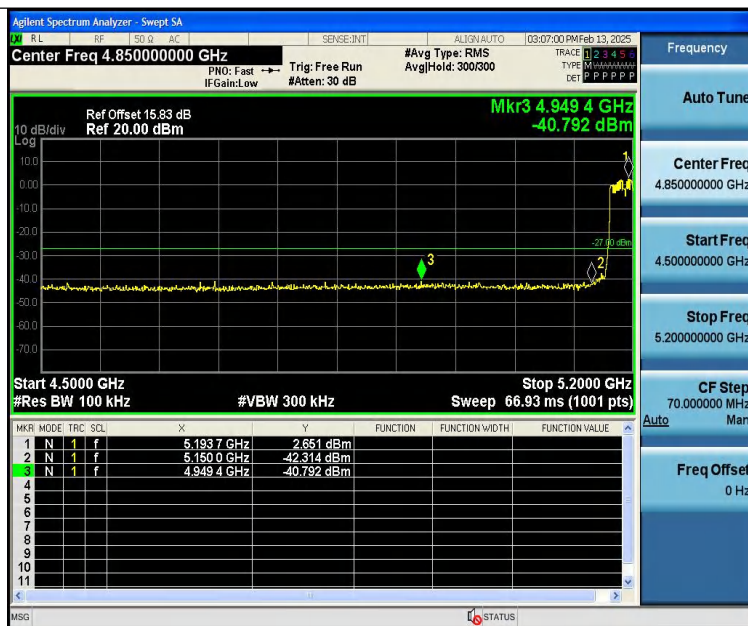

11AC40SISO-Ant1-5230-PASS

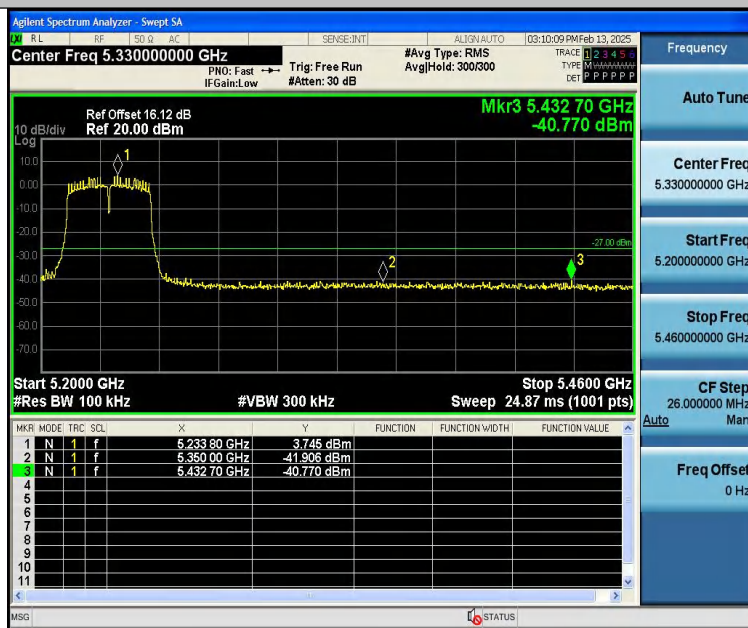

11AC80SISO-Ant1-5210-PASS



11AC80SISO-Ant1-5210-PASS





Ant2:

11A-Ant2-5180-PASS




11A-Ant2-5240-PASS



11N20SISO-Ant2-5180-PASS




11N20SISO-Ant2-5240-PASS

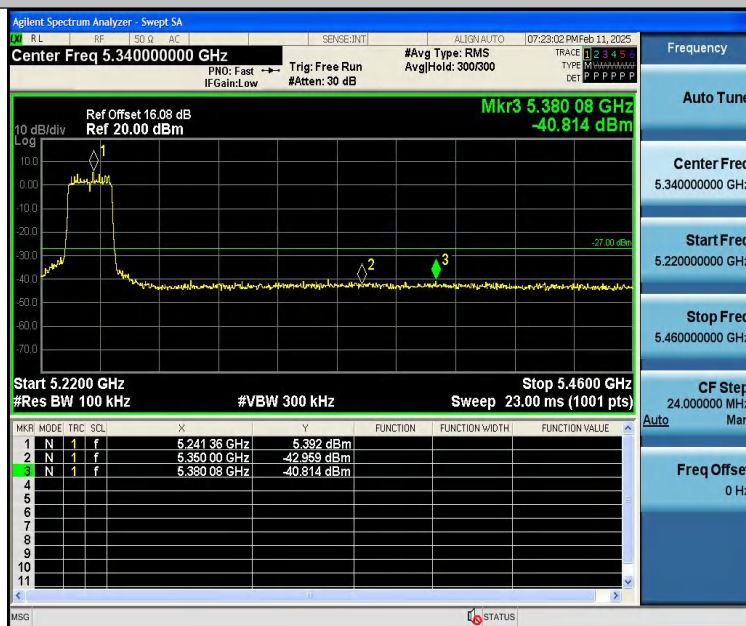


11N40SISO-Ant2-5190-PASS




11N40SISO-Ant2-5230-PASS

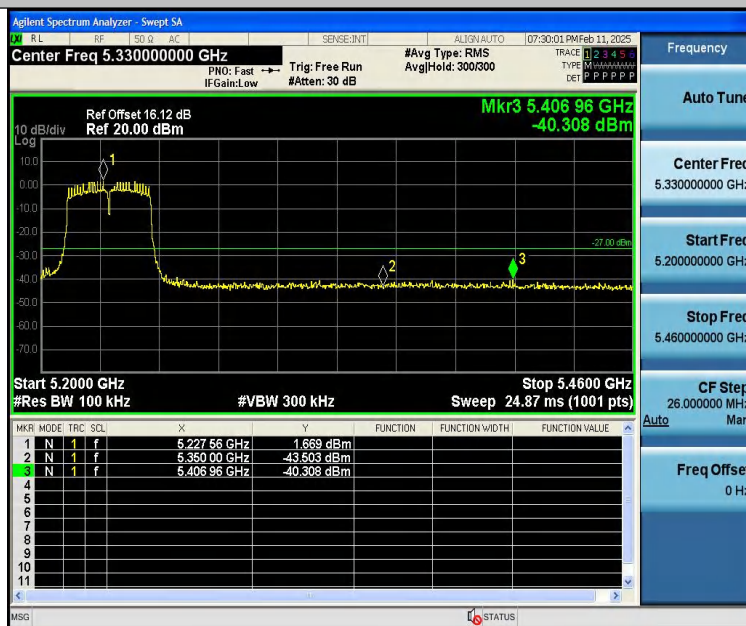


11AC20SISO-Ant2-5180-PASS

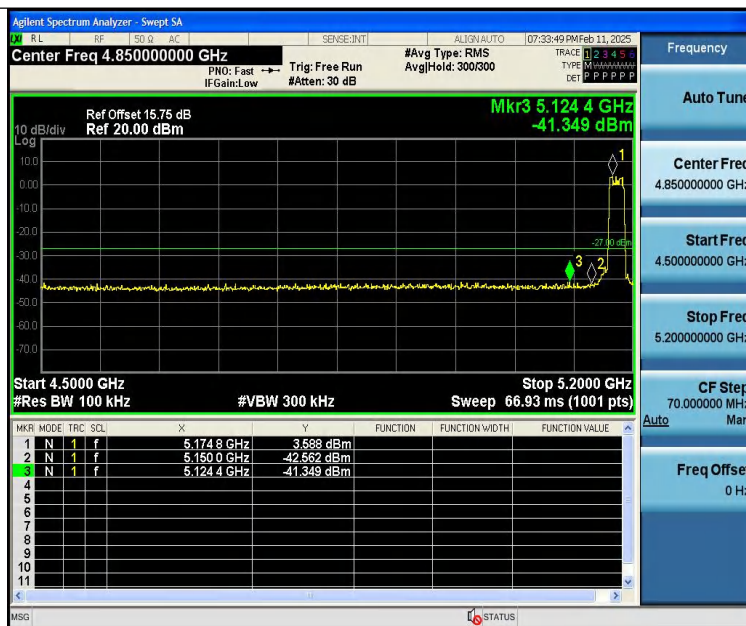

11AC20SISO-Ant2-5240-PASS

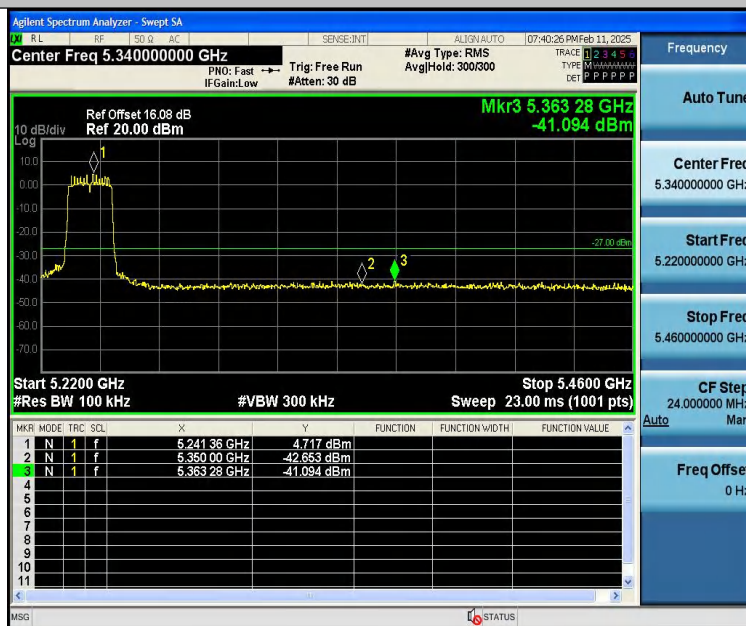

11AC40SISO-Ant2-5190-PASS

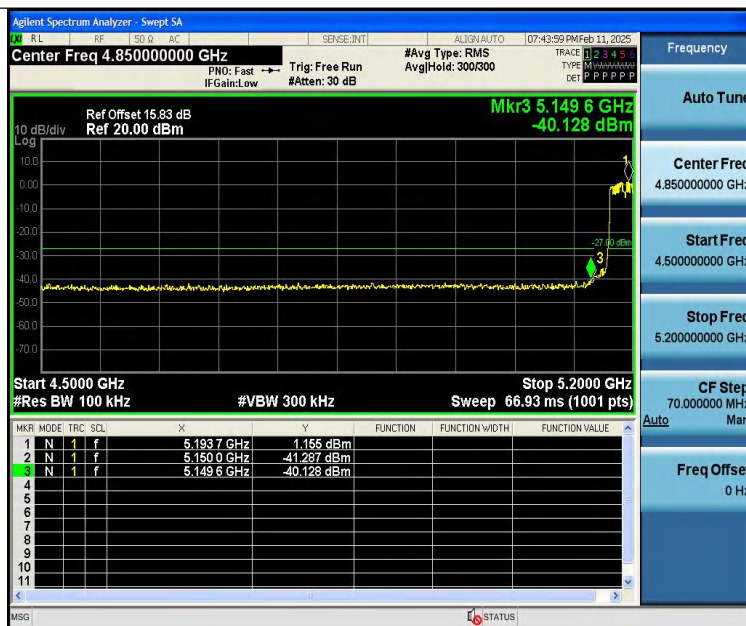


11AC40SISO-Ant2-5230-PASS



11AC80SISO-Ant2-5210-PASS




11AC80SISO-Ant2-5210-PASS

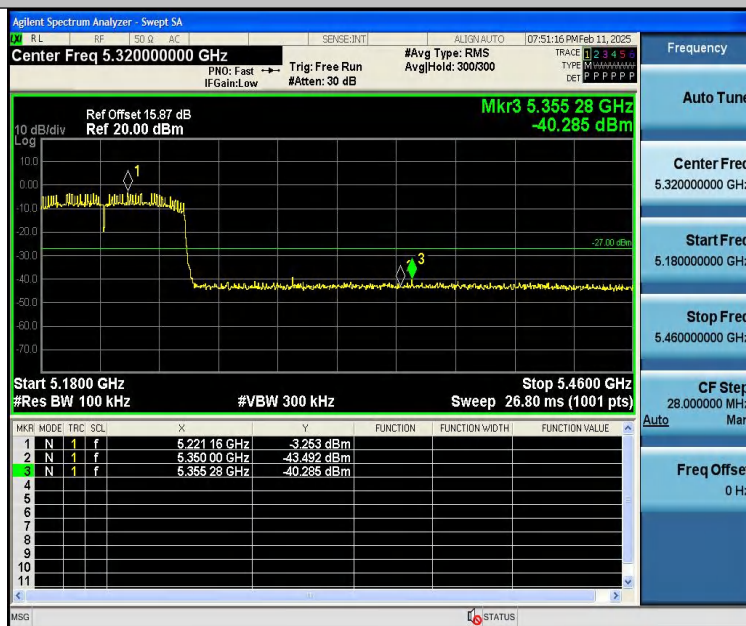




Ant3:


11A-Ant3-5180-PASS

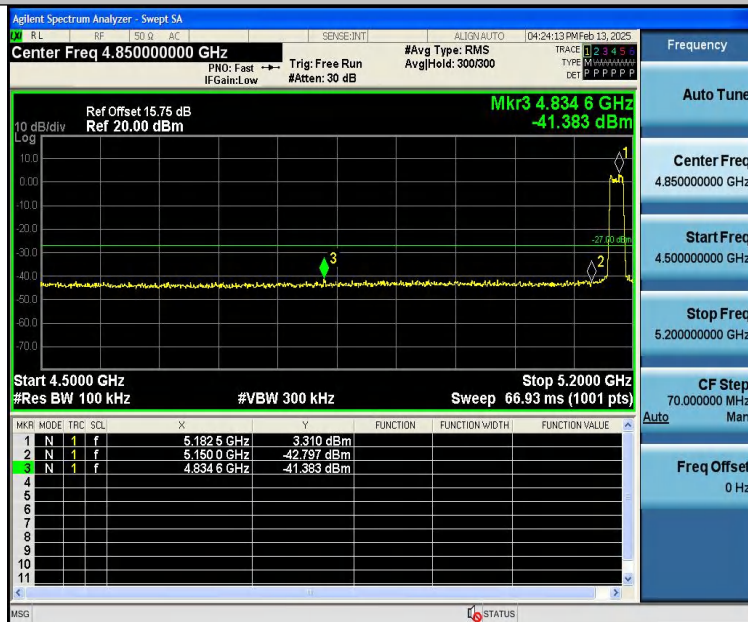


11A-Ant3-5240-PASS

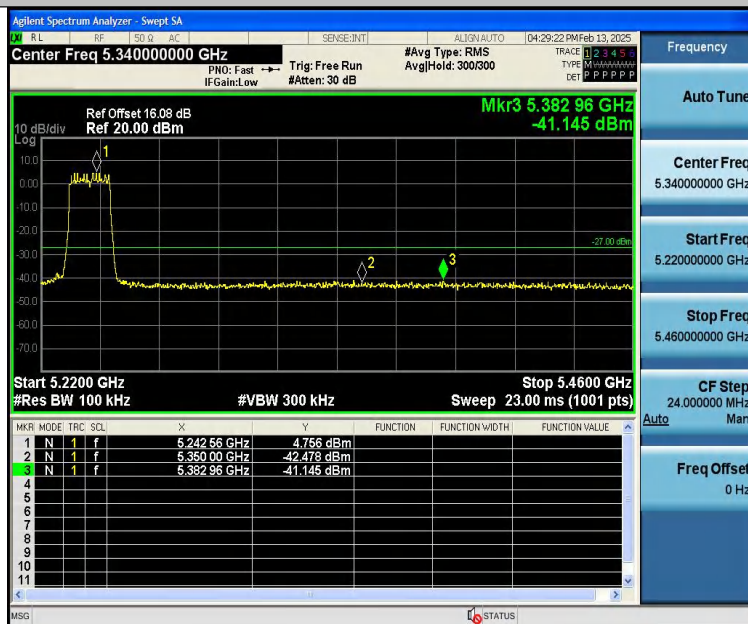

11N20SISO-Ant3-5180-PASS

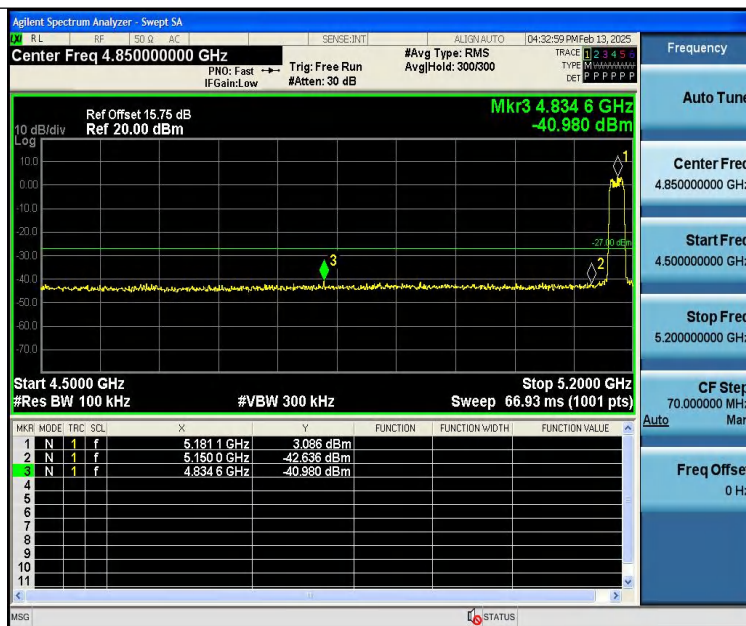


11N20SISO-Ant3-5240-PASS

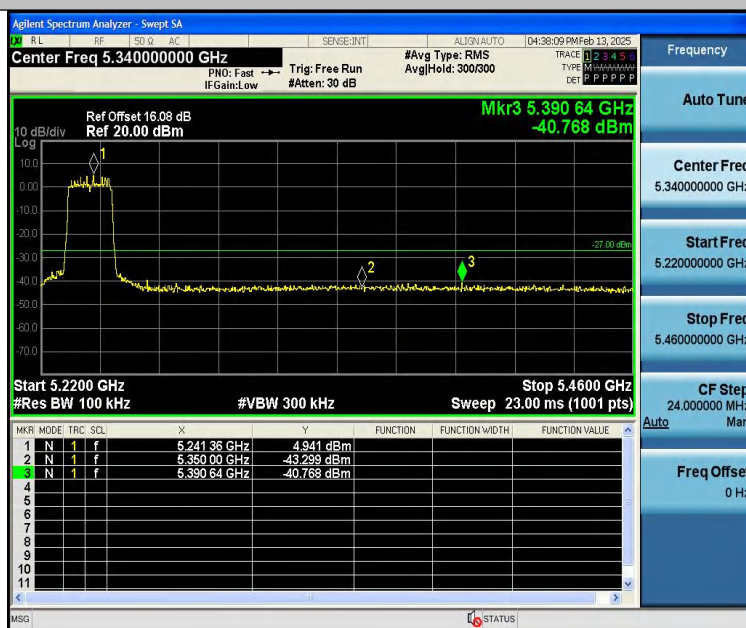

11N40SISO-Ant3-5190-PASS




11N40SISO-Ant3-5230-PASS

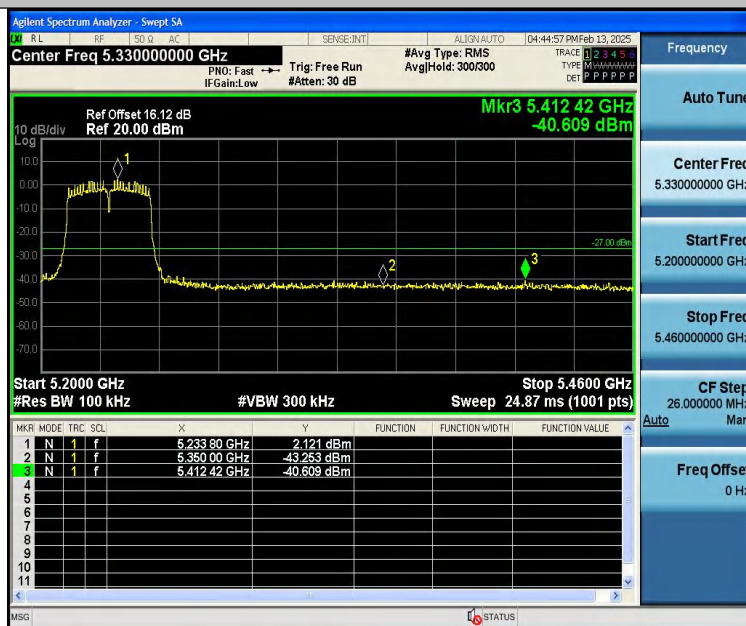


11AC20SISO-Ant3-5180-PASS




11AC20SISO-Ant3-5240-PASS

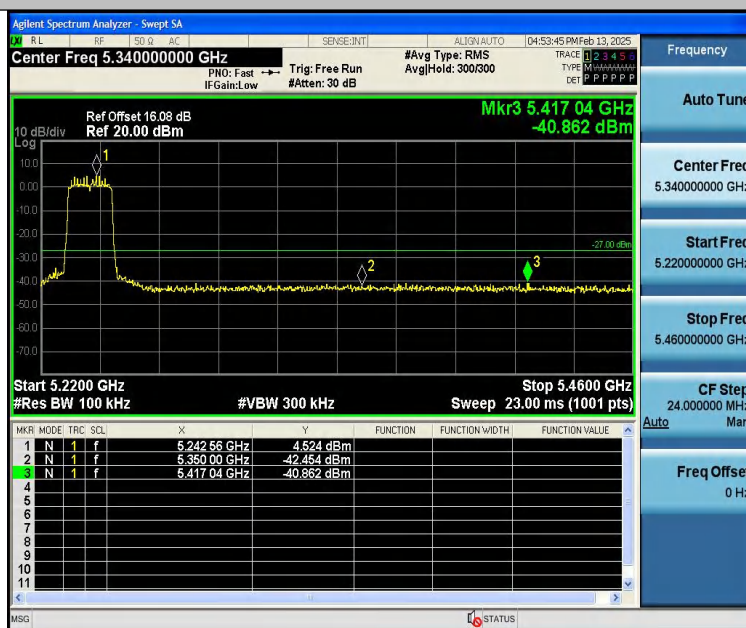

11AC40SISO-Ant3-5190-PASS

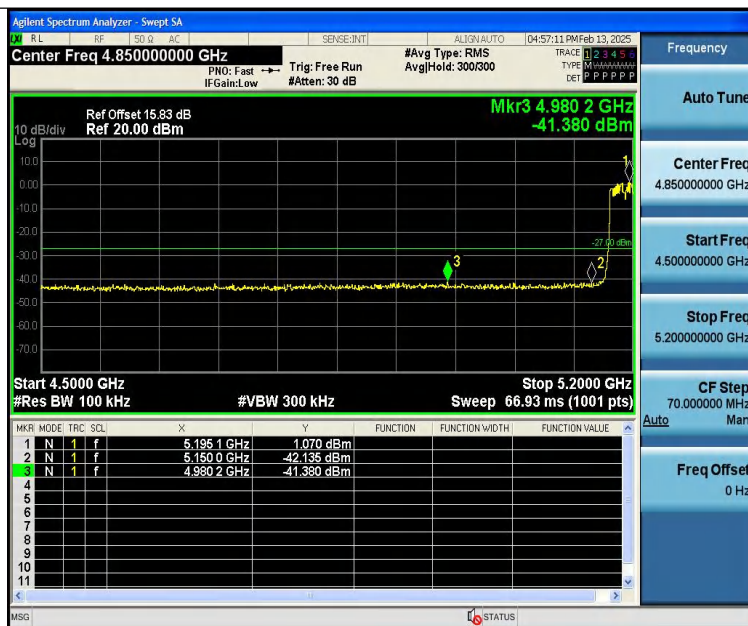

11AC40SISO-Ant3-5230-PASS

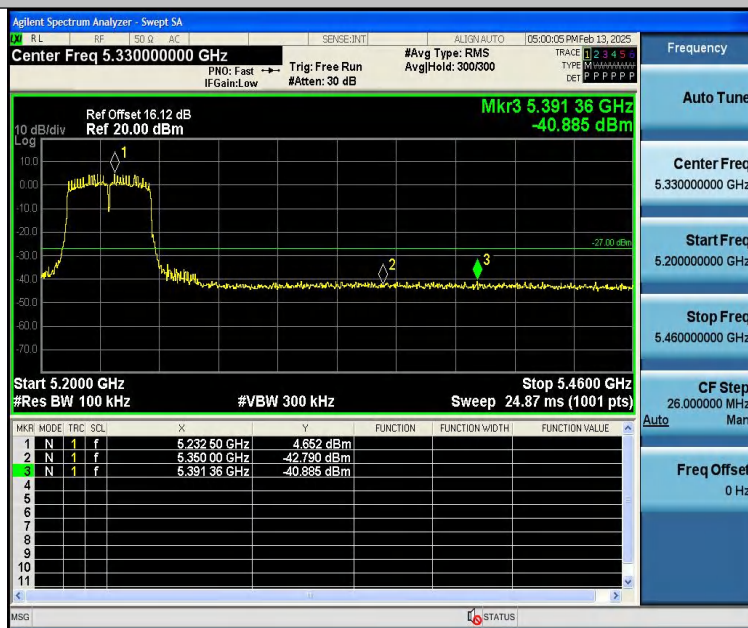

11AC80SISO-Ant3-5210-PASS



11AC80SISO-Ant3-5210-PASS

