



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250100003401

Rev.: 01

Appendix B

Detailed Test Results

1. GSM
GSM850
GSM1900
2. WCDMA
WCDMA Band 2
WCDMA Band 4
WCDMA Band 5
3. LTE
LTE Band 7
LTE Band 12(17)
LTE Band 13
LTE Band 14
LTE Band 25(2)
LTE Band 26(5)
LTE Band 41(38)
LTE Band 42
LTE Band 48
LTE Band 66
LTE Band 71
4. NR
NR Band n7
NR Band n12
NR Band n13
NR Band n14
NR Band n25(2)
NR Band n26(5)
NR Band n41(38)
NR Band n48
NR Band n66
NR Band n71
NR Band n77(78) Part 27Q
NR Band n77(78) Part 27O
5. WIFI

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, RunSheng Road, Suzhou Industrial Park,
Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

t (86-512) 6229 2980
www.sgsgroup.com.cn



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250100003401

Rev.: 01

WIFI 2.4G
WIFI 5G
WIFI 6G
6. BT
BT
7. NFC
NFC

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, RunSheng Road, Suzhou Industrial Park,
Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

t (86-512) 6229 2980
www.sgsgroup.com.cn


GSM850 GPRS 2TS 190CH Right cheek

Communication System: GSM 850; Frequency: 836.600
Medium: HSL. Medium parameters used: $f=836.600$ MHz; $\sigma=0.887$ S/m; $\epsilon_r=40.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.403 W/kg; SAR (10g) = 0.277 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.421 W/kg; SAR (10g) = 0.316 W/kg;
M2/M1 [%] 89.4
Dist 3dB Peak [mm] 18.2

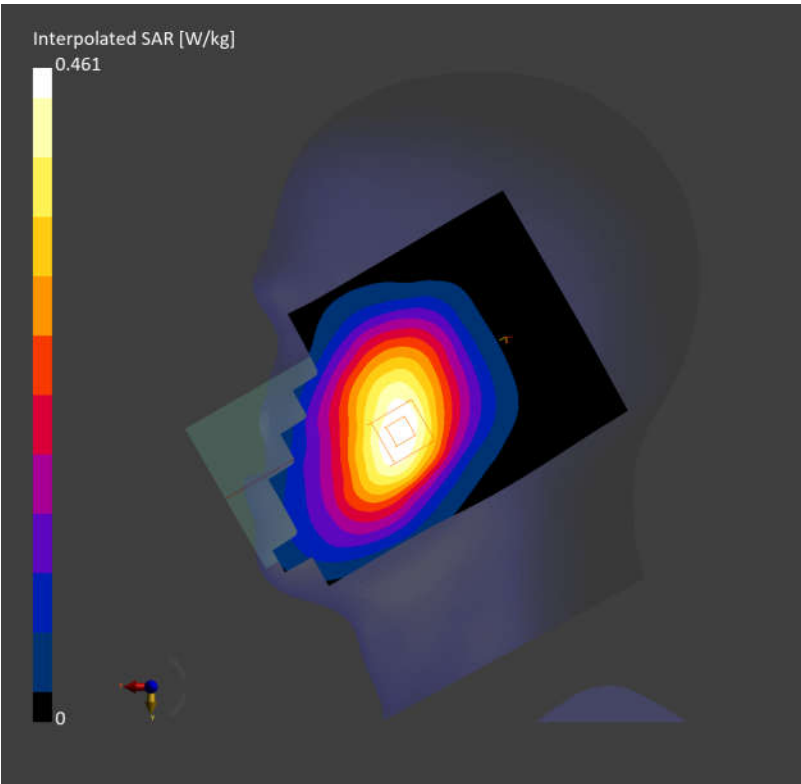

GSM850 GPRS 2TS 190CH Back side 10mm

Communication System: GSM 850; Frequency: 836.600

Medium: HSL. Medium parameters used: $f = 836.600$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 40.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.427 W/kg; SAR (10g) = 0.326 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.16 dB


SAR (1g) = 0.501 W/kg; SAR (10g) = 0.401 W/kg;

M2/M1 [%]

84.0

Dist 3dB Peak [mm]

15.6

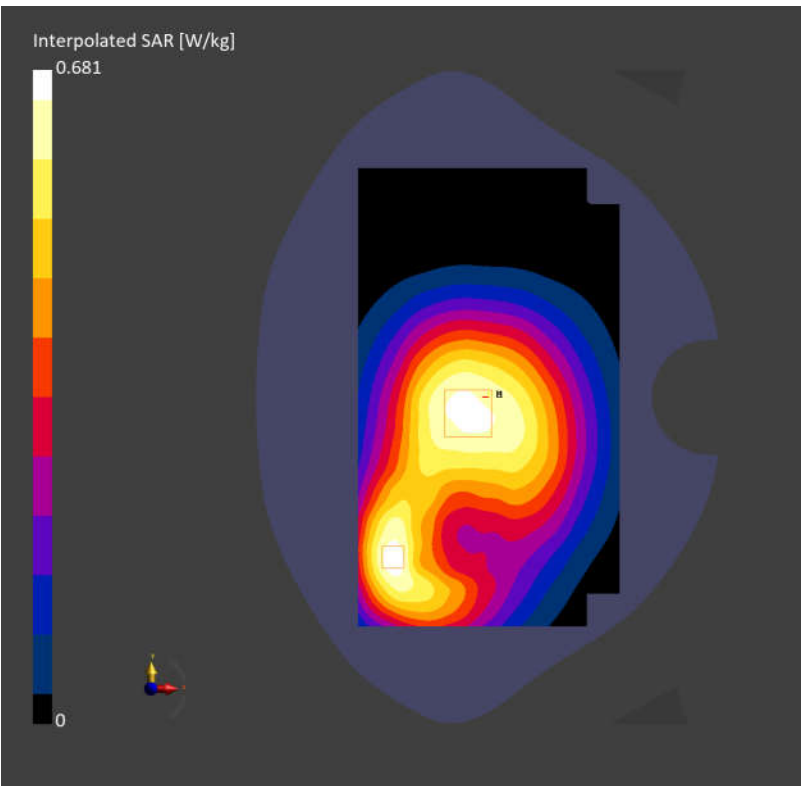


GSM850 GPRS 2TS 190CH Right side 10mm

Communication System: GSM 850; Frequency: 836.600
Medium: HSL. Medium parameters used: $f=836.600\text{ MHz}$; $\sigma=0.887\text{ S/m}$; $\epsilon_r=40.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.506 W/kg; SAR (10g) = 0.329 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.11 dB
SAR (1g) = 0.521 W/kg; SAR (10g) = 0.308 W/kg;
M2/M1 [%] 79.9
Dist 3dB Peak [mm] 10.8

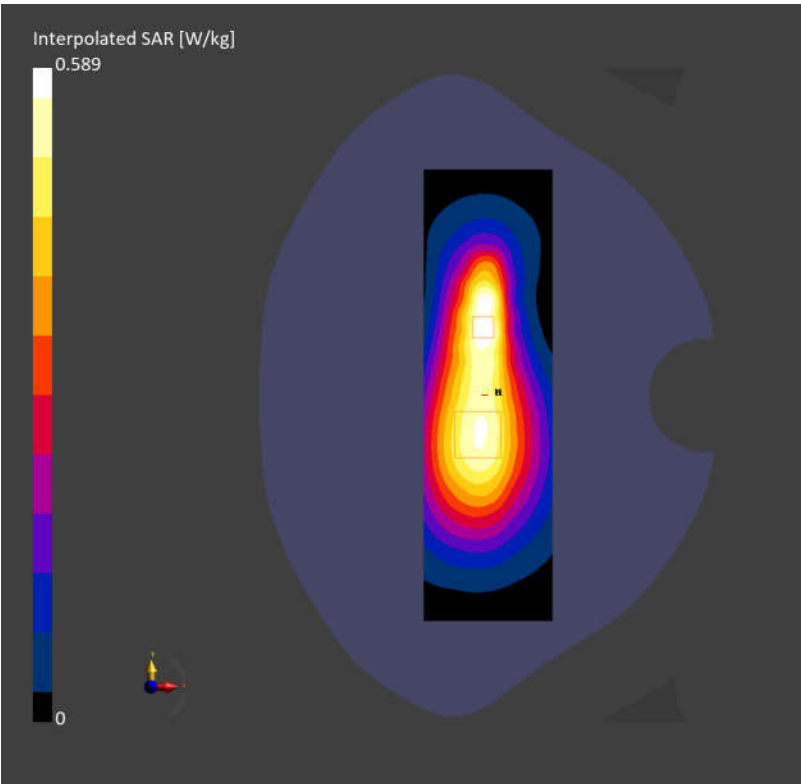


GSM850 GPRS 2TS 190CH Bottom side 0mm

Communication System: GSM 850; Frequency: 836.600
Medium: HSL. Medium parameters used: $f=836.600$ MHz; $\sigma=0.887$ S/m; $\epsilon_r=40.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (40.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 2.11 W/kg; SAR (10g) = 1.21 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.15 dB
SAR (1g) = 2.41 W/kg; SAR (10g) = 1.03 W/kg;
M2/M1 [%] 61.9
Dist 3dB Peak [mm] 6.9

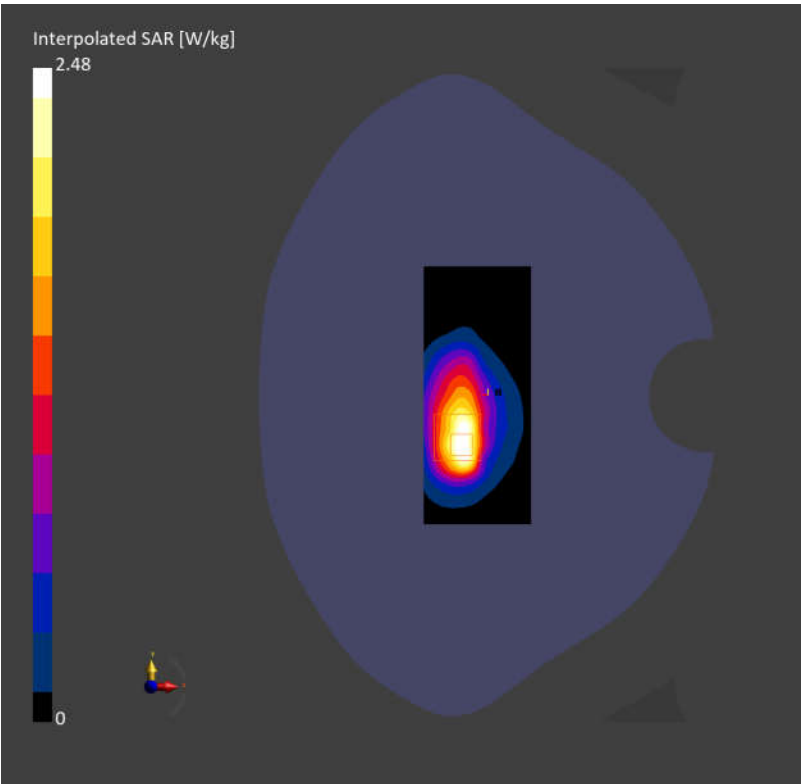

GSM1900 GPRS 2TS 661CH Right cheek

Communication System: PCS 1900; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.620 W/kg; SAR (10g) = 0.328 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.15 dB


SAR (1g) = 0.594 W/kg; SAR (10g) = 0.307 W/kg;

M2/M1 [%]

81.7

Dist 3dB Peak [mm]

8.7

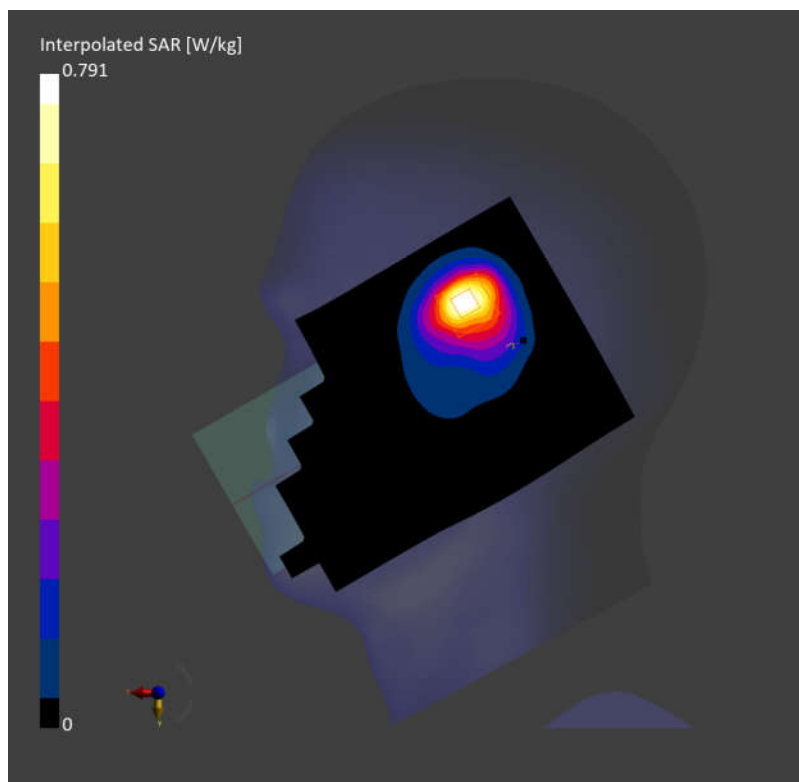

GSM1900 GPRS 2TS 661CH Back side 10mm

Communication System: PCS 1900; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.167 W/kg; SAR (10g) = 0.132 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.10 dB


SAR (1g) = 0.185 W/kg; SAR (10g) = 0.141 W/kg;

M2/M1 [%]

85.0

Dist 3dB Peak [mm]

17.9

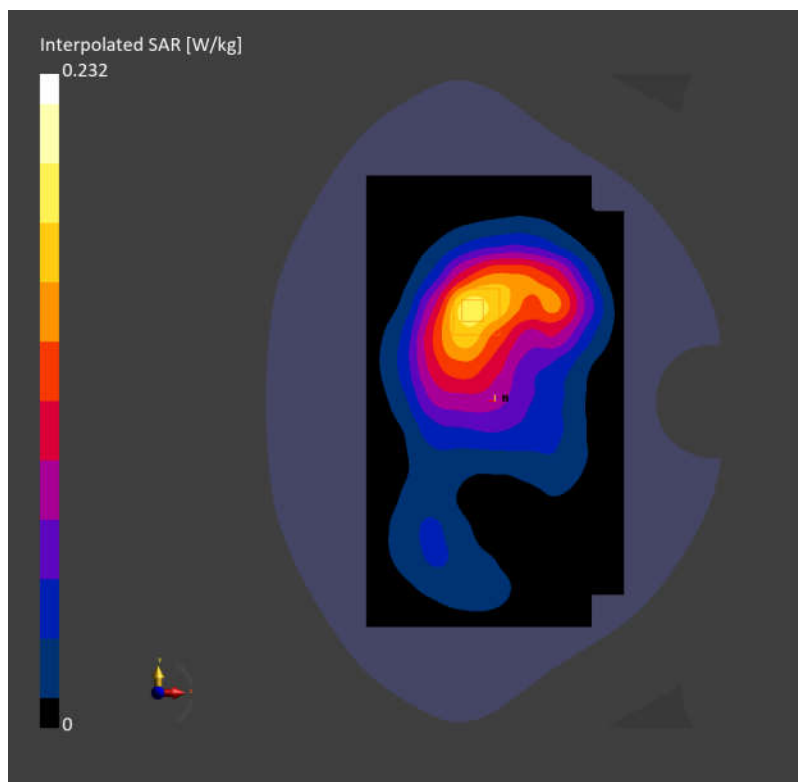


GSM1900 GPRS 2TS 661CH Top side 10mm

Communication System: PCS 1900; Frequency: 1880.000
Medium: HSL. Medium parameters used: $f=1880.000$ MHz; $\sigma=1.37$ S/m; $\epsilon_r=40.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (40.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 0.216 W/kg; SAR (10g) = 0.119 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.231 W/kg; SAR (10g) = 0.127 W/kg;
M2/M1 [%] 83.1
Dist 3dB Peak [mm] 12.0

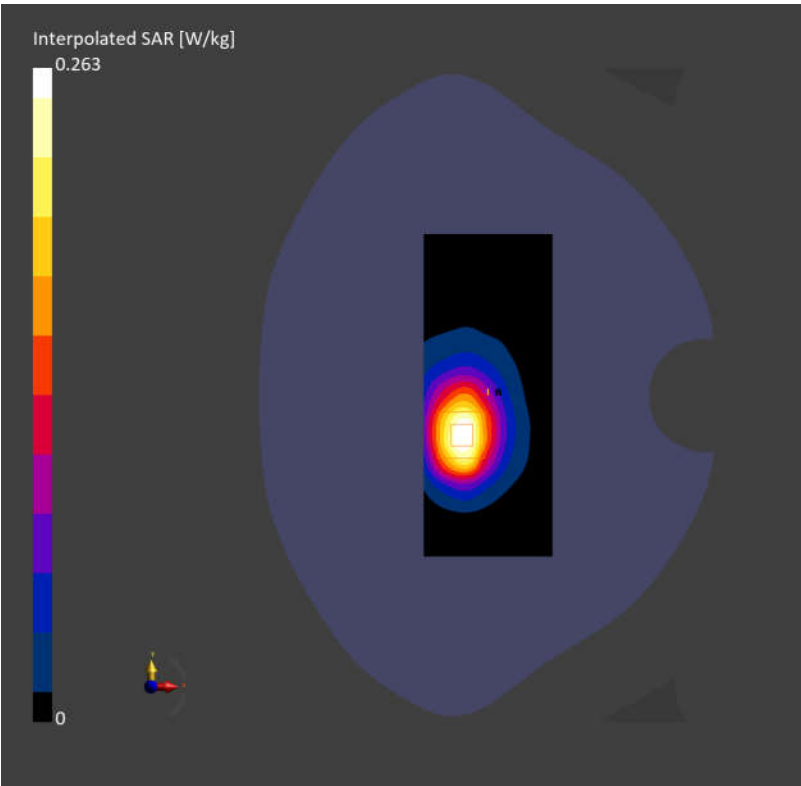


WCDMA B2 RMC 9400CH Right cheek

Communication System: Band 2; Frequency: 1880.000
Medium: HSL. Medium parameters used: $f=1880.000$ MHz; $\sigma=1.37$ S/m; $\epsilon_r=40.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.474 W/kg; SAR (10g) = 0.253 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.536 W/kg; SAR (10g) = 0.307 W/kg;
M2/M1 [%] 80.3
Dist 3dB Peak [mm] 9.6

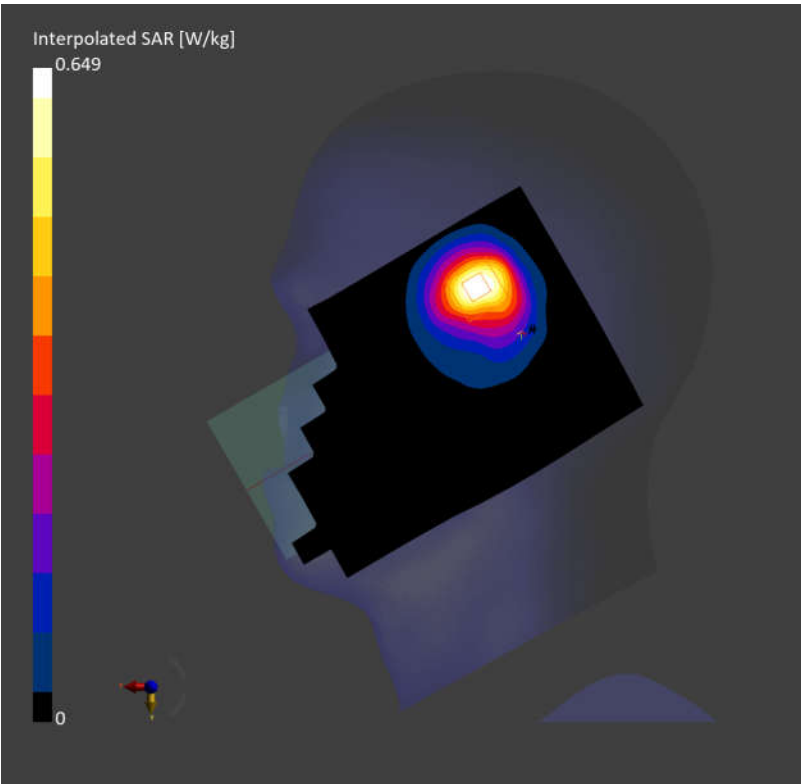

WCDMA B2 RMC 9400CH Back side 10mm

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.356 W/kg; SAR (10g) = 0.253 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB


SAR (1g) = 0.422 W/kg; SAR (10g) = 0.319 W/kg;

M2/M1 [%]

84.1

Dist 3dB Peak [mm]

17.9

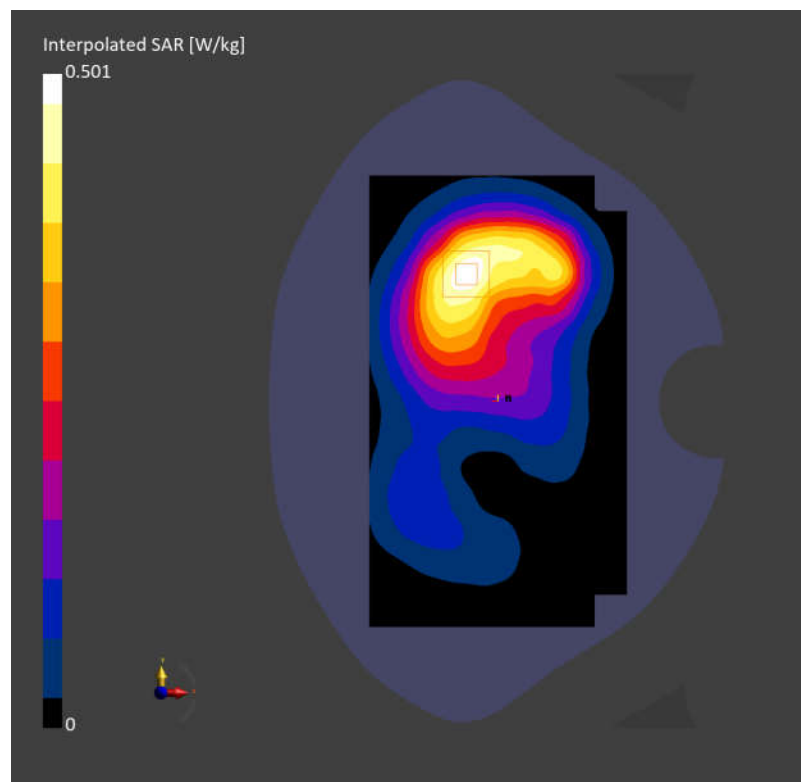


WCDMA B2 RMC 9400CH Top side 10mm

Communication System: Band 2; Frequency: 1880.000
Medium: HSL. Medium parameters used: $f=1880.000$ MHz; $\sigma=1.37$ S/m; $\epsilon_r=40.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.591 W/kg; SAR (10g) = 0.319 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.06 dB
SAR (1g) = 0.603 W/kg; SAR (10g) = 0.334 W/kg;
M2/M1 [%] 81.6
Dist 3dB Peak [mm] 12.6

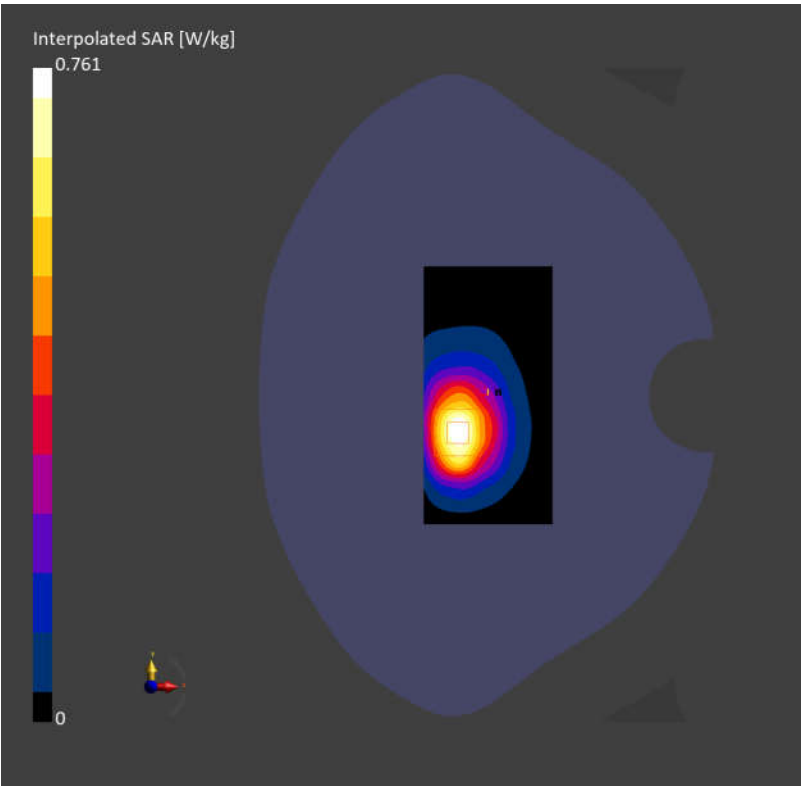

WCDMA B4 RMC 1412CH Right cheek

Communication System: Band 4; Frequency: 1732.400

Medium: HSL. Medium parameters used: $f = 1732.400$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.96, 7.96, 7.96); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.995 W/kg; SAR (10g) = 0.554 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB


SAR (1g) = 0.987 W/kg; SAR (10g) = 0.566 W/kg;

M2/M1 [%]

85.3

Dist 3dB Peak [mm]

9.6

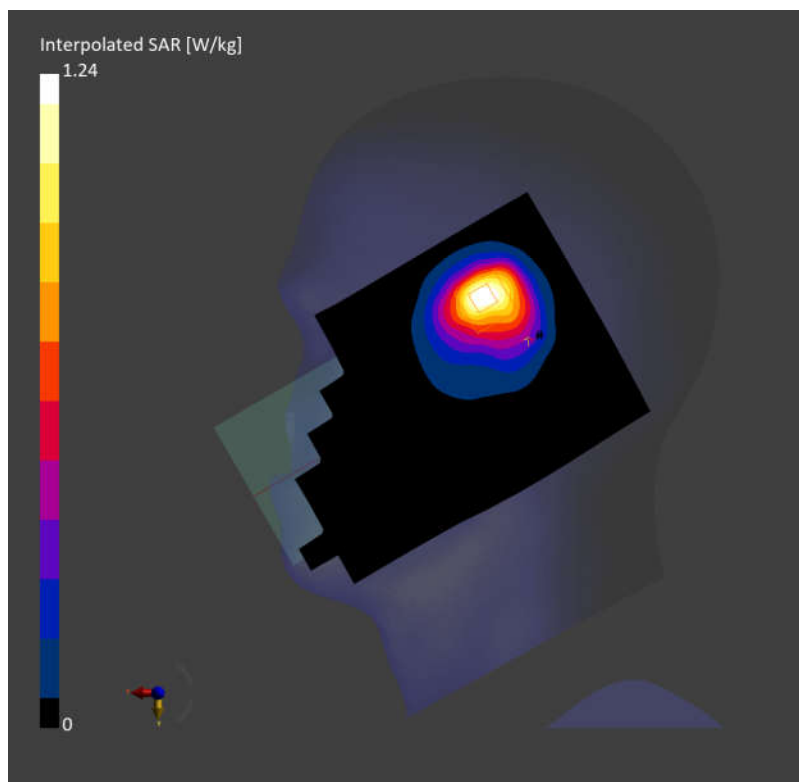

WCDMA B4 RMC 1412CH Back side 10mm

Communication System: Band 4; Frequency: 1732.400

Medium: HSL. Medium parameters used: $f = 1732.400$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.96, 7.96, 7.96); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.401 W/kg; SAR (10g) = 0.323 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.09 dB


SAR (1g) = 0.445 W/kg; SAR (10g) = 0.354 W/kg;

M2/M1 [%]

85.2

Dist 3dB Peak [mm]

18.0

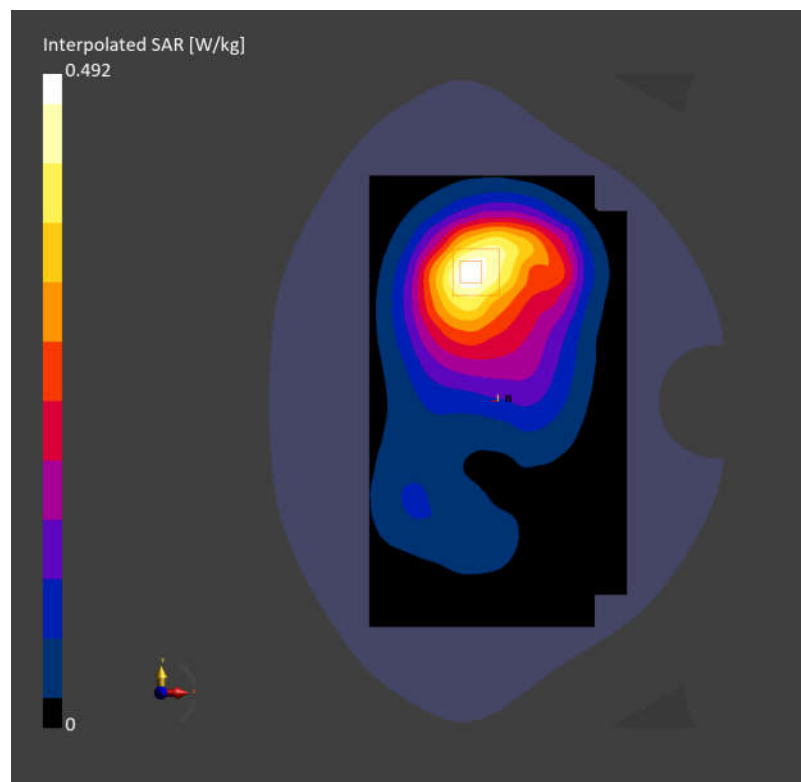


WCDMA B4 RMC 1412CH Top side 10mm

Communication System: Band 4; Frequency: 1732.400
Medium: HSL. Medium parameters used: $f=1732.400$ MHz; $\sigma=1.34$ S/m; $\epsilon_r=40.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.96, 7.96, 7.96); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.407 W/kg; SAR (10g) = 0.231 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.425 W/kg; SAR (10g) = 0.239 W/kg;
M2/M1 [%] 81.4
Dist 3dB Peak [mm] 12.3

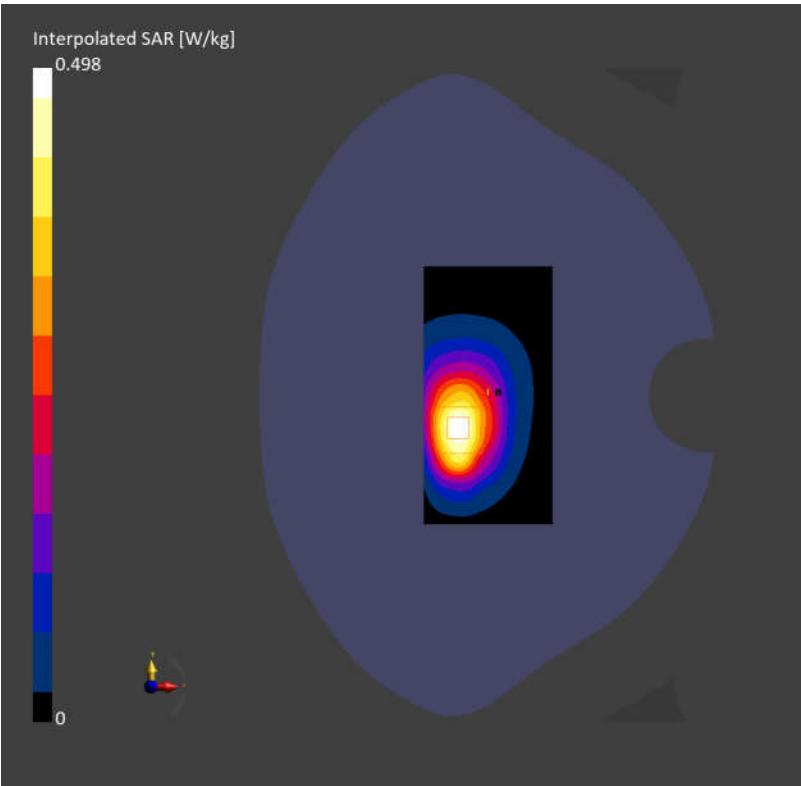


WCDMA B5 RMC 4182CH Right cheek

Communication System: Band 5; Frequency: 836.400
Medium: HSL. Medium parameters used: $f=836.400$ MHz; $\sigma=0.886$ S/m; $\epsilon_r=40.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.018 W/kg; SAR (10g) = 0.012 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.017 W/kg; SAR (10g) = 0.014 W/kg;
M2/M1 [%] 96.5
Dist 3dB Peak [mm] 13.0

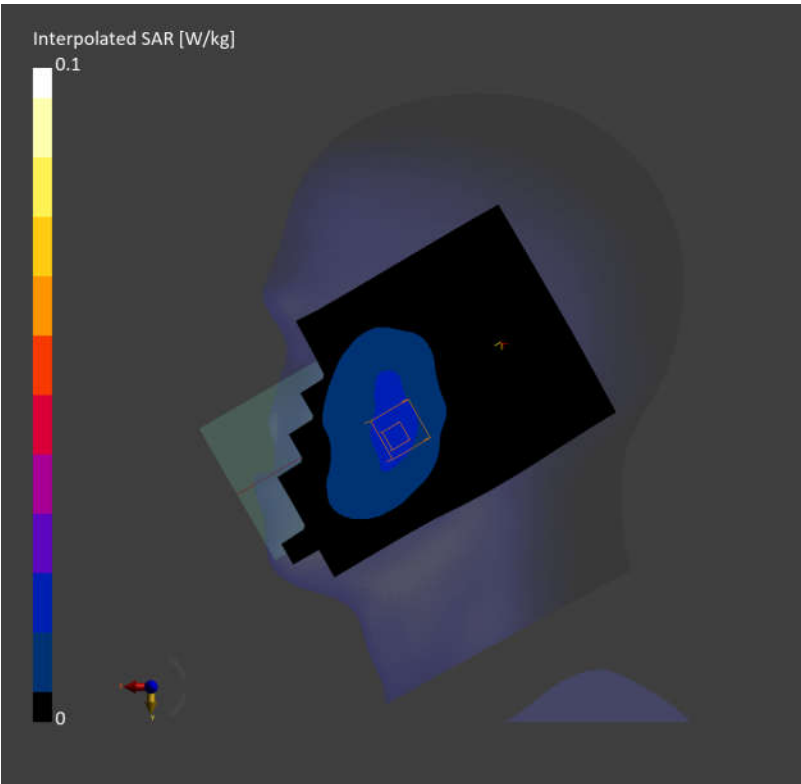


WCDMA B5 RMC 4182CH Back side 10mm

Communication System: Band 5; Frequency: 836.400
Medium: HSL. Medium parameters used: $f=836.400$ MHz; $\sigma=0.886$ S/m; $\epsilon_r=40.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.159 W/kg; SAR (10g) = 0.101 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.163 W/kg; SAR (10g) = 0.107 W/kg;
M2/M1 [%] 85.7
Dist 3dB Peak [mm] 16.1

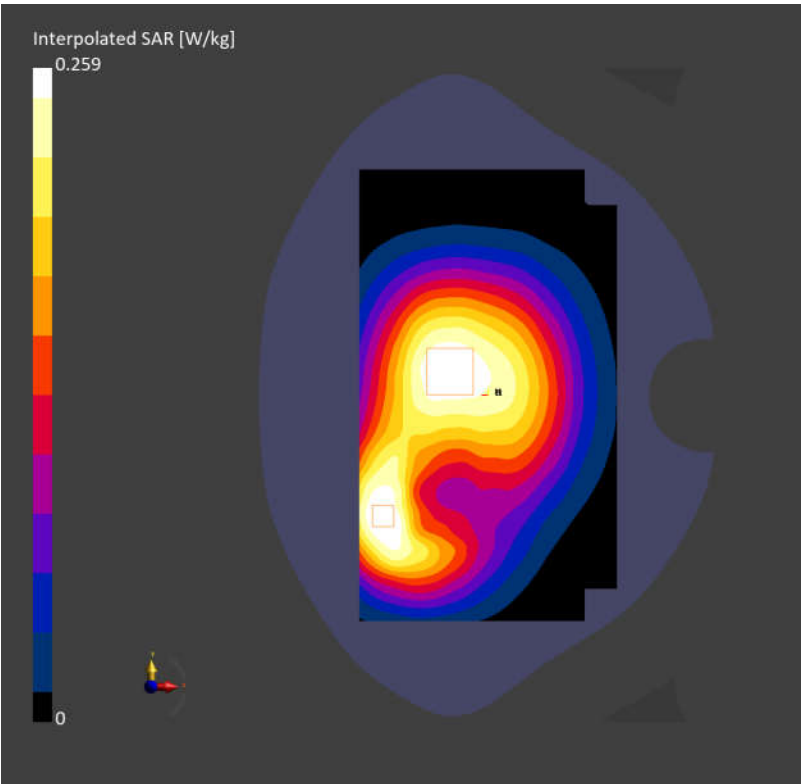

WCDMA B5 RMC 4182CH Right side 10mm

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 40.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.031 W/kg; SAR (10g) = 0.021 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB


SAR (1g) = 0.032 W/kg; SAR (10g) = 0.022 W/kg;

M2/M1 [%]

85.9

Dist 3dB Peak [mm]

> 15.0

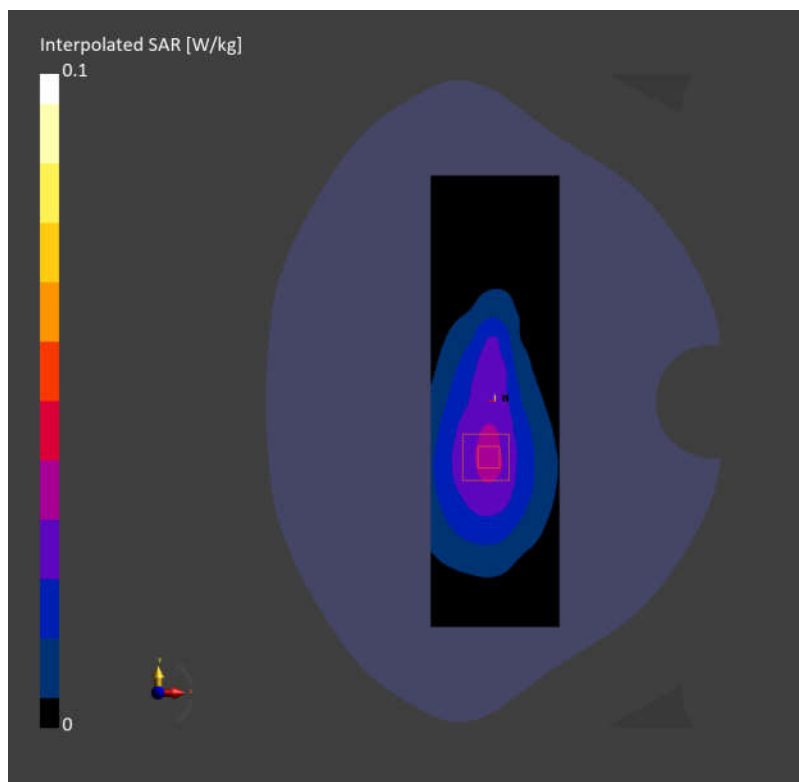


WCDMA B5 RMC 4182CH Bottom side 0mm

Communication System: Band 5; Frequency: 836.400
Medium: HSL. Medium parameters used: $f=836.400$ MHz; $\sigma=0.886$ S/m; $\epsilon_r=40.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.379 W/kg; SAR (10g) = 0.211 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.12 dB
SAR (1g) = 0.705 W/kg; SAR (10g) = 0.245 W/kg;
M2/M1 [%] 55.8
Dist 3dB Peak [mm] 6.6

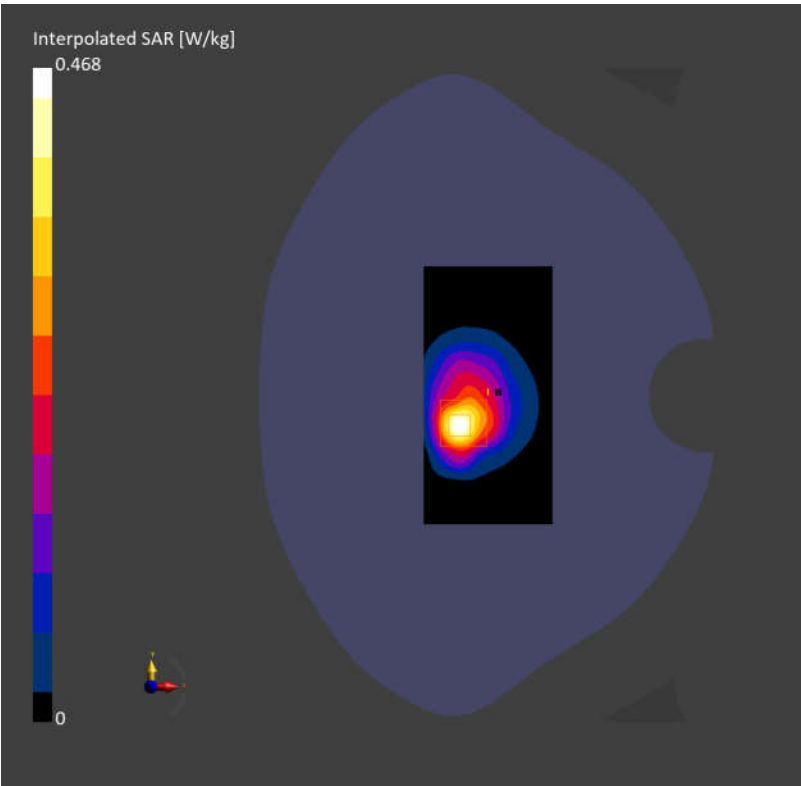

LTE Band 7 QPSK 20M 1RB0 21100CH Left tilted

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 38.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.512 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB


SAR (1g) = 1.16 W/kg; SAR (10g) = 0.602 W/kg;

M2/M1 [%]

84.4

Dist 3dB Peak [mm]

7.1

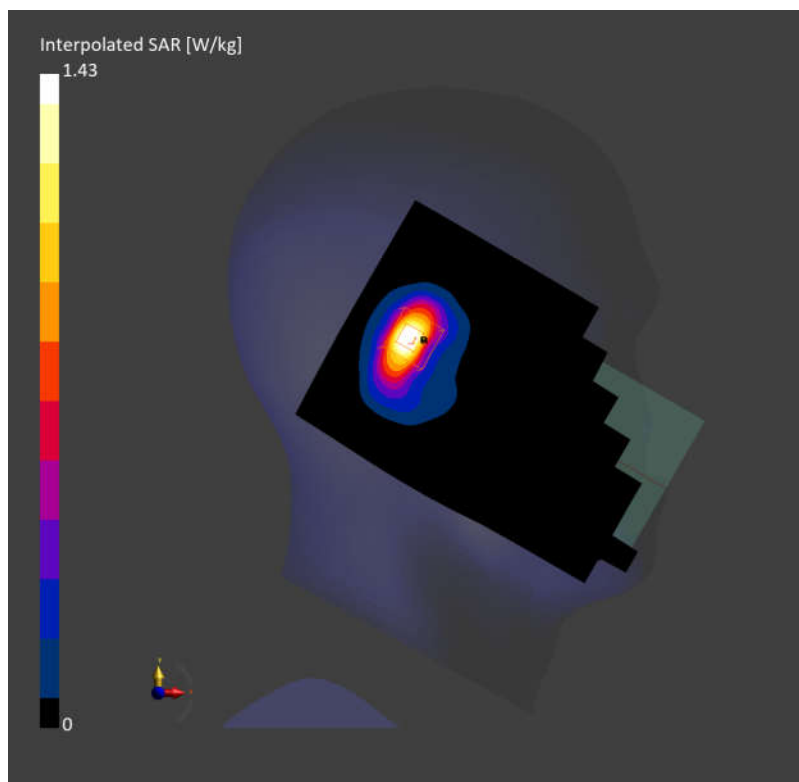

LTE Band 7 QPSK 20M 1RB0 21100CH Back side 15mm

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 38.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.690 W/kg; SAR (10g) = 0.322 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB


SAR (1g) = 0.719 W/kg; SAR (10g) = 0.362 W/kg;

M2/M1 [%]

81.2

Dist 3dB Peak [mm]

13.7

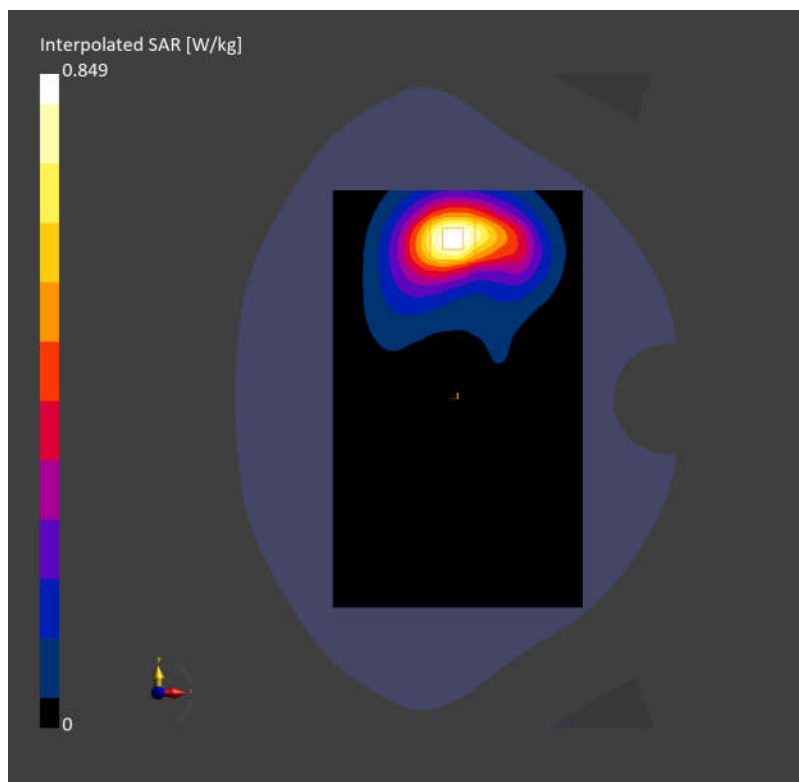

LTE Band 7 QPSK 20M 1RB0 21100CH Top side 10mm

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 38.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.967 W/kg; SAR (10g) = 0.454 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB


SAR (1g) = 1.05 W/kg; SAR (10g) = 0.529 W/kg;

M2/M1 [%]

79.2

Dist 3dB Peak [mm]

9.3

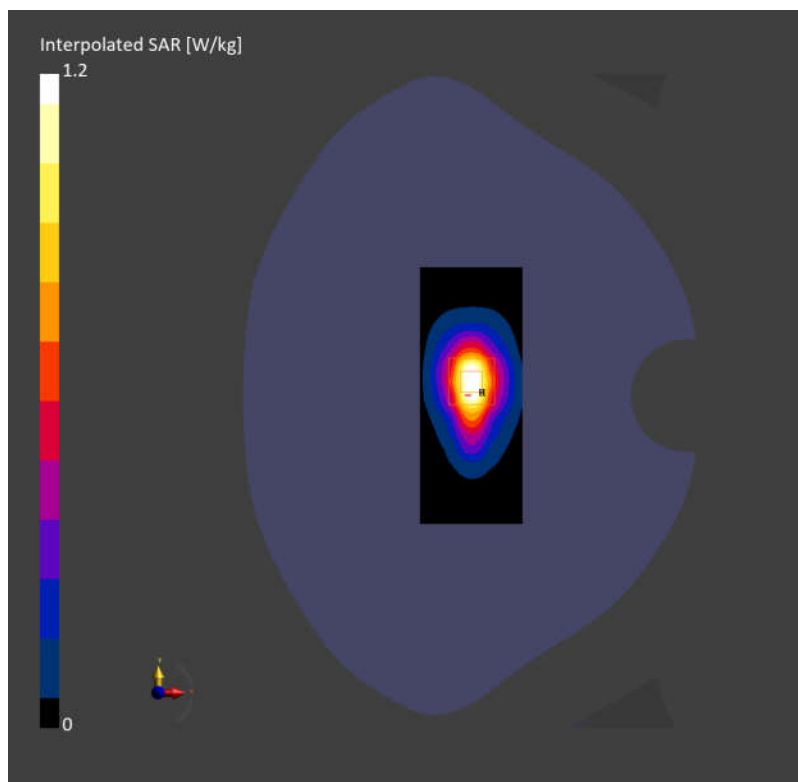


LTE Band 7 QPSK 20M 1RB0 21100CH Top side 0mm

Communication System: Band 7; Frequency: 2535.000
Medium: HSL. Medium parameters used: $f=2535.000$ MHz; $\sigma=1.90$ S/m; $\epsilon_r=38.8$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 5.08 W/kg; SAR (10g) = 1.90 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 5.32 W/kg; SAR (10g) = 2.29 W/kg;
M2/M1 [%] 67.2
Dist 3dB Peak [mm] 6.3

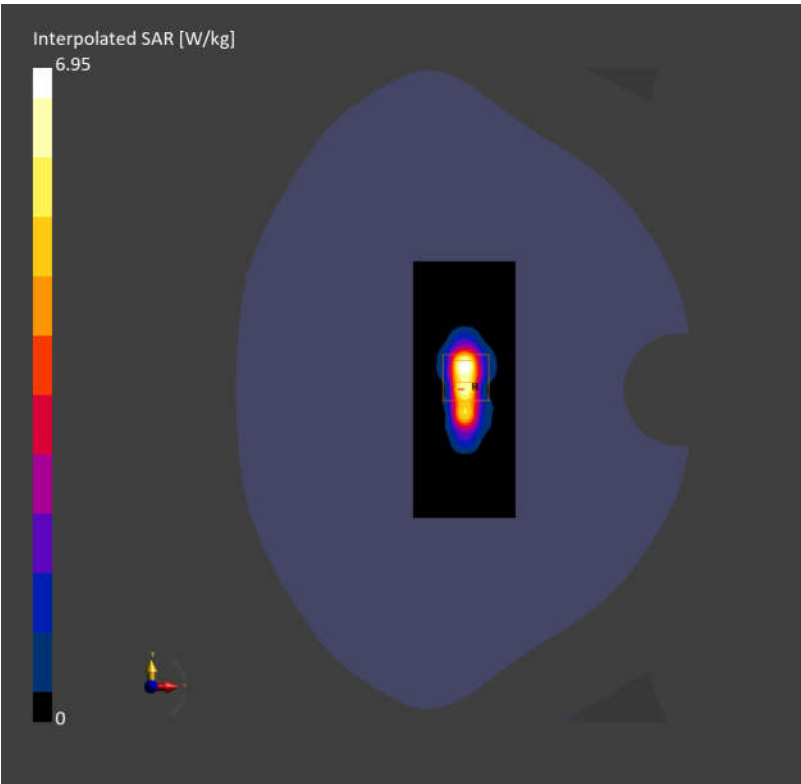


LTE Band 12 QPSK 10M 1RB0 23095CH Right cheek

Communication System: Band 12; Frequency: 707.500
Medium: HSL. Medium parameters used: $f=707.500$ MHz; $\sigma=0.855$ S/m; $\epsilon_r=41.7$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.081 W/kg; SAR (10g) = 0.057 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.084 W/kg; SAR (10g) = 0.068 W/kg;
M2/M1 [%] 92.1
Dist 3dB Peak [mm] 20.2

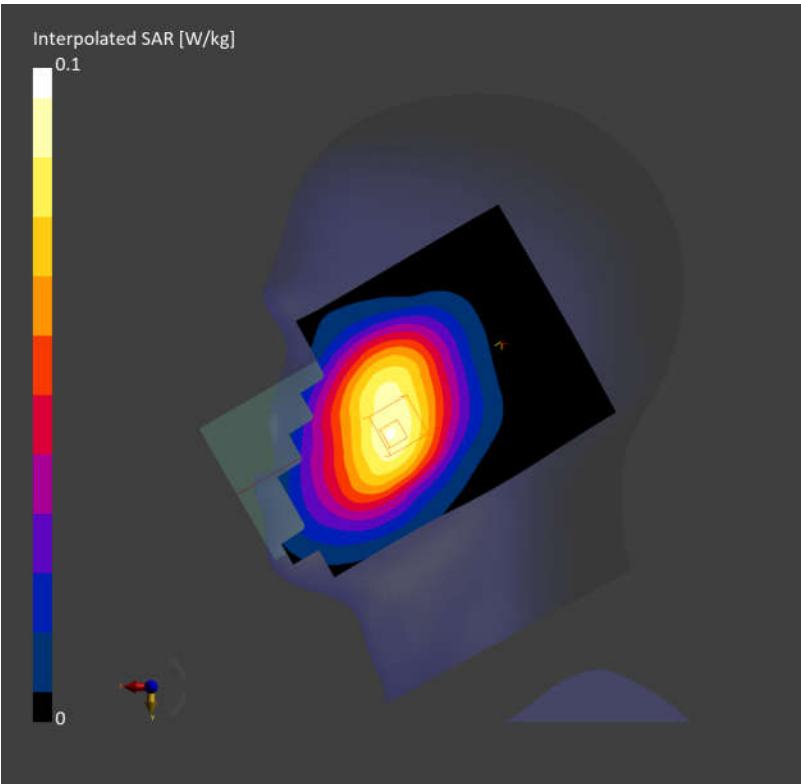

LTE Band 12 QPSK 10M 1RB0 23095CH Back side 10mm

Communication System: Band 12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.855$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.175 W/kg; SAR (10g) = 0.132 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.19 dB


SAR (1g) = 0.211 W/kg; SAR (10g) = 0.161 W/kg;

M2/M1 [%]

84.8

Dist 3dB Peak [mm]

> 15.0

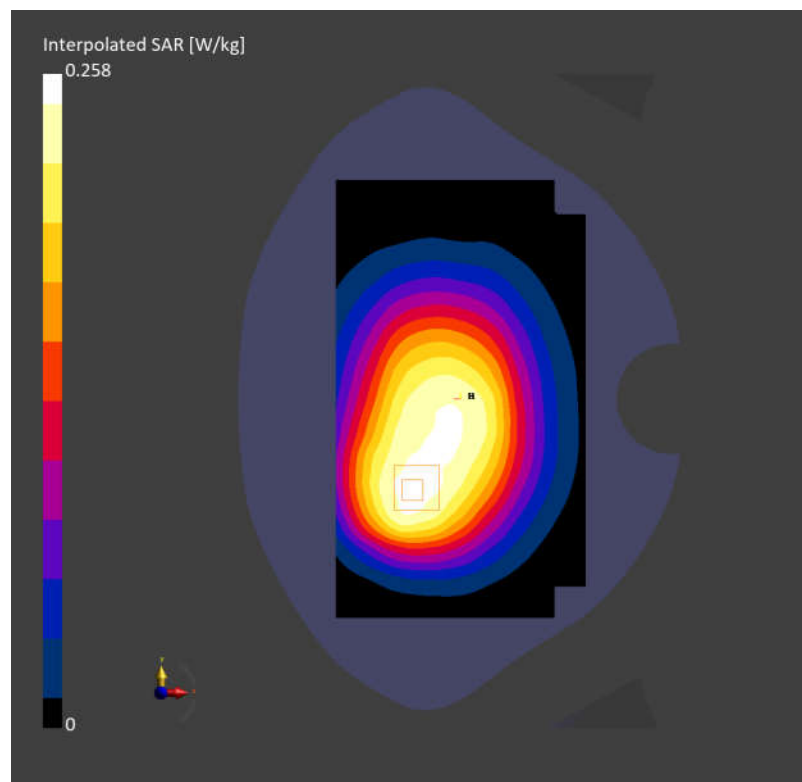


LTE Band 12 QPSK 10M 1RB0 23095CH Right side 10mm

Communication System: Band 12; Frequency: 707.500
Medium: HSL. Medium parameters used: $f=707.500$ MHz; $\sigma=0.855$ S/m; $\epsilon_r=41.7$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.268 W/kg; SAR (10g) = 0.180 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.16 dB
SAR (1g) = 0.282 W/kg; SAR (10g) = 0.187 W/kg;
M2/M1 [%] 83.7
Dist 3dB Peak [mm] 14.5

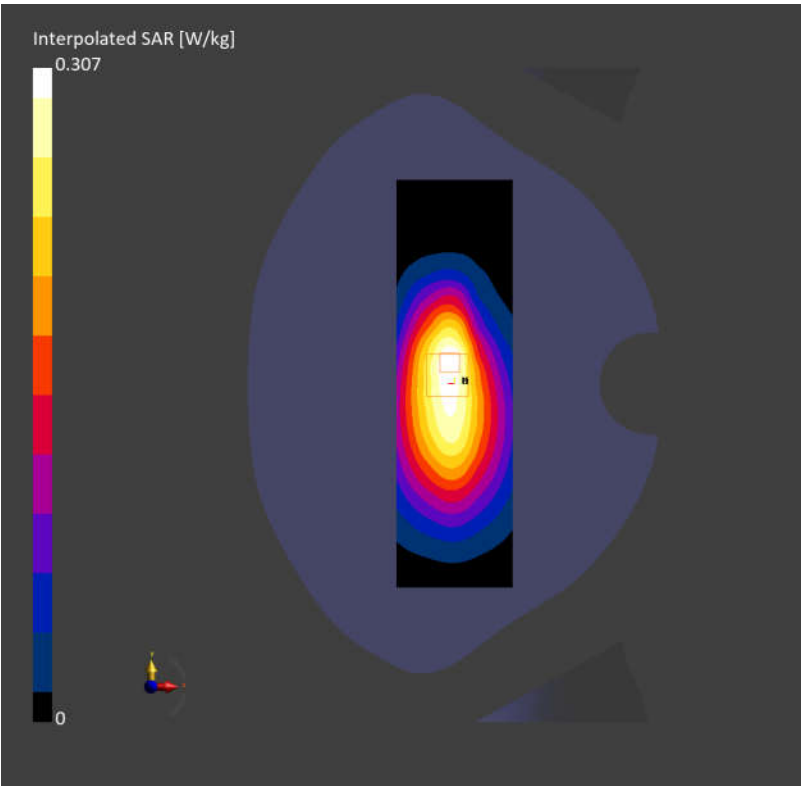


LTE Band 12 QPSK 10M 1RB0 23095CH Bottom side 0mm

Communication System: Band 12; Frequency: 707.500
Medium: HSL. Medium parameters used: $f=707.500$ MHz; $\sigma=0.855$ S/m; $\epsilon_r=41.7$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.881 W/kg; SAR (10g) = 0.543 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.10 dB
SAR (1g) = 1.45 W/kg; SAR (10g) = 0.529 W/kg;
M2/M1 [%] 51.1
Dist 3dB Peak [mm] 6.4

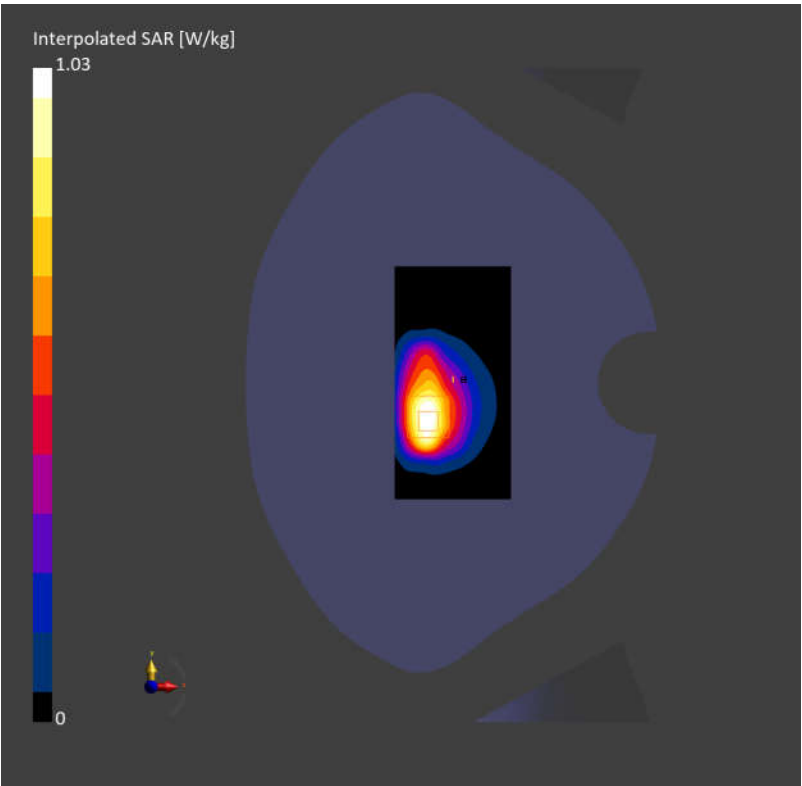


LTE Band 13 QPSK 10M 1RB0 23230CH Right cheek

Communication System: Band 13; Frequency: 782.000
Medium: HSL. Medium parameters used: $f=782.000$ MHz; $\sigma=0.898$ S/m; $\epsilon_r=41.3$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.167 W/kg; SAR (10g) = 0.116 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 0.172 W/kg; SAR (10g) = 0.134 W/kg;
M2/M1 [%] 93.1
Dist 3dB Peak [mm] 22.5

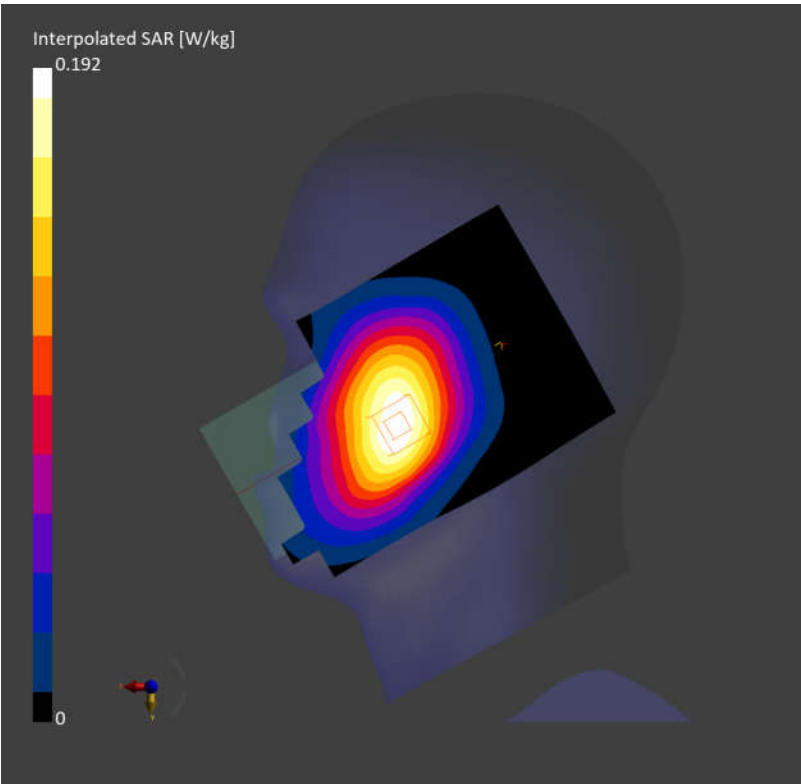


LTE Band 13 QPSK 10M 1RB0 23230CH Back side 10mm

Communication System: Band 13; Frequency: 782.000
Medium: HSL. Medium parameters used: $f=782.000$ MHz; $\sigma=0.898$ S/m; $\epsilon_r=41.3$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.242 W/kg; SAR (10g) = 0.217 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.13 dB
SAR (1g) = 0.324 W/kg; SAR (10g) = 0.268 W/kg;
M2/M1 [%] 86.0
Dist 3dB Peak [mm] 19.3

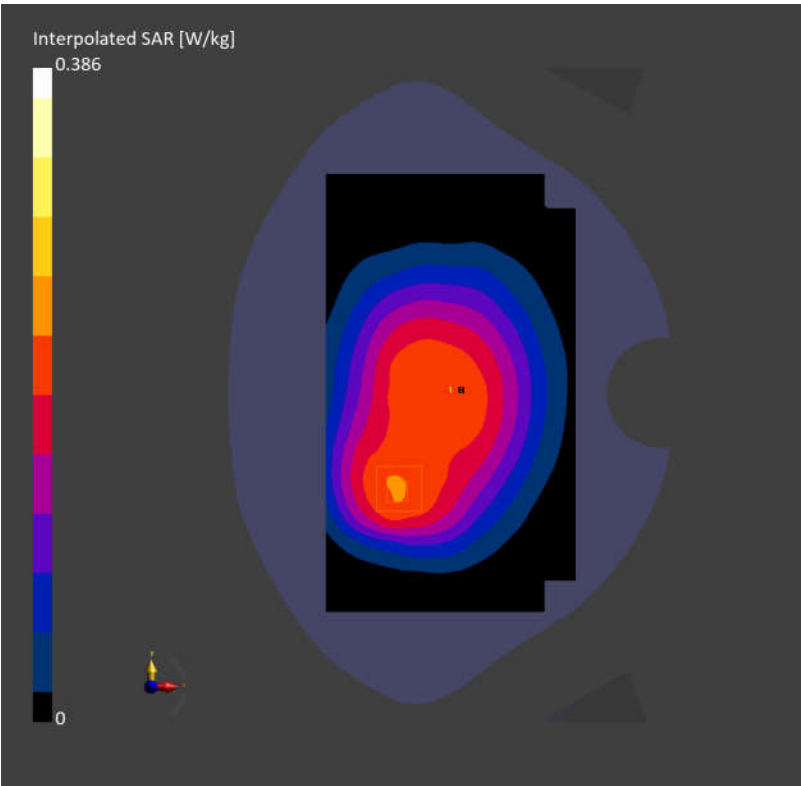


LTE Band 13 QPSK 10M 1RB0 23230CH Right side 10mm

Communication System: Band 13; Frequency: 782.000
Medium: HSL. Medium parameters used: $f=782.000$ MHz; $\sigma=0.898$ S/m; $\epsilon_r=41.3$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.314 W/kg; SAR (10g) = 0.215 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.331 W/kg; SAR (10g) = 0.216 W/kg;
M2/M1 [%] 82.0
Dist 3dB Peak [mm] 12.6

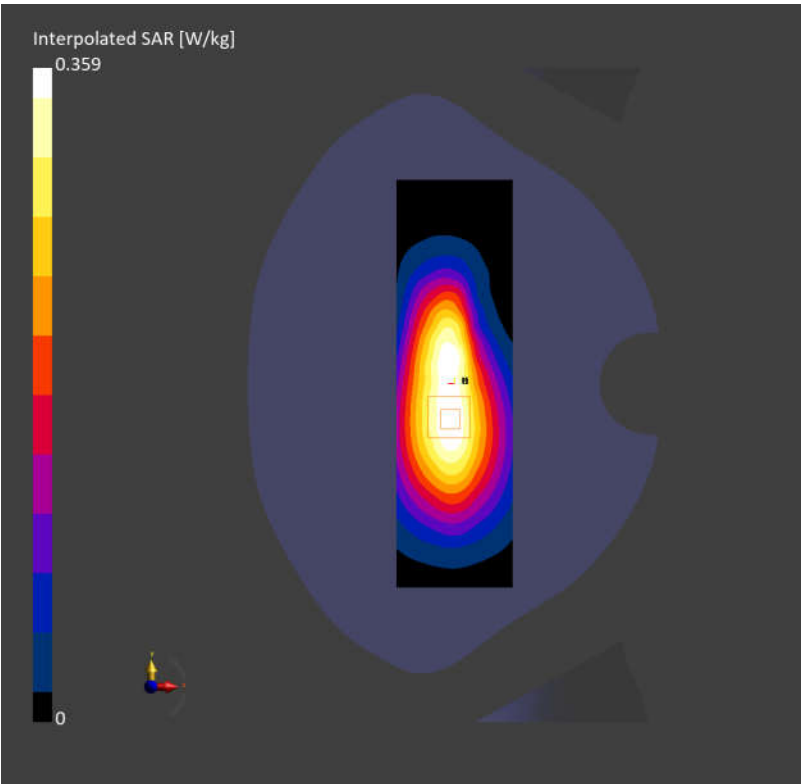


LTE Band 13 QPSK 10M 1RB0 23230CH Bottom side 0mm

Communication System: Band 13; Frequency: 782.000
Medium: HSL. Medium parameters used: $f=782.000$ MHz; $\sigma=0.898$ S/m; $\epsilon_r=41.3$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.831 W/kg; SAR (10g) = 0.548 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 1.40 W/kg; SAR (10g) = 0.588 W/kg;
M2/M1 [%] 57.4
Dist 3dB Peak [mm] 6.8

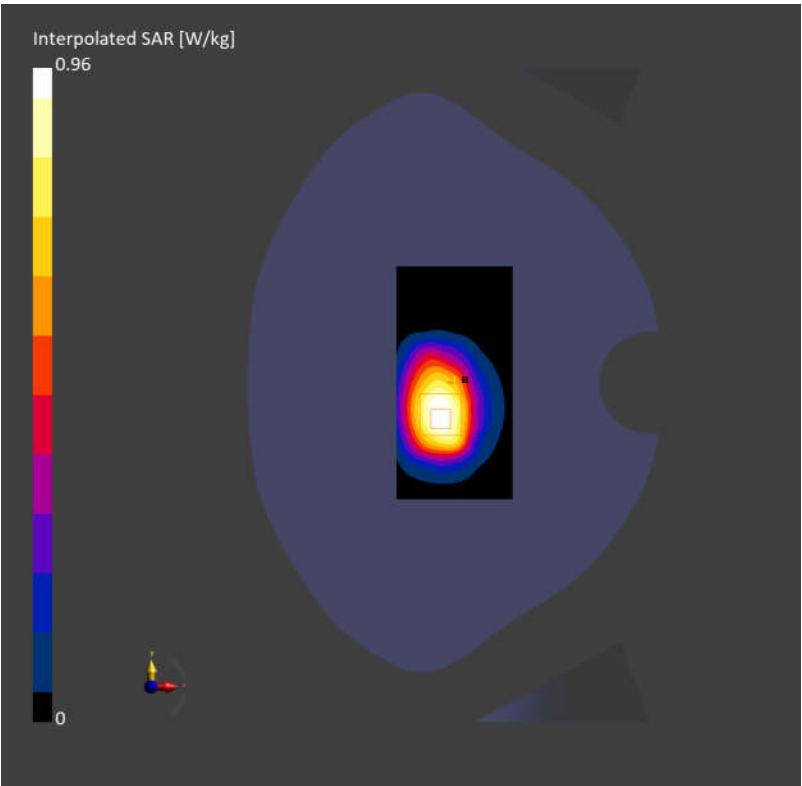


LTE Band 14 QPSK 10M 1RB0 23330CH Right cheek

Communication System: Band 14; Frequency: 793.000
Medium: HSL. Medium parameters used: $f=793.000$ MHz; $\sigma=0.906$ S/m; $\epsilon_r=41.2$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.181 W/kg; SAR (10g) = 0.125 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.05 dB
SAR (1g) = 0.188 W/kg; SAR (10g) = 0.145 W/kg;
M2/M1 [%] 87.0
Dist 3dB Peak [mm] 21.6

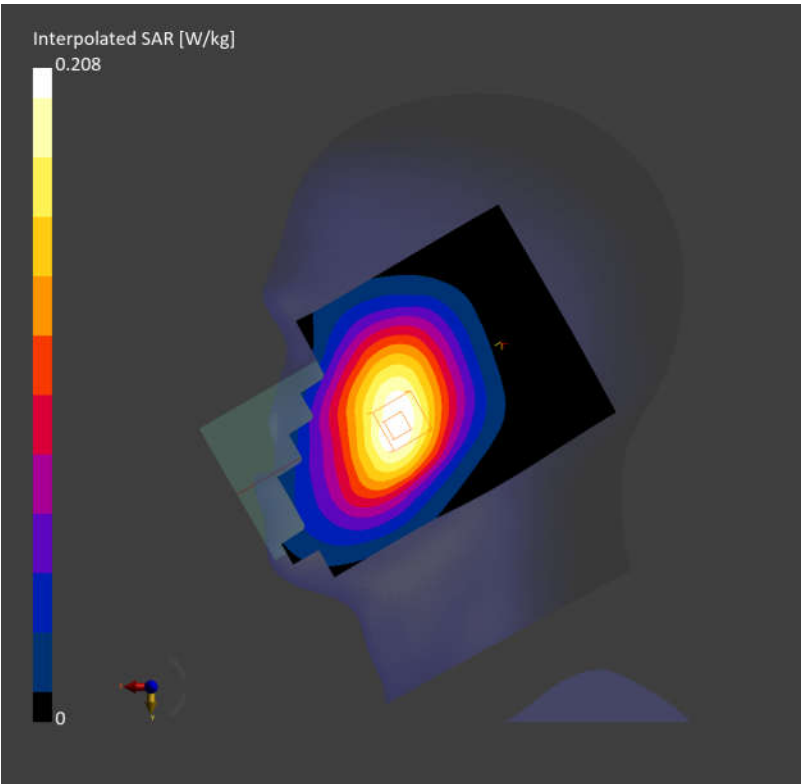

LTE Band 14 QPSK 10M 1RB0 23330CH Back side 10mm

Communication System: Band 14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.300 W/kg; SAR (10g) = 0.242 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB


SAR (1g) = 0.331 W/kg; SAR (10g) = 0.286 W/kg;

M2/M1 [%]

87.8

Dist 3dB Peak [mm]

> 15.0

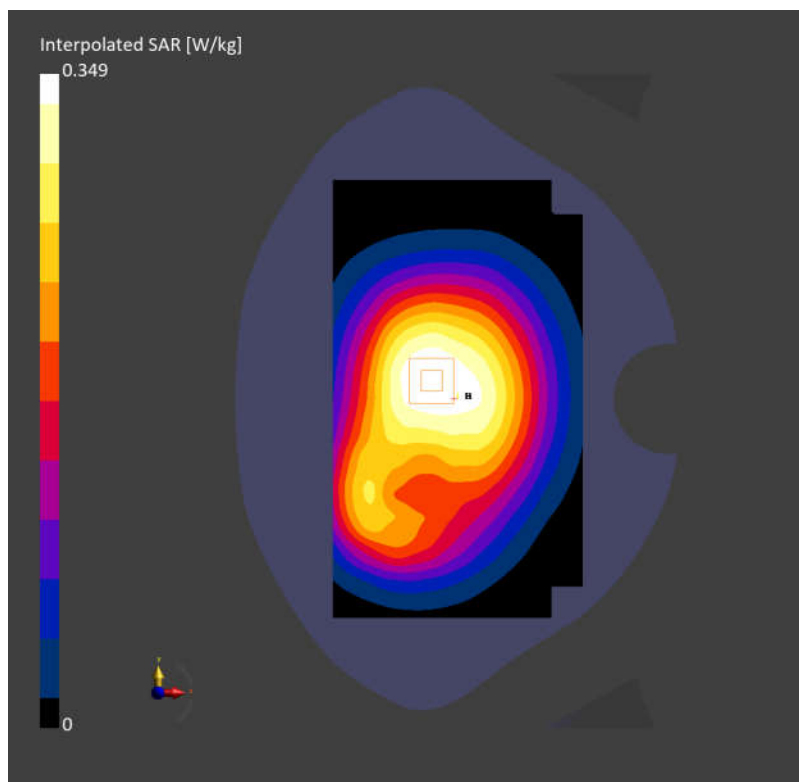

LTE Band 14 QPSK 10M 1RB0 23330CH Right side 10mm

Communication System: Band 14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.277 W/kg; SAR (10g) = 0.189 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.11 dB


SAR (1g) = 0.288 W/kg; SAR (10g) = 0.200 W/kg;

M2/M1 [%]

85.8

Dist 3dB Peak [mm]

> 15.0

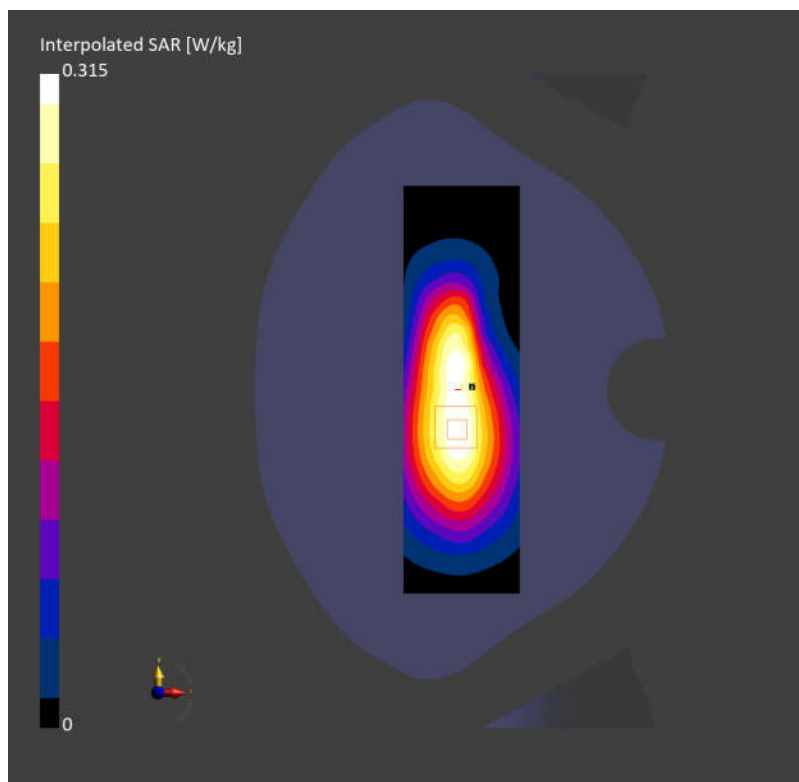


LTE Band 14 QPSK 10M 1RB0 23330CH Bottom side 0mm

Communication System: Band 14; Frequency: 793.000
Medium: HSL. Medium parameters used: $f=793.000$ MHz; $\sigma=0.906$ S/m; $\epsilon_r=41.2$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.824 W/kg; SAR (10g) = 0.543 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.09 dB
SAR (1g) = 1.38 W/kg; SAR (10g) = 0.579 W/kg;
M2/M1 [%] 56.8
Dist 3dB Peak [mm] 6.8

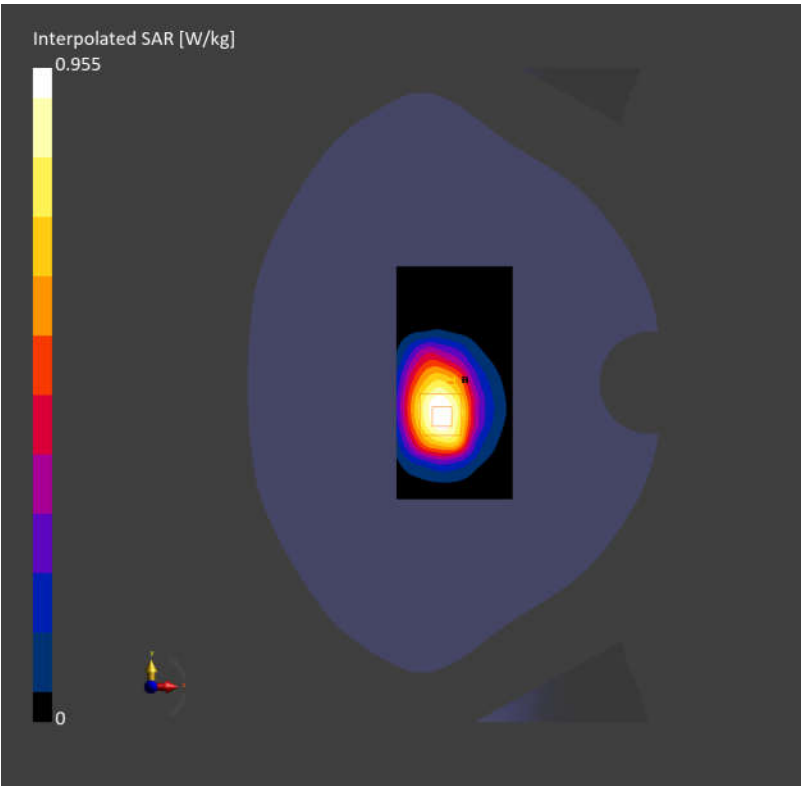


LTE Band 25 QPSK 20M 1RB0 26365CH Right cheek

Communication System: Band 25; Frequency: 1882.500
Medium: HSL. Medium parameters used: $f=1882.500$ MHz; $\sigma=1.37$ S/m; $\epsilon_r=40.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 1.25 W/kg; SAR (10g) = 0.664 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 1.18 W/kg; SAR (10g) = 0.619 W/kg;
M2/M1 [%] 80.7
Dist 3dB Peak [mm] 9.6

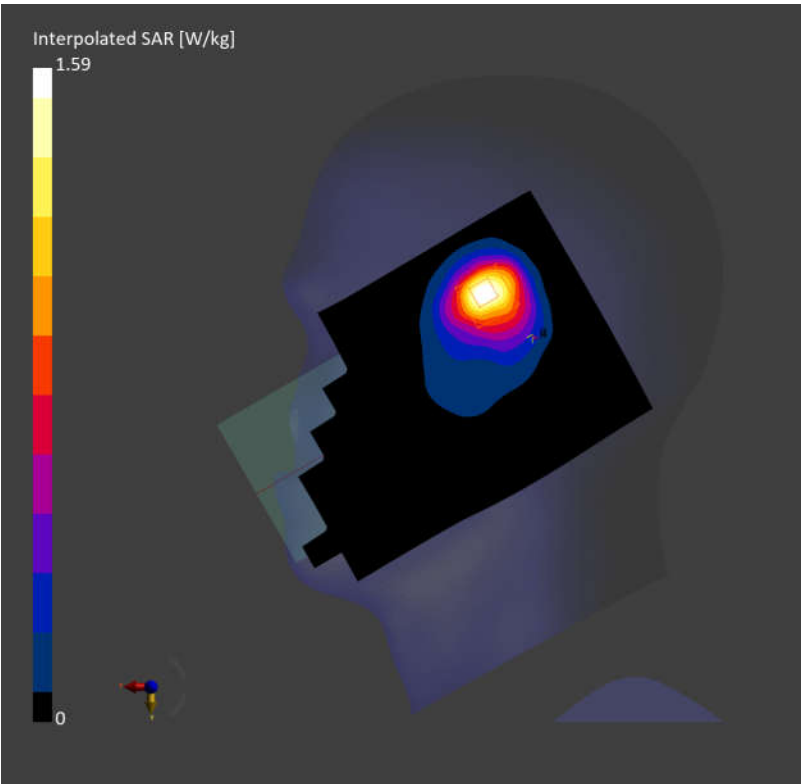

LTE Band 25 QPSK 20M 1RB0 26365CH Back side 10mm

Communication System: Band 25; Frequency: 1882.500

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.236 W/kg; SAR (10g) = 0.124 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.13 dB


SAR (1g) = 0.277 W/kg; SAR (10g) = 0.172 W/kg;

M2/M1 [%]

84.1

Dist 3dB Peak [mm]

17.9

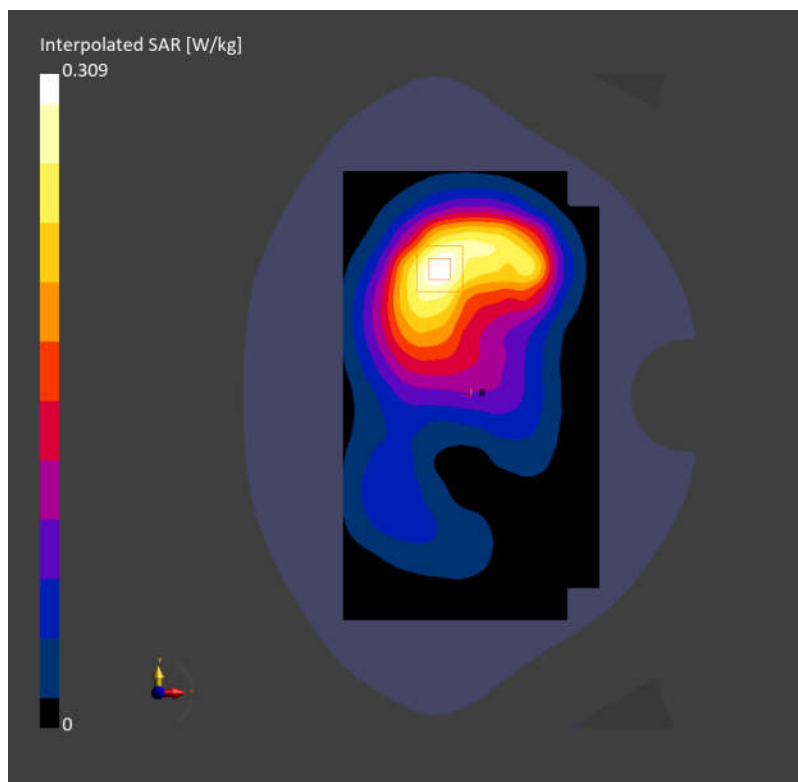


LTE Band 25 QPSK 20M 1RB0 26365CH Top side 10mm

Communication System: Band 25; Frequency: 1882.500
Medium: HSL. Medium parameters used: $f=1882.500$ MHz; $\sigma=1.37$ S/m; $\epsilon_r=40.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.379 W/kg; SAR (10g) = 0.215 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.450 W/kg; SAR (10g) = 0.245 W/kg;
M2/M1 [%] 82.3
Dist 3dB Peak [mm] 12.0

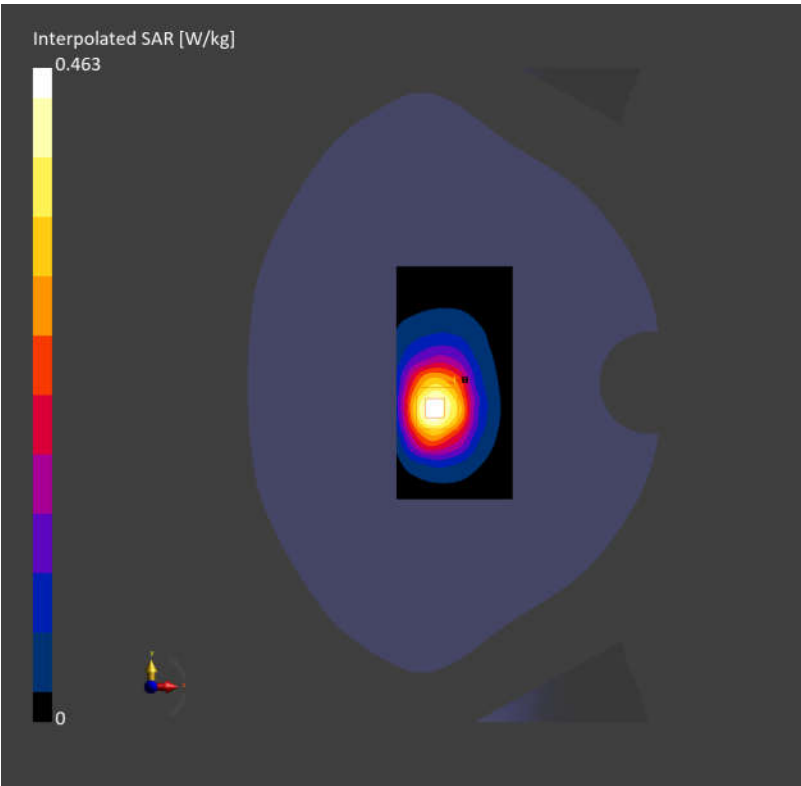

LTE Band 26 QPSK 15M 1RB0 26865CH Right cheek

Communication System: Band 26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 41.0$ **DASY8 Configuration:**

- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.192 W/kg; SAR (10g) = 0.131 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB


SAR (1g) = 0.199 W/kg; SAR (10g) = 0.152 W/kg;

M2/M1 [%]

92.7

Dist 3dB Peak [mm]

19.7

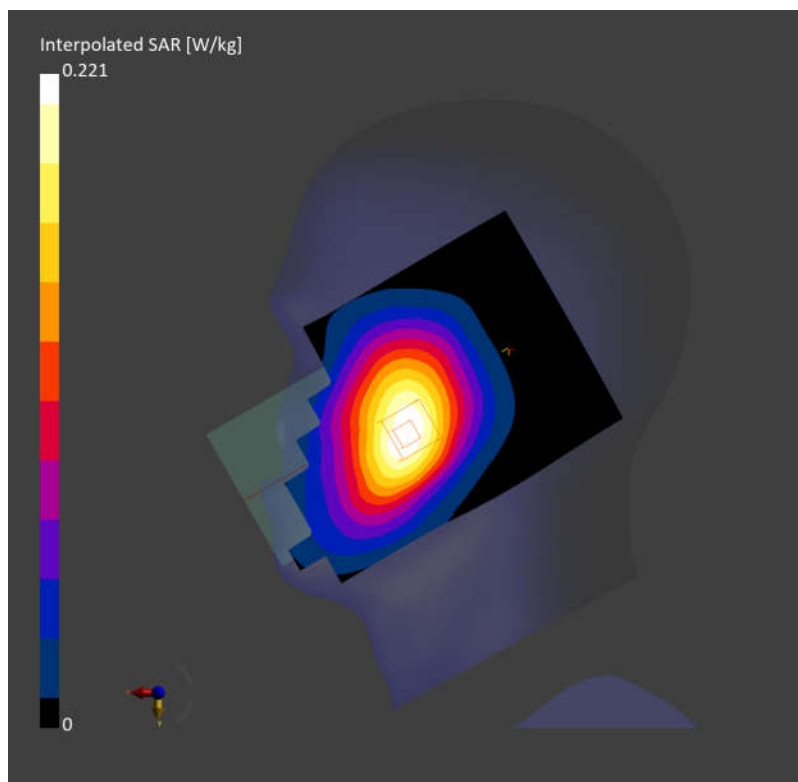


LTE Band 26 QPSK 15M 1RB0 26865CH Back side 10mm

Communication System: Band 26; Frequency: 831.500
Medium: HSL. Medium parameters used: $f=831.500$ MHz; $\sigma=0.883$ S/m; $\epsilon_r=41.0$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.250 W/kg; SAR (10g) = 0.197 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.06 dB
SAR (1g) = 0.331 W/kg; SAR (10g) = 0.271 W/kg;
M2/M1 [%] 85.2
Dist 3dB Peak [mm] 15.2

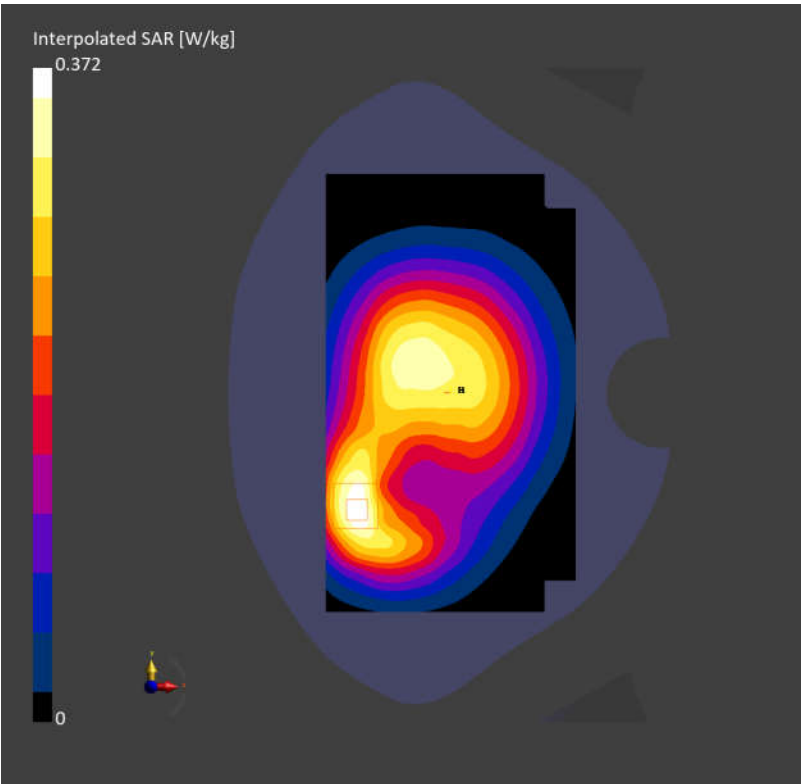

LTE Band 26 QPSK 15M 1RB0 26865CH Right side 10mm

Communication System: Band 26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 41.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.280 W/kg; SAR (10g) = 0.190 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.10 dB


SAR (1g) = 0.295 W/kg; SAR (10g) = 0.203 W/kg;

M2/M1 [%]

86.4

Dist 3dB Peak [mm]

> 15.0

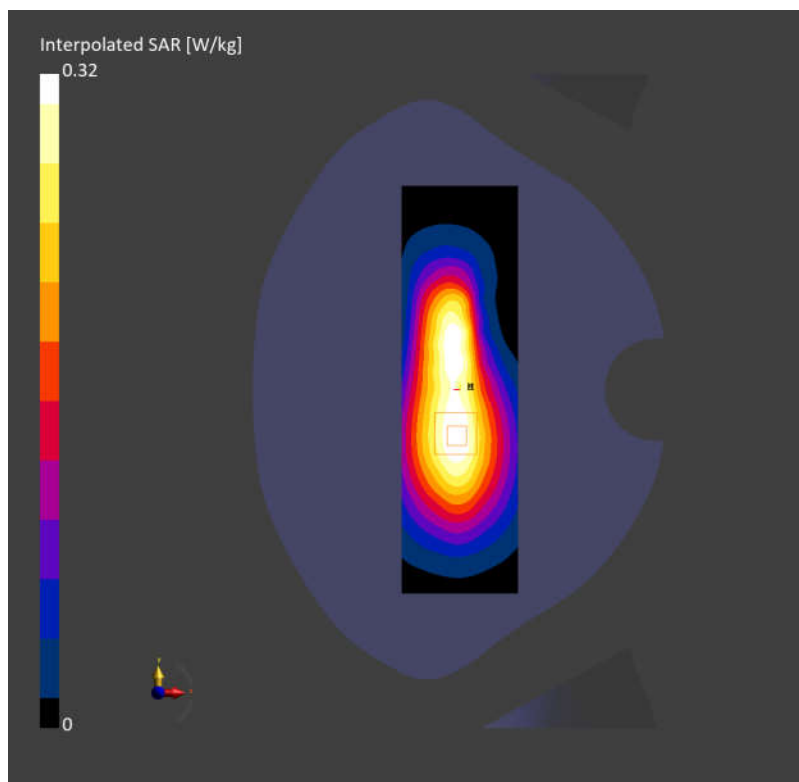


LTE Band 26 QPSK 15M 1RB0 26865CH Bottom side 0mm

Communication System: Band 26; Frequency: 831.500
Medium: HSL. Medium parameters used: $f=831.500$ MHz; $\sigma=0.883$ S/m; $\epsilon_r=41.0$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.637 W/kg; SAR (10g) = 0.415 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 1.02 W/kg; SAR (10g) = 0.440 W/kg;
M2/M1 [%] 62.3
Dist 3dB Peak [mm] 6.1

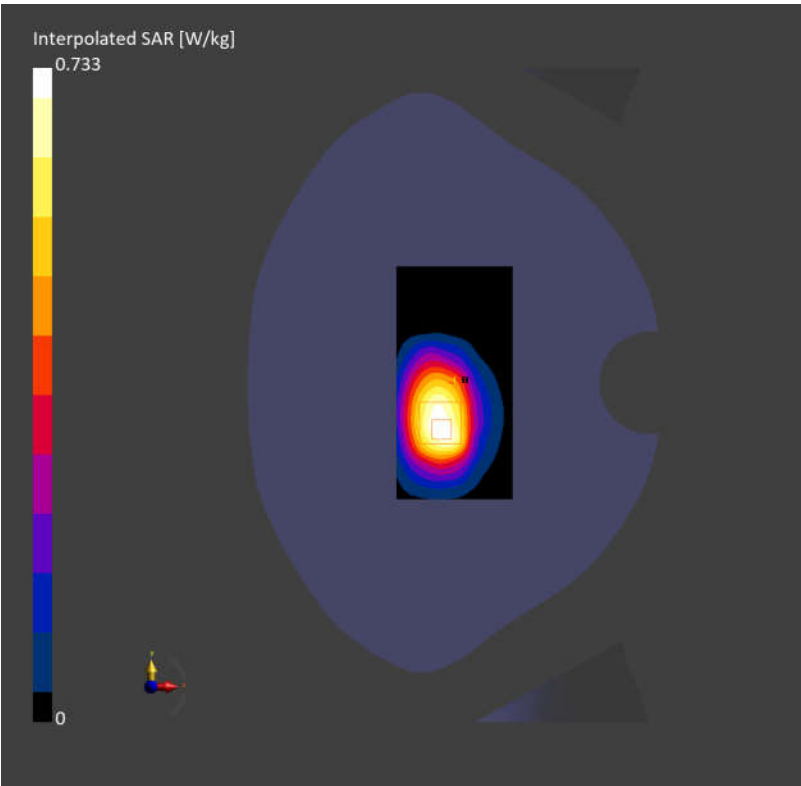


LTE Band 41 QPSK 20M 1RB0 40620CH Left tilted

Communication System: Band 41; Frequency: 2593.000
Medium: HSL. Medium parameters used: $f=2593.000$ MHz; $\sigma=1.94$ S/m; $\epsilon_r=38.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.728 W/kg; SAR (10g) = 0.371 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.04 dB
SAR (1g) = 0.763 W/kg; SAR (10g) = 0.394 W/kg;
M2/M1 [%] 78.5
Dist 3dB Peak [mm] 7.1

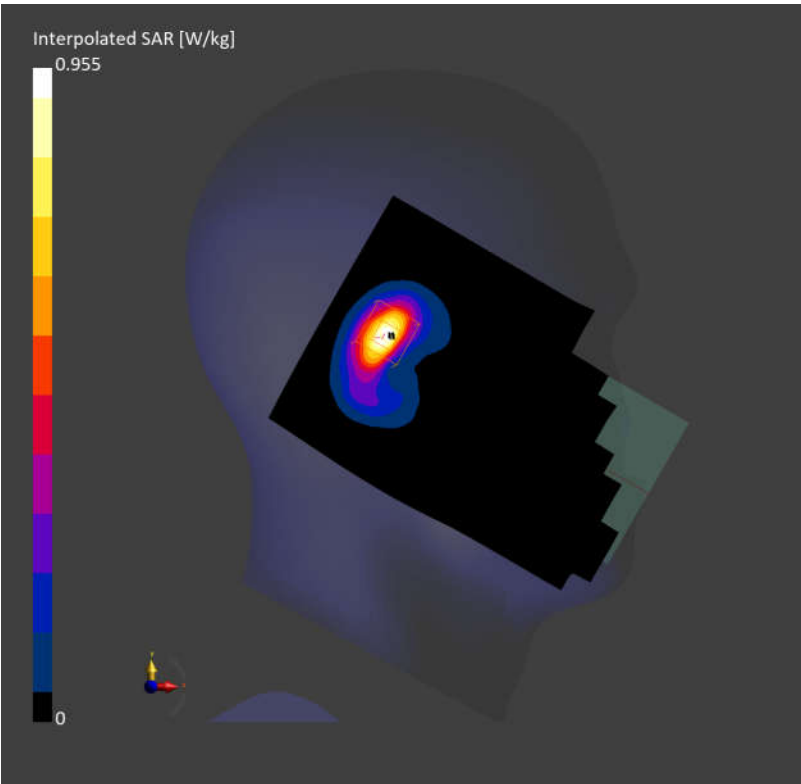


LTE Band 41 QPSK 20M 1RB0 40620CH Back side 10mm

Communication System: Band 41; Frequency: 2593.000
Medium: HSL. Medium parameters used: $f=2593.000$ MHz; $\sigma=1.94$ S/m; $\epsilon_r=38.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.537 W/kg; SAR (10g) = 0.256 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.564 W/kg; SAR (10g) = 0.311 W/kg;
M2/M1 [%] 80.4
Dist 3dB Peak [mm] 13.5

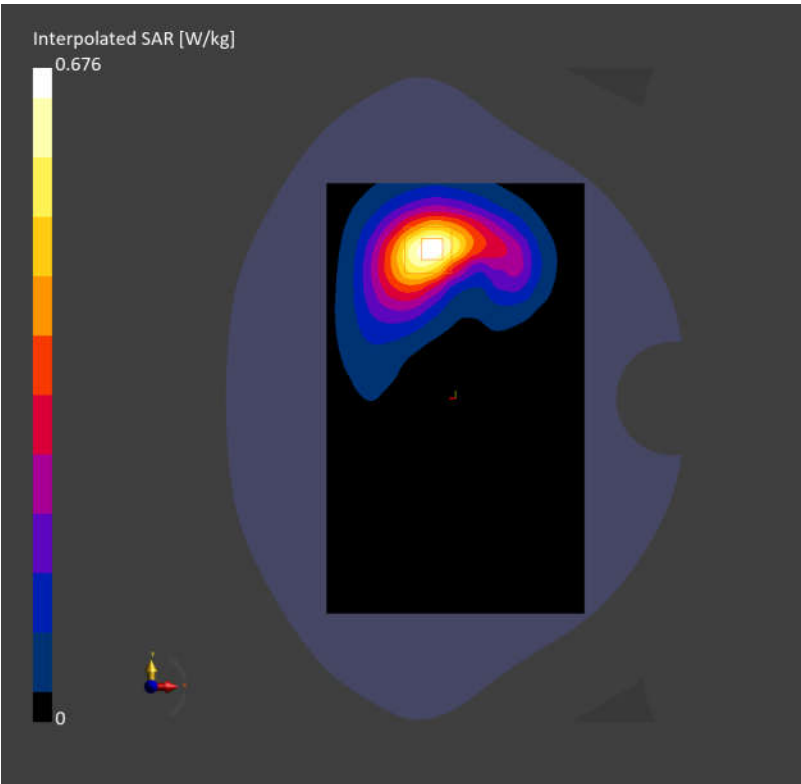


LTE Band 41 QPSK 20M 1RB0 40620CH Top side 10mm

Communication System: Band 41; Frequency: 2593.000
Medium: HSL. Medium parameters used: $f= 2593.000$ MHz; $\sigma= 1.94$ S/m; $\epsilon_r = 38.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.614 W/kg; SAR (10g) = 0.230 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.646 W/kg; SAR (10g) = 0.254 W/kg;
M2/M1 [%] 78.2
Dist 3dB Peak [mm] 9.5

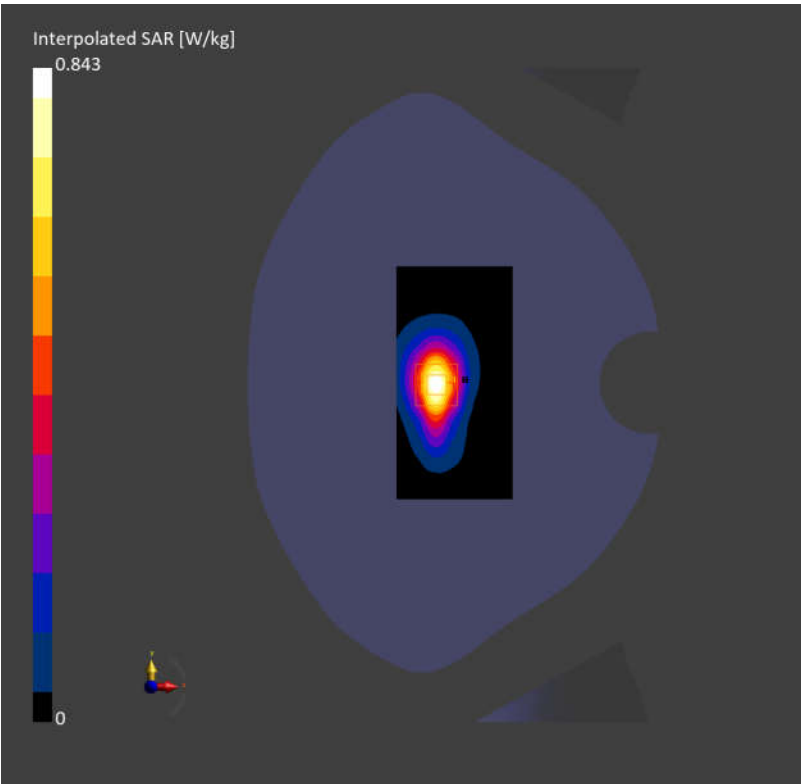


LTE Band 41 QPSK 20M 1RB0 40620CH Top side 0mm

Communication System: Band 41; Frequency: 2593.000
Medium: HSL. Medium parameters used: $f=2593.000$ MHz; $\sigma=1.94$ S/m; $\epsilon_r=38.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 4.26 W/kg; SAR (10g) = 1.97 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 4.41 W/kg; SAR (10g) = 2.11 W/kg;
M2/M1 [%] 78.2
Dist 3dB Peak [mm] 9.5

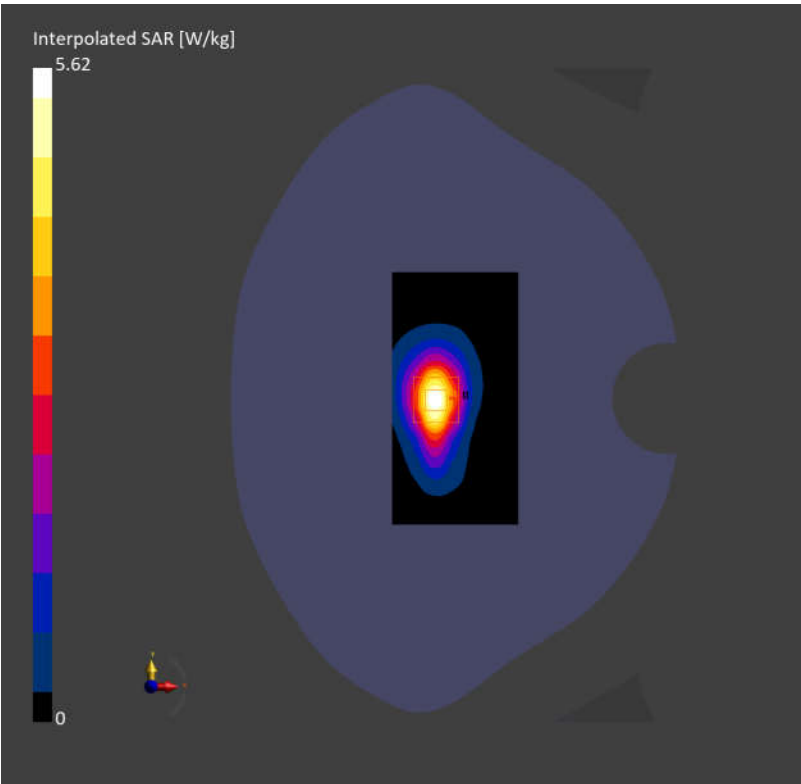

LTE Band 42 QPSK 20M 1RB0 42590CH Right cheek

Communication System: Band 42; Frequency: 3500.000

Medium: HSL. Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.94$ S/m; $\epsilon_r = 38.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(6.49, 6.49, 6.49); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.999 W/kg; SAR (10g) = 0.449 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.14 dB


SAR (1g) = 1.17 W/kg; SAR (10g) = 0.533 W/kg;

M2/M1 [%]

75.6

Dist 3dB Peak [mm]

6.1

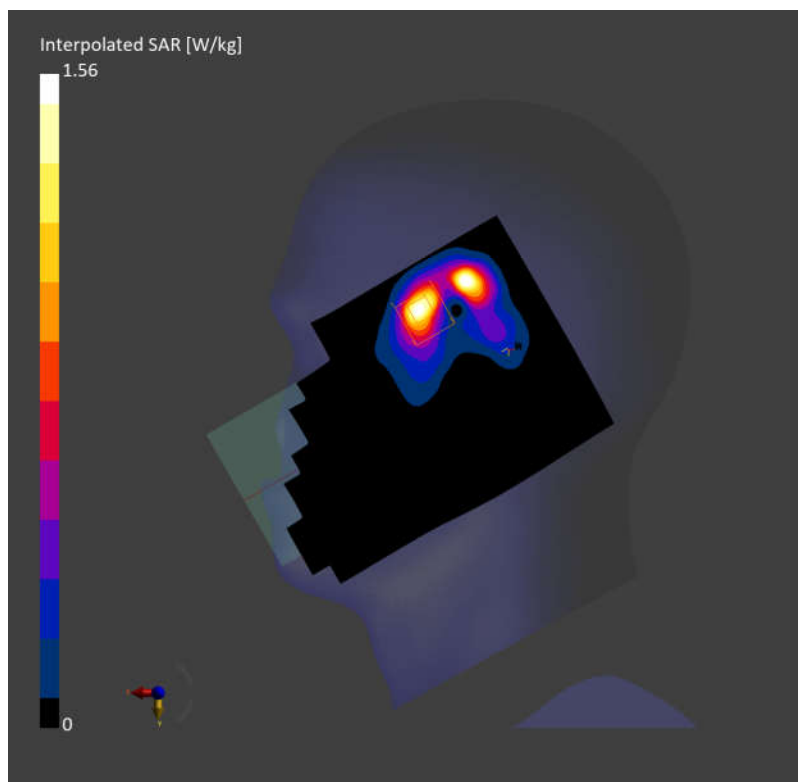

LTE Band 42 QPSK 20M 1RB0 42590CH Back side 10mm

Communication System: Band 42; Frequency: 3500.000

Medium: HSL. Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.94$ S/m; $\epsilon_r = 38.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(6.49, 6.49, 6.49); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.439 W/kg; SAR (10g) = 0.221 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.11 dB


SAR (1g) = 0.523 W/kg; SAR (10g) = 0.264 W/kg;

M2/M1 [%]

79.0

Dist 3dB Peak [mm]

11.4

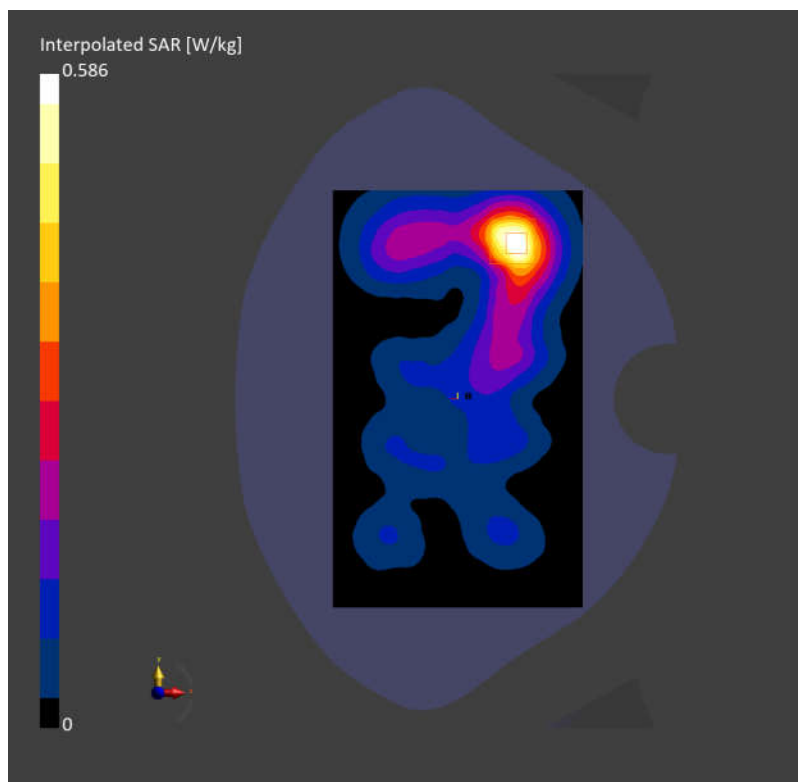


LTE Band 42 QPSK 20M 1RB0 42590CH Left side 10mm

Communication System: Band 42; Frequency: 3500.000
Medium: HSL. Medium parameters used: $f=3500.000$ MHz; $\sigma=2.94$ S/m; $\epsilon_r=38.3$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(6.49, 6.49, 6.49); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.503 W/kg; SAR (10g) = 0.226 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.03 dB
SAR (1g) = 0.529 W/kg; SAR (10g) = 0.232 W/kg;
M2/M1 [%] 76.8
Dist 3dB Peak [mm] 9.3

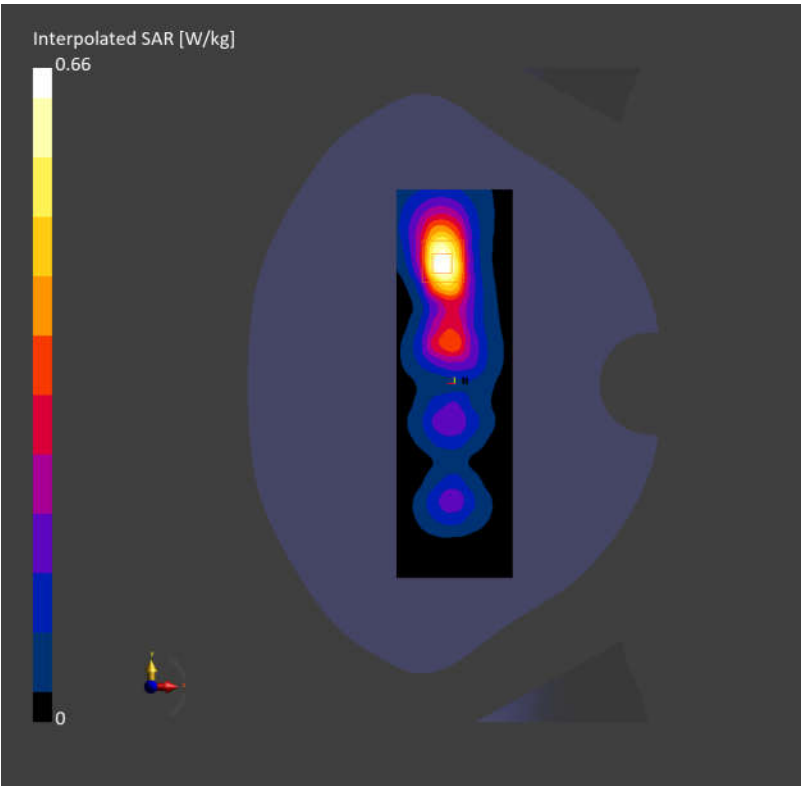


LTE Band 48 QPSK 20M 1RB0 55990CH Right cheek

Communication System: Band 48; Frequency: 3625.000
Medium: HSL. Medium parameters used: $f=3625.000$ MHz; $\sigma=3.08$ S/m; $\epsilon_r=37.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(6.42, 6.42, 6.42); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 1.07 W/kg; SAR (10g) = 0.362 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = 0.18 dB
SAR (1g) = 1.25 W/kg; SAR (10g) = 0.439 W/kg;
M2/M1 [%] 73.8
Dist 3dB Peak [mm] 5.9

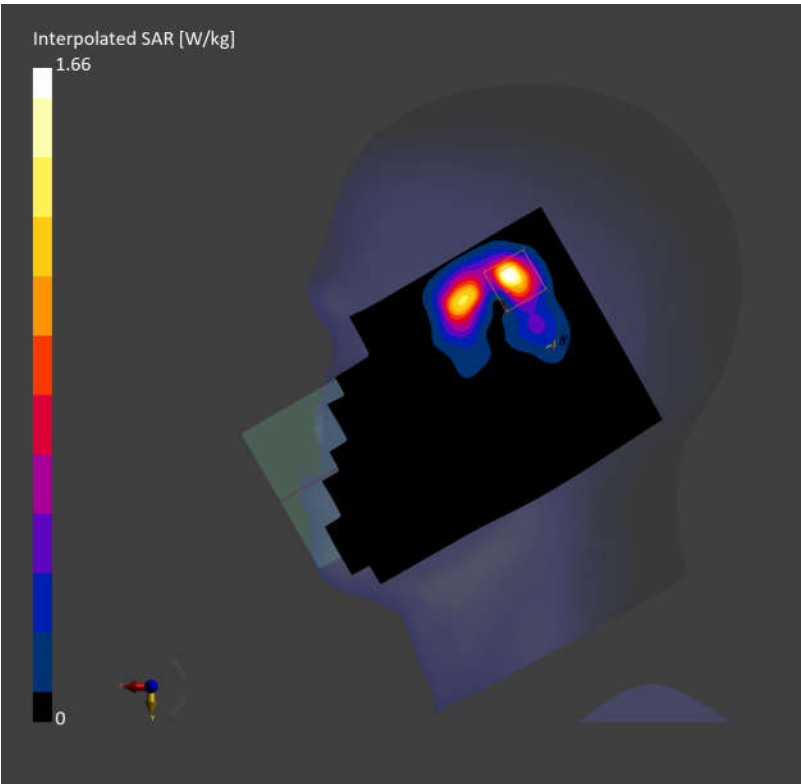


LTE Band 48 QPSK 20M 1RB0 55990CH Back side 10mm

Communication System: Band 48; Frequency: 3625.000
Medium: HSL. Medium parameters used: $f=3625.000$ MHz; $\sigma=3.08$ S/m; $\epsilon_r=37.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(6.42, 6.42, 6.42); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.419 W/kg; SAR (10g) = 0.207 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.09 dB
SAR (1g) = 0.569 W/kg; SAR (10g) = 0.298 W/kg;
M2/M1 [%] 79.0
Dist 3dB Peak [mm] 11.4

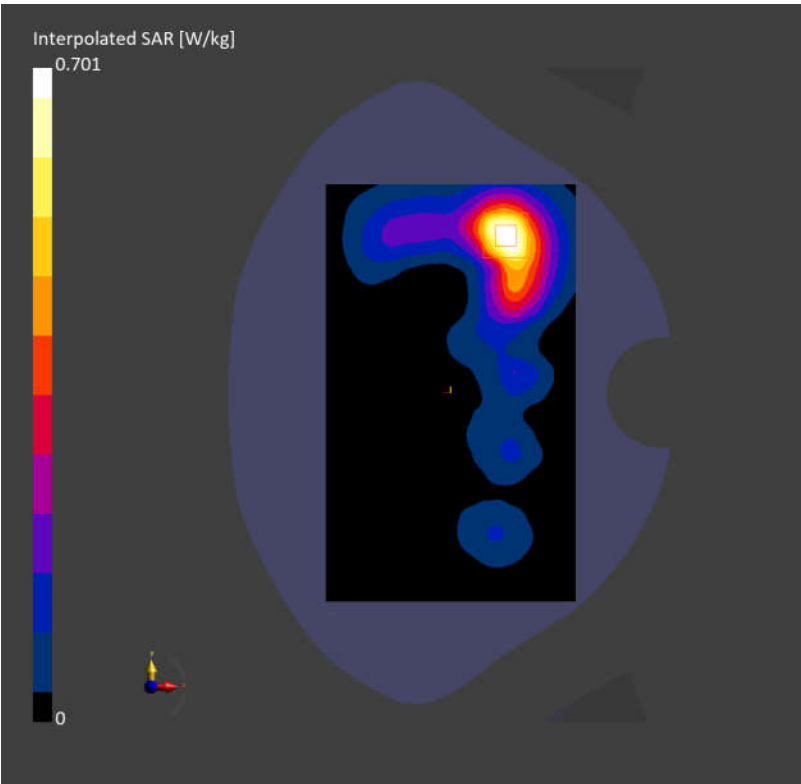


LTE Band 48 QPSK 20M 1RB0 55990CH Left side 10mm

Communication System: Band 48; Frequency: 3625.000
Medium: HSL. Medium parameters used: $f=3625.000$ MHz; $\sigma=3.08$ S/m; $\epsilon_r=37.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(6.42, 6.42, 6.42); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.795 W/kg; SAR (10g) = 0.350 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = 0.01 dB
SAR (1g) = 0.829 W/kg; SAR (10g) = 0.355 W/kg;
M2/M1 [%] 76.5
Dist 3dB Peak [mm] 10.0

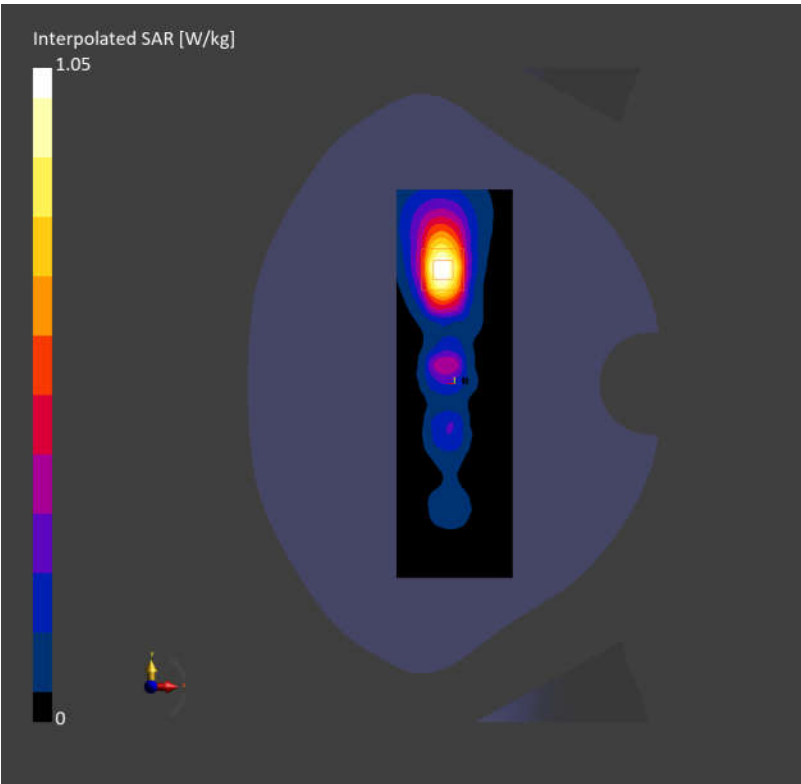


LTE Band 48 QPSK 20M 1RB0 55990CH Left side 0mm

Communication System: Band 48; Frequency: 3625.000
Medium: HSL. Medium parameters used: $f=3625.000$ MHz; $\sigma=3.08$ S/m; $\epsilon_r=37.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(6.42, 6.42, 6.42); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 6.59 W/kg; SAR (10g) = 2.75 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = 0.03 dB
SAR (1g) = 6.82 W/kg; SAR (10g) = 2.91 W/kg;
M2/M1 [%] 76.5
Dist 3dB Peak [mm] 10.0

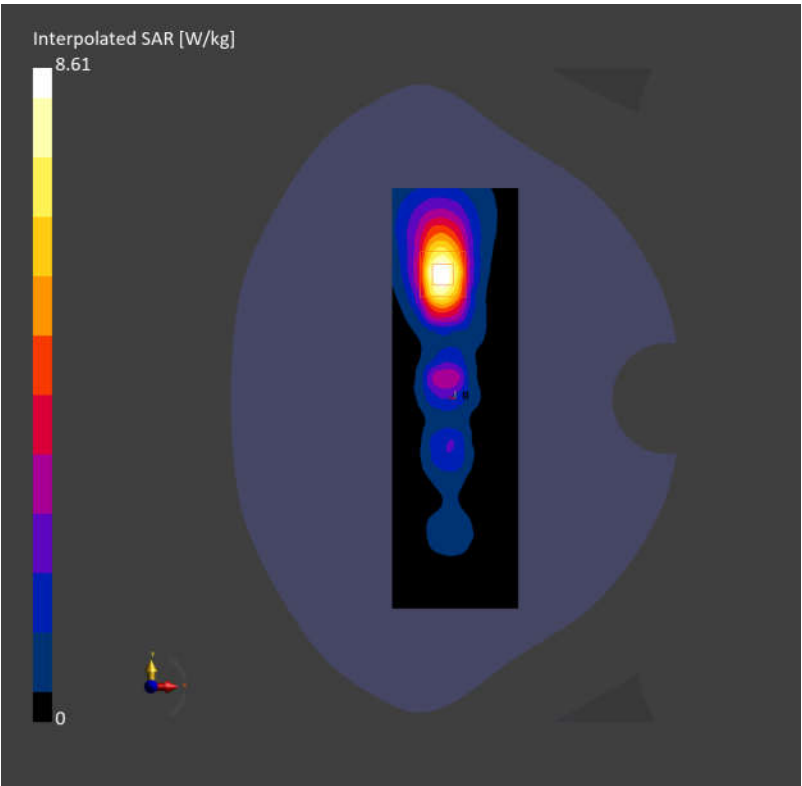

LTE Band 66 QPSK 20M 1RB0 132322CH Right cheek

Communication System: Band 66; Frequency: 1745.000

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.96, 7.96, 7.96); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.16 W/kg; SAR (10g) = 0.639 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.09 dB


SAR (1g) = 1.19 W/kg; SAR (10g) = 0.644 W/kg;

M2/M1 [%]

80.1

Dist 3dB Peak [mm]

10.2

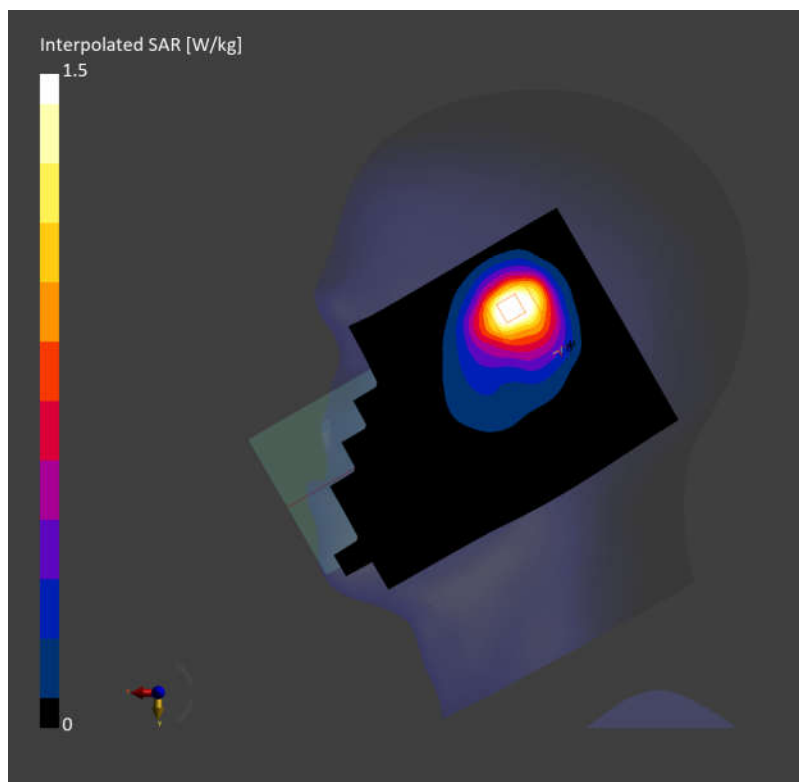

LTE Band 66 QPSK 20M 1RB0 132322CH Back side 10mm

Communication System: Band 66; Frequency: 1745.000

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.96, 7.96, 7.96); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.331 W/kg; SAR (10g) = 0.223 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB


SAR (1g) = 0.393 W/kg; SAR (10g) = 0.262 W/kg;

M2/M1 [%]

85.1

Dist 3dB Peak [mm]

17.9

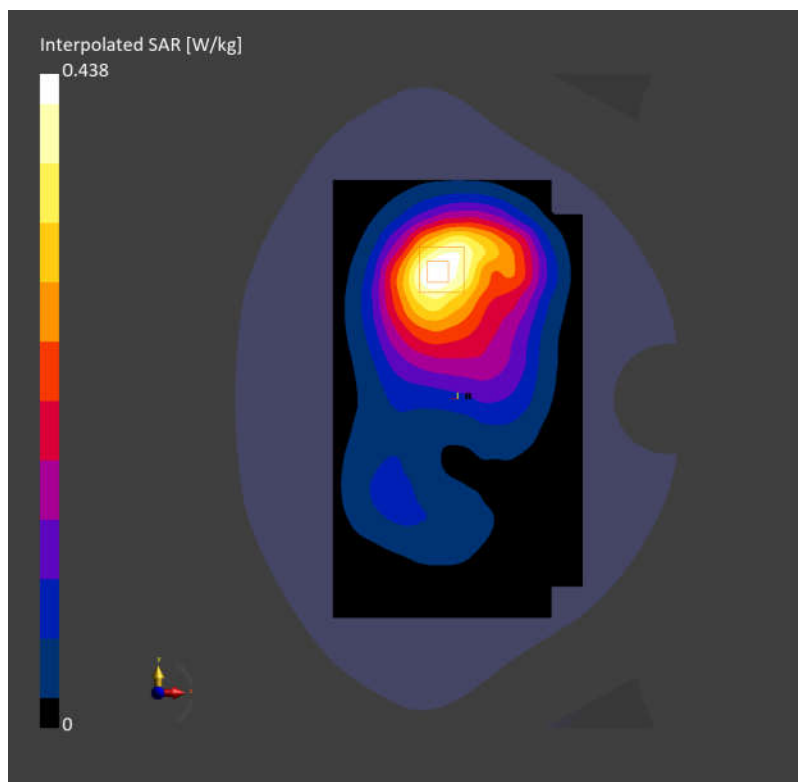


LTE Band 66 QPSK 20M 1RB0 132322CH Top side 10mm

Communication System: Band 66; Frequency: 1745.000
Medium: HSL. Medium parameters used: $f=1745.000$ MHz; $\sigma=1.35$ S/m; $\epsilon_r=40.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.96, 7.96, 7.96); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.444 W/kg; SAR (10g) = 0.260 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 0.511 W/kg; SAR (10g) = 0.285 W/kg;
M2/M1 [%] 81.4
Dist 3dB Peak [mm] 12.0

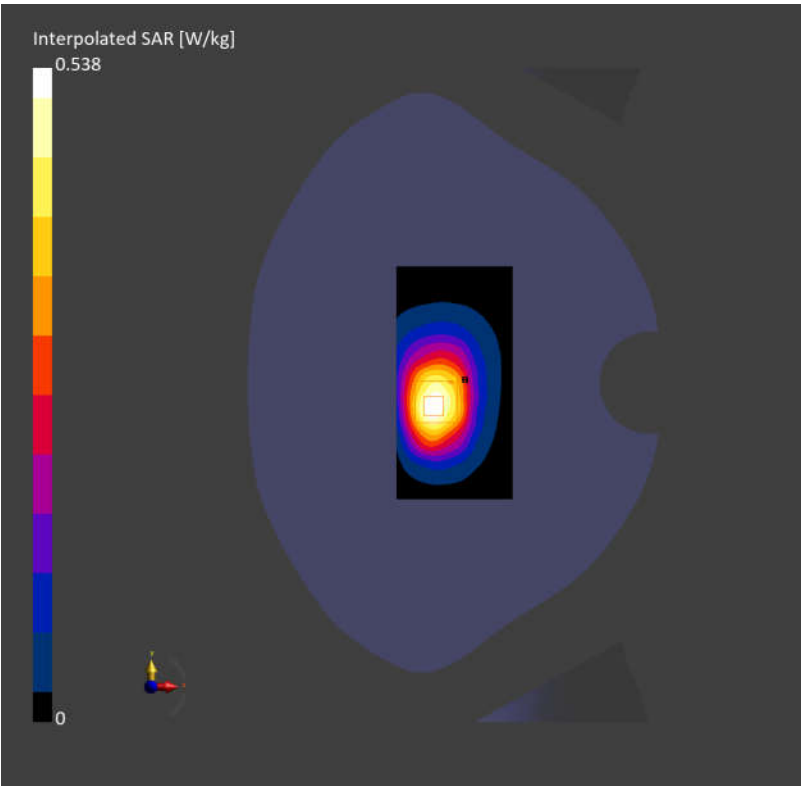


LTE Band 71 QPSK 20M 1RB0 133322CH Right cheek

Communication System: Band 71; Frequency: 683.000
Medium: HSL. Medium parameters used: $f=683.000$ MHz; $\sigma=0.848$ S/m; $\epsilon_r=41.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.049 W/kg; SAR (10g) = 0.034 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.049 W/kg; SAR (10g) = 0.039 W/kg;
M2/M1 [%] 93.9
Dist 3dB Peak [mm] 20.3

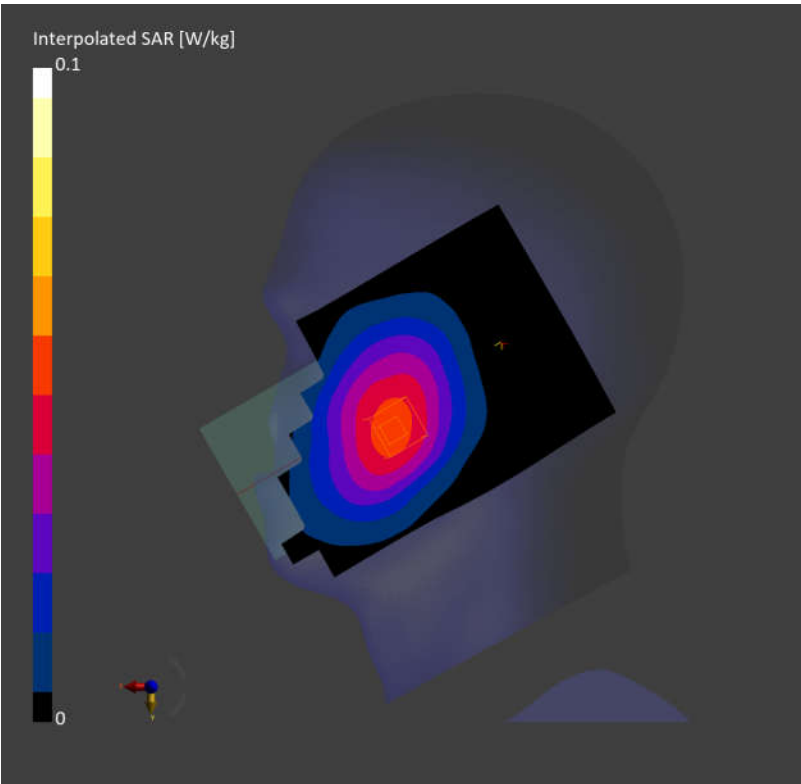

LTE Band 71 QPSK 20M 1RB0 133322CH Back side 10mm

Communication System: Band 71; Frequency: 683.000

Medium: HSL. Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 41.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.199 W/kg; SAR (10g) = 0.131 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.09 dB


SAR (1g) = 0.254 W/kg; SAR (10g) = 0.188 W/kg;

M2/M1 [%]

88.4

Dist 3dB Peak [mm]

> 15.0

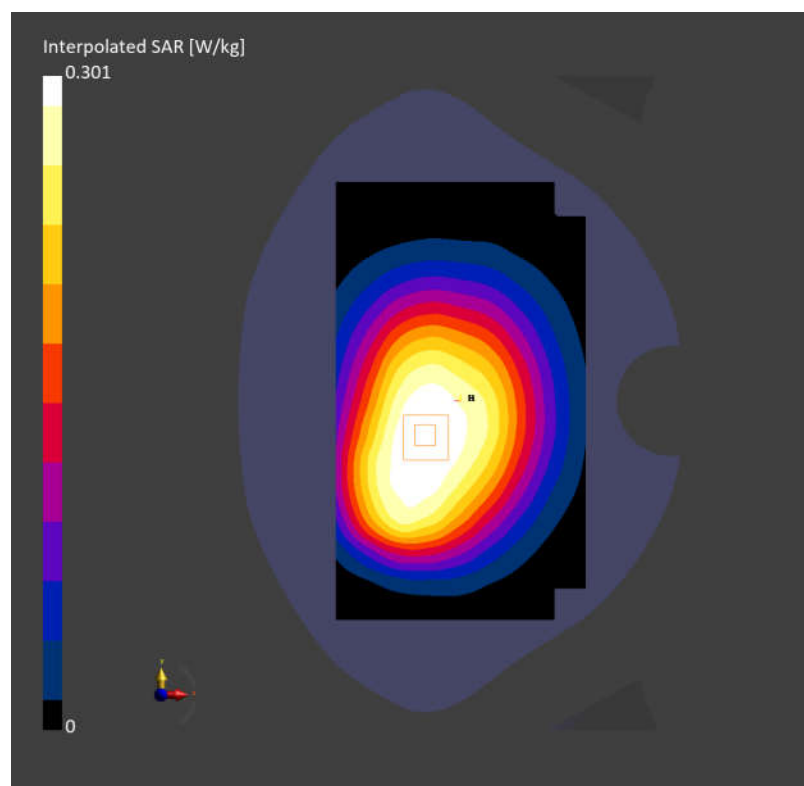

LTE Band 71 QPSK 20M 1RB0 133322CH Right side 10mm

Communication System: Band 71; Frequency: 683.000

Medium: HSL. Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 41.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.236 W/kg; SAR (10g) = 0.163 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB


SAR (1g) = 0.240 W/kg; SAR (10g) = 0.167 W/kg;

M2/M1 [%]

86.1

Dist 3dB Peak [mm]

> 15.0

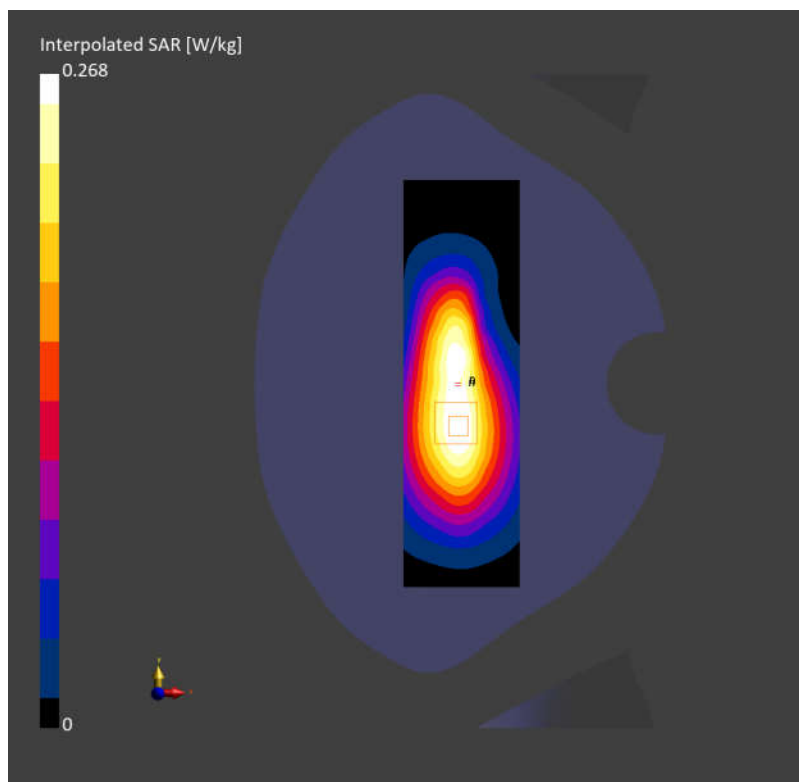


LTE Band 71 QPSK 20M 1RB0 133322CH Bottom side 0mm

Communication System: Band 71; Frequency: 683.000
Medium: HSL. Medium parameters used: $f=683.000$ MHz; $\sigma=0.848$ S/m; $\epsilon_r=41.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.738 W/kg; SAR (10g) = 0.491 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 1.27 W/kg; SAR (10g) = 0.534 W/kg;
M2/M1 [%] 56.8
Dist 3dB Peak [mm] 6.7

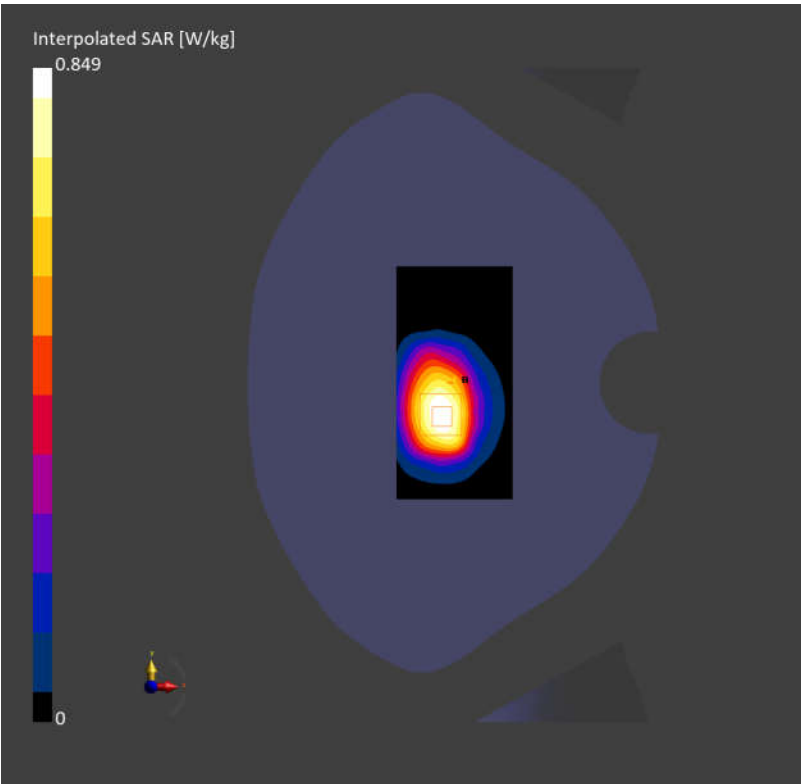

FR1 N7 50M QPSK 135RB67 50700CH Left cheek

Communication System: Band n7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 38.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.294 W/kg; SAR (10g) = 0.157 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB


SAR (1g) = 0.294 W/kg; SAR (10g) = 0.171 W/kg;

M2/M1 [%]

82.4

Dist 3dB Peak [mm]

12.2

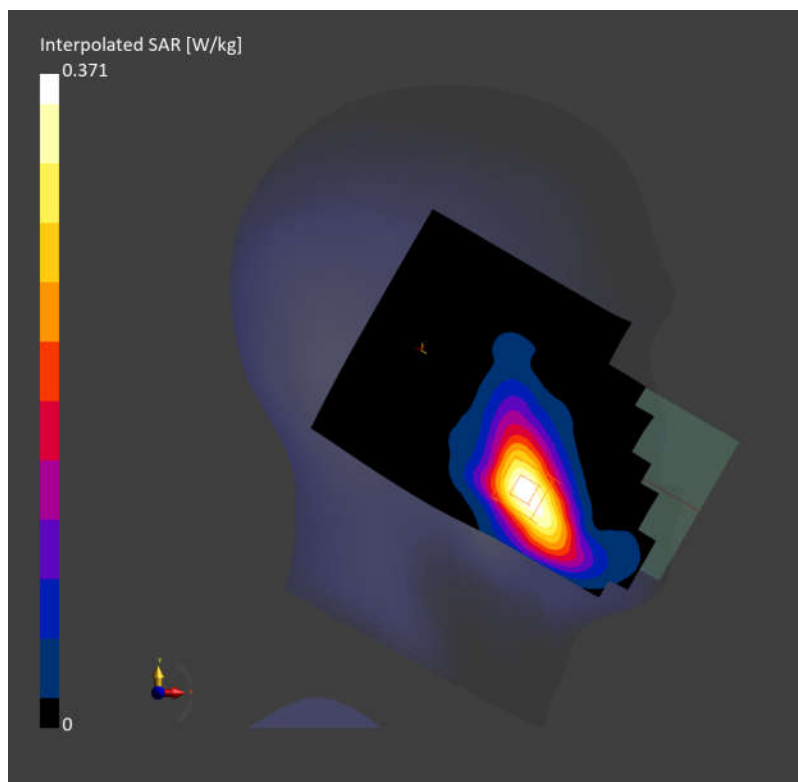


FR1 N7 50M QPSK 135RB67 50700CH Back side 10mm

Communication System: Band n7; Frequency: 2535.000
Medium: HSL. Medium parameters used: $f=2535.000$ MHz; $\sigma=1.89$ S/m; $\epsilon_r=38.7$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.521 W/kg; SAR (10g) = 0.269 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 0.623 W/kg; SAR (10g) = 0.355 W/kg;
M2/M1 [%] 79.5
Dist 3dB Peak [mm] 12.1

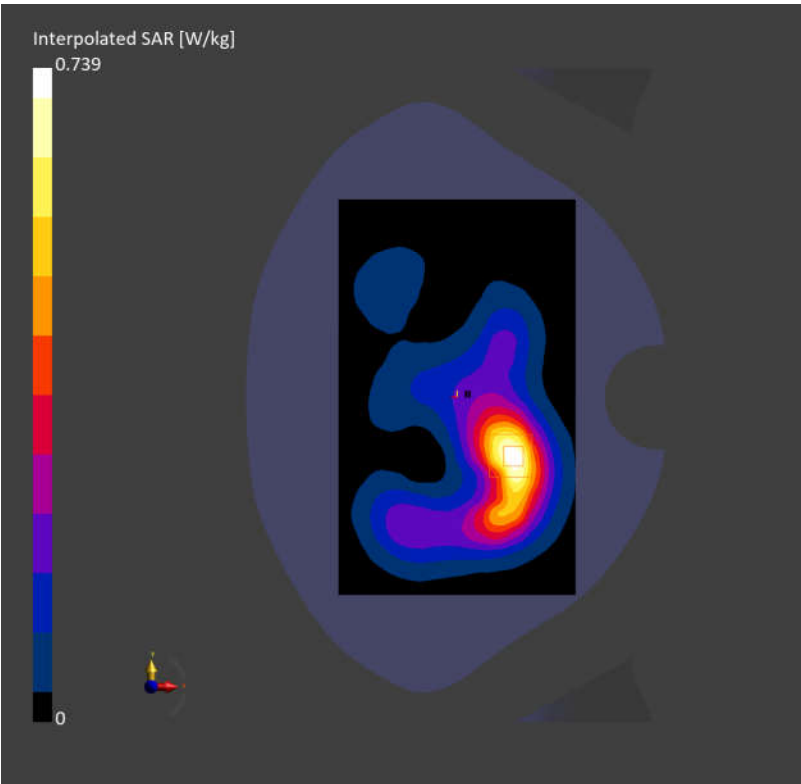


FR1 N7 50M QPSK 135RB67 50700CH Left side 10mm

Communication System: Band n7; Frequency: 2535.000
Medium: HSL. Medium parameters used: $f=2535.000$ MHz; $\sigma=1.89$ S/m; $\epsilon_r=38.7$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.745 W/kg; SAR (10g) = 0.339 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.11 dB
SAR (1g) = 0.869 W/kg; SAR (10g) = 0.335 W/kg;
M2/M1 [%] 75.1
Dist 3dB Peak [mm] 5.7

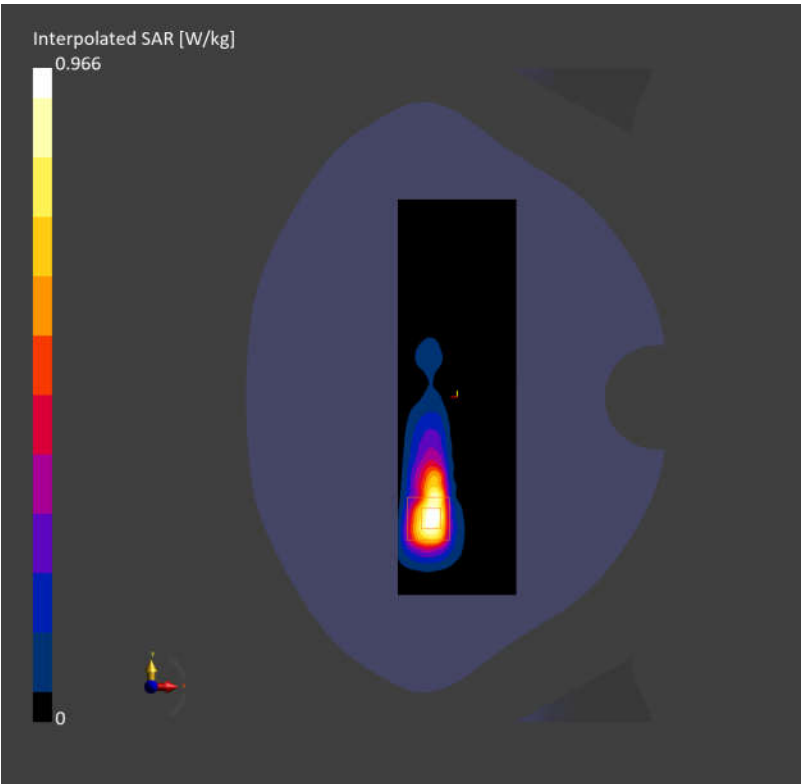


FR1 N7 50M QPSK 135RB67 50700CH Left side 0mm

Communication System: Band n7; Frequency: 2535.000
Medium: HSL. Medium parameters used: $f=2535.000$ MHz; $\sigma=1.89$ S/m; $\epsilon_r=38.7$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 4.61 W/kg; SAR (10g) = 2.11 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 5.41 W/kg; SAR (10g) = 2.08 W/kg;
M2/M1 [%] 75.1
Dist 3dB Peak [mm] 5.7

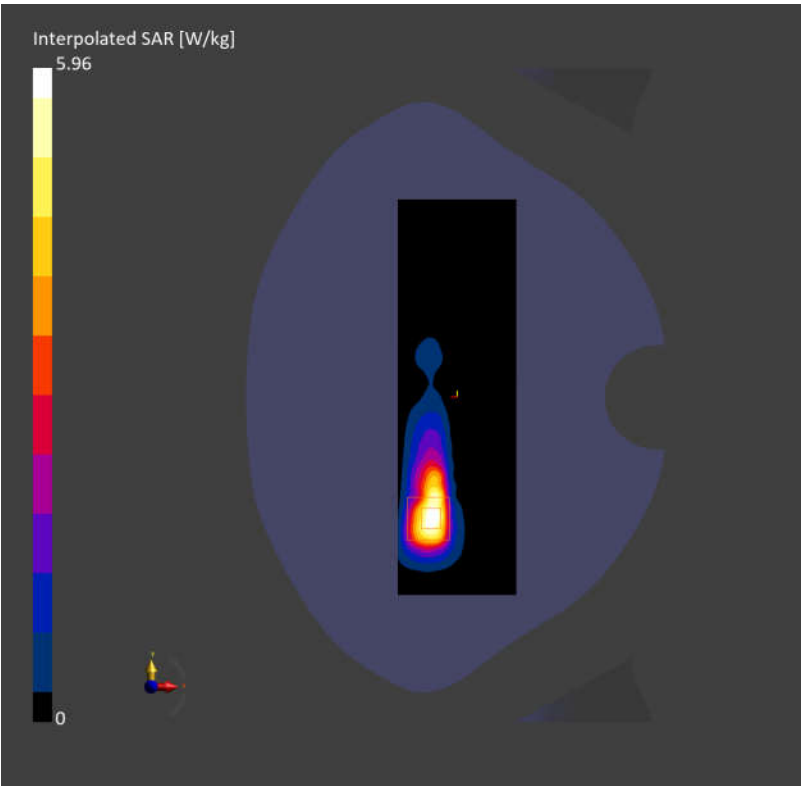

FR1 N12 15M QPSK 36RB22 141500CH Back side 10mm

Communication System: Band n12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.186 W/kg; SAR (10g) = 0.131 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB


SAR (1g) = 0.242 W/kg; SAR (10g) = 0.179 W/kg;

M2/M1 [%]

88.8

Dist 3dB Peak [mm]

> 15.0

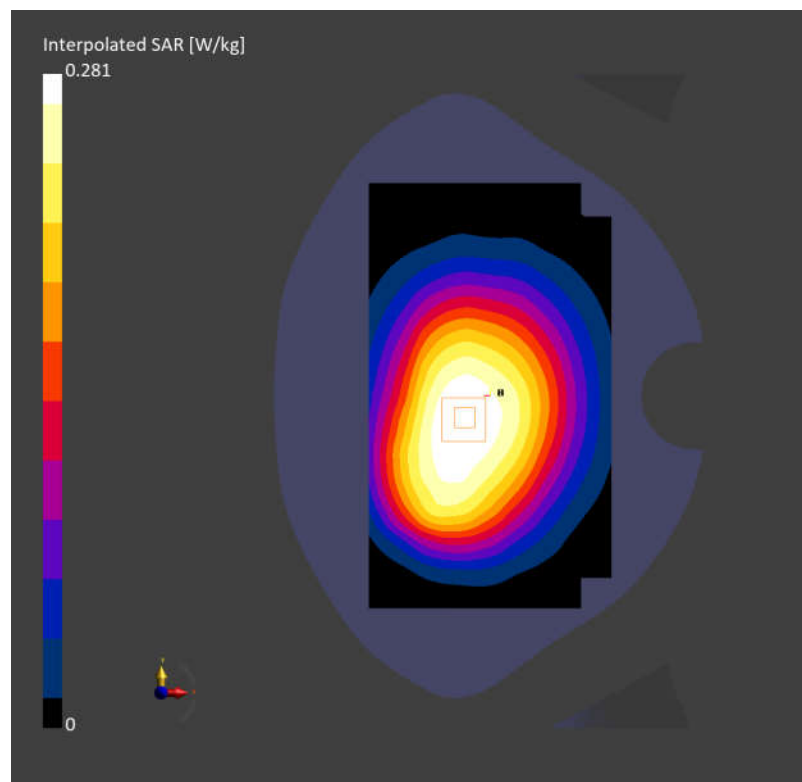


FR1 N12 15M QPSK 36RB22 141500CH Back side 10mm

Communication System: Band n12; Frequency: 707.500
Medium: HSL. Medium parameters used: $f=707.500$ MHz; $\sigma=0.863$ S/m; $\epsilon_r=41.7$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.144 W/kg; SAR (10g) = 0.102 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.153 W/kg; SAR (10g) = 0.108 W/kg;
M2/M1 [%] 84.4
Dist 3dB Peak [mm] 24.7

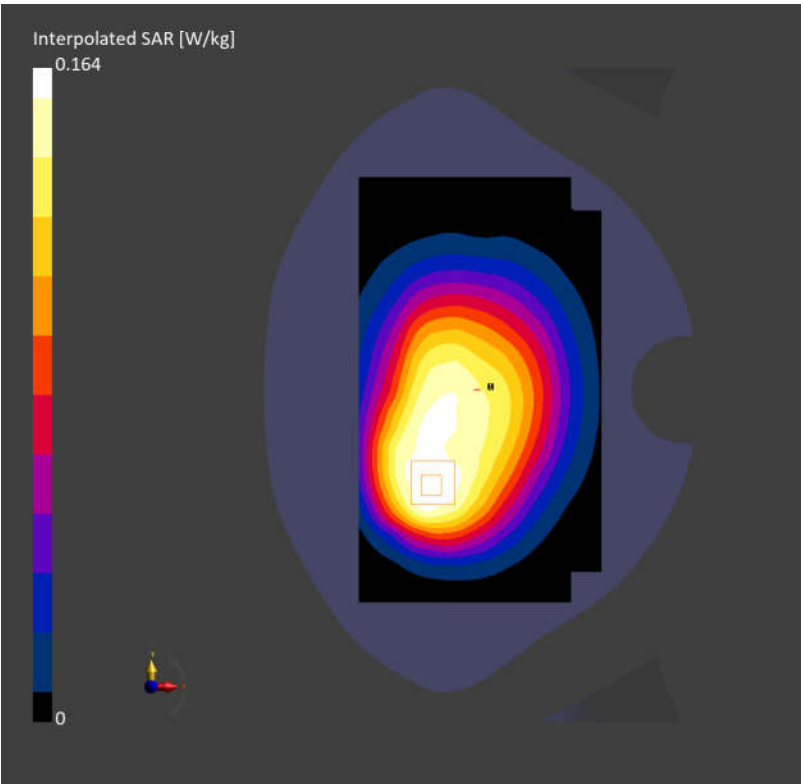


FR1 N12 15M QPSK 36RB22 141500CH Bottom side 0mm

Communication System: Band n12; Frequency: 707.500
Medium: HSL. Medium parameters used: $f=707.500$ MHz; $\sigma=0.863$ S/m; $\epsilon_r=41.7$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.968 W/kg; SAR (10g) = 0.504 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 1.26 W/kg; SAR (10g) = 0.440 W/kg;
M2/M1 [%] 51.8
Dist 3dB Peak [mm] 6.7

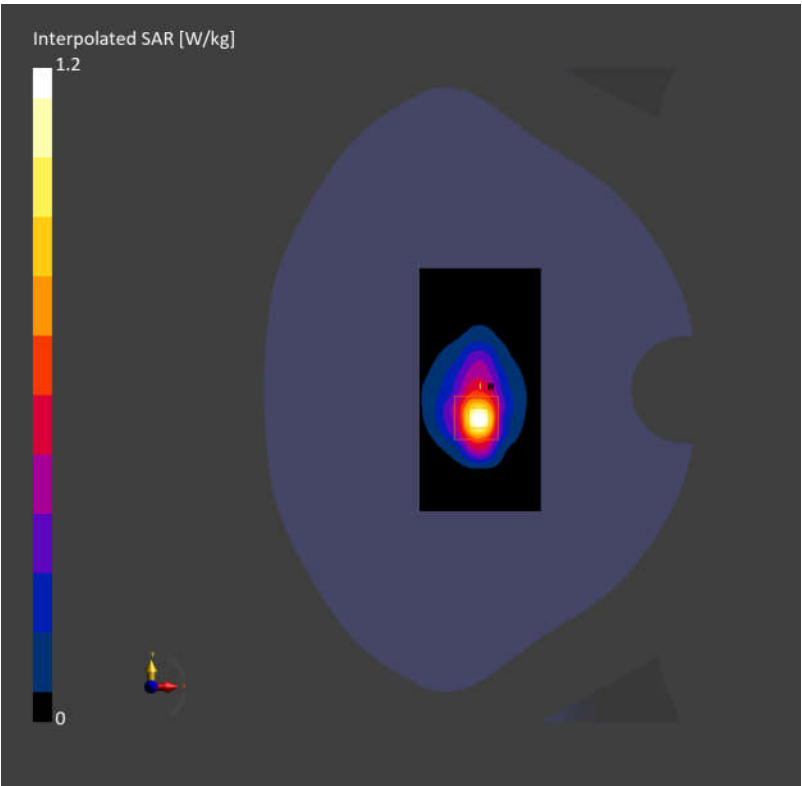


FR1 N13 10M QPSK 25RB14 156400CH Right cheek

Communication System: Band n13; Frequency: 782.000
Medium: HSL. Medium parameters used: $f=782.000$ MHz; $\sigma=0.896$ S/m; $\epsilon_r=41.2$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.096 W/kg; SAR (10g) = 0.067 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.099 W/kg; SAR (10g) = 0.079 W/kg;
M2/M1 [%] 92.1
Dist 3dB Peak [mm] 18.7

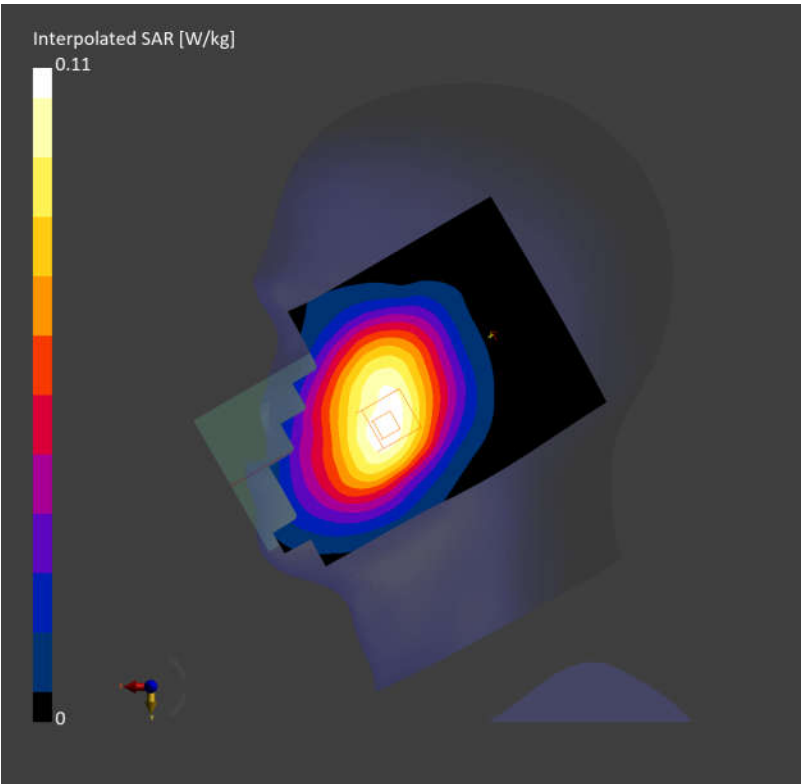

FR1 N13 10M QPSK 25RB14 156400CH Back side 10mm

Communication System: Band n13; Frequency: 782.000

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 41.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.193 W/kg; SAR (10g) = 0.125 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB


SAR (1g) = 0.227 W/kg; SAR (10g) = 0.172 W/kg;

M2/M1 [%]

89.3

Dist 3dB Peak [mm]

> 15.0

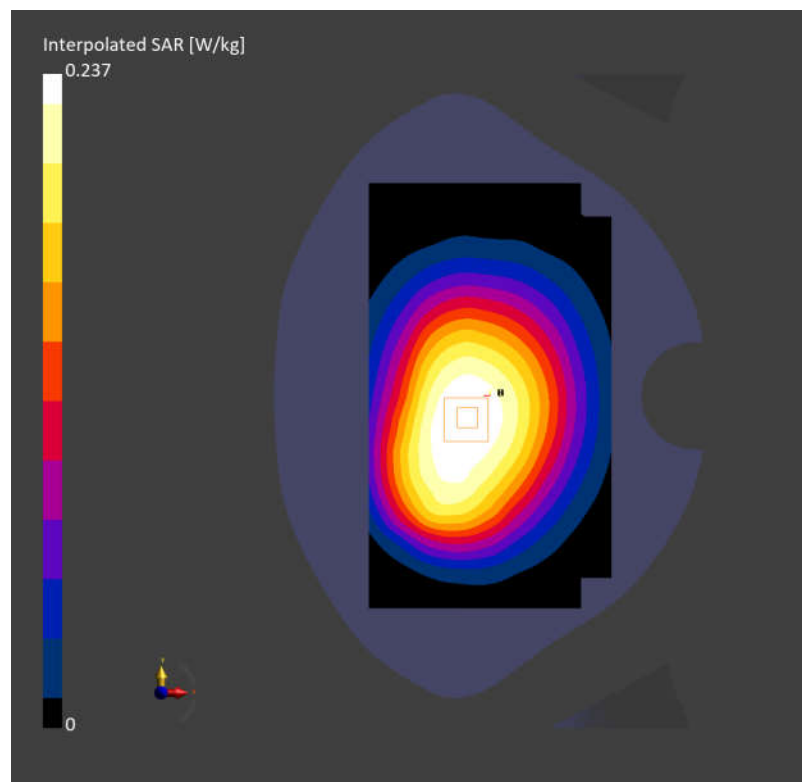


FR1 N13 10M QPSK 25RB14 156400CH Back side 10mm

Communication System: Band n13; Frequency: 782.000
Medium: HSL. Medium parameters used: $f=782.000$ MHz; $\sigma=0.896$ S/m; $\epsilon_r=41.2$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.156 W/kg; SAR (10g) = 0.110 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.162 W/kg; SAR (10g) = 0.115 W/kg;
M2/M1 [%] 84.9
Dist 3dB Peak [mm] 24.8

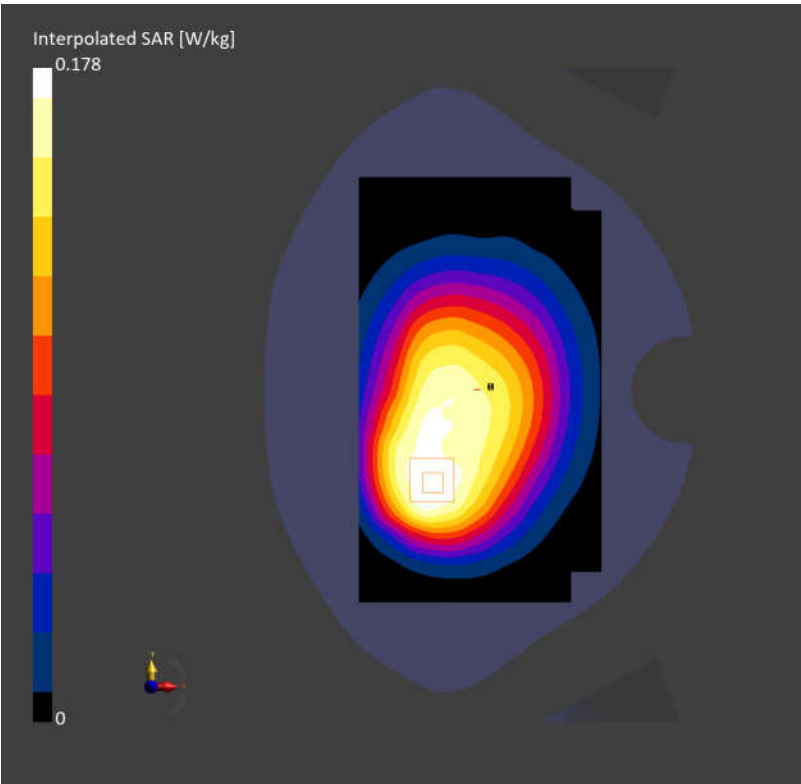


FR1 N13 10M QPSK 25RB14 156400CH Bottom side 0mm

Communication System: Band n13; Frequency: 782.000
Medium: HSL. Medium parameters used: $f=782.000$ MHz; $\sigma=0.896$ S/m; $\epsilon_r=41.2$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.975 W/kg; SAR (10g) = 0.504 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 1.31 W/kg; SAR (10g) = 0.453 W/kg;
M2/M1 [%] 50.8
Dist 3dB Peak [mm] 6.8

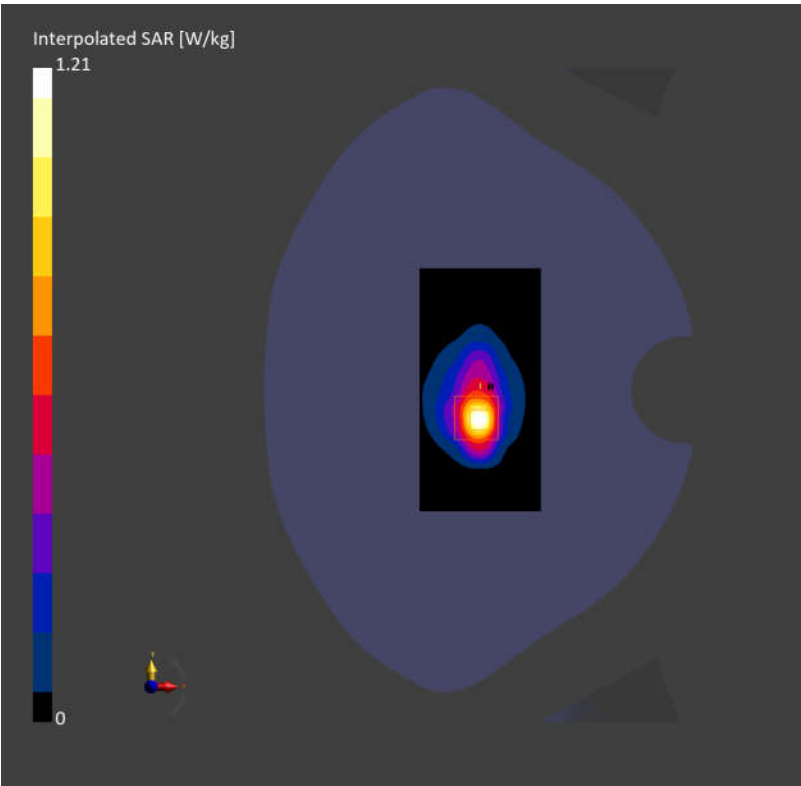

FR1 N14 10M QPSK 25RB14 158600CH Right cheek

Communication System: Band n14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.097 W/kg; SAR (10g) = 0.067 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.09 dB


SAR (1g) = 0.10 W/kg; SAR (10g) = 0.079 W/kg;

M2/M1 [%]

75.0

Dist 3dB Peak [mm]

17.4

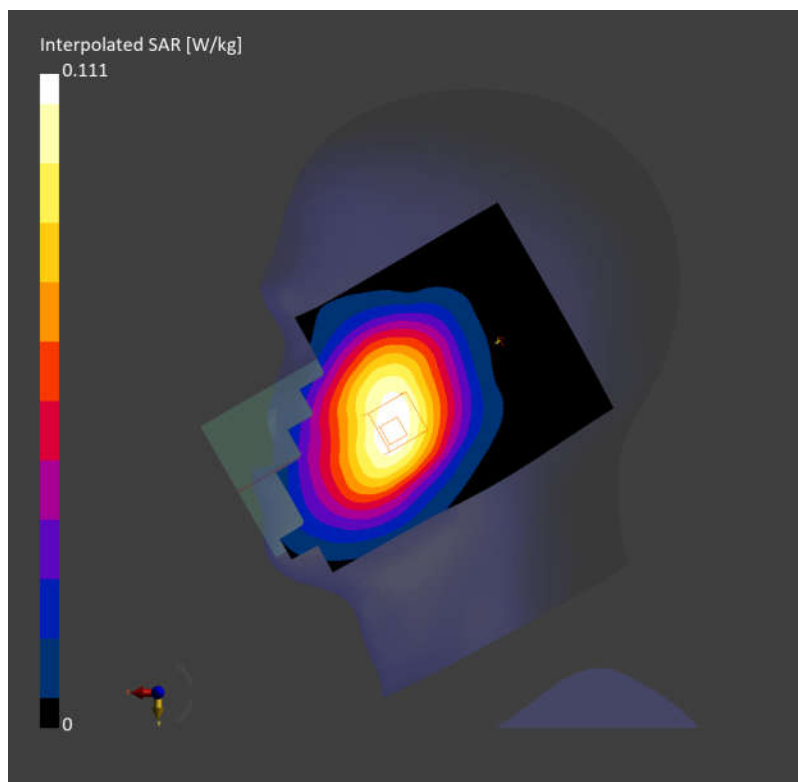

FR1 N14 10M QPSK 25RB14 158600CH Back side 10mm

Communication System: Band n14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.199 W/kg; SAR (10g) = 0.139 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.11 dB


SAR (1g) = 0.225 W/kg; SAR (10g) = 0.171 W/kg;

M2/M1 [%]

88.8

Dist 3dB Peak [mm]

> 15.0

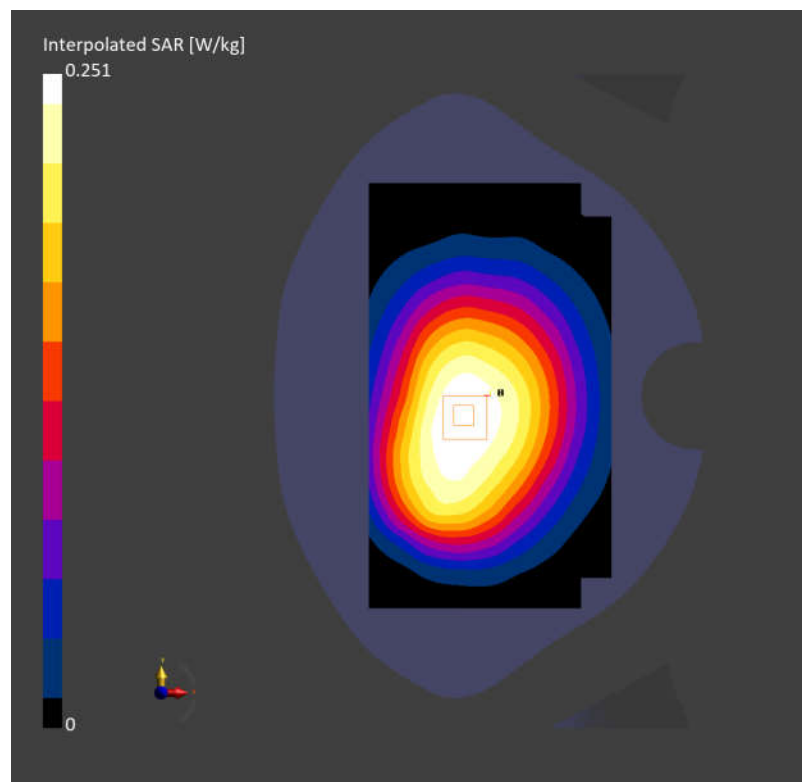


FR1 N14 10M QPSK 25RB14 158600CH Back side 10mm

Communication System: Band n14; Frequency: 793.000
Medium: HSL. Medium parameters used: $f=793.000$ MHz; $\sigma=0.904$ S/m; $\epsilon_r=41.1$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.158 W/kg; SAR (10g) = 0.112 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.14 dB
SAR (1g) = 0.167 W/kg; SAR (10g) = 0.118 W/kg;
M2/M1 [%] 84.2
Dist 3dB Peak [mm] 24.7

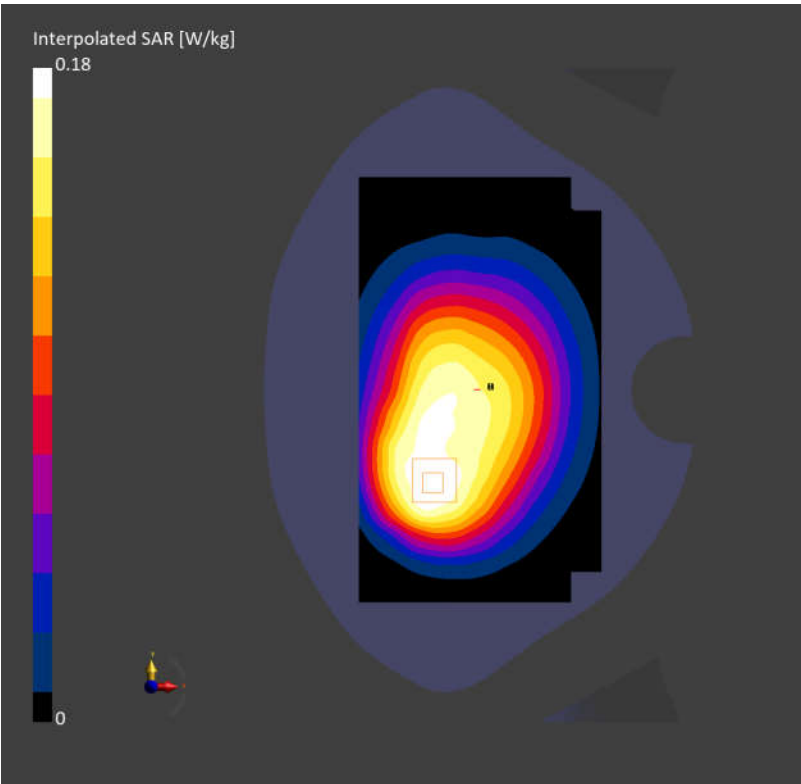

FR1 N14 10M QPSK 25RB14 158600CH Bottom side 0mm

Communication System: Band n14; Frequency: 793.000

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.27, 9.27, 9.27); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.640 W/kg; SAR (10g) = 0.361 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB


SAR (1g) = 1.25 W/kg; SAR (10g) = 0.432 W/kg;

M2/M1 [%]

58.9

Dist 3dB Peak [mm]

6.5

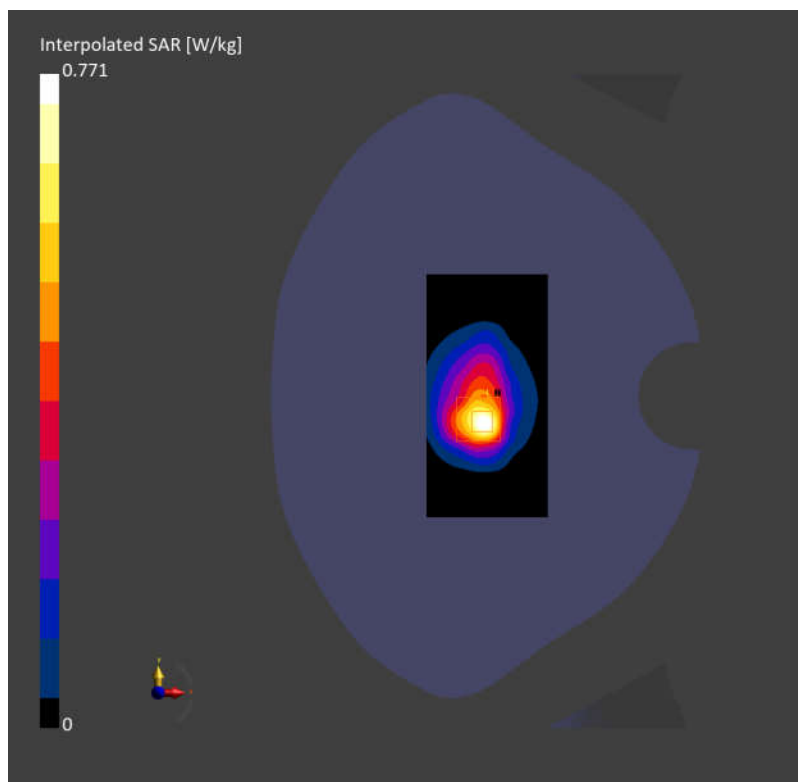

FR1 N25 40M QPSK 108RB54 376500CH Left cheek

Communication System: Band n25; Frequency: 1882.500

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.145 W/kg; SAR (10g) = 0.085 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB


SAR (1g) = 0.150 W/kg; SAR (10g) = 0.096 W/kg;

M2/M1 [%]

88.6

Dist 3dB Peak [mm]

13.3

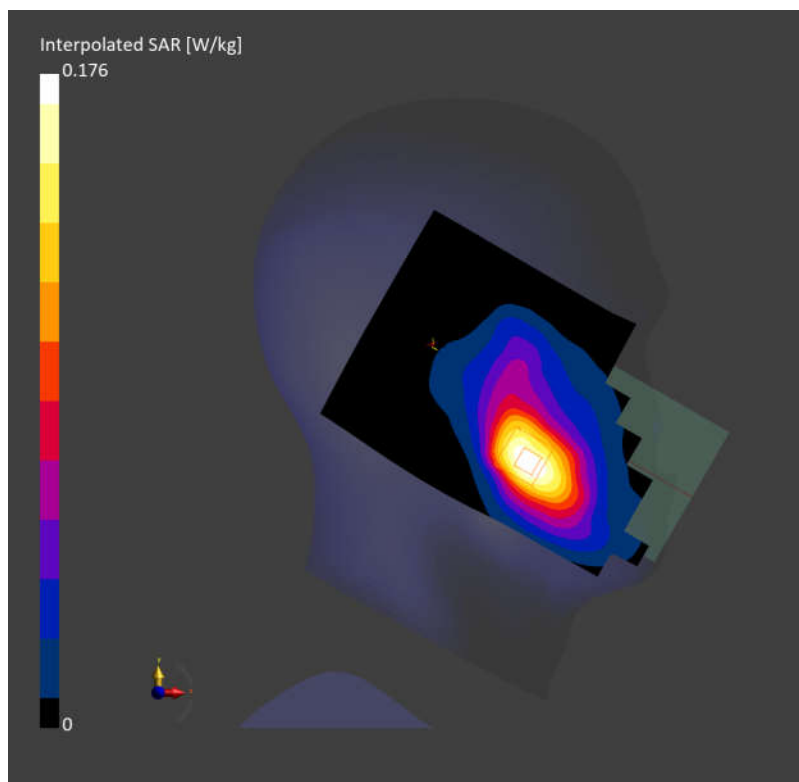

FR1 N25 40M QPSK 108RB54 376500CH Back side 10mm

Communication System: Band n25; Frequency: 1882.500

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.286 W/kg; SAR (10g) = 0.187 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB


SAR (1g) = 0.302 W/kg; SAR (10g) = 0.213 W/kg;

M2/M1 [%]

84.5

Dist 3dB Peak [mm]

> 15.0

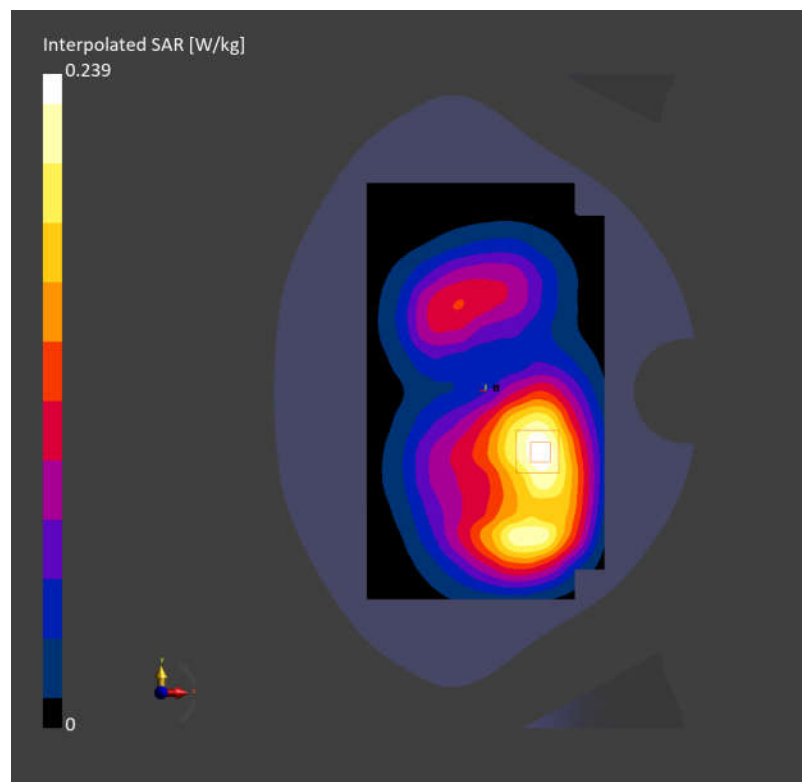


FR1 N25 40M QPSK 108RB54 376500CH Left side 10mm

Communication System: Band n25; Frequency: 1882.500
Medium: HSL. Medium parameters used: $f=1882.500$ MHz; $\sigma=1.37$ S/m; $\epsilon_r=40.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.327 W/kg; SAR (10g) = 0.197 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.384 W/kg; SAR (10g) = 0.219 W/kg;
M2/M1 [%] 81.0
Dist 3dB Peak [mm] 10.8

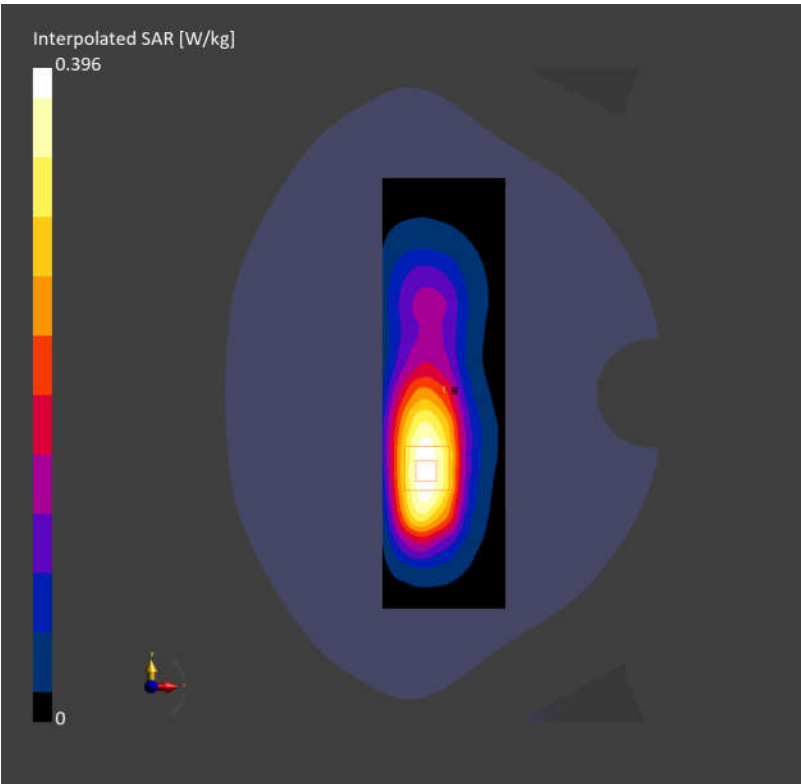


FR1 N25 40M QPSK 108RB54 376500CH Left side 0mm

Communication System: Band n25; Frequency: 1882.500
Medium: HSL. Medium parameters used: $f=1882.500$ MHz; $\sigma=1.37$ S/m; $\epsilon_r=40.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.84, 7.84, 7.84); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 2.94 W/kg; SAR (10g) = 1.61 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 5.80 W/kg; SAR (10g) = 2.29 W/kg;
M2/M1 [%] 72.0
Dist 3dB Peak [mm] 6.6

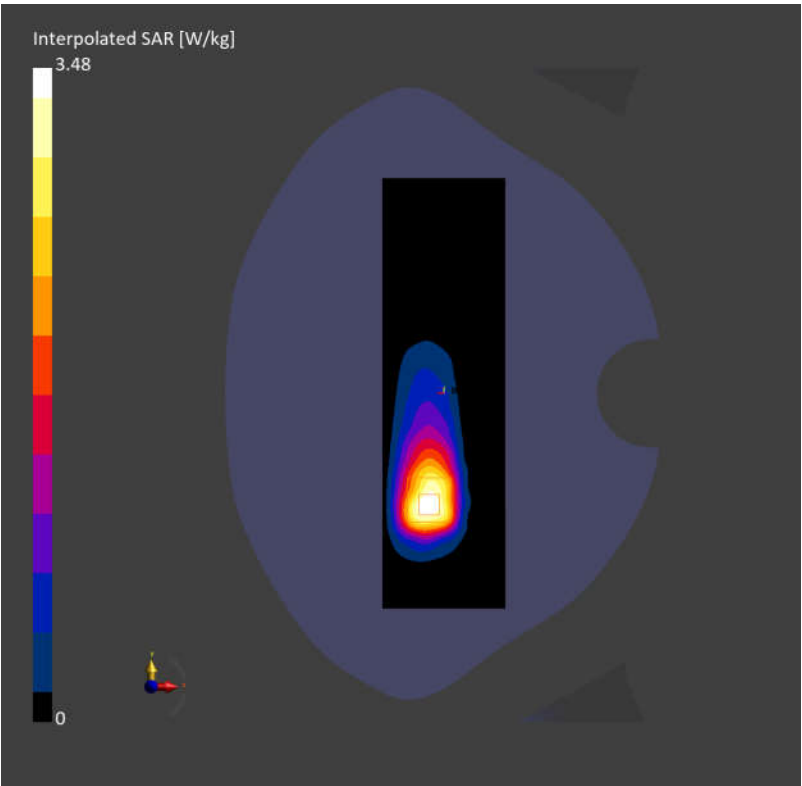

FR1 N26 20M QPSK 50RB28 166300CH Right cheek

Communication System: Band n26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 41.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.115 W/kg; SAR (10g) = 0.080 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB


SAR (1g) = 0.120 W/kg; SAR (10g) = 0.095 W/kg;

M2/M1 [%]

92.7

Dist 3dB Peak [mm]

19.8

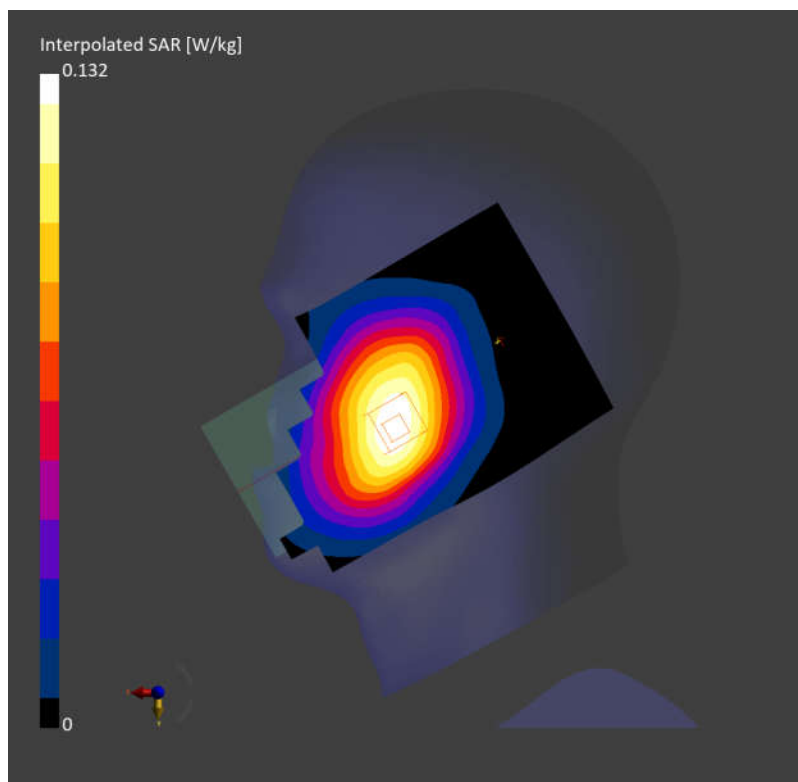

FR1 N26 20M QPSK 50RB28 166300CH Back side 10mm

Communication System: Band n26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 41.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.029 W/kg; SAR (10g) = 0.016 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.12 dB


SAR (1g) = 0.036 W/kg; SAR (10g) = 0.017 W/kg;

M2/M1 [%]

88.8

Dist 3dB Peak [mm]

> 15.0

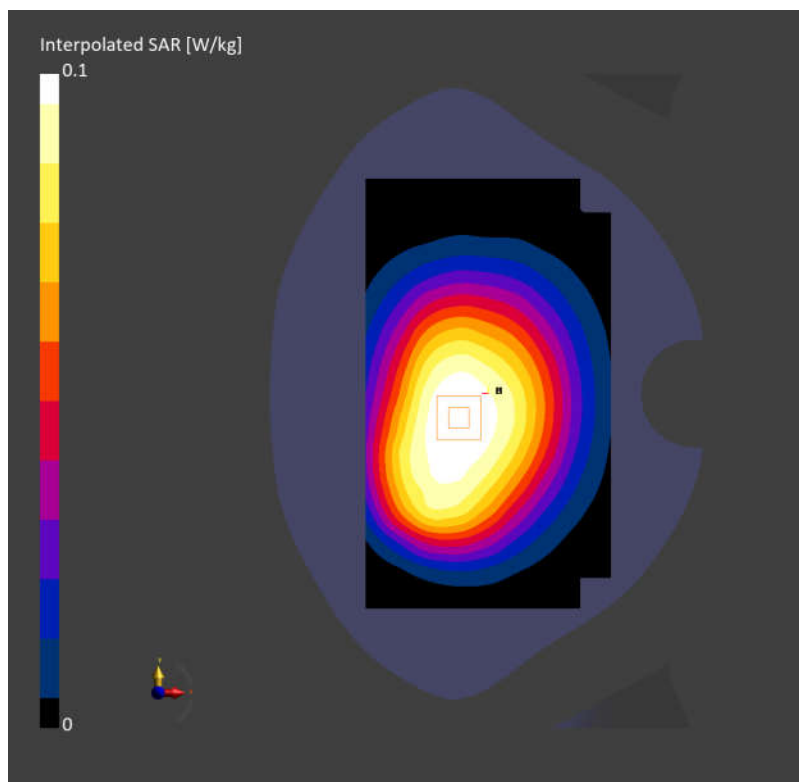

FR1 N26 20M QPSK 50RB28 166300CH Right side 10mm

Communication System: Band n26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 41.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.025 W/kg; SAR (10g) = 0.017 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB


SAR (1g) = 0.026 W/kg; SAR (10g) = 0.018 W/kg;

M2/M1 [%]

88.4

Dist 3dB Peak [mm]

> 15.0

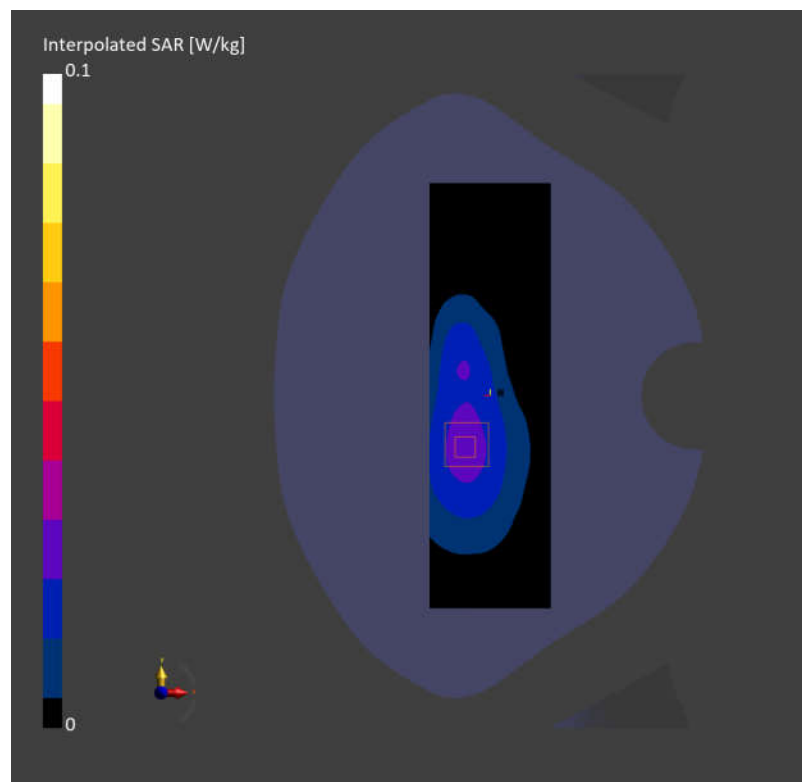


FR1 N26 20M QPSK 50RB28 166300CH Bottom side 0mm

Communication System: Band n26; Frequency: 831.500
Medium: HSL. Medium parameters used: $f=831.500$ MHz; $\sigma=0.883$ S/m; $\epsilon_r=41.0$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(9.07, 9.07, 9.07); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.376 W/kg; SAR (10g) = 0.218 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.06 dB
SAR (1g) = 0.659 W/kg; SAR (10g) = 0.232 W/kg;
M2/M1 [%] 51.9
Dist 3dB Peak [mm] 6.2

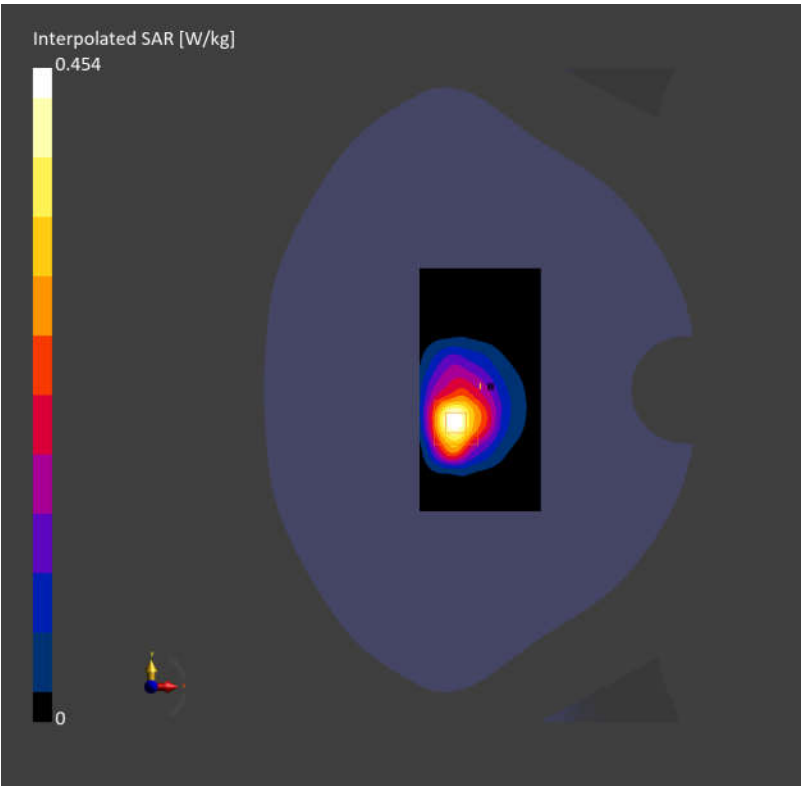

FR1 N41 100M QPSK 135RB69 518598CH Left cheek

Communication System: Band n41; Frequency: 2592.990
Medium: HSL. Medium parameters used: $f=2592.990$ MHz; $\sigma=1.93$ S/m; $\epsilon_r=38.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN3801; ConvF(7.25, 7.25, 7.25); Calibrated: 2024-06-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1826; Calibrated: 2025-02-17
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.429 W/kg; SAR (10g) = 0.237 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.451 W/kg; SAR (10g) = 0.259 W/kg;
M2/M1 [%] 83.4
Dist 3dB Peak [mm] 11.2

