



# TEST REPORT



Report No. : KES-RF250556

Page 1 / 72

**KES Co., Ltd.**

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu,  
Anyang-si, Gyeonggi-do, 14057, Republic of Korea  
Tel : +82-31-425-6200, Fax : +82-31-341-3838

## ■ FCC & IC TEST REPORT

### 1. Client

- Name : Hanwha Vision Co., Ltd.
- Address : 6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, South Korea

### 2. Sample Description

- Product item : Rugged Body Worn Camera
- Model name : TWC-S6010
- Manufacturer etc. : 1. HANWHA VISION VIETNAM COMPANY LIMITED  
2. D-TECH CO.,LTD.

3. Date of test : 2025.06.27 ~ 2025.07.29

4. Location of Test :  Permanent Testing Lab  On Site Testing  
○ Address : 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea

5. Test method used : Part 15 Subpart C 15.247,  
RSS-247 (Issue 4) & RSS-Gen (Issue 5)

6. Test result : PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This laboratory is not accredited for the test results marked \*.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager	
	Name : Gu-Bong, Kang (Signature)	Name : Yeong-Jun Cho (Signature)	

2025. 08. 27.

**KES Co., Ltd.**

**Accredited by KOLAS, Republic of KOREA**



## REPORT REVISION HISTORY

Date	Test Report No.	Revision History
2025.08.27	KES-RF250556	Initial

*This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.*

### Use of uncertainty of measurement for decisions on conformity (decision rule):

- No decision rule is specified by the standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty("simple acceptance" decision rule, previously known as "accuracy method").
- Other (to be specified, for example when required by the standard or client)



## TABLE OF CONTENTS

1.	General information .....	4
1.1.	EUT description .....	4
1.2.	Test configuration.....	5
1.3.	Information about derivative model .....	5
1.4.	Accessory information .....	5
1.5.	Device modifications.....	5
1.6.	Sample calculation .....	6
1.7.	Measurement Uncertainty .....	6
1.8.	Worst case data rate.....	6
1.9.	Frequency/channel operations .....	7
2.	Summary of tests .....	8
3.	Test results .....	9
3.1.	99% Occupied Bandwidth .....	9
3.2.	6 dB bandwidth .....	14
3.3.	Output power .....	19
3.4.	Power spectral density .....	21
3.5.	Radiated restricted band and emissions .....	26
3.6.	Conducted spurious emissions & band edge .....	58
3.7.	AC conducted emissions .....	67
3.8.	Antenna Requirement.....	70
Appendix A.	Measurement equipment.....	71



## 1. General information

Applicant: Hanwha Vision Co., Ltd.  
Applicant address: 6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, South Korea  
Test site: KES Co., Ltd.  
Test site address:  #3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea  
 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea  
Test Facility FCC Accreditation Designation No.: KR0100, Registration No.: 444148  
ISED Registration No.: 23298  
FCC rule part(s): 15.247  
FCC ID: 2BNRG-TWCS6010  
IC rule part(s): RSS-247 (Issue 4), RSS-Gen (Issue 5)  
IC Number: 33572-TWCS6010  
Test device serial No.:  Production  Pre-production  Engineering

### 1.1. EUT description

Equipment under test Rugged Body Worn Camera  
Frequency range & Number of channels 2 402 MHz ~ 2 480 MHz (BDR/EDR) : 79 ch  
**2 402 MHz ~ 2 480 MHz (LE 1 Mbps) : 40 ch**  
**2 412 MHz ~ 2 462 MHz (802.11b/g/n\_HT20) : 11 ch**  
UNII-1 (FCC only) 5 180 MHz ~ 5 240 MHz (802.11a/n\_HT20/ac\_VHT20) : 4 ch  
UNII-2A (FCC only) 5 260 MHz ~ 5 320 MHz (802.11a/n\_HT20/ac\_VHT20) : 4 ch  
UNII-2C (FCC & IC) 5 500 MHz ~ 5 720 MHz (802.11a/n\_HT20/ac\_VHT20) : 12 ch  
UNII-3 (FCC & IC) 5 745 MHz ~ 5 825 MHz (802.11a/n\_HT20/ac\_VHT20) : 5 ch  
Model TWC-S6010  
Modulation technique **GFSK, π/4DQPSK, 8DPSK, DSSS, OFDM**  
Antenna specification 2.4 GHz band FPCB Antenna // Peak gain: 0.23 dBi  
5.15 ~ 5.35 GHz FPCB Antenna // Peak gain: 2.07 dBi  
5.47 ~ 5.85 GHz FPCB Antenna // Peak gain: 2.52 dBi  
Power source DC 3.8 V (Battery)  
H/W version PV2  
S/W version 25.00.58\_250626\_155221  
Serial Number ZWD370GY40003GT



## 1.2. Test configuration

The Hanwha Vision Co., Ltd. // Rugged Body Worn Camera // TWC-S6010 // FCC ID: 2BNGR-TWCS6010 // IC Number: 33572-TWCS6010 was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.247

IC RSS-247 Issue 4 and RSS-Gen Issue 5

KDB 558074 D01 v05 r02

ANSI C63.10-2013

## 1.3. Information about derivative model

N/A

## 1.4. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
Docking station (optional)	-	TWA-SD010	-	DC 12 V
Docking station (optional)	-	TWA-SD080	-	DC 12 V
Battery Pack (optional)		TWASB42500	-	-

## 1.5. Device modifications

N/A



## 1.6. Sample calculation

Where relevant, the following sample calculation is provided  
For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 0.82 + 20 = 20.82 \text{ (dB)}\end{aligned}$$

For Radiation test :

Field strength level (dB $\mu$ V/m) = Measured level (dB $\mu$ V) + Antenna factor (dB) + Cable loss (dB) – Amplifier gain (dB)

## 1.7. Measurement Uncertainty

Test Item	Uncertainty	
Uncertainty for Conduction emission test	2.22 dB ( SHIELD ROOM #6 )	
Uncertainty for Radiation emission test (include Fundamental emission)	Below 1 GHz	4.04 dB ( SAC #6 )
	Above 1 GHz	5.32 dB ( SAC #5 )
Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

## 1.8. Worst case data rate

1. Worst-case data rates were:

Mode	Data rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n_HT20	MCS0

**1.9. Frequency/channel operations**

Ch.	Frequency (MHz)	Rate(Mbps)
00	2 402	BDR 1 Mbps, EDR 2 Mbps, EDR 3 Mbps
:	:	:
40	2 442	BDR 1 Mbps, EDR 2 Mbps, EDR 3 Mbps
:	:	:
78	2 480	BDR 1 Mbps, EDR 2 Mbps, EDR 3 Mbps

Ch.	Frequency (MHz)	Rate(Mbps)
00	2 402	LE 1 Mbps
:	:	:
20	2 442	LE 1 Mbps
:	:	:
39	2 480	LE 1 Mbps

Ch.	Frequency (MHz)	Mode
1	2 412	802.11b/g/n_HT20
:	:	:
6	2 437	802.11b/g/n_HT20
:	:	:
11	2 462	802.11b/g/n_HT20

**UNII-1 (FCC only)**

Ch.	Frequency (MHz)
36	5 180
44	5 220
48	5 240

**UNII-2A (FCC only)**

Ch.	Frequency (MHz)
52	5 260
56	5 280
64	5 320

**UNII-2C (FCC & IC)**

Ch.	Frequency (MHz)
100	5 500
120	5 600
144	5 720

**UNII-3 (FCC & IC)**

Ch.	Frequency (MHz)
149	5 745
157	5 785
165	5 825

802.11a/n\_HT20/ac\_VHT20 mode



## 2. Summary of tests

Section in FCC Part 15	Section in RSS-247 & Gen	Test description	Test results
-	RSS-Gen 6.7	99% Occupied Bandwidth	Pass
15.247(a)(2)	RSS-247 6.3.1 (a)	6 dB bandwidth	Pass
15.247(b)(3)	RSS-247 6.3.2	Output power	Pass
15.247(e)	RSS-247 6.3.1 (b)	Power spectral density	Pass
15.205, 15.209	RSS-247 6.6 RSS-Gen 8.9,8,10	Radiated restricted band and emission	Pass
15.247(d)	RSS-247 6.6	Conducted spurious emission and band edge	Pass
15.207(a)	RSS-Gen 8.8	AC Conducted emissions	Pass
15.203	-	Antenna Requirement	Pass

**Note.**

1. By the request of applicant, test is performed with power setting value below :

Mode	Frequency (MHz)	Setting value
LE 1 Mbps	2 402 ~ 2 480	Default
802.11b (1 Mbps)		72
802.11g (6 Mbps)	2 412 ~ 2 462	72
802.11n_HT20 (MCS0)		72

2. The EUT does not operate BT and WLAN simultaneously. Therefore, testing for simultaneous operation mode was not performed.




### 3. Test results

#### 3.1. 99% Occupied Bandwidth

##### Test procedure

ANSI C63.10-2013 clause 6.9.2 and 6.9.3

##### Test setup



##### Test setting


1. Span = The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
2. RBW = The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW
3. VBW = shall be approximately three times the RBW
4. Sweep = auto
5. Detector function = Peak
6. Trace = Max hold

##### Limit

None; for reporting purpose only.


**Mode : LE 1 Mbps**

Frequency(MHz)	99% occupied bandwidth(MHz)	Limit(MHz)
2 402	1.05	
2 442	1.05	-
2 480	1.05	

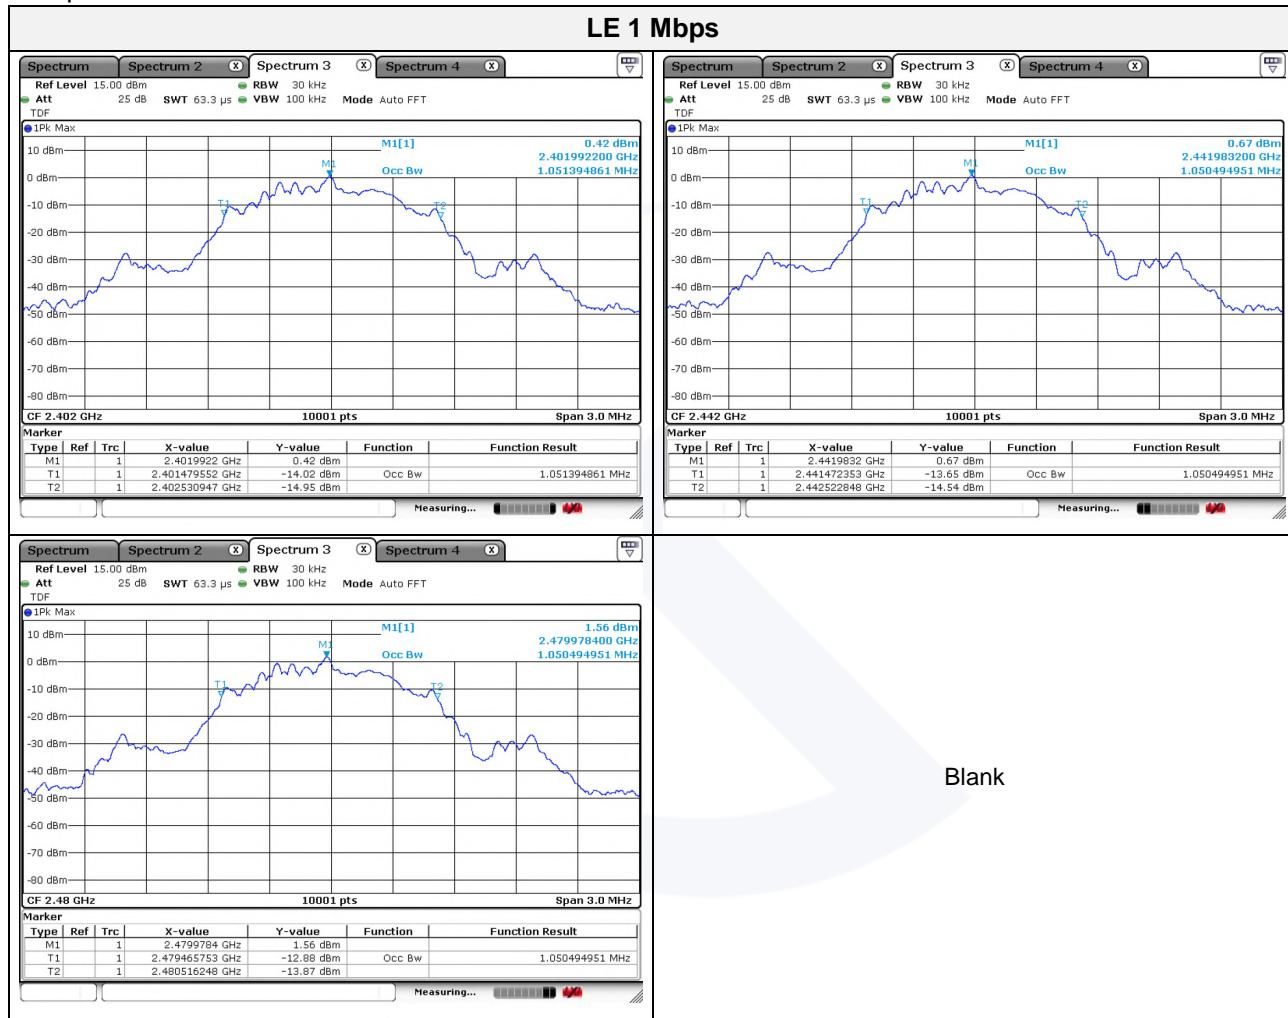**Test plots**

**Mode : 802.11b (1 Mbps)**


Frequency(MHz)	99% occupied bandwidth(MHz)	Limit(MHz)
2 412	11.79	-
2 437	11.84	
2 462	11.83	

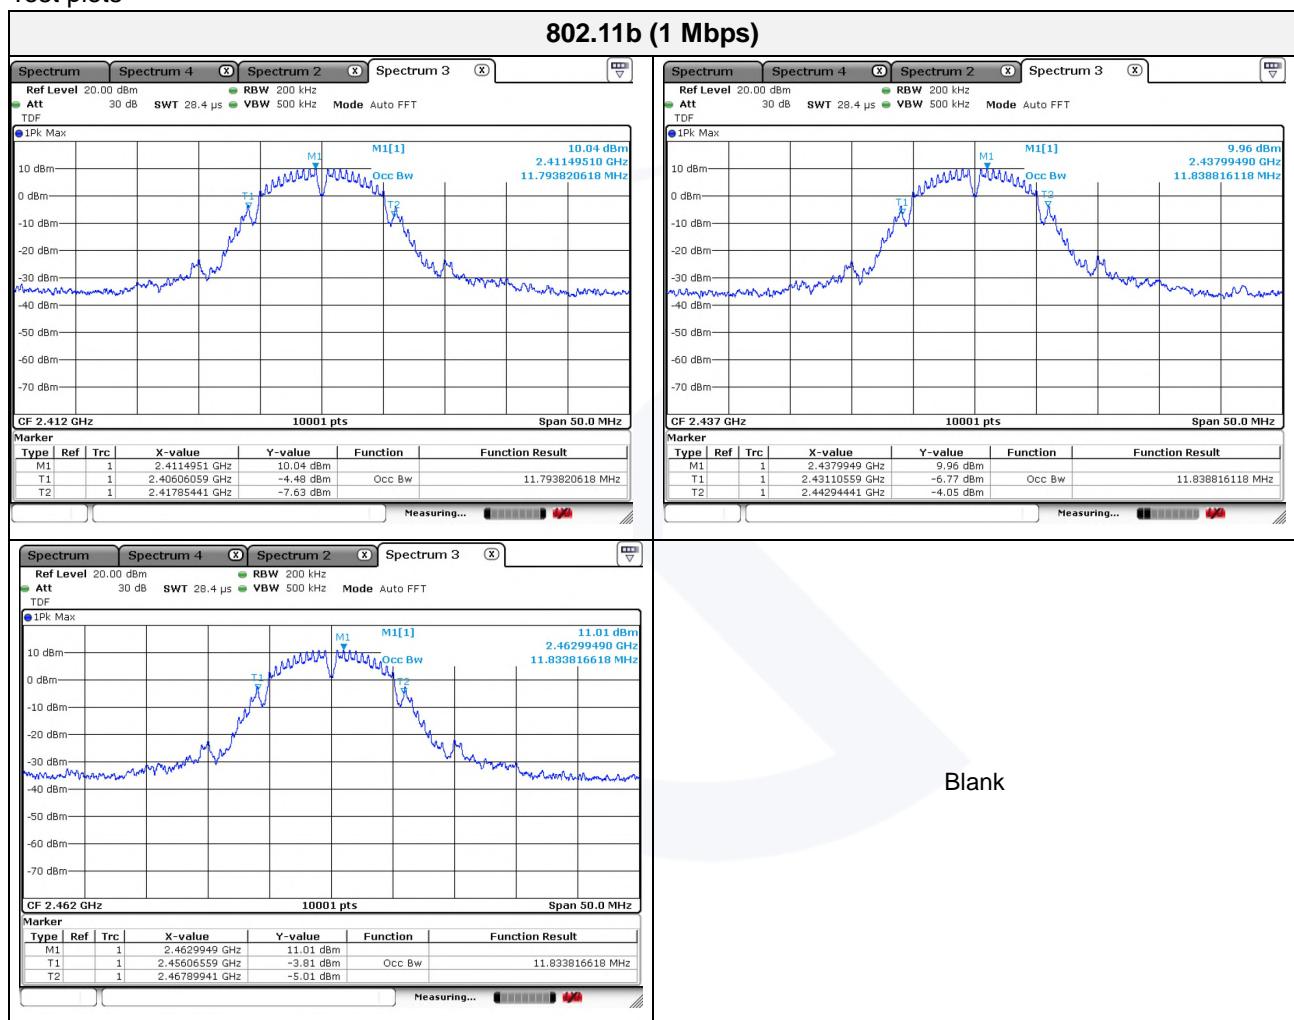**Test plots**

**Mode : 802.11g (6 Mbps)**

Frequency(MHz)	99% occupied bandwidth(MHz)	Limit(MHz)
2 412	16.69	
2 437	16.66	-
2 462	16.67	

## Test plots

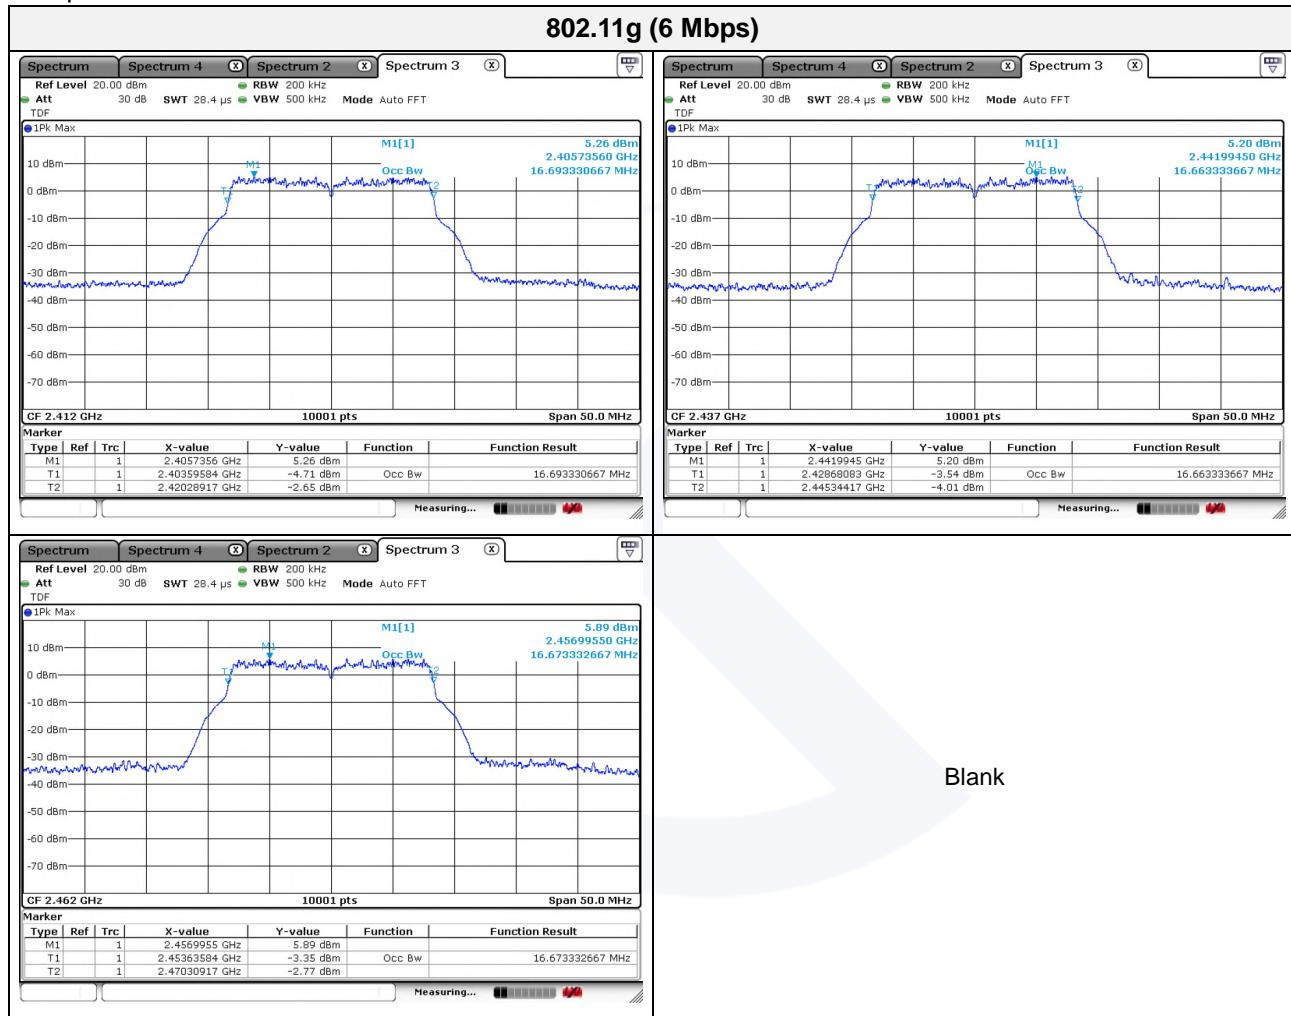

**Mode : 802.11n HT20 (MCS0)**

Frequency(MHz)	99% occupied bandwidth(MHz)	Limit(MHz)
2 412	17.99	
2 437	17.85	-
2 462	17.87	

## Test plots






### 3.2. 6 dB bandwidth

#### Test procedure

ANSI C63.10-2013 - Section 11.8.2

#### Test setup



#### ANSI C63.10-2013 - Section 11.8.2

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq 3 \times$  RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

#### FCC Limit


According to §15.247(a)(2), systems using digital modulation techniques may operate 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### IC Limit

According to § RSS-247 6.3.1 (a), the minimum 6 dB bandwidth shall be 500 kHz.


**Mode : LE 1 Mbps**

Frequency(MHz)	6 dB bandwidth(MHz)	Limit(MHz)
2 402	0.72	$\geq 0.500$
2 442	0.72	
2 480	0.72	

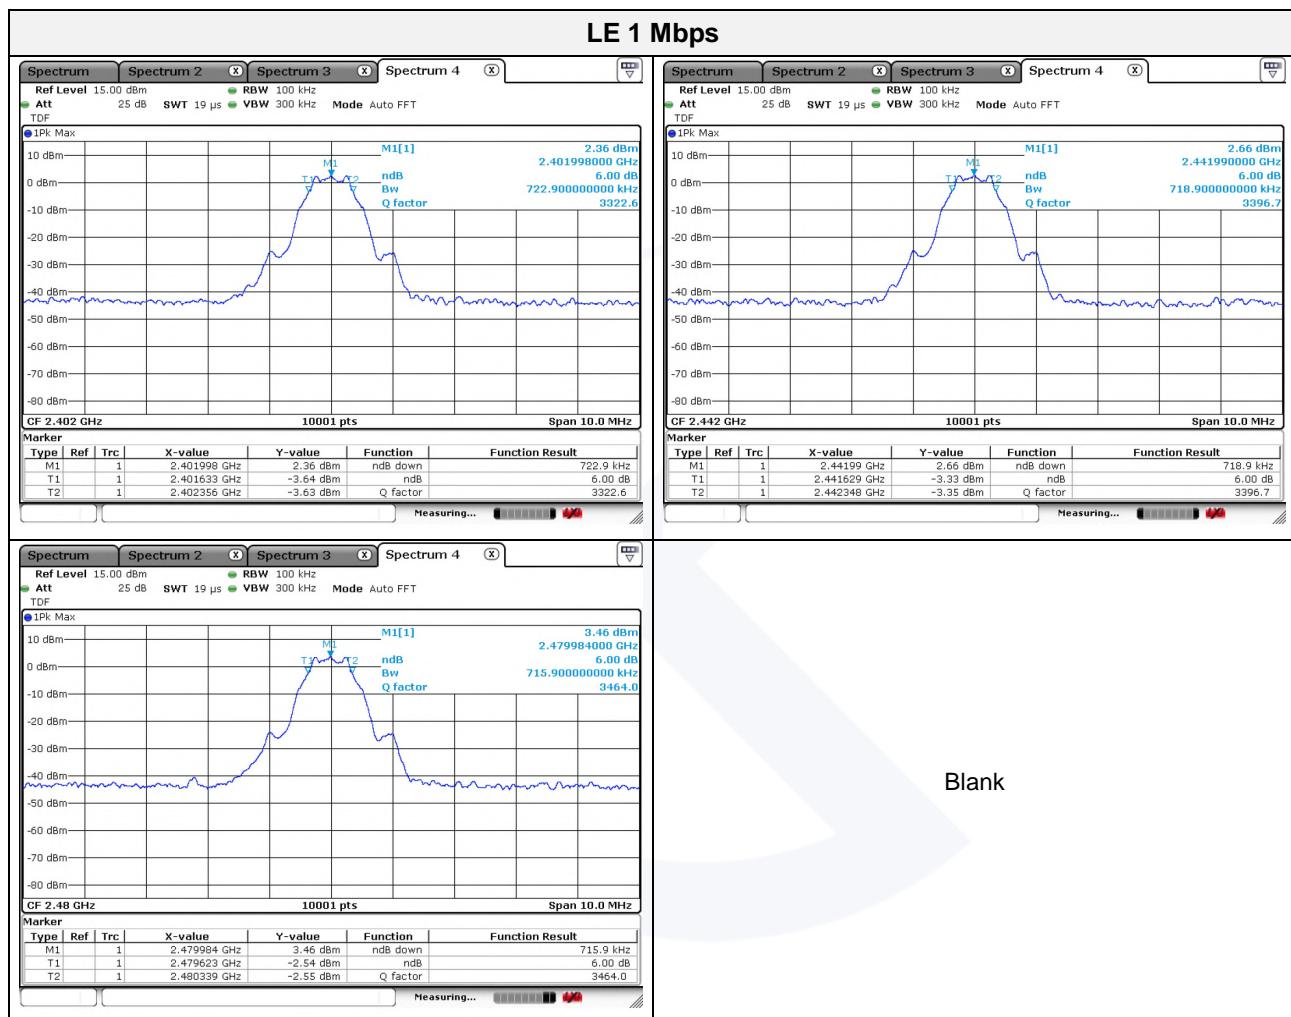


**Mode : 802.11b (1 Mbps)**

Frequency(MHz)	6 dB bandwidth(MHz)	Limit(MHz)
2 412	8.54	$\geq 0.500$
2 437	8.54	
2 462	8.55	

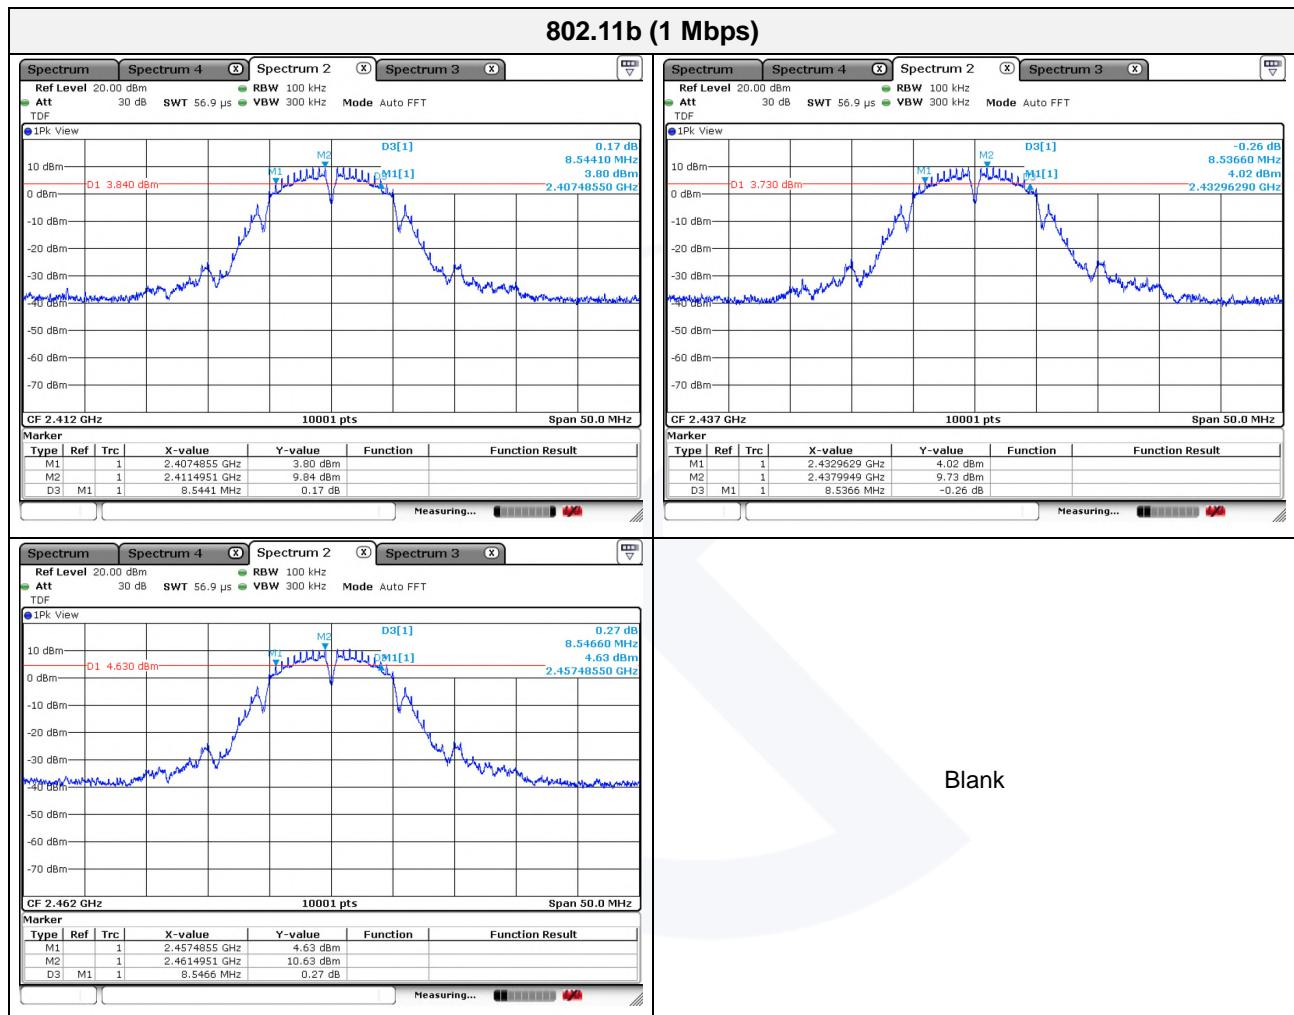


**Mode : 802.11q (6 Mbps)**

Frequency(MHz)	6 dB bandwidth(MHz)	Limit(MHz)
2 412	16.33	$\geq 0.500$
2 437	16.27	
2 462	16.18	

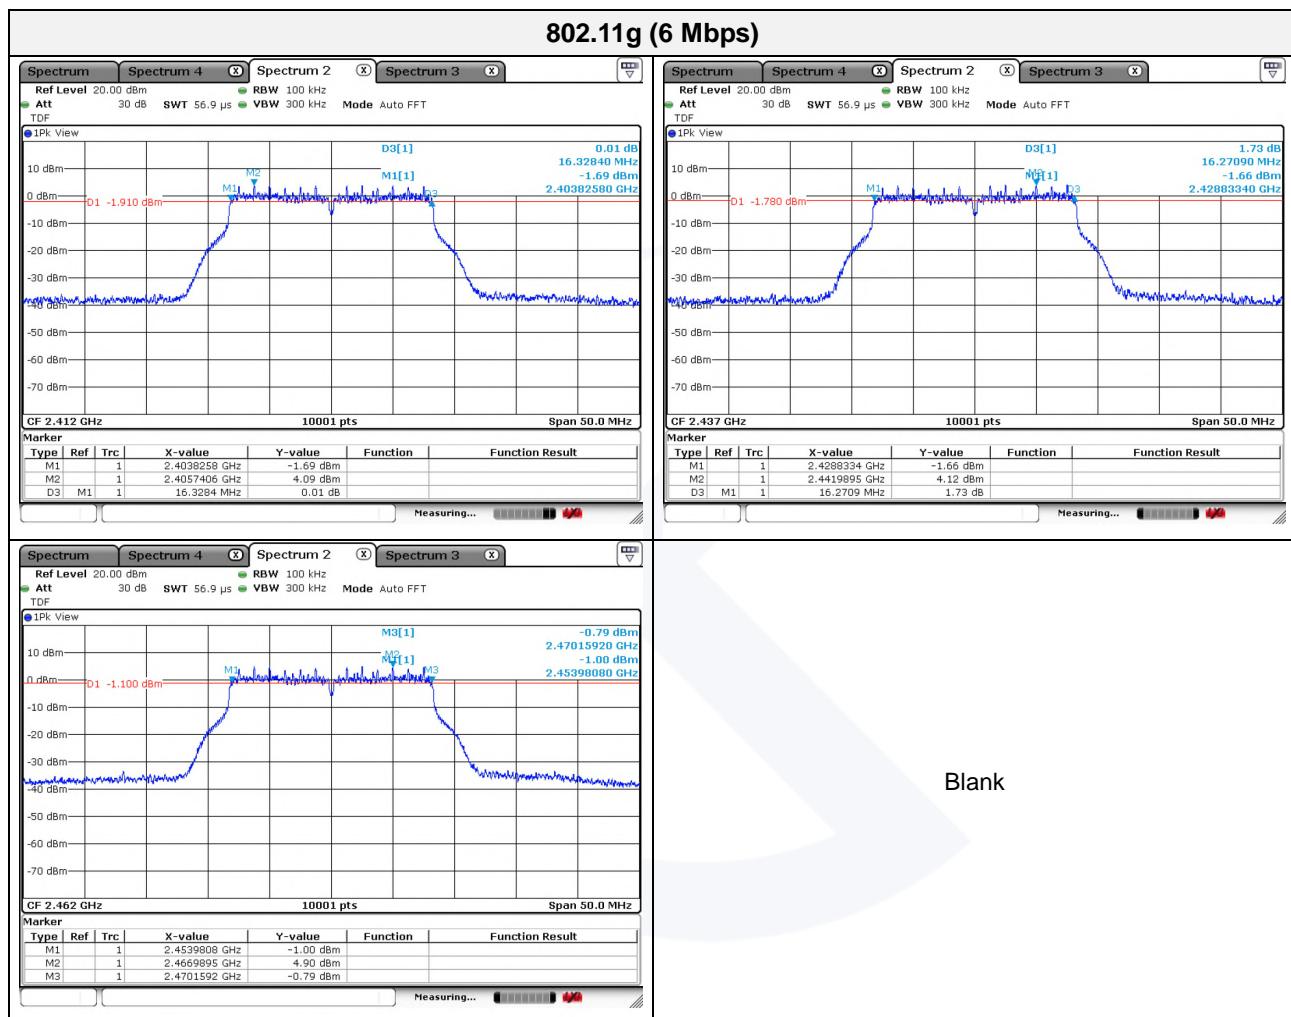

**Mode : 802.11n HT20 (MCS0)**

Frequency(MHz)	6 dB bandwidth(MHz)	Limit(MHz)
2 412	17.51	$\geq 0.500$
2 437	17.52	
2 462	17.57	

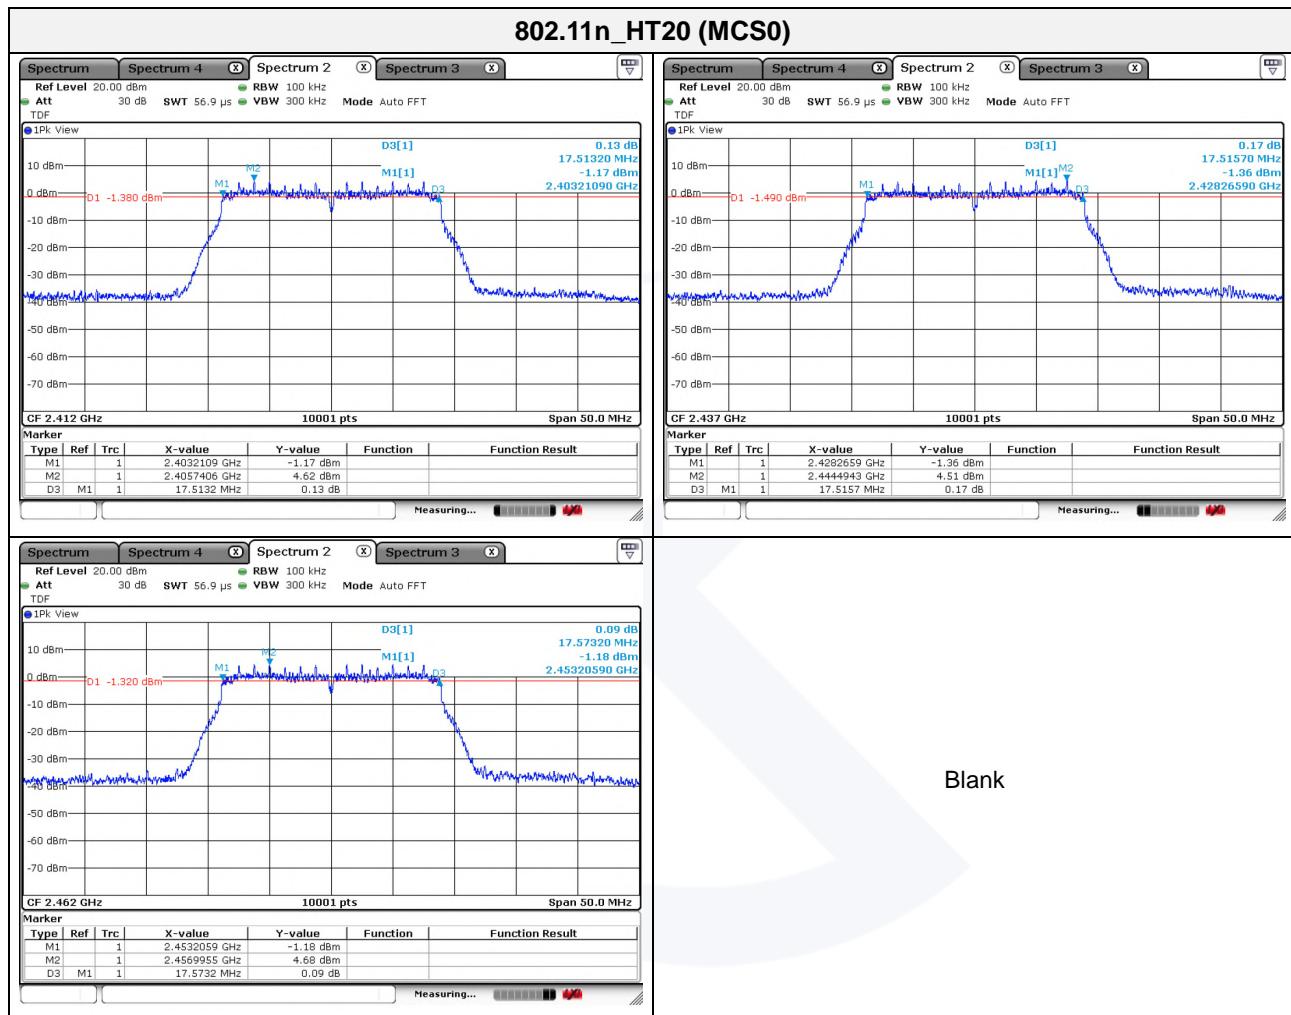




### 3.3. Output power

#### Test procedure

ANSI C63.10-2013 - Section 11.9.1.3 and 11.9.2.3.2

#### Test setup



#### ANSI C63.10-2013 - Section 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

#### ANSI C63.10-2013 - Section 11.9.2.3.2

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

#### FCC Limit

According to §15.247(b)(3), For systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

#### IC Limit

According to § RSS-247 6.3.2, For DTS operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W, and the e.i.r.p. shall not exceed 4 W, except as provided in section 6.5 a) and b).

**Test results**

Mode	2 402 MHz		2 442 MHz		2 480 MHz		Power Limit (dBm)
	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	
LE 1 Mbps	3.97	4.86	4.11	4.99	5.09	5.90	30.00

Mode	2 412 MHz		2 437 MHz		2 462 MHz		Power Limit (dBm)
	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	
802.11b (1 Mbps)	17.09	20.22	17.34	20.51	17.08	20.24	30.00
802.11g (6 Mbps)	15.80	23.73	15.84	23.95	15.81	23.92	
802.11n_HT20 (MCS0)	15.90	23.51	15.85	23.68	15.85	24.26	




### 3.4. Power spectral density

#### Test procedure

ANSI C63.10-2013 - Section 11.10.2

#### Test setup



#### Section 10.2 & ANSI C63.10-2013 - Section 11.10.2

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- d. Set the VBW  $\geq [3 \times \text{RBW}]$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.
- j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

#### FCC Limit


According to §15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### IC Limit

According to § RSS-247 6.3.1 (b), the transmitter power spectral density conducted from the transmitter to the antenna(s) shall not be greater than 8 dBm/3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 6.3.2. The power spectral density shall be determined using the same method as is used to determine the maximum conducted output power.


**Results****Mode : LE 1 Mbps**

Frequency(MHz)	PSD (dBm/3 kHz)	Limit(dBm/3 kHz)
2 402	-11.56	$\leq 8$
2 442	-11.21	
2 480	-10.65	

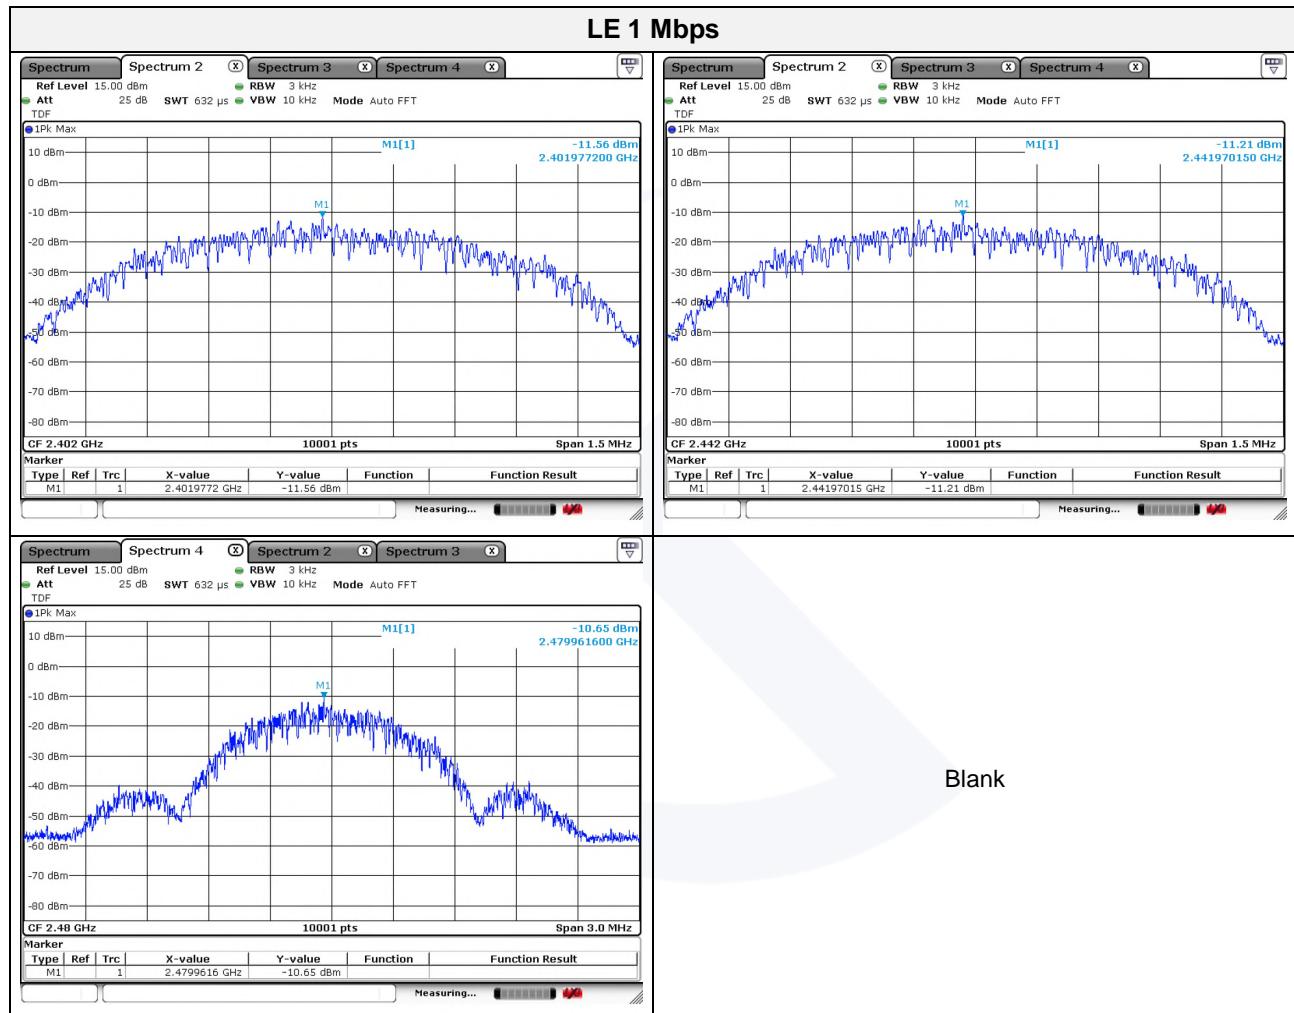


**Mode : 802.11b (1 Mbps)**

Frequency(MHz)	PSD (dBm/3 kHz)	Limit(dBm/3 kHz)
2 412	-3.21	$\leq 8$
2 437	-3.60	
2 462	-3.47	

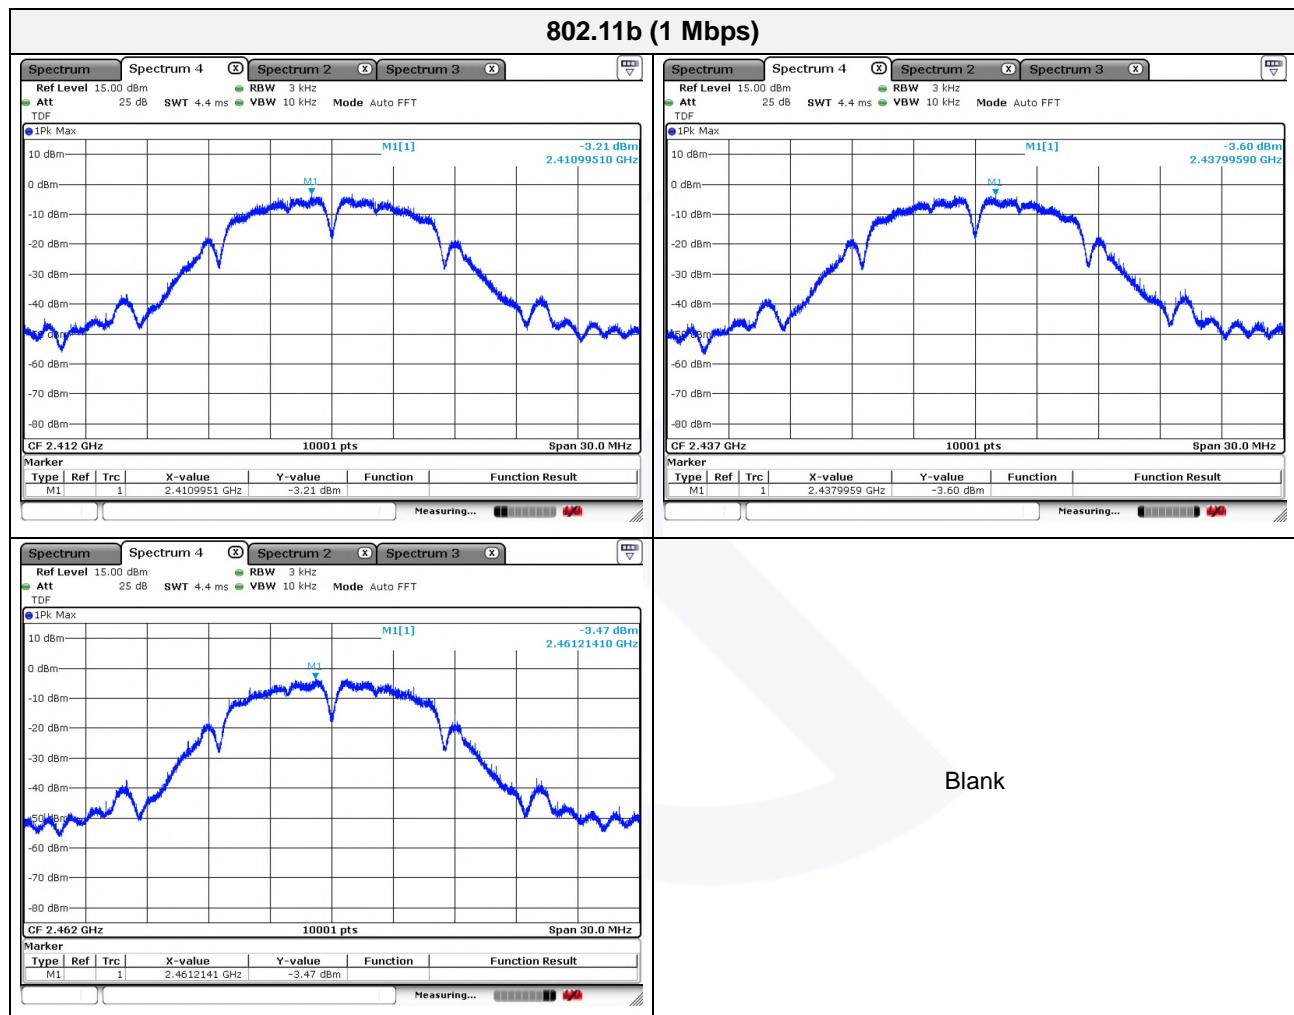

**Mode : 802.11q (6 Mbps)**

Frequency(MHz)	PSD (dBm/3 kHz)	Limit(dBm/3 kHz)
2 412	-8.84	$\leq 8$
2 437	-9.20	
2 462	-8.14	

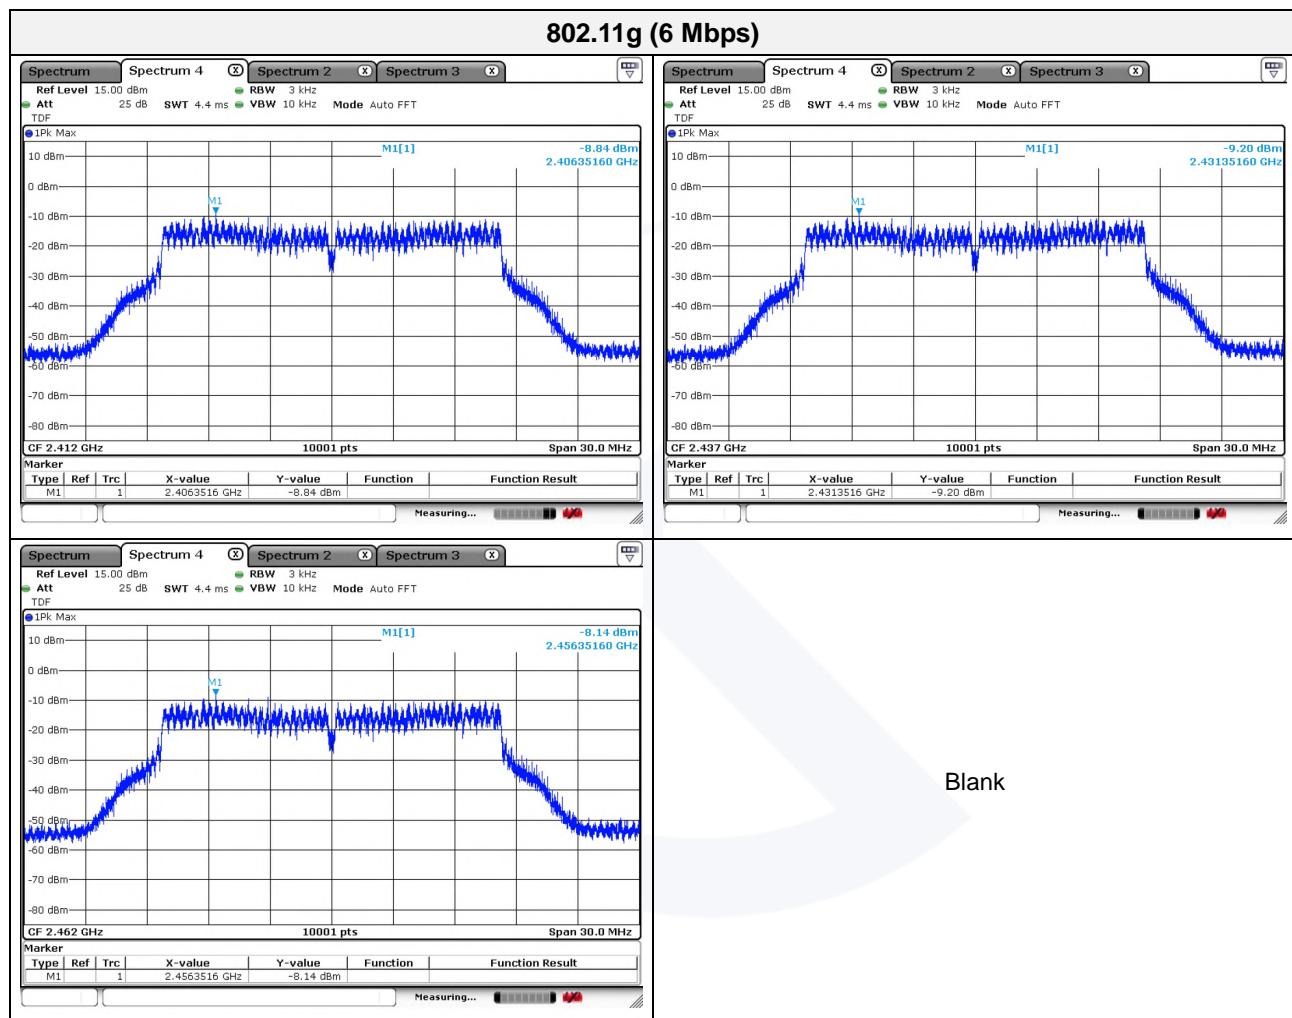

**Mode : 802.11n HT20 (MCS0)**

Frequency(MHz)	PSD (dBm/3 kHz)	Limit(dBm/3 kHz)
2 412	-8.14	$\leq 8$
2 437	-8.95	
2 462	-7.98	







### 3.5. Radiated restricted band and emissions

#### Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

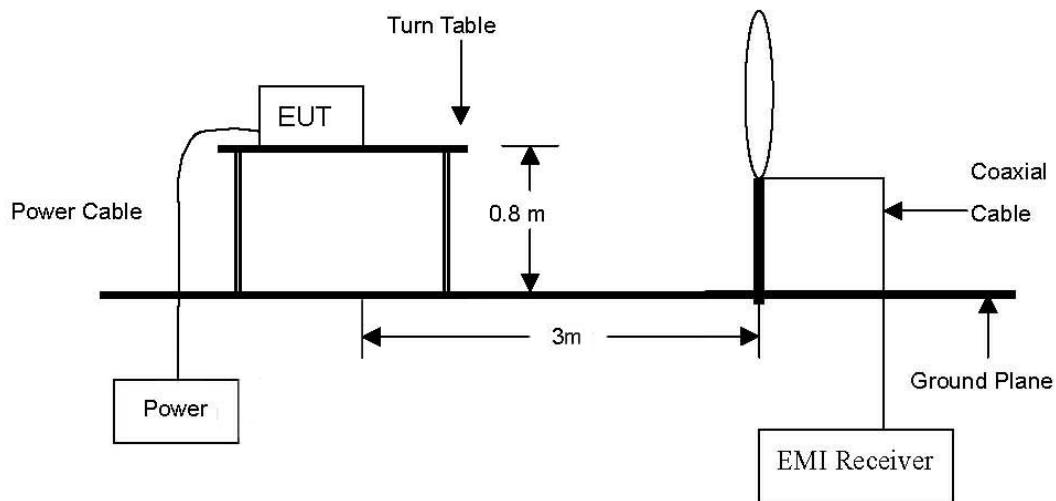


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

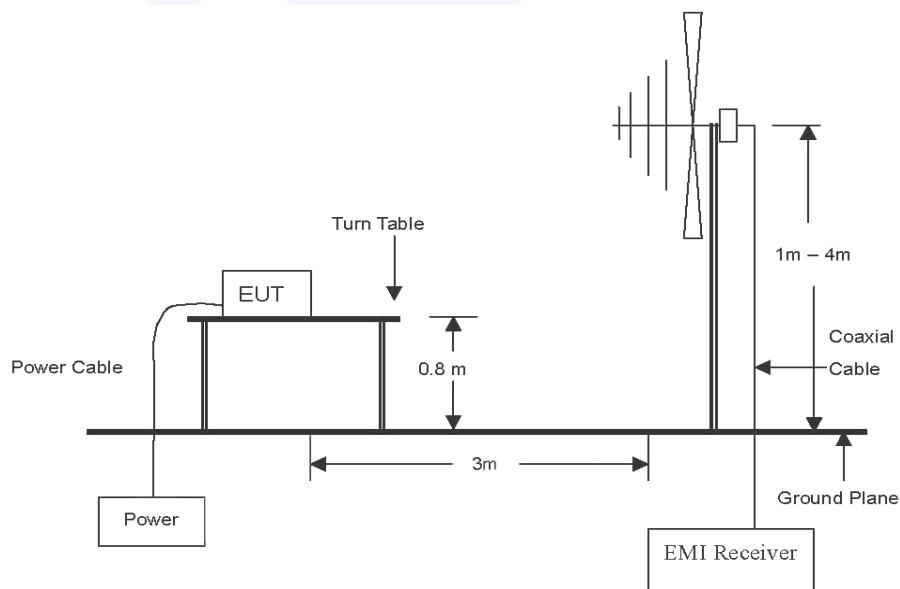



The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

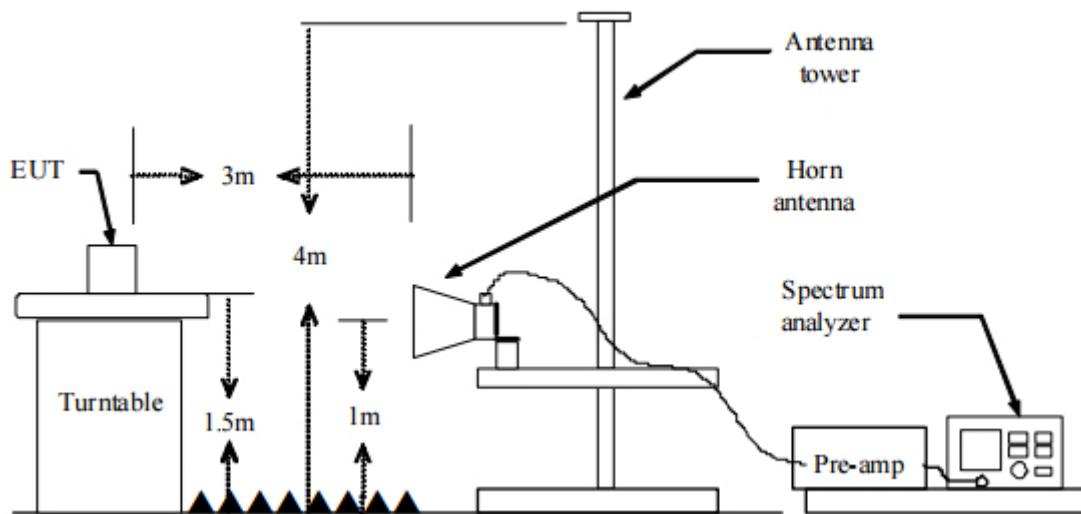

#### Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2013.

#### Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel, ground parallel and perpendicular of the antenna are set to make the measurement. It was determined that parallel was worst-case orientation; therefore, all final radiated testing was performed with the EUT in parallel.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

#### Test procedure above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground for 30 MHz-1 GHz and 1.5 meters for above 1 GHz at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The antenna is a bi-log antenna, a horn antenna, and its height are varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5. Spectrum analyzer settings for  $f < 1 \text{ GHz}$ :

- ① Span = wide enough to fully capture the emission being measured
- ② RBW = 120 kHz
- ③ VBW  $\geq$  RBW
- ④ Detector = quasi peak
- ⑤ Sweep time = auto
- ⑥ Trace = max hold

6. Spectrum analyzer settings for  $f \geq 1 \text{ GHz}$ : Peak

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW  $\geq 3 \text{ MHz}$
- ④ Detector = peak
- ⑤ Sweep time = auto
- ⑥ Trace = max hold
- ⑦ Trace was allowed to stabilize

7. Spectrum analyzer settings for  $f \geq 1 \text{ GHz}$ : Average

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW  $\geq 3 \times \text{RBW}$
- ④ Detector = RMS, if span/(# of points in sweep)  $\leq$  (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- ⑤ Averaging type = power(i.e., RMS)
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- ⑥ Sweep = auto
- ⑦ Trace = max hold
- ⑧ Perform a trace average of at least 100 traces.
- ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is  $10 \log(1/x)$ , where x is the duty cycle.
  - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is  $20 \log(1/x)$ , where x is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

**Note.**

1.  $f < 30 \text{ MHz}$ , extrapolation factor of 40 dB/decade of distance.  $F_d = 40 \log(D_m/D_s)$   
 $f \geq 30 \text{ MHz}$ , extrapolation factor of 20 dB/decade of distance.  $F_d = 20 \log(D_m/D_s)$   
Where:
  - $F_d$  = Distance factor in dB
  - $D_m$  = Measurement distance in meters
  - $D_s$  = Specification distance in meters
2. Field strength(dB $\mu$ V/m) = Level(dB $\mu$ V) + CF (dB) + or DCF(dB)
3. Margin(dB) = Limit(dB $\mu$ V/m) - Field strength(dB $\mu$ V/m)
4. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
5. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.
6. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
7. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

**FCC Limit**

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated ( $\mu$ V/m)
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

**IC Limit**

According to RSS-Gen, Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits :

Frequency (MHz)	Distance (Meters)	Radiated ( $\mu$ V/m)
0.009 ~ 0.490	300	2 400 / $F(kHz)$
0.490 ~ 1.705	30	24 000 / $F(kHz)$
1.705 ~ 30.0	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960*	3	500

\* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

**Note:** Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.