



FCC PART 15B TEST REPORT

No. 25T04Z100361-021

for

Luxshare Precision Limited

5G Mobile Phone

TMRV085G

FCC ID: 2BNRMTMRV085G

with

Hardware Version: V1.0

Software Version: TMRV085G_0.02.01

Issued Date: 2025-05-13

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
25T04Z100361-021	Rev.0	1 st edition	2025-05-13

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	6
4. REFERENCE DOCUMENTS.....	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. SUMMARY OF TEST RESULTS.....	8
6. TEST EQUIPMENTS UTILIZED.....	9
7. MEASUREMENT UNCERTAINTY	10
ANNEX A: MEASUREMENT RESULTS	11

1. Test Laboratory

1.1. Testing Location

CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2025-03-16

Testing End Date: 2025-03-21

1.4. Signature




Wang Xue

(Prepared this test report)



Zhang Ying

(Reviewed this test report)



Zhang Xia

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Luxshare Precision Limited
Address: Suite 1621, 16/F., Ocean Centre, Harbour City, 5 Canton Road, Tsim Sha Tsui, Kowloon.
Contact: Ri Sa
Email: Rui.Sha@luxshare-ict.com
Telephone: +8613917939276

2.2. Manufacturer Information

Company Name: Luxshare Precision Limited
Address: Suite 1621, 16/F., Ocean Centre, Harbour City, 5 Canton Road, Tsim Sha Tsui, Kowloon.
Contact: Ri Sa
Email: Rui.Sha@luxshare-ict.com
Telephone: +8613917939276

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	5G Mobile Phone
Model Name	TMRV085G
FCC ID:	2BNRMTMRV085G

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
UT101a	866690080001127/ 866690080002315	TMRV085G_0.02.01	2025-03-05

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	Manufacturer
AE1	Battery1	TM002	Jiade Energy Technology(Zhuhai) Co.,Ltd.
AE2	Charger1	/	Provided by client for test only
AE3	USB Cable1	HX-WT-58	WASHIN

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	UT101a + AE1 +AE2+AE3	Charger1+MP3+F Camera +GSM 850 idle
Set.2	UT101a + AE1 +AE2+AE3	Charger1+R Camera + WCDMA B5 idle
Set.3	UT101a + AE1 +AE3	USB + LTE B5 idle
Set.4	UT101a + AE1 +UT50a	OTG + NR n71 idle

Note:

Equipment Under Test (EUT) is a model of 5G Mobile Phone.

It supports

GSM Band	850/900/1800/1900
UMTS Band	FDD Band II(W1900) /FDD Band IV(W1700)/FDD V(W850)
LTE Band	FDD Bands 2/4/5/7/12/25/26/28/66/71, TDD Bands 41/48
NR Band	n25/n28/n41/n48/n66/n71/n78

It has MP3, Camera, USB memory, Bluetooth V5.1, Wi-Fi (802.11a/b/g/n/ac, 802.11n supports 20MHz and 40MHz bandwidth, 802.11ac supports 20MHz, 40MHz and 80MHz bandwidth) ,GPS and Gallileo function.

The device contains receivers which tune and operate between 30MHz-960MHz in the following mode: GSM 850, WCDMA850, LTE Band 5/12/26/71, NR n71. All licensed band receivers that tune in the range of 30MHz-960MHz are investigated. Only the worst-case emissions are reported.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2024
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(huayuan North Road)
2	Conducted Emission	15.207(a)	B.2	P	CTTL(huayuan North Road)

6. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESW44	103023	R&S	2025-06-06	1 year
2	Test Receiver	ESCI 3	100344	R&S	2025-04-01	1 year
3	LISN	ENV216	101200	R&S	2025-05-16	1 year
4	EMI Antenna	VULB 9163	01222	SCHWARZBECK	2025-09-11	1 year
5	EMI Antenna	3115	00167250	ETS-Lindgren	2025-04-11	1 year
6	Universal Communication Tester	CMW500	116588	R&S	2026-01-25	1 year
7	Universal Communication Tester	E7515B	MY60102215	KEYSIGHT	2025-06-09	1 year

Test software information		
Test Item	Software	Version
Radiated Emission	EMC32	V11.50.00
Conducted Emission	EMC32	V8.53.00

Semi-anechoic chamber utilized did not exceed following limits along the testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz

Shielded room utilized did not exceed following limits along the testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

7. Measurement Uncertainty

Where relevant, the following measurement uncertainty(worse case) levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Location 1: CTTL(huayuan North Road)

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	4.72dB($k=2$)
	1GHz-18GHz	4.84dB($k=2$)
Conducted Emission	150kHz-30MHz	AC Power Line: 3.08dB($k=2$)

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode, and is connected to a charger in the case of charging mode.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

The model of the PC is M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit (μV/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement results for Set.1:

Charing Mode/Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17928.60	44.74	-26.80	42.30	29.24	54.00	9.26	H
17907.20	44.52	-26.80	42.30	29.02	54.00	9.48	H
17950.00	44.50	-26.80	42.30	29.00	54.00	9.50	V
17945.90	44.49	-26.80	42.30	28.99	54.00	9.51	V
17960.60	44.47	-26.80	42.30	28.97	54.00	9.53	V
17924.50	44.43	-26.80	42.30	28.93	54.00	9.57	V

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.10	56.13	-26.80	42.30	40.63	74.00	17.87	V
17977.60	55.63	-26.80	42.30	40.13	74.00	18.37	V
17872.50	55.51	-26.80	42.30	40.01	74.00	18.49	H
17908.90	55.45	-26.80	42.30	39.95	74.00	18.55	V
17993.50	55.34	-26.80	42.30	39.84	74.00	18.66	V
17937.40	55.27	-26.80	42.30	39.77	74.00	18.73	V

Measurement results for Set.2:
Charging Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17991.80	45.11	-26.80	42.30	29.61	54.00	8.89	V
17997.60	44.77	-26.80	42.30	29.27	54.00	9.23	H
17951.00	44.76	-26.80	42.30	29.26	54.00	9.24	H
17933.70	44.53	-26.80	42.30	29.03	54.00	9.47	V
17912.30	44.43	-26.80	42.30	28.93	54.00	9.57	H
17925.50	44.43	-26.80	42.30	28.93	54.00	9.57	H

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17881.00	55.92	-26.80	42.30	40.42	74.00	18.08	H
17959.20	55.79	-26.80	42.30	40.29	74.00	18.21	V
17905.50	55.75	-26.80	42.30	40.25	74.00	18.25	H
17868.80	55.45	-26.80	42.30	39.95	74.00	18.55	H
17906.50	55.45	-26.80	42.30	39.95	74.00	18.55	H
17938.10	55.44	-26.80	42.30	39.94	74.00	18.56	H

Measurement results for Set.3:
USB Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
6056.80	45.74	-36.15	35.40	46.49	54.00	8.26	V
6056.50	45.44	-36.15	35.40	46.19	54.00	8.56	V
17901.40	44.56	-26.80	42.30	29.06	54.00	9.44	H
17934.00	44.55	-26.80	42.30	29.05	54.00	9.45	V
17906.20	44.53	-26.80	42.30	29.03	54.00	9.47	H
17949.70	44.50	-26.80	42.30	29.00	54.00	9.50	V

USB Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17939.80	56.24	-26.80	42.30	40.74	74.00	17.76	H
17864.70	56.14	-26.80	42.30	40.64	74.00	17.86	H
17920.80	55.52	-26.80	42.30	40.02	74.00	18.48	V
17941.50	55.48	-26.80	42.30	39.98	74.00	18.52	H
17455.00	55.45	-28.04	42.10	41.39	74.00	18.55	H
17978.60	55.30	-26.80	42.30	39.80	74.00	18.70	V

Measurement results for Set.4:
OTG Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
15667.30	52.81	-28.39	38.70	42.50	54.00	1.19	H
15667.60	52.09	-28.39	38.70	41.78	54.00	1.91	H
15668.30	51.76	-28.39	38.70	41.45	54.00	2.24	H
15667.90	50.84	-28.39	38.70	40.53	54.00	3.16	H
15668.60	46.11	-28.39	38.70	35.80	54.00	7.89	H
15666.90	45.21	-28.39	38.70	34.90	54.00	8.79	H

OTG Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17964.00	56.02	-26.80	42.30	40.52	74.00	17.98	H
17906.20	55.84	-26.80	42.30	40.34	74.00	18.16	V
17905.80	55.78	-26.80	42.30	40.28	74.00	18.22	V
17992.90	55.64	-26.80	42.30	40.14	74.00	18.36	H
17938.80	55.51	-26.80	42.30	40.01	74.00	18.49	H
17952.10	55.48	-26.80	42.30	39.98	74.00	18.52	H

Measurement results for Set.1:

Full Spectrum

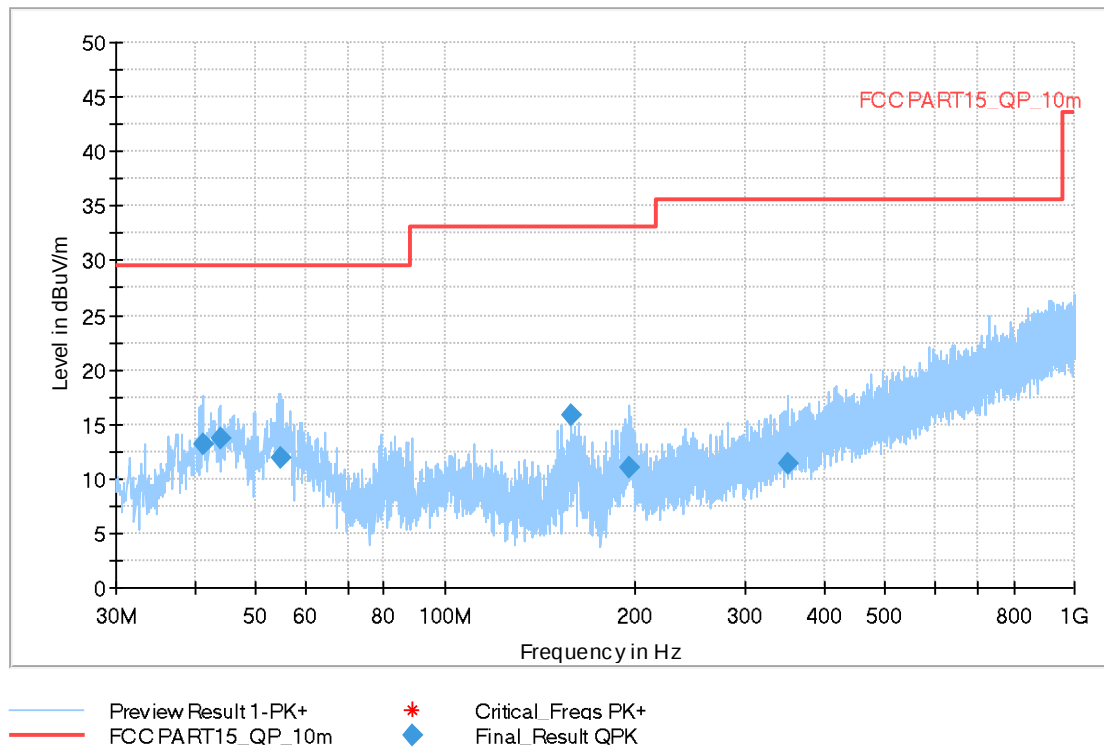


Fig A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
41.203500	13.19	29.54	16.35	120.000	225.0	V	-6.0
43.871000	13.78	29.54	15.76	120.000	125.0	V	267.0
54.589500	11.98	29.54	17.56	120.000	294.0	V	285.0
158.428000	15.78	33.06	17.28	120.000	118.0	V	-23.0
196.112500	11.09	33.06	21.97	120.000	100.0	V	256.0
349.615000	11.48	35.56	24.08	120.000	325.0	V	188.0

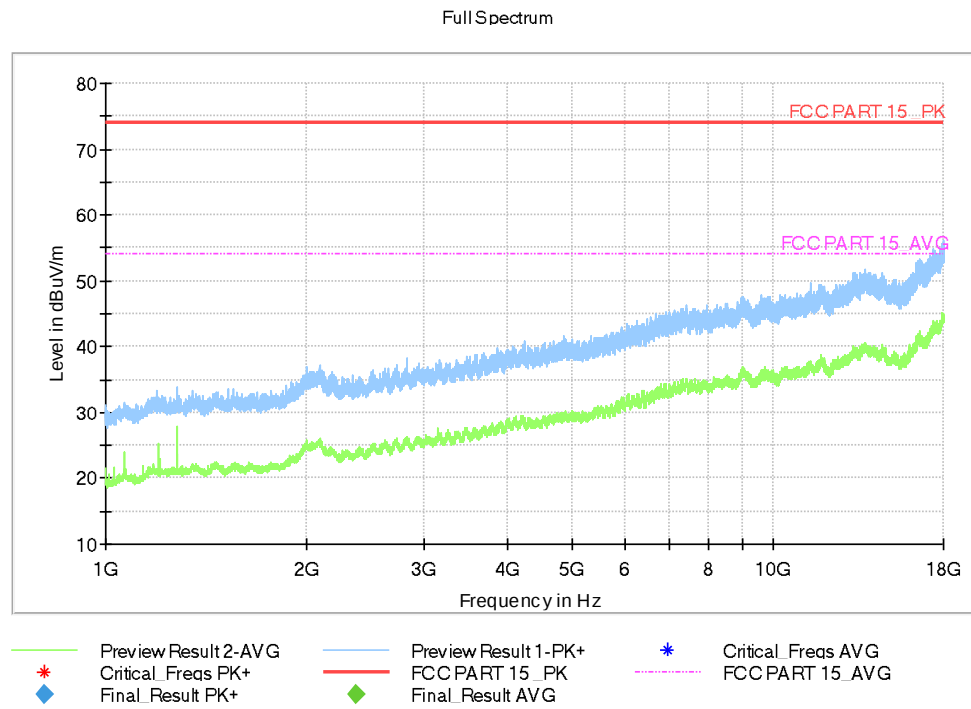


Fig A.2 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.2:

FullSpectrum

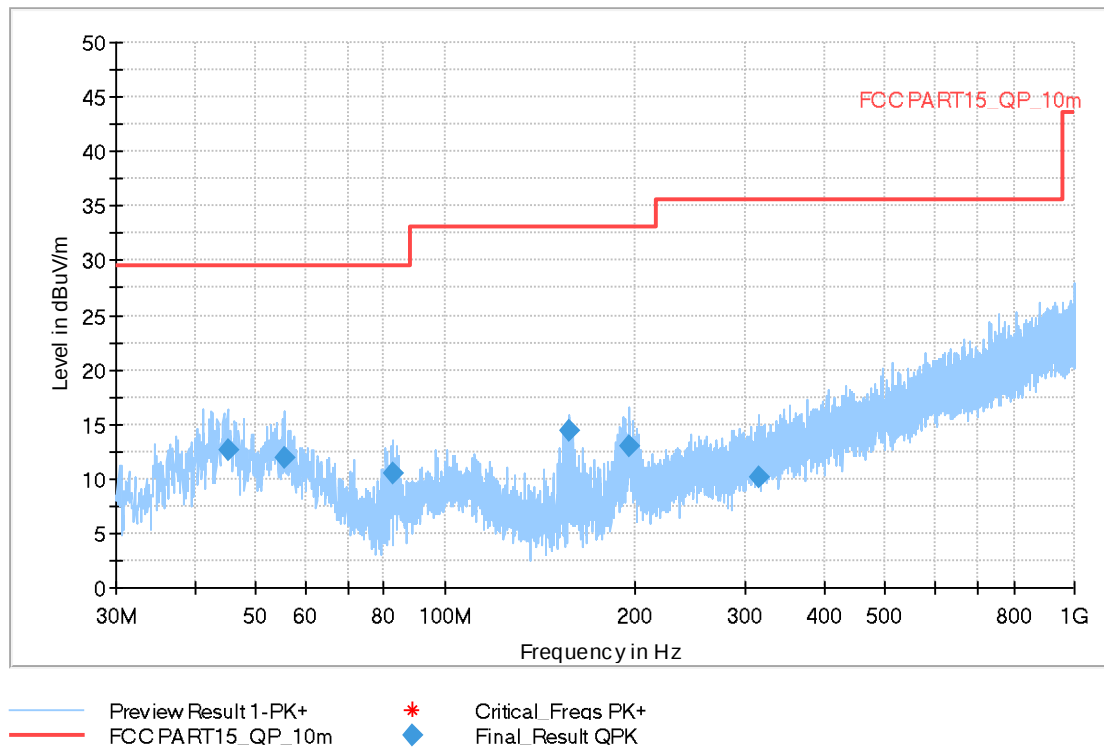


Fig A.3 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
45.132000	12.63	29.54	16.91	120.000	225.0	V	234.0
55.559500	11.96	29.54	17.58	120.000	108.0	V	88.0
82.380000	10.57	29.54	18.97	120.000	125.0	V	270.0
157.555000	14.37	33.06	18.69	120.000	108.0	V	-30.0
196.015500	12.96	33.06	20.10	120.000	108.0	V	315.0
314.889000	10.12	35.56	25.44	120.000	275.0	H	-22.0

Full Spectrum

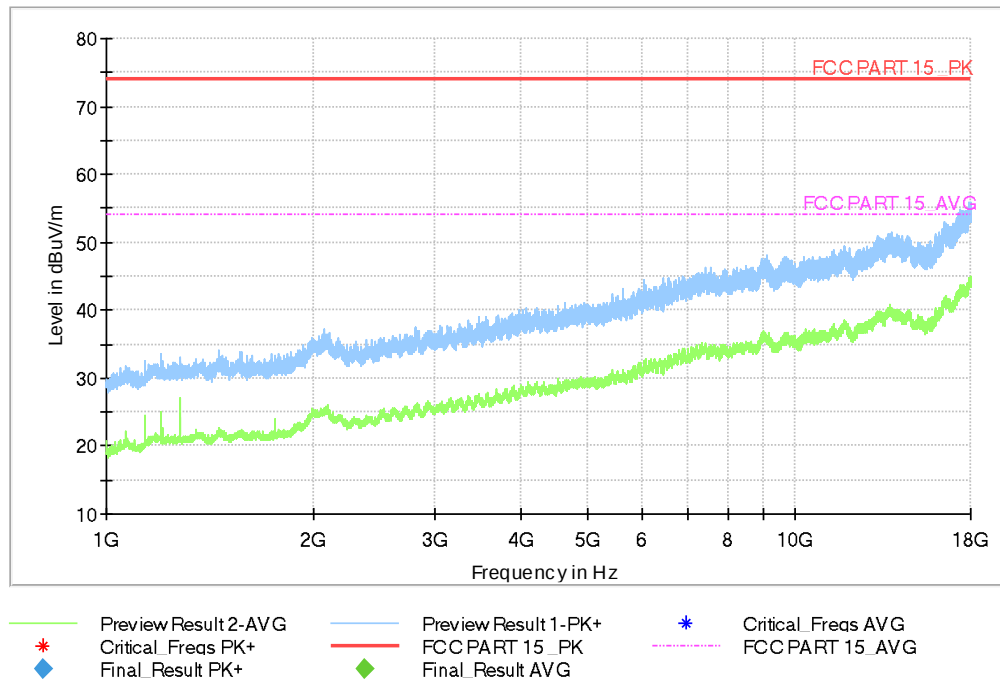


Fig A.4 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.3:

Full Spectrum

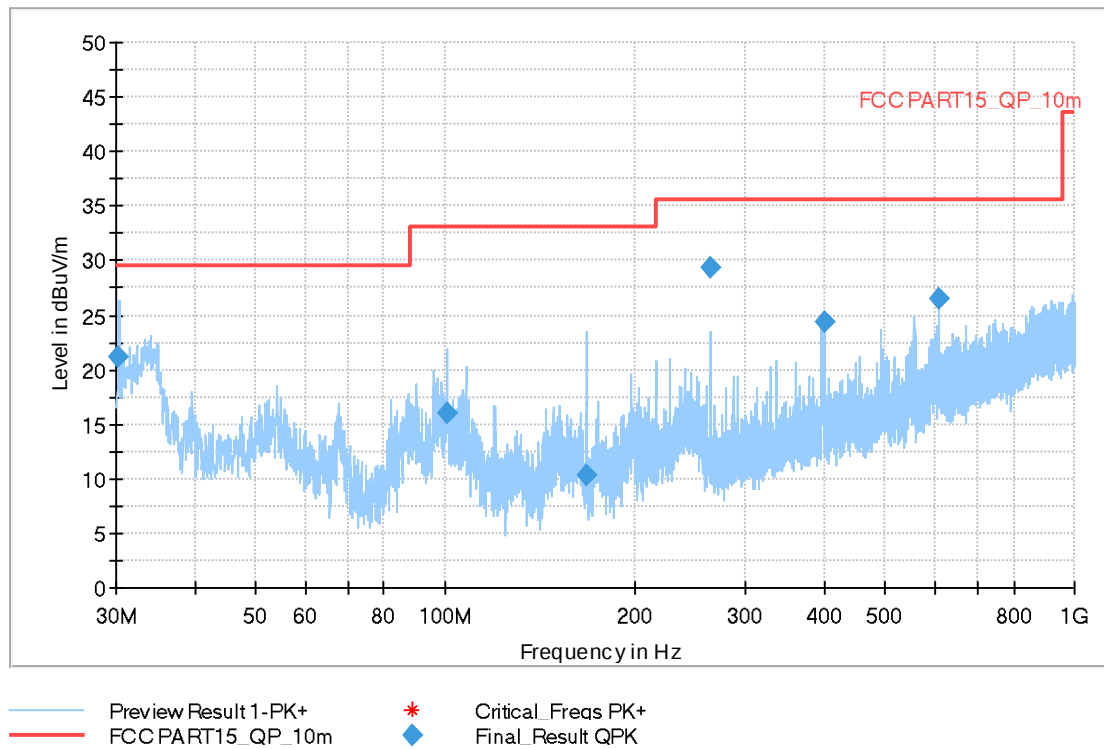


Fig A.5 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
30.291000	21.20	29.54	8.34	120.000	175.0	V	158.0
100.616000	15.98	33.06	17.08	120.000	125.0	V	91.0
168.176500	10.25	33.06	22.81	120.000	325.0	H	77.0
263.964000	29.43	35.56	6.13	120.000	317.0	H	24.0
400.006500	24.35	35.56	11.21	120.000	175.0	H	166.0
608.071500	26.54	35.56	9.02	120.000	275.0	V	308.0

Full Spectrum

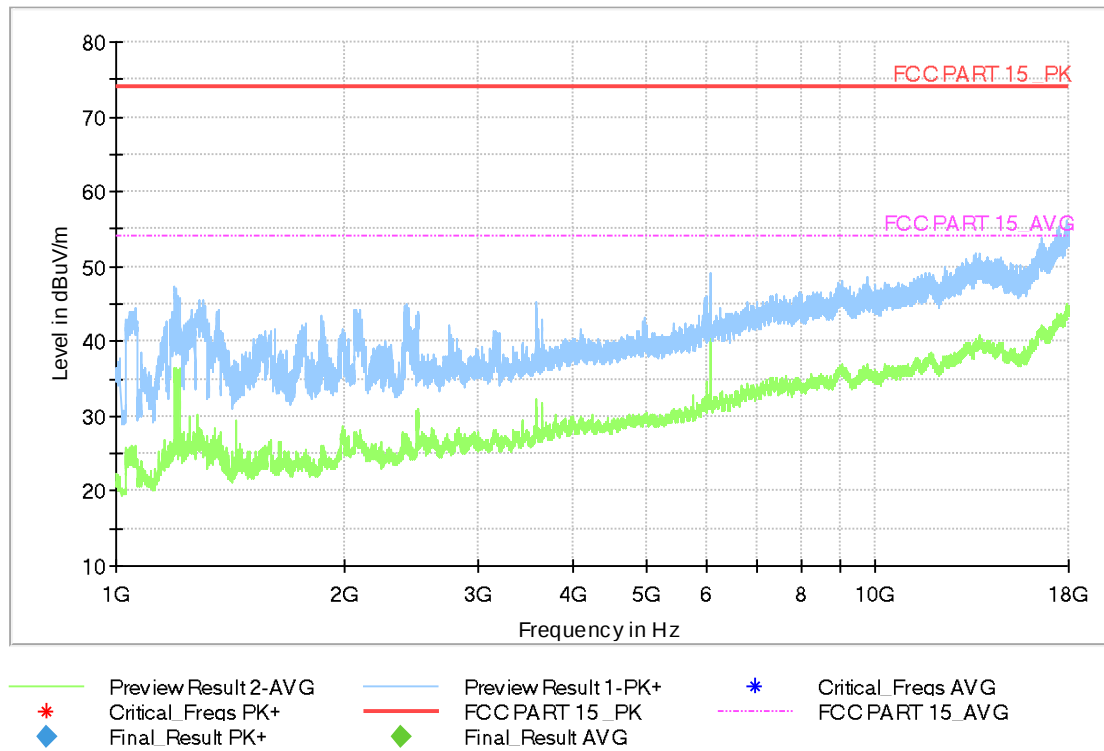


Fig A.6 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.4:

Full Spectrum

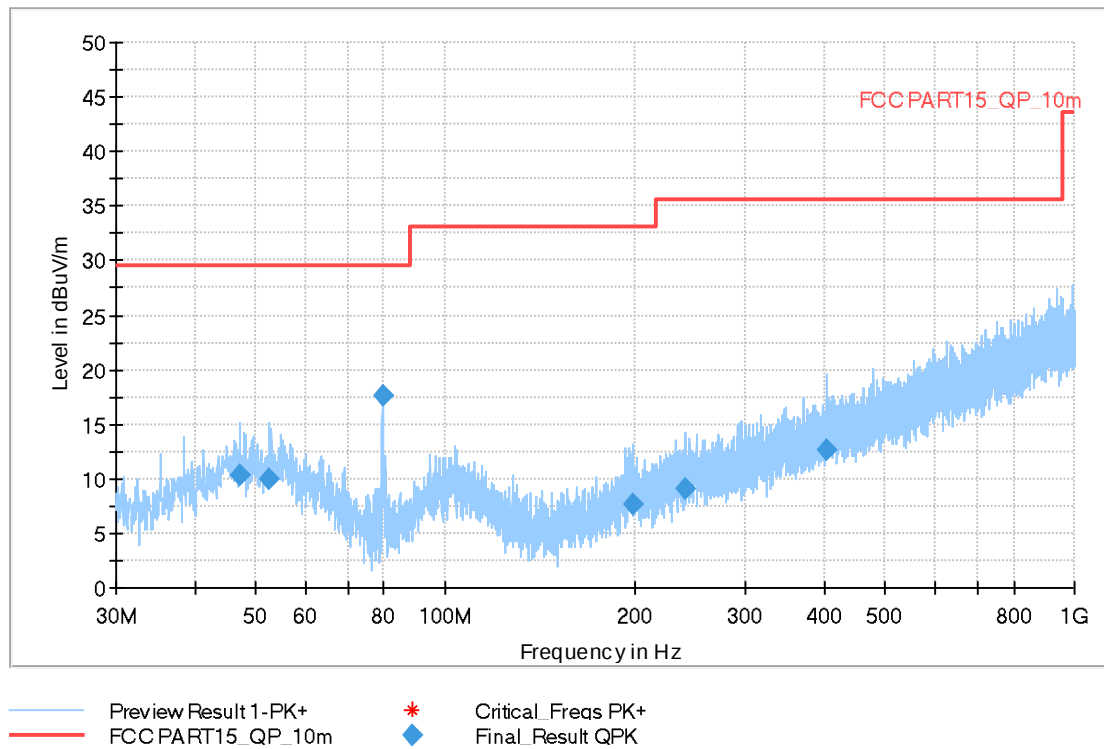


Fig A.7 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
47.169000	10.34	29.54	19.20	120.000	192.0	V	249.0
52.601000	9.98	29.54	19.56	120.000	125.0	H	225.0
79.470000	17.68	29.54	11.86	120.000	125.0	V	226.0
199.507500	7.69	33.06	25.37	120.000	275.0	V	-37.0
241.169000	9.12	35.56	26.44	120.000	325.0	H	315.0
403.062000	12.65	35.56	22.91	120.000	218.0	H	150.0

Full Spectrum

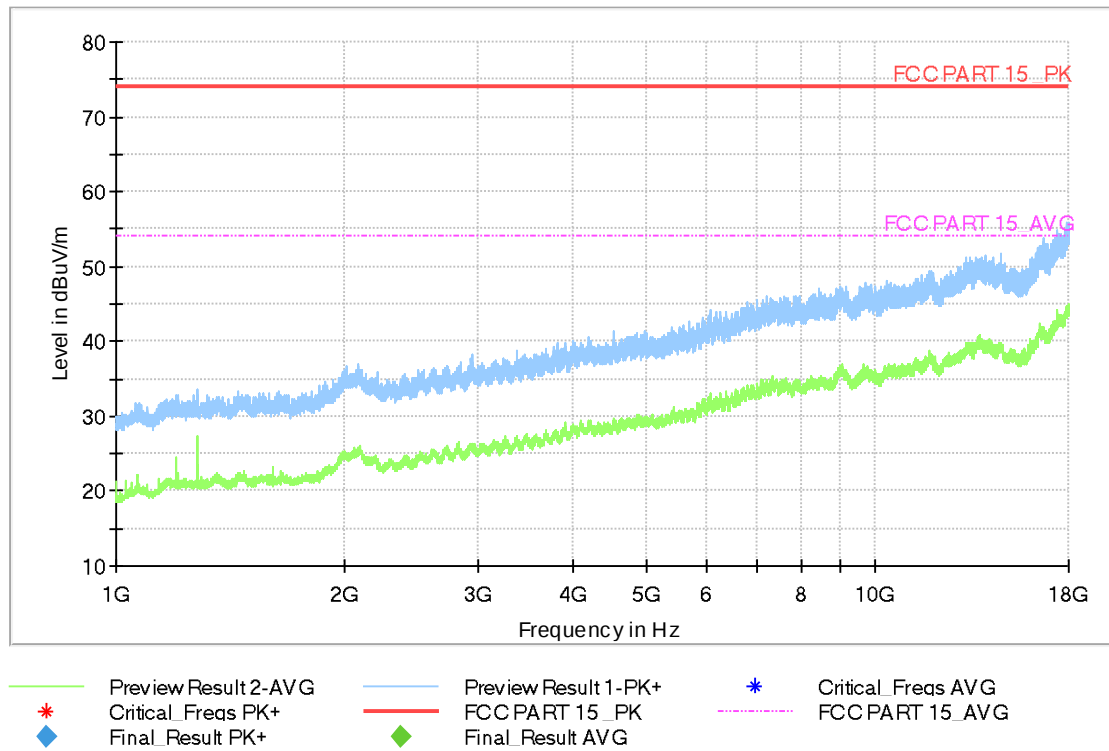


Fig A.8 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.207(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U = 3.08 \text{ dB}$, $k=2$.

Charging Mode, Set.1:

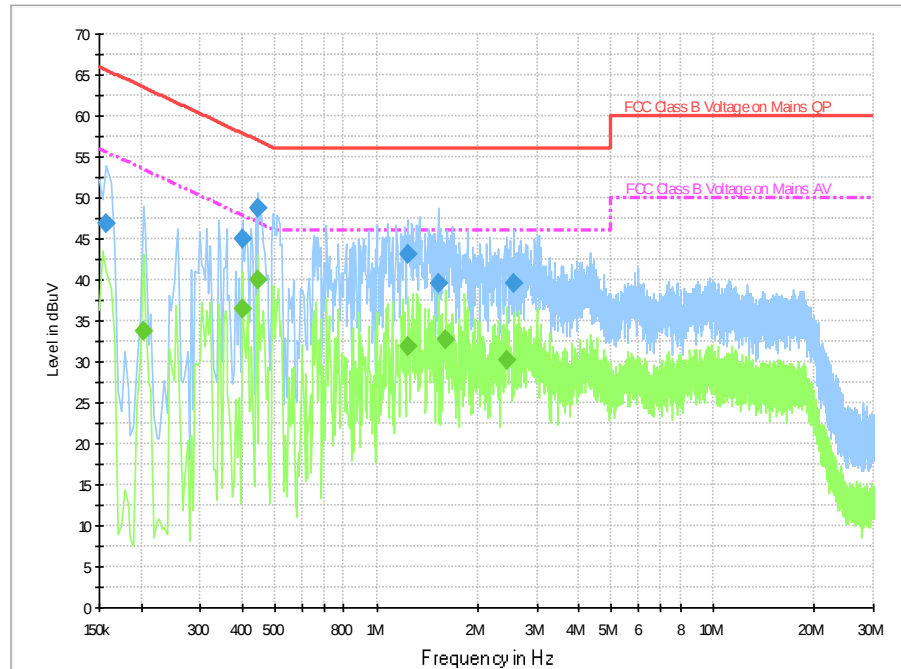


Fig A.9 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.158000	46.9	2000.0	9.000	On	L1	19.9	18.6	65.6	
0.398000	45.0	2000.0	9.000	On	N	19.9	12.9	57.9	
0.446000	48.8	2000.0	9.000	On	N	19.9	8.2	56.9	
1.238000	43.0	2000.0	9.000	On	N	19.7	13.0	56.0	
1.522000	39.5	2000.0	9.000	On	L1	19.9	16.5	56.0	
2.566000	39.6	2000.0	9.000	On	L1	19.8	16.4	56.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.202000	33.9	2000.0	9.000	On	N	19.8	19.7	53.5	
0.398000	36.4	2000.0	9.000	On	N	19.9	11.4	47.9	
0.446000	39.9	2000.0	9.000	On	N	19.9	7.0	46.9	
1.246000	31.9	2000.0	9.000	On	N	19.7	14.1	46.0	
1.610000	32.8	2000.0	9.000	On	N	19.7	13.2	46.0	
2.450000	30.1	2000.0	9.000	On	N	19.6	15.9	46.0	

Charging Mode, Set.2:

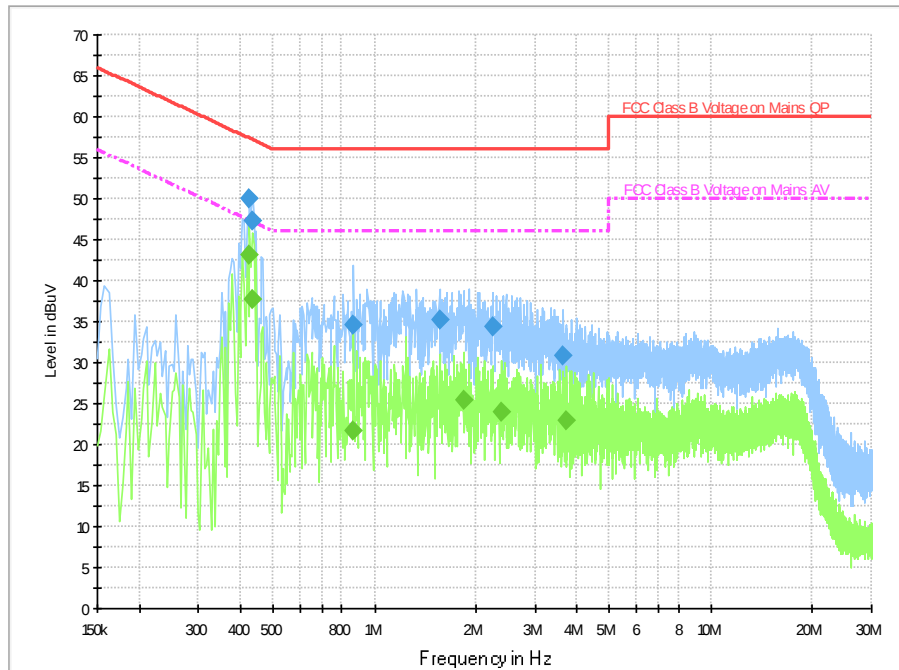


Fig A.10 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.426000	49.9	2000.0	9.000	On	N	19.9	7.4	57.3	
0.434000	47.3	2000.0	9.000	On	N	19.9	9.9	57.2	
0.866000	34.7	2000.0	9.000	On	L1	19.9	21.3	56.0	
1.558000	35.2	2000.0	9.000	On	N	19.7	20.8	56.0	
2.242000	34.4	2000.0	9.000	On	L1	19.8	21.6	56.0	
3.646000	30.9	2000.0	9.000	On	L1	19.8	25.1	56.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.426000	43.0	2000.0	9.000	On	N	19.9	4.3	47.3	
0.434000	37.6	2000.0	9.000	On	N	19.9	9.6	47.2	
0.866000	21.7	2000.0	9.000	On	L1	19.9	24.3	46.0	
1.838000	25.4	2000.0	9.000	On	N	19.6	20.6	46.0	
2.386000	23.9	2000.0	9.000	On	N	19.6	22.1	46.0	
3.734000	23.0	2000.0	9.000	On	L1	19.8	23.0	46.0	

USB Mode, Set.3:

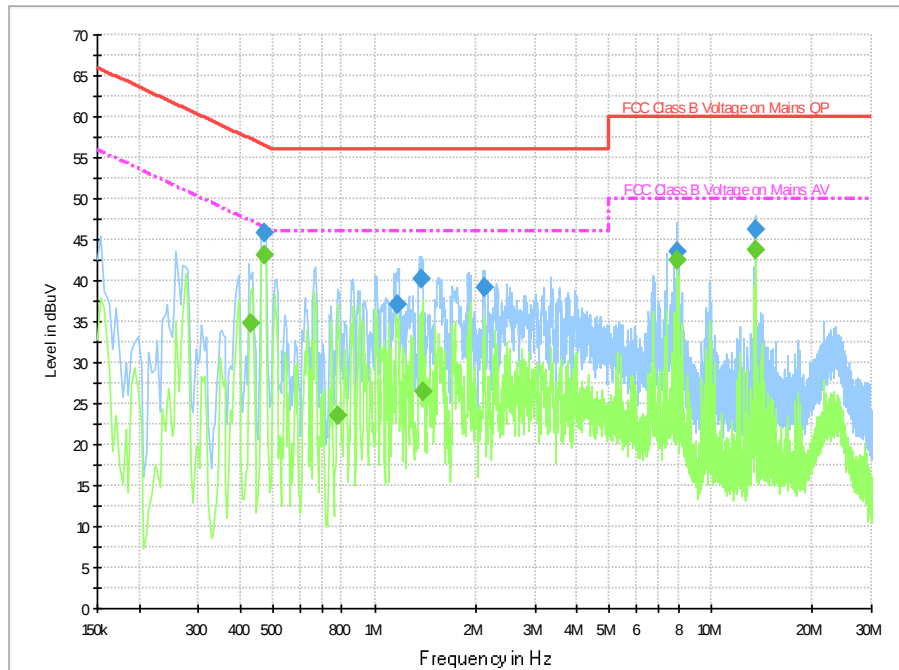


Fig A.11 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.470000	45.9	2000.0	9.000	On	L1	20.0	10.6	56.5	
1.174000	37.1	2000.0	9.000	On	L1	19.9	18.9	56.0	
1.378000	40.2	2000.0	9.000	On	L1	19.9	15.8	56.0	
2.122000	39.2	2000.0	9.000	On	L1	19.8	16.8	56.0	
7.926000	43.5	2000.0	9.000	On	N	19.7	16.5	60.0	
13.562000	46.2	2000.0	9.000	On	N	19.8	13.8	60.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.430000	34.7	2000.0	9.000	On	N	19.9	12.5	47.3	
0.470000	43.1	2000.0	9.000	On	N	19.9	3.4	46.5	
0.774000	23.5	2000.0	9.000	On	N	19.8	22.5	46.0	
1.394000	26.5	2000.0	9.000	On	N	19.7	19.5	46.0	
7.922000	42.6	2000.0	9.000	On	N	19.7	7.4	50.0	
13.558000	43.7	2000.0	9.000	On	N	19.8	6.3	50.0	

END OF REPORT