

Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

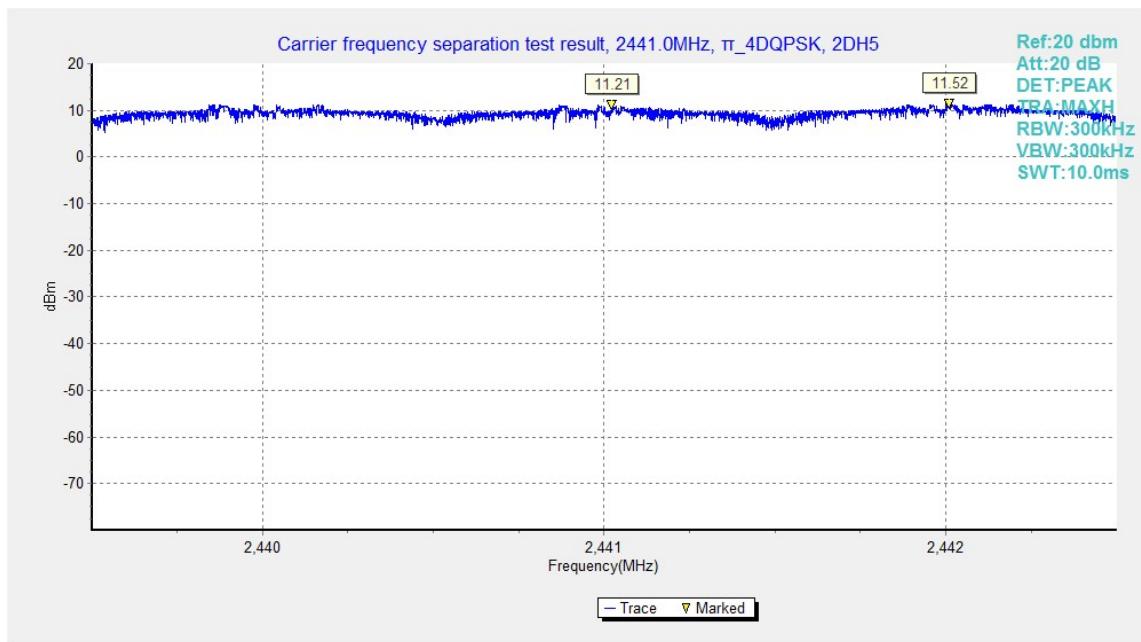


Fig.92. Carrier frequency separation measurement: $\pi/4$ DQPSK, Channel 39

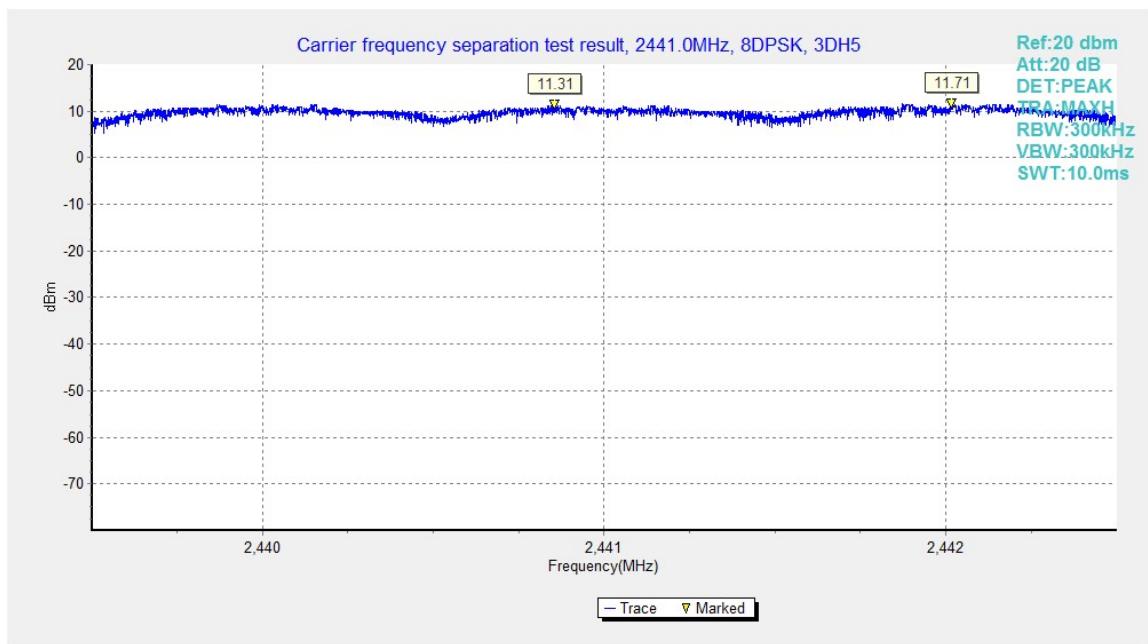


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

B.9. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.94	79
40~78	Fig.95	P

For 1/4 DQPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.96	79
40~78	Fig.97	P

For 8DPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.98	79
40~78	Fig.99	P

Conclusion: PASS

Test graphs as below:

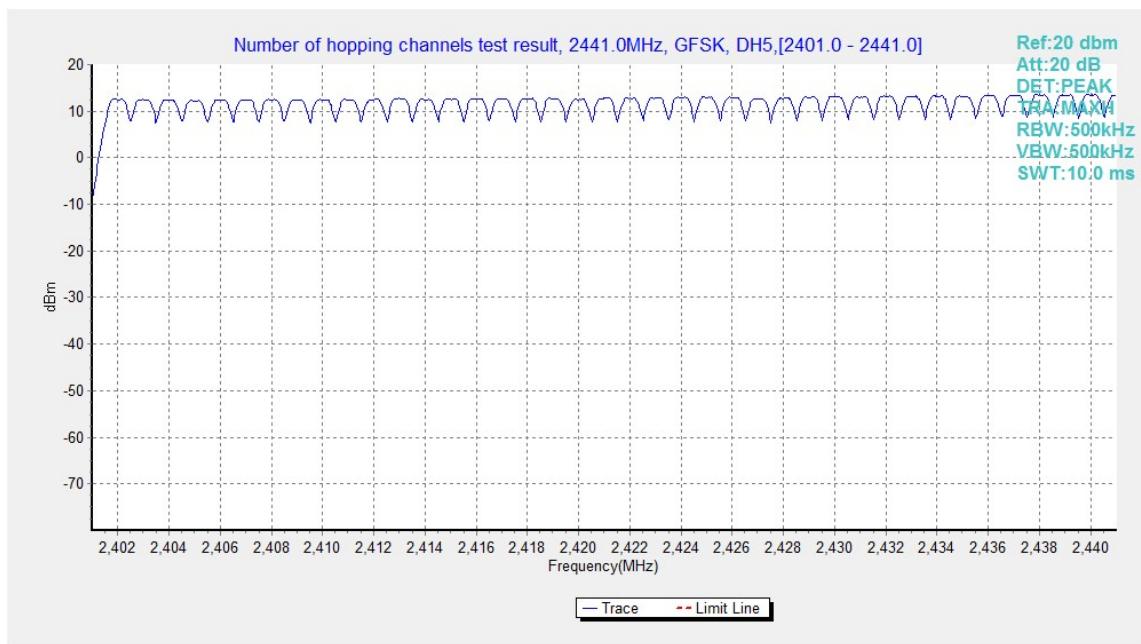


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

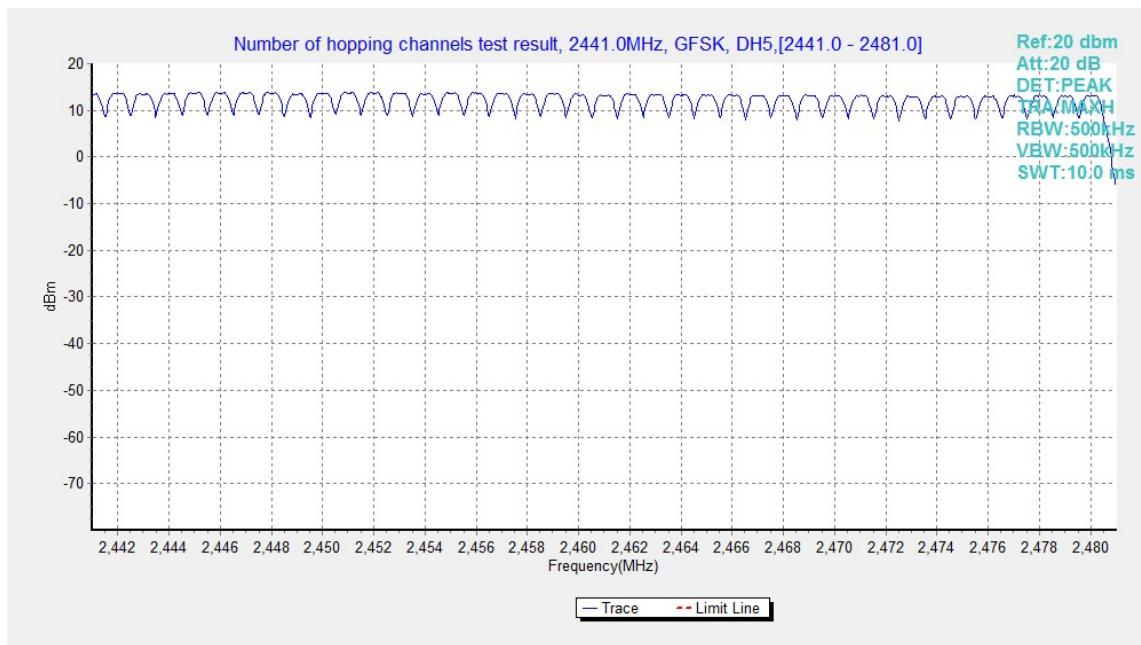


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

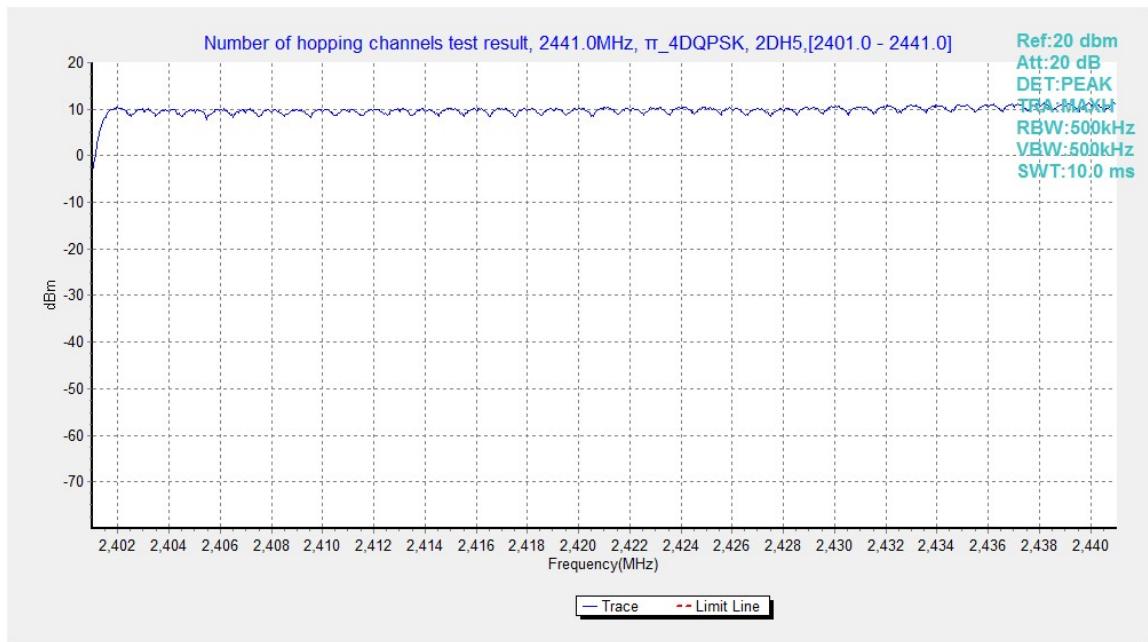


Fig.96. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 0 - 39

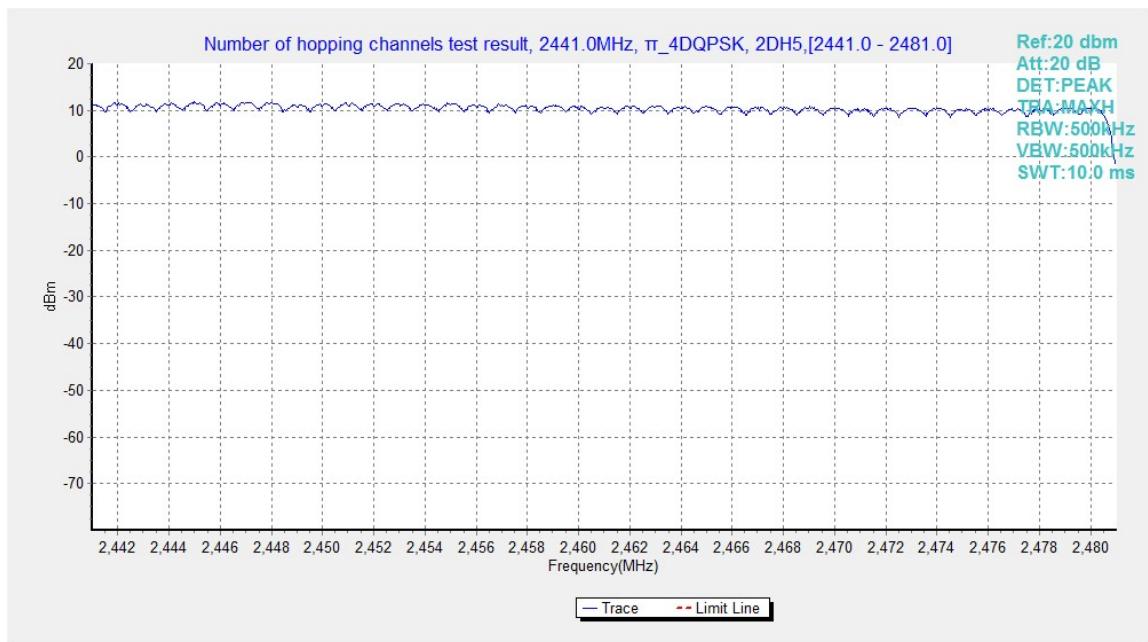


Fig.97. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 40 - 78

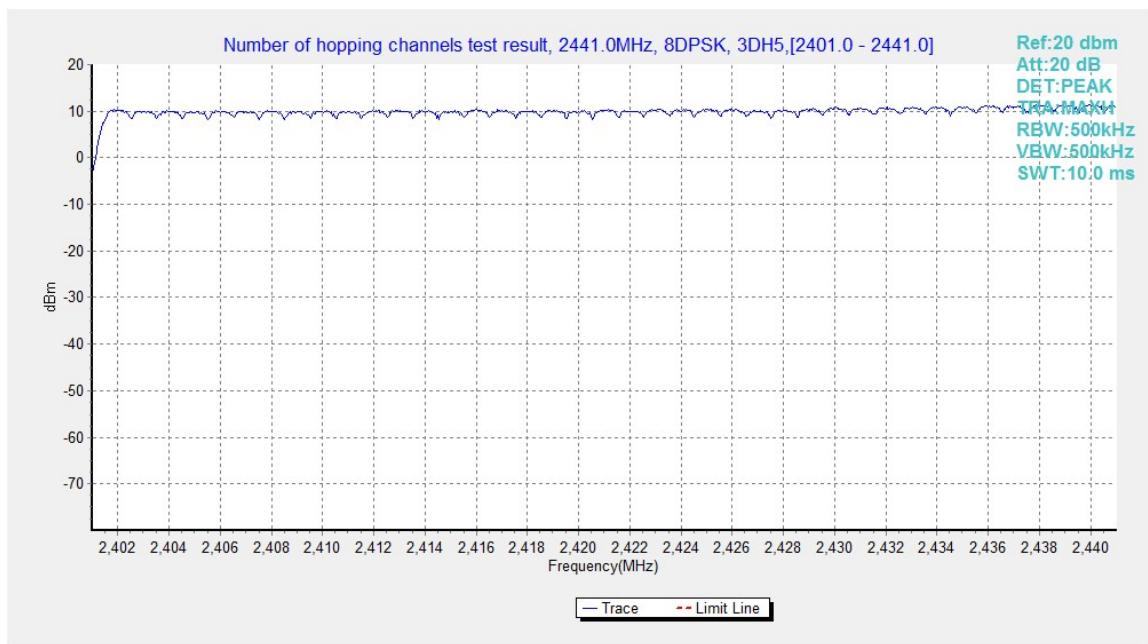


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

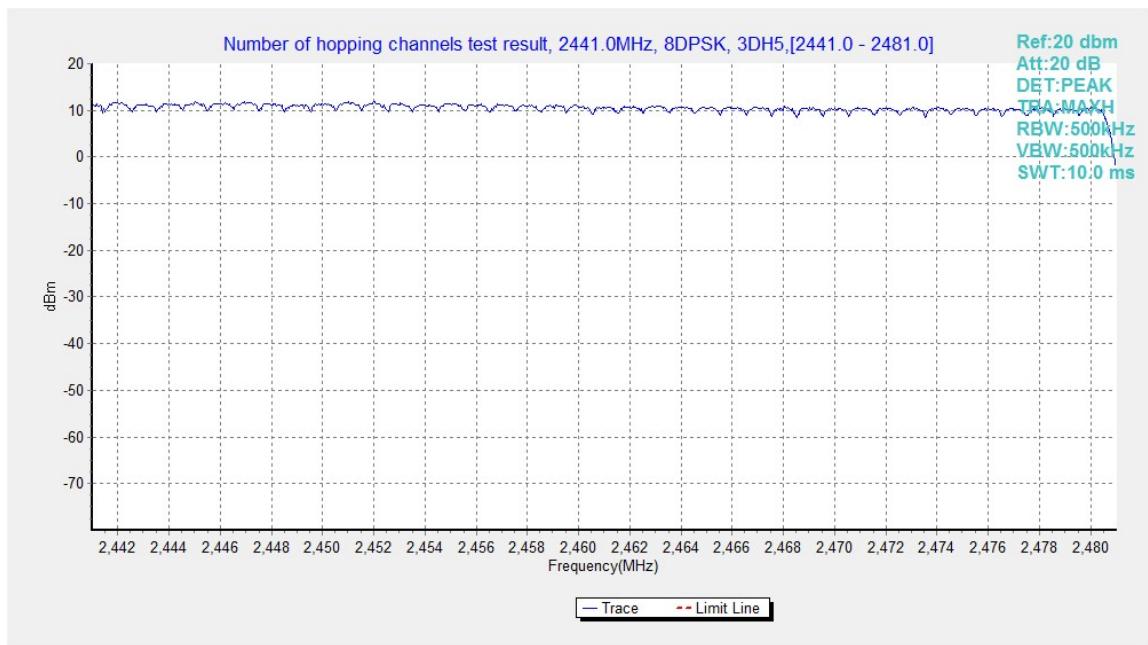


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

B.10. AC Powerline Conducted Emission

Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:

Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Test setup

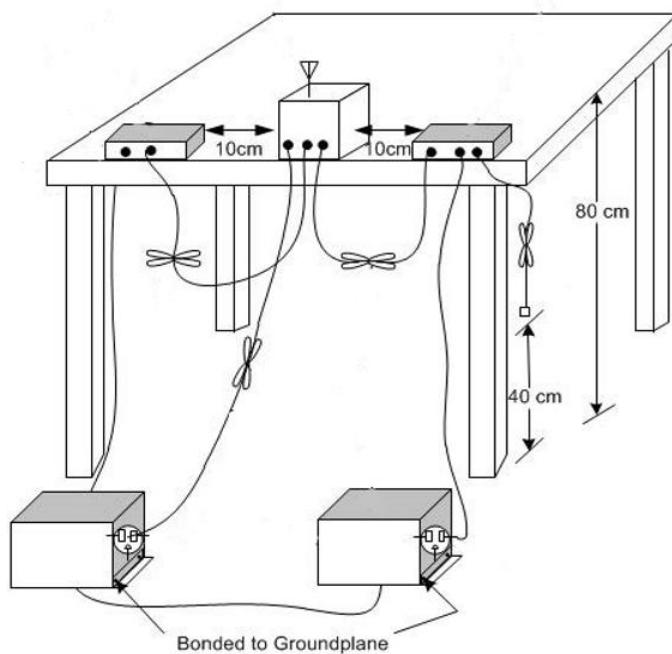

Measurement Result and limit:

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	66 to 56	Fig.B.10.1	Fig. B.10.2	P	
0.5 to 5	56				
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	56 to 46	Fig.B.10.1	Fig. B.10.2	P	
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass

Test graphs as below:

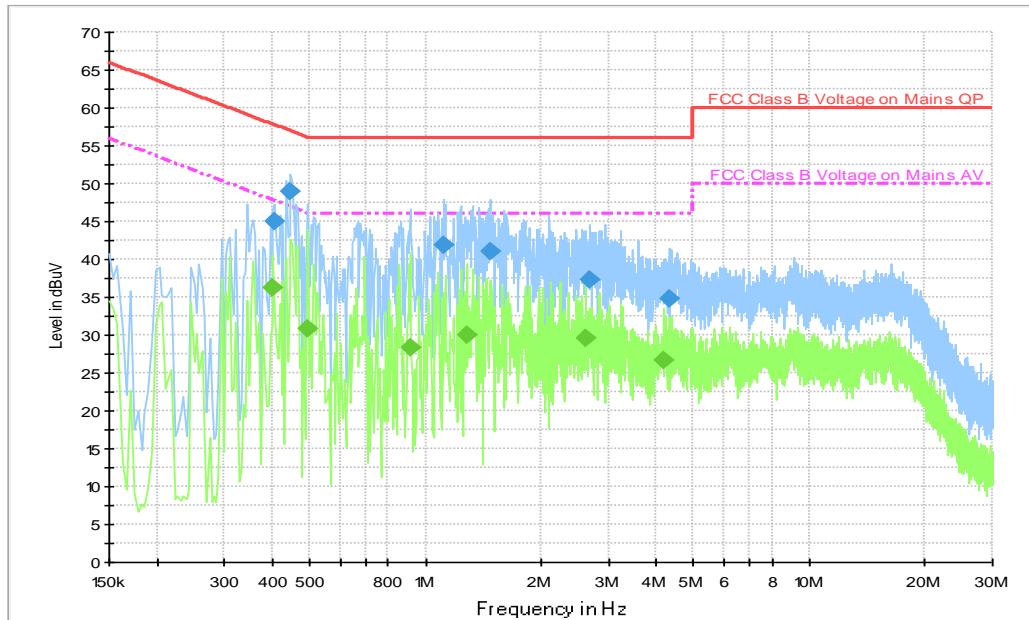


Fig.B.10.1 AC Powerline Conducted Emission- bluetooth

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.406000	45.1	2000.0	9.000	On	L1	20.0	12.6	57.7
0.446000	49.0	2000.0	9.000	On	N	19.9	7.9	56.9
1.114000	41.9	2000.0	9.000	On	N	19.7	14.1	56.0
1.470000	41.1	2000.0	9.000	On	N	19.7	14.9	56.0
2.694000	37.4	2000.0	9.000	On	L1	19.8	18.6	56.0
4.326000	34.8	2000.0	9.000	On	N	19.6	21.2	56.0

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.402000	36.2	2000.0	9.000	On	N	19.9	11.6	47.8
0.494000	30.8	2000.0	9.000	On	N	19.9	15.3	46.1
0.914000	28.4	2000.0	9.000	On	N	19.7	17.6	46.0
1.282000	29.9	2000.0	9.000	On	N	19.7	16.1	46.0
2.622000	29.6	2000.0	9.000	On	N	19.6	16.4	46.0
4.154000	26.6	2000.0	9.000	On	N	19.6	19.4	46.0

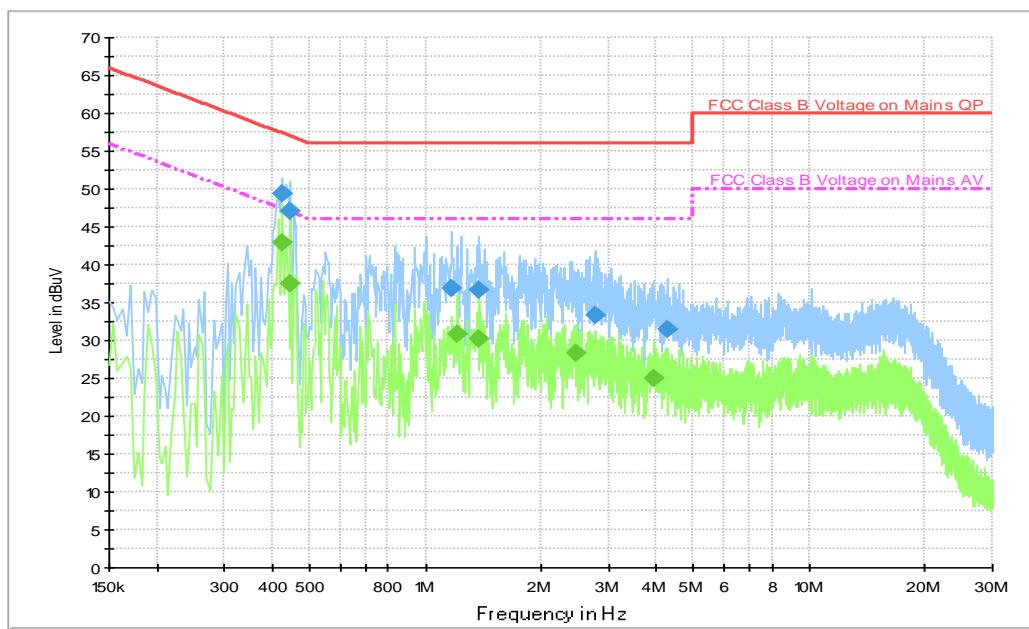


Fig.B.10.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.422000	49.5	2000.0	9.000	On	N	19.9	8.0	57.4
0.446000	47.0	2000.0	9.000	On	N	19.9	9.9	56.9
1.170000	37.0	2000.0	9.000	On	N	19.7	19.0	56.0
1.382000	36.8	2000.0	9.000	On	N	19.7	19.2	56.0
2.762000	33.4	2000.0	9.000	On	L1	19.8	22.6	56.0
4.274000	31.4	2000.0	9.000	On	L1	19.8	24.6	56.0

Final Result 2

Frequency (MHz)	CAverage (dB μ V)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.422000	42.9	2000.0	9.000	On	N	19.9	4.5	47.4
0.446000	37.6	2000.0	9.000	On	N	19.9	9.3	46.9
1.218000	30.8	2000.0	9.000	On	N	19.7	15.2	46.0
1.382000	30.3	2000.0	9.000	On	N	19.7	15.7	46.0
2.458000	28.3	2000.0	9.000	On	N	19.6	17.7	46.0
3.942000	25.0	2000.0	9.000	On	L1	19.8	21.0	46.0

B.11. Antenna Requirement

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

ANNEX C: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 23rd day of July 2024.



Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2026

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****