

acknowledgment

Customer name: Zhongshan yuanshiwei technology co., ltd

Customer data: 1T0016

Our model number: A11-Y61.5*42*0.8-7.3UH-115MM

Sample delivery date: March and June, 2025

Supply side: Dongguan Jerice Technology Co. , Ltd.

Draw up	Audit	Permission granted
Wang Liying	Deng xianggui	Rusheng

Client acknowledges:

Qualified	Disqualified	Admit it
Notes		

Dongguan Jerice Technology Co. , Ltd.


Tel: _____

Fax: 86+13632701380

Address: 96 Long Wu Road, Tai Ling Shan, Dongguan (3F, building L, Kam Hung Tat Science and Technology Park)

Customer name	Customer data	Our model number	Version	Date
yuanshiwei	1T0016	A11-Y61.5*42*0.8-7.3UH-115MM	A0	March and June, 2025

一、 Floor plan: unit: MM

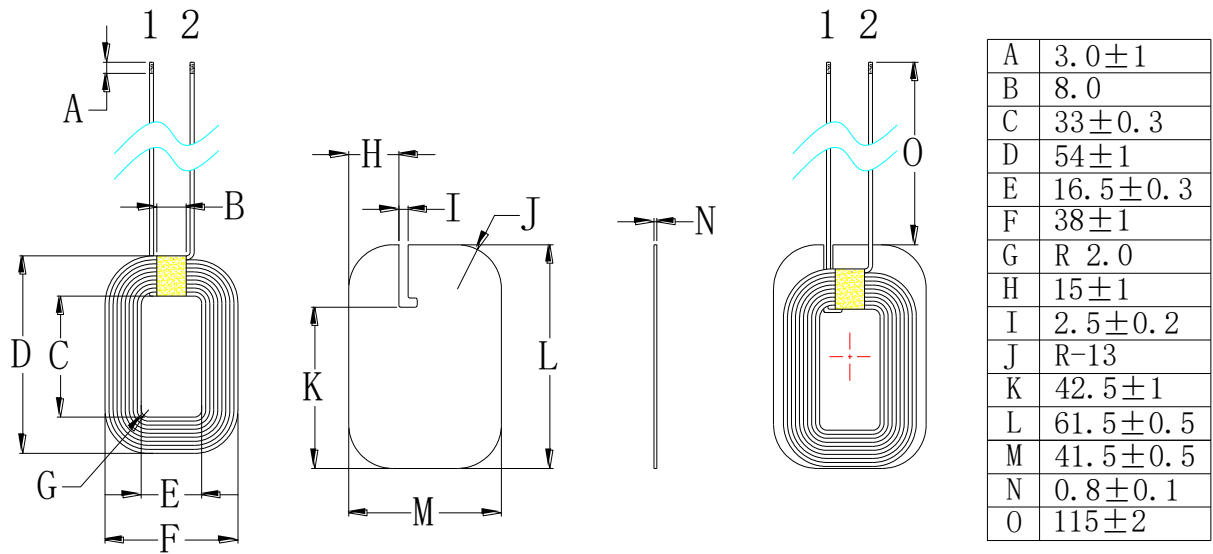

二、 Product parameters:

Feet	Line diameter	Number of turns	Notes
1- 2	0.08*105P	9T	silk covered wire

三、 Technical Requirements:

1. Fix the head and tail of the copper wire to prevent loose or broken copper wire.
2. According to customer requirements to cut the head of the excess copper wire, tinned, tinned depth of $3\pm 1\text{mm}$.
3. Stick some white glue on the magnetic sheet and stick a copper coil to ensure that the surface of the product is clean and tidy in the process.
4. Hard magnetic disk, no damage.
5. Additional process (according to customer's requirements): Stick double-sided tape on the back of the finished product, and then package.



四、 Electrical parameter:

1. Inductance value,

$$\text{PIN } 1 - 2 = 7.3\mu\text{H} \pm 0.3\mu\text{H}$$

$$Q \geq 60$$

The above inductances and Q values are based on Quanhua 1062A instrument and 100KHZ/1.0Vrms or equivalent instrument.

五、 Bill of materials:

NO	Name	Material Quality	Suppliers	Notes
1	silk covered wire	0.08X105P	Uyghur or equivalent	
2	Disk	Y61.5*42*0.8	TX or equivalent	
3	Tin	High temperature environmental protection	Thond Island or equivalent	
4	White glue	BY882	Treasure month or equivalent	
5	Double-sided glue	59*38	Hung Fai or equivalent	