

acknowledgment

Customer name: Shenzhen hancaige electronics co., Ltd

Customer data: _____

Our model number: YZ-G25-2.6-4.8UH-3200GS-105MM

Sample delivery date: March 6, 2025

Supply side: Dongguan Jerice Technology Co. , Ltd.

Draw up	Audit	Permission granted
Wang Liying	Deng xianggui	Xusheng

Client acknowledges:

Qualified	Disqualified	Admit it
Notes		

Dongguan Jerice Technology Co. , Ltd.



Tel: _____

Fax: 86+13632701380

Address: 96 Long Wu Road, Tai Ling Shan, Dongguan (3F, building L, Kam Hung Tat Science and Technology Park)

Customer name	Customer data	Our model number	Version	Date
Hancai		YZ-G25-2.6-4.8UH-3200GS-105MM	A0	March 6, 2025

一、 Floor plan: unit: MM

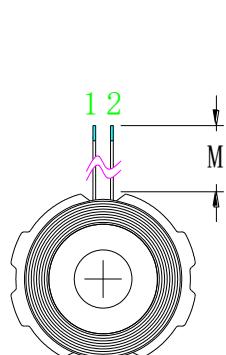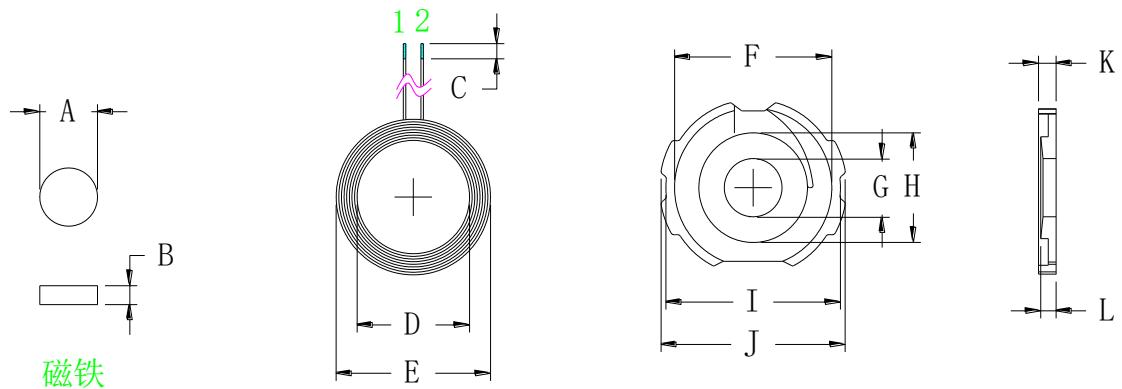

A	7.65 ± 0.1
B	2.0 ± 0.1
C	2.0 ± 1
D	15 ± 0.2
E	20.7 ± 0.3
F	21 ± 0.2
G	7.7 ± 0.1
H	14.5 ± 0.2
I	23.5 ± 0.3
J	25 ± 0.3
K	2.6 ± 0.15
L	2.5 ± 0.15 中柱高度
M	105 ± 2

二、 Product parameters:

Feet	Line diameter	Number of turns	Notes
1- 2	0.08*24	10T	Hot Air Strand

三、 Technical Requirements:

1. Fix the head and tail of the copper wire to prevent loose or broken copper wire.
2. According to customer requirements to cut the head of the excess copper wire, tinned, tinned depth of 1 ~ 3mm.
3. Stick some white glue on the magnetic sheet and stick a copper coil to ensure that the surface of the product is clean and tidy in the process.
4. There is a round hole on the die-casting magnetic sheet, which is not damaged.
5. Additional process (according to customer requirements) : in the finished product in the middle of the round hole loaded with 7.65 x 2.0 mm magnet, and in the back of the finished product and then paste a diameter of 14 mm round double-sided adhesive, and finally packaging.



四、 Electrical parameter:

1. Inductance value,

$$\text{PIN 1 — 2} = 4.8\mu\text{H} \pm 0.2\mu\text{H}$$

$$Q \geq 25$$

The above inductances and Q values are based on Quanhua 1062A instrument and 100KHZ/1.0Vrms or equivalent instrument.

五、 Bill of materials:

NO	Name	Material Quality	Suppliers	Notes
1	Hot Air Strand	0.08X24	Uyghur or equivalent	
2	Disk	G25 Die castings	TK or equivalent	
3	Tin	High temperature environmental protection	Thond Island or equivalent	
4	White glue	BY882	Treasure month or equivalent	
5	Strong magnetism	7.65 * 2.0 strength 3200GS	Win-win or equal	
6	Double-sided glue	The diameter is 14 mm	Hung Fai or equivalent	