

Test Report

Report No. : MTi241204005-0105E3
Date of issue : 2025-07-18
Applicant : GCam Robot Co., Limited
Product : golfeye
Model(s) : Ge01
FCC ID : 2BNUDGOLFEYE01

Shenzhen Microtest Co., Ltd.

TEST REPORT




Report No.: MTi241204005-0105E3

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	4
1.3	Environmental Conditions	7
1.4	Description of support units	7
1.5	Measurement uncertainty	7
2	Summary of Test Result	8
3	Test Facilities and accreditations	9
3.1	Test laboratory	9
4	List of test equipment	10
5	Evaluation Results (Evaluation)	14
5.1	Antenna requirement	14
6	Radio Spectrum Matter Test Results (RF)	15
6.1	Conducted Emission at AC power line	15
6.2	6dB Bandwidth	18
6.3	Maximum Conducted Output Power	19
6.4	Power Spectral Density	20
6.5	RF conducted spurious emissions and band edge measurement	21
6.6	Band edge emissions (Radiated)	22
6.7	Radiated emissions (below 1GHz)	56
6.8	Radiated emissions (above 1GHz)	60
	Photographs of the test setup	71
	Photographs of the EUT	72
	Appendix A: DTS Bandwidth	74
	Appendix B: Maximum conducted output power	100
	Appendix C: Maximum power spectral density	102
	Appendix D: Band edge measurements	128
	Appendix E: Conducted Spurious Emission	144
	Appendix F: Duty Cycle	216

TEST REPORT

Report No.: MTi241204005-0105E3

Test Result Certification		
Applicant	GCam Robot Co., Limited	
Applicant Address	Hong Kong San Po Kong No. 99 King Fuk Street Kai Tak Fty Building RmD07, 8/ F	
Manufacturer	GCam Robot Co., Limited	
Manufacturer Address	Hong Kong San Po Kong No. 99 King Fuk Street Kai Tak Fty Building RmD07, 8/ F	
Factory	GCam Robot Co., Limited	
Factory Address	Hong Kong San Po Kong No. 99 King Fuk Street Kai Tak Fty Building RmD07, 8/ F	
Product description		
Product name	golfeye	
Trademark		
Model name	Ge01	
Series Model(s)	N/A	
Standards	47 CFR Part 15.247	
Test Method	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02	
Testing Information		
Date of test	2025-02-19 to 2025-07-16	
Test result	Pass	
Prepared by:	Yanice.Xie	
Reviewed by:	David Lee	
Approved by:	Lewis Lian	

TEST REPORT

Report No.: MTi241204005-0105E3

1 General Description

1.1 Description of the EUT

Product name:	golfeye
Model name:	Ge01
Series Model(s):	N/A
Model difference:	N/A
Electrical rating:	Input: DC 12V/2A Battery: DC 12.6V 15000mAh
Accessories:	1.Extension rod*1 2.Ground stake*1 3.Tripod*1
Hardware version:	GCam_Ge01_Hardware_V1.0
Software version:	GCam_Ge01_Software_V1.0
Test sample(s) number:	MTi241204005-01-R001
RF specification	
Operating frequency range:	802.11b/g/n20:2412~2462 MHz 802.11n40:2422~2452 MHz
Channel number:	802.11b/g/n(HT20)/ax20: 11; 802.11n(HT40)/ax40: 9
Modulation type:	802.11b: DSSS(CCK, DBPSK, DQPSK); 802.11g: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n(HT20 and HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ax20/ax40: OFDMA (64QAM, 16QAM, QPSK, BPSK)
Antenna(s) type:	ANT 1:PCB Antenna, ANT2:FPC Antenna
Antenna(s) gain:	ANT 1:2.38 dBi, ANT 2:3.78 dBi ANT1 and ANT2 are correlated antennas and Directive Antenna gain: 6.12dBi

1.2 Description of test modes

No.	Emission test modes
Mode1	TX-802.11b(ANT1)
Mode2	TX-802.11g(ANT1)
Mode3	TX-802.11b(ANT2)
Mode4	TX-802.11g(ANT2)
Mode5	TX-802.11N20(ANT1)
Mode6	TX-802.11N40(ANT1)
Mode7	TX-802.11N20(ANT2)
Mode8	TX-802.11N40(ANT2)
Mode9	TX-802.11N20(MIMO)
Mode10	TX-802.11N40(MIMO)

TEST REPORT

Report No.: MTi241204005-0105E3

Mode11	TX-802.11ax20(ANT1)
Mode12	TX-802.11ax40(ANT1)
Mode13	TX-802.11ax20(ANT2)
Mode14	TX-802.11ax40(ANT2)
Mode15	TX-802.11ax20(MIMO)
Mode16	TX-802.11ax40(MIMO)
Note: 1.ANT 1:FPC Antenna, ANT 2:FPC Antenna 2. 802.11ax only supports full RU.	

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

Test Channel List

Operation Band: 2400-2483.5 MHz

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	2412	2437	2462
40	2422	2437	2452

Note: The test software provided by manufacturer is used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software: Qualcomm Radio Control Tool

For power setting, refer to below table.

SISO:
ANT1:

Mode	2412MHz	2437MHz	2462MHz
802.11b	2	2	3
802.11g	0	-2	0
802.11n20	-2	-2	-2
802.11ax20	-2	-3	-2
Mode	2422MHz	2437MHz	2452MHz
802.11n40	-2	-2	-2

TEST REPORT

Report No.: MTi241204005-0105E3

802.11ax40	-2	-3	-2
------------	----	----	----

ANT2:

Mode	2412MHz	2437MHz	2462MHz
802.11b	3	3	4
802.11g	-2	-3	-2
802.11n20	-2	-3	-2
802.11ax20	-2	-3	-3
Mode	2422MHz	2437MHz	2452MHz
802.11n40	-2	-3	-2
802.11ax40	-3	-3	-3

MIMO:

ANT1:

Mode	2412MHz	2437MHz	2462MHz
802.11n20	-5	-6	-4
802.11ax20	-5	-6	-4
Mode	2422MHz	2437MHz	2452MHz
802.11n40	-5	-6	-4
802.11ax40	-6	-6	-5

ANT2:

Mode	2412MHz	2437MHz	2462MHz
802.11n20	-5	-6	-4
802.11ax20	-5	-6	-4
Mode	2422MHz	2437MHz	2452MHz
802.11n40	-5	-6	-4
802.11ax40	-6	-6	-5

TEST REPORT

Report No.: MTi241204005-0105E3

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list

Description	Model	Serial No.	Manufacturer
(USB-A)5W Adapter	A1443	/	APPLE

Support cable list

Description	Length (m)	From	To
/	/	/	/

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (above 1GHz)	±5.3dB
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

TEST REPORT

Report No.: MTi241204005-0105E3

2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15.247	47 CFR 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
3	6dB Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
4	Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
5	Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
6	RF conducted spurious emissions and band edge measurement	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
7	Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
8	Radiated emissions (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
9	Radiated emissions (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass

TEST REPORT

Report No.: MTi241204005-0105E3

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093

TEST REPORT

Report No.: MTi241204005-0105E3

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2024-03-20	2025-03-19
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2024-03-21	2025-03-20
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2024-03-20	2025-03-19
Power Spectral Density Emissions in non-restricted frequency bands 6dB Bandwidth Maximum Conducted Output Power						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2024-03-20	2025-03-19
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2024-03-21	2025-03-20
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2024-03-21	2025-03-20
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2024-03-21	2025-03-20
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2024-03-21	2025-03-20
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2024-03-21	2025-03-20
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2024-03-21	2025-03-20
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2024-03-20	2025-03-19
9	DC Power Supply	Agilent	E3632A	MY40027695	2024-03-21	2025-03-20
Band edge emissions (Radiated) Emissions in frequency bands (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2024-03-20	2025-03-19
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-06-17	2025-06-16
3	Amplifier	Agilent	8449B	3008A01120	2024-03-20	2025-03-19
4	MXA signal analyzer	Agilent	N9020A	MY54440859	2024-03-21	2025-03-20
5	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2024-03-21	2025-03-20
6	Horn antenna	Schwarzbeck	BBHA 9170	00987	2023-06-17	2025-06-16
7	Pre-amplifier	Space-Dtronics	EWLAN1840 G	210405001	2024-03-21	2025-03-20
Emissions in frequency bands (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2024-03-20	2025-03-19
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2024-03-23	2025-03-22

TEST REPORT

Report No.: MTi241204005-0105E3

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
4	Amplifier	Hewlett-Packard	8447F	3113A06184	2024-03-20	2025-03-19

TEST REPORT

Report No.: MTi241204005-0105E3

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2025-03-14	2026-03-13
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2025-03-18	2026-03-17
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2025-03-18	2026-03-17
Power Spectral Density Emissions in non-restricted frequency bands 6dB Bandwidth Maximum Conducted Output Power						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2025-03-18	2026-03-17
2	ESG Series Analog Signal Generator	Agilent	E4421B	GB40051240	2025-03-14	2026-03-13
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2025-03-14	2026-03-13
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2025-03-14	2026-03-13
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2025-03-14	2026-03-13
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2025-03-18	2026-03-17
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2025-03-14	2026-03-13
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2025-03-14	2026-03-13
9	DC Power Supply	Agilent	E3632A	MY40027695	2025-03-18	2026-03-17
Band edge emissions (Radiated) Emissions in frequency bands (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2025-03-14	2026-03-13
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2025-05-27	2027-05-26
3	Amplifier	Agilent	8449B	3008A01120	2025-03-18	2026-03-17
4	MXA signal analyzer	Agilent	N9020A	MY54440859	2025-03-14	2026-03-13
5	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2025-03-14	2026-03-13
6	Horn antenna	Schwarzbeck	BBHA 9170	00987	2025-05-27	2027-05-26
7	Pre-amplifier	Space-Dtronics	EWLAN1840 G	210405001	2025-03-19	2026-03-18
Emissions in frequency bands (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2025-03-14	2026-03-13
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2025-05-23	2027-05-22
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2024-03-23	2026-03-22

TEST REPORT

Report No.: MTi241204005-0105E3

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
4	Amplifier	Hewlett-Packard	8447F	3113A0618 4	2025-03- 18	2026-03- 17

TEST REPORT

Report No.: MTi241204005-0105E3

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

5.1.1 Conclusion:

The antenna of the EUT is permanently attached.
The EUT complies with the requirement of FCC PART 15.203.

TEST REPORT

Report No.: MTi241204005-0105E3

6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Test Method:	ANSI C63.10-2013 section 6.2		
Procedure:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

6.1.1 E.U.T. Operation:

Operating Environment:					
Temperature:	26 °C	Humidity:	59 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				

6.1.2 Test Setup Diagram:

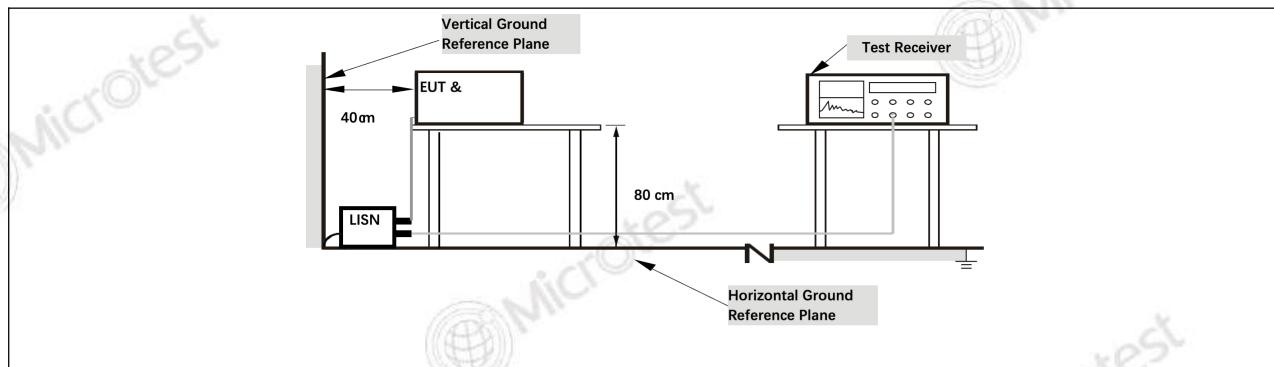


TEST REPORT

Report No.: MTi241204005-0105E3

6.1.3 Test Data:


Mode1 / Line: Line / CH: L

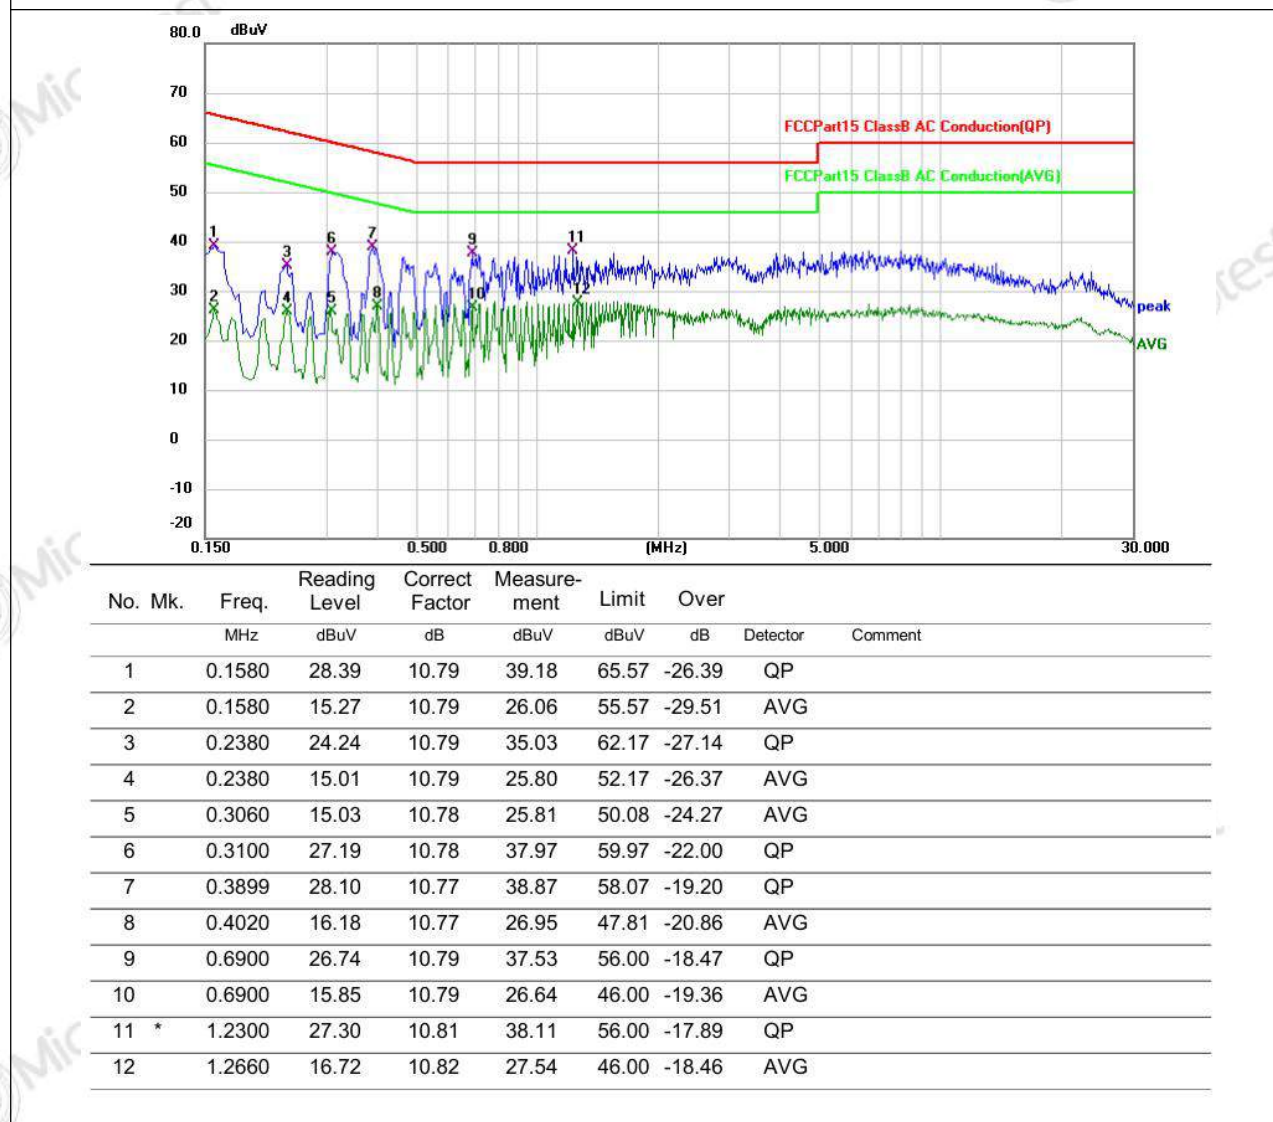

TEST REPORT

Report No.: MTi241204005-0105E3

Mode1 / Line: Neutral / CH: L

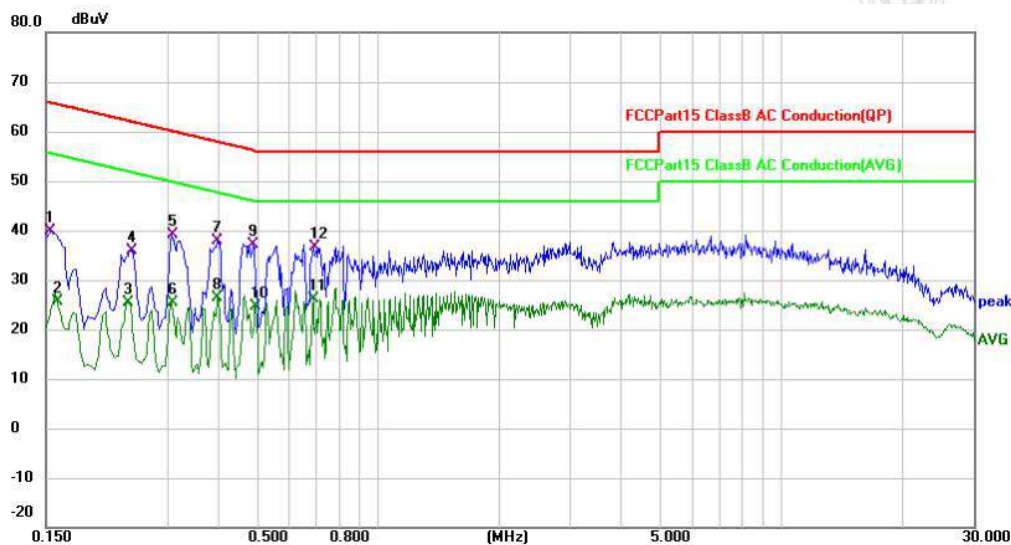

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	29.28	10.69	39.97	65.79	-25.82	QP	
2		0.1598	14.98	10.69	25.67	55.47	-29.80	AVG	
3		0.2403	14.79	10.68	25.47	52.09	-26.62	AVG	
4		0.2420	25.27	10.68	35.95	62.03	-26.08	QP	
5		0.3060	28.49	10.67	39.16	60.08	-20.92	QP	
6		0.3060	14.64	10.67	25.31	50.08	-24.77	AVG	
7		0.3980	27.24	10.67	37.91	57.90	-19.99	QP	
8		0.3980	15.69	10.67	26.36	47.90	-21.54	AVG	
9	*	0.4900	26.34	10.67	37.01	56.17	-19.16	QP	
10		0.4940	13.97	10.67	24.64	46.10	-21.46	AVG	
11		0.6900	15.42	10.69	26.11	46.00	-19.89	AVG	
12		0.6940	25.89	10.69	36.58	56.00	-19.42	QP	

TEST REPORT

Report No.: MTi241204005-0105E3


6.2 6dB Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2013, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	58 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16				

6.2.2 Test Setup Diagram:

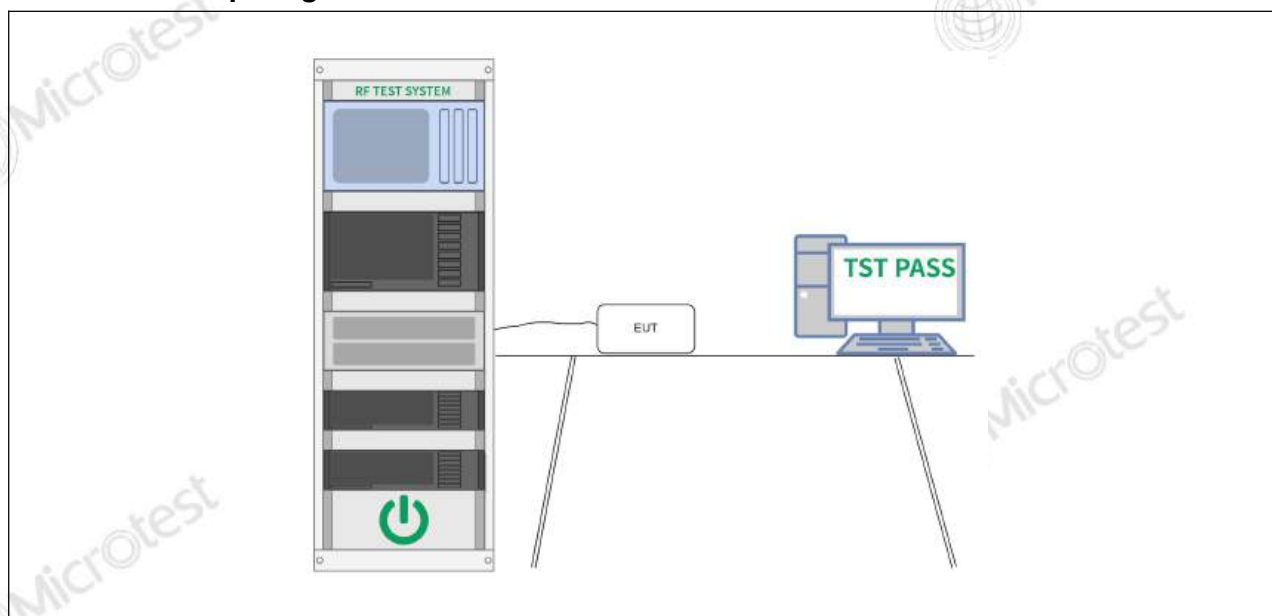

6.2.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTi241204005-0105E3


6.3 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2013, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.9.1.3 PKPM1 Peak power meter method

6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	58 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16				

6.3.2 Test Setup Diagram:

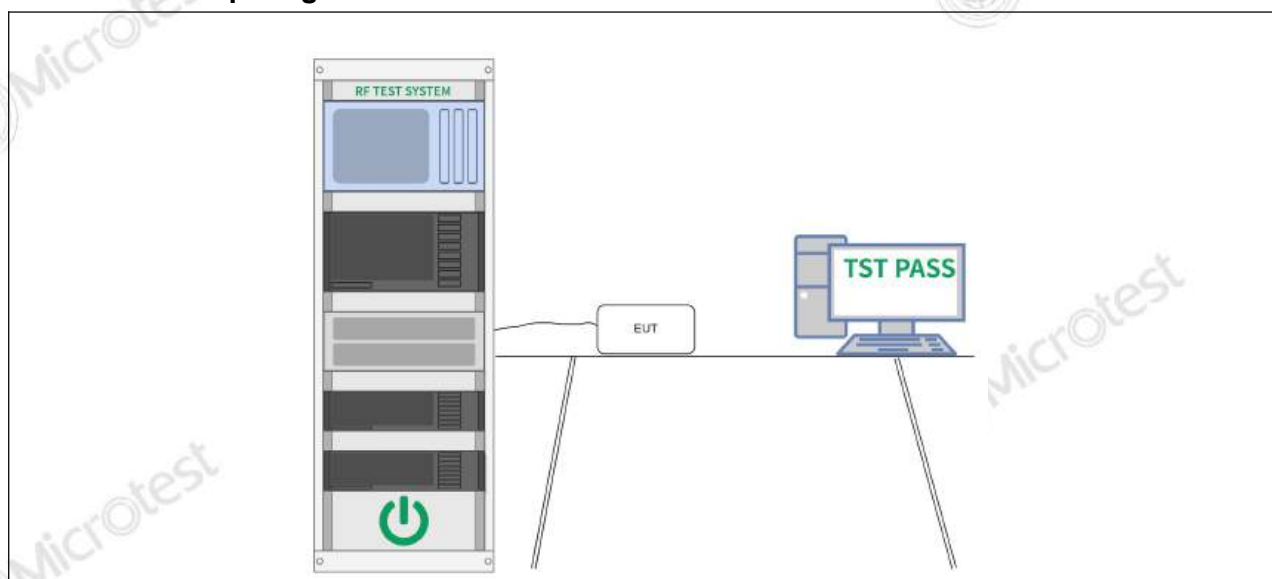

6.3.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTi241204005-0105E3


6.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2013, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.10.2, Maximum power spectral density level in the fundamental emission

6.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	58 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16				

6.4.2 Test Setup Diagram:

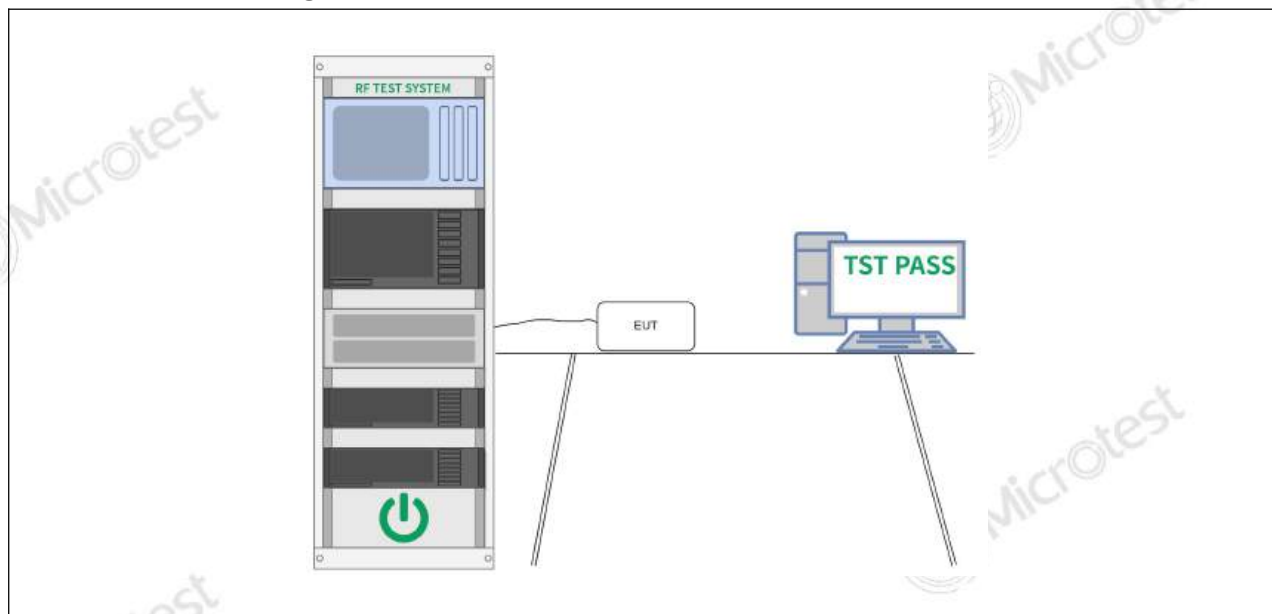

6.4.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTi241204005-0105E3


6.5 RF conducted spurious emissions and band edge measurement

Test Requirement:	47 CFR 15.247(d)
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2013 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	58 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16				

6.5.2 Test Setup Diagram:

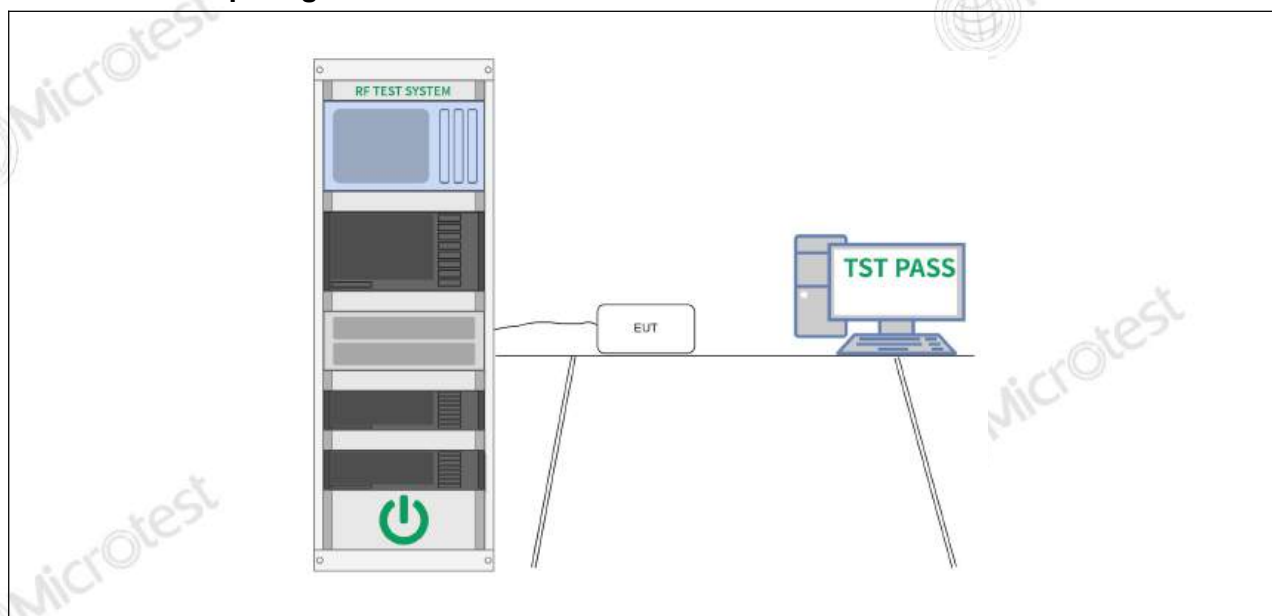

6.5.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTi241204005-0105E3

6.6 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2013 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.10.5.2		


6.6.1 E.U.T. Operation:

Operating Environment:					
Temperature:	19.3 °C	Humidity:	48.2 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16				
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.					

TEST REPORT

Report No.: MTi241204005-0105E3

6.6.2 Test Setup Diagram:

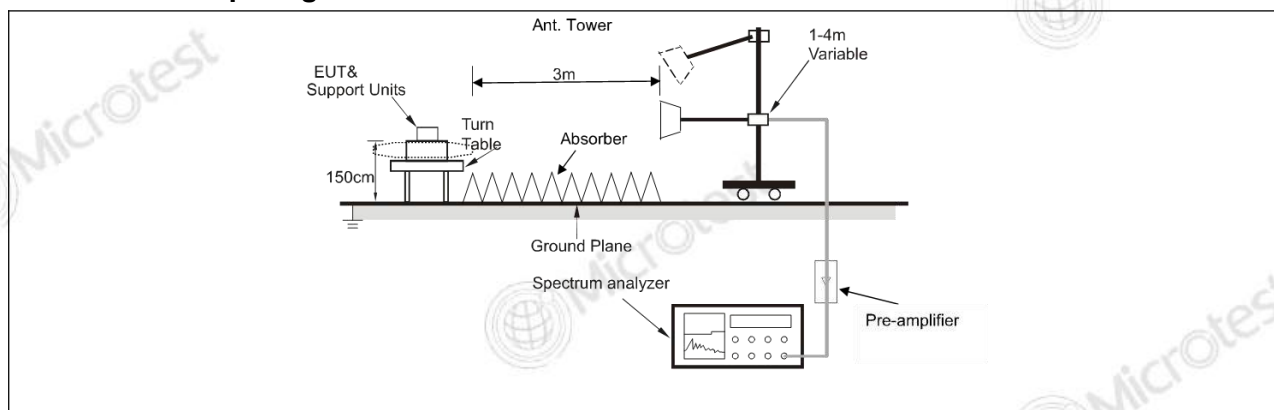

TEST REPORT

Report No.: MTi241204005-0105E3

6.6.3 Test Data:

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.81	-4.50	48.31	74.00	-25.69	peak
2		2310.000	42.59	-4.50	38.09	54.00	-15.91	AVG
3		2390.000	51.22	-4.31	46.91	74.00	-27.09	peak
4	*	2390.000	42.92	-4.31	38.61	54.00	-15.39	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.61	-4.50	47.11	74.00	-26.89	peak
2	*	2310.000	42.80	-4.50	38.30	54.00	-15.70	AVG
3		2390.000	52.15	-4.31	47.84	74.00	-26.16	peak
4		2390.000	42.58	-4.31	38.27	54.00	-15.73	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.13	-4.23	43.90	74.00	-30.10	peak
2	*	2483.500	38.42	-4.23	34.19	54.00	-19.81	AVG
3		2500.000	47.68	-4.15	43.53	74.00	-30.47	peak
4		2500.000	38.02	-4.15	33.87	54.00	-20.13	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	45.75	-4.23	41.52	74.00	-32.48	peak
2	*	2483.500	38.21	-4.23	33.98	54.00	-20.02	AVG
3		2500.000	47.05	-4.15	42.90	74.00	-31.10	peak
4		2500.000	37.88	-4.15	33.73	54.00	-20.27	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode2 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	50.87	-4.50	46.37	74.00	-27.63	peak
2		2310.000	41.93	-4.50	37.43	54.00	-16.57	AVG
3		2390.000	50.85	-4.31	46.54	74.00	-27.46	peak
4	*	2390.000	42.21	-4.31	37.90	54.00	-16.10	AVG

Mode2 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.04	-4.50	47.54	74.00	-26.46	peak
2		2310.000	42.44	-4.50	37.94	54.00	-16.06	AVG
3		2390.000	50.83	-4.31	46.52	74.00	-27.48	peak
4	*	2390.000	42.48	-4.31	38.17	54.00	-15.83	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode2 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.78	-4.23	43.55	74.00	-30.45	peak
2	*	2483.500	38.18	-4.23	33.95	54.00	-20.05	AVG
3		2500.000	46.98	-4.15	42.83	74.00	-31.17	peak
4		2500.000	38.10	-4.15	33.95	54.00	-20.05	AVG

Mode2 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.64	-4.23	43.41	74.00	-30.59	peak
2	*	2483.500	38.29	-4.23	34.06	54.00	-19.94	AVG
3		2500.000	47.49	-4.15	43.34	74.00	-30.66	peak
4		2500.000	38.07	-4.15	33.92	54.00	-20.08	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode3 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.92	-4.50	47.42	74.00	-26.58	peak
2		2310.000	42.48	-4.50	37.98	54.00	-16.02	AVG
3		2390.000	52.72	-4.31	48.41	74.00	-25.59	peak
4	*	2390.000	42.59	-4.31	38.28	54.00	-15.72	AVG

Mode3 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.04	-4.50	47.54	74.00	-26.46	peak
2		2310.000	42.61	-4.50	38.11	54.00	-15.89	AVG
3		2390.000	52.38	-4.31	48.07	74.00	-25.93	peak
4	*	2390.000	42.46	-4.31	38.15	54.00	-15.85	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode3 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.54	-4.23	43.31	74.00	-30.69	peak
2	*	2483.500	38.67	-4.23	34.44	54.00	-19.56	AVG
3		2500.000	47.97	-4.15	43.82	74.00	-30.18	peak
4		2500.000	37.98	-4.15	33.83	54.00	-20.17	AVG

Mode3 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	46.88	-4.23	42.65	74.00	-31.35	peak
2	*	2483.500	38.17	-4.23	33.94	54.00	-20.06	AVG
3		2500.000	47.29	-4.15	43.14	74.00	-30.86	peak
4		2500.000	38.08	-4.15	33.93	54.00	-20.07	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode4 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.43	-4.50	46.93	74.00	-27.07	peak
2		2310.000	42.46	-4.50	37.96	54.00	-16.04	AVG
3		2390.000	52.77	-4.31	48.46	74.00	-25.54	peak
4	*	2390.000	42.66	-4.31	38.35	54.00	-15.65	AVG

Mode4 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.75	-4.50	47.25	74.00	-26.75	peak
2		2310.000	42.57	-4.50	38.07	54.00	-15.93	AVG
3		2390.000	51.62	-4.31	47.31	74.00	-26.69	peak
4	*	2390.000	42.51	-4.31	38.20	54.00	-15.80	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode4 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.88	-4.23	43.65	74.00	-30.35	peak
2	*	2483.500	38.38	-4.23	34.15	54.00	-19.85	AVG
3		2500.000	47.98	-4.15	43.83	74.00	-30.17	peak
4		2500.000	38.11	-4.15	33.96	54.00	-20.04	AVG

Mode4 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.46	-4.23	43.23	74.00	-30.77	peak
2	*	2483.500	38.19	-4.23	33.96	54.00	-20.04	AVG
3		2500.000	46.67	-4.15	42.52	74.00	-31.48	peak
4		2500.000	37.88	-4.15	33.73	54.00	-20.27	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode5 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.01	-4.50	47.51	74.00	-26.49	peak
2		2310.000	42.51	-4.50	38.01	54.00	-15.99	AVG
3		2390.000	51.46	-4.31	47.15	74.00	-26.85	peak
4	*	2390.000	42.76	-4.31	38.45	54.00	-15.55	AVG

Mode5 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	50.91	-4.50	46.41	74.00	-27.59	peak
2		2310.000	42.43	-4.50	37.93	54.00	-16.07	AVG
3		2390.000	52.24	-4.31	47.93	74.00	-26.07	peak
4	*	2390.000	42.50	-4.31	38.19	54.00	-15.81	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode5 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.27	-4.23	43.04	74.00	-30.96	peak
2	*	2483.500	38.64	-4.23	34.41	54.00	-19.59	AVG
3		2500.000	47.62	-4.15	43.47	74.00	-30.53	peak
4		2500.000	38.10	-4.15	33.95	54.00	-20.05	AVG

Mode5 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.71	-4.23	43.48	74.00	-30.52	peak
2	*	2483.500	38.10	-4.23	33.87	54.00	-20.13	AVG
3		2500.000	47.09	-4.15	42.94	74.00	-31.06	peak
4		2500.000	37.97	-4.15	33.82	54.00	-20.18	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode6 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.59	-4.50	47.09	74.00	-26.91	peak
2		2310.000	42.44	-4.50	37.94	54.00	-16.06	AVG
3		2390.000	51.51	-4.31	47.20	74.00	-26.80	peak
4	*	2390.000	42.82	-4.31	38.51	54.00	-15.49	AVG

Mode6 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	50.50	-4.50	46.00	74.00	-28.00	peak
2		2310.000	42.33	-4.50	37.83	54.00	-16.17	AVG
3		2390.000	52.29	-4.31	47.98	74.00	-26.02	peak
4	*	2390.000	42.65	-4.31	38.34	54.00	-15.66	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode6 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.56	-4.23	44.33	74.00	-29.67	peak
2	*	2483.500	38.52	-4.23	34.29	54.00	-19.71	AVG
3		2500.000	47.23	-4.15	43.08	74.00	-30.92	peak
4		2500.000	37.96	-4.15	33.81	54.00	-20.19	AVG

Mode6 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.01	-4.23	42.78	74.00	-31.22	peak
2		2483.500	38.02	-4.23	33.79	54.00	-20.21	AVG
3		2500.000	46.92	-4.15	42.77	74.00	-31.23	peak
4	*	2500.000	38.08	-4.15	33.93	54.00	-20.07	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode7 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.17	-4.50	46.67	74.00	-27.33	peak
2		2310.000	42.36	-4.50	37.86	54.00	-16.14	AVG
3		2390.000	51.08	-4.31	46.77	74.00	-27.23	peak
4	*	2390.000	42.58	-4.31	38.27	54.00	-15.73	AVG

Mode7 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.81	-4.50	47.31	74.00	-26.69	peak
2		2310.000	42.29	-4.50	37.79	54.00	-16.21	AVG
3		2390.000	51.94	-4.31	47.63	74.00	-26.37	peak
4	*	2390.000	42.59	-4.31	38.28	54.00	-15.72	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode7 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.28	-4.23	44.05	74.00	-29.95	peak
2	*	2483.500	38.18	-4.23	33.95	54.00	-20.05	AVG
3		2500.000	47.35	-4.15	43.20	74.00	-30.80	peak
4		2500.000	37.76	-4.15	33.61	54.00	-20.39	AVG

Mode7 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	45.94	-4.23	41.71	74.00	-32.29	peak
2	*	2483.500	38.25	-4.23	34.02	54.00	-19.98	AVG
3		2500.000	47.55	-4.15	43.40	74.00	-30.60	peak
4		2500.000	37.80	-4.15	33.65	54.00	-20.35	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode8 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.67	-4.50	47.17	74.00	-26.83	peak
2		2310.000	42.38	-4.50	37.88	54.00	-16.12	AVG
3		2390.000	51.14	-4.31	46.83	74.00	-27.17	peak
4	*	2390.000	42.76	-4.31	38.45	54.00	-15.55	AVG

Mode8 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.32	-4.50	46.82	74.00	-27.18	peak
2		2310.000	42.42	-4.50	37.92	54.00	-16.08	AVG
3		2390.000	52.65	-4.31	48.34	74.00	-25.66	peak
4	*	2390.000	42.41	-4.31	38.10	54.00	-15.90	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode8 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	49.10	-4.23	44.87	74.00	-29.13	peak
2		2483.500	38.15	-4.23	33.92	54.00	-20.08	AVG
3		2500.000	47.20	-4.15	43.05	74.00	-30.95	peak
4	*	2500.000	38.22	-4.15	34.07	54.00	-19.93	AVG

Mode8 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.89	-4.23	43.66	74.00	-30.34	peak
2		2483.500	37.98	-4.23	33.75	54.00	-20.25	AVG
3		2500.000	48.27	-4.15	44.12	74.00	-29.88	peak
4	*	2500.000	38.05	-4.15	33.90	54.00	-20.10	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode9 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.68	-4.50	47.18	74.00	-26.82	peak
2		2310.000	42.43	-4.50	37.93	54.00	-16.07	AVG
3		2390.000	52.98	-4.31	48.67	74.00	-25.33	peak
4	*	2390.000	42.65	-4.31	38.34	54.00	-15.66	AVG

Mode9 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	50.50	-4.50	46.00	74.00	-28.00	peak
2	*	2310.000	42.45	-4.50	37.95	54.00	-16.05	AVG
3		2390.000	51.54	-4.31	47.23	74.00	-26.77	peak
4		2390.000	42.14	-4.31	37.83	54.00	-16.17	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode9 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.49	-4.23	43.26	74.00	-30.74	peak
2		2483.500	38.33	-4.23	34.10	54.00	-19.90	AVG
3		2500.000	47.50	-4.15	43.35	74.00	-30.65	peak
4	*	2500.000	38.42	-4.15	34.27	54.00	-19.73	AVG

Mode9 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	46.78	-4.23	42.55	74.00	-31.45	peak
2	*	2483.500	38.24	-4.23	34.01	54.00	-19.99	AVG
3		2500.000	46.85	-4.15	42.70	74.00	-31.30	peak
4		2500.000	37.80	-4.15	33.65	54.00	-20.35	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode10 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.57	-4.50	48.07	74.00	-25.93	peak
2		2310.000	42.67	-4.50	38.17	54.00	-15.83	AVG
3		2390.000	51.83	-4.31	47.52	74.00	-26.48	peak
4	*	2390.000	42.70	-4.31	38.39	54.00	-15.61	AVG

Mode10 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.09	-4.50	47.59	74.00	-26.41	peak
2		2310.000	42.37	-4.50	37.87	54.00	-16.13	AVG
3		2390.000	51.73	-4.31	47.42	74.00	-26.58	peak
4	*	2390.000	42.67	-4.31	38.36	54.00	-15.64	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode10 / Polarization: Horizontal / CH: H

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2483.500	47.29	-4.23	43.06	74.00	-30.94	peak
2 *	2483.500	38.17	-4.23	33.94	54.00	-20.06	AVG
3	2500.000	47.81	-4.15	43.66	74.00	-30.34	peak
4	2500.000	38.01	-4.15	33.86	54.00	-20.14	AVG

Mode10 / Polarization: Vertical / CH: H

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2483.500	47.40	-4.23	43.17	74.00	-30.83	peak
2 *	2483.500	38.05	-4.23	33.82	54.00	-20.18	AVG
3	2500.000	48.14	-4.15	43.99	74.00	-30.01	peak
4	2500.000	37.97	-4.15	33.82	54.00	-20.18	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode11 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.69	-4.50	47.19	74.00	-26.81	peak
2		2310.000	42.44	-4.50	37.94	54.00	-16.06	AVG
3		2390.000	51.91	-4.31	47.60	74.00	-26.40	peak
4	*	2390.000	42.69	-4.31	38.38	54.00	-15.62	AVG

Mode11 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.83	-4.50	47.33	74.00	-26.67	peak
2		2310.000	42.41	-4.50	37.91	54.00	-16.09	AVG
3		2390.000	51.93	-4.31	47.62	74.00	-26.38	peak
4	*	2390.000	42.59	-4.31	38.28	54.00	-15.72	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode11 / Polarization: Horizontal / CH: H

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	2483.500	48.38	-4.23	44.15	74.00	-29.85	peak
2 *	2483.500	38.33	-4.23	34.10	54.00	-19.90	AVG
3	2500.000	47.02	-4.15	42.87	74.00	-31.13	peak
4	2500.000	38.23	-4.15	34.08	54.00	-19.92	AVG

Mode11 / Polarization: Vertical / CH: H

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	2483.500	47.34	-4.23	43.11	74.00	-30.89	peak
2 *	2483.500	38.08	-4.23	33.85	54.00	-20.15	AVG
3	2500.000	46.81	-4.15	42.66	74.00	-31.34	peak
4	2500.000	37.96	-4.15	33.81	54.00	-20.19	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode12 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	53.16	-4.50	48.66	74.00	-25.34	peak
2		2310.000	42.53	-4.50	38.03	54.00	-15.97	AVG
3		2390.000	51.98	-4.31	47.67	74.00	-26.33	peak
4	*	2390.000	42.93	-4.31	38.62	54.00	-15.38	AVG

Mode12 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.84	-4.50	47.34	74.00	-26.66	peak
2		2310.000	42.41	-4.50	37.91	54.00	-16.09	AVG
3		2390.000	52.27	-4.31	47.96	74.00	-26.04	peak
4	*	2390.000	42.54	-4.31	38.23	54.00	-15.77	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode12 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.41	-4.23	43.18	74.00	-30.82	peak
2	*	2483.500	38.29	-4.23	34.06	54.00	-19.94	AVG
3		2500.000	48.28	-4.15	44.13	74.00	-29.87	peak
4		2500.000	37.88	-4.15	33.73	54.00	-20.27	AVG

Mode12 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.22	-4.23	42.99	74.00	-31.01	peak
2		2483.500	37.93	-4.23	33.70	54.00	-20.30	AVG
3		2500.000	46.07	-4.15	41.92	74.00	-32.08	peak
4	*	2500.000	38.03	-4.15	33.88	54.00	-20.12	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode13 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.80	-4.50	47.30	74.00	-26.70	peak
2		2310.000	42.57	-4.50	38.07	54.00	-15.93	AVG
3		2390.000	50.47	-4.31	46.16	74.00	-27.84	peak
4	*	2390.000	42.56	-4.31	38.25	54.00	-15.75	AVG

Mode13 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.67	-4.50	47.17	74.00	-26.83	peak
2		2310.000	42.53	-4.50	38.03	54.00	-15.97	AVG
3		2390.000	52.28	-4.31	47.97	74.00	-26.03	peak
4	*	2390.000	42.52	-4.31	38.21	54.00	-15.79	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode13 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.35	-4.23	43.12	74.00	-30.88	peak
2	*	2483.500	38.45	-4.23	34.22	54.00	-19.78	AVG
3		2500.000	47.14	-4.15	42.99	74.00	-31.01	peak
4		2500.000	37.97	-4.15	33.82	54.00	-20.18	AVG

Mode13 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.01	-4.23	43.78	74.00	-30.22	peak
2		2483.500	37.81	-4.23	33.58	54.00	-20.42	AVG
3		2500.000	47.78	-4.15	43.63	74.00	-30.37	peak
4	*	2500.000	37.99	-4.15	33.84	54.00	-20.16	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode14 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.09	-4.50	47.59	74.00	-26.41	peak
2		2310.000	42.48	-4.50	37.98	54.00	-16.02	AVG
3		2390.000	51.61	-4.31	47.30	74.00	-26.70	peak
4	*	2390.000	42.39	-4.31	38.08	54.00	-15.92	AVG

Mode14 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	53.41	-4.50	48.91	74.00	-25.09	peak
2		2310.000	42.43	-4.50	37.93	54.00	-16.07	AVG
3		2390.000	51.99	-4.31	47.68	74.00	-26.32	peak
4	*	2390.000	42.51	-4.31	38.20	54.00	-15.80	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode14 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	46.71	-4.23	42.48	74.00	-31.52	peak
2	*	2483.500	38.36	-4.23	34.13	54.00	-19.87	AVG
3		2500.000	48.56	-4.15	44.41	74.00	-29.59	peak
4		2500.000	37.87	-4.15	33.72	54.00	-20.28	AVG

Mode14 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.26	-4.23	43.03	74.00	-30.97	peak
2	*	2483.500	38.16	-4.23	33.93	54.00	-20.07	AVG
3		2500.000	47.21	-4.15	43.06	74.00	-30.94	peak
4		2500.000	38.06	-4.15	33.91	54.00	-20.09	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode15 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.63	-4.50	47.13	74.00	-26.87	peak
2		2310.000	42.30	-4.50	37.80	54.00	-16.20	AVG
3		2390.000	51.80	-4.31	47.49	74.00	-26.51	peak
4	*	2390.000	42.77	-4.31	38.46	54.00	-15.54	AVG

Mode15 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.81	-4.50	47.31	74.00	-26.69	peak
2		2310.000	42.21	-4.50	37.71	54.00	-16.29	AVG
3		2390.000	51.91	-4.31	47.60	74.00	-26.40	peak
4	*	2390.000	42.50	-4.31	38.19	54.00	-15.81	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode15 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.73	-4.23	43.50	74.00	-30.50	peak
2	*	2483.500	38.33	-4.23	34.10	54.00	-19.90	AVG
3		2500.000	48.15	-4.15	44.00	74.00	-30.00	peak
4		2500.000	37.81	-4.15	33.66	54.00	-20.34	AVG

Mode15 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.17	-4.23	42.94	74.00	-31.06	peak
2	*	2483.500	38.08	-4.23	33.85	54.00	-20.15	AVG
3		2500.000	47.93	-4.15	43.78	74.00	-30.22	peak
4		2500.000	37.94	-4.15	33.79	54.00	-20.21	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode16 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	50.89	-4.50	46.39	74.00	-27.61	peak
2		2310.000	42.83	-4.50	38.33	54.00	-15.67	AVG
3		2390.000	52.20	-4.31	47.89	74.00	-26.11	peak
4	*	2390.000	42.67	-4.31	38.36	54.00	-15.64	AVG

Mode16 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.24	-4.50	47.74	74.00	-26.26	peak
2		2310.000	42.36	-4.50	37.86	54.00	-16.14	AVG
3		2390.000	51.85	-4.31	47.54	74.00	-26.46	peak
4	*	2390.000	42.62	-4.31	38.31	54.00	-15.69	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode16 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.59	-4.23	43.36	74.00	-30.64	peak
2		2483.500	38.03	-4.23	33.80	54.00	-20.20	AVG
3		2500.000	46.56	-4.15	42.41	74.00	-31.59	peak
4	*	2500.000	38.03	-4.15	33.88	54.00	-20.12	AVG

Mode16 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.20	-4.23	42.97	74.00	-31.03	peak
2		2483.500	37.88	-4.23	33.65	54.00	-20.35	AVG
3		2500.000	47.96	-4.15	43.81	74.00	-30.19	peak
4	*	2500.000	38.07	-4.15	33.92	54.00	-20.08	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

6.7 Radiated emissions (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		


6.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	19.3 °C	Humidity:	48.2 %	Atmospheric Pressure:	101 kPa
Pre test mode:		Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16			
Final test mode:		All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report			
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.					

TEST REPORT

Report No.: MTi241204005-0105E3

6.7.2 Test Setup Diagram:

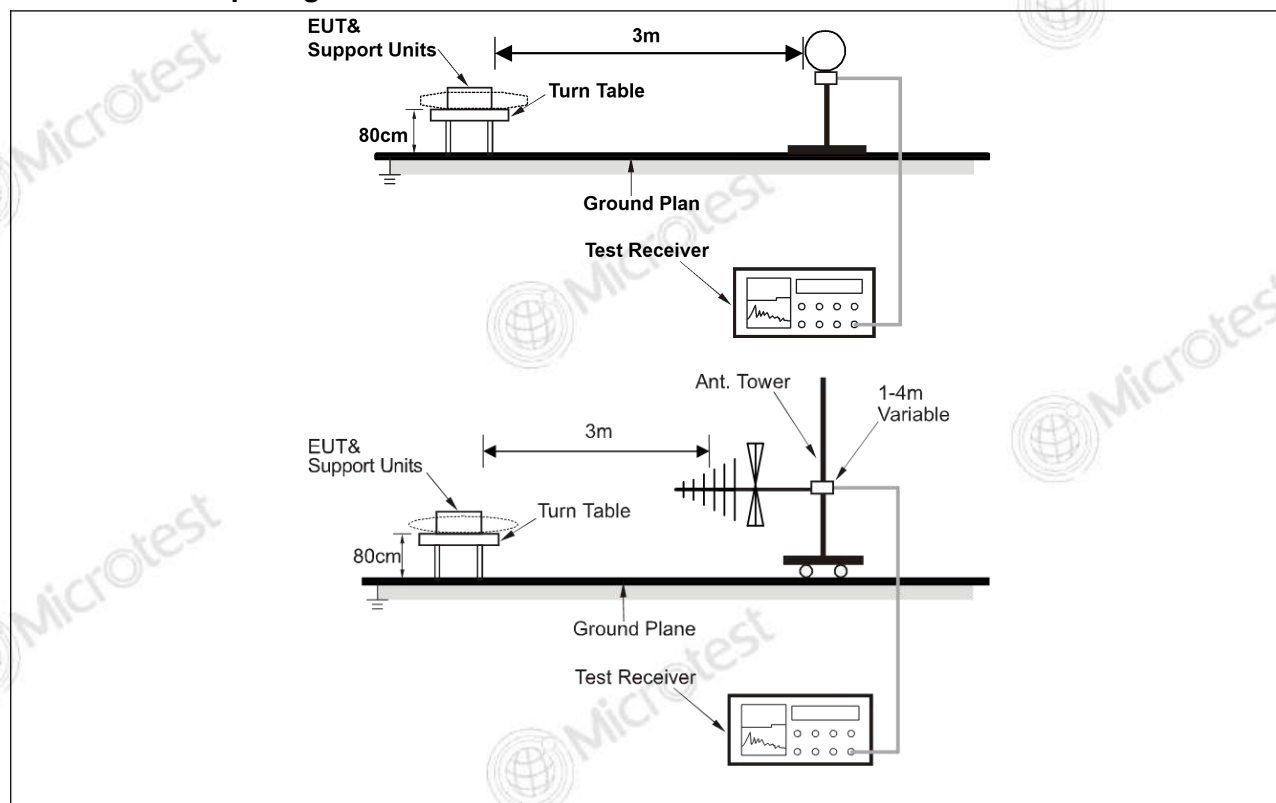


TEST REPORT

Report No.: MTi241204005-0105E3

6.7.3 Test Data:

Mode1 / Polarization: Horizontal / CH: H

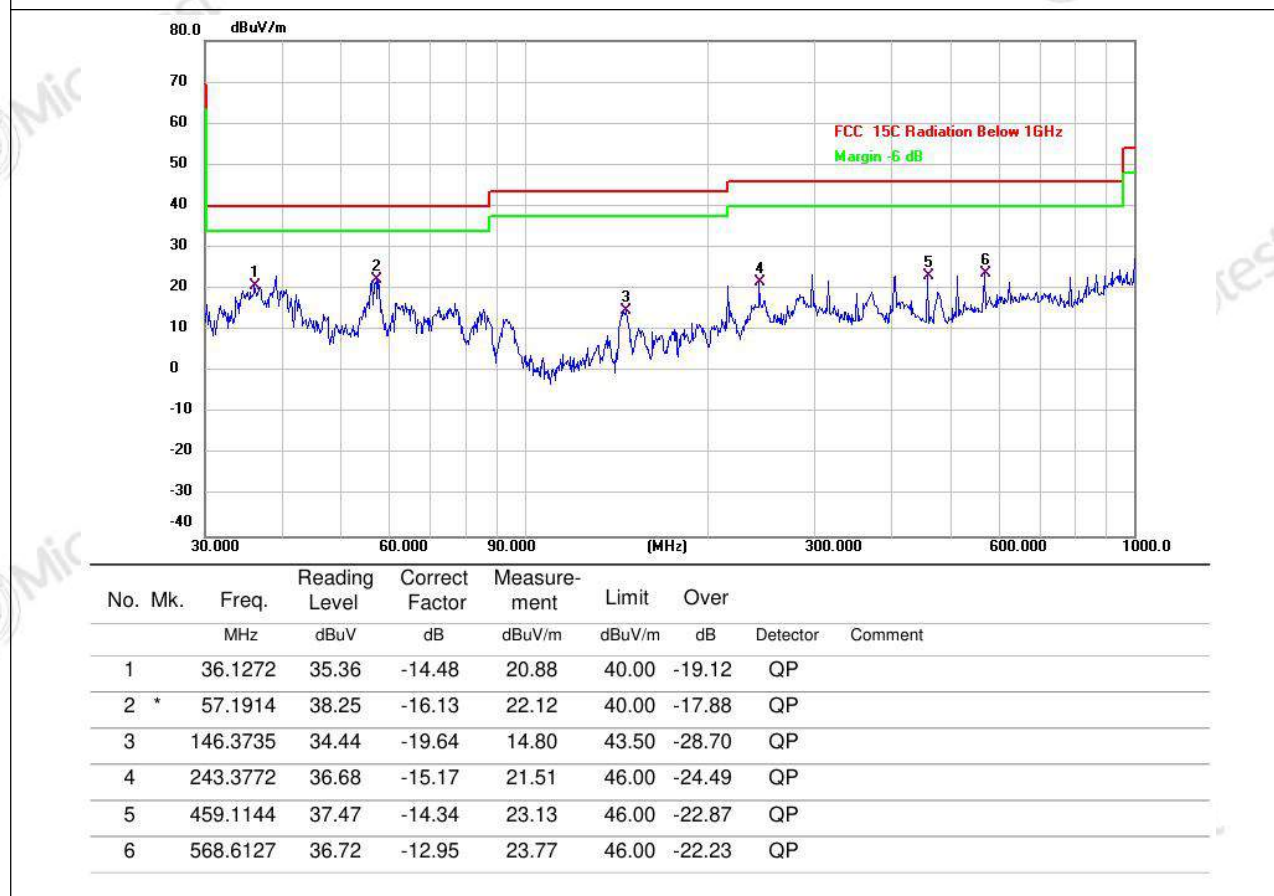

TEST REPORT

Report No.: MTi241204005-0105E3

Mode1 / Polarization: Vertical / CH: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		39.1616	43.48	-24.84	18.64	40.00	-21.36	QP	
2	*	55.4147	44.95	-22.08	22.87	40.00	-17.13	QP	
3		145.3506	30.32	-16.86	13.46	43.50	-30.04	QP	
4		243.3772	41.21	-18.82	22.39	46.00	-23.61	QP	
5		406.0880	36.10	-13.90	22.20	46.00	-23.80	QP	
6		675.2080	31.62	-9.01	22.61	46.00	-23.39	QP	

TEST REPORT

Report No.: MTi241204005-0105E3

6.8 Radiated emissions (above 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		


6.8.1 E.U.T. Operation:

Operating Environment:					
Temperature:	19.3 °C	Humidity:	48.2 %	Atmospheric Pressure:	101 kPa
Pre test mode:		Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10, Mode11, Mode12, Mode13, Mode14, Mode15, Mode16			
Final test mode:		All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report			
Note: Test frequency are from 1GHz to 25GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported.					

TEST REPORT

Report No.: MTi241204005-0105E3

6.8.2 Test Setup Diagram:

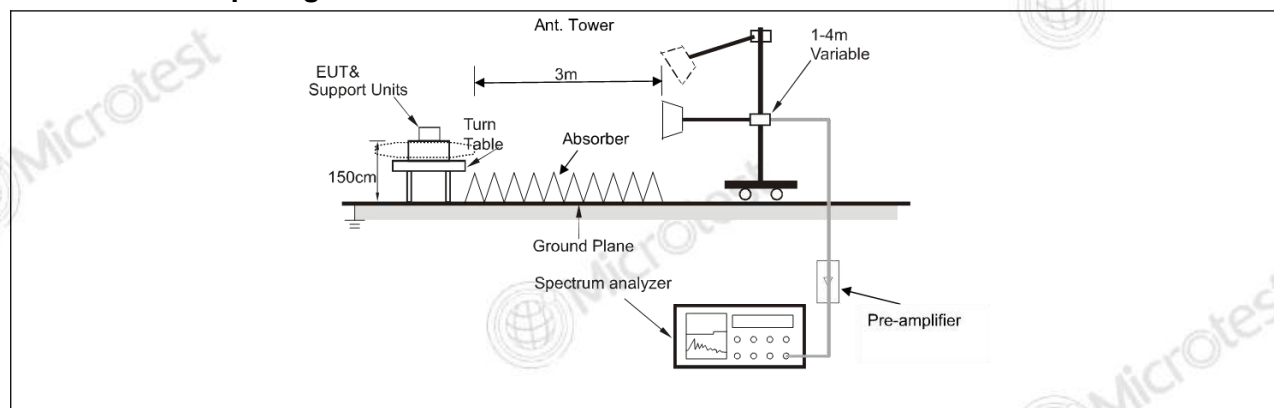

TEST REPORT

Report No.: MTi241204005-0105E3

6.8.3 Test Data:

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	43.64	1.86	45.50	74.00	-28.50	peak
2		4824.000	37.39	1.86	39.25	54.00	-14.75	AVG
3		7236.000	43.59	7.52	51.11	74.00	-22.89	peak
4		7236.000	37.95	7.52	45.47	54.00	-8.53	AVG
5		9648.000	44.15	9.07	53.22	74.00	-20.78	peak
6	*	9648.000	38.29	9.07	47.36	54.00	-6.64	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	44.12	1.86	45.98	74.00	-28.02	peak
2		4824.000	37.70	1.86	39.56	54.00	-14.44	AVG
3		7236.000	43.58	7.52	51.10	74.00	-22.90	peak
4		7236.000	37.69	7.52	45.21	54.00	-8.79	AVG
5		9648.000	44.58	9.07	53.65	74.00	-20.35	peak
6	*	9648.000	38.31	9.07	47.38	54.00	-6.62	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode1 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	43.90	2.07	45.97	74.00	-28.03	peak
2		4874.000	37.58	2.07	39.65	54.00	-14.35	AVG
3		7311.000	43.84	7.82	51.66	74.00	-22.34	peak
4		7311.000	37.45	7.82	45.27	54.00	-8.73	AVG
5		9748.000	44.24	9.38	53.62	74.00	-20.38	peak
6	*	9748.000	37.96	9.38	47.34	54.00	-6.66	AVG

Mode1 / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	43.19	2.07	45.26	74.00	-28.74	peak
2		4874.000	37.19	2.07	39.26	54.00	-14.74	AVG
3		7311.000	43.86	7.82	51.68	74.00	-22.32	peak
4		7311.000	37.56	7.82	45.38	54.00	-8.62	AVG
5		9748.000	44.60	9.38	53.98	74.00	-20.02	peak
6	*	9748.000	38.27	9.38	47.65	54.00	-6.35	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	42.56	2.32	44.88	74.00	-29.12	peak
2		4924.000	35.93	2.32	38.25	54.00	-15.75	AVG
3		7386.000	44.05	7.82	51.87	74.00	-22.13	peak
4		7386.000	37.65	7.82	45.47	54.00	-8.53	AVG
5		9848.000	45.60	9.48	55.08	74.00	-18.92	peak
6	*	9848.000	39.75	9.48	49.23	54.00	-4.77	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	43.26	2.32	45.58	74.00	-28.42	peak
2		4924.000	37.25	2.32	39.57	54.00	-14.43	AVG
3		7386.000	43.49	7.82	51.31	74.00	-22.69	peak
4		7386.000	37.46	7.82	45.28	54.00	-8.72	AVG
5		9848.000	45.07	9.48	54.55	74.00	-19.45	peak
6	*	9848.000	38.89	9.48	48.37	54.00	-5.63	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode2 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	43.43	1.86	45.29	74.00	-28.71	peak
2		4824.000	37.28	1.86	39.14	54.00	-14.86	AVG
3		7236.000	42.52	7.52	50.04	74.00	-23.96	peak
4		7236.000	36.84	7.52	44.36	54.00	-9.64	AVG
5		9648.000	44.62	9.07	53.69	74.00	-20.31	peak
6	*	9648.000	38.49	9.07	47.56	54.00	-6.44	AVG

Mode2 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	43.20	1.86	45.06	74.00	-28.94	peak
2		4824.000	37.39	1.86	39.25	54.00	-14.75	AVG
3		7236.000	43.27	7.52	50.79	74.00	-23.21	peak
4		7236.000	36.85	7.52	44.37	54.00	-9.63	AVG
5		9648.000	45.03	9.07	54.10	74.00	-19.90	peak
6	*	9648.000	39.28	9.07	48.35	54.00	-5.65	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode2 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	42.95	2.07	45.02	74.00	-28.98	peak
2		4874.000	37.47	2.07	39.54	54.00	-14.46	AVG
3		7311.000	43.40	7.82	51.22	74.00	-22.78	peak
4		7311.000	37.39	7.82	45.21	54.00	-8.79	AVG
5		9748.000	44.44	9.38	53.82	74.00	-20.18	peak
6	*	9748.000	37.94	9.38	47.32	54.00	-6.68	AVG

Mode2 / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	42.89	2.07	44.96	74.00	-29.04	peak
2		4874.000	36.20	2.07	38.27	54.00	-15.73	AVG
3		7311.000	43.34	7.82	51.16	74.00	-22.84	peak
4		7311.000	37.37	7.82	45.19	54.00	-8.81	AVG
5		9748.000	44.28	9.38	53.66	74.00	-20.34	peak
6	*	9748.000	38.00	9.38	47.38	54.00	-6.62	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode2 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	42.96	2.32	45.28	74.00	-28.72	peak
2		4924.000	37.33	2.32	39.65	54.00	-14.35	AVG
3		7386.000	43.19	7.82	51.01	74.00	-22.99	peak
4		7386.000	37.45	7.82	45.27	54.00	-8.73	AVG
5		9848.000	43.84	9.48	53.32	74.00	-20.68	peak
6	*	9848.000	37.78	9.48	47.26	54.00	-6.74	AVG

Mode2 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	42.65	2.32	44.97	74.00	-29.03	peak
2		4924.000	35.93	2.32	38.25	54.00	-15.75	AVG
3		7386.000	42.99	7.82	50.81	74.00	-23.19	peak
4		7386.000	36.77	7.82	44.59	54.00	-9.41	AVG
5		9848.000	45.24	9.48	54.72	74.00	-19.28	peak
6	*	9848.000	38.89	9.48	48.37	54.00	-5.63	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode9 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	42.45	1.86	44.31	74.00	-29.69	peak
2		4824.000	36.38	1.86	38.24	54.00	-15.76	AVG
3		7236.000	43.62	7.52	51.14	74.00	-22.86	peak
4		7236.000	37.85	7.52	45.37	54.00	-8.63	AVG
5		9648.000	44.17	9.07	53.24	74.00	-20.76	peak
6	*	9648.000	38.45	9.07	47.52	54.00	-6.48	AVG

Mode9 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	43.52	1.86	45.38	74.00	-28.62	peak
2		4824.000	37.68	1.86	39.54	54.00	-14.46	AVG
3		7236.000	43.42	7.52	50.94	74.00	-23.06	peak
4		7236.000	37.04	7.52	44.56	54.00	-9.44	AVG
5		9648.000	44.94	9.07	54.01	74.00	-19.99	peak
6	*	9648.000	39.16	9.07	48.23	54.00	-5.77	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode9 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	43.34	2.07	45.41	74.00	-28.59	peak
2		4874.000	37.58	2.07	39.65	54.00	-14.35	AVG
3		7311.000	43.08	7.82	50.90	74.00	-23.10	peak
4		7311.000	36.85	7.82	44.67	54.00	-9.33	AVG
5		9748.000	44.22	9.38	53.60	74.00	-20.40	peak
6	*	9748.000	37.87	9.38	47.25	54.00	-6.75	AVG

Mode9 / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	42.80	2.07	44.87	74.00	-29.13	peak
2		4874.000	36.16	2.07	38.23	54.00	-15.77	AVG
3		7311.000	43.70	7.82	51.52	74.00	-22.48	peak
4		7311.000	37.32	7.82	45.14	54.00	-8.86	AVG
5		9748.000	44.15	9.38	53.53	74.00	-20.47	peak
6	*	9748.000	38.24	9.38	47.62	54.00	-6.38	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Mode9 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	43.84	2.32	46.16	74.00	-27.84	peak
2		4924.000	38.00	2.32	40.32	54.00	-13.68	AVG
3		7386.000	42.73	7.82	50.55	74.00	-23.45	peak
4		7386.000	36.43	7.82	44.25	54.00	-9.75	AVG
5		9848.000	43.93	9.48	53.41	74.00	-20.59	peak
6	*	9848.000	38.14	9.48	47.62	54.00	-6.38	AVG

Mode9 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	43.95	2.32	46.27	74.00	-27.73	peak
2		4924.000	37.83	2.32	40.15	54.00	-13.85	AVG
3		7386.000	44.18	7.82	52.00	74.00	-22.00	peak
4		7386.000	38.53	7.82	46.35	54.00	-7.65	AVG
5		9848.000	43.00	9.48	52.48	74.00	-21.52	peak
6	*	9848.000	37.11	9.48	46.59	54.00	-7.41	AVG

TEST REPORT

Report No.: MTi241204005-0105E3

Photographs of the test setup

Refer to Appendix - Test setup Photos

TEST REPORT

Report No.: MTi241204005-0105E3

Photographs of the EUT

Refer to Appendix - EUT Photos

Appendix

TEST REPORT

Report No.: MTi241204005-0105E3

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	7.080	0.5	PASS
	Ant2	2412	8.040	0.5	PASS
	Ant1	2437	8.080	0.5	PASS
	Ant2	2437	7.560	0.5	PASS
	Ant1	2462	7.080	0.5	PASS
	Ant2	2462	8.040	0.5	PASS
11G	Ant1	2412	14.760	0.5	PASS
	Ant2	2412	15.680	0.5	PASS
	Ant1	2437	13.760	0.5	PASS
	Ant2	2437	15.640	0.5	PASS
	Ant1	2462	12.160	0.5	PASS
	Ant2	2462	15.680	0.5	PASS
11N20SISO	Ant1	2412	15.320	0.5	PASS
	Ant2	2412	13.800	0.5	PASS
	Ant1	2437	13.800	0.5	PASS
	Ant2	2437	16.640	0.5	PASS
	Ant1	2462	16.960	0.5	PASS
	Ant2	2462	16.680	0.5	PASS
11N40SISO	Ant1	2422	32.640	0.5	PASS
	Ant2	2422	35.440	0.5	PASS
	Ant1	2437	24.800	0.5	PASS
	Ant2	2437	32.560	0.5	PASS
	Ant1	2452	31.920	0.5	PASS
	Ant2	2452	27.760	0.5	PASS
11AX20SISO	Ant1	2412	14.000	0.5	PASS
	Ant2	2412	15.280	0.5	PASS
	Ant1	2437	18.160	0.5	PASS
	Ant2	2437	16.520	0.5	PASS
	Ant1	2462	18.360	0.5	PASS
	Ant2	2462	18.320	0.5	PASS
11AX40SISO	Ant1	2422	37.760	0.5	PASS
	Ant2	2422	35.040	0.5	PASS
	Ant1	2437	34.400	0.5	PASS
	Ant2	2437	34.080	0.5	PASS
	Ant1	2452	33.760	0.5	PASS
	Ant2	2452	32.720	0.5	PASS
11N20MIMO	Ant1	2412	14.720	0.5	PASS
	Ant2	2412	17.560	0.5	PASS
	Ant1	2437	14.400	0.5	PASS
	Ant2	2437	14.800	0.5	PASS
	Ant1	2462	12.560	0.5	PASS
	Ant2	2462	17.200	0.5	PASS
11N40MIMO	Ant1	2422	35.280	0.5	PASS
	Ant2	2422	36.320	0.5	PASS
	Ant1	2437	34.720	0.5	PASS
	Ant2	2437	26.320	0.5	PASS
	Ant1	2452	16.960	0.5	PASS
	Ant2	2452	22.560	0.5	PASS
11AX20MIMO	Ant1	2412	12.800	0.5	PASS
	Ant2	2412	17.520	0.5	PASS
	Ant1	2437	18.160	0.5	PASS
	Ant2	2437	15.120	0.5	PASS
	Ant1	2462	18.800	0.5	PASS
	Ant2	2462	18.640	0.5	PASS
11AX40MIMO	Ant1	2422	36.400	0.5	PASS

TEST REPORT

Report No.: MTi241204005-0105E3

	Ant2	2422	36.480	0.5	PASS
	Ant1	2437	30.240	0.5	PASS
	Ant2	2437	29.600	0.5	PASS
	Ant1	2452	22.560	0.5	PASS
	Ant2	2452	23.600	0.5	PASS

TEST REPORT

Report No.: MTi241204005-0105E3

Test Graphs



TEST REPORT

Report No.: MTi241204005-0105E3




TEST REPORT

Report No.: MTi241204005-0105E3



TEST REPORT

Report No.: MTI241204005-0105E3

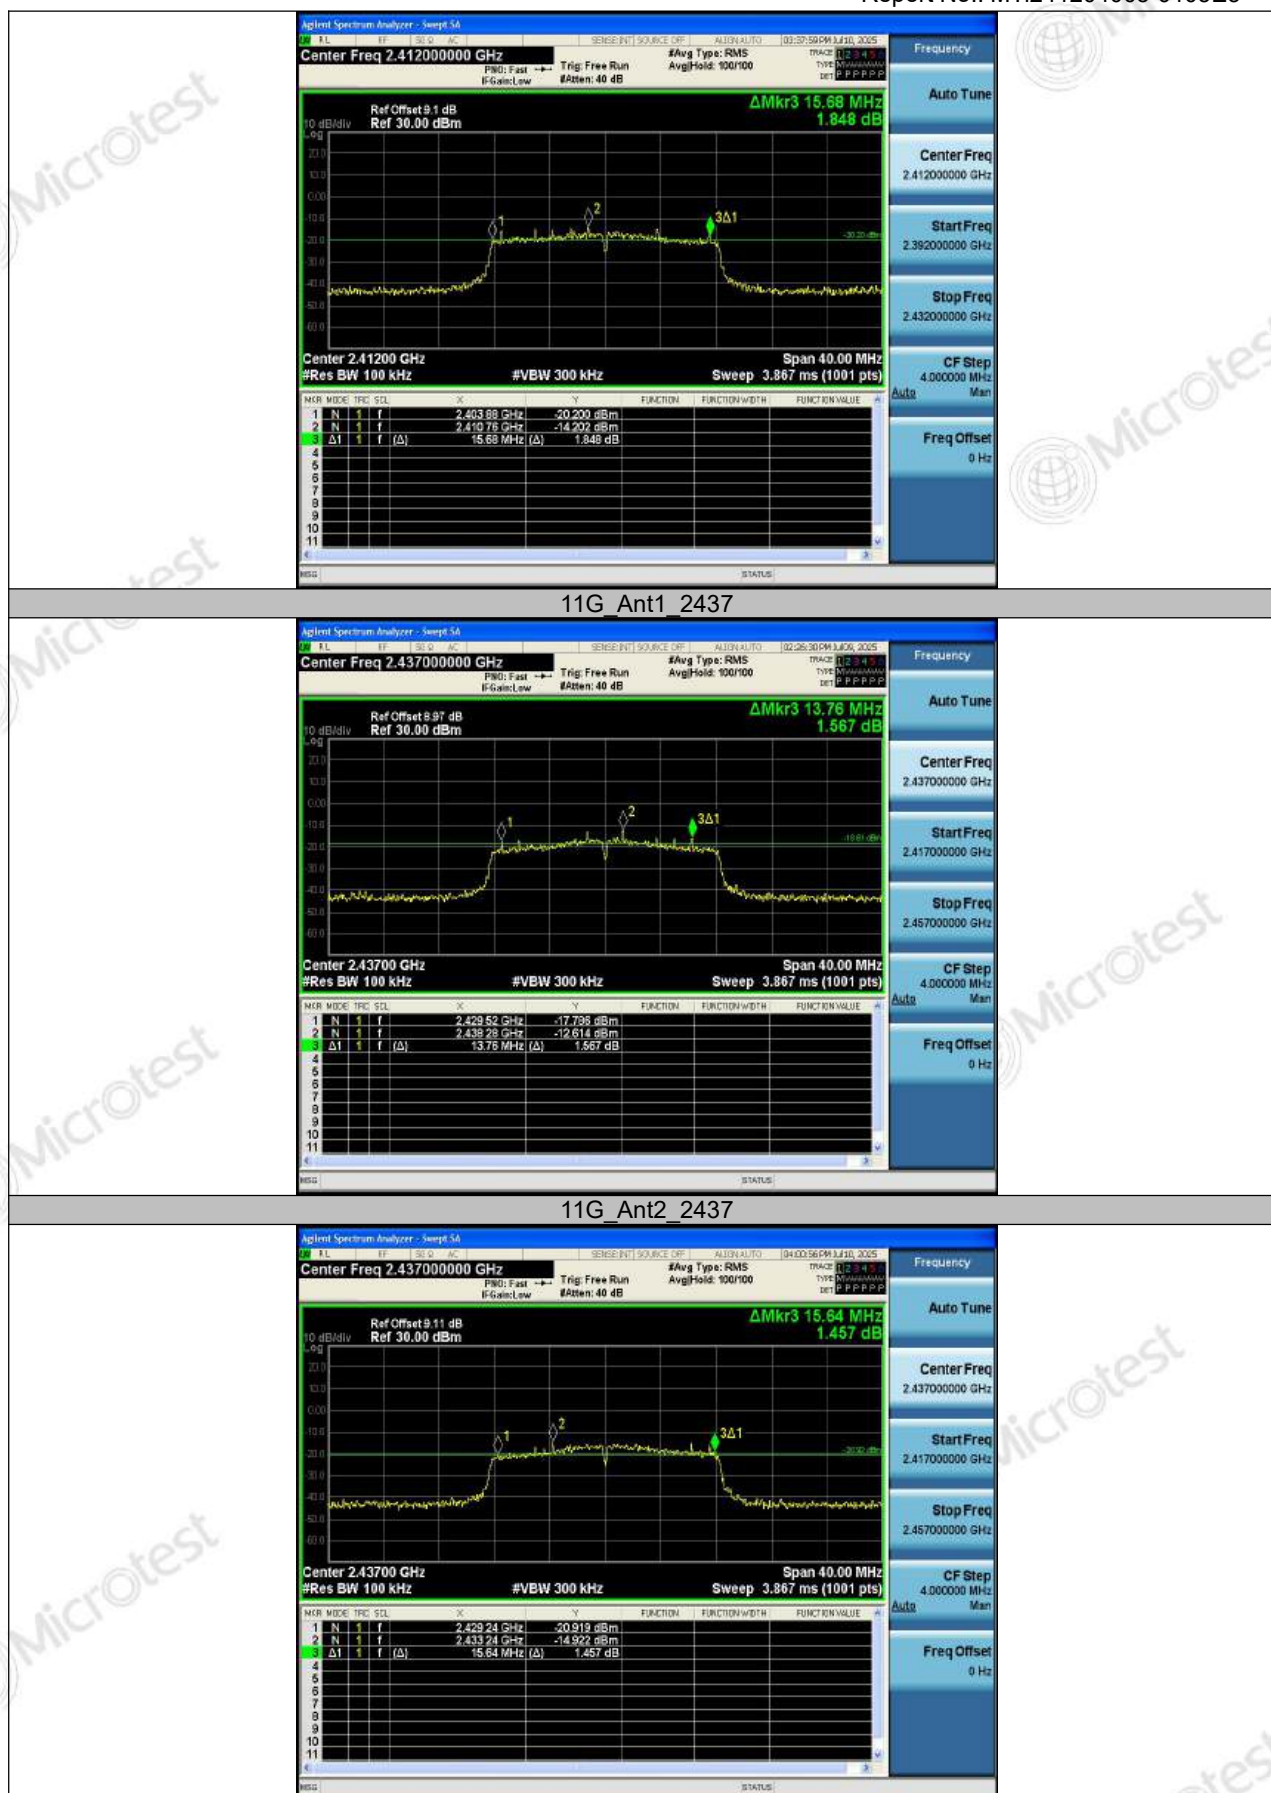


TEST REPORT

Report No.: MTi241204005-0105E3




TEST REPORT

Report No.: MTi241204005-0105E3

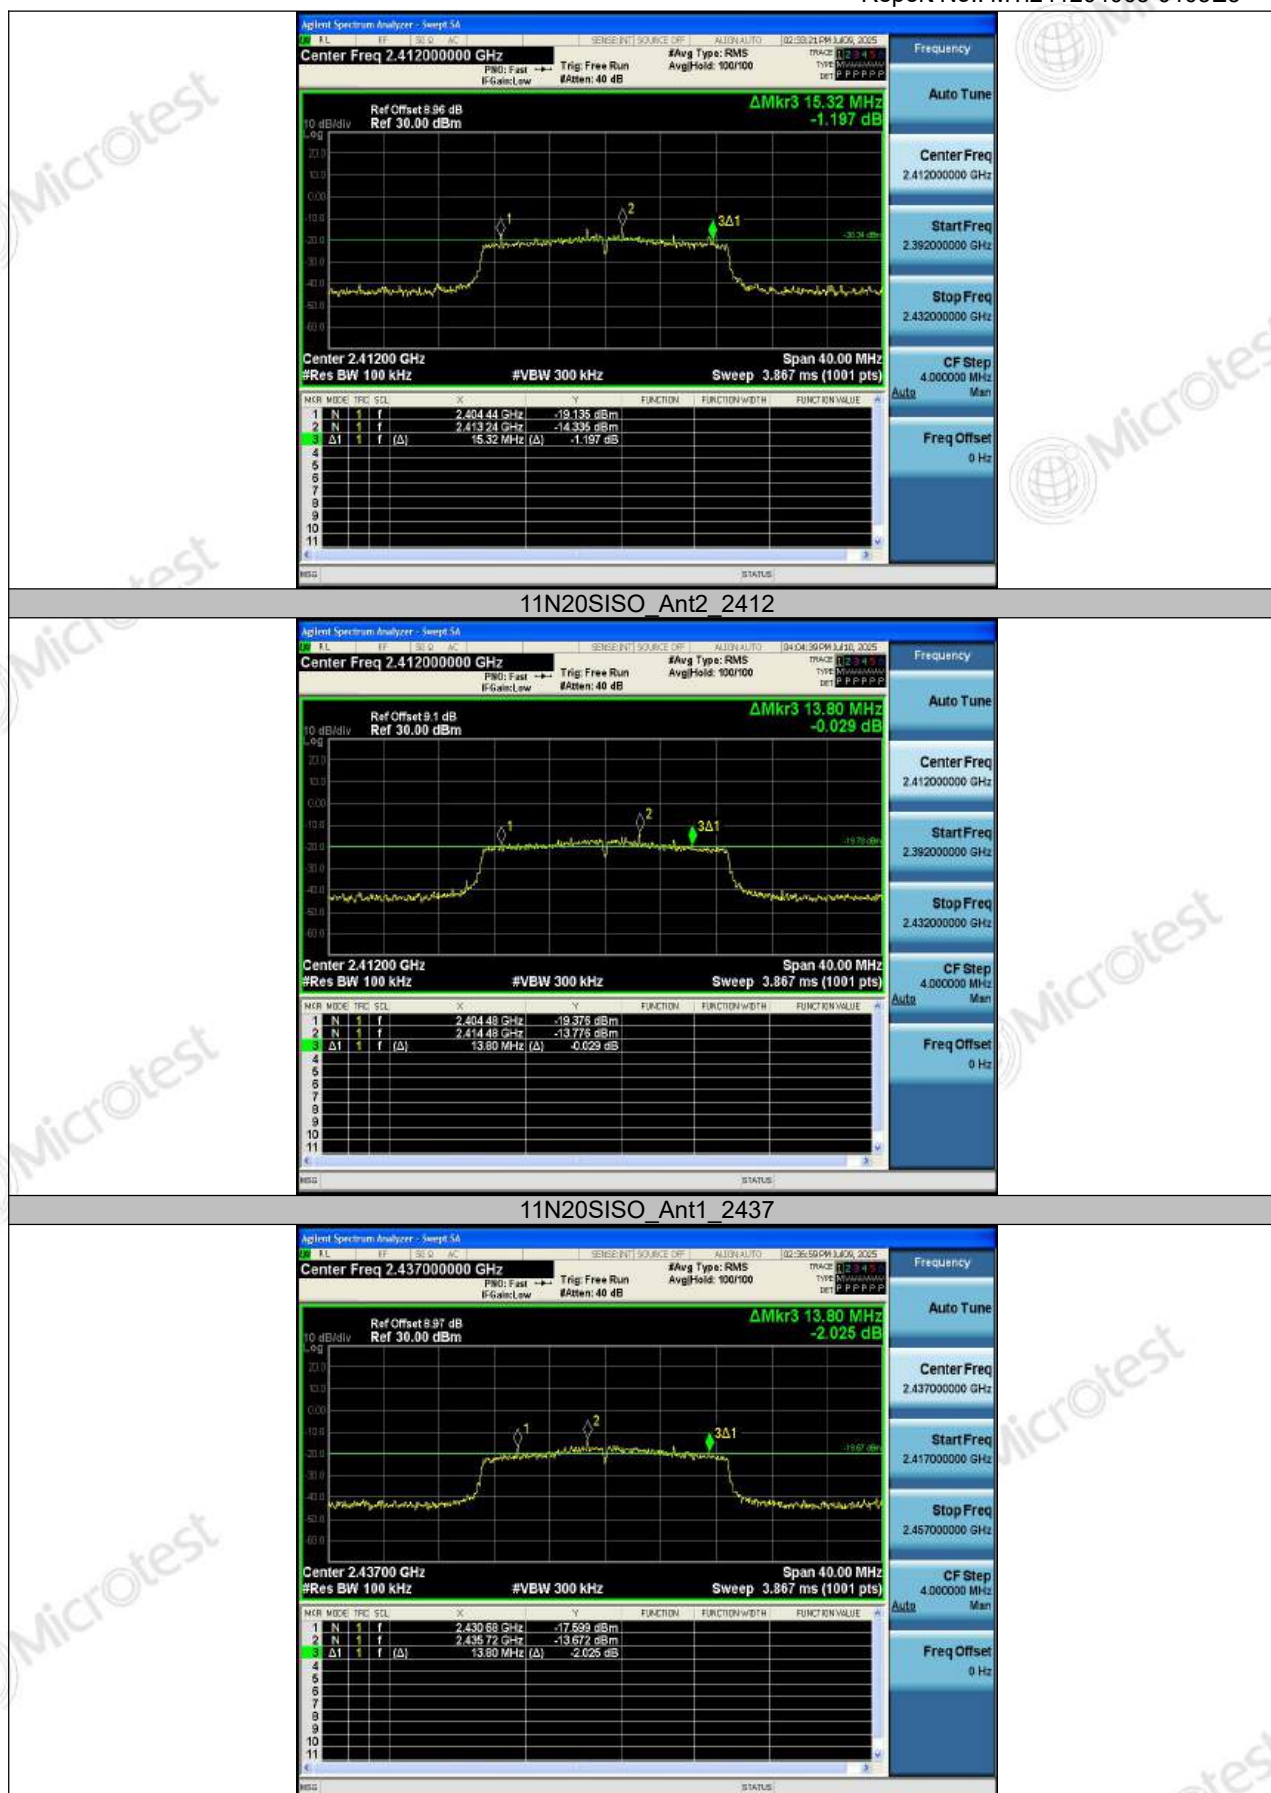


TEST REPORT

Report No.: MTi241204005-0105E3

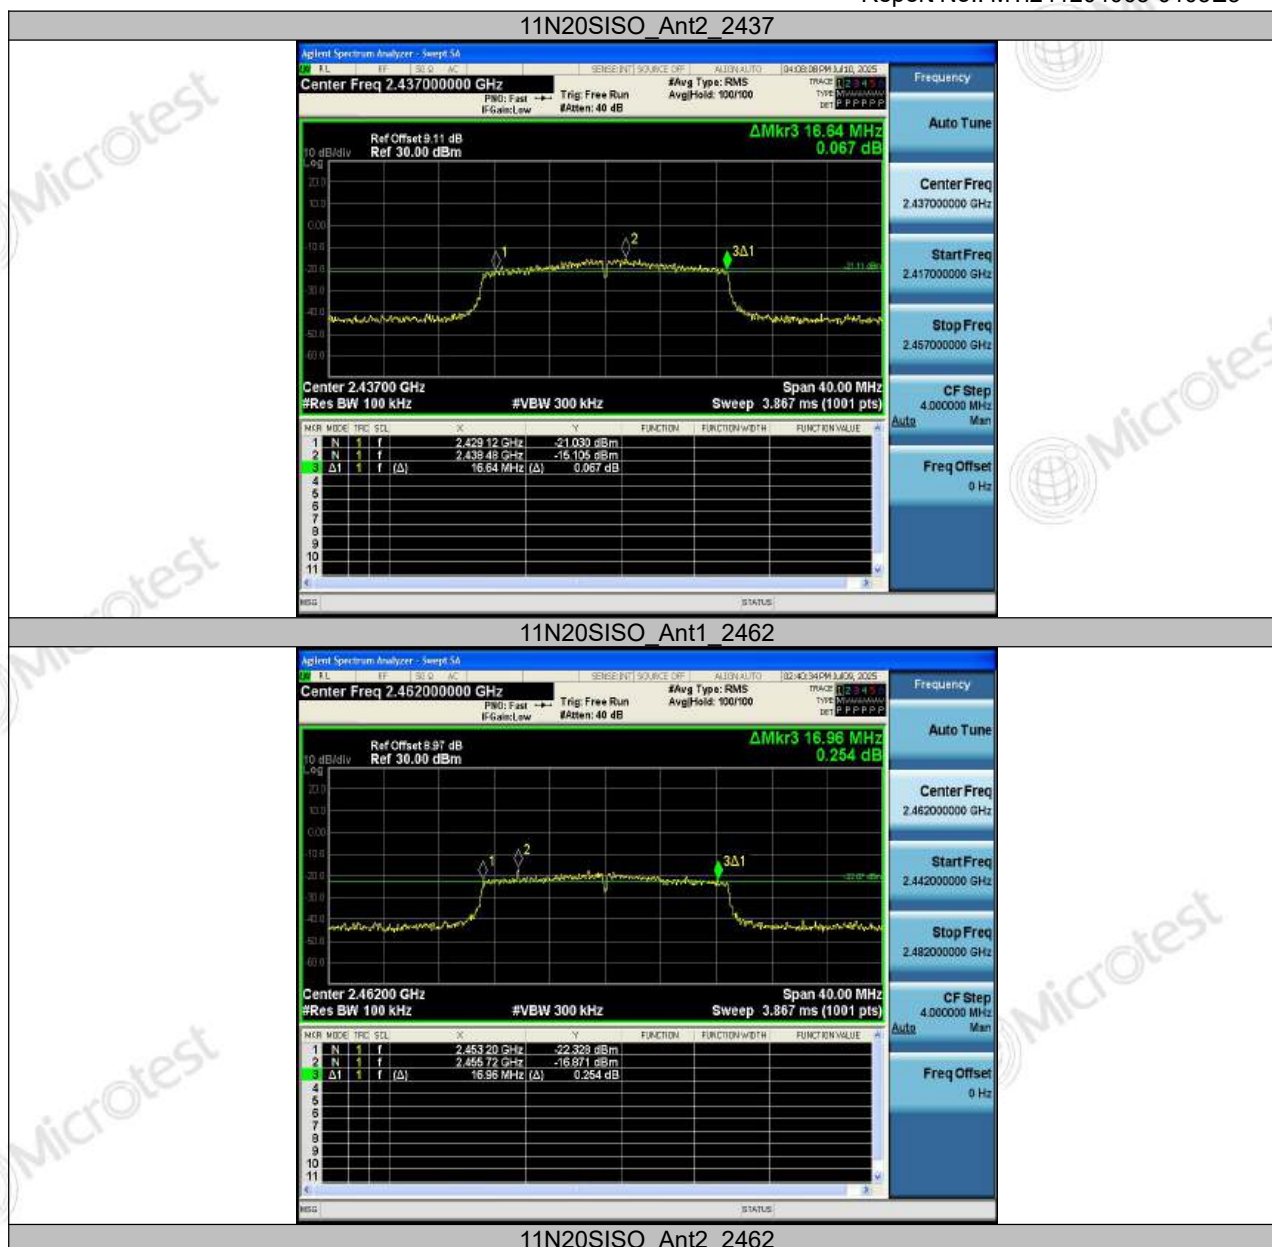

TEST REPORT

Report No.: MTi241204005-0105E3

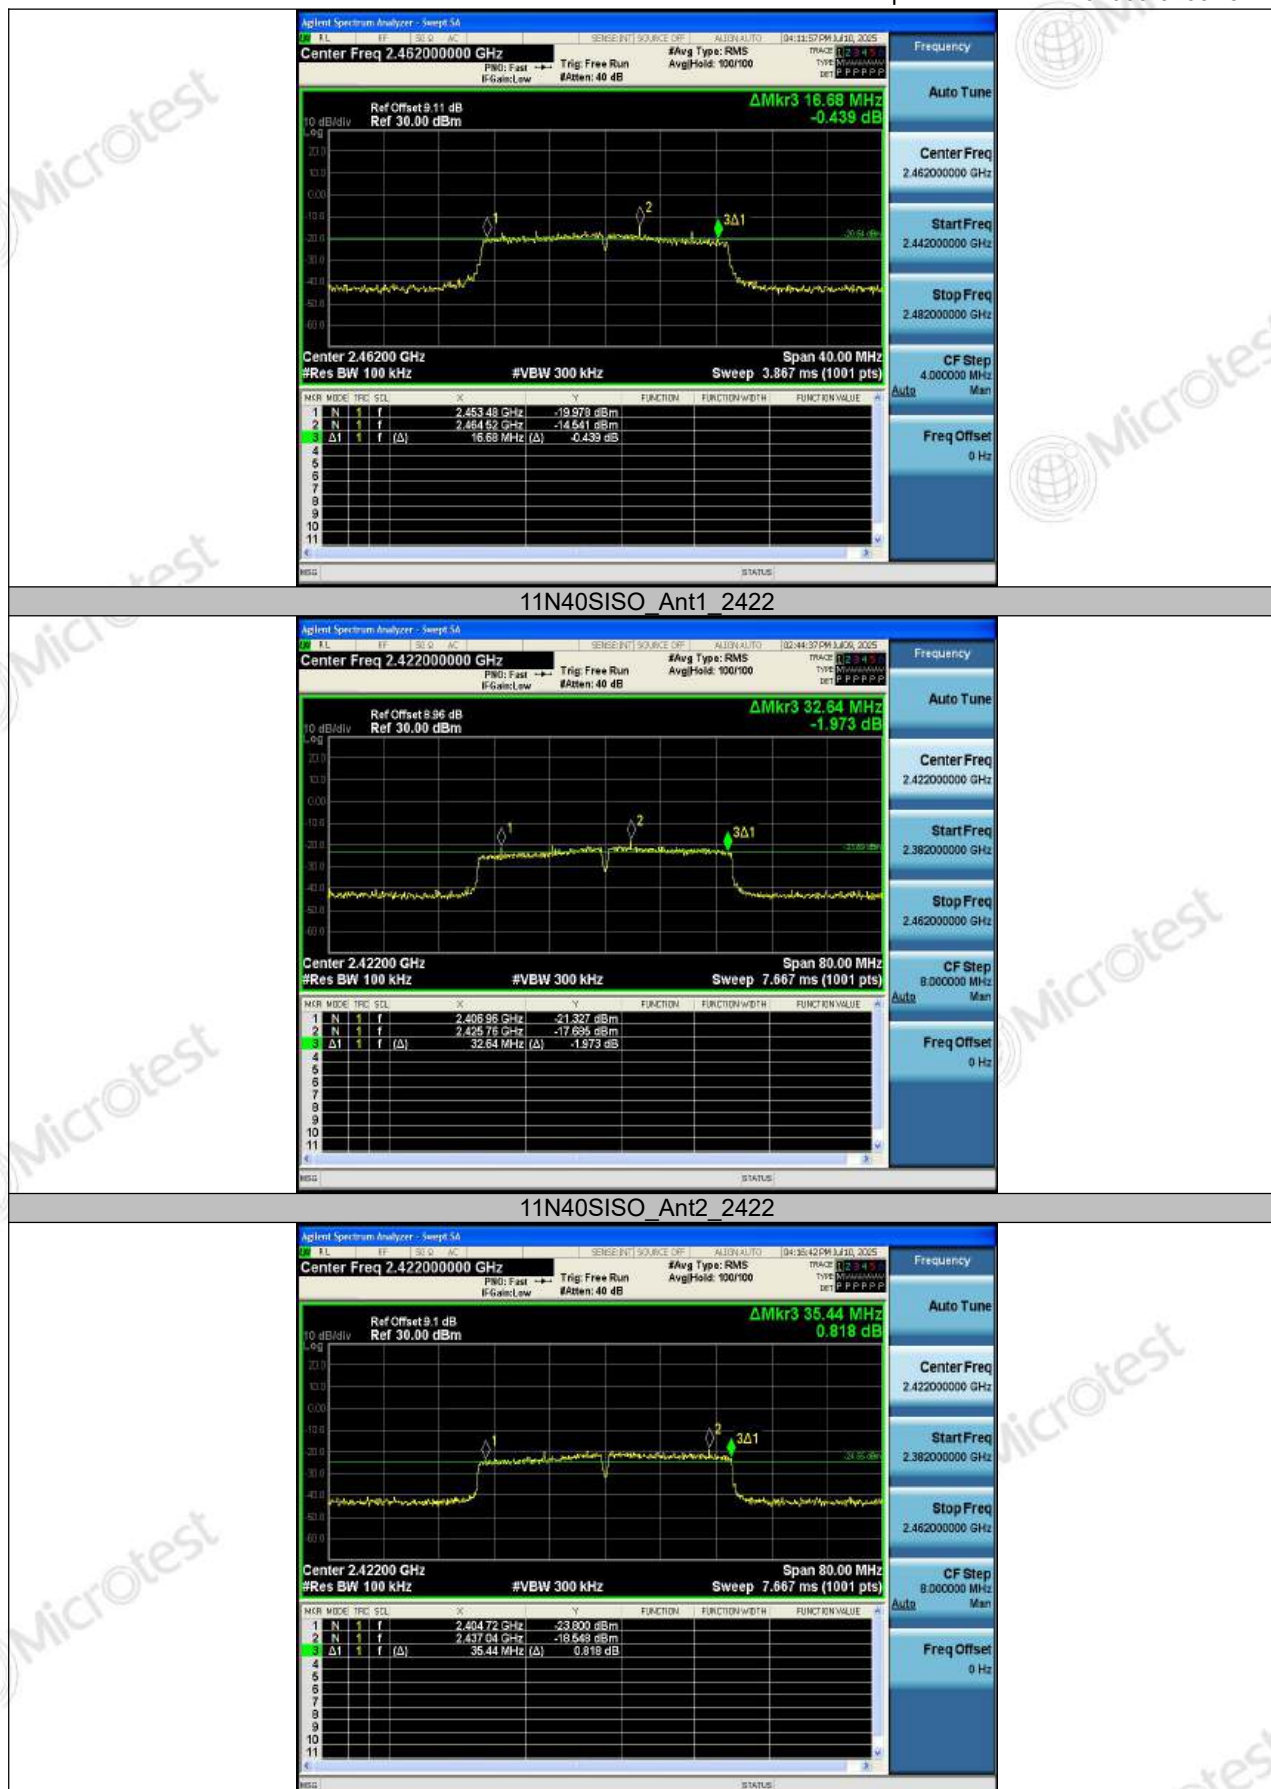

TEST REPORT

Report No.: MTi241204005-0105E3




TEST REPORT

Report No.: MTi241204005-0105E3




TEST REPORT

Report No.: MTi241204005-0105E3

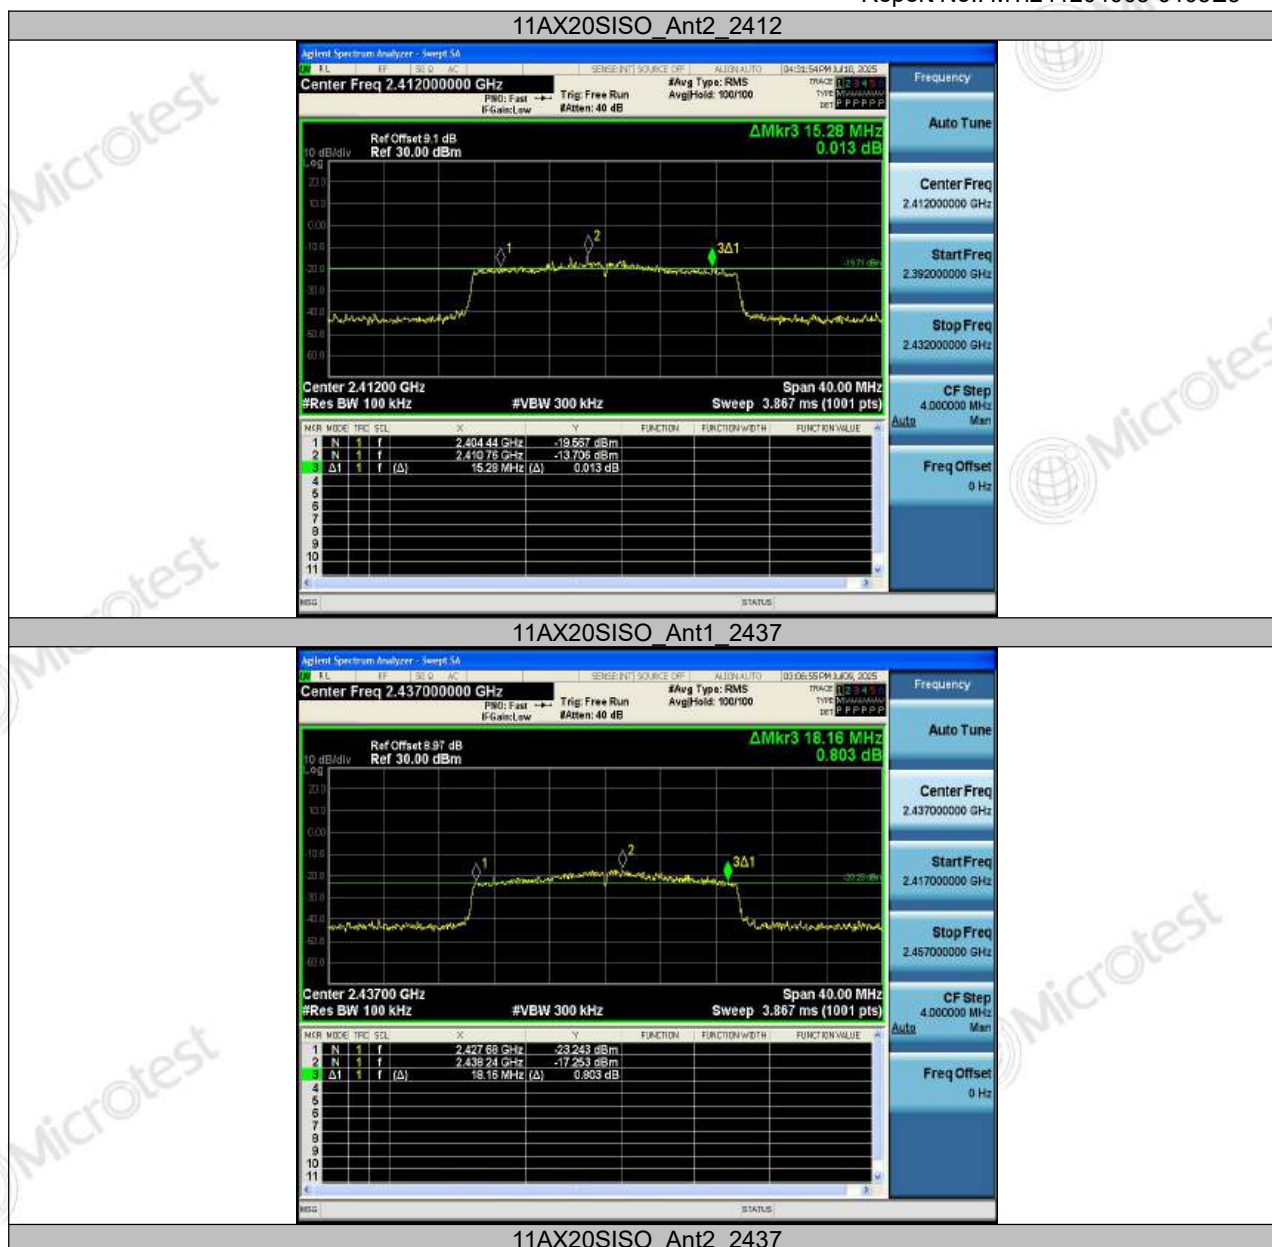

TEST REPORT

Report No.: MTi241204005-0105E3

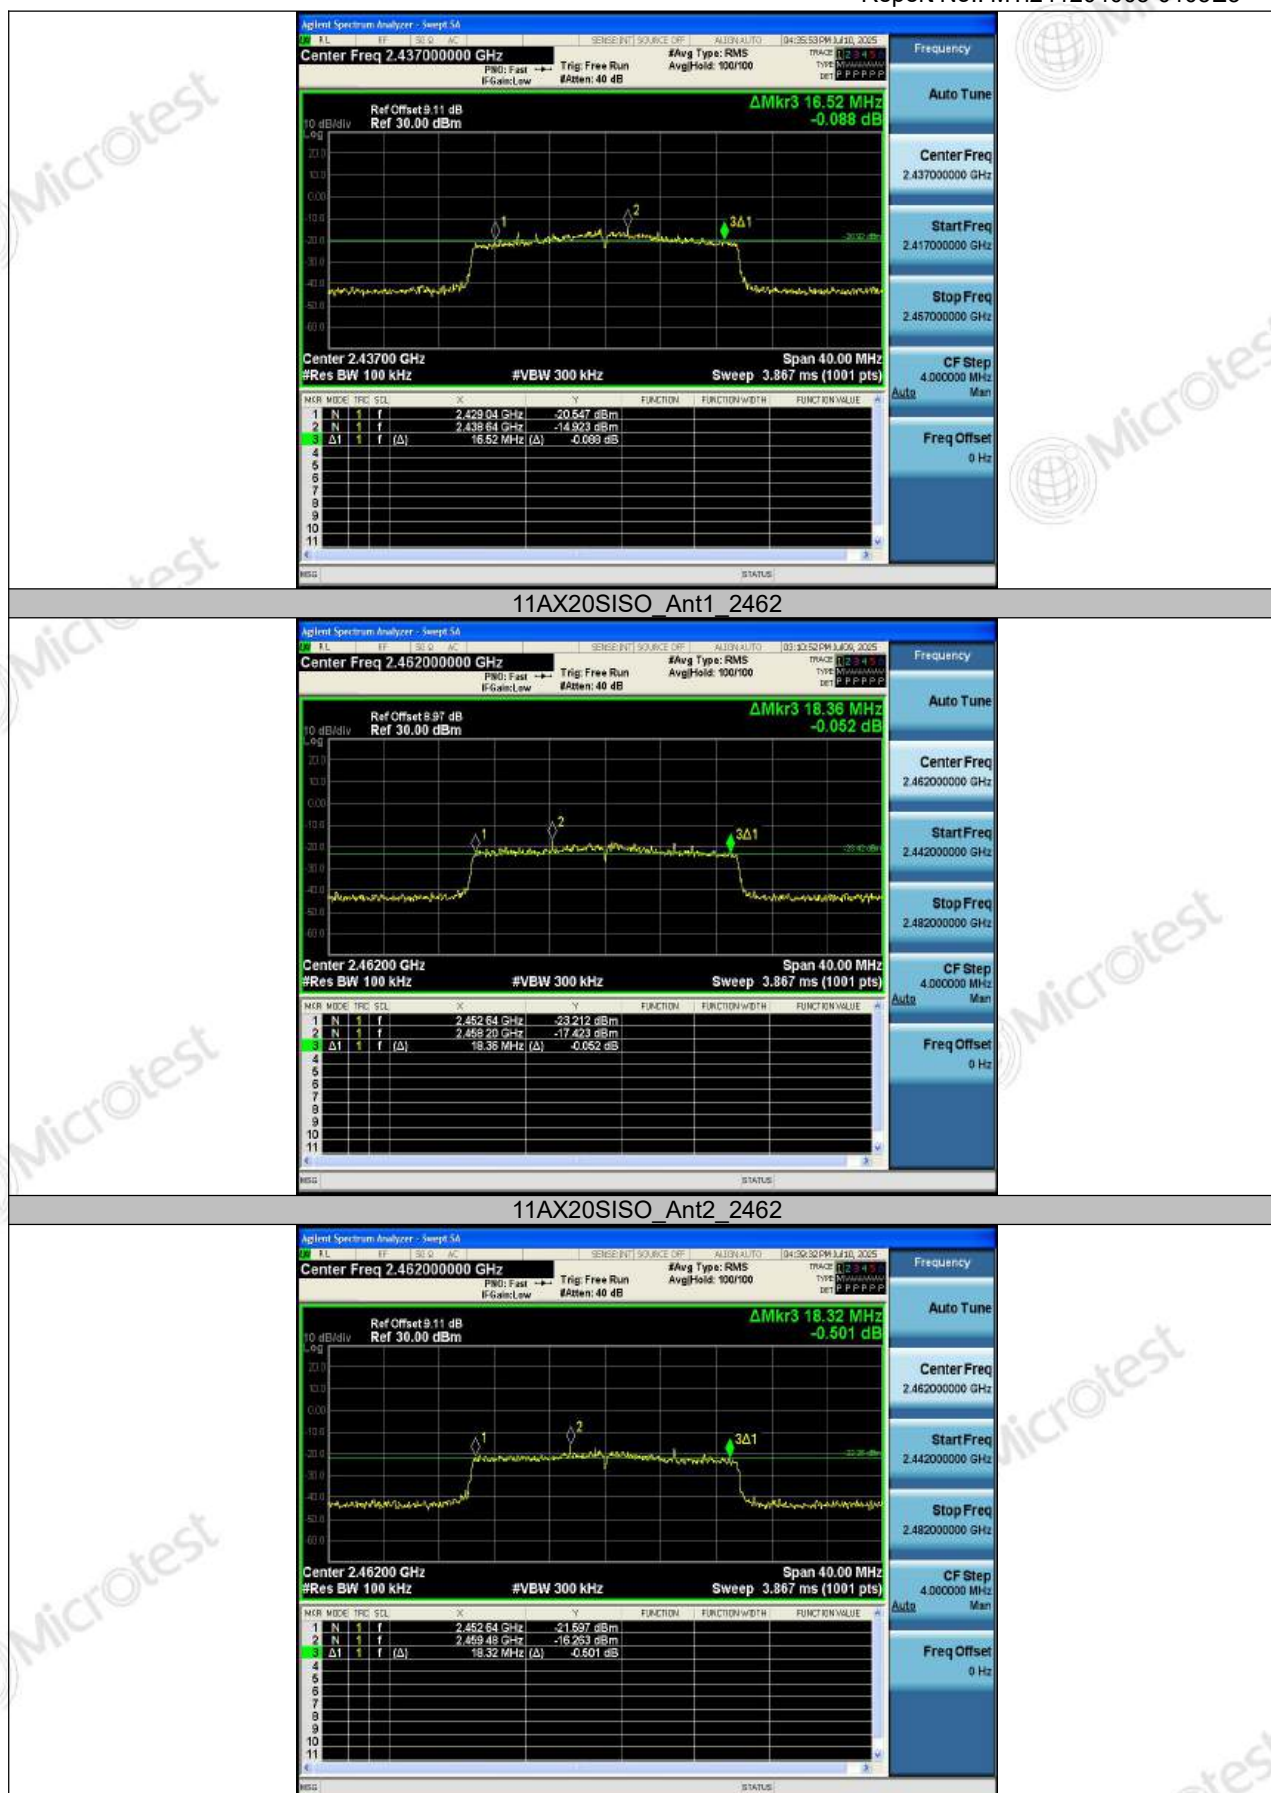

TEST REPORT

Report No.: MTI241204005-0105E3

11AX40SISO_Ant1_2422




11AX40SISO_Ant2_2422



11AX40SISO_Ant1_2437

TEST REPORT

Report No.: MTI241204005-0105E3

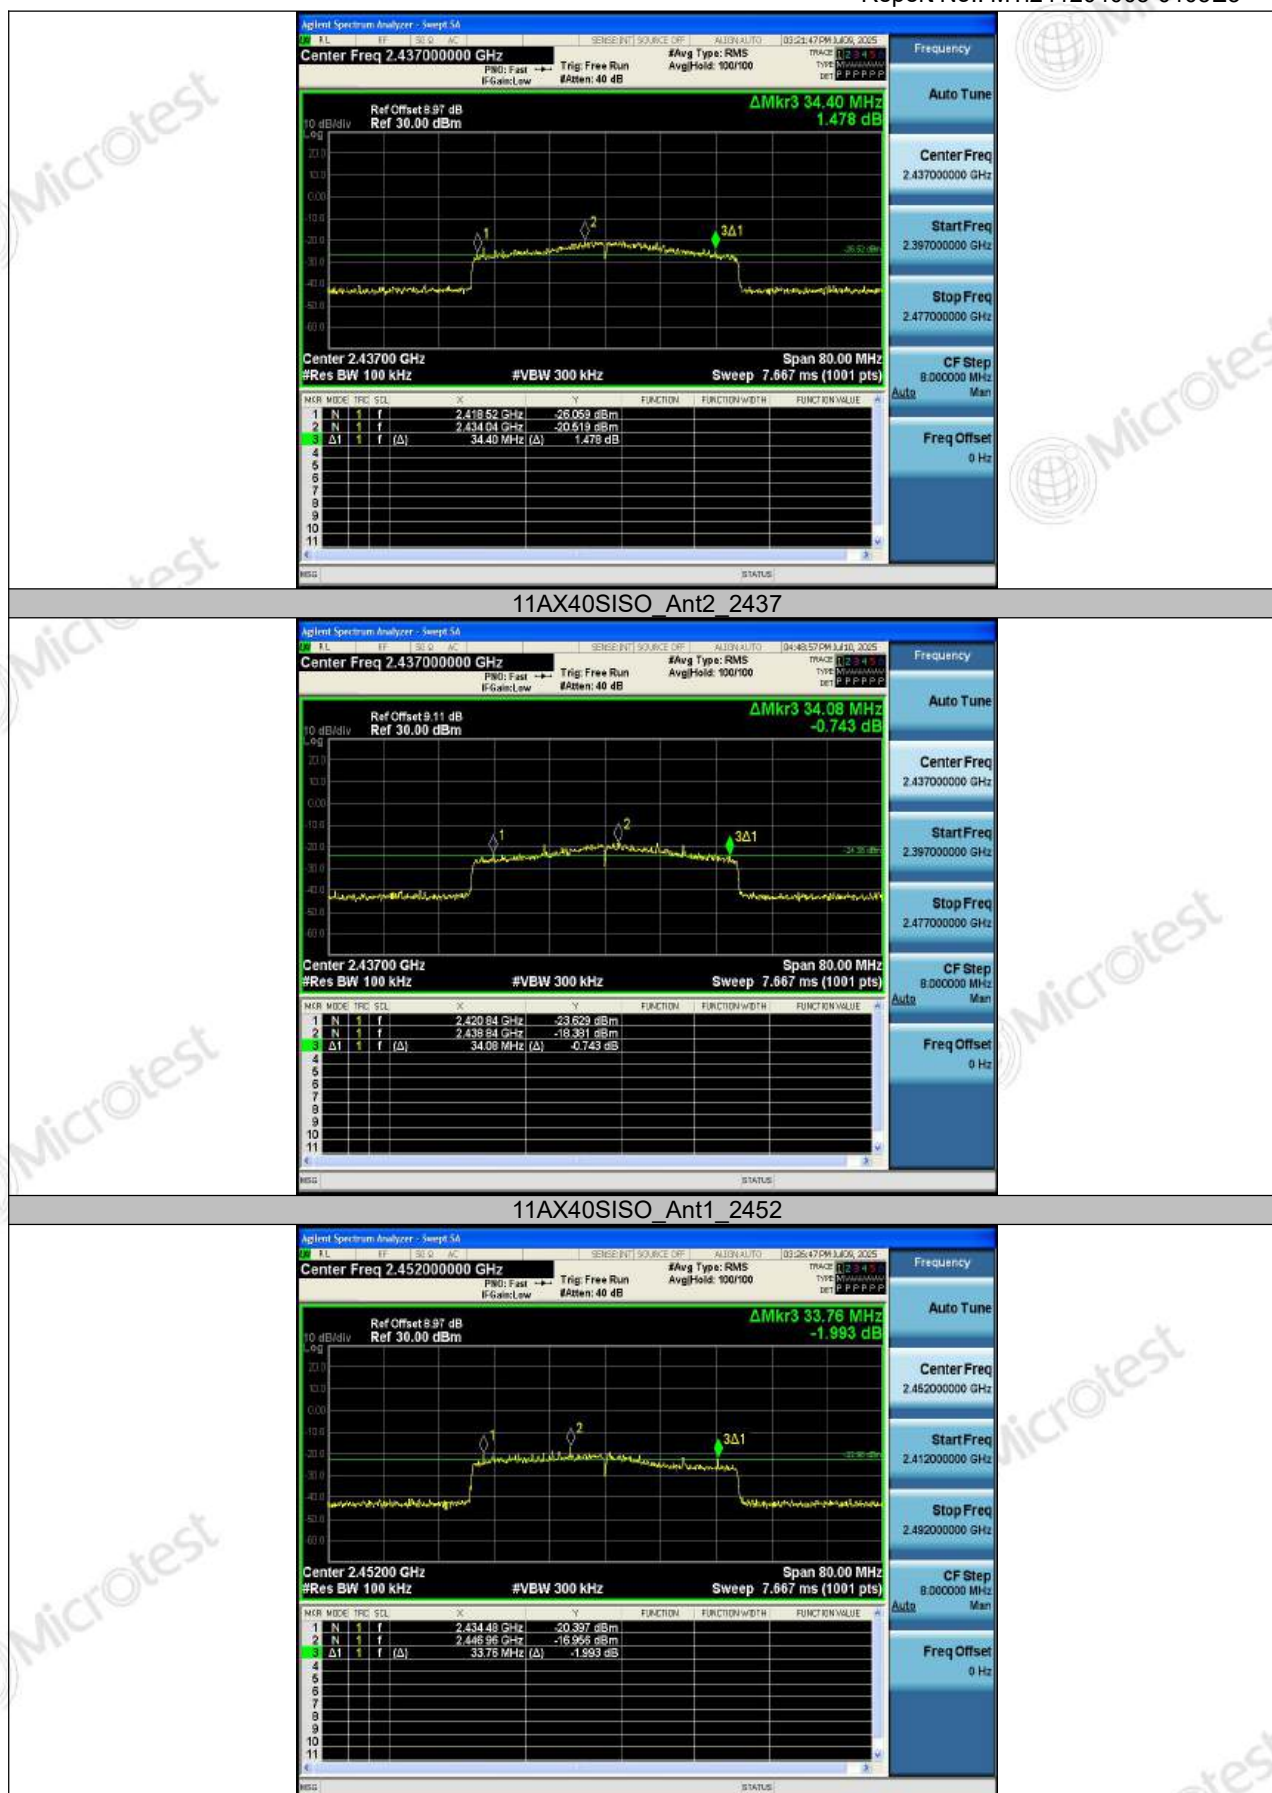

TEST REPORT

Report No.: MTI241204005-0105E3

11AX40SISO_Ant2_2452



11N20MIMO_Ant1_2412



11N20MIMO_Ant2_2412

TEST REPORT

Report No.: MTi241204005-0105E3



TEST REPORT

Report No.: MTI241204005-0105E3

11N20MIMO_Ant1_2462




11N20MIMO_Ant2_2462



11N40MIMO_Ant1_2422

TEST REPORT

Report No.: MTi241204005-0105E3

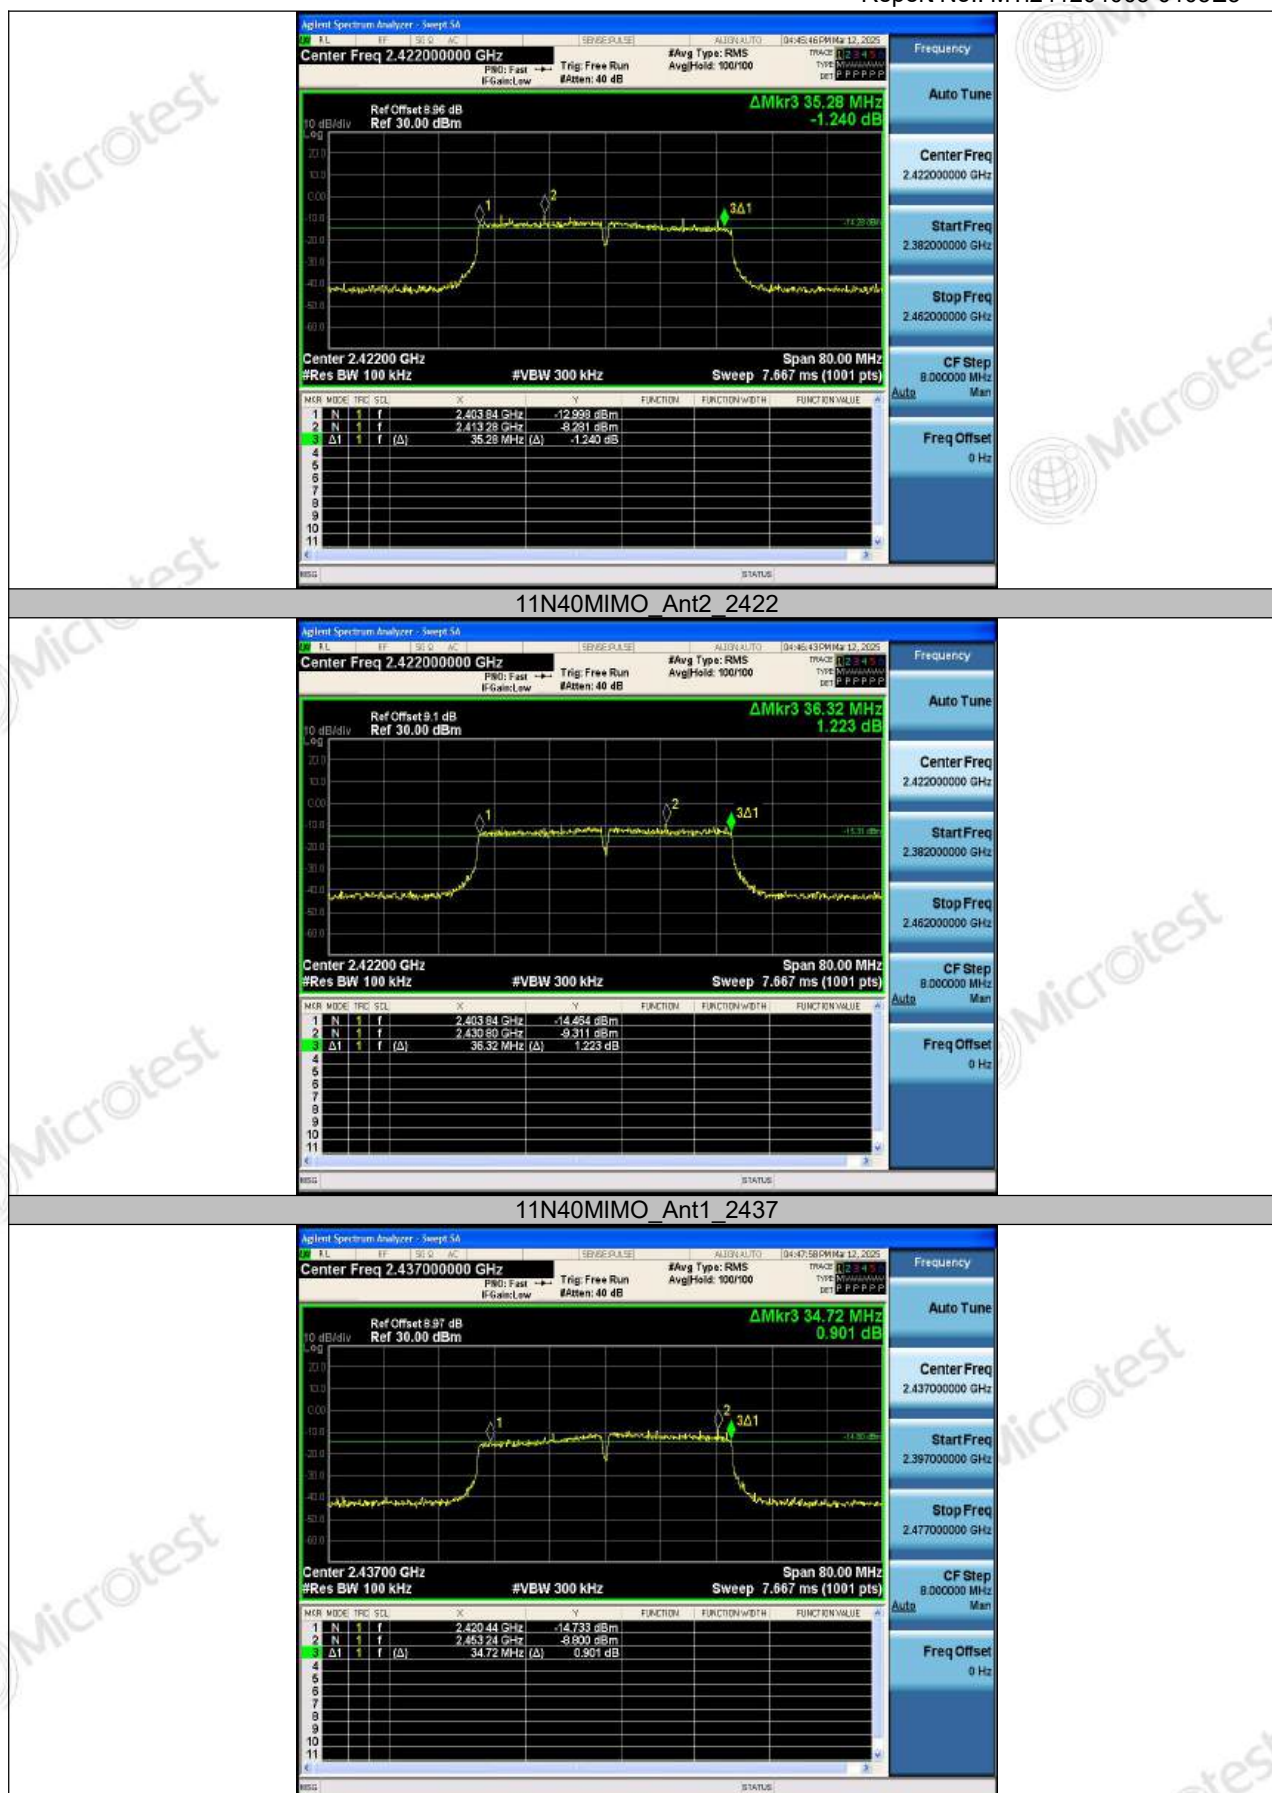

TEST REPORT

Report No.: MTI241204005-0105E3

11N40MIMO_Ant2_2437




11N40MIMO_Ant1_2452



11N40MIMO_Ant2_2452

TEST REPORT

Report No.: MTi241204005-0105E3

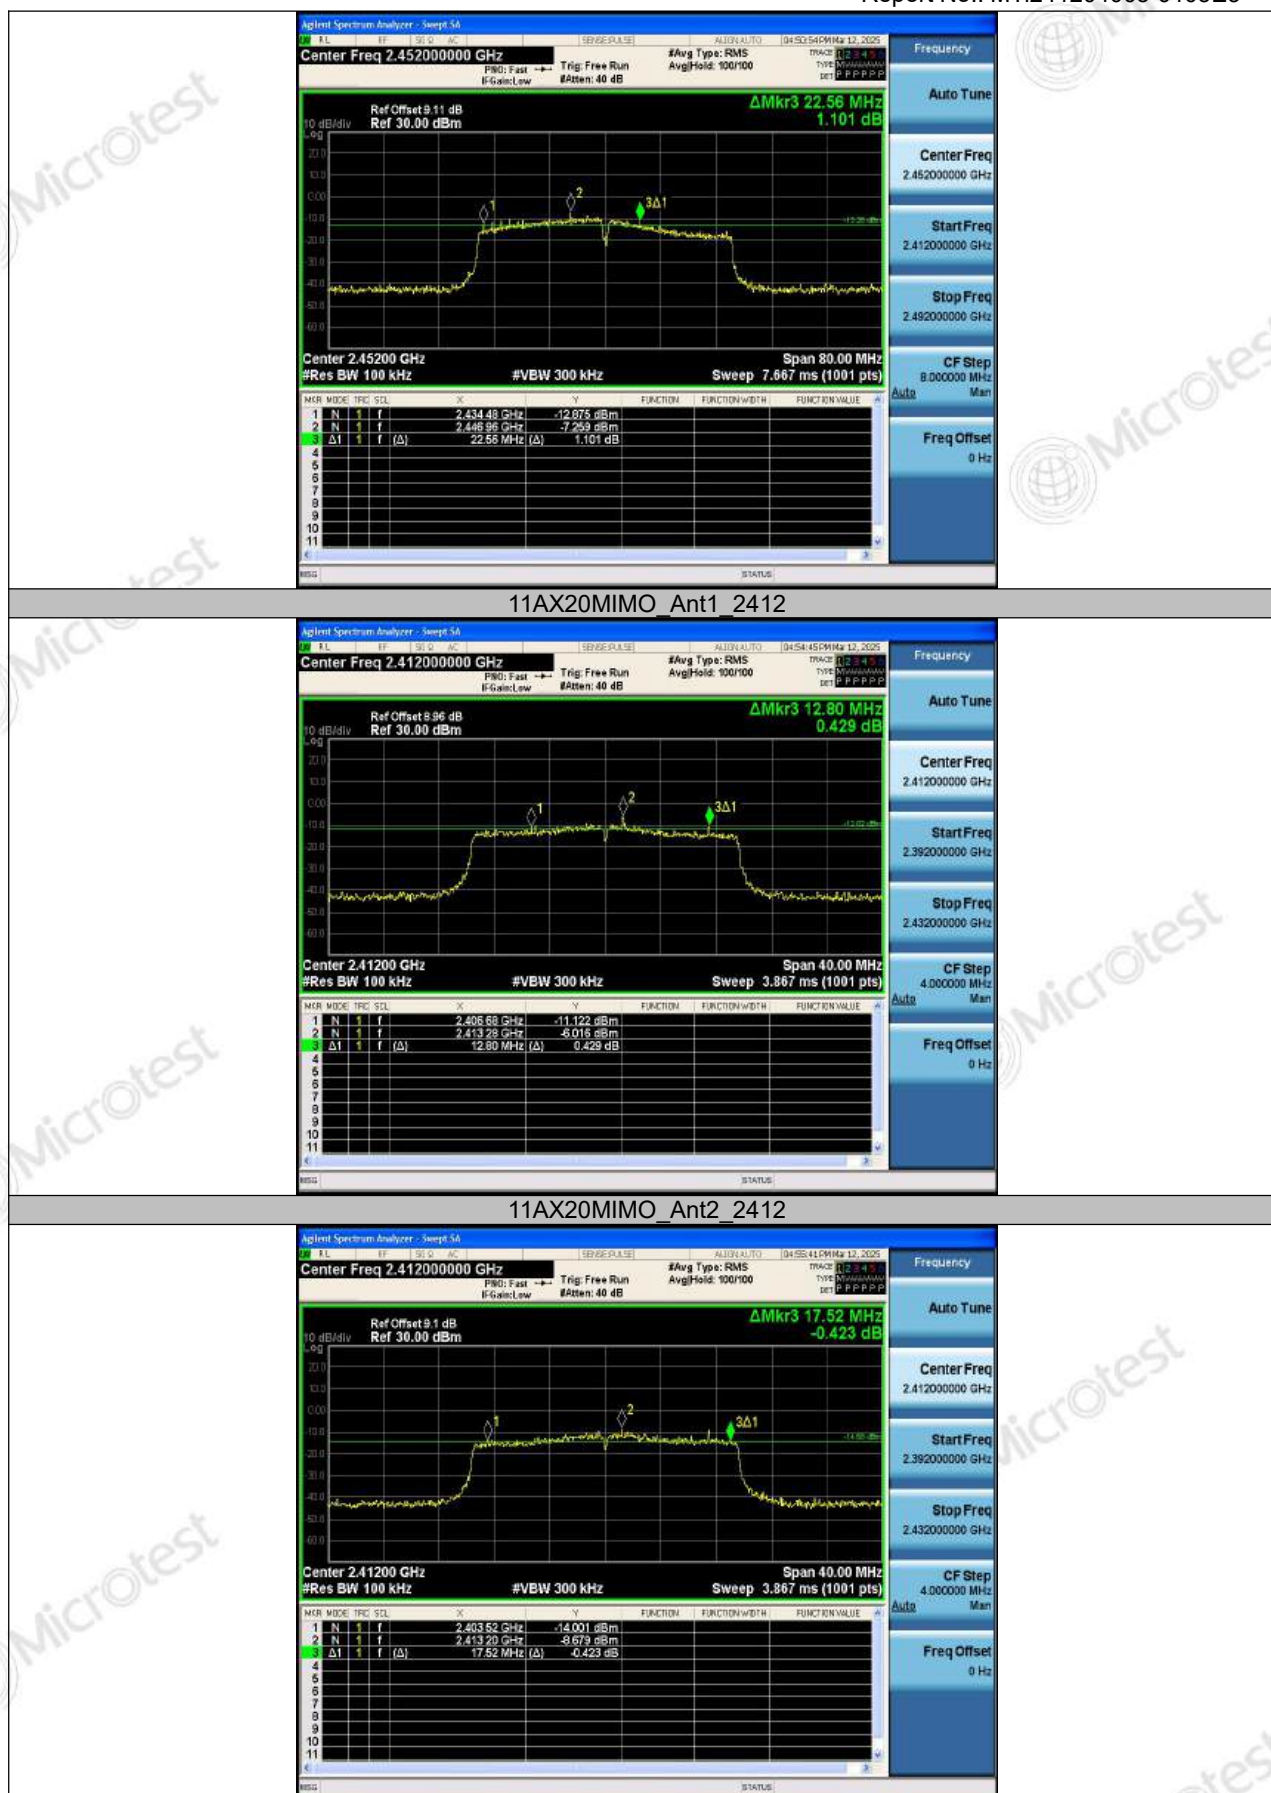

TEST REPORT

Report No.: MTi241204005-0105E3

11AX20MIMO_Ant1_2437




11AX20MIMO_Ant2_2437



11AX20MIMO_Ant1_2462

TEST REPORT

Report No.: MTI241204005-0105E3

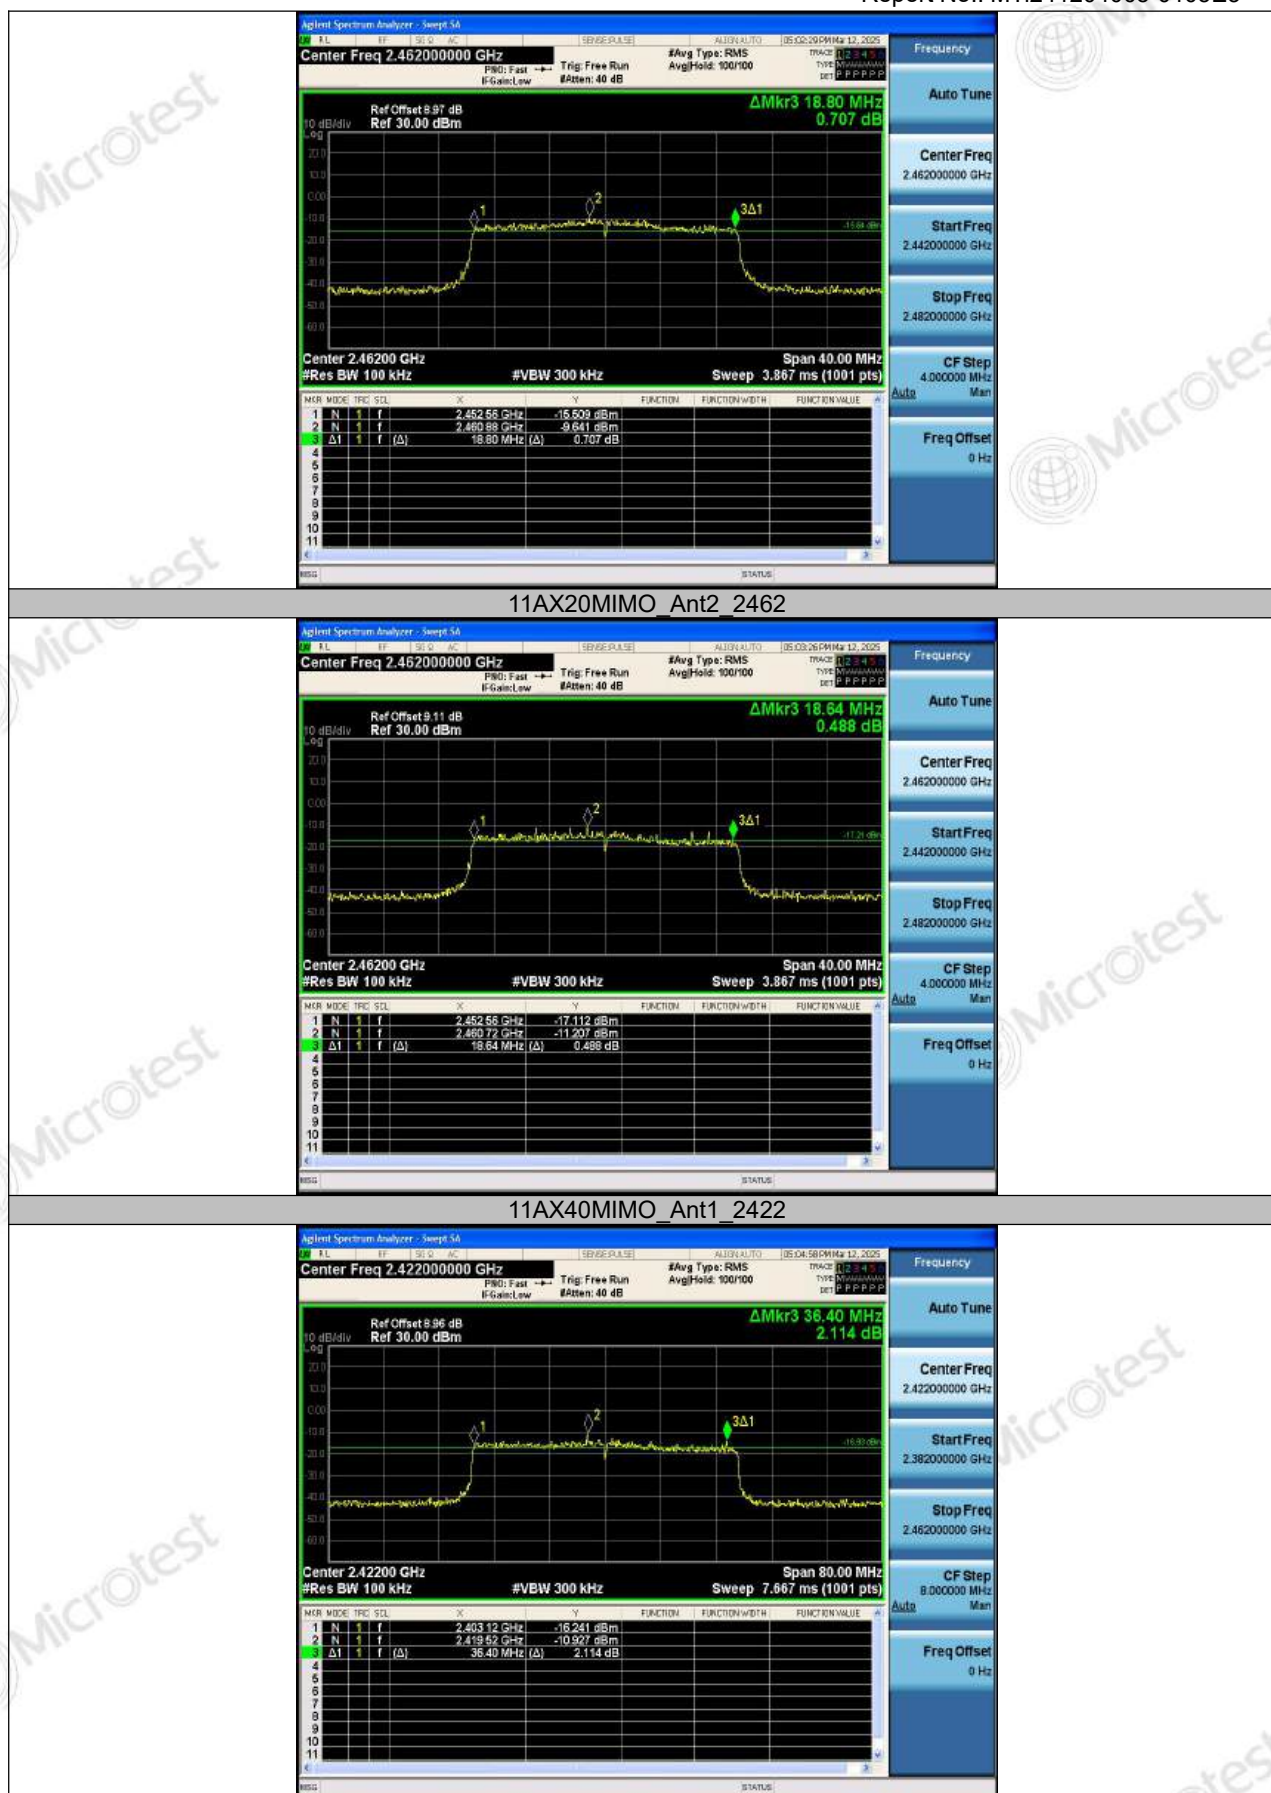

TEST REPORT

Report No.: MTI241204005-0105E3

11AX40MIMO_Ant2_2422



11AX40MIMO_Ant1_2437



11AX40MIMO_Ant2_2437

TEST REPORT

Report No.: MTi241204005-0105E3



TEST REPORT

Report No.: MTi241204005-0105E3

Appendix B: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Peak Power [dBm]	Conducted Limit [dBm]	Verdict
11B	Ant1	2412	3.10	≤30.00	PASS
	Ant2	2412	3.81	≤30.00	PASS
	Ant1	2437	3.32	≤30.00	PASS
	Ant2	2437	3.79	≤30.00	PASS
	Ant1	2462	3.36	≤30.00	PASS
	Ant2	2462	3.27	≤30.00	PASS
11G	Ant1	2412	4.34	≤30.00	PASS
	Ant2	2412	3.36	≤30.00	PASS
	Ant1	2437	4.02	≤30.00	PASS
	Ant2	2437	3.95	≤30.00	PASS
	Ant1	2462	4.59	≤30.00	PASS
	Ant2	2462	3.30	≤30.00	PASS
11N20SISO	Ant1	2412	3.66	≤30.00	PASS
	Ant2	2412	3.36	≤30.00	PASS
	Ant1	2437	3.89	≤30.00	PASS
	Ant2	2437	4.16	≤30.00	PASS
	Ant1	2462	3.23	≤30.00	PASS
	Ant2	2462	3.35	≤30.00	PASS
11N40SISO	Ant1	2422	3.38	≤30.00	PASS
	Ant2	2422	3.41	≤30.00	PASS
	Ant1	2437	3.22	≤30.00	PASS
	Ant2	2437	3.37	≤30.00	PASS
	Ant1	2452	3.35	≤30.00	PASS
	Ant2	2452	3.31	≤30.00	PASS
11AX20SISO	Ant1	2412	3.94	≤30.00	PASS
	Ant2	2412	3.52	≤30.00	PASS
	Ant1	2437	3.20	≤30.00	PASS
	Ant2	2437	3.84	≤30.00	PASS
	Ant1	2462	3.29	≤30.00	PASS
	Ant2	2462	3.36	≤30.00	PASS
11AX40SISO	Ant1	2422	3.83	≤30.00	PASS
	Ant2	2422	3.82	≤30.00	PASS
	Ant1	2437	3.61	≤30.00	PASS
	Ant2	2437	3.58	≤30.00	PASS
	Ant1	2452	3.69	≤30.00	PASS
	Ant2	2452	3.47	≤30.00	PASS
11N20MIMO	Ant1	2412	0.01	≤30.00	PASS
	Ant2	2412	0.57	≤30.00	PASS
	total	2412	3.31	≤29.88	PASS
	Ant1	2437	-0.18	≤30.00	PASS
	Ant2	2437	1.17	≤30.00	PASS
	total	2437	3.56	≤29.88	PASS
	Ant1	2462	-0.71	≤30.00	PASS
	Ant2	2462	0.96	≤30.00	PASS
11N40MIMO	total	2462	3.22	≤29.88	PASS
	Ant1	2422	0.45	≤30.00	PASS
	Ant2	2422	1.53	≤30.00	PASS
	total	2422	4.03	≤29.88	PASS
	Ant1	2437	-0.59	≤30.00	PASS
	Ant2	2437	0.06	≤30.00	PASS
	total	2437	2.76	≤29.88	PASS
	Ant1	2452	-1.17	≤30.00	PASS
11AX20MIMO	Ant2	2452	1.52	≤30.00	PASS
	total	2452	3.39	≤29.88	PASS
	Ant1	2412	-0.70	≤30.00	PASS