

# FCC SAR Test Report

**Applicant:** Avantis Education Limited

**EUT Description:** VR headset

**Model:** CVR-655-128C/CVR-655-128

**Test Model:** CVR-655-128C

**Brand:** CLASSVR

**FCC ID:** 2BNWDCVR-655-128C

**Standards:** FCC 47CFR §2.1093

**Date of Receipt:** 2025/01/24

**Date of Test:** 2025/03/06 to 2025/03/18

**Date of Issue:** 2025/03/21

TOWE. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

the results documented in this report apply only the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility assure that additional production units of the model are manufactured with identical electrical and mechanical components. All sample tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. without written approval of TOWE, the test report shall not be reproduced except in full.



**Huang Kun**  
Approved By:



**Li Wei**  
Reviewed By:

## Revision History

Rev.	Issue Date	Description	Revised by
01	2025/03/21	Original	Li Wei

## Table of Contents

<b>1</b>	<b>Summary of Test Results.....</b>	<b>5</b>
<b>2</b>	<b>Guidance Applied.....</b>	<b>6</b>
<b>3</b>	<b>Lab Information .....</b>	<b>6</b>
3.1	Testing Location.....	6
3.2	Test Facility / Accreditations.....	6
3.3	Ambient Condition.....	6
<b>4</b>	<b>Client Information.....</b>	<b>6</b>
4.1	Applicant .....	6
4.2	Manufacturer .....	6
4.3	Factory .....	6
<b>5</b>	<b>Product Information.....</b>	<b>7</b>
5.1	Antenna Locations.....	8
<b>6</b>	<b>RF Exposure Limits .....</b>	<b>9</b>
<b>7</b>	<b>Introduction .....</b>	<b>10</b>
7.1	SAR Definition.....	10
<b>8</b>	<b>SAR Measurements System .....</b>	<b>11</b>
8.1	The SAR Measurement Set-up.....	11
8.2	E-Field Probe .....	12
8.3	Data Acquisition Electronics (DAE).....	12
8.4	Phantom .....	13
8.5	Device Holder .....	14
8.6	Measurement procedure.....	15
8.6.1	Power reference measurement.....	15
8.6.2	Area scan .....	15
8.6.3	Zoom Scan.....	16
8.6.4	Power Drift Measurement.....	16
<b>9</b>	<b>Test Equipment list .....</b>	<b>17</b>
<b>10</b>	<b>SAR measurement variability.....</b>	<b>18</b>
<b>11</b>	<b>Description of Test Position .....</b>	<b>19</b>
11.1	Body exposure conditions.....	19
<b>12</b>	<b>System Verification .....</b>	<b>20</b>
12.1	Recipes for Tissue Simulate Liquid.....	20
12.2	Tissue Verification .....	20
12.3	SAR System Check.....	21
12.3.1	System Check Result.....	21
12.3.2	Detailed System Check Result .....	21
<b>13</b>	<b>SAR General Measurement Procedures.....</b>	<b>22</b>
13.1	SAR Testing with 802.11 Transmitters .....	22
13.1.1	Initial Test Position Procedure .....	22
13.1.2	Initial Test Configuration Procedure.....	22
13.1.3	Subsequent Test Configuration Procedures.....	23
13.1.4	2.4 GHz SAR Procedures.....	23
13.1.5	5 GHz SAR Procedures .....	23
13.1.6	OFDM Transmission Mode and SAR Test Channel Selection.....	24
13.1.7	MIMO SAR Considerations .....	24
<b>14</b>	<b>Conducted Power .....</b>	<b>25</b>
<b>15</b>	<b>Stand-alone SAR test evaluation .....</b>	<b>37</b>
<b>16</b>	<b>SAR Data Summary .....</b>	<b>38</b>
16.1	SAR Measurement Result of WIFI 2.4G .....	39

16.2	SAR Measurement Result of WIFI 5G .....	40
17	Simultaneous Transmission Analysis.....	42
17.1	Simultaneous Transmission SAR Summary.....	42
18	Measurement Uncertainty.....	42
19	Calibration Certificate.....	42
20	Test Setup Photos.....	42
	Appendix A: System Check Plots.....	42
	Appendix B: SAR Test Plots.....	42
	Appendix C: Calibration certificate .....	42
	Appendix D: Test Setup Photos.....	42

## 1 Summary of Test Results

Band	Highest SAR <sub>1g</sub> (W/kg)	
	Body 0mm	
WIFI 2.4G	1.15	
WIFI 5G	1.18	
BT	/	
SAR Limited(W/kg)	1.6	

Highest Simultaneous Transmission SAR (W/kg)		
Scenario	Body 0mm	
Summed SAR	1.33	
SAR Limited(W/kg)	1.6	

## 2 Guidance Applied

FCC 47CFR §2.1093

ANSI/IEEE C95.1-1992

IEC/IEEE 62209-1528:2020

FCC KDB 447498 D01 General RF Exposure Guidance v06

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04

FCC KDB 865664 D02 RF Exposure Reporting v01r02

## 3 Lab Information

### 3.1 Testing Location

These measurements tests were conducted at the Sushi TOWE Wireless Testing (Shenzhen) Co., Ltd. facility located at F401 and F101, Building E, Hongwei Industrial Zone, Liuxian 3rd Road, Bao'an District, Shenzhen, China. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014

Tel.: +86-755-27212361

Contact Email: info@towewireless.com

### 3.2 Test Facility / Accreditations

#### A2LA (Certificate Number: 7088.01)

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

#### FCC Designation No.: CN1353

Sushi TOWE Wireless Testing (Shenzhen) Co., Ltd. has been recognized as an accredited testing laboratory. Designation Number: CN1353.

#### ISED CAB identifier: CN0152

Sushi TOWE Wireless Testing (Shenzhen) Co., Ltd. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0152

Company Number: 31000

### 3.3 Ambient Condition

Temperature: 18°C~25°C

Relative Humidity: 30%~75%

## 4 Client Information

### 4.1 Applicant

Applicant:	Avantis Education Limited
Address:	Unit 2 & 3 Jessop Court, Waterwells Business Park, Quedgeley, Gloucester, GL2 2AP UK

### 4.2 Manufacturer

Manufacturer:	SHENZHEN SKYWORTH NEW WORLD TECHNOLOGY CO.,LTD.
Address:	508, Block A, SKYWORTH Building, Gaoxin AVE. 1.S Nanshan District, ShenZhen, China.

### 4.3 Factory

Factory:	Shenzhen Skyworth Digital Technology Co.,LTD. Baoan Factory
Address:	2-5F, Integration Multi-Storied Building, Skyworth Science and Technology Industrial Park, Tangtou Industrial Zone, Shiyan Street, Baoan District, Shenzhen city, China.

## 5 Product Information

EUT Description	VR headset
Model	CVR-655-128C/CVR-655-128
Test Model	CVR-655-128C
Hardware Version	5800-2AVQ920
Software Version	VQ920-AVN-V1.8.0
SN.	601VR00001

**Device Capabilities:**


Band	Frequency Range (MHz)	Modulation Type
Wi-Fi 2.4G	2412~2462	802.11b/g/n/ax
Wi-Fi 5G	5150~5250	802.11a/n/ac/ax
	5250~5350	
	5470~5725	
	5725~5850	
Bluetooth	2400~2483.5	GFSK, π/4DQPSK, 8DPSK
Antenna Type	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated	

**Remark:**

- 1, The above EUT's information was declared by applicant, please refer to the specifications or user manual for more detailed description.
- 2, Reference applicant Model Confirmation Letter:  
All models are same with electrical parameters, internal circuit structure, product appearance, PCB layout, Bom and Antenna. But only differ in model name.

According to the difference description above, only the CVR-655-128C model is tested, and other models share the same test data of CVR-655-128C.

## 5.1 Antenna Locations

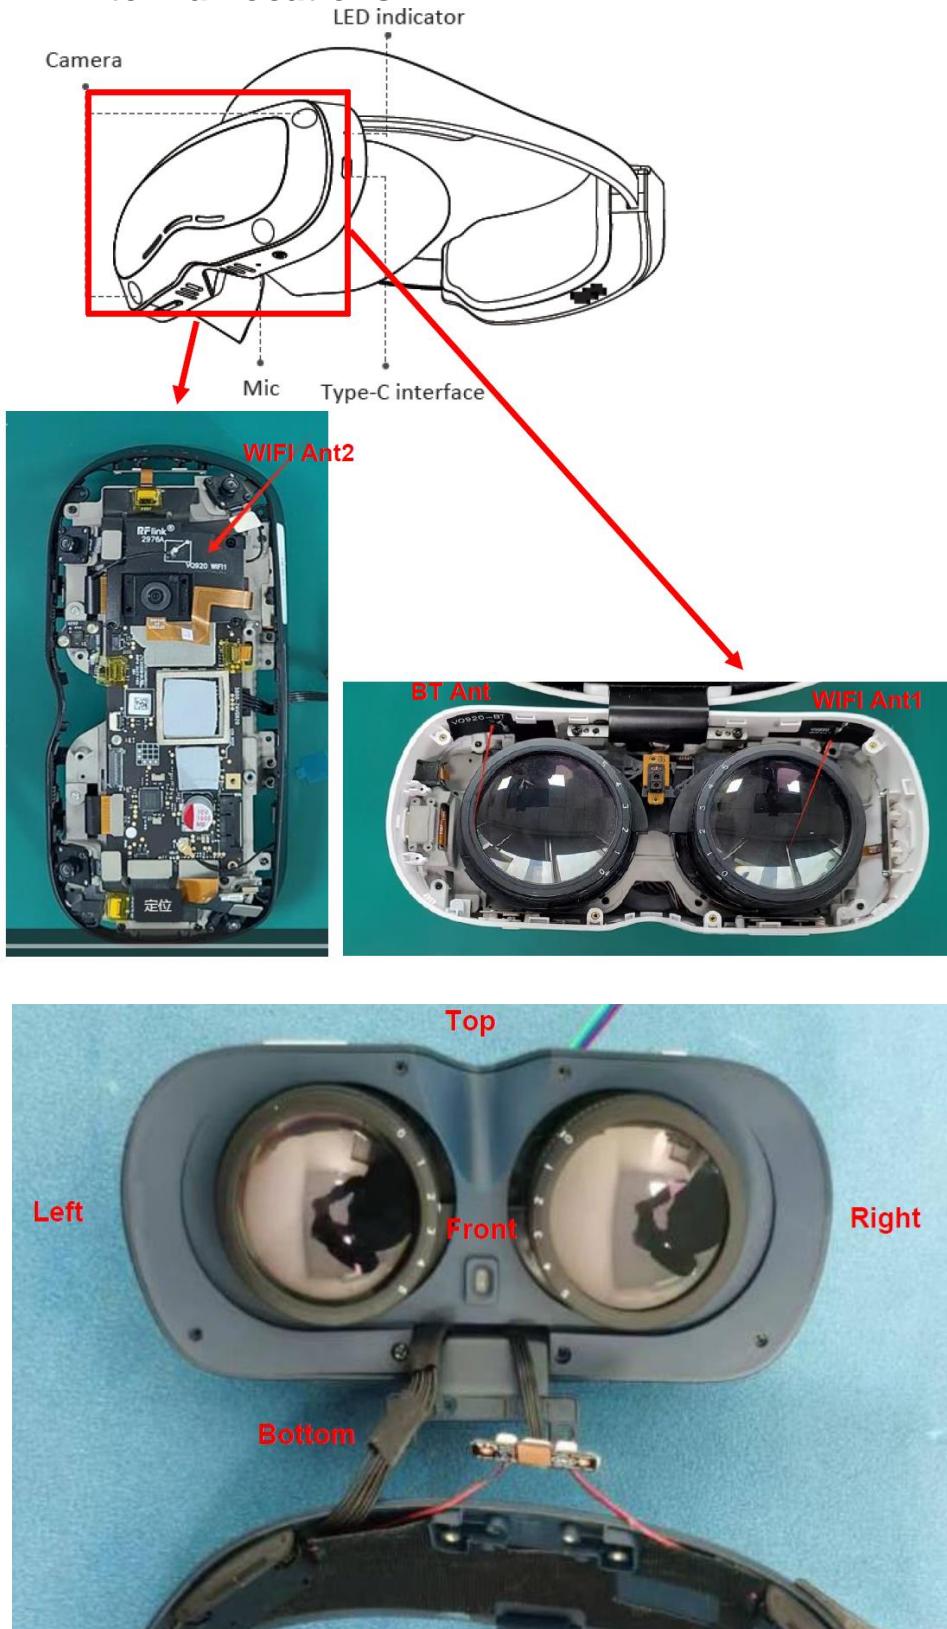

## 6 RF Exposure Limits

Human Exposure	Uncontrolled Environment General Population (W/kg) or (mW/g)	Controlled Environment Occupational (W/kg) or (mW/g)
<b>Spatial Peak SAR<sup>1</sup></b> (Brain/Trunk)	1.6	8.0
<b>Spatial Average SAR<sup>2</sup></b> (Whole Body)	0.08	0.4
<b>Spatial Peak SAR<sup>3</sup></b> (Hands/Feet/Ankle/Wrist)	4.0	20.0

**Note:**

1, The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

2, The Spatial Average value of the SAR averaged over the whole body.

3, The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

## 7 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 7.1 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dv$ ) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg):

$$SAR = \frac{\sigma E^2}{\rho}$$

Where:

$\sigma$  is the conductivity of the tissue material (S/m)


$\rho$  is the mass density of the tissue material (kg/m<sup>3</sup>)

E is the RMS electrical field strength (V/m)

## 8 SAR Measurements System

### 8.1 The SAR Measurement Set-up

The DASY system used for performing compliance tests consists of the following items:

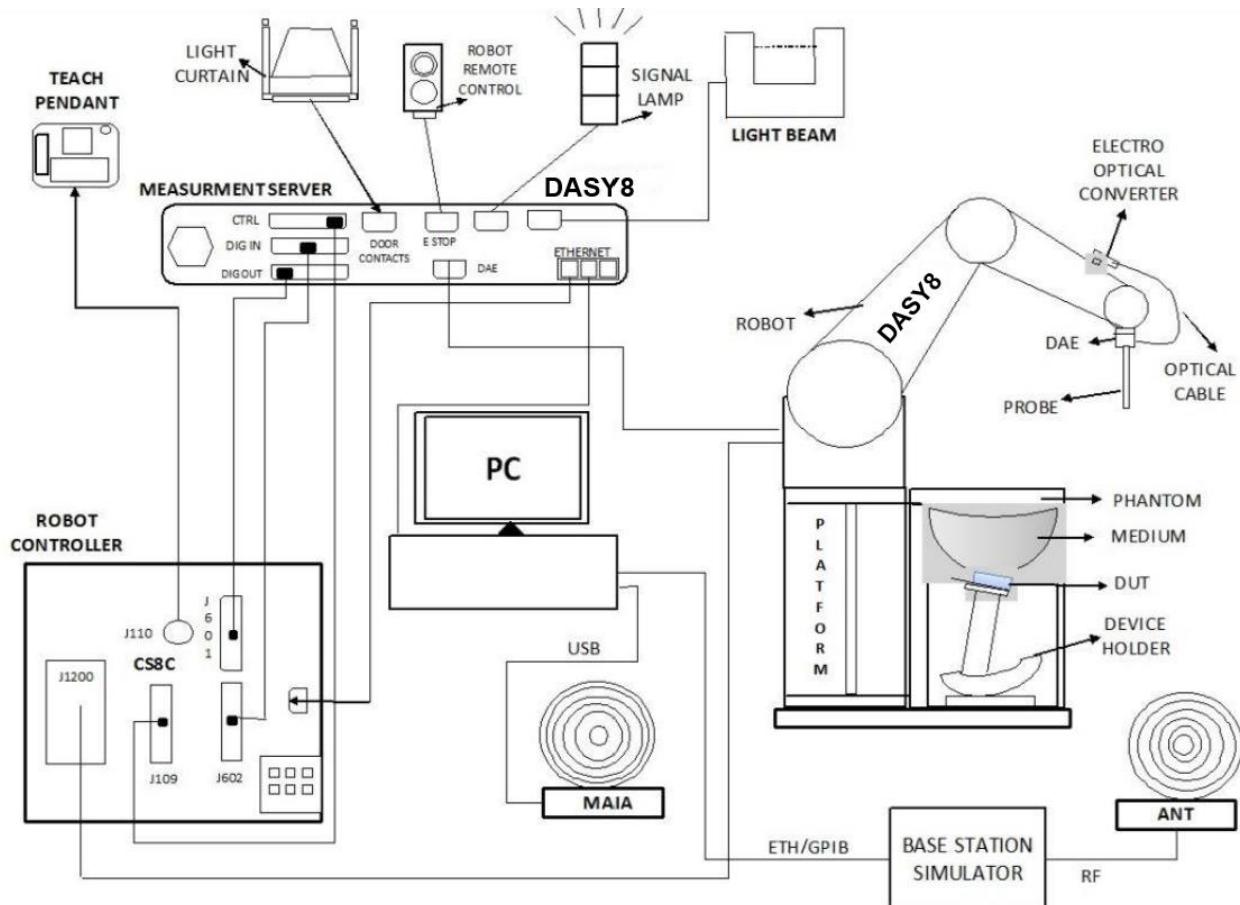


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Windows 11 and the DASY8 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 8.2 E-Field Probe

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Calibration</b>	ISO/IEC 17025 <a href="#">calibration service</a> available.
<b>Frequency</b>	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)
<b>Dynamic Range</b>	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

## 8.3 Data Acquisition Electronics (DAE)

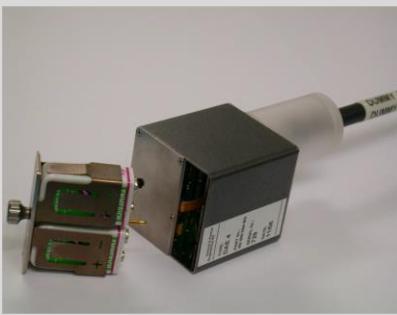	<p>The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.</p> <p>The input impedance of the DAE is 200 M<math>\Omega</math>; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.</p>
-------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


## 8.4 Phantom

### SAM Twin Phantom:

<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)	
<b>Shell Thickness</b>	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
<b>Dimensions (incl. Wooden Support)</b>	Length: 1000 mm Width: 500 mm Height: adjustable feet	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Wooden Support</b>	SPEAG standard phantom table	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

### ELI Phantom:
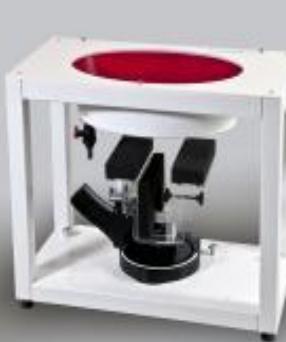
<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)	
<b>Shell Thickness</b>	2.0 ± 0.2 mm (bottom plate)	
<b>Dimensions</b>	Major axis: 600 mm Minor axis: 400 mm	
<b>Filling Volume</b>	approx. 30 liters	
<b>Wooden Support</b>	SPEAG standard phantom table	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 8.5 Device Holder

The SAR measured in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of  $\pm$  0.5mm would produce uncertainty in the SAR of  $\pm$  20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions at which the devices must be measured are defined by the standards. The DASY8 device holder along with the associated adaptors / options is designed to accommodate different types & sizes (laptops, tablets, phones) of test devices and yet provide accurate and repeatable positioning as described in the test standards.

The device holder is available in two configurations (see Figure 3.13.1): for hand held transmitters (mobile phones) - MD4HHTV5 - Mounting Device for Hand-Held Transmitters and for Body-Worn transmitters - MD4LAP5 - Mounting Device for laptops and other body worn transmitters.



(a) MD4HHTV5



(b) MD4LAP5

Figure 3.13.1: Mounting Device for Hand-Held Devices and Laptop / Body-Worn Devices

## 8.6 Measurement procedure

### 8.6.1 Power reference measurement

The Power Reference Measurement and Power Drift Measurement jobs are useful jobs for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### 8.6.2 Area scan

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. In addition, identify the positions of any local maxima with SAR values within 2 dB of the maximum value, and that will not be within the zoom scan of other peaks. Additional zoom scans shall be measured for such peaks only when the primary peak is within 2 dB of the SAR compliance limit.

Area scan parameters extracted from IEC/IEEE 62209-1528 SAR measurement as below:

Parameter	DUT transmit frequency being tested	
	$f \leq 3 \text{ GHz}$	$3 \text{ GHz} < f \leq 10 \text{ GHz}$
Maximum distance between the measured points (geometric centre of the sensors) and the inner phantom surface ( $z_{M1}$ in Figure 20 in mm)	$5 \pm 1$	$\delta \ln(2)/2 \pm 0,5$ <sup>a</sup>
Maximum spacing between adjacent measured points in mm (see O.8.3.1) <sup>b</sup>	20, or half of the corresponding zoom scan length, whichever is smaller	60/f, or half of the corresponding zoom scan length, whichever is smaller
Maximum angle between the probe axis and the phantom surface normal ( $\alpha$ in Figure 20) <sup>c</sup>	5° (flat phantom only) 30° (other phantoms)	5° (flat phantom only) 20° (other phantoms)
Tolerance in the probe angle	1°	1°

<sup>a</sup>  $\delta$  is the penetration depth for a plane-wave incident normally on a planar half-space.  
<sup>b</sup> See Clause O.8 on how  $\Delta x$  and  $\Delta y$  may be selected for individual area scan requirements.  
<sup>c</sup> The probe angle relative to the phantom surface normal is restricted due to the degradation in the measurement accuracy in fields with steep spatial gradients. The measurement accuracy decreases with increasing probe angle and increasing frequency. This is the reason for the tighter probe angle restriction at frequencies above 3 GHz.

### 8.6.3 Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan parameters extracted from IEC/IEEE 62209-1528 SAR measurement as below:

Parameter	DUT transmit frequency being tested	
	$f \leq 3 \text{ GHz}$	$3 \text{ GHz} < f \leq 10 \text{ GHz}$
Maximum distance between the closest measured points and the phantom surface ( $z_{M1}$ in Figure 20 and Table 3, in mm)	5	$\delta \ln(2)/2^a$
Maximum angle between the probe axis and the phantom surface normal ( $\alpha$ in Figure 20)	$5^\circ$ (flat phantom only) $30^\circ$ (other phantoms)	$5^\circ$ (flat phantom only) $20^\circ$ (other phantoms)
Maximum spacing between measured points in the $x$ - and $y$ -directions ( $\Delta x$ and $\Delta y$ , in mm)	8	$24/f^b$
For uniform grids: Maximum spacing between measured points in the direction normal to the phantom shell ( $\Delta z_1$ in Figure 20, in mm)	5	$10/(f - 1)$
For graded grids: Maximum spacing between the two closest measured points in the direction normal to the phantom shell ( $\Delta z_1$ in Figure 20, in mm)	4	$12/f$
For graded grids: Maximum incremental increase in the spacing between measured points in the direction normal to the phantom shell ( $R_z = \Delta z_2/\Delta z_1$ in Figure 20)	1,5	1,5
Minimum edge length of the zoom scan volume in the $x$ - and $y$ -directions ( $L_z$ in O.8.3.2, in mm)	30	22
Minimum edge length of the zoom scan volume in the direction normal to the phantom shell ( $L_h$ in O.8.3.2 in mm)	30	22
Tolerance in the probe angle	$1^\circ$	$1^\circ$

<sup>a</sup>  $\delta$  is the penetration depth for a plane-wave incident normally on a planar half-space.

<sup>b</sup> This is the maximum spacing allowed, which might not work for all circumstances.

### 8.6.4 Power Drift Measurement

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of  $\pm 5\%$ . Detail power drift measurement refer to appendix B.

## 9 Test Equipment list

Manufacturer	Equipment Name	Model	Serial Number	Calibration Date	Due Date of calibration
SPEAG	Twin Phantom	SAM	2168	NCR	NCR
SPEAG	E-Field Probe	EX3DV4	7758	2024/09/12	2025/09/11
SPEAG	Data Acquisition Electronics	DAE4	1846	2024/12/10	2025/12/09
SPEAG	System Validation Kits	D2450V2	1099	2023/02/02	2026/02/01
SPEAG	System Validation Kits	D5GHzV2	1371	2023/02/03	2026/02/02
SPEAG	Dielectric parameter probes	DAK3.5	1341	2024/07/15	2025/07/14
R&S	Vector network analyzer	ZNB8	101413	2024/07/17	2025/07/16
Talent Microwave	Directional Coupler	TC-05180-10S	220420003	NCR	NCR
R&S	Signal Generator	SMR20	100621	2024/03/25	2025/03/24
QiJi	Preamplifier	YX28982301	TOWE-EQ-SR-020	NCR	NCR
R&S	Power Sensor	NRP-Z21	101651	2024/03/25	2025/03/24
R&S	Power Sensor	NRP-Z21	104189	2024/03/25	2025/03/24
HiSiDiKe	Thermometer	TP300	TOWE-EQ-SR-023	2024/03/27	2025/03/26
BingYu	Temperature and Humidity Indicator	HTC-1	TOWE-EQ-SR-024	2024/03/26	2025/03/25

Note:

1. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged or repaired during the interval.
2. The justification data of dipole can be found in Appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

## 10 SAR measurement variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$

## 11 Description of Test Position

### 11.1 Body exposure conditions

SAR can test the sides near the antenna, the surface of the device should be tested for SAR compliance with the device touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent device surface is used to determine if SAR testing is required for the adjacent surfaces, with the adjacent surface positioned against the phantom and the surface containing the antenna positioned perpendicular to the phantom.

## 12 System Verification

### 12.1 Recipes for Tissue Simulate Liquid

The bellowing tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85

Salt: 99+% Pure Sodium Chloride  
 Water: De-ionized, 16 MΩ<sup>+</sup> resistivity  
 Tween: Polyoxyethylene (20) sorbitan monolaurate

Sucrose: 98+% Pure Sucrose  
 HEC: Hydroxyethyl Cellulose

### 12.2 Tissue Verification

The Conductivity ( $\sigma$ ) and Permittivity ( $\rho$ ) are listed in bellow table. The temperature variation of the Tissue Simulate Liquids was  $22 \pm 2^\circ\text{C}$ , the liquid depth of the ear reference point or the flat phantom was at least 15 cm (which is shown in Figure 12-1).

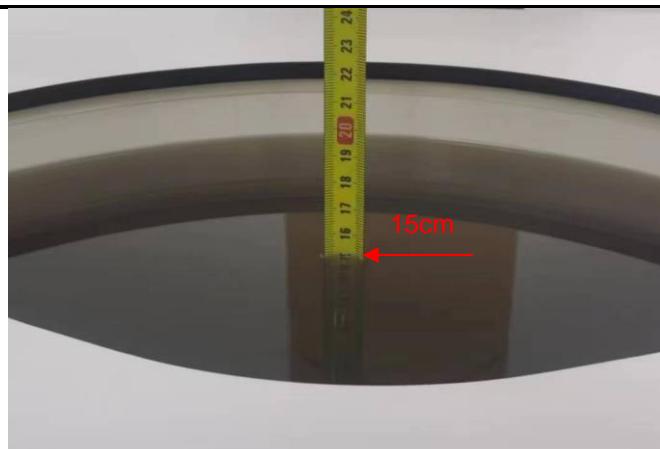


Figure 12-1 Liquid depth in the Flat Phantom

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Target Tissue		Measured Tissue		Deviation (Limit $\pm 5\%$ )		Date
			Permittivity $\epsilon_r$	Conductivity $\sigma(\text{S/m})$	Permittivity $\epsilon_r$	Conductivity $\sigma(\text{S/m})$	$\Delta\epsilon_r$	$\Delta\sigma$	
2450	Head	22.1	39.20	1.80	40.800	1.810	4.08%	0.56%	2025/03/06
5300	Head	22.3	35.90	4.76	36.700	4.810	2.23%	1.05%	2025/03/16
5600	Head	22.2	35.50	5.07	35.500	5.160	0.00%	1.78%	2025/03/16
5800	Head	21.9	35.30	5.27	35.500	5.380	0.57%	2.09%	2025/03/17

Table 1: Measurement Tissue Parameters

## 12.3 SAR System Check

Prior to SAR assessment, a SAR system Check measurement was performed to see if the measured SAR was within  $\pm 10\%$  from the target SAR values. The System Performance Check Setup in Figure 12-3.

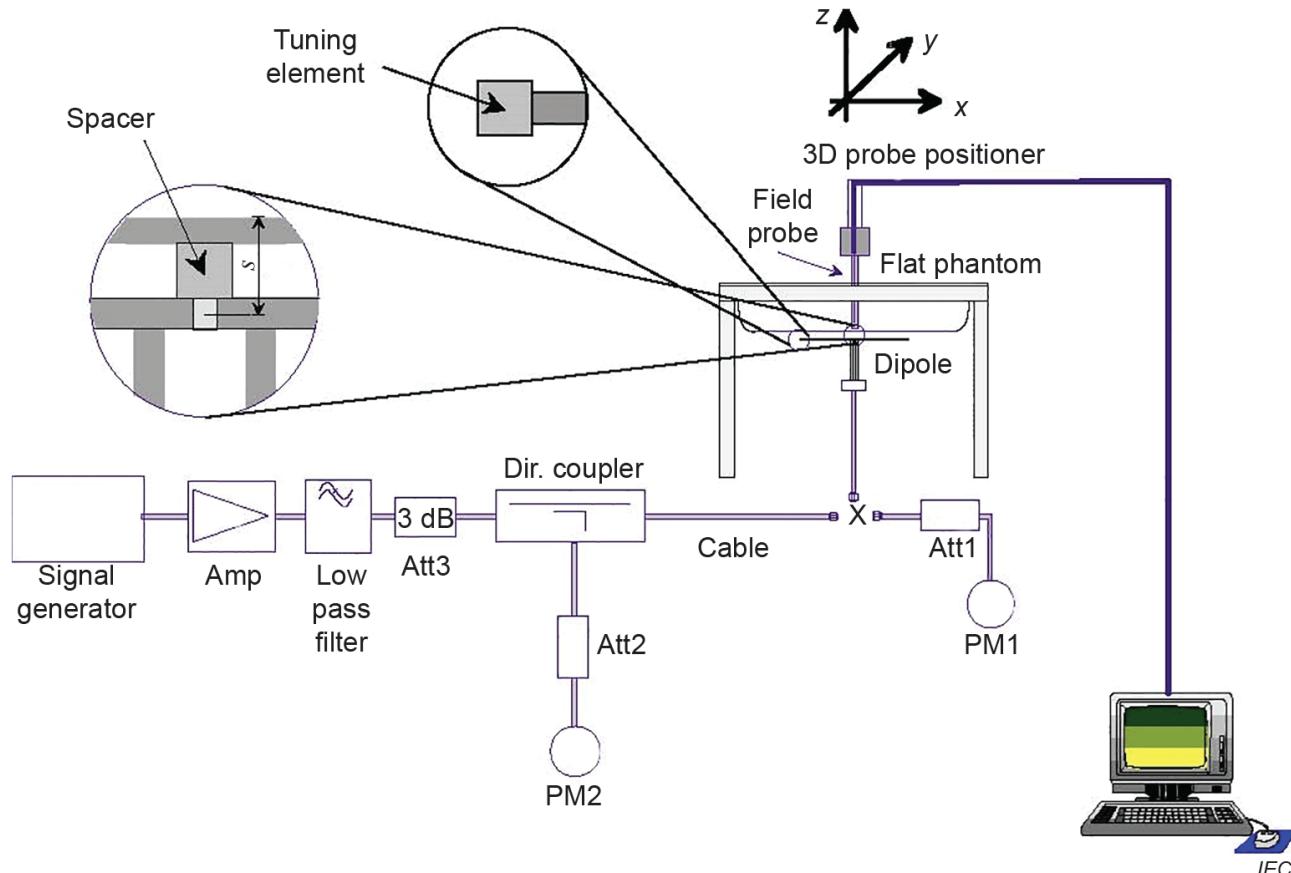


Figure 12-3 System Performance Check Setup

### 12.3.1 System Check Result

Frequency (MHz)	Tissue Type	Dipole	S/N	Target SAR (1W)		Measured SAR (100mW)		Measured SAR (normalized to 1W)		Deviation (Limit $\pm 10\%$ )		Date
				1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	$\Delta 1g$	$\Delta 10g$	
2450	Head	D2450V2	1099	51.40	23.90	5.31	2.47	53.10	24.70	3.31%	3.35%	2025/03/06
5300	Head	D5GHzV2	1371	80.90	23.10	8.18	2.34	81.80	23.40	1.11%	1.30%	2025/03/16
5600	Head	D5GHzV2	1371	82.30	23.30	8.40	2.40	84.00	24.00	2.07%	3.00%	2025/03/16
5800	Head	D5GHzV2	1371	79.80	22.40	7.63	2.17	76.30	21.70	-4.39%	-3.13%	2025/03/17

Table 2: SAR System Check Result

### 12.3.2 Detailed System Check Result

Please see the Appendix A

## 13 SAR General Measurement Procedures

### 13.1 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01 for more details.

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

For WiFi SAR testing, a communication link is set up with some command for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Per KDB248227 D01, a minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

#### 13.1.1 Initial Test Position Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

1. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
2. When the reported SAR of the initial test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
3. For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

#### 13.1.2 Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to reported SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the reported SAR of the initial test configuration is  $> 0.8$  W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

### 13.1.3 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency Band and aggregated Band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position on procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg for 1g SAR and  $\leq 3.0$  W/kg for 10g SAR, no additional SAR tests for the subsequent test configurations are required.

### 13.1.4 2.4 GHz SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

#### A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

1. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS is that exposure configuration.
2. When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

#### B) 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB248227 D01). SAR is not required for the following 2.4 GHz OFDM conditions.

1. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
2. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

### C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

### 13.1.5 5 GHz SAR Procedures

#### 13.1.5.1 U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is  $> 1.2$  W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

### 13.1.5.2 U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

### 13.1.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

### 13.1.7 MIMO SAR Considerations

Per KDB 248227 D01, the simultaneous SAR provisions in KDB 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is <1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

## 14 Conducted Power

WIFI 2.4G Ant1						
Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up	SAR Test
802.11b	1	2412	1	<b>12.64</b>	13.00	Yes
	6	2437		<b>12.37</b>	13.00	Yes
	11	2462		<b>12.20</b>	13.00	Yes
802.11g	1	2412	6	Not Required	13.00	No
	6	2437			13.00	No
	11	2462			13.00	No
802.11n HT20	1	2412	6.5	Not Required	8.50	No
	6	2437			8.50	No
	11	2462			8.50	No
802.11n HT40	3	2422	13.5	Not Required	8.50	No
	6	2437			8.50	No
	9	2452			8.50	No
802.11ax HT20	1	2412	MCS0	Not Required	8.50	No
	6	2437			8.50	No
	11	2462			8.50	No
802.11ax HT40	3	2422	MCS0	Not Required	8.50	No
	6	2437			8.50	No
	9	2452			8.50	No

WIFI 2.4G Ant2						
Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up	SAR Test
802.11b	1	2412	1	<b>13.45</b>	14.00	Yes
	6	2437		<b>13.61</b>	14.00	Yes
	11	2462		<b>13.21</b>	14.00	Yes
802.11g	1	2412	6	Not Required	14.00	No
	6	2437			14.00	No
	11	2462			14.00	No
802.11n HT20	1	2412	6.5	Not Required	7.00	No
	6	2437			7.00	No
	11	2462			7.00	No
802.11n HT40	3	2422	13.5	Not Required	7.00	No
	6	2437			7.00	No
	9	2452			7.00	No
802.11ax HT20	1	2412	MCS0	Not Required	7.00	No
	6	2437			7.00	No
	11	2462			7.00	No
802.11ax HT40	3	2422	MCS0	Not Required	7.00	No
	6	2437			7.00	No
	9	2452			7.00	No

WIFI 2.4G MIMO						
Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up	SAR Test
802.11n HT20	1	2412	6.5	Not Required	10.50	No
	6	2437			10.50	No
	11	2462			10.50	No
802.11n HT40	3	2422	13.5	<b>9.86</b>	10.50	Yes
	6	2437		<b>9.84</b>	10.50	Yes
	9	2452		<b>9.66</b>	10.50	Yes
802.11ax HT20	1	2412	MCS0	Not Required	10.50	No
	6	2437			10.50	No
	11	2462			10.50	No
802.11ax HT40	3	2422	MCS0	Not Required	10.50	No
	6	2437			10.50	No
	9	2452			10.50	No

WIFI 5G Ant1							
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11a	U-NII-1	36	5180	6	Not Required	6.00	No
		40	5200			6.00	No
		44	5220			6.00	No
		48	5240			6.00	No
	U-NII-2A	52	5260		Not Required	6.00	No
		56	5280			6.00	No
		60	5300			6.00	No
		64	5320			6.00	No
	U-NII-2C	100	5500		4.46	6.00	No
		116	5580		4.53	6.00	No
		124	5620		4.67	6.00	Yes
		132	5660		4.47	6.00	No
		140	5700		5.91	6.50	Yes
		144	5720		5.25	6.00	Yes
	U-NII-3	149	5745		Not Required	7.50	No
		157	5785			7.00	No
		165	5825			7.00	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11n- HT20	U-NII-1	36	5180	MCS0	Not Required	6.00	No
		40	5200			6.00	No
		44	5220			6.00	No
		48	5240			6.00	No
	U-NII-2A	52	5260		Not Required	6.00	No
		56	5280			6.00	No
		60	5300			6.00	No
		64	5320			6.00	No
	U-NII-2C	100	5500		Not Required	5.50	No
		104	5520			5.50	No
		108	5540			5.50	No
		112	5560			5.50	No
		116	5580			5.50	No
		120	5600			5.50	No
		124	5620			5.50	No
		128	5640			5.50	No
		132	5660			5.50	No
		136	5680			5.50	No
		140	5700			5.50	No
		144	5720			5.50	No
	U-NII-3	149	5745		Not Required	6.50	No
		153	5765			6.50	No
		157	5785			6.50	No
		161	5805			6.50	No
		165	5825			6.50	No

5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11n- HT40	U-NII-1	38	5190	MCS0	Not Required	6.00	No
		46	5230			6.00	No
	U-NII-2A	54	5270			6.00	No
		62	5310			6.00	No
	U-NII-2C	102	5510		Not Required	5.00	No
		110	5550			5.00	No
		118	5590			5.00	No
		126	5630			5.00	No
		134	5670			5.00	No
		142	5710			6.00	No
	U-NII-3	151	5755		Not Required	6.50	No
		159	5795			6.00	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ac- 20	U-NII-1	36	5180	MCS0	Not Required	6.00	No
		40	5200			6.00	No
		44	5220			6.00	No
		48	5240			6.00	No
	U-NII-2A	52	5260		Not Required	6.00	No
		56	5280			6.00	No
		60	5300			6.00	No
		64	5320			6.00	No
	U-NII-2C	100	5500		Not Required	5.50	No
		104	5520			5.50	No
		108	5540			5.50	No
		112	5560			5.50	No
		116	5580			5.50	No
		120	5600			5.50	No
		124	5620			5.50	No
		128	5640			5.50	No
		132	5660			5.50	No
		136	5680			5.50	No
		140	5700			5.50	No
		144	5720			5.50	No
	U-NII-3	149	5745		Not Required	6.50	No
		153	5765			6.50	No
		157	5785			6.50	No
		161	5805			6.50	No
		165	5825			6.50	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ac- 40	U-NII-1	38	5190	MCS0	Not Required	6.00	No
		46	5230			6.00	No
	U-NII-2A	54	5270			6.00	No
		62	5310			6.50	No
	U-NII-2C	102	5510		Not Required	5.50	No
		110	5550			5.50	No
		118	5590			5.50	No
		126	5630			5.50	No
		134	5670			5.50	No
		142	5710			6.00	No
	U-NII-3	151	5755		Not Required	7.00	No
		159	5795			6.00	No

5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	MCS0	5.35	6.00	No
	U-NII-2A	58	5290		<b>6.20</b>	6.50	Yes
	U-NII-2C	106	5530		4.54	5.50	No
		122	5610		5.35	5.50	No
		138	5690		5.25	5.50	No
	U-NII-3	155	5775		<b>7.15</b>	8.00	Yes
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ac 160M	U-NII-2A	50	5250	MCS0	Not Required	2.00	No
	U-NII-2C	114	5570		Not Required	5.00	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ax- 20	U-NII-1	36	5180	MCS0	Not Required	6.00	No
		40	5200			6.00	No
		44	5220			6.00	No
		48	5240			6.00	No
	U-NII-2A	52	5260		Not Required	6.50	No
		56	5280			6.50	No
		60	5300			6.50	No
		64	5320			6.50	No
	U-NII-2C	100	5500		Not Required	5.50	No
		104	5520			5.50	No
		108	5540			5.50	No
		112	5560			5.50	No
		116	5580			5.50	No
		120	5600			5.50	No
		124	5620			5.50	No
		128	5640			5.50	No
		132	5660			5.50	No
		136	5680			5.50	No
		140	5700			5.50	No
		144	5720			5.50	No
	U-NII-3	149	5745		Not Required	6.50	No
		153	5765			6.50	No
		157	5785			6.50	No
		161	5805			6.50	No
		165	5825			6.50	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ax- 40	U-NII-1	38	5190	MCS0	Not Required	5.50	No
		46	5230			5.50	No
	U-NII-2A	54	5270			6.50	No
		62	5310			6.50	No
	U-NII-2C	102	5510		Not Required	5.00	No
		110	5550			5.00	No
		118	5590			5.00	No
		126	5630			5.00	No
		134	5670			5.00	No
		142	5710			6.00	No
	U-NII-3	151	5755		Not Required	7.00	No
		159	5795			7.00	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ax 80M	U-NII-1	42	5210	MCS0	Not Required	6.00	No
	U-NII-2A	58	5290		Not Required	6.50	No
	U-NII-2C	106	5530		Not Required	5.50	No
		122	5610			5.50	No
		138	5690			5.00	No
	U-NII-3	155	5775		Not Required	7.00	No

5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ax 160M	U-NII-2A	50	5250	MCS0	Not Required	2.00	No
	U-NII-2C	114	5570		Not Required	5.00	No

WIFI 5G Ant2							
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11a	U-NII-1	36	5180	6	Not Required	4.00	No
		40	5200			4.00	No
		44	5220			4.00	No
		48	5240			4.00	No
	U-NII-2A	52	5260		Not Required	6.50	No
		56	5280			6.50	No
		60	5300			6.50	No
		64	5320			6.50	No
	U-NII-2C	100	5500		Not Required	4.50	No
		116	5580			4.50	No
		124	5620			4.50	No
		132	5660			4.50	No
		140	5700			4.50	No
		144	5720			4.50	No
	U-NII-3	149	5745	Not Required	9.00	No	No
		157	5785			No	No
		165	5825			9.00	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11n- HT20	U-NII-1	36	5180	MCS0	Not Required	4.00	No
		40	5200			4.00	No
		44	5220			4.00	No
		48	5240			4.00	No
	U-NII-2A	52	5260		Not Required	6.50	No
		56	5280			6.50	No
		60	5300			6.50	No
		64	5320			6.50	No
	U-NII-2C	100	5500		Not Required	4.50	No
		104	5520			4.50	No
		108	5540			4.50	No
		112	5560			4.50	No
		116	5580			4.50	No
		120	5600			4.50	No
		124	5620			4.50	No
		128	5640			4.50	No
		132	5660			4.50	No
		136	5680			4.50	No
		140	5700			4.50	No
		144	5720			4.50	No
	U-NII-3	149	5745		Not Required	8.00	No
		153	5765			8.00	No
		157	5785			8.00	No
		161	5805			8.00	No
		165	5825			8.00	No

5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11n- HT40	U-NII-1	38	5190	MCS0	Not Required	4.00	No
		46	5230			4.00	No
	U-NII-2A	54	5270			7.00	No
		62	5310			7.00	No
	U-NII-2C	102	5510		Not Required	4.50	No
		110	5550			4.50	No
		118	5590			4.50	No
		126	5630			4.50	No
		134	5670			4.50	No
		142	5710			4.50	No
	U-NII-3	151	5755		Not Required	8.00	No
		159	5795			8.00	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ac- 20	U-NII-1	36	5180	MCS0	Not Required	4.00	No
		40	5200			4.00	No
		44	5220			4.00	No
		48	5240			4.00	No
	U-NII-2A	52	5260		Not Required	7.00	No
		56	5280			7.00	No
		60	5300			7.00	No
		64	5320			7.00	No
	U-NII-2C	100	5500		Not Required	4.50	No
		104	5520			4.50	No
		108	5540			4.50	No
		112	5560			4.50	No
		116	5580			5.00	No
		120	5600			4.50	No
		124	5620			4.50	No
		128	5640			4.50	No
		132	5660			4.50	No
		136	5680			4.50	No
		140	5700			4.50	No
		144	5720			4.50	No
	U-NII-3	149	5745		Not Required	8.00	No
		153	5765			8.00	No
		157	5785			8.00	No
		161	5805			8.00	No
		165	5825			8.00	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ac- 40	U-NII-1	38	5190	MCS0	Not Required	4.00	No
		46	5230			4.00	No
	U-NII-2A	54	5270			7.00	No
		62	5310			7.00	No
	U-NII-2C	102	5510		Not Required	4.50	No
		110	5550			5.00	No
		118	5590			5.00	No
		126	5630			4.50	No
		134	5670			4.50	No
		142	5710			4.50	No
	U-NII-3	151	5755		Not Required	8.00	No
		159	5795			8.00	No

5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	MCS0	4.01	4.50	No
	U-NII-2A	58	5290		<b>6.08</b>	7.00	Yes
	U-NII-2C	106	5530		4.08	4.50	No
		122	5610		<b>4.52</b>	5.00	Yes
		138	5690		4.07	4.50	No
	U-NII-3	155	5775		<b>8.05</b>	9.00	Yes
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ac 160M	U-NII-2A	50	5250	MCS0	Not Required	1.00	No
	U-NII-2C	114	5570		Not Required	5.00	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ax- 20	U-NII-1	36	5180	MCS0	4.00	No	
		40	5200		4.00	No	
		44	5220		4.00	No	
		48	5240		4.00	No	
	U-NII-2A	52	5260		7.00	No	
		56	5280		7.00	No	
		60	5300		7.00	No	
		64	5320		7.00	No	
	U-NII-2C	100	5500		4.50	No	
		104	5520		4.50	No	
		108	5540		4.50	No	
		112	5560		4.50	No	
		116	5580		4.50	No	
		120	5600		4.50	No	
		124	5620		4.50	No	
		128	5640		4.50	No	
		132	5660		4.50	No	
		136	5680		4.50	No	
		140	5700		4.50	No	
		144	5720		4.50	No	
	U-NII-3	149	5745		8.00	No	
		153	5765		8.00	No	
		157	5785		8.00	No	
		161	5805		8.00	No	
		165	5825		8.00	No	
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ax- 40	U-NII-1	38	5190	MCS0	4.00	No	
		46	5230		4.00	No	
	U-NII-2A	54	5270		7.00	No	
		62	5310		7.00	No	
	U-NII-2C	102	5510		4.50	No	
		110	5550		5.00	No	
		118	5590		4.50	No	
		126	5630		4.50	No	
		134	5670		4.50	No	
		142	5710		4.50	No	
	U-NII-3	151	5755		8.00	No	
		159	5795		8.00	No	
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ax 80M	U-NII-1	42	5210	MCS0	Not Required	4.00	No
	U-NII-2A	58	5290		Not Required	7.00	No
	U-NII-2C	106	5530		Not Required	4.50	No
		122	5610		Not Required	4.50	No
		138	5690		Not Required	4.50	No
	U-NII-3	155	5775		Not Required	9.00	No

5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ax 160M	U-NII-2A	50	5250	MCS0	Not Required	1.00	No
	U-NII-2C	114	5570		Not Required	5.00	No

WIFI 5G MIMO							
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11n- HT20	U-NII-1	36	5180	MCS0	Not Required	8.00	No
		40	5200			8.00	No
		44	5220			8.00	No
		48	5240			8.00	No
	U-NII-2A	52	5260		Not Required	9.00	No
		56	5280			9.00	No
		60	5300			9.00	No
		64	5320			9.00	No
	U-NII-2C	100	5500		Not Required	8.00	No
		104	5520			8.00	No
		108	5540			8.00	No
		112	5560			8.00	No
		116	5580			8.00	No
		120	5600			8.00	No
		124	5620			8.00	No
		128	5640			8.00	No
		132	5660			8.00	No
		136	5680			8.00	No
		140	5700			8.00	No
		144	5720			8.00	No
	U-NII-3	149	5745		Not Required	10.50	No
		153	5765			10.50	No
		157	5785			10.50	No
		161	5805			10.50	No
		165	5825			10.50	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11n- HT40	U-NII-1	38	5190	MCS0	Not Required	8.00	No
		46	5230			8.00	No
	U-NII-2A	54	5270		Not Required	9.00	No
		62	5310			9.40	No
	U-NII-2C	102	5510		Not Required	8.00	No
		110	5550			8.00	No
		118	5590			8.00	No
		126	5630			8.00	No
		134	5670			8.00	No
		142	5710			8.00	No
	U-NII-3	151	5755	Not Required	Not Required	10.50	No
		159	5795			10.50	No

5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ac-20	U-NII-1	36	5180	MCS0	Not Required	8.00	No
		40	5200			8.00	No
		44	5220			8.00	No
		48	5240			8.00	No
	U-NII-2A	52	5260		Not Required	9.00	No
		56	5280			9.00	No
		60	5300			9.00	No
		64	5320			9.00	No
	U-NII-2C	100	5500		Not Required	8.00	No
		104	5520			8.00	No
		108	5540			8.00	No
		112	5560			8.00	No
		116	5580			8.00	No
		120	5600			8.00	No
		124	5620			8.00	No
		128	5640			8.00	No
		132	5660			8.00	No
		136	5680			8.00	No
		140	5700			8.00	No
		144	5720			8.00	No
	U-NII-3	149	5745		Not Required	10.50	No
		153	5765			10.50	No
		157	5785			10.50	No
		161	5805			10.50	No
		165	5825			10.50	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ac-40	U-NII-1	38	5190	MCS0	Not Required	8.00	No
		46	5230			8.00	No
	U-NII-2A	54	5270		Not Required	9.00	No
		62	5310			9.40	No
	U-NII-2C	102	5510		Not Required	8.00	No
		110	5550			8.00	No
		118	5590			8.00	No
		126	5630			8.00	No
		134	5670			8.00	No
		142	5710			8.00	No
		151	5755		Not Required	10.50	No
		159	5795			10.50	No
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	MCS0	7.74	8.00	No
	U-NII-2A	58	5290		<b>9.15</b>	9.40	Yes
	U-NII-2C	106	5530		<b>7.33</b>	8.50	Yes
		122	5610		<b>7.97</b>	8.50	Yes
		138	5690		<b>7.71</b>	8.50	No
	U-NII-3	155	5775		<b>10.63</b>	11.00	Yes
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ac 160M	U-NII-2A	50	5250	MCS0	Not Required	4.50	No
	U-NII-2C	114	5570		Not Required	8.00	No

5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ax-20	U-NII-1	36	5180	MCS0	Not Required	8.00	Yes
		40	5200			8.00	Yes
	U-NII-2A	44	5220			8.00	Yes
		48	5240			8.00	Yes
	U-NII-2A	52	5260		Not Required	9.40	Yes
		56	5280			9.40	Yes
		60	5300			9.40	Yes
		64	5320			9.40	Yes
	U-NII-2C	100	5500		Not Required	8.00	Yes
		104	5520			8.00	Yes
		108	5540			8.00	Yes
		112	5560			8.00	Yes
		116	5580			8.00	Yes
		120	5600			8.00	Yes
		124	5620			8.00	Yes
		128	5640			8.00	Yes
		132	5660			8.00	Yes
		136	5680			8.00	Yes
		140	5700			8.00	Yes
		144	5720			8.00	Yes
	U-NII-3	149	5745		Not Required	10.50	Yes
		153	5765			10.50	Yes
		157	5785			10.50	Yes
		161	5805			10.50	Yes
		165	5825			10.50	Yes
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ax-40	U-NII-1	38	5190	MCS0	Not Required	8.00	Yes
		46	5230			8.00	Yes
	U-NII-2A	54	5270		Not Required	9.40	Yes
		62	5310			9.40	Yes
	U-NII-2C	102	5510		Not Required	8.00	Yes
		110	5550			8.00	Yes
		118	5590			8.00	Yes
		126	5630			8.00	Yes
		134	5670			8.00	Yes
		142	5710			8.00	Yes
	U-NII-3	151	5755		Not Required	10.50	Yes
		159	5795			10.50	Yes
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ax 80M	U-NII-1	42	5210	MCS0	Not Required	8.00	Yes
	U-NII-2A	58	5290			9.40	Yes
	U-NII-2C	106	5530		Not Required	8.00	Yes
		122	5610			8.00	Yes
		138	5690			8.00	Yes
	U-NII-3	155	5775		Not Required	10.50	Yes
5GHz	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up (dBm)	SAR Test
802.11ax 160M	U-NII-2A	50	5250	MCS0	Not Required	4.00	Yes
	U-NII-2C	114	5570		Not Required	8.00	Yes

BT				
Test Mode	Antenna	Frequency (MHz)	Average Power (dBm)	Tune up (dBm)
DH5	Ant1	2402	-0.37	1.00
		2441	0.04	1.00
		2480	0.20	1.00
2DH5	Ant1	2402	-0.55	1.00
		2441	0.20	1.00
		2480	0.16	1.00
3DH5	Ant1	2402	-0.54	1.00
		2441	0.22	1.00
		2480	0.42	1.00
BLE_1M	Ant1	2402	4.55	5.50
		2440	5.00	5.50
		2480	5.16	5.50
BLE_2M	Ant1	2402	4.59	5.50
		2440	4.99	5.50
		2480	5.19	5.50
Custom BLE_1M	Ant1	2402	1.20	2.00
		2440	1.06	2.00
		2480	1.30	2.00
Custom BLE_2M	Ant1	2402	1.06	2.00
		2440	0.96	2.00
		2480	1.13	2.00


Ant1 WIFI 2.4G 802.11b Duty cycle= 98.02%



Ant2 WIFI 2.4G 802.11b Duty cycle= 97.98%




MIMO WIFI 2.4G 802.11n 40M Duty cycle= 99.01%

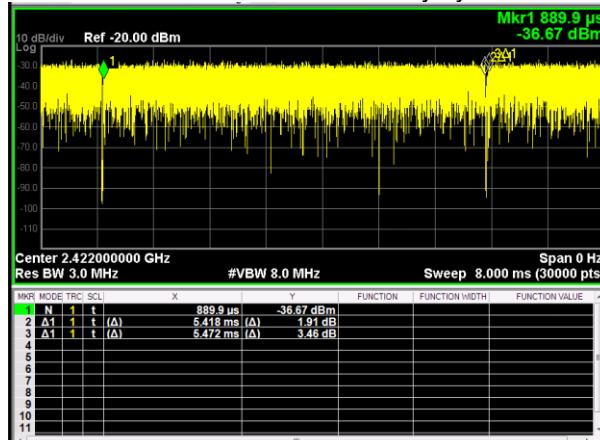

Ant1 WIFI 5G 802.11a Duty cycle= 99.15%



## Ant1 WIFI 5G 802.11ac 80M Duty cycle= 99.05%

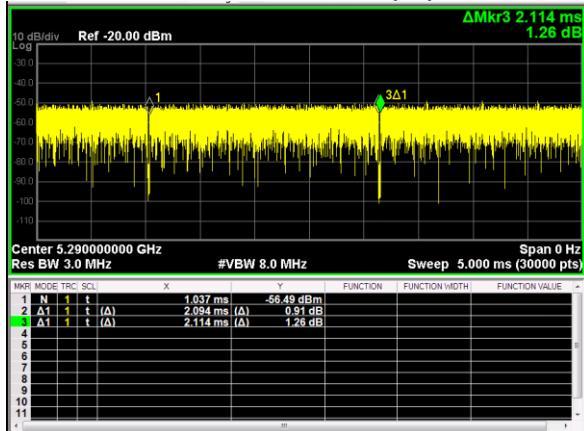

## Ant2 WIFI 5G 802.11ac 80M Duty cycle= 99.01%



## MIMO WIFI 5G 802.11ac 80M Duty cycle= 99.10%



## 15 Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and Product specific 10g SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Band	Frequency (GHz)	Max Average Power		Test Separation (mm)	Calculate Value	Exclusion Threshold	Exclusion (Y/N)
		dBm	mW				
Bluetooth	2.4835	5.5	3.55	5	1.12	3	Y

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is  $\leq$  50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $<$  5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

### Estimated SAR:

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$  W/kg for test separation distances  $\leq$  50 mm;

Where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

When the minimum test separation distance is  $<$  5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Estimated SAR Result					
Band	Frequency (GHz)	Test Position	Max. power (dBm)	Test Separation (mm)	Estimated
					SAR (W/kg)
BT	2.48	Body	5.5	5	0.149

## 16 SAR Data Summary

**General Notes:**

- 1) The Highest Reported SAR Plot refer to Appendix B.
- 2) Per KDB 447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1g or 10g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8\text{W/kg}$  for 1g or  $2.0\text{W/kg}$  for 10g respectively, when the transmission band is  $\leq 100\text{MHz}$ .
  - $\leq 0.6 \text{ W/kg}$  or  $1.5 \text{ W/kg}$ , for 1g or 10g respectively, when the transmission band is between  $100 \text{ MHz}$  and  $200\text{MHz}$ .
  - $\leq 0.4 \text{ W/kg}$  or  $1.0 \text{ W/kg}$ , for 1g or 10g respectively, when the transmission band is  $\geq 200\text{MHz}$ .

## 16.1 SAR Measurement Result of WIFI 2.4G

Ant 1 Test Results											
Test position	Mode	Ch./Freq. (MHz)	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Duty Cycle	Duty Cycle Scaling Factor	Conducted Power (dBm)	Tune up Limit (dBm)	Scaling Factor	Reported 1g SAR (W/kg)
Body 0mm											
Front side	802.11b	1/2412	0.115	0.059	-0.10	98.02%	1.020	12.64	13.00	1.086	0.127
Back side	802.11b	1/2412	0.092	0.048	0.02	98.02%	1.020	12.64	13.00	1.086	0.102
Left side	802.11b	1/2412	0.111	0.056	0.10	98.02%	1.020	12.64	13.00	1.086	0.123
Right side	802.11b	1/2412	0.004	0.002	0.03	98.02%	1.020	12.64	13.00	1.086	0.004
Top side	802.11b	1/2412	0.107	0.052	0.01	98.02%	1.020	12.64	13.00	1.086	0.119
Bottom side	802.11b	1/2412	1.040	0.404	0.00	98.02%	1.020	12.64	13.00	1.086	<b>1.152</b>
Bottom side -repeat	802.11b	1/2412	1.010	0.400	0.05	98.02%	1.020	12.64	13.00	1.086	1.119
Bottom side	802.11b	6/2437	0.847	0.345	0.05	98.02%	1.020	12.37	13.00	1.156	0.999
Bottom side	802.11b	11/2462	0.649	0.266	-0.06	98.02%	1.020	12.20	13.00	1.202	0.796
Ant 2 Test Results											
Test position	Mode	Ch./Freq. (MHz)	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Duty Cycle	Duty Cycle Scaling Factor	Conducted Power (dBm)	Tune up Limit (dBm)	Scaling Factor	Reported 1g SAR (W/kg)
Body 0mm											
Front side	802.11b	6/2437	0.005	0.002	-0.01	97.98%	1.021	13.61	14.00	1.094	0.006
Back side	802.11b	6/2437	0.569	0.194	0.02	97.98%	1.021	13.61	14.00	1.094	0.636
Left side	802.11b	6/2437	0.110	0.043	0.04	97.98%	1.021	13.61	14.00	1.094	0.123
Right side	802.11b	6/2437	0.027	0.007	0.03	97.98%	1.021	13.61	14.00	1.094	0.030
Top side	802.11b	6/2437	0.002	0.001	0.00	97.98%	1.021	13.61	14.00	1.094	0.002
Bottom side	802.11b	6/2437	0.002	0.001	0.00	97.98%	1.021	13.61	14.00	1.094	0.002
Back side	802.11b	1/2412	0.509	0.176	-0.06	97.98%	1.021	13.45	14.00	1.135	0.590
Back side	802.11b	11/2462	0.523	0.176	-0.05	97.98%	1.021	13.21	14.00	1.199	<b>0.641</b>
MIMO (Ant 1+2) Test Results											
Test position	Mode	Ch./Freq. (MHz)	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Duty Cycle	Duty Cycle Scaling Factor	Conducted Power (dBm)	Tune up Limit (dBm)	Scaling Factor	Reported 1g SAR (W/kg)
Body 0mm											
Front side	802.11nHT40	3/2422	0.091	0.047	0.05	99.01%	1.010	9.86	10.50	1.159	0.107
Back side	802.11nHT40	3/2422	0.565	0.239	0.02	99.01%	1.010	9.86	10.50	1.159	0.661
Left side	802.11nHT40	3/2422	0.118	0.062	-0.01	99.01%	1.010	9.86	10.50	1.159	0.138
Right side	802.11nHT40	3/2422	0.003	0.001	0.00	99.01%	1.010	9.86	10.50	1.159	0.004
Top side	802.11nHT40	3/2422	0.096	0.049	0.06	99.01%	1.010	9.86	10.50	1.159	0.112
Bottom side	802.11nHT40	3/2422	0.949	0.373	-0.09	99.01%	1.010	9.86	10.50	1.159	<b>1.111</b>
Bottom side -repeat	802.11nHT40	3/2422	0.925	0.367	-0.02	99.01%	1.010	9.86	10.50	1.159	1.083
Bottom side	802.11nHT40	6/2437	0.883	0.360	0.07	99.01%	1.010	9.84	10.50	1.164	1.038
Bottom side	802.11nHT40	9/2452	0.667	0.276	0.10	99.01%	1.010	9.66	10.50	1.213	0.817

Table 3: SAR of WIFI 2.4G.

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated SAR (1g)	Ratio	2 <sup>nd</sup> Repeated SAR (1g)	3 <sup>rd</sup> Repeated SAR (1g)
Bottom side (Ant 1)	1/2412	1.040	1.010	1.030	N/A	N/A
Bottom side (MIMO)	3/2422	0.949	0.925	1.026	N/A	N/A
Note: 1) When the original highest measured SAR is $\geq 0.80$ W/kg, the measurement was repeated once.						
2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was $> 1.20$ or when the original or repeated measurement was $\geq 1.45$ W/kg ( $\sim 10\%$ from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was $\geq 1.5$ W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is $> 1.20$ .						
4) Repeated measurements are not required when the original highest measured SAR is $< 0.80$ W/kg						

## 16.2 SAR Measurement Result of WIFI 5G

Ant 1 Test Results											
Test position	Mode	Ch./Freq. (MHz)	SAR (W/kg) 1g	SAR (W/kg) 10g	Power Drift (dB)	Duty Cycle	Duty Cycle Scaling Factor	Conducted Power (dBm)	Tune up Limit (dBm)	Scaling Factor	Reported 1g SAR (W/kg)
U-NII-1 Body 0mm											
Front side	802.11ac80M	58/5290	0.080	0.033	-0.04	99.05%	1.010	6.20	6.50	1.072	0.086
Back side	802.11ac80M	58/5290	0.056	0.012	-0.07	99.05%	1.010	6.20	6.50	1.072	0.060
Left side	802.11ac80M	58/5290	0.069	0.026	0.01	99.05%	1.010	6.20	6.50	1.072	0.074
Right side	802.11ac80M	58/5290	0.075	0.017	-0.10	99.05%	1.010	6.20	6.50	1.072	0.080
Top side	802.11ac80M	58/5290	0.035	0.010	0.03	99.05%	1.010	6.20	6.50	1.072	0.038
Bottom side	802.11ac80M	58/5290	1.040	0.245	-0.06	99.05%	1.010	6.20	6.50	1.072	<b>1.114</b>
Bottom side -repeat	802.11ac80M	58/5290	1.020	0.240	0.04	99.05%	1.010	6.20	6.50	1.072	1.093
U-NII-2C Body 0mm											
Front side	802.11a	140/5700	0.076	0.030	-0.08	99.15%	1.009	5.91	6.50	1.146	0.087
Back side	802.11a	140/5700	0.042	0.011	0.01	99.15%	1.009	5.91	6.50	1.146	0.048
Left side	802.11a	140/5700	0.107	0.038	0.04	99.15%	1.009	5.91	6.50	1.146	0.123
Right side	802.11a	140/5700	0.062	0.015	-0.03	99.15%	1.009	5.91	6.50	1.146	0.071
Top side	802.11a	140/5700	0.065	0.020	0.02	99.15%	1.009	5.91	6.50	1.146	0.074
Bottom side	802.11a	140/5700	0.850	0.213	-0.05	99.15%	1.009	5.91	6.50	1.146	<b>0.974</b>
Bottom side	802.11a	144/5720	0.703	0.197	-0.05	99.15%	1.009	5.25	6.00	1.189	0.836
Bottom side	802.11a	124/5620	0.594	0.171	0.10	99.15%	1.009	4.67	6.00	1.358	0.807
U-NII-3 Body 0mm											
Front side	802.11ac80M	155/5775	0.087	0.037	0.03	99.05%	1.010	7.15	8.00	1.216	0.106
Back side	802.11ac80M	155/5775	0.050	0.012	0.04	99.05%	1.010	7.15	8.00	1.216	0.061
Left side	802.11ac80M	155/5775	0.124	0.046	-0.05	99.05%	1.010	7.15	8.00	1.216	0.151
Right side	802.11ac80M	155/5775	0.068	0.018	0.06	99.05%	1.010	7.15	8.00	1.216	0.083
Top side	802.11ac80M	155/5775	0.055	0.011	0.10	99.05%	1.010	7.15	8.00	1.216	0.067
Bottom side	802.11ac80M	155/5775	0.846	0.212	0.08	99.05%	1.010	7.15	8.00	1.216	<b>1.029</b>
Ant 2 Test Results											
Test position	Mode	Ch./Freq. (MHz)	SAR (W/kg) 1g	SAR (W/kg) 10g	Power Drift (dB)	Duty Cycle	Duty Cycle Scaling Factor	Conducted Power (dBm)	Tune up Limit (dBm)	Scaling Factor	Reported 1g SAR (W/kg)
U-NII-1 Body 0mm											
Front side	802.11ac80M	58/5290	0.067	0.016	0.07	99.01%	1.010	6.08	7.00	1.236	0.083
Back side	802.11ac80M	58/5290	0.251	0.062	0.02	99.01%	1.010	6.08	7.00	1.236	<b>0.310</b>
Left side	802.11ac80M	58/5290	0.069	0.018	-0.01	99.01%	1.010	6.08	7.00	1.236	0.085
Right side	802.11ac80M	58/5290	0.066	0.014	0.06	99.01%	1.010	6.08	7.00	1.236	0.082
Top side	802.11ac80M	58/5290	0.061	0.019	0.03	99.01%	1.010	6.08	7.00	1.236	0.075
Bottom side	802.11ac80M	58/5290	0.056	0.021	0.08	99.01%	1.010	6.08	7.00	1.236	0.069
U-NII-2C Body 0mm											
Front side	802.11ac80M	122/5610	0.061	0.024	0.01	99.01%	1.010	4.52	5.00	1.117	0.068
Back side	802.11ac80M	122/5610	0.515	0.146	0.00	99.01%	1.010	4.52	5.00	1.117	<b>0.575</b>
Left side	802.11ac80M	122/5610	0.056	0.013	0.05	99.01%	1.010	4.52	5.00	1.117	0.063
Right side	802.11ac80M	122/5610	0.079	0.020	-0.03	99.01%	1.010	4.52	5.00	1.117	0.088
Top side	802.11ac80M	122/5610	0.085	0.030	0.05	99.01%	1.010	4.52	5.00	1.117	0.095
Bottom side	802.11ac80M	122/5610	0.058	0.022	0.04	99.01%	1.010	4.52	5.00	1.117	0.065
U-NII-3 Body 0mm											
Front side	802.11ac80M	155/5775	0.071	0.017	0.06	99.01%	1.010	8.05	9.00	1.245	0.088
Back side	802.11ac80M	155/5775	0.587	0.201	0.02	99.01%	1.010	8.05	9.00	1.245	<b>0.731</b>
Left side	802.11ac80M	155/5775	0.088	0.036	0.07	99.01%	1.010	8.05	9.00	1.245	0.110
Right side	802.11ac80M	155/5775	0.063	0.023	0.01	99.01%	1.010	8.05	9.00	1.245	0.078
Top side	802.11ac80M	155/5775	0.119	0.029	0.00	99.01%	1.010	8.05	9.00	1.245	0.148
Bottom side	802.11ac80M	155/5775	0.084	0.018	-0.03	99.01%	1.010	8.05	9.00	1.245	0.105

MIMO (Ant 1+2) Test Results											
Test position	Mode	Ch./Freq. (MHz)	SAR (W/kg) 1g	SAR (W/kg) 10g	Power Drift (dB)	Duty Cycle	Duty Cycle Scaling Factor	Conducted Power (dBm)	Tune up Limit (dBm)	Scaling Factor	Reported 1g SAR (W/kg)
U-NII-1 Body 0mm											
Front side	802.11ac80M	58/5290	0.079	0.034	0.06	99.10%	1.009	9.15	9.40	1.059	0.084
Back side	802.11ac80M	58/5290	0.296	0.091	0.07	99.10%	1.009	9.15	9.40	1.059	0.314
Left side	802.11ac80M	58/5290	0.115	0.026	0.03	99.10%	1.009	9.15	9.40	1.059	0.122
Right side	802.11ac80M	58/5290	0.044	0.010	0.05	99.10%	1.009	9.15	9.40	1.059	0.047
Top side	802.11ac80M	58/5290	0.073	0.018	-0.04	99.10%	1.009	9.15	9.40	1.059	0.077
Bottom side	802.11ac80M	58/5290	1.110	0.263	0.00	99.10%	1.009	9.15	9.40	1.059	<b>1.176</b>
Bottom side -repeat	802.11ac80M	58/5290	1.050	0.246	0.01	99.10%	1.009	9.15	9.40	1.059	1.112
U-NII-2C Body 0mm											
Front side	802.11ac80M	122/5610	0.080	0.035	0.06	99.10%	1.009	7.97	8.50	1.130	0.090
Back side	802.11ac80M	122/5610	0.404	0.126	0.03	99.10%	1.009	7.97	8.50	1.130	0.456
Left side	802.11ac80M	122/5610	0.114	0.039	0.08	99.10%	1.009	7.97	8.50	1.130	0.129
Right side	802.11ac80M	122/5610	0.066	0.018	0.10	99.10%	1.009	7.97	8.50	1.130	0.075
Top side	802.11ac80M	122/5610	0.070	0.027	-0.06	99.10%	1.009	7.97	8.50	1.130	0.079
Bottom side	802.11ac80M	122/5610	0.864	0.204	0.01	99.10%	1.009	7.97	8.50	1.130	<b>0.976</b>
Bottom side	802.11ac80M	138/5690	0.701	0.221	0.06	99.10%	1.009	7.71	8.50	1.199	0.841
Bottom side	802.11ac80M	106/5530	0.612	0.195	-0.02	99.10%	1.009	7.33	8.50	1.309	0.801
U-NII-3 Body 0mm											
Front side	802.11ac80M	155/5775	0.111	0.027	-0.03	99.10%	1.009	10.63	11.00	1.089	0.121
Back side	802.11ac80M	155/5775	0.668	0.221	-0.10	99.10%	1.009	10.63	11.00	1.089	0.727
Left side	802.11ac80M	155/5775	0.093	0.040	0.01	99.10%	1.009	10.63	11.00	1.089	0.101
Right side	802.11ac80M	155/5775	0.061	0.013	0.05	99.10%	1.009	10.63	11.00	1.089	0.066
Top side	802.11ac80M	155/5775	0.074	0.019	0.07	99.10%	1.009	10.63	11.00	1.089	0.081
Bottom side	802.11ac80M	155/5775	1.030	0.238	-0.09	99.10%	1.009	10.63	11.00	1.089	<b>1.122</b>

Table 4: SAR of WIFI 5G.

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated SAR (1g)	Ratio	2 <sup>nd</sup> Repeated SAR (1g)	3 <sup>rd</sup> Repeated SAR (1g)
Bottom side (Ant 1)	58/5290	1.040	1.020	1.020	N/A	N/A
Bottom side (MIMO)	58/5290	1.110	1.050	1.057	N/A	N/A
Note: 1) When the original highest measured SAR is $\geq 0.80$ W/kg, the measurement was repeated once.						
2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was $> 1.20$ or when the original or repeated measurement was $\geq 1.45$ W/kg ( $\sim 10\%$ from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was $\geq 1.5$ W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is $> 1.20$ .						
4) Repeated measurements are not required when the original highest measured SAR is $< 0.80$ W/kg						

## 17 Simultaneous Transmission Analysis

The Simultaneous Transmission Possibilities of this device are as below:

NO.	Simultaneous TX Combination	
1	WIFI 2.4G + WIFI 5G	No
2	WIFI 2.4G + BT	Yes
3	WIFI 5G + BT	Yes
4	WIFI 2.4G + WIFI 5G + BT	No

### 17.1 Simultaneous Transmission SAR Summary

Test position	SAR <sub>max</sub> (W/kg)							Summed SAR					
	WIFI 2.4G Ant1	WIFI 2.4G Ant2	WIFI 2.4G MIMO	WIFI 5G Ant1	WIFI 5G Ant2	WIFI 5G MIMO	BT						
	1	2	3	4	5	6	7	1+7	2+7	3+7	4+7	5+7	6+7
Front side	0.127	0.006	0.107	0.106	0.088	0.121	0.149	0.276	0.155	0.256	0.255	0.237	0.270
Back side	0.102	0.641	0.661	0.061	0.731	0.727	0.149	0.251	0.790	0.810	0.210	0.880	0.876
Left side	0.123	0.123	0.138	0.151	0.110	0.129	0.149	0.272	0.272	0.287	0.300	0.259	0.278
Right side	0.004	0.030	0.004	0.083	0.088	0.075	0.149	0.153	0.179	0.153	0.232	0.237	0.224
Top side	0.119	0.002	0.112	0.074	0.148	0.081	0.149	0.268	0.151	0.261	0.223	0.297	0.230
Bottom side	1.152	0.002	1.111	1.114	0.105	1.176	0.149	1.301	0.151	1.260	1.263	0.254	1.325

## 18 Measurement Uncertainty

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEC/IEEE 62209-1528 is not required in SAR reports submitted for equipment approval.

## 19 Calibration Certificate

Please see the Appendix C

## 20 Test Setup Photos

Please see the Appendix D

## Appendix A: System Check Plots

## Appendix B: SAR Test Plots

## Appendix C: Calibration certificate

## Appendix D: Test Setup Photos

--- The End ---