

Land America Health & Fitness Co., Ltd

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISED RSS-247 RF report

MODEL:

700-0554, 700-0555

REPORT NUMBER:

2410B0258SHA-002

ISSUE DATE:

April 8, 2025

DOCUMENT CONTROL NUMBER:

TTRF15.247-01_V1 © 2018 Intertek



Applicant: Land America Health & Fitness Co., Ltd
No. 25 North 2nd Road, Xinglin, Jimei, Xiamen, 361022, China

Manufacturer: Land America Health & Fitness Co., Ltd
No. 25 North 2nd Road, Xinglin, Jimei, Xiamen, 361022, China

Manufacturer Site: Land America Health & Fitness Co., Ltd
No. 25 North 2nd Road, Xinglin, Jimei, Xiamen, 361022, China

Product Name: Embedded Console

Type/Model: 700-0554, 700-0555

FCC ID: 2BNWO-7000554

IC: 33606-7000554


SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2023): Radio Frequency Devices (Subpart C)
ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-247 Issue 3 (August 2023): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS-Gen Issue 5 (February 2021) Amendment 2: General Requirements for Compliance of Radio Apparatus

PREPARED BY:

Project Engineer
Scout Gong

REVIEWED BY:

Reviewer
Eric Li

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Content**

REVISION HISTORY	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION.....	7
1.3 FREQUENCY HOPPING SYSTEM REQUIREMENT.....	8
1.4 DESCRIPTION OF TEST FACILITY.....	10
2 TEST SPECIFICATIONS	11
2.1 STANDARDS OR SPECIFICATION	11
2.2 MODE OF OPERATION DURING THE TEST	11
2.3 TEST SOFTWARE LIST.....	12
2.4 TEST PERIPHERALS LIST.....	12
2.5 TEST ENVIRONMENT CONDITION:.....	12
2.6 INSTRUMENT LIST	13
2.7 MEASUREMENT UNCERTAINTY	14
3 20DB BANDWIDTH	15
3.1 LIMIT	15
3.2 MEASUREMENT PROCEDURE	15
3.3 TEST CONFIGURATION	16
3.4 TEST RESULTS OF 20DB BANDWIDTH	16
4 CARRIER FREQUENCY SEPARATION	17
4.1 LIMIT	17
4.2 TEST CONFIGURATION	17
4.3 TEST PROCEDURE AND TEST SETUP	17
4.4 TEST RESULTS OF CARRIER FREQUENCY SEPARATION	17
5 OUTPUT POWER	18
5.1 LIMIT	18
5.2 TEST CONFIGURATION	18
5.3 MEASUREMENT PROCEDURE	18
5.4 TEST RESULTS OF OUTPUT POWER	18
6 RADIATED EMISSIONS	19
6.1 LIMIT	19
6.2 MEASUREMENT PROCEDURE	19
6.3 TEST CONFIGURATION	21
6.4 TEST RESULTS OF RADIATED EMISSIONS	23
7 CONDUCTED SPURIOUS EMISSIONS & BAND EDGE	28
7.1 LIMIT	28
7.2 TEST CONFIGURATION	28
7.3 MEASUREMENT PROCEDURE	28
7.4 TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS & BAND EDGE	29
8 POWER LINE CONDUCTED EMISSION	30
8.1 LIMIT	30
8.2 TEST CONFIGURATION	30

TEST REPORT

8.3	MEASUREMENT PROCEDURE	31
8.4	TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	32
9	NUMBER OF HOPPING FREQUENCIES	34
9.1	LIMIT	34
9.2	TEST CONFIGURATION	34
9.3	TEST PROCEDURE AND TEST SETUP	34
9.4	TEST RESULTS OF NUMBER OF HOPPING FREQUENCIES	34
10	DWELL TIME	35
10.1	LIMIT	35
10.2	TEST CONFIGURATION	35
10.3	TEST PROCEDURE AND TEST SETUP	35
10.4	TEST RESULTS OF DWELL TIME	36
11	OCCUPIED BANDWIDTH	37
11.1	LIMIT	37
11.2	MEASUREMENT PROCEDURE	37
11.3	TEST CONFIGURATION	37
11.4	THE RESULTS OF OCCUPIED BANDWIDTH.....	37
12	ANTENNA REQUIREMENT.....	38
APPENDIX A: TEST RESULTS		39
20dB EMISSION BANDWIDTH		39
<i>Test Result</i>		39
<i>Test Graphs</i>		40
OCCUPIED CHANNEL BANDWIDTH.....		43
<i>Test Result</i>		43
<i>Test Graphs</i>		44
MAXIMUM CONDUCTED OUTPUT POWER		47
<i>Test Result</i>		47
<i>Test Graphs</i>		48
CARRIER FREQUENCY SEPARATION.....		51
<i>Test Result</i>		51
<i>Test Graphs</i>		52
TIME OF OCCUPANCY		53
<i>Test Result</i>		53
<i>Test Graphs</i>		54
NUMBER OF HOPPING CHANNELS.....		60
<i>Test Result</i>		60
<i>Test Graphs</i>		61
BAND EDGE MEASUREMENTS		62
<i>Test Result</i>		62
<i>Test Graphs</i>		63
CONDUCTED SPURIOUS EMISSION.....		67
<i>Test Result</i>		67
<i>Test Graphs</i>		68
DUTY CYCLE.....		77
<i>Test Result</i>		77
<i>Test Graphs</i>		78

TEST REPORT**Revision History**

Report No.	Version	Description	Issued Date
2410B0258SHA-002	Rev. 01	Initial issue of report	April 8, 2025

TEST REPORT

Measurement Result Summary

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
20 dB Bandwidth	15.247(a)(1)	RSS-247 Issue 3 Clause 5.1	Pass
Carrier Frequency Separation	15.247(a)(1)	RSS-247 Issue 3 Clause 5.1	Pass
Output power	15.247(b)(1)	RSS-247 Issue 3 Clause 5.4	Pass
Radiated Emissions	15.205 & 15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Conducted Spurious Emissions & Band Edge	15.247(d)	RSS-247 Issue 3 Clause 5.5	Pass
Power line conducted emission	15.207	RSS-Gen Issue 5 Clause 8.8	Pass
Number of Hopping Frequencies	15.247(a)(1)(iii)	RSS-247 Issue 3 Clause 5.1	Pass
Dwell time	15.247(a)(1)(iii)	RSS-247 Issue 3 Clause 5.1	Pass
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.6	Tested
Antenna requirement	15.203	-	Pass

Notes:

1. NA =Not Applicable
2. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.
3. Additions, Deviations and Exclusions from Standards: None.

TEST REPORT**1 GENERAL INFORMATION****1.1 Description of Equipment Under Test (EUT)**

Product name:	Embedded console
Type/Model:	700-0554, 700-0555
Description of EUT:	<p>The EUT is an embedded console which supports Wi-Fi/BT/BLE function. There are two models, the key components and electrical schematics of the product are the same, the only difference is the size of the display screen.</p> <p>There is also a BT+NFC module designed which is certificated. The information of the BT+NFC module is:</p> <p>FCC ID: XRH-NPE105 IC: 11922A-NPE105</p>
Rating:	12V DC, 5A
Category of EUT:	Class B
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Product Marketing Name:	700-0554, 700-0555
HVIN:	700-0554, 700-0555
Software Version:	-
Hardware Version:	-
Serial numbers:	A241024-36-001
Sample received date:	October 24, 2024
Date of test:	January 12, 2025, to March 20, 2025

1.2 Technical Specification

Frequency Range:	2400MHz ~ 2483.5MHz
Support Standards:	Bluetooth 5.2 (BR+EDR)
Modulation Technique:	Frequency Hopping Spread Spectrum (FHSS)
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Channel Number:	79 (0 - 78)
Data Rate:	1Mbps
Channel Separation:	1 MHz
Antenna:	FPCB Antenna, 1.57 dBi Gain

TEST REPORT

1.3 Frequency Hopping System Requirement

Test Requirement: Section 15.247 (a)(1), (g), (h) requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs;

i.e. the shift register is initialized with nine ones.


- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

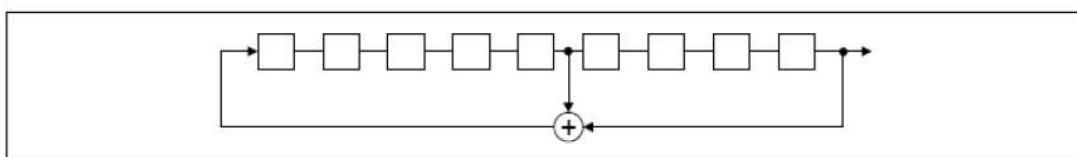

Linear Feedback Shift Register for Generation of the PRBS sequence

TEST REPORT

An example of Pseudorandom Frequency Hopping Sequence as follow:

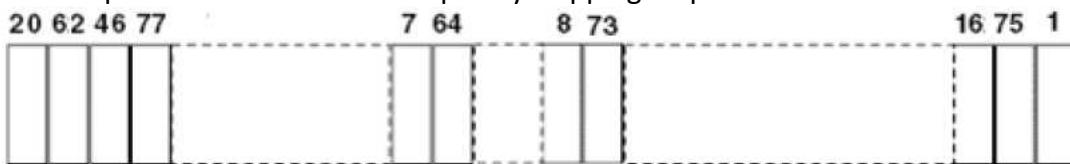

Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinate with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

TEST REPORT**1.4 Description of Test Facility**

Name:	Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address:	Building 86, No. 1198 Qinzhou Road (North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L21189
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier: CN0014
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

TEST REPORT

2 TEST SPECIFICATIONS

2.1 Standards or Specification

47CFR Part 15 (2023)

ANSI C63.10 (2020)

RSS-247 Issue 3 (August 2023)

RSS-Gen Issue 5 (February 2021) Amendment 2

KDB 558074 (v05r02)

2.2 Mode of Operation During the Test

While testing the transmitter mode of the EUT, the internal modulation is applied.

All the functions of the host device except the BT module were set on stand-by mode.

The test setting software is offered by the manufactory. The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases.

The worst-case modulation configuration:

Worst Modulation Used for Conformance Testing				
Bluetooth Mode	Data Rate	Packet Type	Worst Mode	
GFSK	BR-1Mbps	DH1, DH3, DH5	BR-1Mbps DH5	EDR-2Mbps 2DH5 EDR-3Mbps 3DH5
$\pi/4$ DQPSK	EDR-2Mbps	2DH1, 2DH3, 2DH5		
8DPSK	EDR-3Mbps	3DH1, 3DH3, 3DH5		

Note: The BR-1Mbps DH5 mode was chosen for radiation emission bellow 1GHz and Conducted emission testing as representative in this report.

The power setting parameter:

The worst-case power setting parameter				
Test software Version	MT7663 test commands			
Modulation Mode	2402MHz	2441MHz	2480MHz	
BR-1Mbps	default	default	default	
EDR-2Mbps	default	default	default	
EDR-3Mbps	default	default	default	

Radiated test mode: EUT transmitted signal with BT antenna.

Conducted test mode: EUT transmitted signal from BT RF port connected to SPA directly.

TEST REPORT**2.3 Test Software List**

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test Peripherals List

Item No.	Name	Band and Model	Description
1	Laptop	HP ProBook 6470b	100-240V AC, 50/60Hz
2	RF cable	/	0.2m length; 0.5dB loss

2.5 Test Environment Condition:

Test items	Temperature	Humidity
20 dB Bandwidth		
Output power		
Carrier Frequency Separation		
Number of Hopping Frequencies	23°C	52% RH
Dwell time		
Occupied bandwidth		
Conducted Spurious Emissions & Band Edge		
Power line conducted emission	22°C	52% RH
Radiated Emissions	22°C	55% RH

TEST REPORT
2.6 Instrument List

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2026-02-17
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2025-07-23
<input checked="" type="checkbox"/>	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2025-12-06
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2026-01-09
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2025-08-18
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR	EC6501	2025-09-10
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2025-09-11
<input checked="" type="checkbox"/>	TRILOG broadband Antenna	Schwarzbeck	VULB9168	EC 6402	2026-03-18
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC 5262	2025-11-06
<input checked="" type="checkbox"/>	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2025-12-03
<input checked="" type="checkbox"/>	Horn antenna	Tonscend	bha9120d	EC 6432-2	2026-03-19
<input checked="" type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2025-09-13
<input type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2026-09-12
<input type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2025-08-10
<input type="checkbox"/>	Horn antenna	ETS	3116c	EC 5955	2025-08-14
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2026-07-11
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2026-03-11
<input checked="" type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2026-03-11
<input checked="" type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	EC5944	2027-03-11
<input checked="" type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2026-03-11
<input type="checkbox"/>	Mobile Test System	Litepoint	lqxl	EC 5176	2026-01-10
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2026-03-08
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	EC 6078	2026-03-17
<input checked="" type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	EC 6209	2027-01-14
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5182A	EC 6172	2025-08-06
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5181A	EC 6171	2025-08-06
<input checked="" type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2025-03-06

TEST REPORT

Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6640	2025-08-29
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6643	2025-08-29
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6644	2025-08-29
<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2025-08-16

2.7 Measurement Uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	
Minimum 6dB bandwidth	
Power spectrum density	± 0.74dB
Emission outside the frequency band	
Occupied bandwidth	
Radiated Emissions in restricted frequency bands below 1GHz	± 4.90dB
Radiated Emissions in restricted frequency bands above 1GHz	± 5.02dB
Emission outside the frequency band	± 2.89dB
Power line conducted emission	± 3.19dB

TEST REPORT

3 20dB Bandwidth

Test Result: Pass

3.1 Limit

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

3.2 Measurement Procedure


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down

TEST REPORT

“amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “–xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.3 Test Configuration

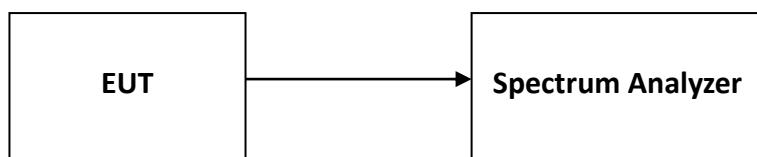

3.4 Test Results of 20dB Bandwidth

Please refer to Appendix A.

TEST REPORT

4 Carrier Frequency Separation


Test Result: Pass

4.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

4.2 Test Configuration

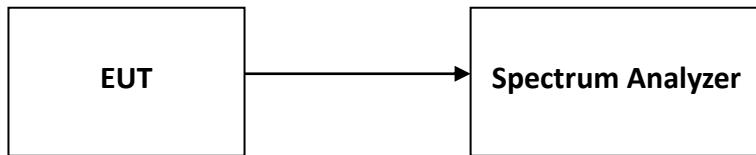

4.3 Test Procedure and Test Setup

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

4.4 Test Results of Carrier Frequency Separation

Please refer to Appendix A.

TEST REPORT

5 Output Power


Test Result: Pass

5.1 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.2 Test Configuration

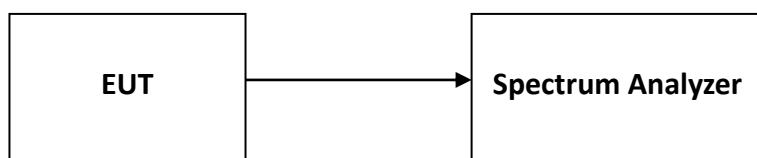

5.3 Measurement Procedure

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

5.4 Test Results of Output Power

Please refer to Appendix A.

TEST REPORT

6 Radiated Emissions

Test Result: Pass

6.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

6.2 Measurement Procedure

For Radiated emission below 30MHz:

- a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:



1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.


TEST REPORT**For Radiated emission above 30MHz:**

- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:



1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times RBW$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported

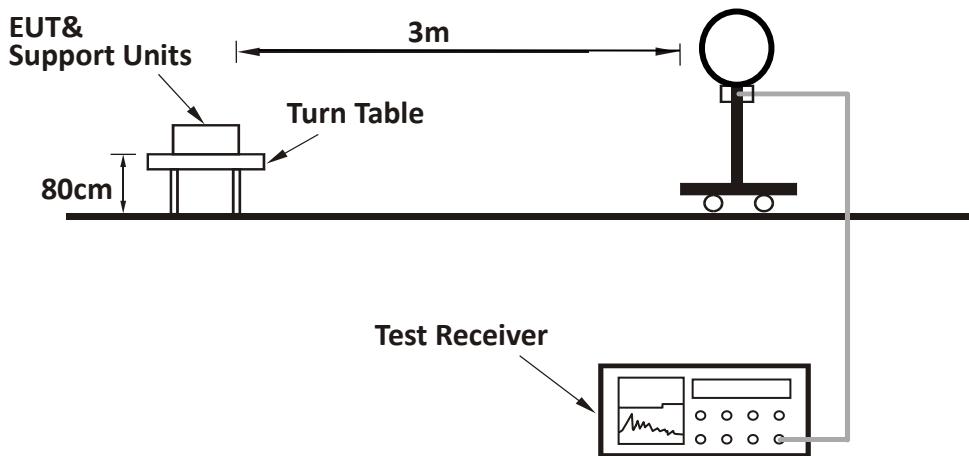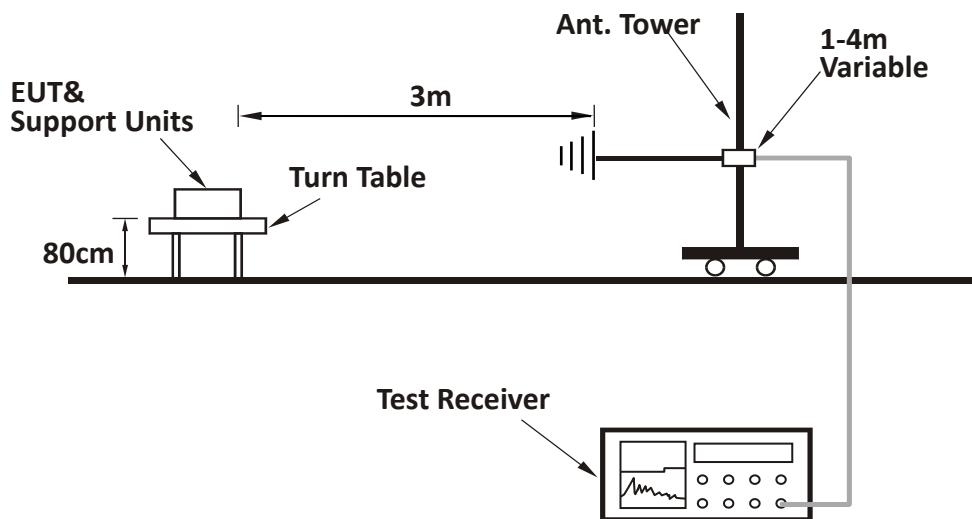TEST REPORT**6.3 Test Configuration****For Radiated emission below 30MHz:****For Radiated emission 30MHz to 1GHz:**

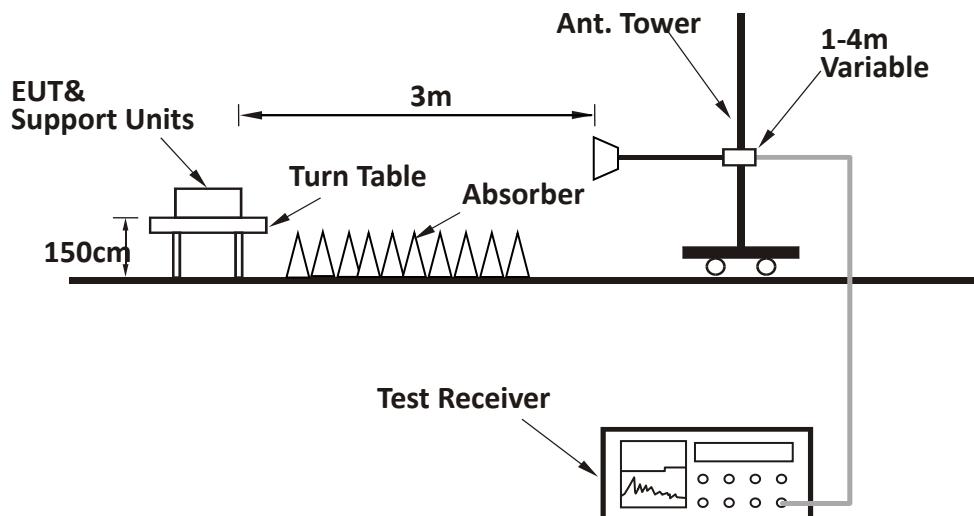TEST REPORT**For Radiated emission above 1GHz:**

TEST REPORT**6.4 Test Results of Radiated Emissions**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported. The worst data was listed in the report and the worst waveform from 30MHz to 1000MHz is listed as below:

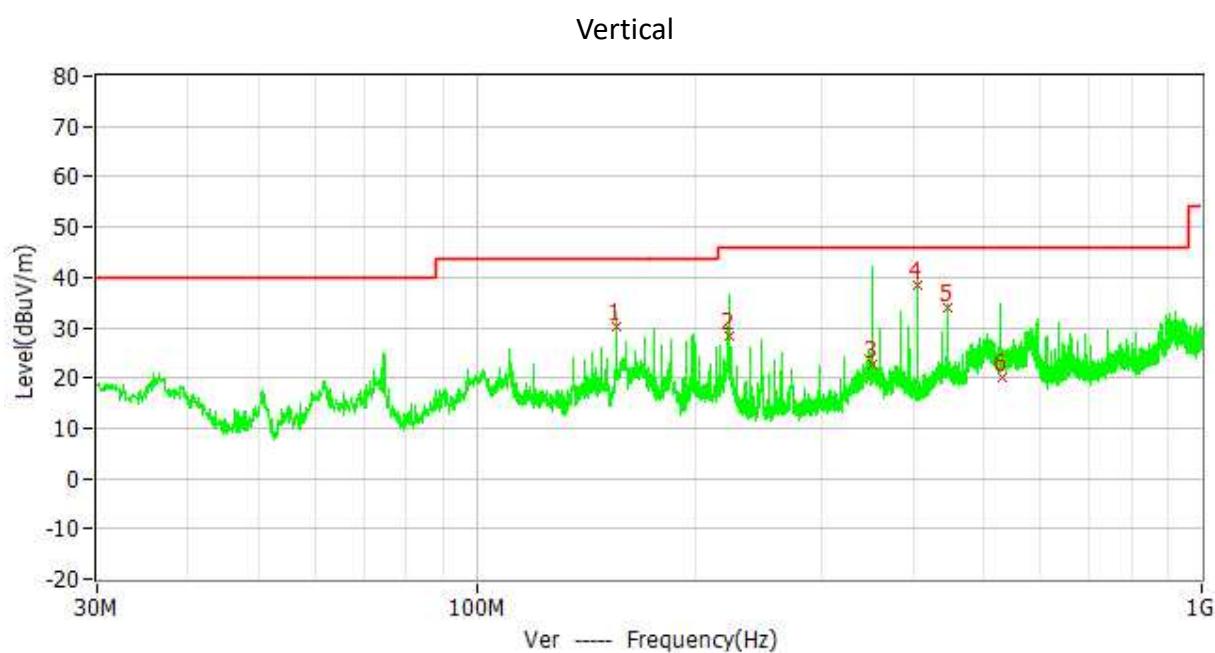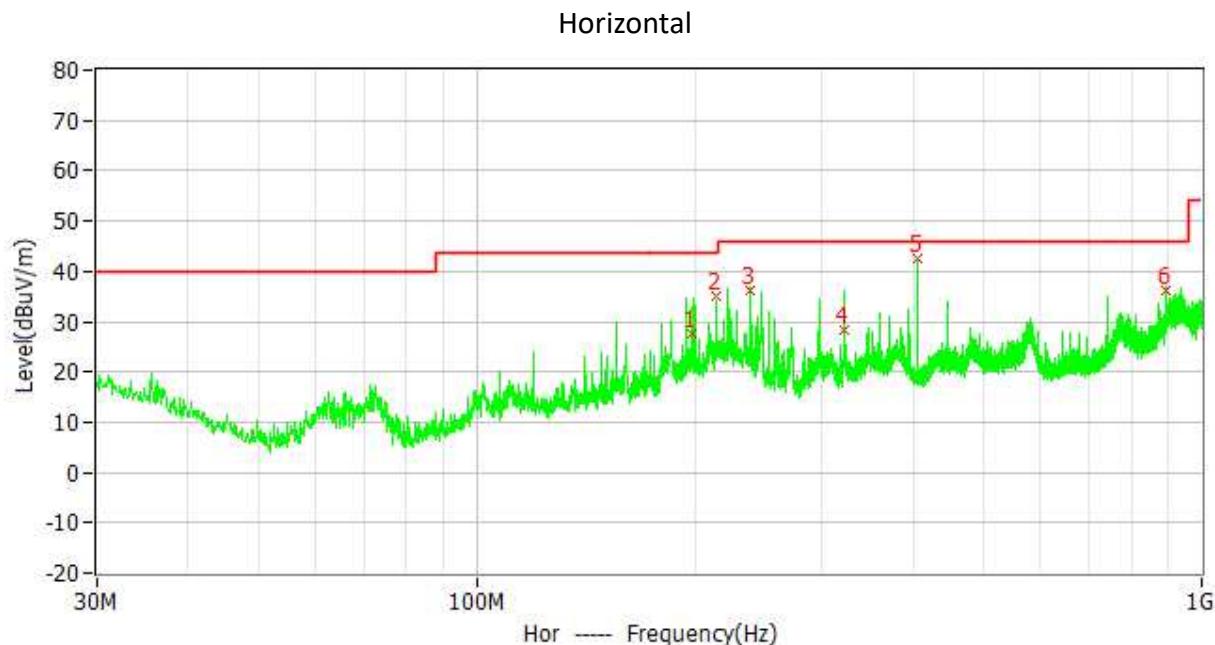

TEST REPORT**Test data 30MHz~1GHz:**

Polarization	Frequency (MHz)	Measured level (dB μ V/m)	Correct Factor (dB/m)	Limits (dB μ V/m)	Margin (dB)	Detector
H	198.006	27.60	10.80	43.50	15.90	QP
	214.521	35.00	10.90	43.50	8.50	QP
	238.856	36.00	13.00	46.00	10.00	QP
	321.747	28.20	15.80	46.00	17.80	QP
	405.010	42.60	18.20	46.00	3.40	QP
	890.967	36.20	24.00	46.00	9.80	QP
V	156.023	30.20	11.70	43.50	13.30	QP
	222.805	28.40	11.30	46.00	17.60	QP
	350.988	22.60	16.60	46.00	23.40	QP
	404.994	38.50	18.10	46.00	7.50	QP
	445.496	33.90	18.90	46.00	12.10	QP
	531.433	20.10	20.40	46.00	25.90	QP

TEST REPORT
Test result of 1GHz to 25GHz:
GFSK (DH5) Modulation:

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	31.7	104.9	Fundamental	/	PK
	V	2402.00	31.7	96.7	Fundamental	/	PK
	H	2390.00	31.7	40.6	74.00	33.4	PK
	V	2390.00	31.7	41.4	74.00	32.6	PK
	H	4804.00	-13.9	32.0	74.00	42.0	PK
	H	7206.00	-8.9	38.7	74.00	35.3	PK
	V	4804.00	-13.9	36.9	74.00	37.1	PK
	V	7206.00	-8.9	39.8	74.00	34.2	PK
M	H	4882.00	-13.6	34.7	74.00	39.3	PK
	H	7323.00	-8.8	35.1	74.00	38.9	PK
	V	4882.00	-13.6	34.2	74.00	39.8	PK
	V	7323.00	-8.8	39.8	74.00	34.2	PK
H	H	2480.00	31.9	108.7	Fundamental	/	PK
	V	2480.00	31.9	94.8	Fundamental	/	PK
	H	2483.50	31.9	55.4	74.00	18.6	PK
	V	2483.50	31.9	49.0	74.00	25.0	PK
	H	4960.00	-13.4	33.1	74.00	40.9	PK
	H	7440.00	-8.8	39.7	74.00	34.3	PK
	V	4960.00	-13.4	33.1	74.00	40.9	PK
	V	7440.00	-8.8	35.2	74.00	38.8	PK

TEST REPORT
 $\pi/4$ DQPSK (2DH5) Modulation:

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	31.7	104.1	Fundamental	/	PK
	V	2402.00	31.7	97.9	Fundamental	/	PK
	H	2390.00	31.7	40.6	74.00	33.4	PK
	V	2390.00	31.7	41.4	74.00	32.6	PK
	H	4804.00	-13.9	31.9	74.00	42.1	PK
	H	7206.00	-8.9	42.0	74.00	32.0	PK
	V	4804.00	-13.9	32.1	74.00	41.9	PK
	V	7206.00	-8.9	39.3	74.00	34.7	PK
M	H	4882.00	-13.6	32.3	74.00	41.7	PK
	H	7323.00	-8.8	38.5	74.00	35.5	PK
	V	4882.00	-13.6	31.9	74.00	42.1	PK
	V	7323.00	-8.8	38.2	74.00	35.8	PK
H	H	2480.00	31.9	102.6	Fundamental	/	PK
	V	2480.00	31.9	95.4	Fundamental	/	PK
	H	2483.50	31.9	45.1	74.00	28.9	PK
	V	2483.50	31.9	43.2	74.00	30.8	PK
	H	4960.00	-13.4	35.9	74.00	38.1	PK
	H	7440.00	-8.8	37.1	74.00	36.9	PK
	V	4960.00	-13.4	33.9	74.00	40.1	PK
	V	7440.00	-8.8	36.0	74.00	38.0	PK

TEST REPORT
8DPSK (3DH5) Modulation:

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	31.7	104.1	Fundamental	/	PK
	V	2402.00	31.7	98.7	Fundamental	/	PK
	H	2390.00	31.7	48.7	74.00	25.3	PK
	V	2390.00	31.7	47.9	74.00	26.1	PK
	H	4804.00	-13.9	34.7	74.00	39.3	PK
	H	7206.00	-8.9	36.0	74.00	38.0	PK
	V	4804.00	-13.9	33.7	74.00	40.3	PK
	V	7206.00	-8.9	36.1	74.00	37.9	PK
M	H	4882.00	-13.6	35.9	74.00	38.1	PK
	H	7323.00	-8.8	38.7	74.00	35.3	PK
	V	4882.00	-13.6	34.4	74.00	39.6	PK
	V	7323.00	-8.8	38.7	74.00	35.3	PK
H	H	2480.00	31.9	102.4	Fundamental	/	PK
	V	2480.00	31.9	96.7	Fundamental	/	PK
	H	2483.50	31.9	48.4	74.00	25.6	PK
	V	2483.50	31.9	47.5	74.00	26.5	PK
	H	4960.00	-13.4	35.6	74.00	38.4	PK
	H	7440.00	-8.8	39.2	74.00	34.8	PK
	V	4960.00	-13.4	34.9	74.00	39.1	PK
	V	7440.00	-8.8	38.2	74.00	35.8	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB, Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, Limit = 40.00dBuV/m.
 Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20$ dB/m;
 Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;
 Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

TEST REPORT


7 Conducted Spurious Emissions & Band Edge

Test Result: Pass

7.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

7.2 Test Configuration

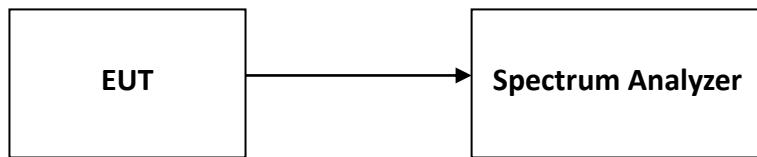

7.3 Measurement Procedure

- a) Connect the EMI receiver or spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described in step e)
- b) Set the EUT to the lowest frequency channel (for the hopping on test, the hopping sequence shall include the lowest frequency channel).
- c) Set the EUT to operate at maximum output power and 100% duty cycle, or equivalent “normal mode of operation” as specified in 6.10.3. of ANSI C63.10.
- d) If using the radiated method, then use the applicable procedure(s) of 6.4, 6.5, or 6.6 of ANSI C63.10, and orient the EUT and measurement antenna positions to produce the highest emission level.
- e) Perform the test as follows:
 - 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
 - 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
 - 3) Attenuation: Auto (at least 10 dB preferred).
 - 4) Sweep time: Coupled.
 - 5) Resolution bandwidth: 100 kHz

TEST REPORT

- 6) Video bandwidth: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

f) Allow the trace to stabilize. For the test with the hopping function turned ON, this can take several minutes to achieve a reasonable probability of intercepting any emissions due to oscillator overshoot.

g) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

h) Repeat step c) through step e) for every applicable modulation.

i) Set the EUT to the highest frequency channel (for the hopping on test, the hopping sequence shall include the highest frequency channel) and repeat step c) through step d).

j) The band-edge measurement shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


7.4 Test Results of Conducted Spurious Emissions & Band Edge

Please refer to Appendix A.

TEST REPORT**8 Power Line Conducted Emission****Test Result: Pass****8.1 Limit**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

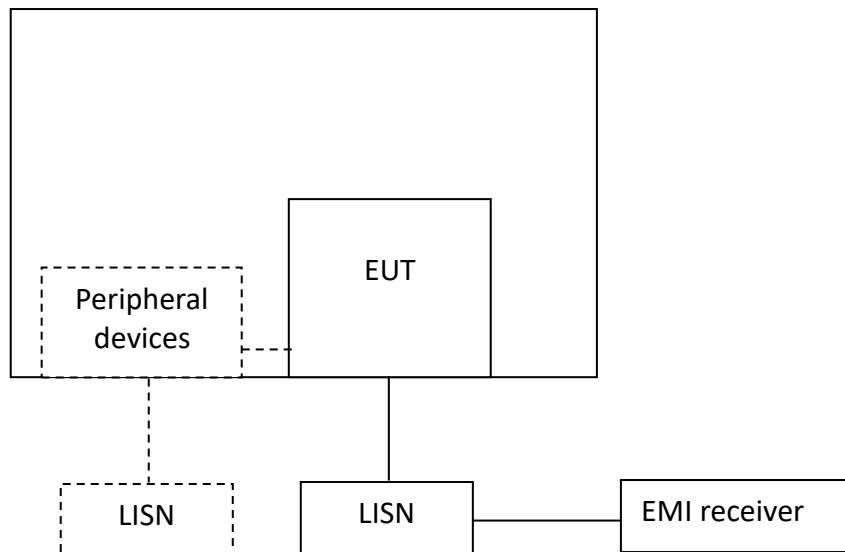
8.2 Test Configuration

TEST REPORT**8.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

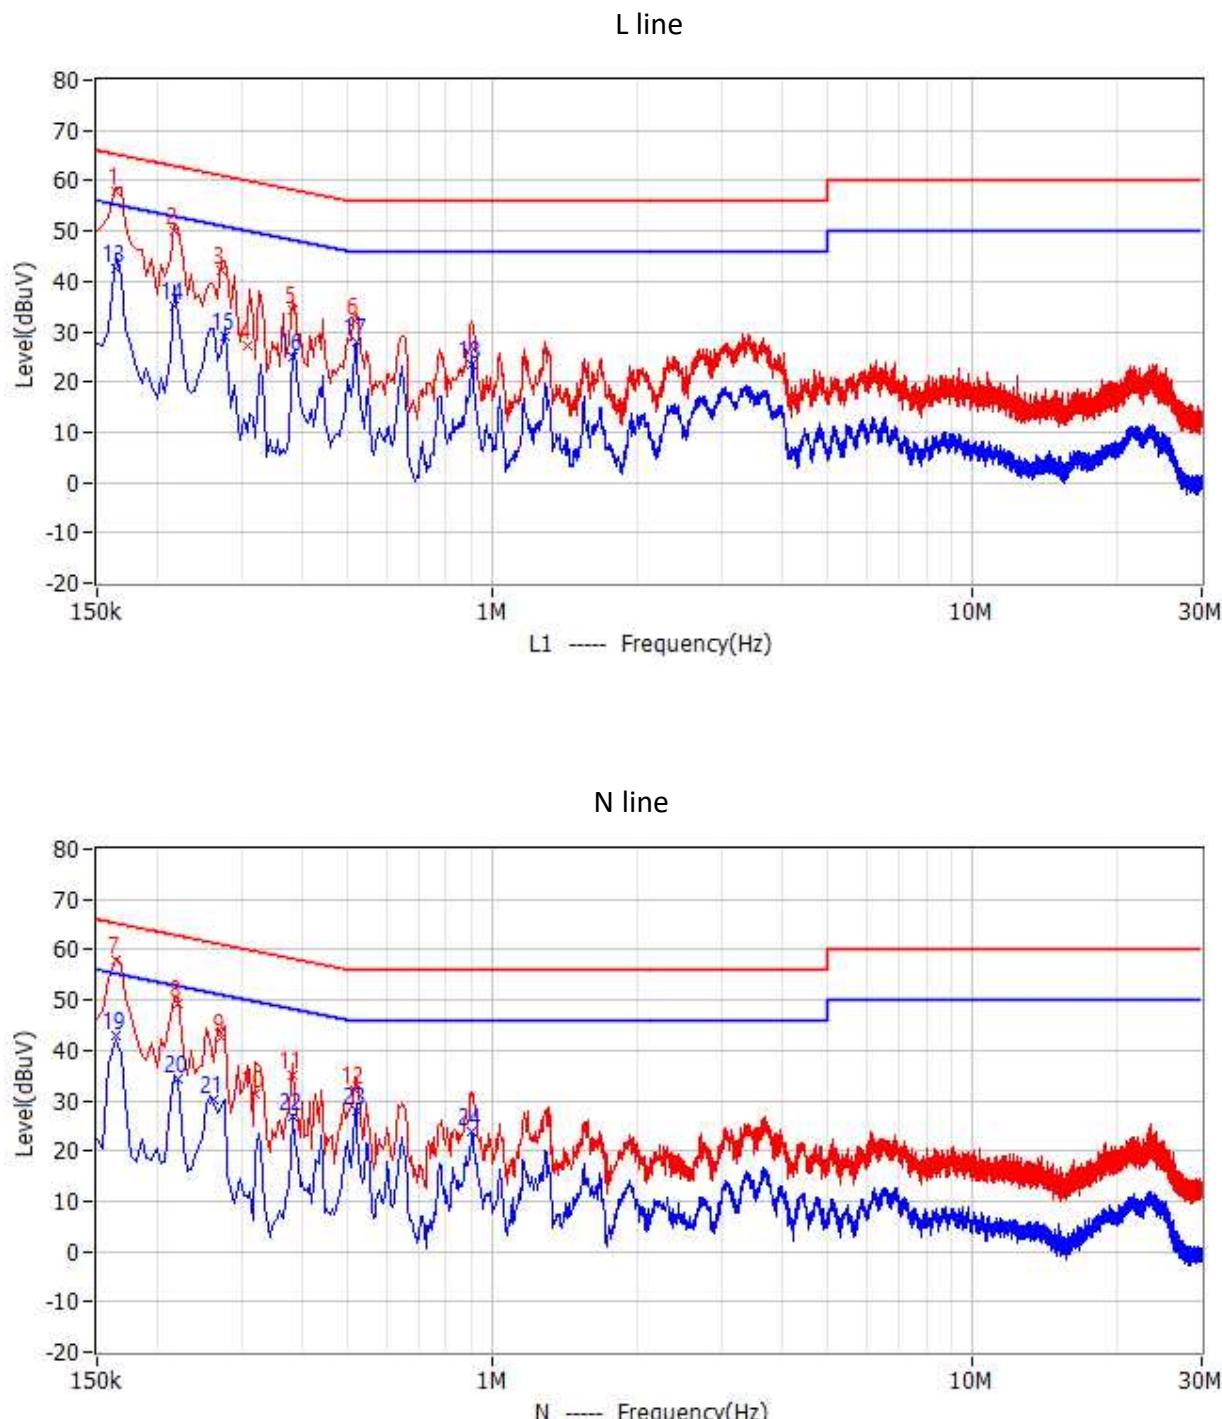TEST REPORT**8.4 Test Results of Power Line Conducted Emission**

TEST REPORT
Test Data:

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Reading dBuV	Factor dB	Detector	Phase
1	163.500kHz	65.28	57.81	7.47	51.61	6.20	QP	L1
2	217.500kHz	62.91	49.91	13.00	43.71	6.20	QP	L1
3	271.500kHz	61.07	42.32	18.75	36.12	6.20	QP	L1
4	307.500kHz	60.04	27.34	32.70	21.14	6.20	QP	L1
5	384.000kHz	58.19	34.16	24.03	27.96	6.20	QP	L1
6	514.500kHz	56.00	32.04	23.96	25.84	6.20	QP	L1
7	163.500kHz	65.28	57.92	7.36	51.82	6.10	QP	N
8	222.000kHz	62.74	49.23	13.51	43.13	6.10	QP	N
9	271.500kHz	61.07	42.43	18.64	36.33	6.10	QP	N
10	321.000kHz	59.68	31.31	28.37	25.21	6.10	QP	N
11	384.000kHz	58.19	34.96	23.23	28.86	6.10	QP	N
12	514.500kHz	56.00	32.11	23.89	25.91	6.20	QP	N
13	163.500kHz	55.28	42.45	12.83	36.25	6.20	CAV	L1
14	217.500kHz	52.91	34.98	17.93	28.78	6.20	CAV	L1
15	276.000kHz	50.94	28.89	22.05	22.69	6.20	CAV	L1
16	384.000kHz	48.19	25.09	23.10	18.89	6.20	CAV	L1
17	519.000kHz	46.00	27.96	18.04	21.76	6.20	CAV	L1
18	906.000kHz	46.00	23.51	22.49	17.31	6.20	CAV	L1
19	163.500kHz	55.28	42.81	12.47	36.71	6.10	CAV	N
20	222.000kHz	52.74	34.22	18.52	28.12	6.10	CAV	N
21	262.500kHz	51.35	30.20	21.15	24.10	6.10	CAV	N
22	384.000kHz	48.19	26.64	21.55	20.54	6.10	CAV	N
23	519.000kHz	46.00	28.04	17.96	21.84	6.20	CAV	N
24	906.000kHz	46.00	23.78	22.22	17.58	6.20	CAV	N

Remark:

1. Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
2. Level = Reading + Factor
3. Margin = Limit - Level
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

TEST REPORT


9 Number of Hopping Frequencies

Test Result: Pass

9.1 Limit

Number of Hopping Frequencies in the 2400-2483.5 MHz band shall use at least 15 channels.

9.2 Test Configuration

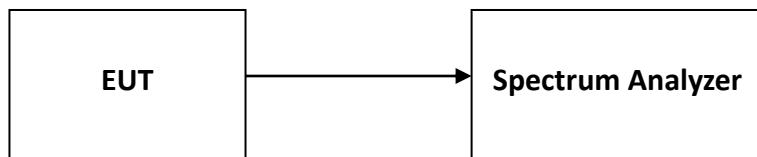

9.3 Test Procedure and Test Setup

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

9.4 Test Results of Number of Hopping Frequencies

Please refer to Appendix A.

TEST REPORT


10 Dwell Time

Test Result: Pass

10.1 Limit

The dwell time on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2 Test Configuration

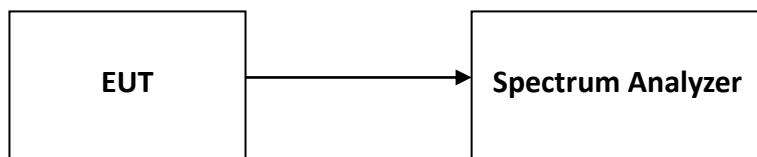

10.3 Test Procedure and Test Setup

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the

TEST REPORT

following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer) \times (period specified in the requirements / analyzer sweep time)

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

10.4 Test Results of Dwell Time

Please refer to Appendix A.

TEST REPORT

11 Occupied Bandwidth

Test Result: Pass

11.1 Limit

None

11.2 Measurement Procedure

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

11.3 Test Configuration



11.4 The Results of Occupied Bandwidth

Please refer to Appendix A.

TEST REPORT

12 Antenna Requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

TEST REPORT**Appendix A: Test results****20dB Emission Bandwidth****Test Result**

Test Mode	Antenna	Frequency [MHz]	20db EBW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
DH5	Ant1	2402	0.864	2401.550	2402.414	---	---
DH5	Ant1	2441	0.867	2440.544	2441.411	---	---
DH5	Ant1	2480	0.864	2479.550	2480.414	---	---
2DH5	Ant1	2402	1.332	2401.334	2402.666	---	---
2DH5	Ant1	2441	1.320	2440.343	2441.663	---	---
2DH5	Ant1	2480	1.332	2479.334	2480.666	---	---
3DH5	Ant1	2402	1.305	2401.349	2402.654	---	---
3DH5	Ant1	2441	1.314	2440.346	2441.660	---	---
3DH5	Ant1	2480	1.314	2479.346	2480.660	---	---

TEST REPORT

Test Graphs



TEST REPORT



2DH5-Ant1-2402




2DH5-Ant1-2441




2DH5-Ant1-2480

TEST REPORT

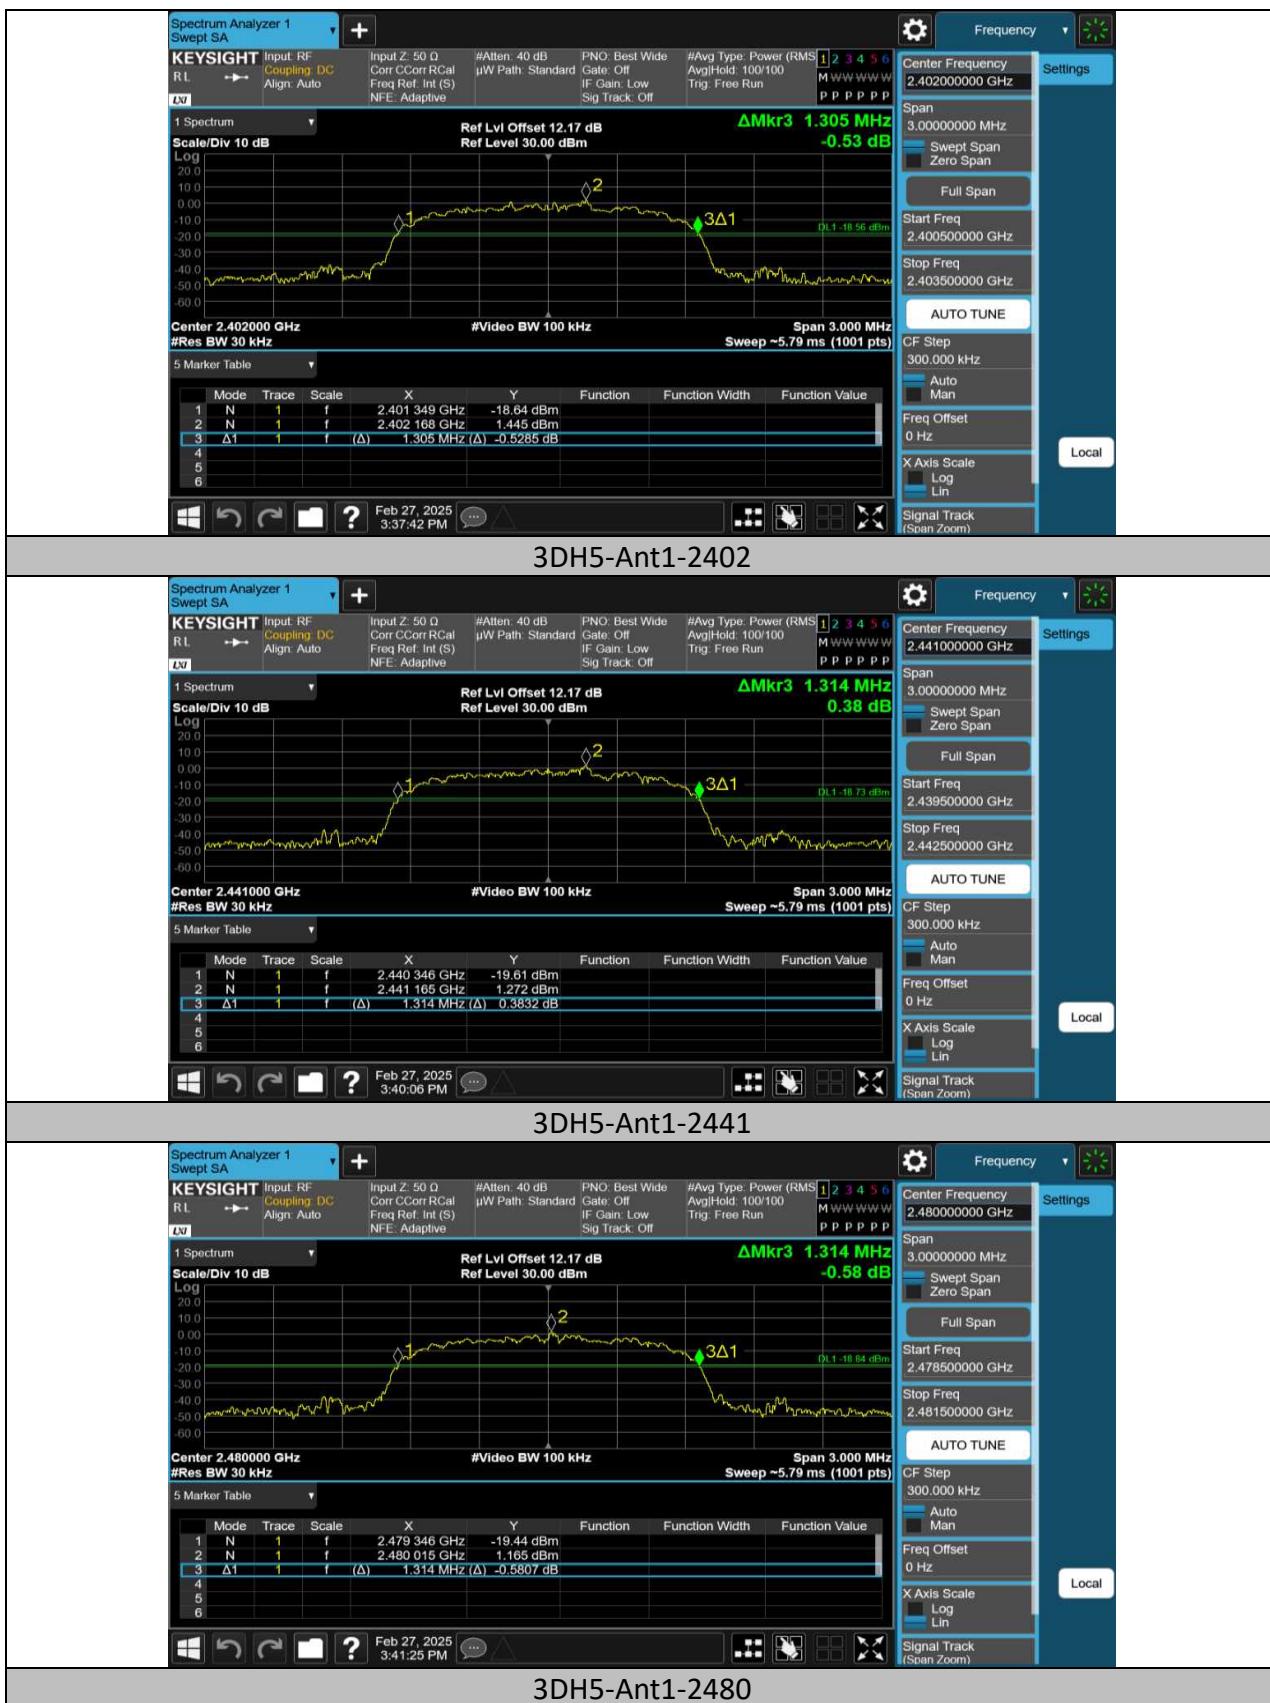


TEST REPORT**Occupied Channel Bandwidth****Test Result**

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
DH5	Ant1	2402	0.76357	2401.6234	2402.3870	---	---
DH5	Ant1	2441	0.77421	2440.6152	2441.3895	---	---
DH5	Ant1	2480	0.76683	2479.6208	2480.3877	---	---
2DH5	Ant1	2402	1.1815	2401.4103	2402.5918	---	---
2DH5	Ant1	2441	1.1866	2440.4091	2441.5957	---	---
2DH5	Ant1	2480	1.1818	2479.4106	2480.5924	---	---
3DH5	Ant1	2402	1.1929	2401.4038	2402.5967	---	---
3DH5	Ant1	2441	1.1920	2440.4055	2441.5975	---	---
3DH5	Ant1	2480	1.1850	2479.4095	2480.5945	---	---

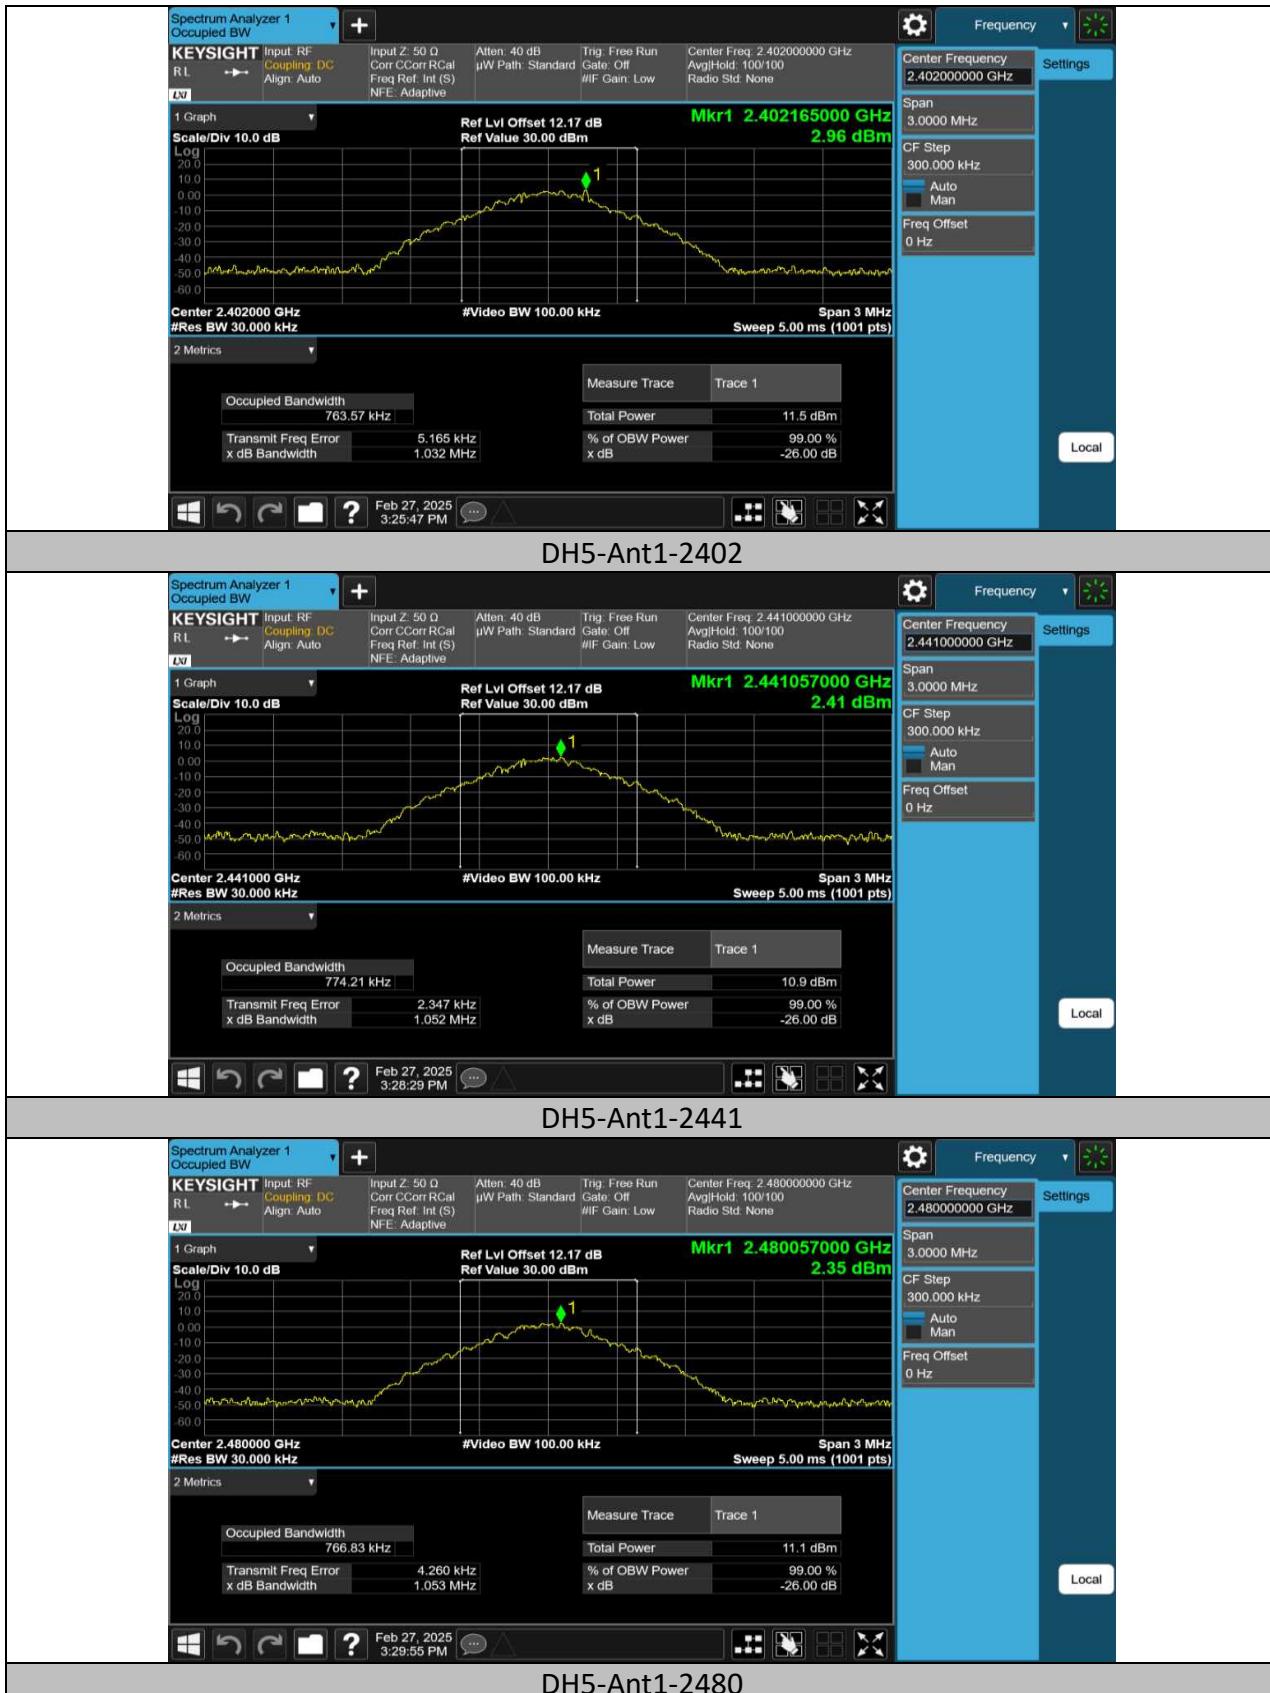TEST REPORT
Test Graphs


TEST REPORT

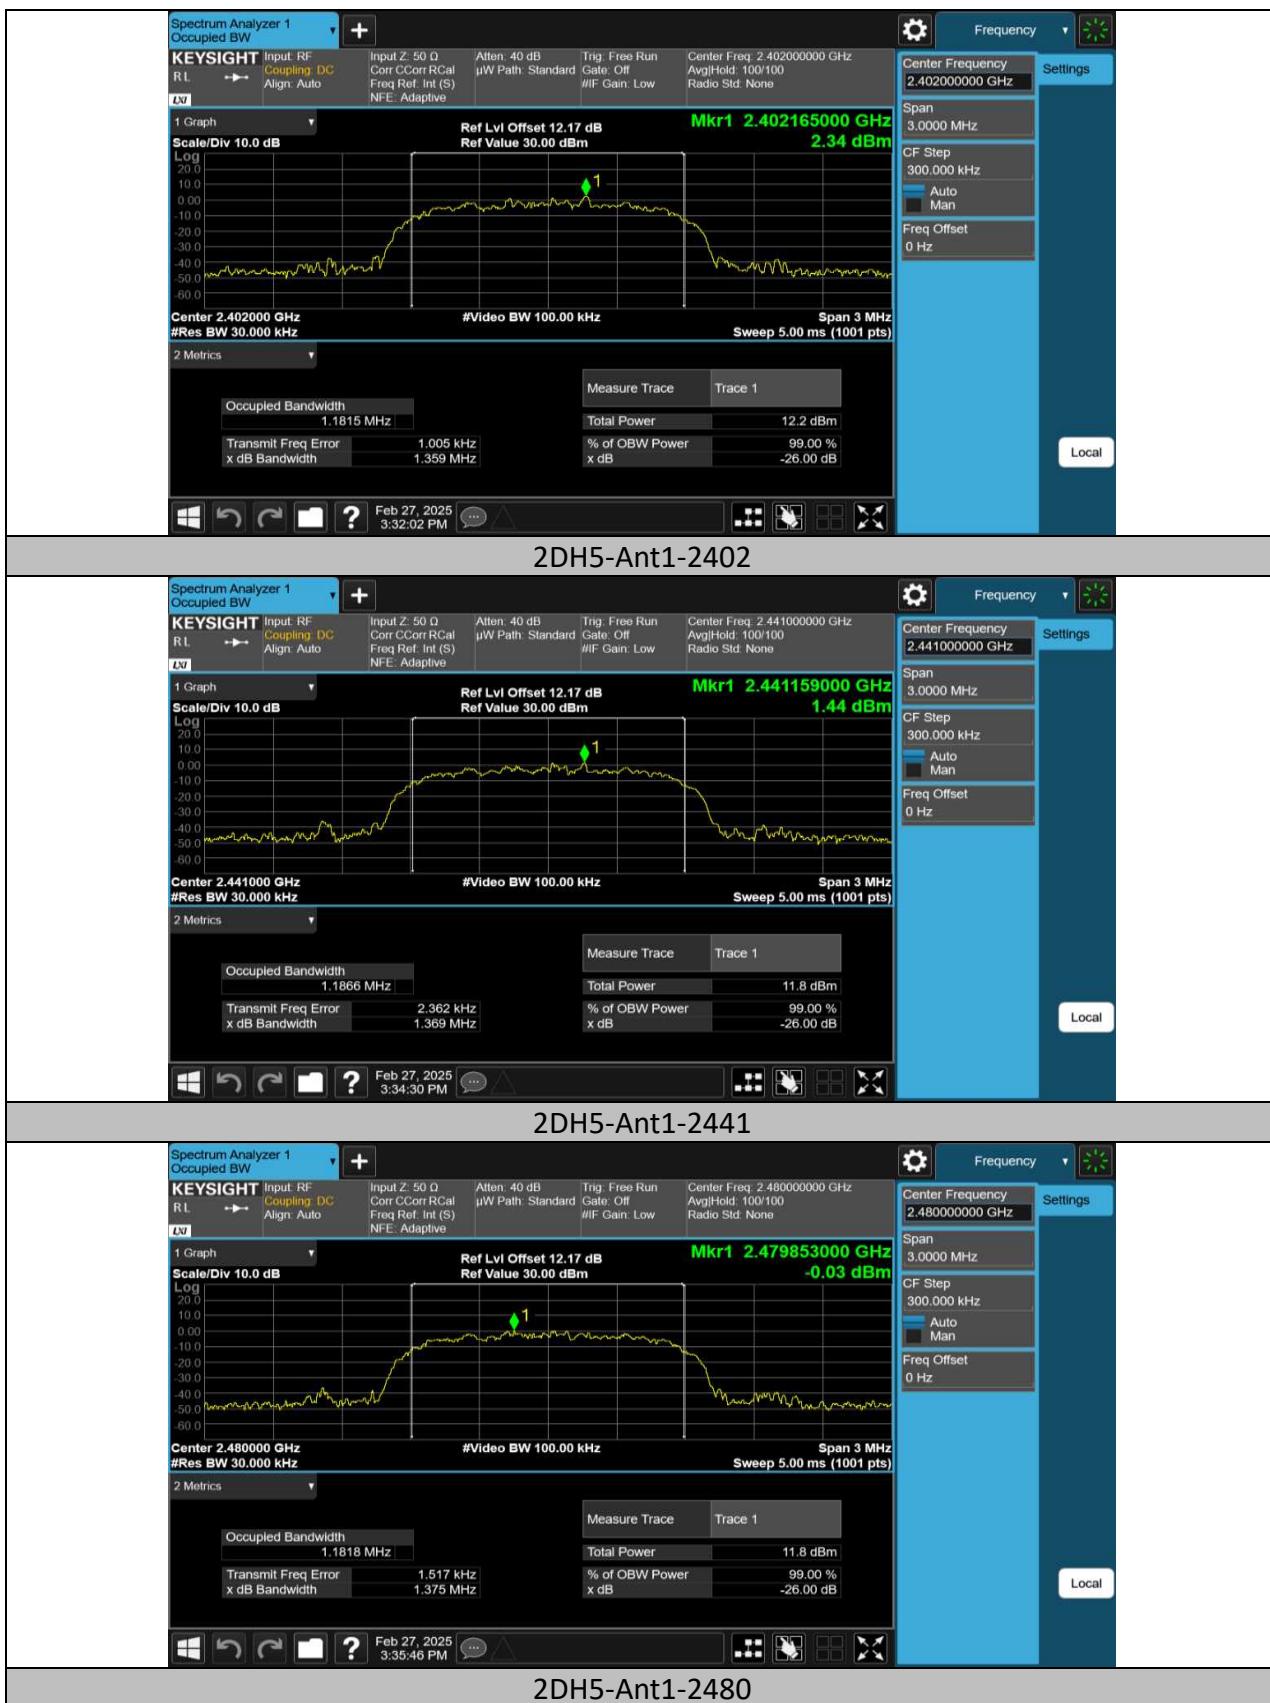

TEST REPORT




TEST REPORT**Maximum Conducted Output Power****Test Result**


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
DH5	Ant1	2402	5.86	≤30	PASS
DH5	Ant1	2441	5.71	≤30	PASS
DH5	Ant1	2480	5.62	≤30	PASS
2DH5	Ant1	2402	8.13	≤20.97	PASS
2DH5	Ant1	2441	7.98	≤20.97	PASS
2DH5	Ant1	2480	8.16	≤20.97	PASS
3DH5	Ant1	2402	8.76	≤20.97	PASS
3DH5	Ant1	2441	8.31	≤20.97	PASS
3DH5	Ant1	2480	8.41	≤20.97	PASS

TEST REPORT


Test Graphs

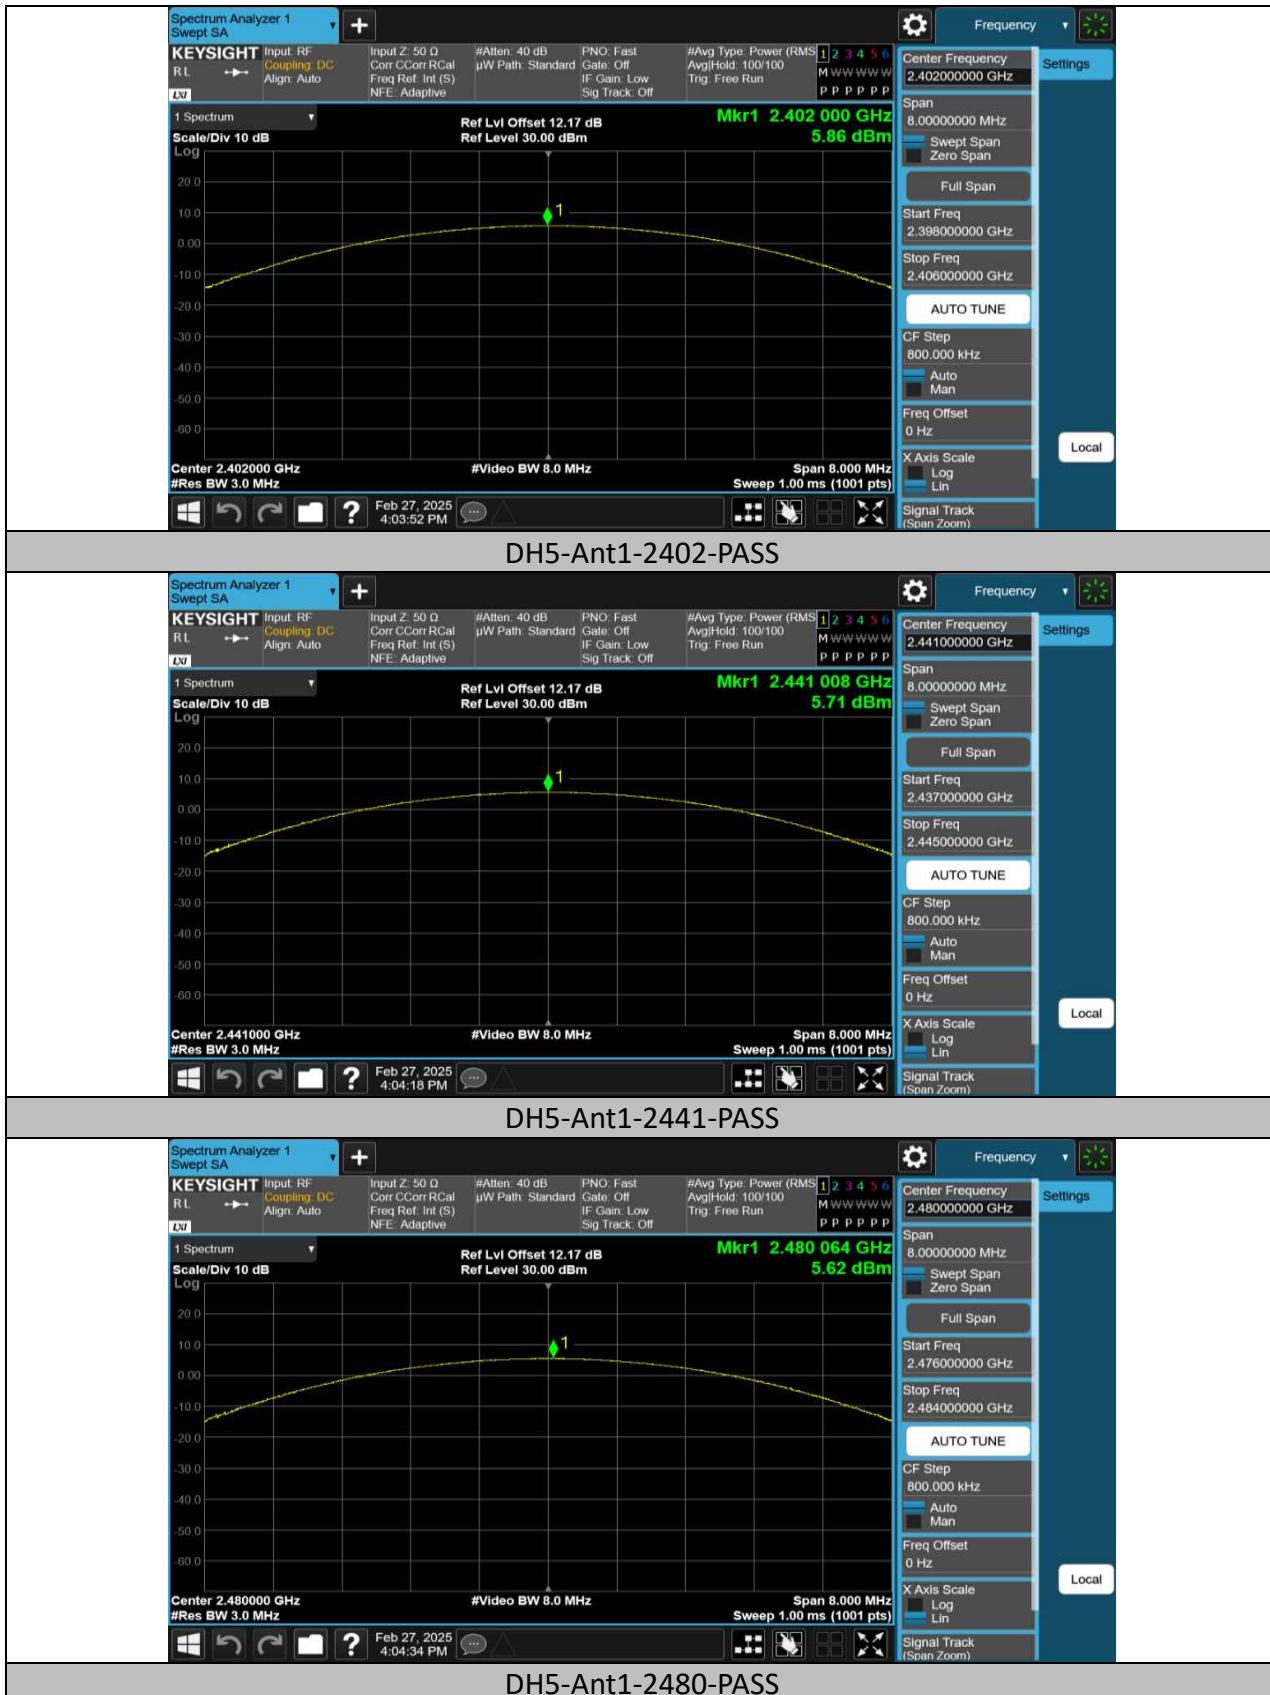

TEST REPORT

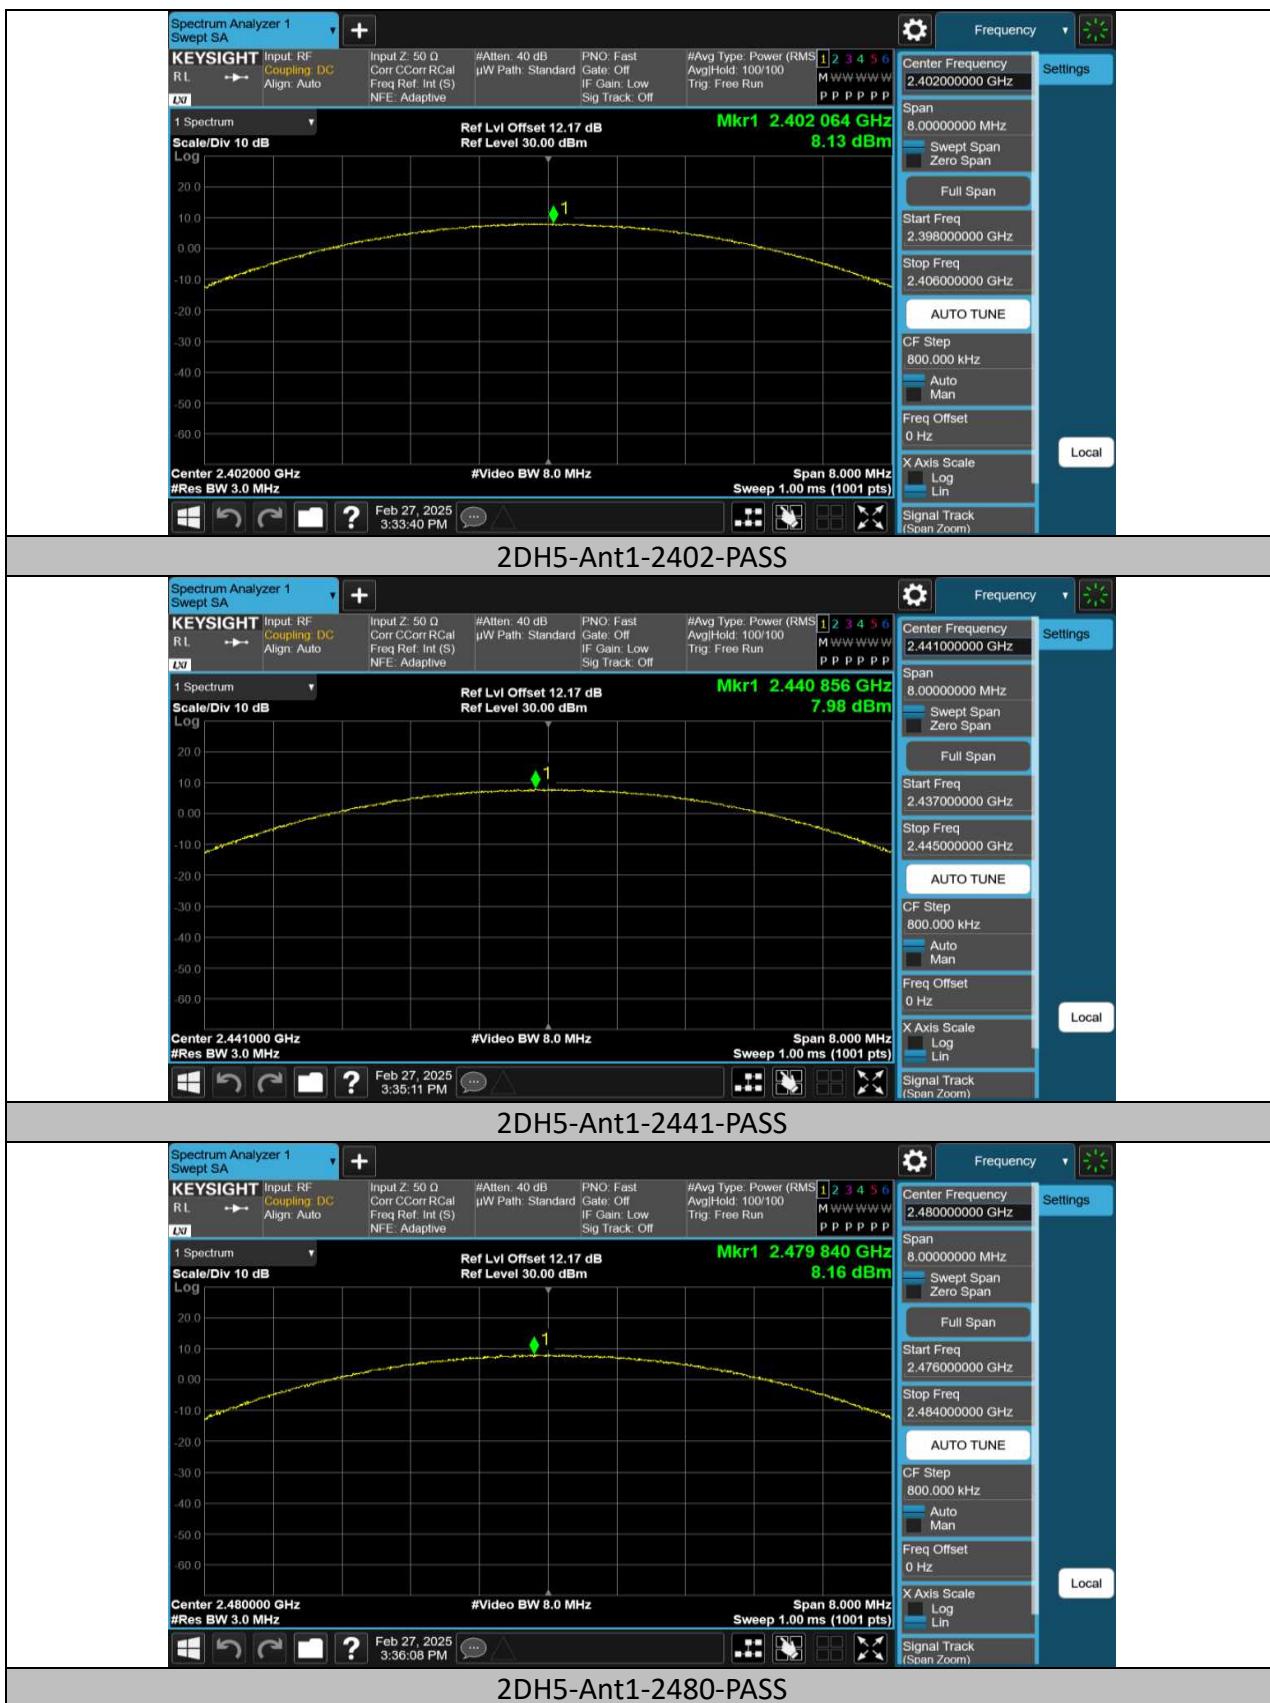

TEST REPORT

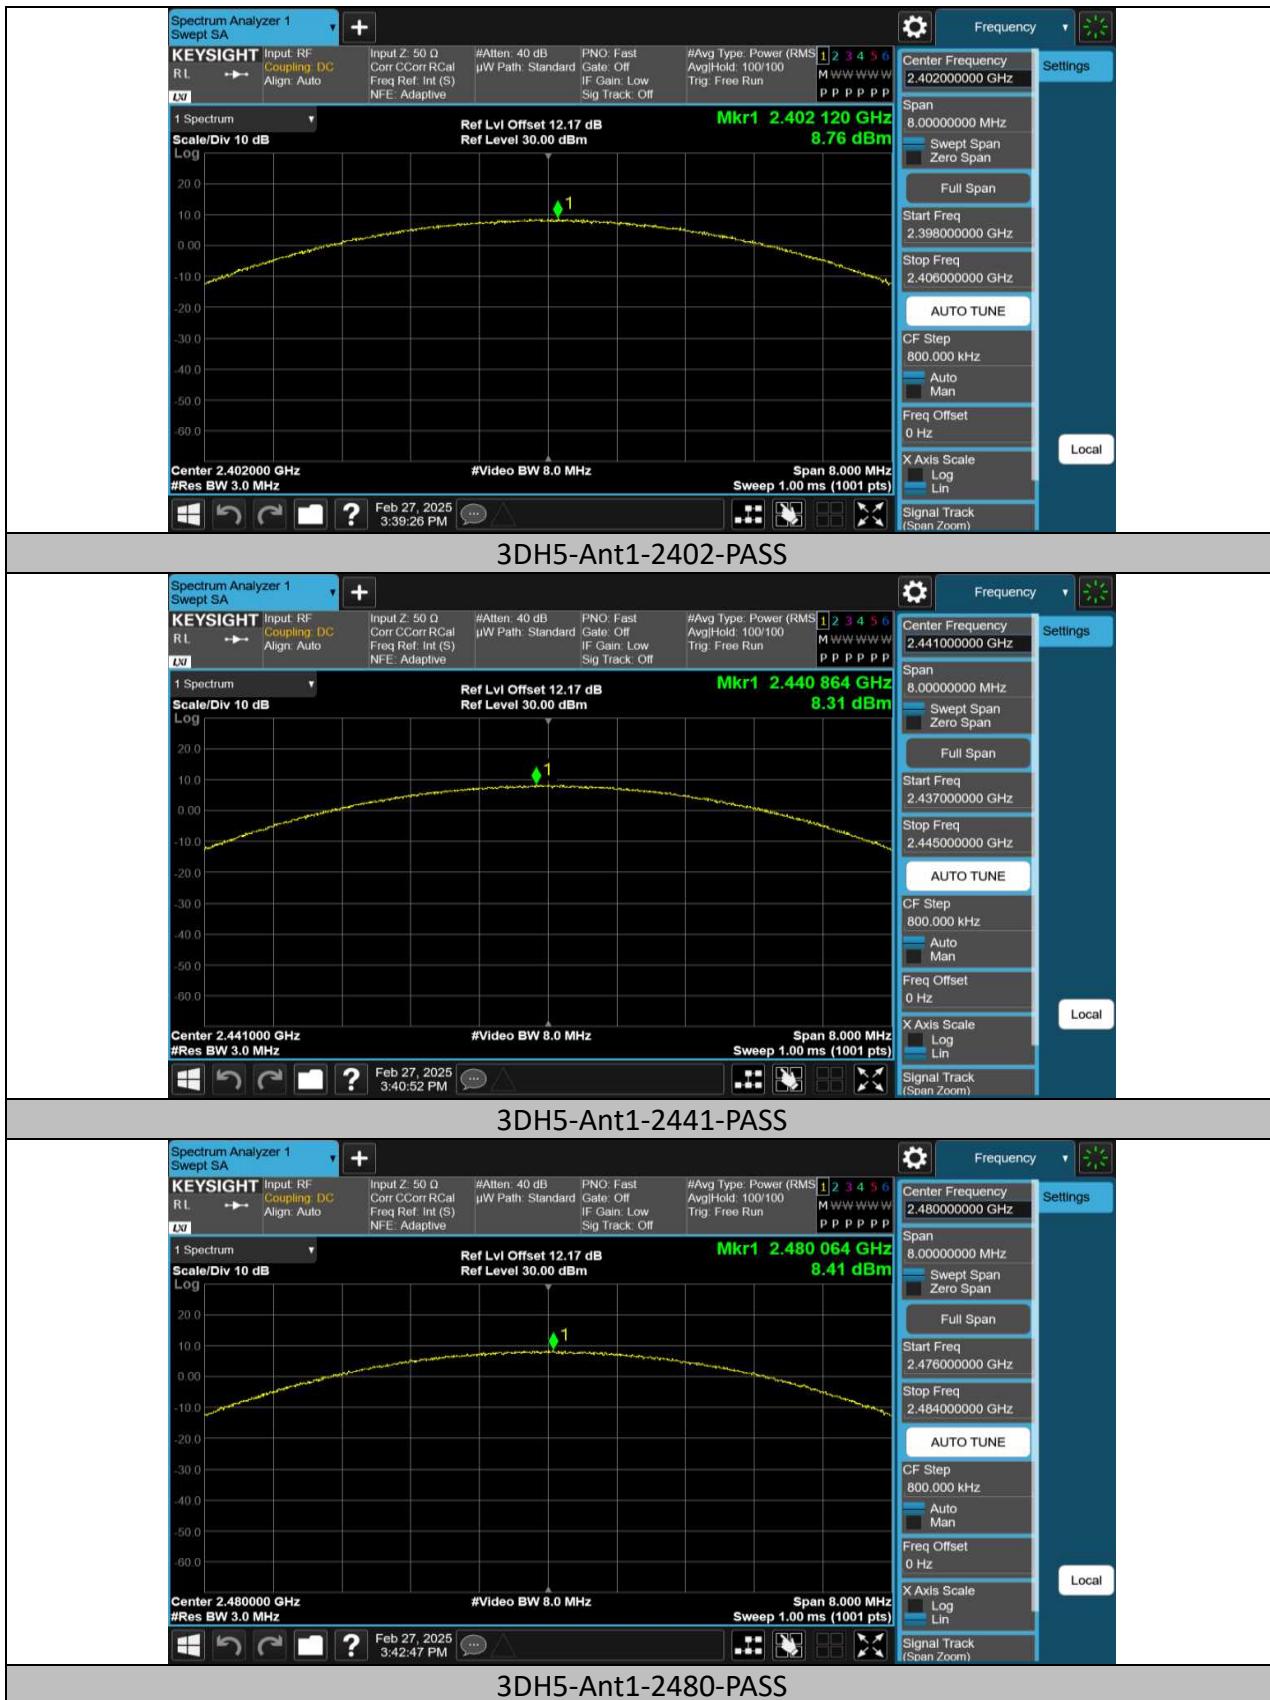

TEST REPORT**Carrier Frequency Separation****Test Result**

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1.012	≥0.867	PASS
2DH5	Ant1	Hop	1.216	≥0.888	PASS
3DH5	Ant1	Hop	0.974	≥0.876	PASS

TEST REPORT

Test Graphs



TEST REPORT**Time of Occupancy****Test Result**

Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result [s]	Limit [s]	Verdict
DH1	Ant1	Hop	0.376	151	0.057	≤0.4	PASS
DH3	Ant1	Hop	1.633	156	0.255	≤0.4	PASS
DH5	Ant1	Hop	2.880	85	0.245	≤0.4	PASS
2DH1	Ant1	Hop	0.384	151	0.058	≤0.4	PASS
2DH3	Ant1	Hop	1.637	155	0.254	≤0.4	PASS
2DH5	Ant1	Hop	2.883	80	0.231	≤0.4	PASS
3DH1	Ant1	Hop	0.385	165	0.064	≤0.4	PASS
3DH3	Ant1	Hop	0.385	153	0.059	≤0.4	PASS
3DH5	Ant1	Hop	2.885	76	0.219	≤0.4	PASS

TEST REPORT


Test Graphs




TEST REPORT



TEST REPORT

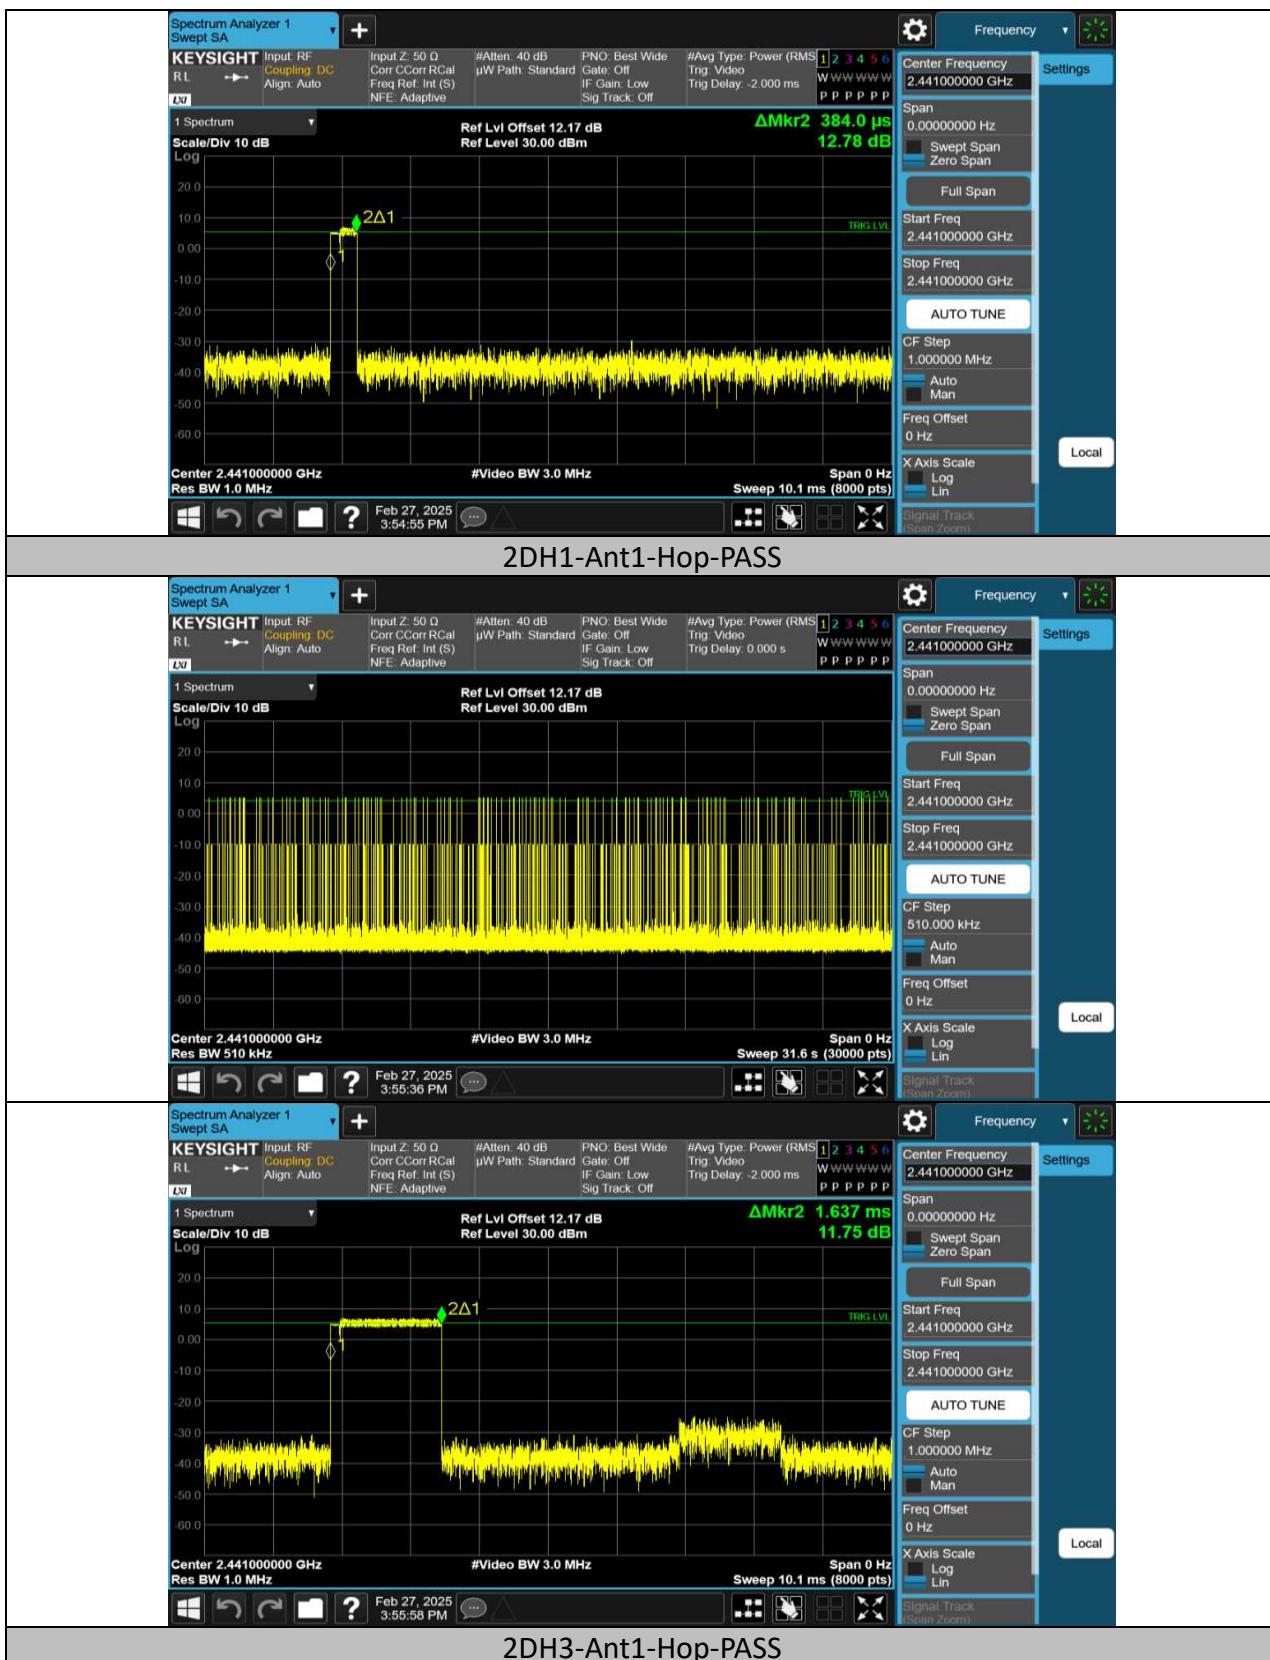


TEST REPORT

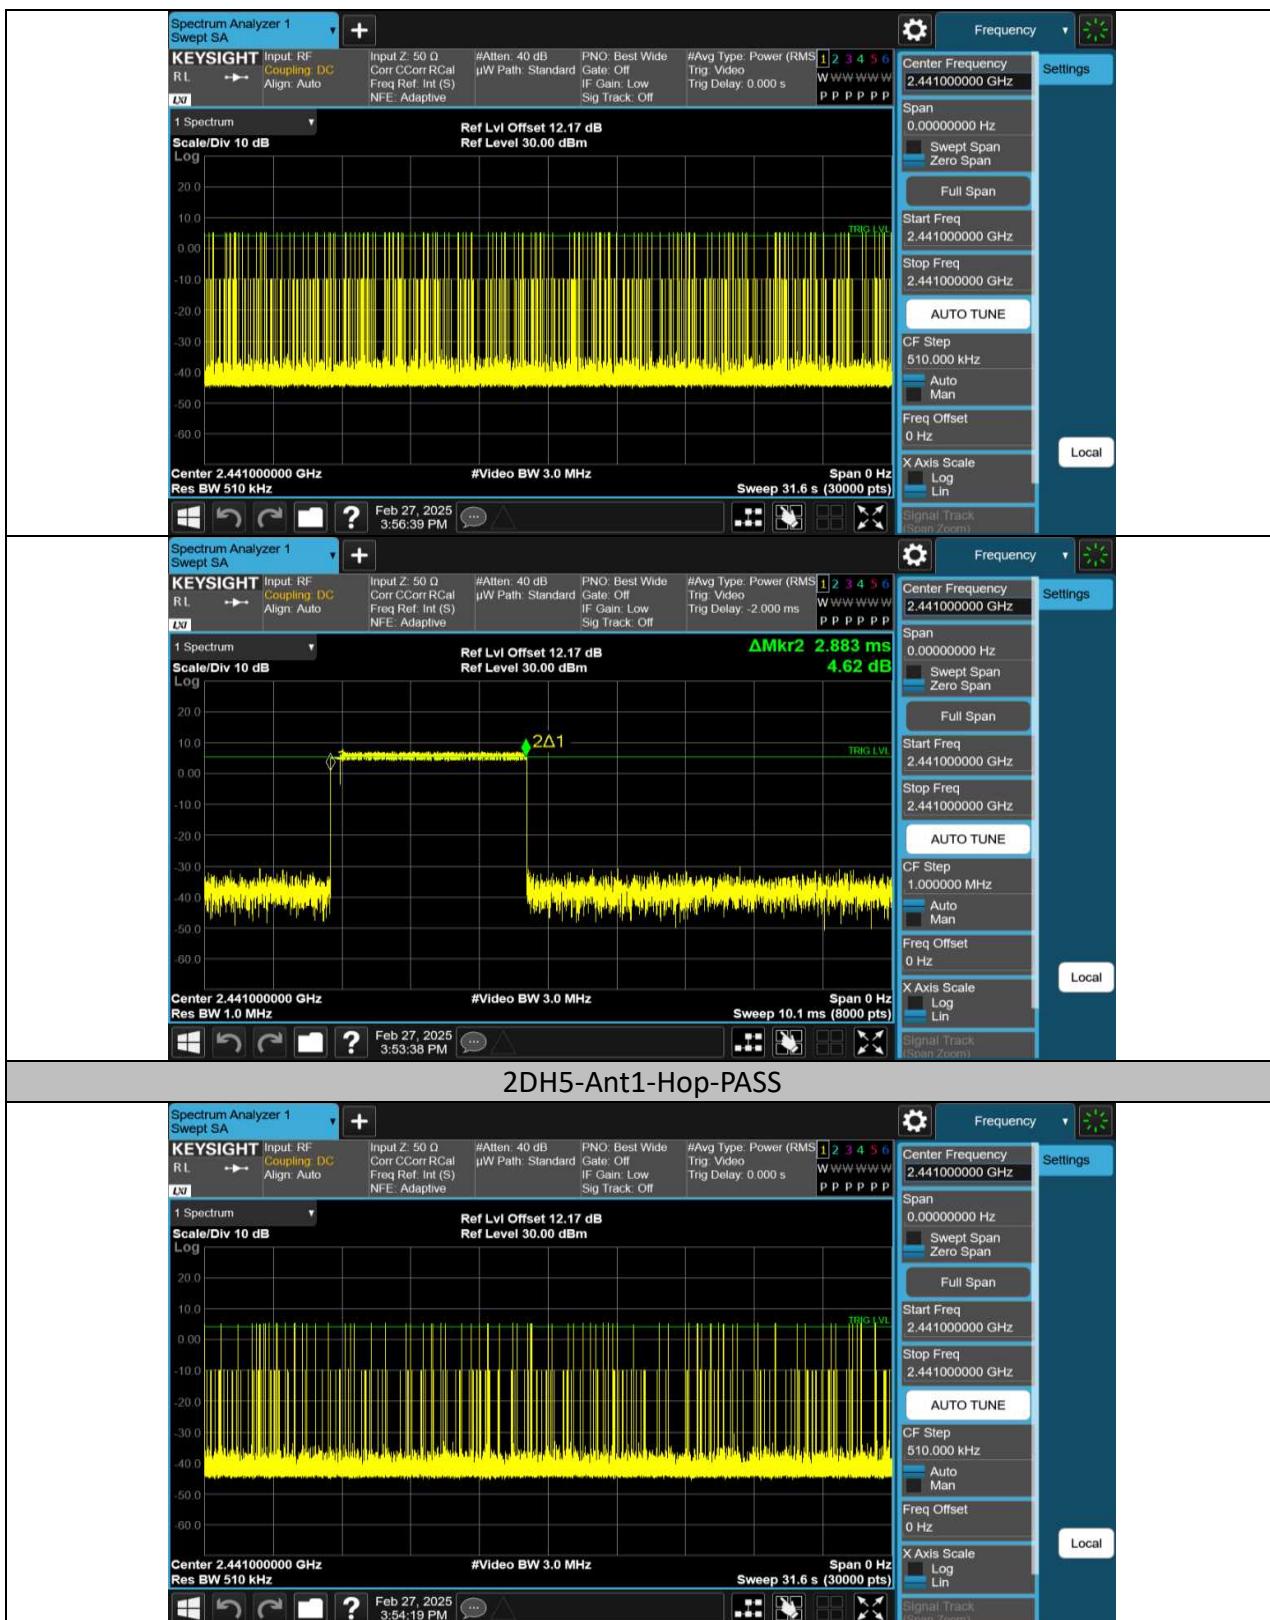

TEST REPORT



TEST REPORT

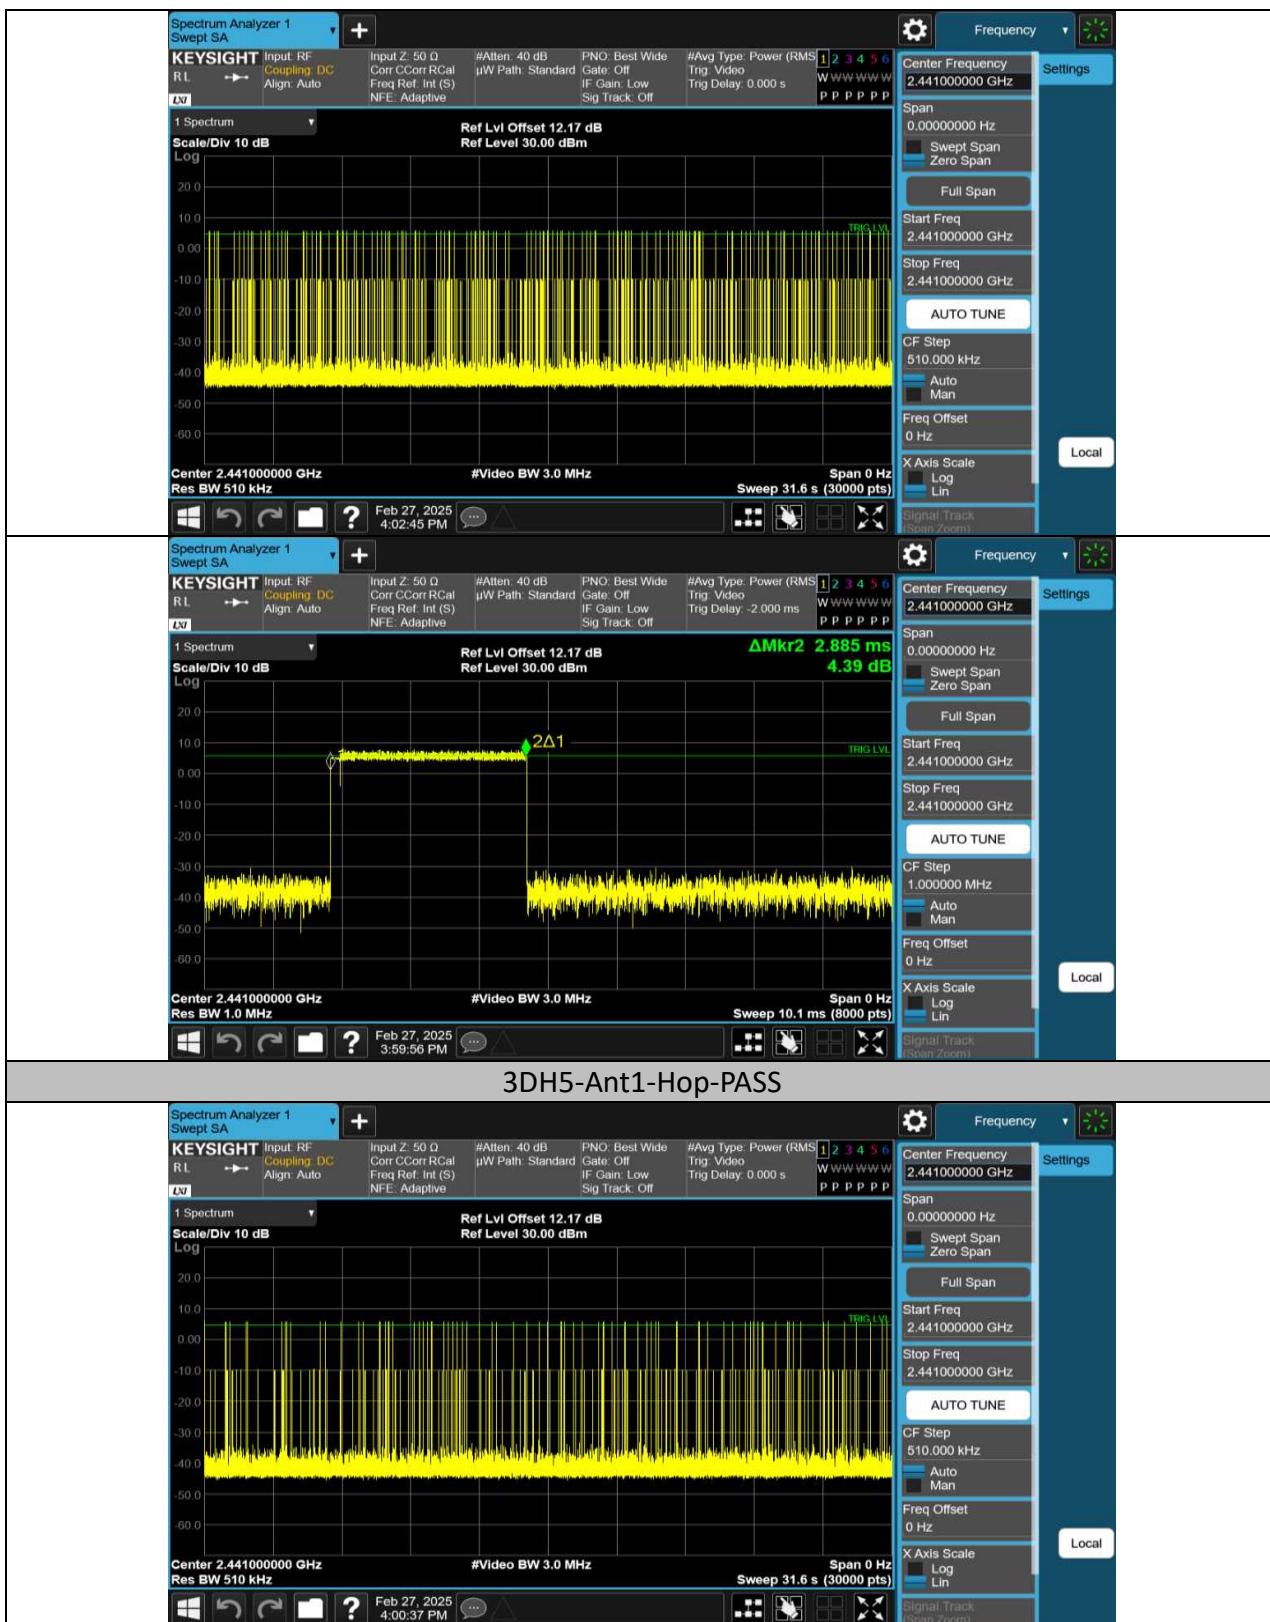

TEST REPORT**Number of Hopping Channels****Test Result**

Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

TEST REPORT

Test Graphs




TEST REPORT**Band Edge Measurements****Test Result**


Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	4.95	-48.57	≤-15.05	PASS
DH5	Ant1	High	2480	4.57	-49.26	≤-15.43	PASS
DH5	Ant1	Low	Hop_2402	3.05	-48.52	≤-16.95	PASS
DH5	Ant1	High	Hop_2480	4.40	-49.55	≤-15.6	PASS
2DH5	Ant1	Low	2402	5.05	-49.13	≤-14.95	PASS
2DH5	Ant1	High	2480	3.43	-49.19	≤-16.57	PASS
2DH5	Ant1	Low	Hop_2402	1.96	-49.31	≤-18.04	PASS
2DH5	Ant1	High	Hop_2480	3.35	-49.68	≤-16.65	PASS
3DH5	Ant1	Low	2402	5.36	-49.81	≤-14.64	PASS
3DH5	Ant1	High	2480	3.68	-48.62	≤-16.32	PASS
3DH5	Ant1	Low	Hop_2402	1.44	-49.88	≤-18.56	PASS
3DH5	Ant1	High	Hop_2480	2.54	-49.7	≤-17.46	PASS

TEST REPORT

Test Graphs

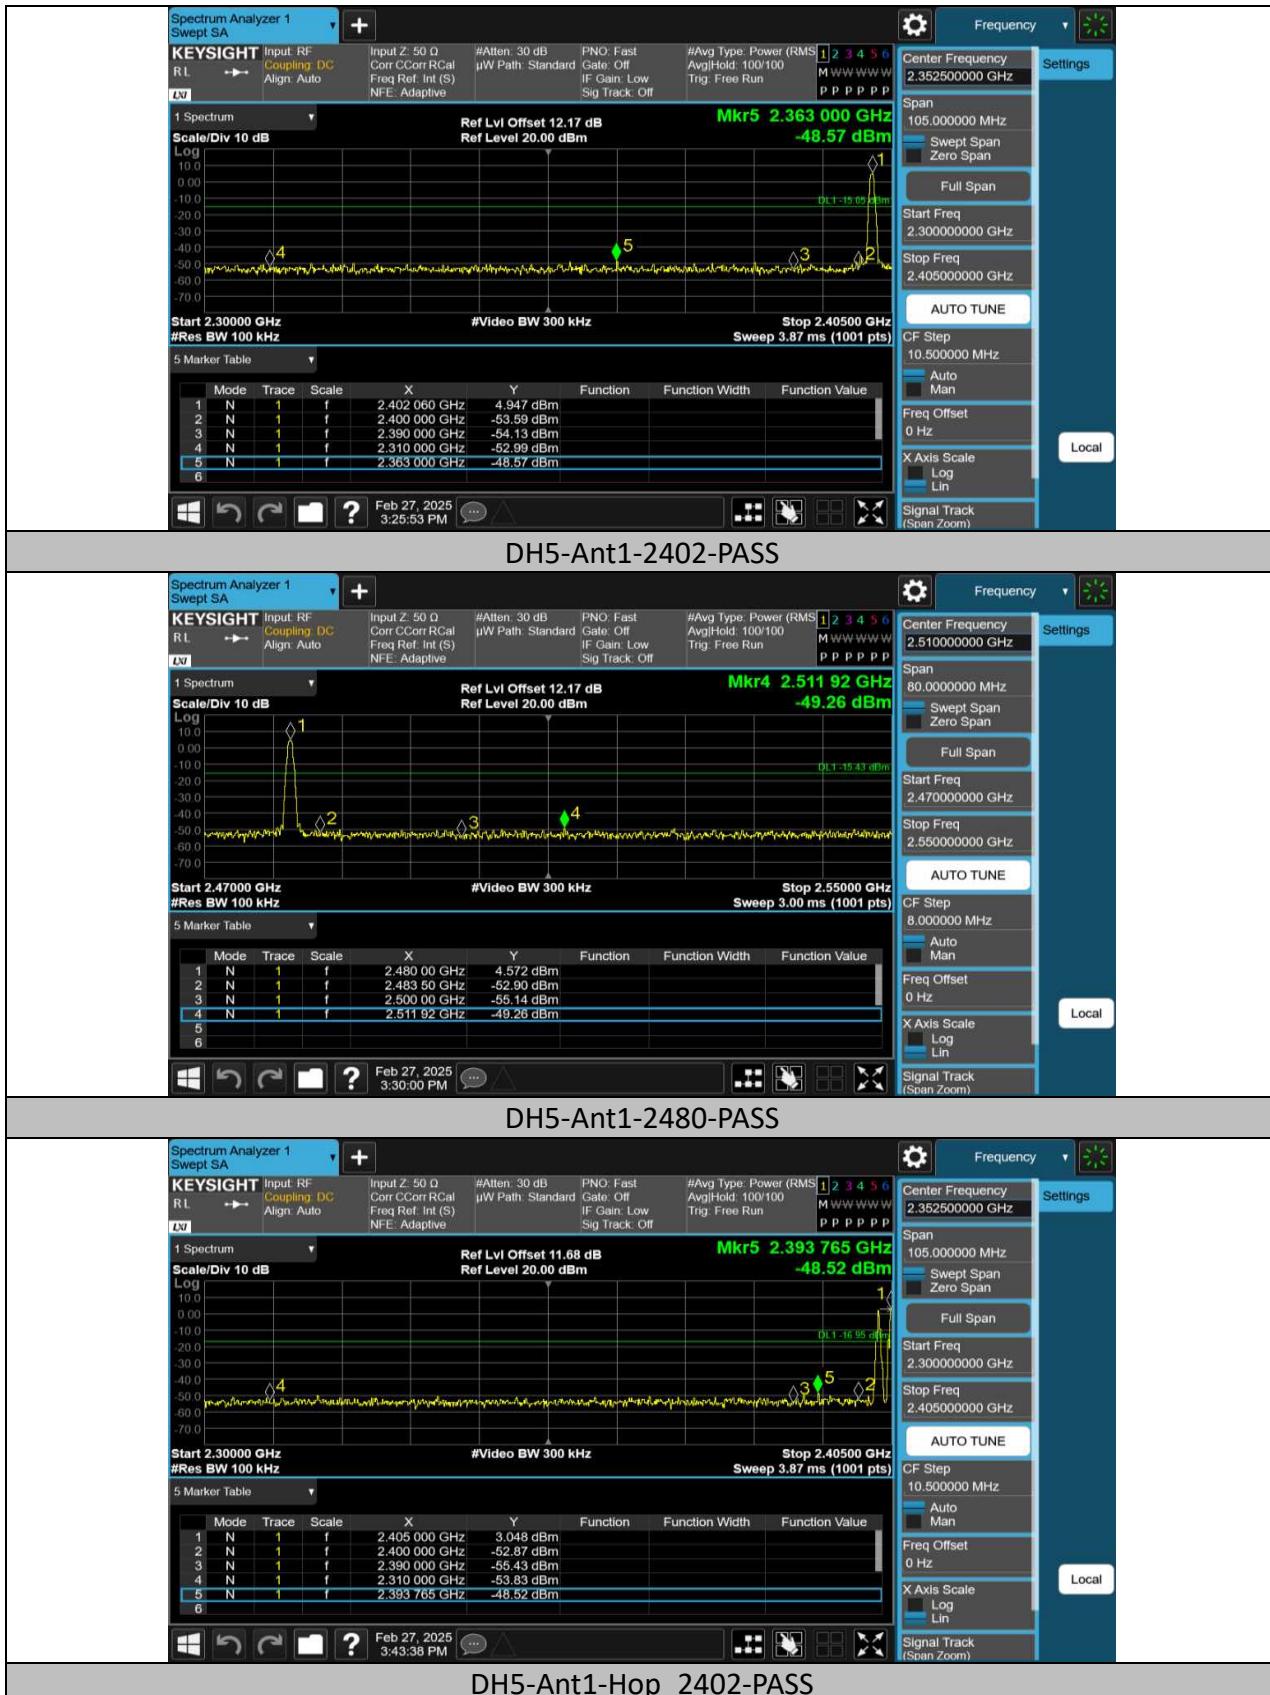

TEST REPORT

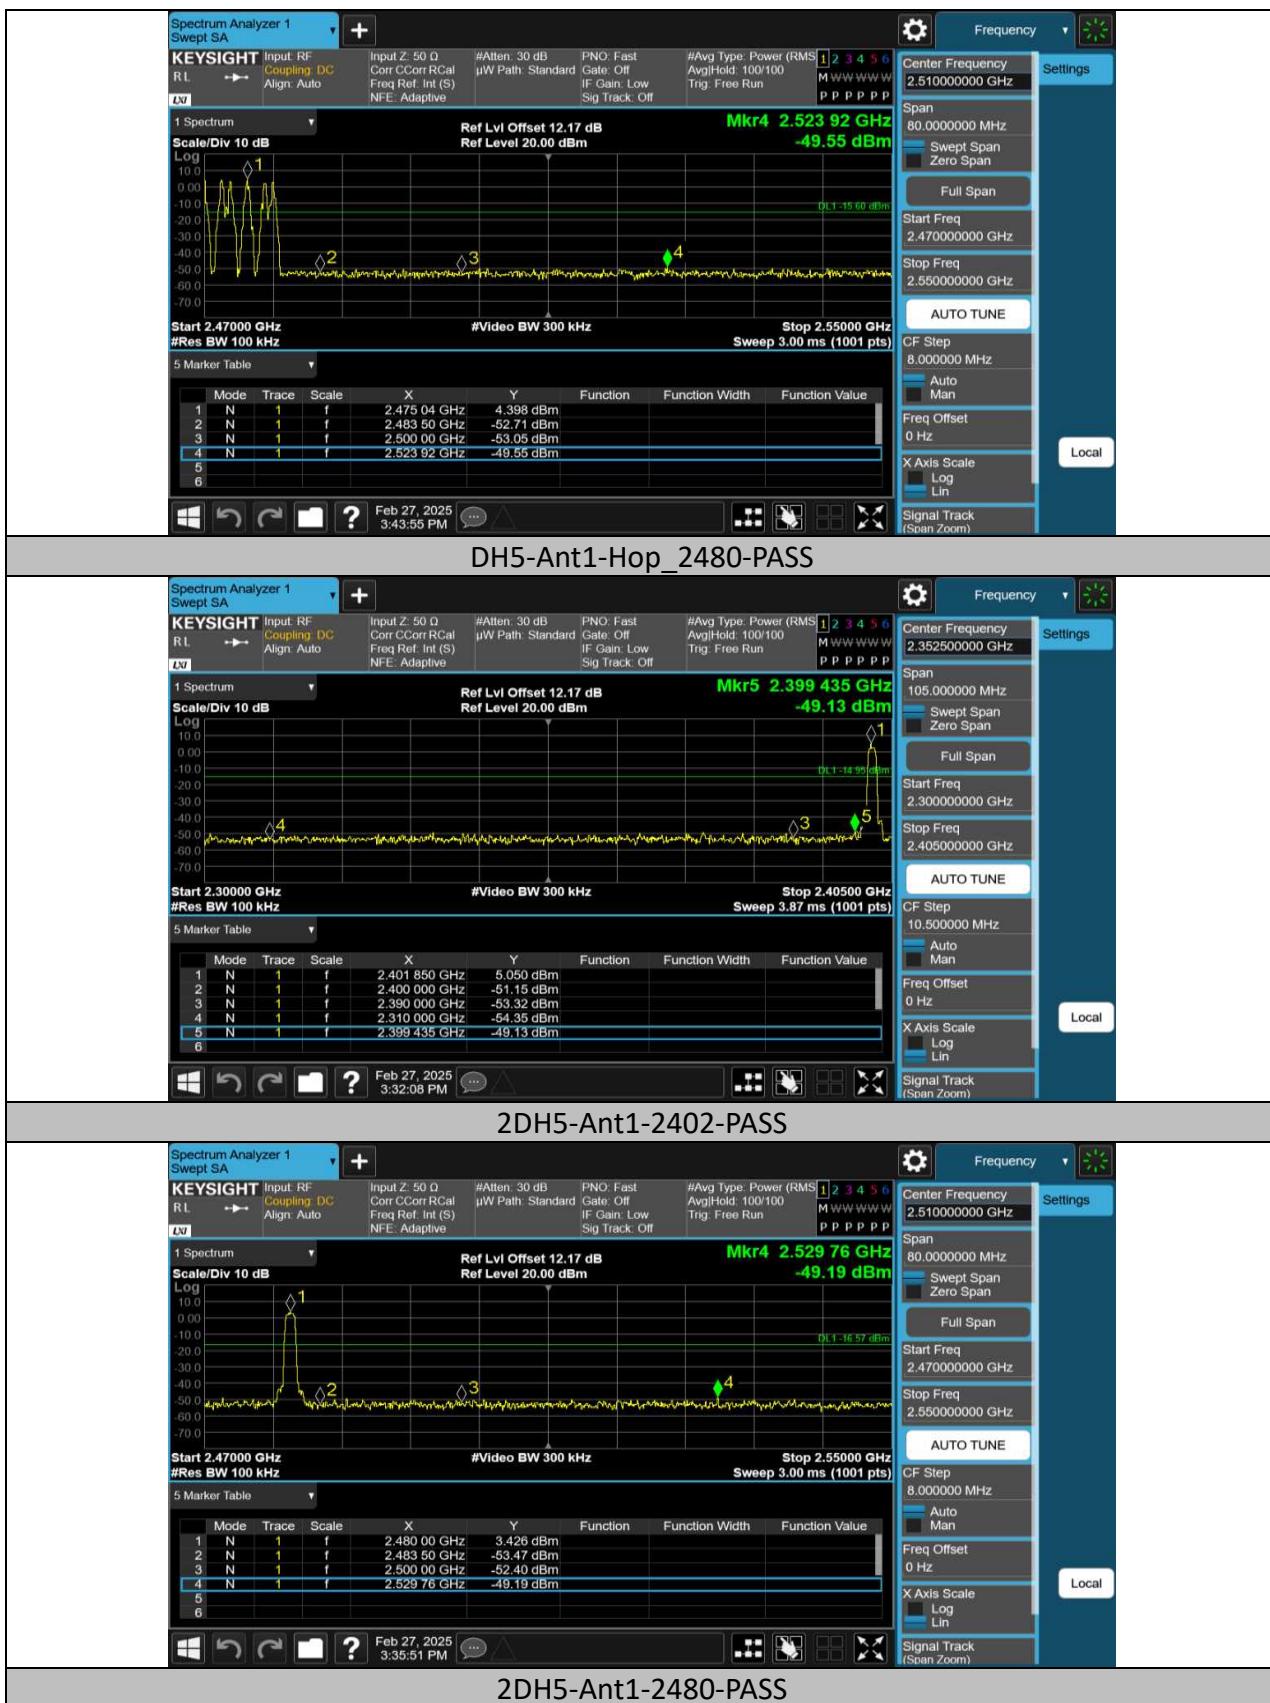

TEST REPORT

