



FCC Part 15C Test Report

FCC ID: 2BNWQ-XSP-207

Applicant: Hangzhou Xiaoyue Automobile Technology Co., Ltd

Address: 309, Building B, Chamber of Commerce Building, No. 185, Jincheng Road, Xiaoshan District, Hangzhou City, Zhejiang Province

Manufacturer: Huangshan Xuyou Electronic Technology Co., Ltd

Address: Building 3, Shexian Economic Development Zone, Huangshan City, Anhui Province

EUT: Car Portable Multimedia Player

Trade Mark: HIPPCRON

Model Number: XSP-207
XSP-209, XSP-307, XSP-309, XSP-409, XSP-247, XSP-407, XSP-507

Date of Receipt: Jul. 15, 2025

Test Date: Jul. 15, 2025 - Jul. 25, 2025

Date of Report: Aug. 13, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250715002R

Prepared (Test Engineer): Ken Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	6
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	7
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	7
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
3 . EMC EMISSION TEST	9
3.1 CONDUCTED EMISSION MEASUREMENT	9
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	9
3.1.2 TEST PROCEDURE	9
3.1.3 DEVIATION FROM TEST STANDARD	9
3.1.4 TEST SETUP	10
3.1.5 EUT OPERATING CONDITIONS	10
3.1.6 TEST RESULTS	10
3.2 RADIATED EMISSION MEASUREMENT	11
3.2.1 RADIATED EMISSION LIMITS	11
3.2.2 TEST PROCEDURE	12
3.2.3 DEVIATION FROM TEST STANDARD	12
3.2.4 TEST SETUP	12
3.2.5 EUT OPERATING CONDITIONS	13
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	14
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	15
3.2.8 TEST RESULTS (1GHZ~25GHZ)	31
3.3 RADIATED BAND EMISSION MEASUREMENT	34
3.3.1 TEST REQUIREMENT:	34
3.3.2 TEST PROCEDURE	34
3.3.3 DEVIATION FROM TEST STANDARD	34
3.3.4 TEST SETUP	35
3.3.5 EUT OPERATING CONDITIONS	35
4 . PEAK OUTPUT POWER	47
4.1 APPLIED PROCEDURES / LIMIT	47
4.1.1 TEST PROCEDURE	47
4.1.2 DEVIATION FROM STANDARD	47
4.1.3 TEST SETUP	47
4.1.4 EUT OPERATION CONDITIONS	47



Table of Contents	Page
4.1.5 TEST RESULTS	48
5 . NUMBER OF HOPPING CHANNEL	51
5.1 APPLIED PROCEDURES / LIMIT	51
5.1.1 TEST PROCEDURE	51
5.1.2 DEVIATION FROM STANDARD	51
5.1.3 TEST SETUP	51
5.1.4 EUT OPERATION CONDITIONS	51
5.1.5 TEST RESULTS	51
6 . BANDWIDTH TEST	53
6.1 APPLIED PROCEDURES / LIMIT	53
6.1.1 TEST PROCEDURE	53
6.1.2 DEVIATION FROM STANDARD	53
6.1.3 TEST SETUP	53
6.1.4 EUT OPERATION CONDITIONS	53
6.1.5 TEST RESULTS	54
7 . HOPPING CHANNEL SEPARATION MEASUREMENT	57
7.1 APPLIED PROCEDURES / LIMIT	57
7.1.1 TEST PROCEDURE	57
7.1.2 DEVIATION FROM STANDARD	57
7.1.3 TEST SETUP	57
7.1.4 EUT OPERATION CONDITIONS	57
7.1.5 TEST RESULTS	57
8 . DWELL TIME OF OCCUPANCY	59
8.1 APPLIED PROCEDURES / LIMIT	59
8.1.1 TEST PROCEDURE	59
8.1.2 DEVIATION FROM STANDARD	59
8.1.3 TEST SETUP	59
8.1.4 EUT OPERATION CONDITIONS	59
8.1.5 TEST RESULTS	60
9 . ANTENNA REQUIREMENT	63
9.1 STANDARD REQUIREMENT	63
9.2 EUT ANTENNA	63
10 . TEST SEUUP PHOTO	63
11 . EUT PHOTO	63



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	
15.247(c)	Radiated Spurious Emission	PASS	
15.205	Band Edge Emission	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	20dB Bandwidth	$\pm 0.2\text{MHz}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Car Portable Multimedia Player
Trademark	HIPPCRON
Model No.:	XSP-207 XSP-209, XSP-307, XSP-309, XSP-409, XSP-247, XSP-407, XSP-507
Model Difference	All models are same as the samples except model name、appearance color and screen size, they have the same structure and circuit.
Operation Frequency:	2402~2480MHz
Channel numbers:	79 Channels
Channel separation:	1MHz
Modulation technology:	GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type:	Internal Antenna
Antenna gain:	-0.1dBi
Power supply:	DC 12V

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
~	~	~	~	~	~
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2441	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
~	~	~	~	~	~
14	2416	41	2443	68	2470
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Modulation	Channel
Mode 1	GFSK	CH00
Mode 2		CH39
Mode 3		CH78
Mode 4	PI/4 DQPSK	CH00
Mode 5		CH39
Mode 6		CH78
Mode 7	8DPSK	CH00
Mode 8		CH39
Mode 9		CH78

Note: (1) The measurements are performed at the highest, middle, lowest available channels.

(2) For the two items of conducted disturbance at the power supply end and space radiation below 1GHz, all modes have undergone pre-tests. The report only shows the worst test results of mode 3.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test





2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Car Portable Multimedia Player	XSP-207	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Test software Version	Test program: FCC_assist_1.0.2.2		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Setting of Softwave	10	10	10



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 02, 2024	Nov. 01, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 02, 2024	Nov. 01, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

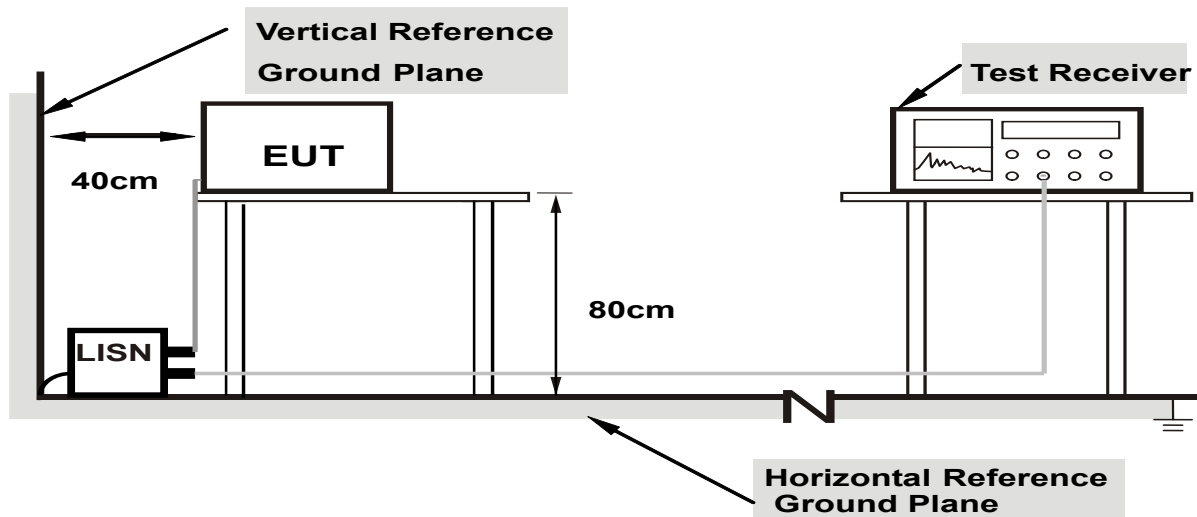

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS

The EUT is powered by DC, no requirements for this item.



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber (Above 18GHz the distance is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


The horizontal and vertical polarities of the antenna were tested, and a pre-test was conducted on the EUT placement as three orthogonal axes X,Y,Z. The worst display of the test results was the Y-axis. The worst case emissions were reported.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

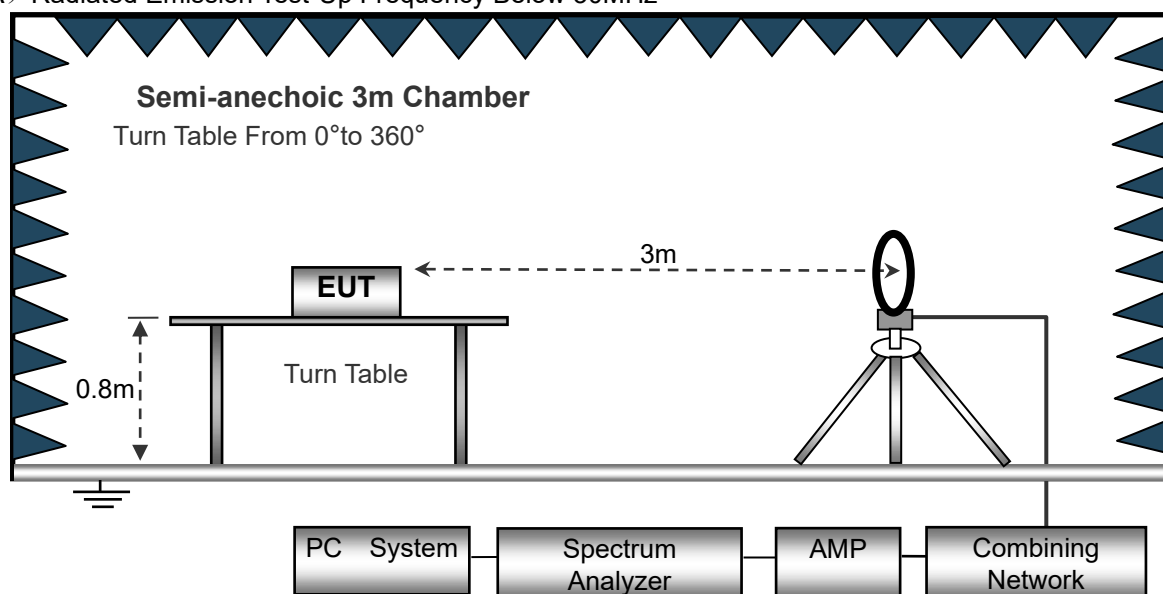

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

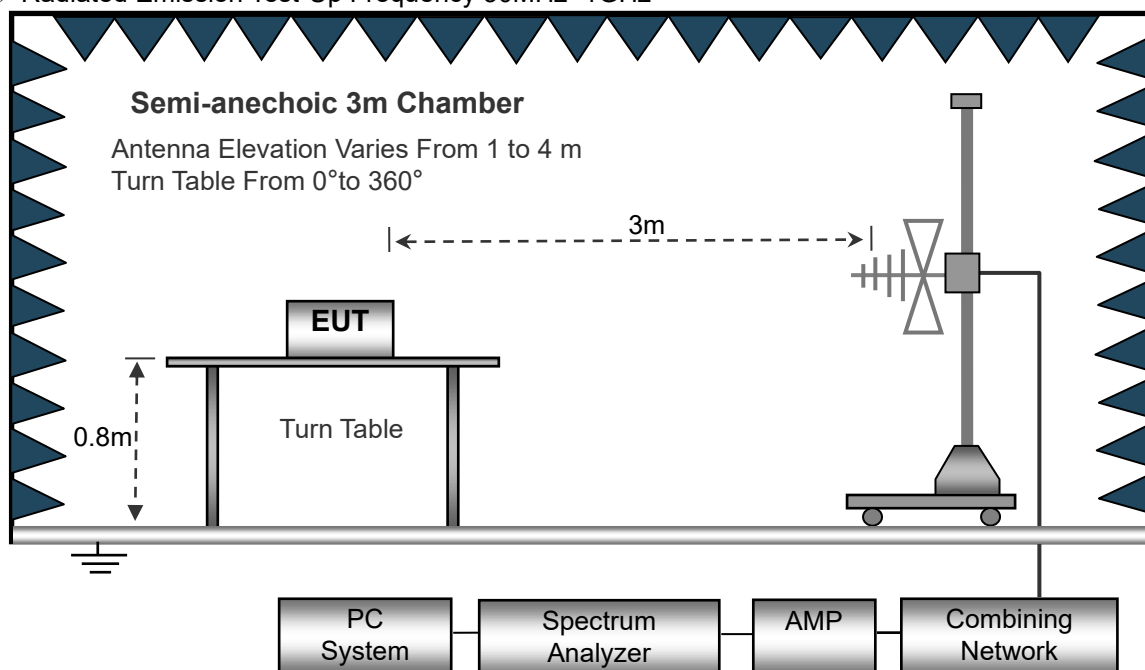

(C) Radiated Emission Test-Up Frequency Above 1GHz

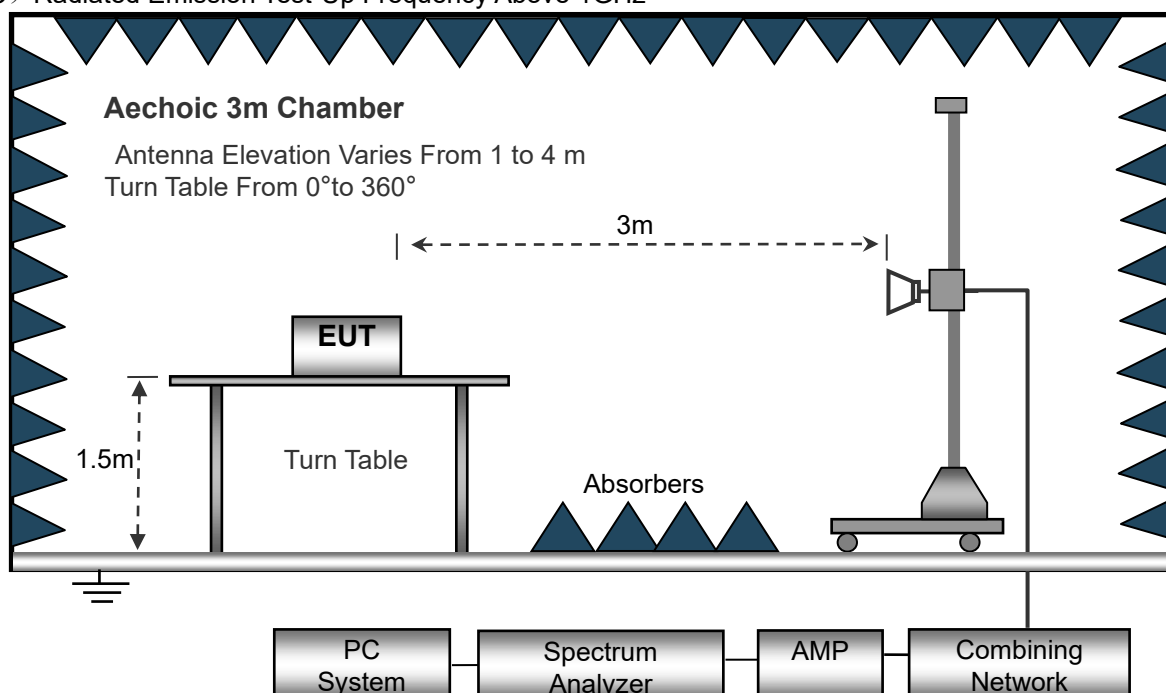

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 12V
Test Mode :	Mode 3	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-207)		

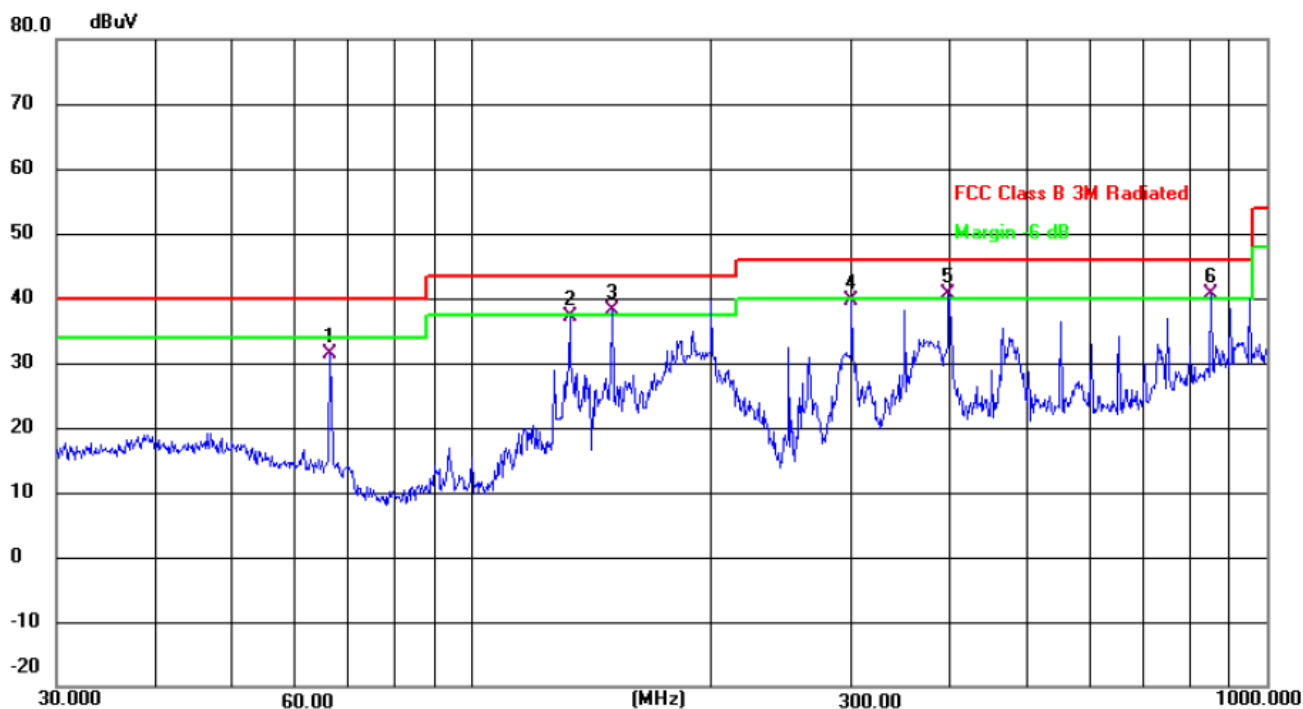

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		66.2660	40.69	-9.37	31.32	40.00	-8.68	QP
2		132.6850	49.44	-12.35	37.09	43.50	-6.41	QP
3	!	150.0107	50.39	-12.34	38.05	43.50	-5.45	QP
4		300.3672	45.56	-6.04	39.52	46.00	-6.48	QP
5	!	397.6333	44.60	-4.06	40.54	46.00	-5.46	QP
6	*	851.0353	36.44	4.31	40.75	46.00	-5.25	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-207)		

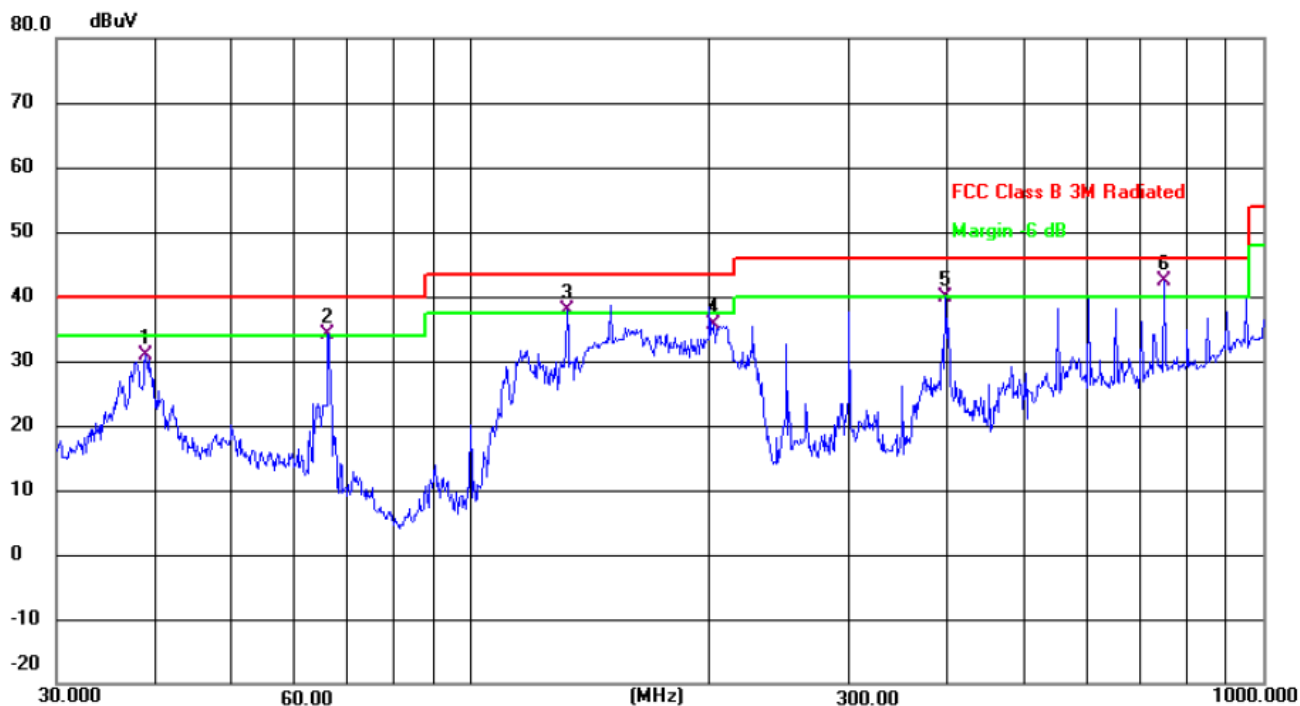

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		38.8877	39.25	-8.28	30.97	40.00	-9.03	QP
2	!	66.0340	43.54	-9.30	34.24	40.00	-5.76	QP
3	!	132.2204	50.24	-12.35	37.89	43.50	-5.61	QP
4		202.8103	44.72	-9.05	35.67	43.50	-7.83	QP
5		397.6333	43.82	-4.06	39.76	46.00	-6.24	QP
6	*	750.1082	39.25	3.07	42.32	46.00	-3.68	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-209)		

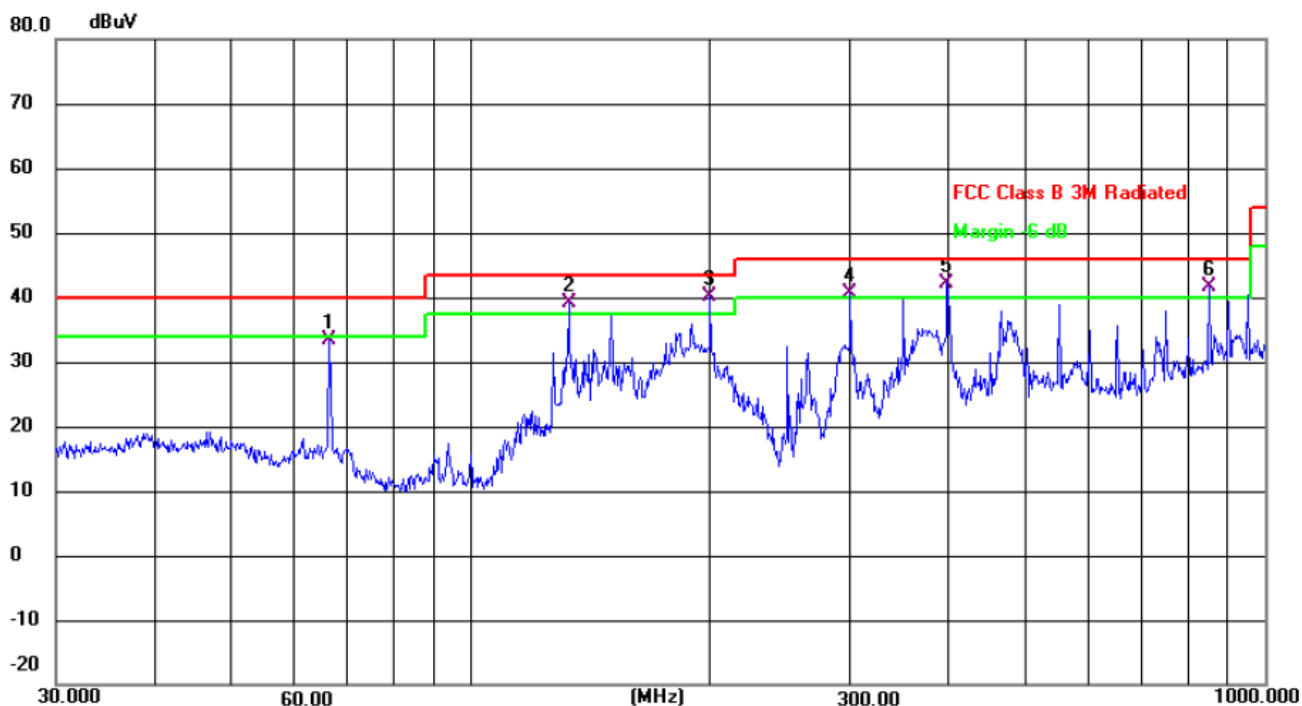

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		66.2660	42.69	-9.37	33.32	40.00	-6.68	QP
2	!	132.6850	51.44	-12.35	39.09	43.50	-4.41	QP
3	*	199.9855	49.28	-9.18	40.10	43.50	-3.40	QP
4	!	300.3672	46.56	-6.04	40.52	46.00	-5.48	QP
5	!	397.6333	46.10	-4.06	42.04	46.00	-3.96	QP
6	!	851.0353	37.44	4.31	41.75	46.00	-4.25	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-209)		

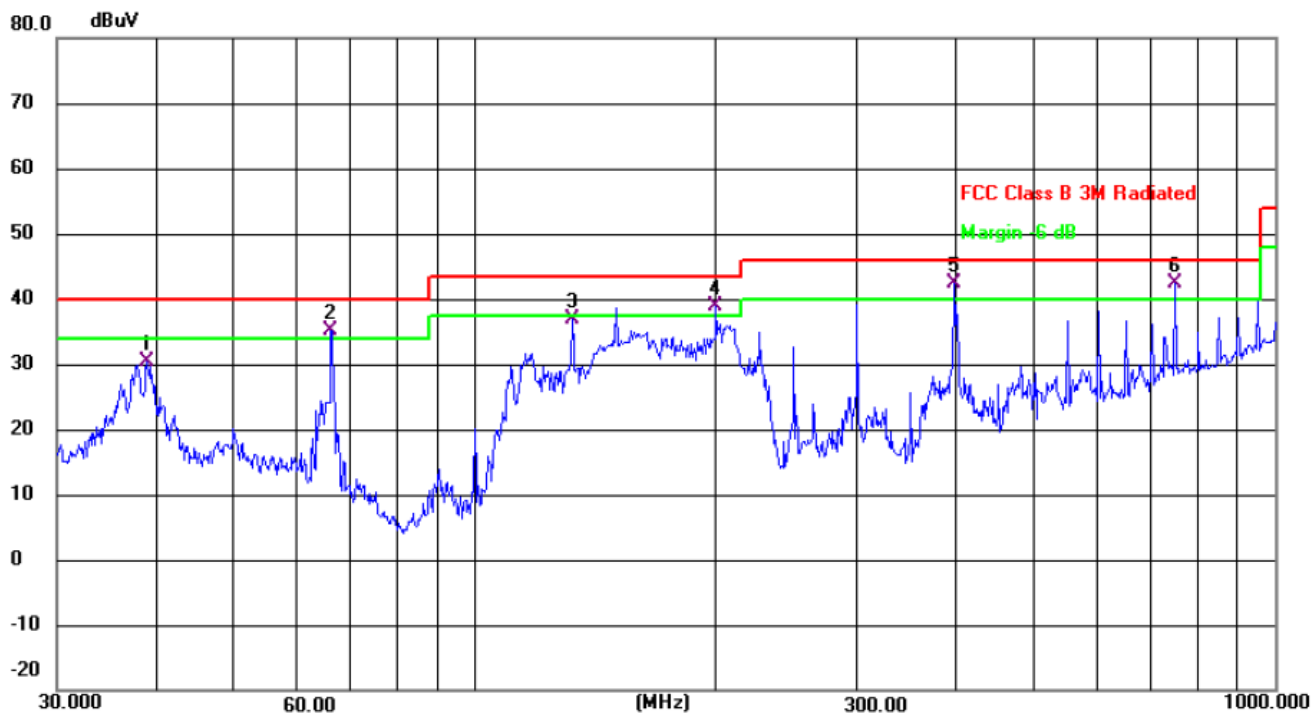

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dB	dB	
1		38.8877	38.75	-8.28	30.47	40.00	-9.53	QP
2	!	66.0340	44.54	-9.30	35.24	40.00	-4.76	QP
3		132.2204	49.24	-12.35	36.89	43.50	-6.61	QP
4	!	199.9855	47.94	-9.18	38.76	43.50	-4.74	QP
5	!	397.6333	46.32	-4.06	42.26	46.00	-3.74	QP
6	*	750.1082	39.25	3.07	42.32	46.00	-3.68	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-307)		

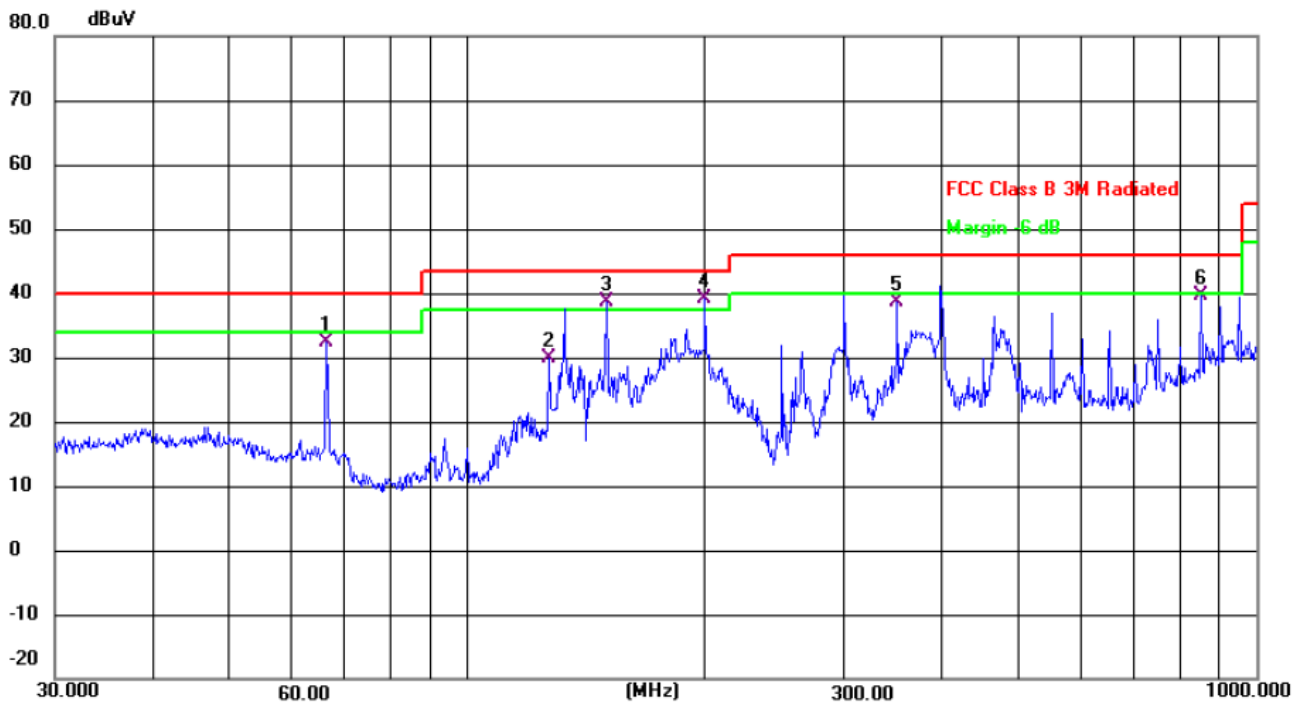

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		66.2660	41.69	-9.37	32.32	40.00	-7.68	QP
2		126.7723	42.07	-12.08	29.99	43.50	-13.51	QP
3	!	150.0107	50.89	-12.34	38.55	43.50	-4.95	QP
4	*	199.9855	48.28	-9.18	39.10	43.50	-4.40	QP
5		350.4766	43.63	-5.03	38.60	46.00	-7.40	QP
6		851.0353	35.44	4.31	39.75	46.00	-6.25	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-307)		

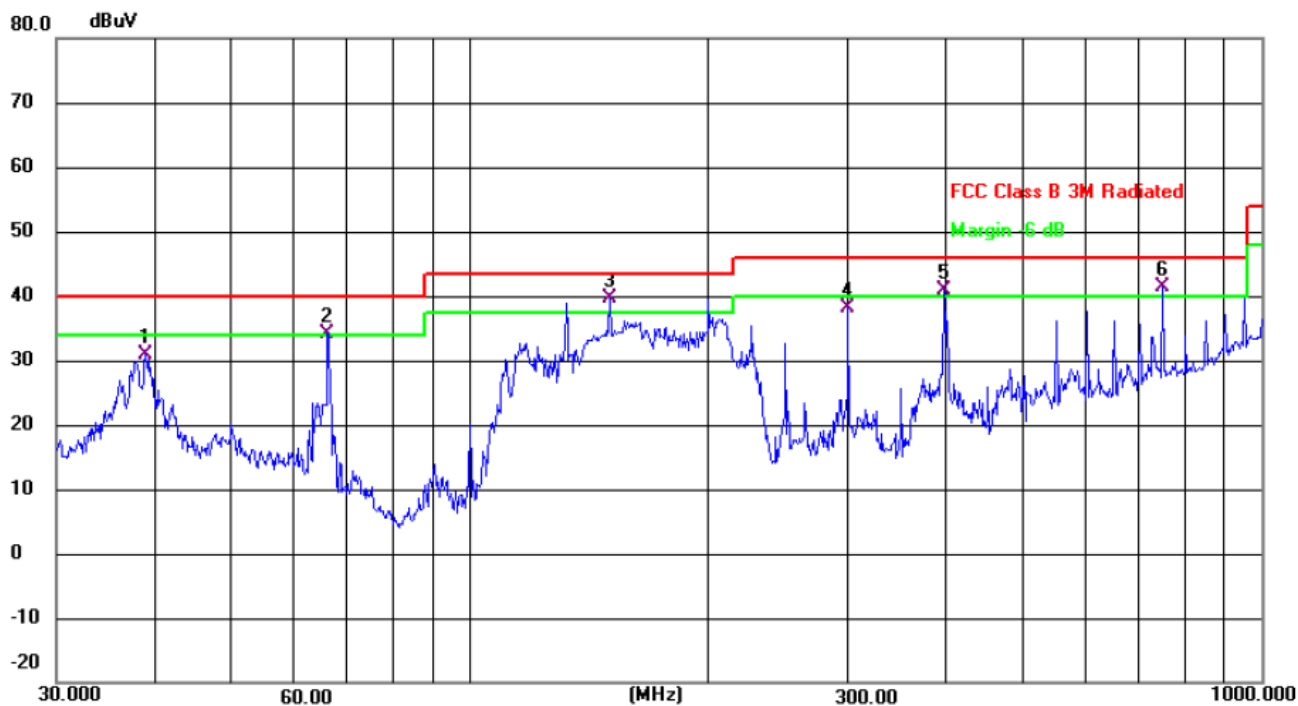

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		38.8877	39.25	-8.28	30.97	40.00	-9.03	QP
2	!	66.0340	43.54	-9.30	34.24	40.00	-5.76	QP
3	*	150.0107	51.87	-12.34	39.53	43.50	-3.97	QP
4		300.3672	44.18	-6.04	38.14	46.00	-7.86	QP
5	!	397.6333	44.82	-4.06	40.76	46.00	-5.24	QP
6	!	750.1082	38.25	3.07	41.32	46.00	-4.68	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-309)		

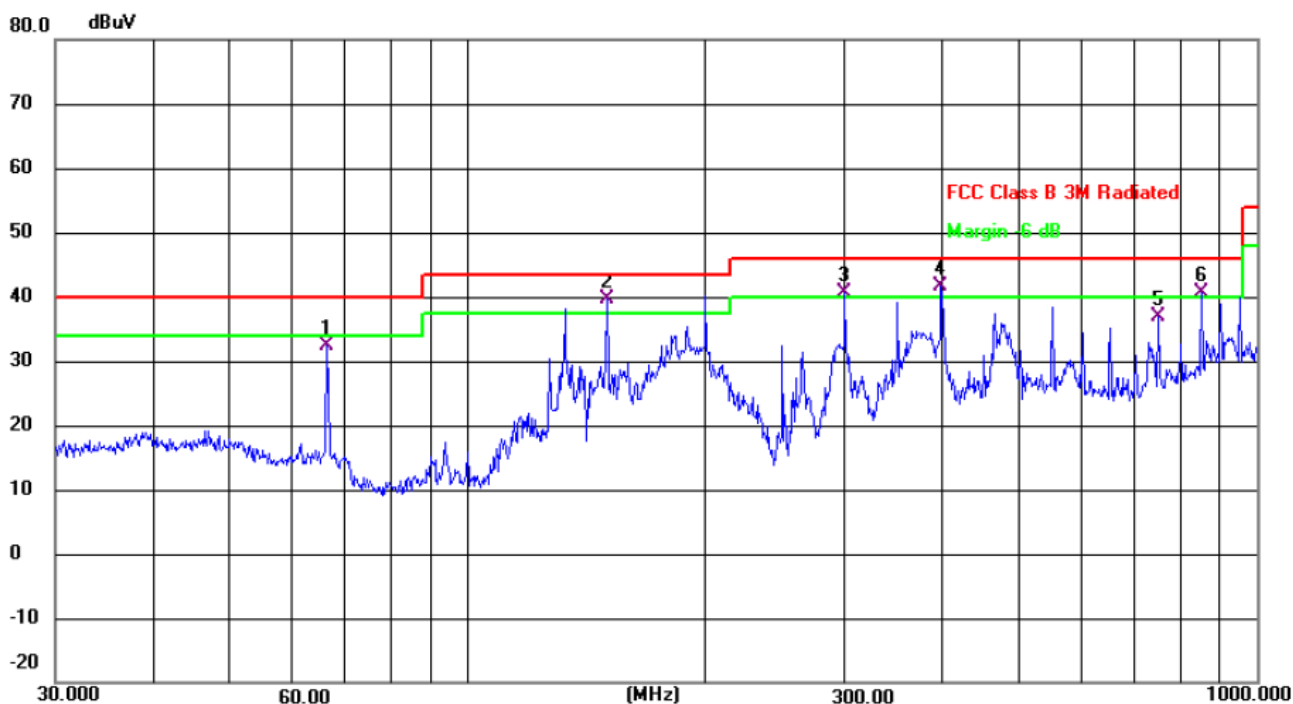

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		66.2660	41.69	-9.37	32.32	40.00	-7.68	QP
2	*	150.0107	51.89	-12.34	39.55	43.50	-3.95	QP
3	!	300.3672	46.56	-6.04	40.52	46.00	-5.48	QP
4	!	397.6333	45.60	-4.06	41.54	46.00	-4.46	QP
5		750.1082	33.92	3.07	36.99	46.00	-9.01	QP
6	!	851.0353	36.44	4.31	40.75	46.00	-5.25	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-309)		

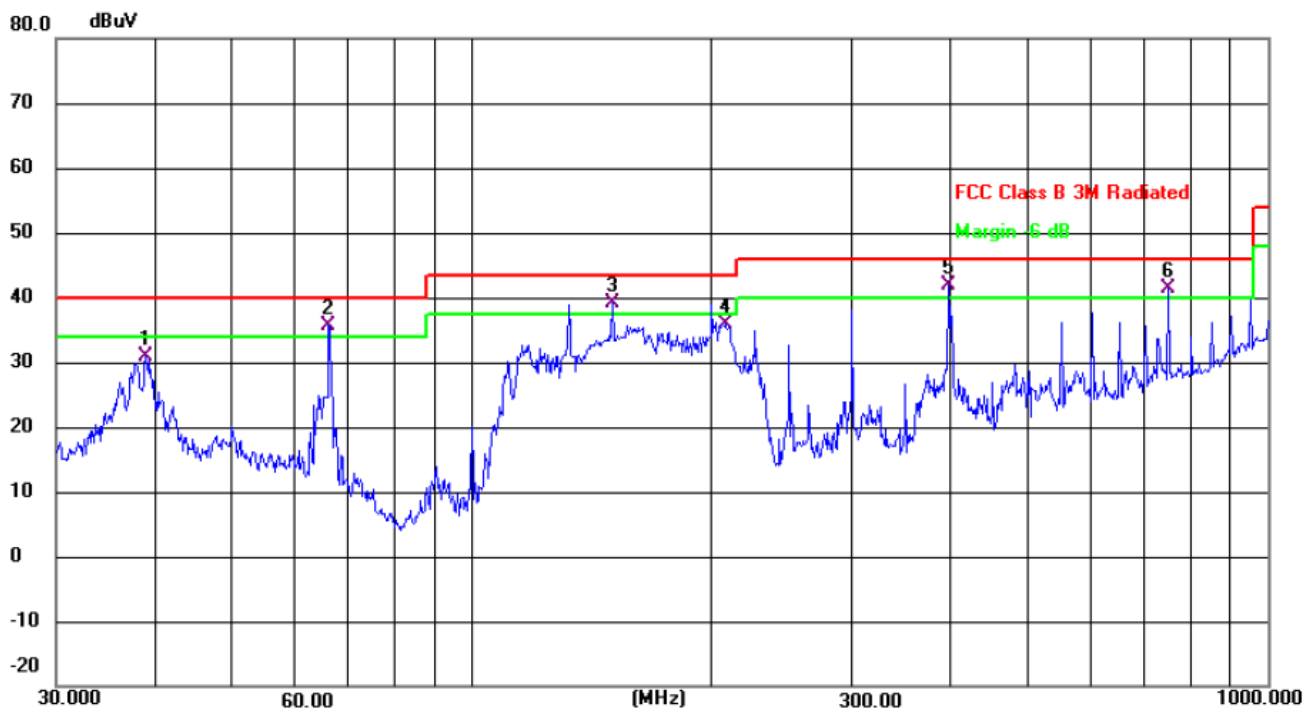

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dB	dB	
1		38.8877	39.25	-8.28	30.97	40.00	-9.03	QP
2	!	66.0340	45.04	-9.30	35.74	40.00	-4.26	QP
3	!	150.0107	51.37	-12.34	39.03	43.50	-4.47	QP
4		207.8500	44.59	-8.70	35.89	43.50	-7.61	QP
5	*	397.6333	45.82	-4.06	41.76	46.00	-4.24	QP
6	!	750.1082	38.25	3.07	41.32	46.00	-4.68	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-409)		

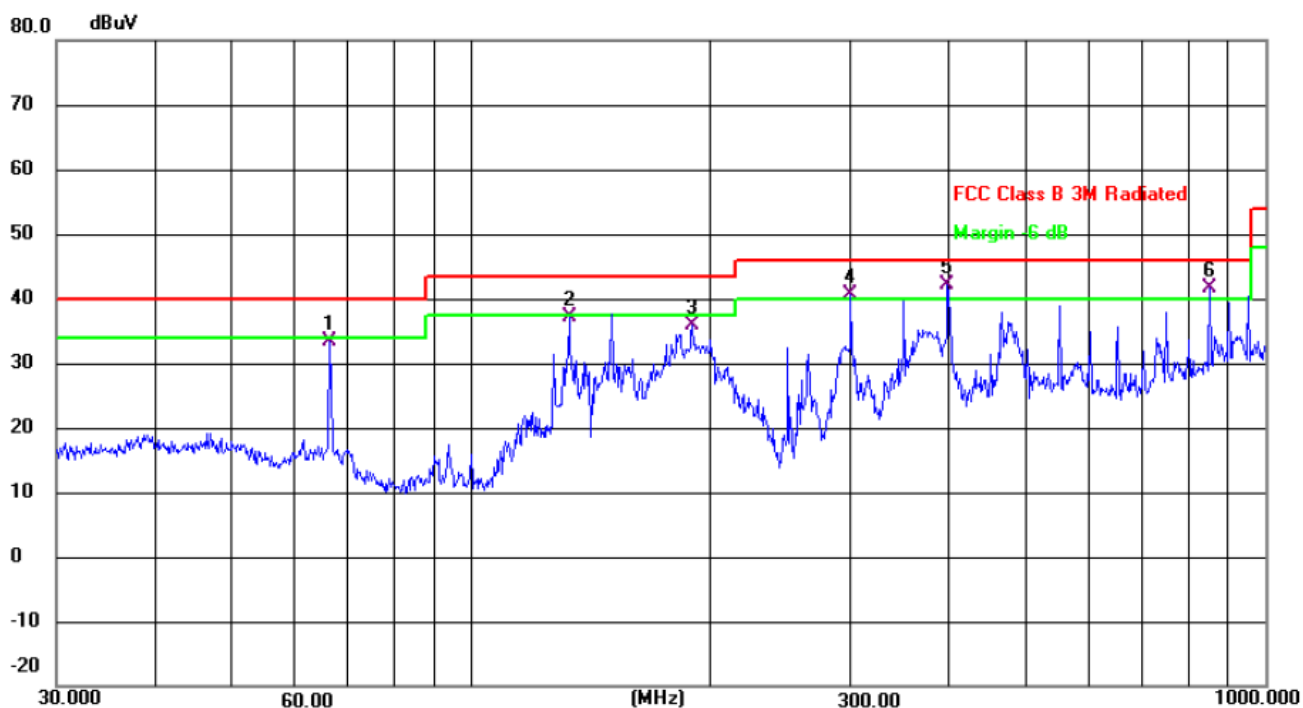

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		66.2660	42.69	-9.37	33.32	40.00	-6.68	QP
2		132.6850	49.44	-12.35	37.09	43.50	-6.41	QP
3		189.7384	45.34	-9.46	35.88	43.50	-7.62	QP
4	!	300.3672	46.56	-6.04	40.52	46.00	-5.48	QP
5	*	397.6333	46.10	-4.06	42.04	46.00	-3.96	QP
6	!	851.0353	37.44	4.31	41.75	46.00	-4.25	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-409)		

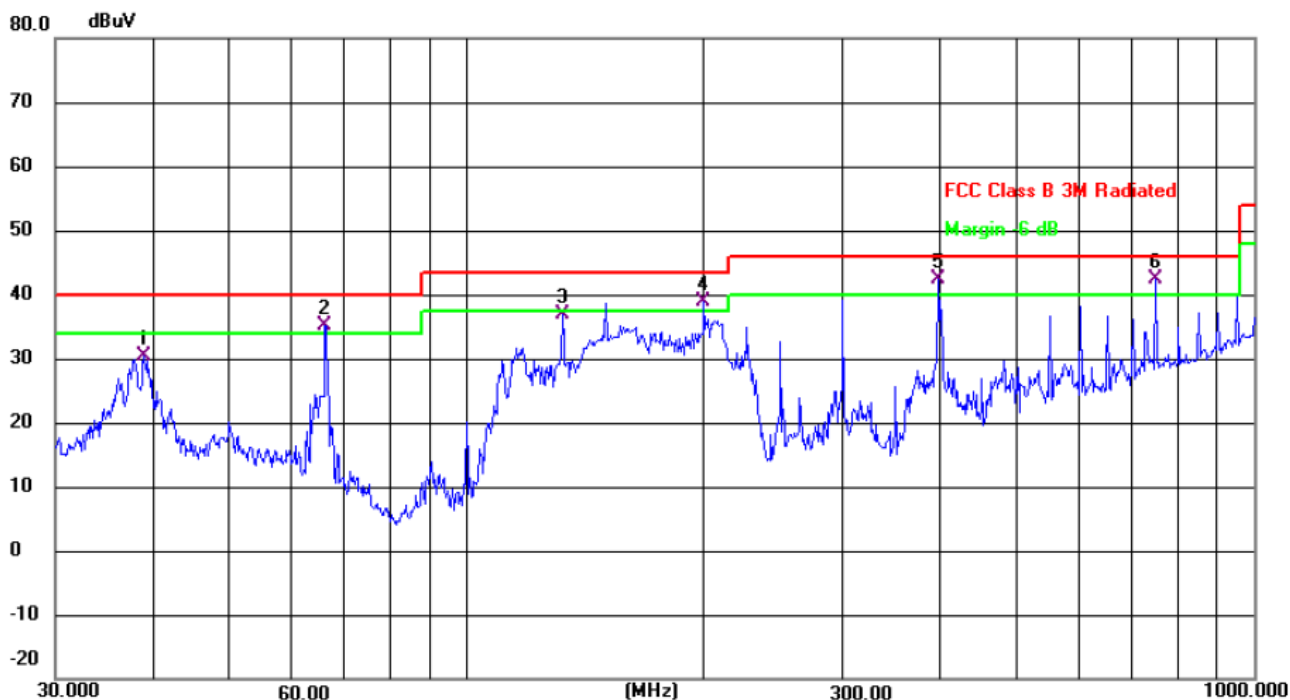

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		38.8877	38.75	-8.28	30.47	40.00	-9.53	QP
2	!	66.0340	44.54	-9.30	35.24	40.00	-4.76	QP
3		132.2204	49.24	-12.35	36.89	43.50	-6.61	QP
4	!	199.9855	47.94	-9.18	38.76	43.50	-4.74	QP
5	!	397.6333	46.32	-4.06	42.26	46.00	-3.74	QP
6	*	750.1082	39.25	3.07	42.32	46.00	-3.68	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-247)		

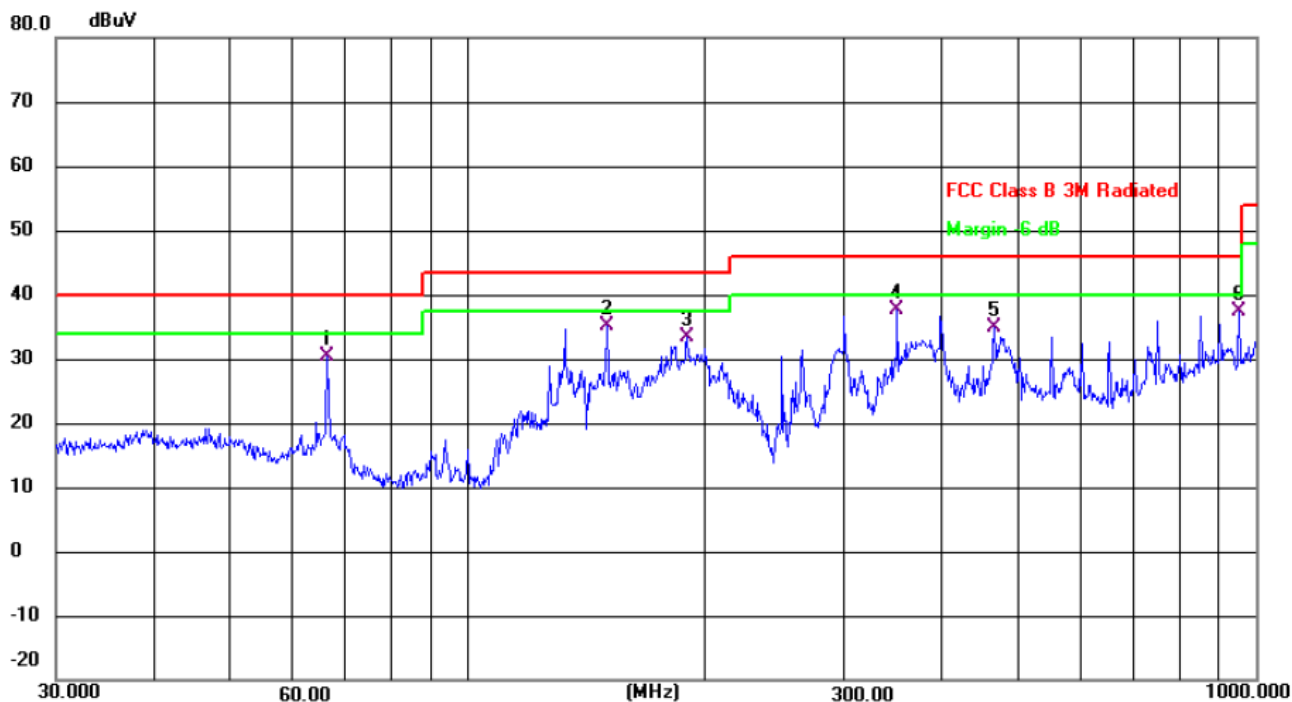

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin dB	Detector
1		66.2660	39.69	-9.37	30.32	40.00	-9.68	QP
2		150.0107	47.39	-12.34	35.05	43.50	-8.45	QP
3		189.7384	42.84	-9.46	33.38	43.50	-10.12	QP
4	*	350.4766	42.63	-5.03	37.60	46.00	-8.40	QP
5		465.5994	36.80	-1.92	34.88	46.00	-11.12	QP
6		952.0937	31.61	5.68	37.29	46.00	-8.71	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-247)		

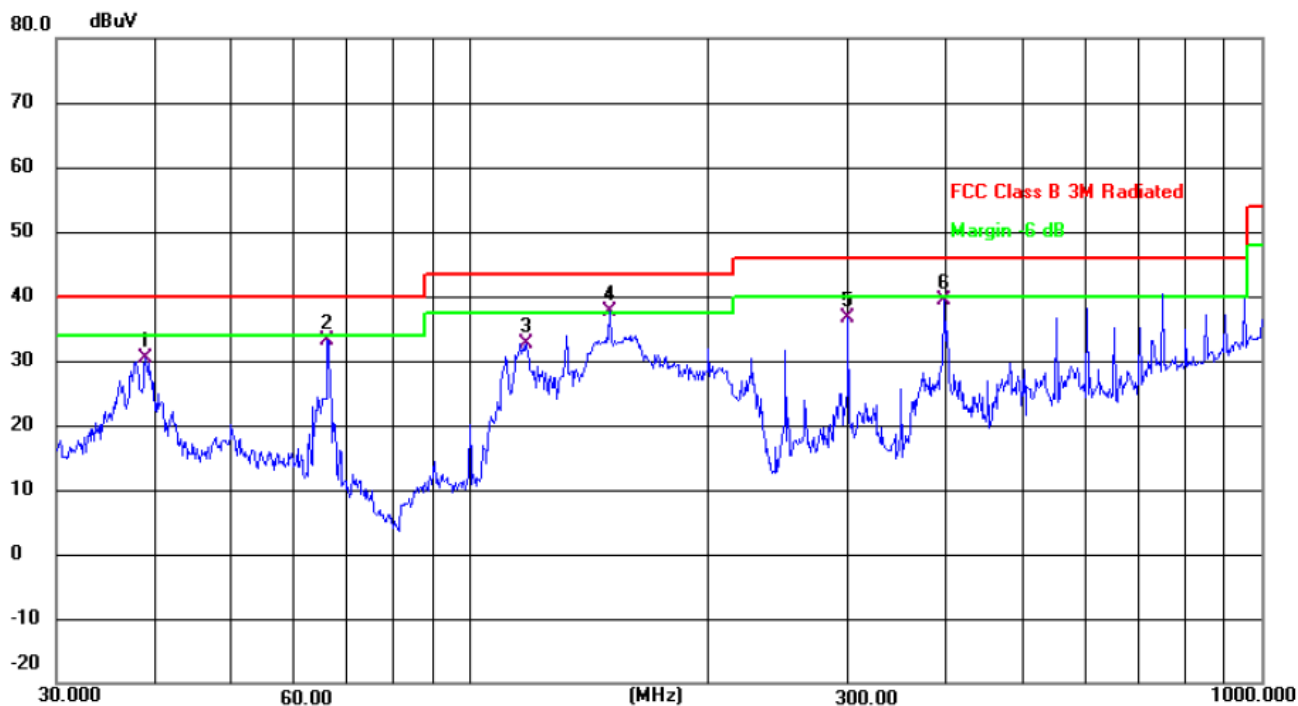

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dB	dB	
1		38.8877	38.75	-8.28	30.47	40.00	-9.53	QP
2		66.0340	42.54	-9.30	33.24	40.00	-6.76	QP
3		117.7724	43.01	-10.35	32.66	43.50	-10.84	QP
4	*	150.0107	49.87	-12.34	37.53	43.50	-5.97	QP
5		300.3672	42.68	-6.04	36.64	46.00	-9.36	QP
6		397.6333	43.32	-4.06	39.26	46.00	-6.74	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-407)		

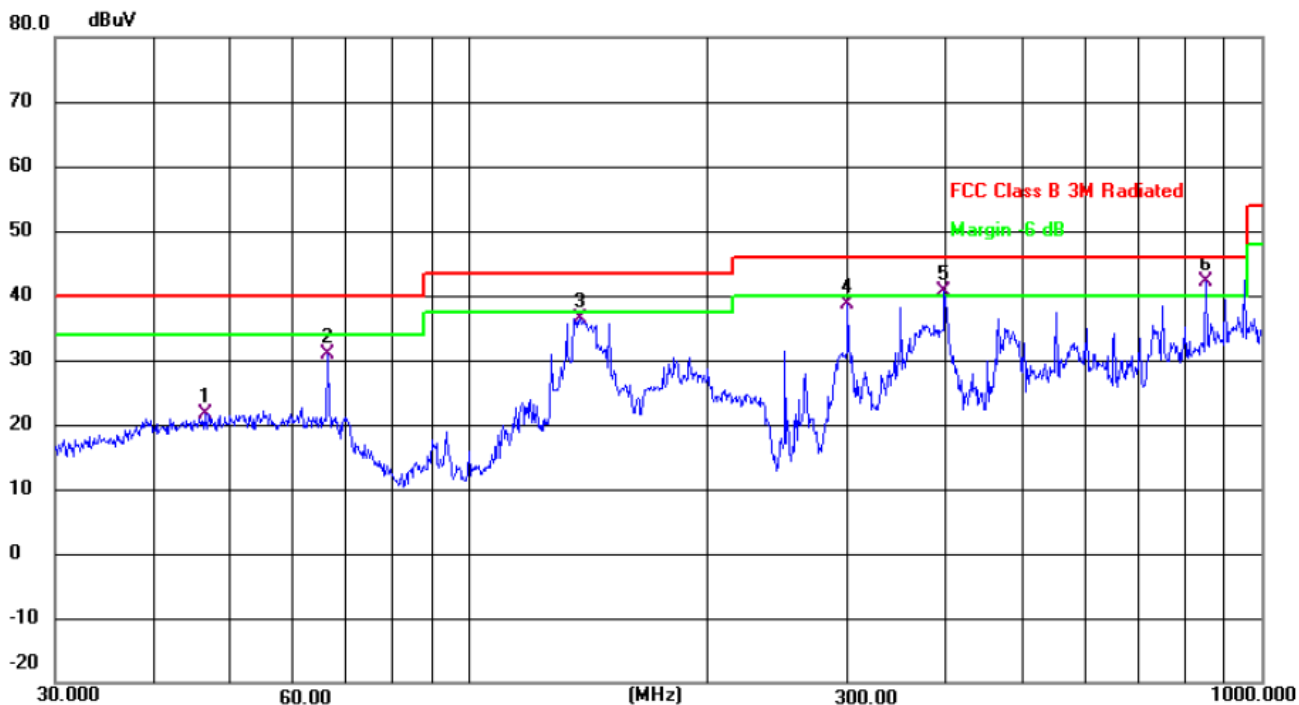

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dB	dB	
1		46.3402	28.19	-6.44	21.75	40.00	-18.25	QP
2		66.2660	40.19	-9.37	30.82	40.00	-9.18	QP
3		137.9028	48.96	-12.59	36.37	43.50	-7.13	QP
4		300.3672	44.56	-6.04	38.52	46.00	-7.48	QP
5	!	397.6333	44.60	-4.06	40.54	46.00	-5.46	QP
6	*	851.0353	37.94	4.31	42.25	46.00	-3.75	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-407)		

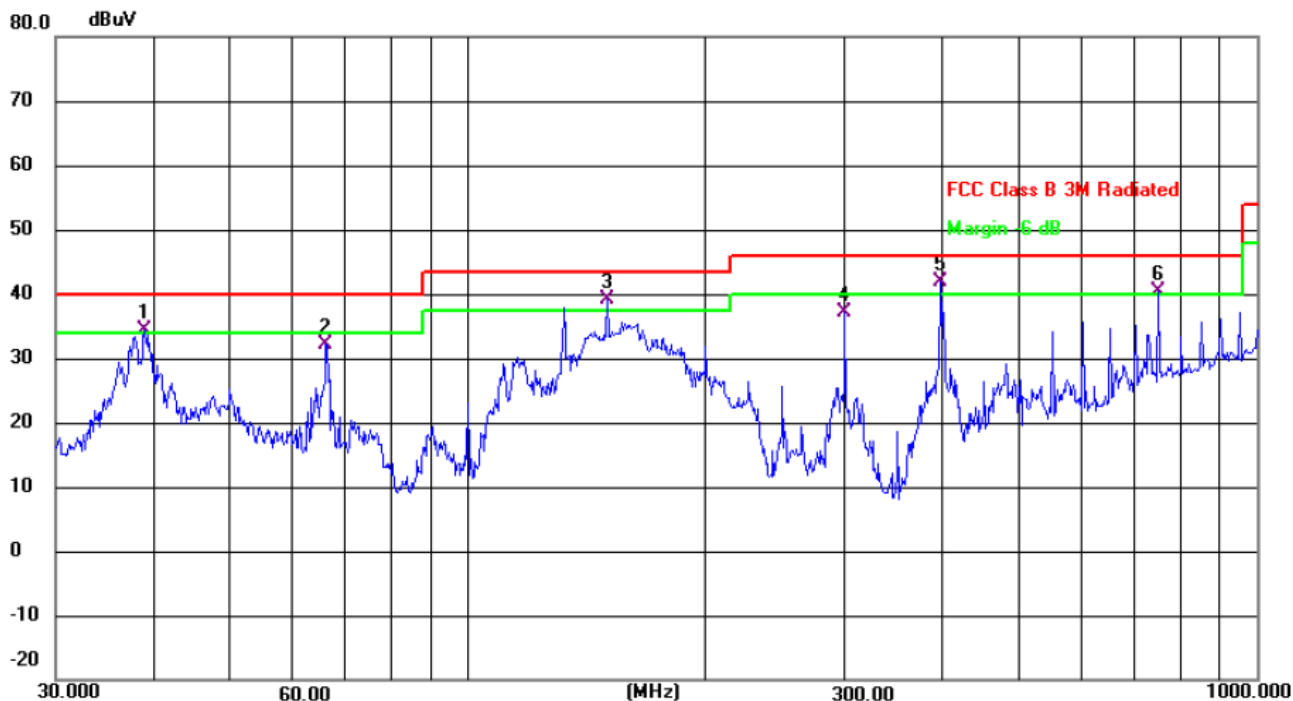

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1	!	38.8877	42.75	-8.28	34.47	40.00	-5.53	QP
2		66.0340	41.54	-9.30	32.24	40.00	-7.76	QP
3	!	150.0107	51.37	-12.34	39.03	43.50	-4.47	QP
4		300.3672	43.18	-6.04	37.14	46.00	-8.86	QP
5	*	397.6333	45.82	-4.06	41.76	46.00	-4.24	QP
6	!	750.1082	37.25	3.07	40.32	46.00	-5.68	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-507)		

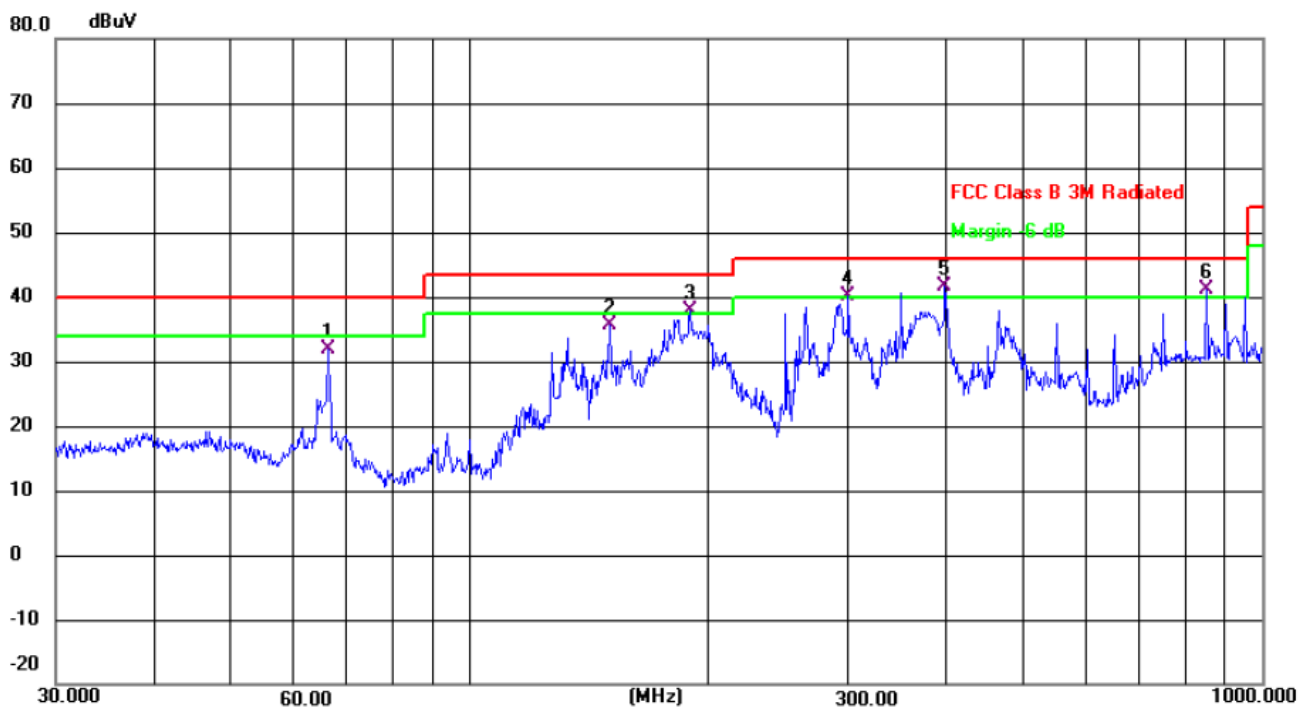

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		66.2660	41.19	-9.37	31.82	40.00	-8.18	QP
2		150.0107	47.89	-12.34	35.55	43.50	-7.95	QP
3	!	189.7384	47.34	-9.46	37.88	43.50	-5.62	QP
4	!	300.3672	46.06	-6.04	40.02	46.00	-5.98	QP
5	*	397.6333	45.60	-4.06	41.54	46.00	-4.46	QP
6	!	851.0353	36.94	4.31	41.25	46.00	-4.75	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 12V		
Test Mode :	Mode 3(Model: XSP-507)		

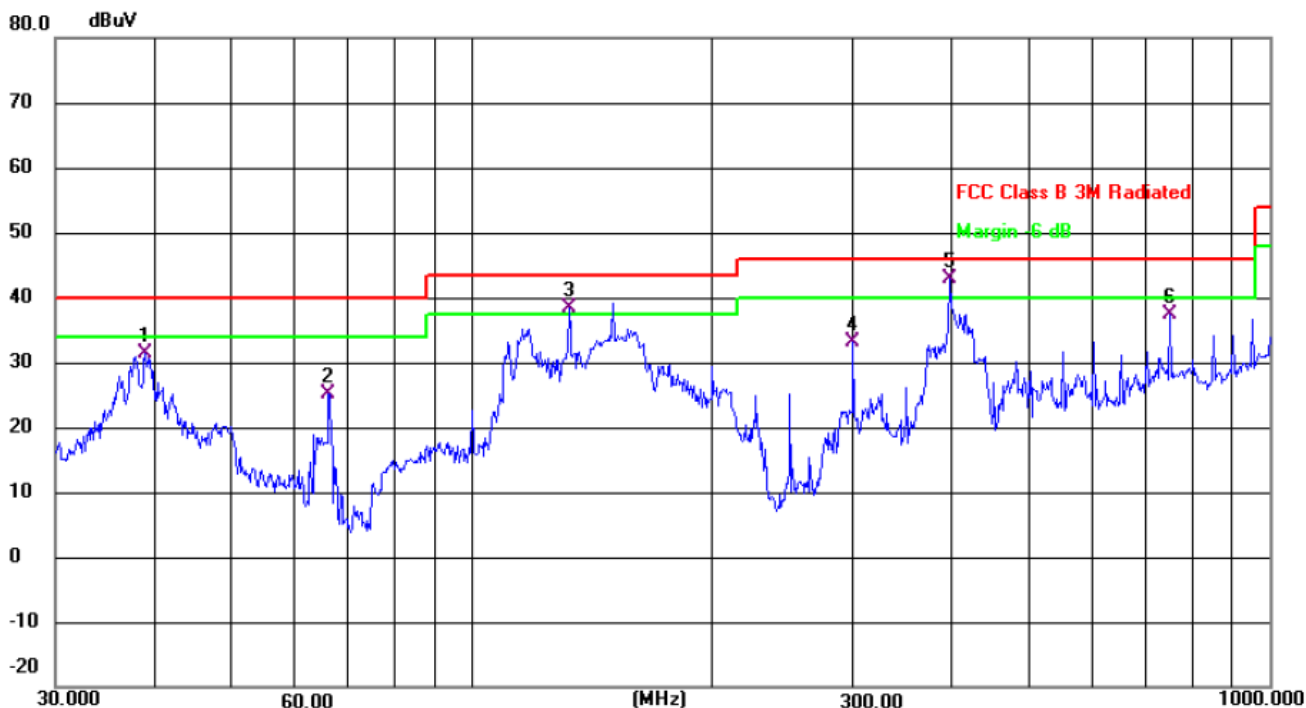

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dB	dB	
1		38.8877	39.75	-8.28	31.47	40.00	-8.53	QP
2		66.0340	34.54	-9.30	25.24	40.00	-14.76	QP
3	!	132.2204	50.74	-12.35	38.39	43.50	-5.11	QP
4		300.3672	39.18	-6.04	33.14	46.00	-12.86	QP
5	*	397.6333	46.82	-4.06	42.76	46.00	-3.24	QP
6		750.1082	34.25	3.07	37.32	46.00	-8.68	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;

**3.2.8 TEST RESULTS (1GHZ~25GHZ)**

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	4804.00	67.42	50.65	6.88	31.29	54.94	74	-19.06	PK
V	4804.00	55.91	50.65	6.88	31.29	43.43	54	-10.57	AV
V	7206.00	66.58	49.98	7.16	36.63	60.39	74	-13.61	PK
V	7206.00	46.3	49.98	7.16	36.63	40.11	54	-13.89	AV
V	16132.00	48.27	51.53	11.34	41.52	49.6	74	-24.4	PK
H	4804.00	66.19	50.65	6.88	31.29	53.71	74	-20.29	PK
H	4804.00	55.91	50.65	6.88	31.29	43.43	54	-10.57	AV
H	7206.00	69.69	49.98	7.16	36.63	63.5	74	-10.5	PK
H	7206.00	45.74	49.98	7.16	36.63	39.55	54	-14.45	AV
H	16132.00	48.27	51.53	11.34	41.52	49.6	74	-24.4	PK
operation frequency:2441									
V	4882.00	67.92	50.67	6.89	31.38	55.52	74	-18.48	PK
V	4882.00	55.6	50.67	6.89	31.38	43.2	54	-10.8	AV
V	7323.00	69.94	50.02	7.24	36.63	63.79	74	-10.21	PK
V	7323.00	46.69	50.02	7.24	36.63	40.54	54	-13.46	AV
V	16132.00	48.68	51.53	11.34	41.52	50.01	74	-23.99	PK
H	4882.00	66.31	50.67	6.89	31.38	53.91	74	-20.09	PK
H	4882.00	55.69	50.67	6.89	31.38	43.29	54	-10.71	AV
H	7323.00	69.58	50.02	7.24	36.63	63.43	74	-10.57	PK
H	7323.00	47.74	50.02	7.24	36.63	41.59	54	-12.41	AV
H	16132.00	48.9	51.53	11.34	41.52	50.23	74	-23.77	PK
operation frequency:2480									
V	4960.00	67.69	50.79	6.83	31.36	55.09	74	-18.91	PK
V	4960.00	55.58	50.79	6.83	31.36	42.98	54	-11.02	AV
V	7440.00	69.28	50.11	7.25	36.58	63	74	-11	PK
V	7440.00	46.74	50.11	7.25	36.58	40.46	54	-13.54	AV
V	16132.00	48.75	51.53	11.34	41.52	50.08	74	-23.92	PK
H	4960.00	66.3	50.79	6.83	31.36	53.7	74	-20.3	PK
H	4960.00	55.42	50.79	6.83	31.36	42.82	54	-11.18	AV
H	7440.00	69.91	50.11	7.25	36.58	63.63	74	-10.37	PK
H	7440.00	47.88	50.11	7.25	36.58	41.6	54	-12.4	AV
H	16132.00	48.72	51.53	11.34	41.52	50.05	74	-23.95	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

 $\pi/4$ DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	4804.00	67.64	50.65	6.88	31.29	55.16	74	-18.84	PK
V	4804.00	55.41	50.65	6.88	31.29	42.93	54	-11.07	AV
V	7206.00	66.42	49.98	7.16	36.63	60.23	74	-13.77	PK
V	7206.00	46.91	49.98	7.16	36.63	40.72	54	-13.28	AV
V	16132.00	49.68	51.53	11.34	41.52	51.01	74	-22.99	PK
H	4804.00	69.63	50.65	6.88	31.29	57.15	74	-16.85	PK
H	4804.00	52.69	50.65	6.88	31.29	40.21	54	-13.79	AV
H	7206.00	66.71	49.98	7.16	36.63	60.52	74	-13.48	PK
H	7206.00	47.27	49.98	7.16	36.63	41.08	54	-12.92	AV
H	16132.00	48.02	51.53	11.34	41.52	49.35	74	-24.65	PK
operation frequency:2441									
V	4882.00	67.61	50.67	6.89	31.38	55.21	74	-18.79	PK
V	4882.00	55.42	50.67	6.89	31.38	43.02	54	-10.98	AV
V	7323.00	66.74	50.02	7.24	36.63	60.59	74	-13.41	PK
V	7323.00	46.32	50.02	7.24	36.63	40.17	54	-13.83	AV
V	16132.00	48.58	51.53	11.34	41.52	49.91	74	-24.09	PK
H	4882.00	66.27	50.67	6.89	31.38	53.87	74	-20.13	PK
H	4882.00	55.69	50.67	6.89	31.38	43.29	54	-10.71	AV
H	7323.00	65.58	50.02	7.24	36.63	59.43	74	-14.57	PK
H	7323.00	47.42	50.02	7.24	36.63	41.27	54	-12.73	AV
H	16132.00	48.91	51.53	11.34	41.52	50.24	74	-23.76	PK
operation frequency:2480									
V	4960.00	67.62	50.79	6.83	31.36	55.02	74	-18.98	PK
V	4960.00	55.98	50.79	6.83	31.36	43.38	54	-10.62	AV
V	7440.00	66.94	50.11	7.25	36.58	60.66	74	-13.34	PK
V	7440.00	47.42	50.11	7.25	36.58	41.14	54	-12.86	AV
V	16132.00	46.28	51.53	11.34	41.52	47.61	74	-26.39	PK
H	4960.00	66.34	50.79	6.83	31.36	53.74	74	-20.26	PK
H	4960.00	54.87	50.79	6.83	31.36	42.27	54	-11.73	AV
H	7440.00	66.03	50.11	7.25	36.58	59.75	74	-14.25	PK
H	7440.00	45.69	50.11	7.25	36.58	39.41	54	-14.59	AV
H	16132.00	47.64	51.53	11.34	41.52	48.97	74	-25.03	PK
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



8DPSK

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	4804.00	66.27	50.65	6.88	31.29	53.79	74	-20.21	PK
V	4804.00	55.42	50.65	6.88	31.29	42.94	54	-11.06	AV
V	7206.00	66.31	49.98	7.16	36.63	60.12	74	-13.88	PK
V	7206.00	46.79	49.98	7.16	36.63	40.6	54	-13.4	AV
V	16132.00	46.8	51.53	11.34	41.52	48.13	74	-25.87	PK
H	4804.00	66.69	50.65	6.88	31.29	54.21	74	-19.79	PK
H	4804.00	55.27	50.65	6.88	31.29	42.79	54	-11.21	AV
H	7206.00	64.64	49.98	7.16	36.63	58.45	74	-15.55	PK
H	7206.00	47.72	49.98	7.16	36.63	41.53	54	-12.47	AV
H	16132.00	47.91	51.53	11.34	41.52	49.24	74	-24.76	PK
operation frequency:2441									
V	4882.00	66.27	50.67	6.89	31.38	53.87	74	-20.13	PK
V	4882.00	54.69	50.67	6.89	31.38	42.29	54	-11.71	AV
V	7323.00	65.91	50.02	7.24	36.63	59.76	74	-14.24	PK
V	7323.00	47.72	50.02	7.24	36.63	41.57	54	-12.43	AV
V	16132.00	47.27	51.53	11.34	41.52	48.6	74	-25.4	PK
H	4882.00	65.91	50.67	6.89	31.38	53.51	74	-20.49	PK
H	4882.00	53.42	50.67	6.89	31.38	41.02	54	-12.98	AV
H	7323.00	65.58	50.02	7.24	36.63	59.43	74	-14.57	PK
H	7323.00	46.7	50.02	7.24	36.63	40.55	54	-13.45	AV
H	16132.00	46.87	51.53	11.34	41.52	48.2	74	-25.8	PK
operation frequency:2480									
V	4960.00	67.42	50.79	6.83	31.36	54.82	74	-19.18	PK
V	4960.00	54.91	50.79	6.83	31.36	42.31	54	-11.69	AV
V	7440.00	64.72	50.11	7.25	36.58	58.44	74	-15.56	PK
V	7440.00	46.7	50.11	7.25	36.58	40.42	54	-13.58	AV
V	16132.00	48.94	51.53	11.34	41.52	50.27	74	-23.73	PK
H	4960.00	67.39	50.79	6.83	31.36	54.79	74	-19.21	PK
H	4960.00	54.31	50.79	6.83	31.36	41.71	54	-12.29	AV
H	7440.00	65.34	50.11	7.25	36.58	59.06	74	-14.94	PK
H	7440.00	47.19	50.11	7.25	36.58	40.91	54	-13.09	AV
H	16132.00	47.89	51.53	11.34	41.52	49.22	74	-24.78	PK
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


The horizontal and vertical polarities of the antenna were tested, and a pre-test was conducted on the EUT placement as three orthogonal axes X,Y,Z. The worst display of the test results was the Y-axis. The worst case emissions were reported.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

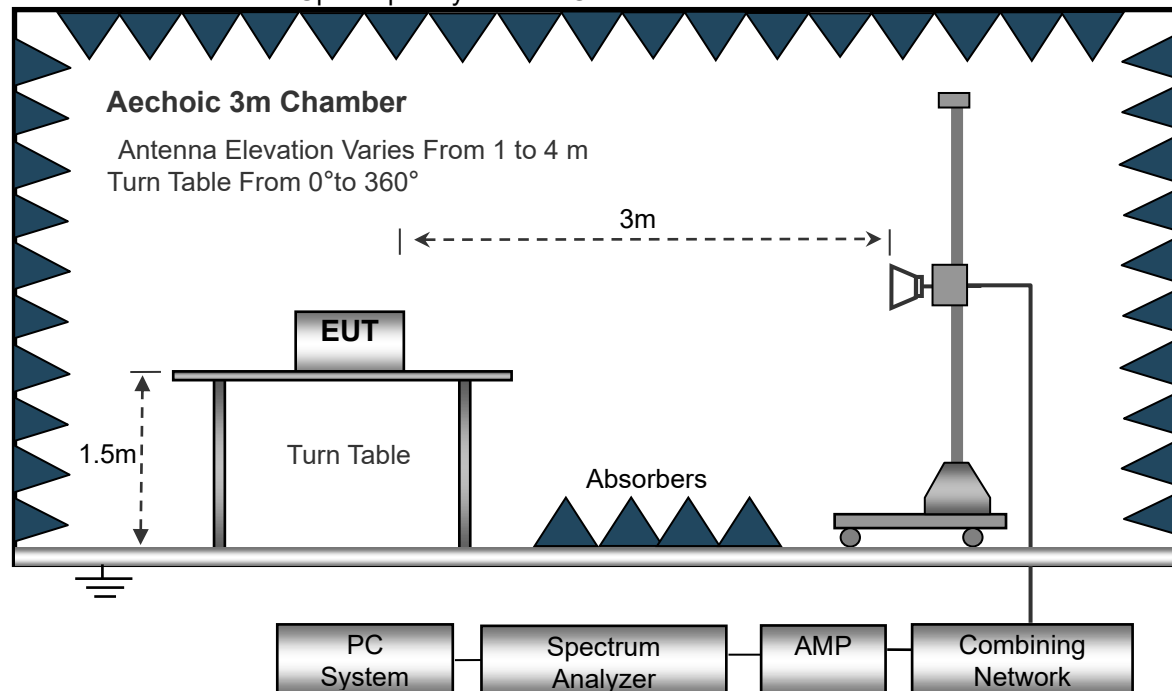

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2390.00	77.23	52.12	2.73	27.38	55.22	74	-18.78	PK
V	2390.00	65.6	52.12	2.73	27.38	43.59	54	-10.41	AV
V	2400.00	76.23	52.16	2.78	27.41	54.26	74	-19.74	PK
V	2400.00	64.57	52.16	2.78	27.41	42.6	54	-11.4	AV
H	2390.00	76.26	52.12	2.73	27.38	54.25	74	-19.75	PK
H	2390.00	65.23	52.12	2.73	27.38	43.22	54	-10.78	AV
H	2400.00	76.12	52.16	2.78	27.41	54.15	74	-19.85	PK
H	2400.00	65.67	52.16	2.78	27.41	43.7	54	-10.3	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2480									
V	2483.50	76.92	52.23	2.86	27.44	54.99	74	-19.01	PK
V	2483.50	65.7	52.23	2.86	27.44	43.77	54	-10.23	AV
V	2500.00	76.23	52.26	2.88	27.49	54.34	74	-19.66	PK
V	2500.00	65.04	52.26	2.88	27.49	43.15	54	-10.85	AV
H	2483.50	76.09	52.23	2.86	27.44	54.16	74	-19.84	PK
H	2483.50	66.17	52.23	2.86	27.44	44.24	54	-9.76	AV
H	2500.00	78.23	52.26	2.88	27.49	56.34	74	-17.66	PK
H	2500.00	67.07	52.26	2.88	27.49	45.18	54	-8.82	AV

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

 $\pi/4$ DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2390.00	75.92	52.12	2.73	27.38	53.91	74	-20.09	PK
V	2390.00	65.34	52.12	2.73	27.38	43.33	54	-10.67	AV
V	2400.00	76.29	52.16	2.78	27.41	54.32	74	-19.68	PK
V	2400.00	64.04	52.16	2.78	27.41	42.07	54	-11.93	AV
H	2390.00	76.26	52.12	2.73	27.38	54.25	74	-19.75	PK
H	2390.00	64.96	52.12	2.73	27.38	42.95	54	-11.05	AV
H	2400.00	76.34	52.16	2.78	27.41	54.37	74	-19.63	PK
H	2400.00	65.59	52.16	2.78	27.41	43.62	54	-10.38	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2480									
V	2483.50	76.22	52.23	2.86	27.44	54.29	74	-19.71	PK
V	2483.50	65.27	52.23	2.86	27.44	43.34	54	-10.66	AV
V	2500.00	75.96	52.26	2.88	27.49	54.07	74	-19.93	PK
V	2500.00	65.62	52.26	2.88	27.49	43.73	54	-10.27	AV
H	2483.50	76.56	52.23	2.86	27.44	54.63	74	-19.37	PK
H	2483.50	65.27	52.23	2.86	27.44	43.34	54	-10.66	AV
H	2500.00	76.23	52.26	2.88	27.49	54.34	74	-19.66	PK
H	2500.00	65.59	52.26	2.88	27.49	43.7	54	-10.3	AV

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8DPSK

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402									
V	2390.00	76.07	52.12	2.73	27.38	54.06	74	-19.94	PK
V	2390.00	65.23	52.12	2.73	27.38	43.22	54	-10.78	AV
V	2400.00	77.67	52.16	2.78	27.41	55.7	74	-18.3	PK
V	2400.00	65.57	52.16	2.78	27.41	43.6	54	-10.4	AV
H	2390.00	77.56	52.12	2.73	27.38	55.55	74	-18.45	PK
H	2390.00	64.92	52.12	2.73	27.38	42.91	54	-11.09	AV
H	2400.00	75.94	52.16	2.78	27.41	53.97	74	-20.03	PK
H	2400.00	65.29	52.16	2.78	27.41	43.32	54	-10.68	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2480									
V	2483.50	76.92	52.23	2.86	27.44	54.99	74	-19.01	PK
V	2483.50	65.04	52.23	2.86	27.44	43.11	54	-10.89	AV
V	2500.00	76.56	52.26	2.88	27.49	54.67	74	-19.33	PK
V	2500.00	65.04	52.26	2.88	27.49	43.15	54	-10.85	AV
H	2483.50	77.26	52.23	2.86	27.44	55.33	74	-18.67	PK
H	2483.50	65.35	52.23	2.86	27.44	43.42	54	-10.58	AV
H	2500.00	75.99	52.26	2.88	27.49	54.1	74	-19.9	PK
H	2500.00	65.96	52.26	2.88	27.49	44.07	54	-9.93	AV

Remark:

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

3.4.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

3.4.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

Set the RBW = 100KHz.

Set the VBW = 300KHz.

Sweep time = auto couple.

Detector function = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

3.4.3 DEVIATION FROM STANDARD

No deviation.

3.4.4 TEST SETUP







3.4.5 EUT OPERATION CONDITIONS





The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.4.6 TEST RESULTS







For Conducted
Unhopping
GFSK

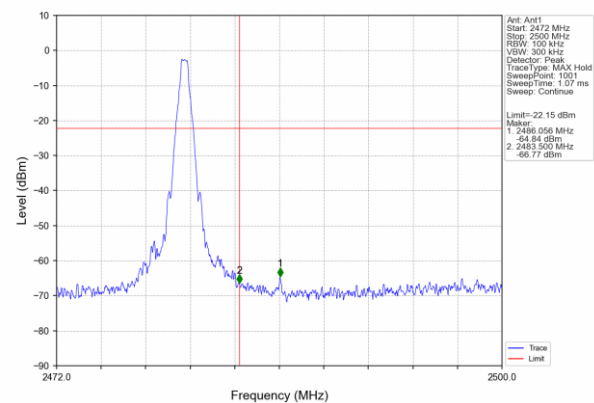
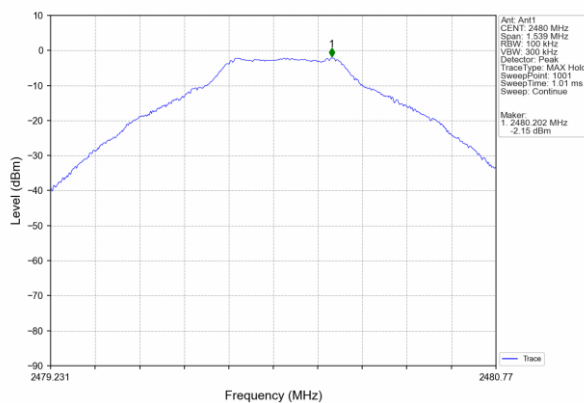
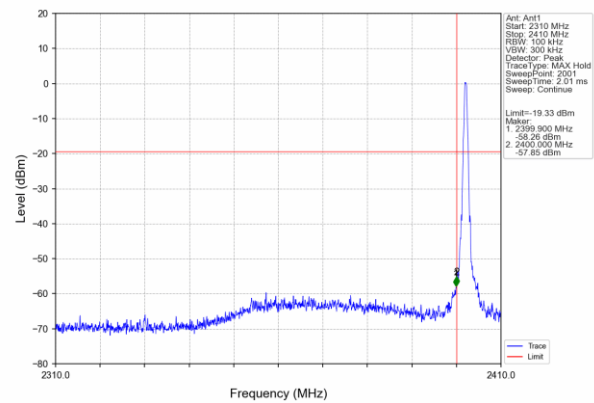
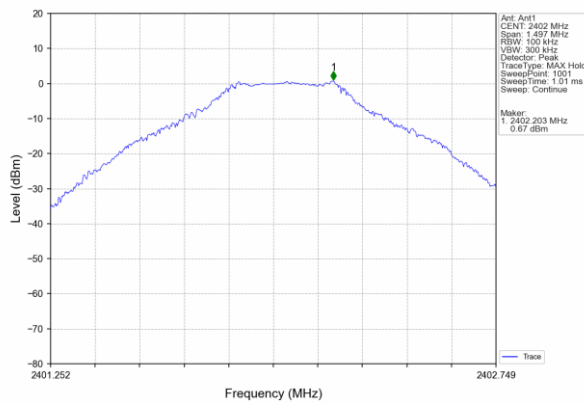


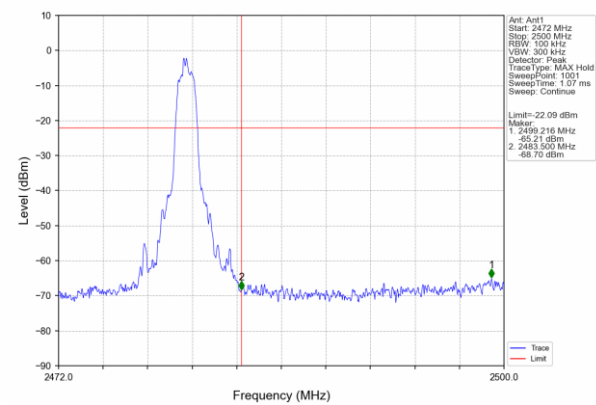
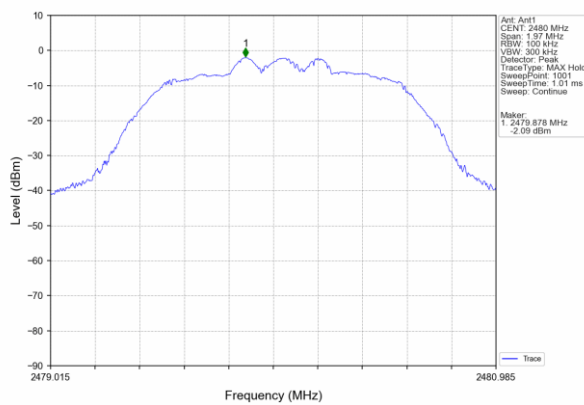
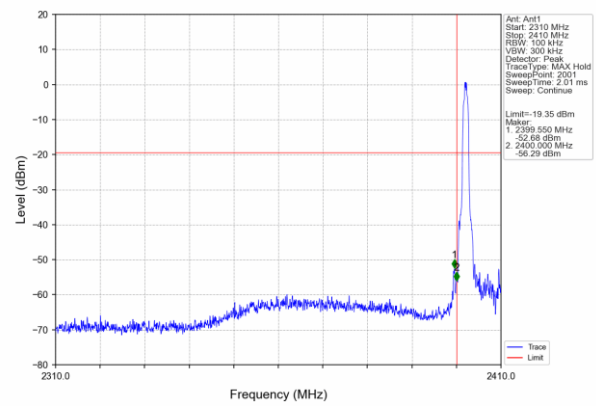
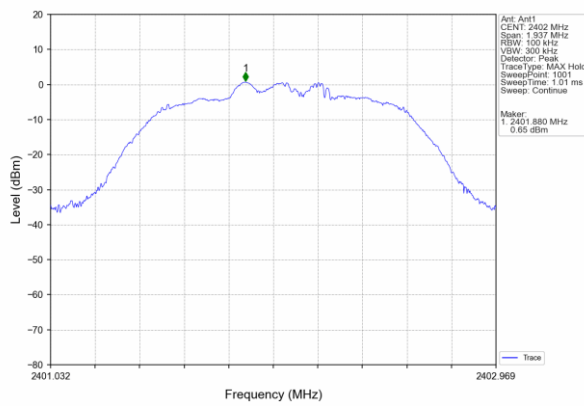
 $\pi/4$ DQPSK



8DPSK

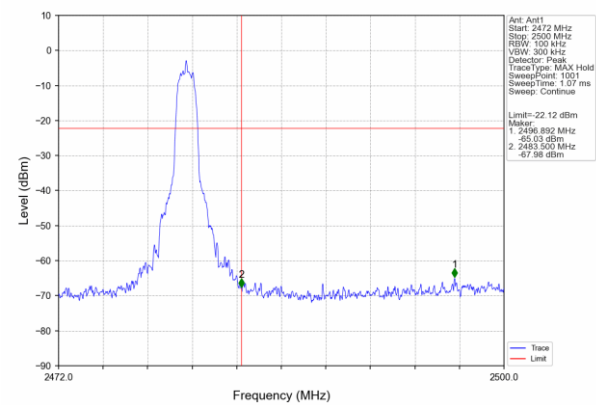
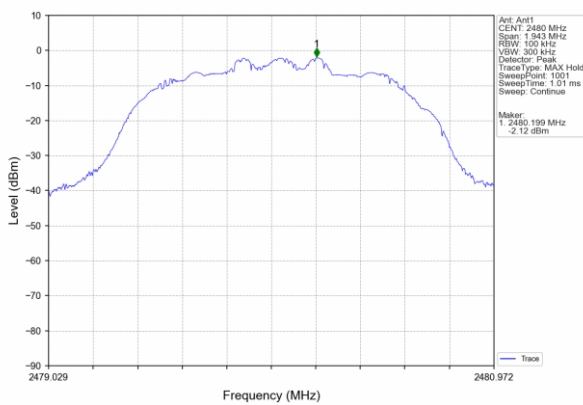
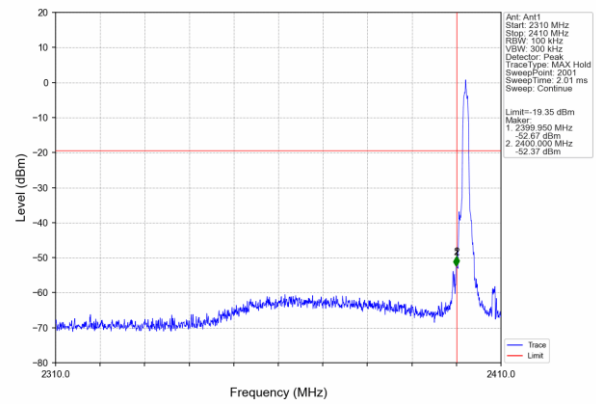
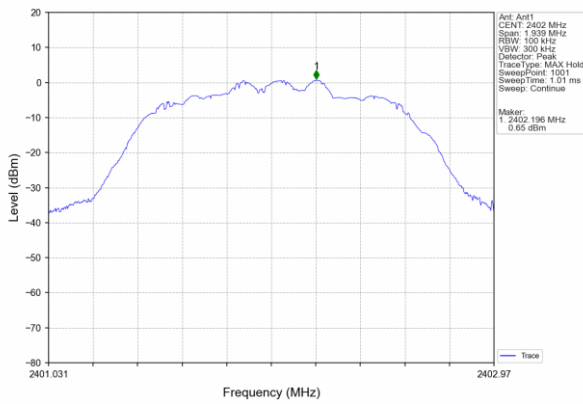


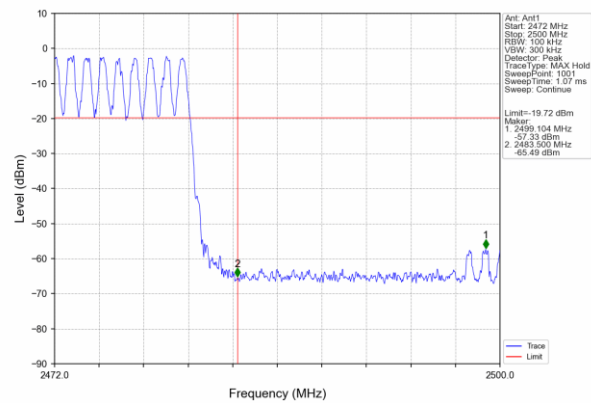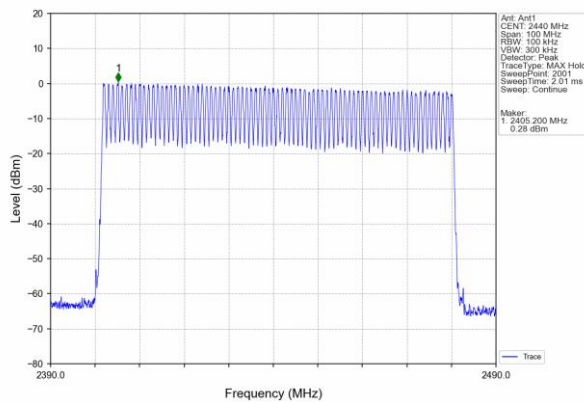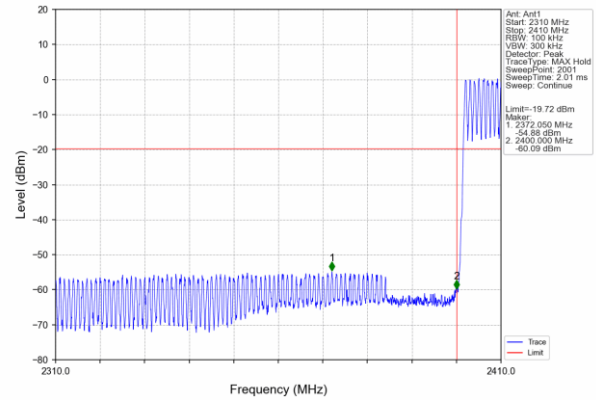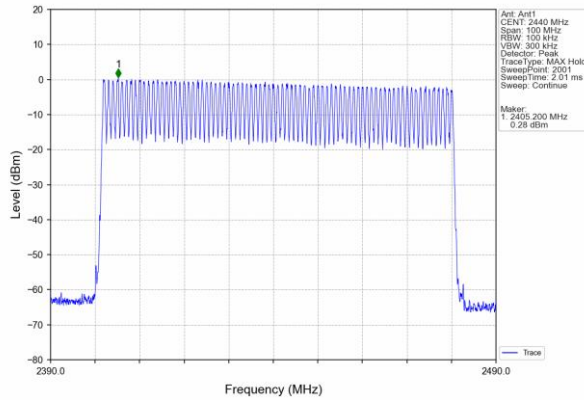Hopping Mode
GFSK

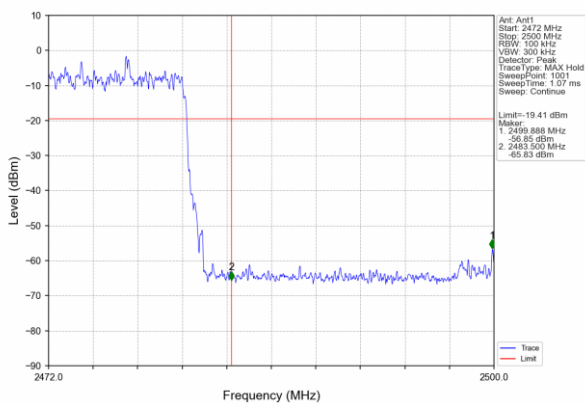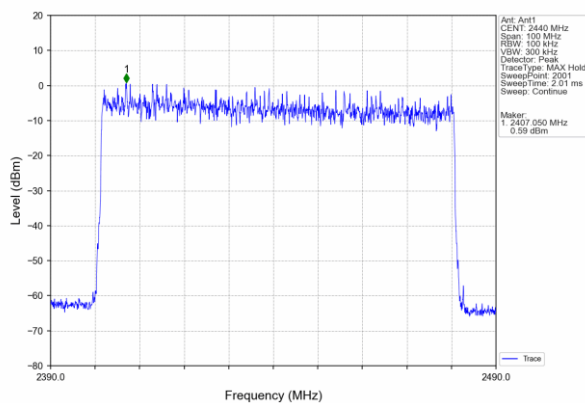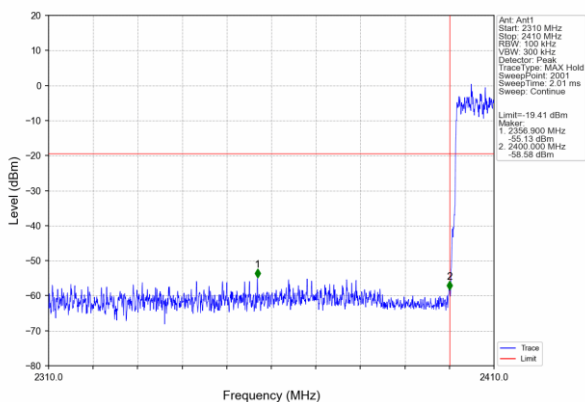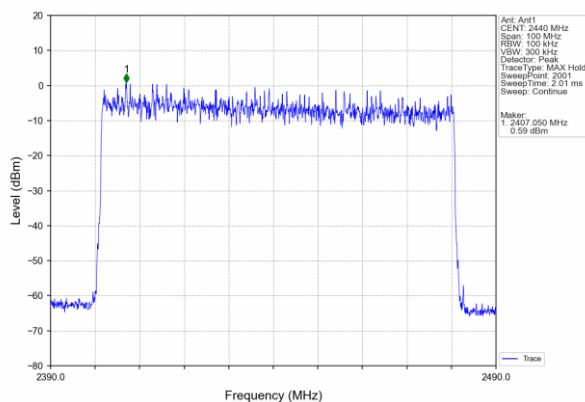 $\pi/4$ DQPSK



8DPSK

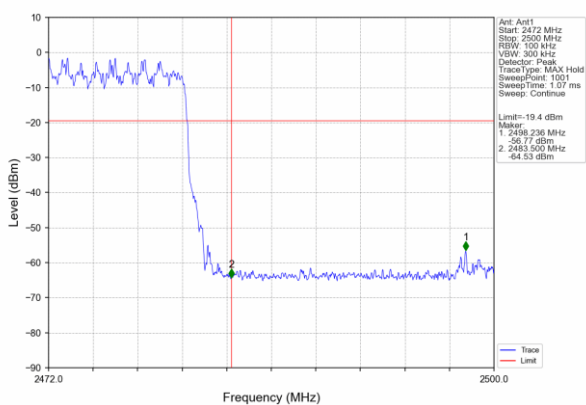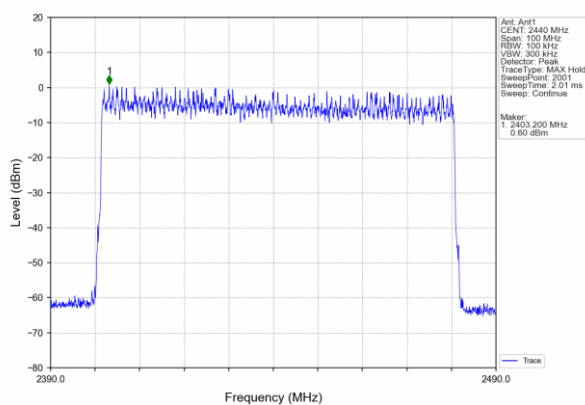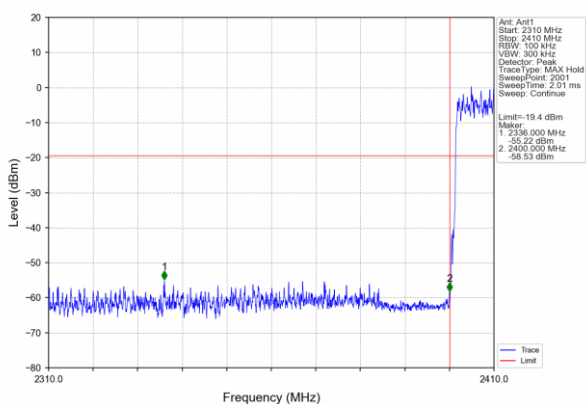
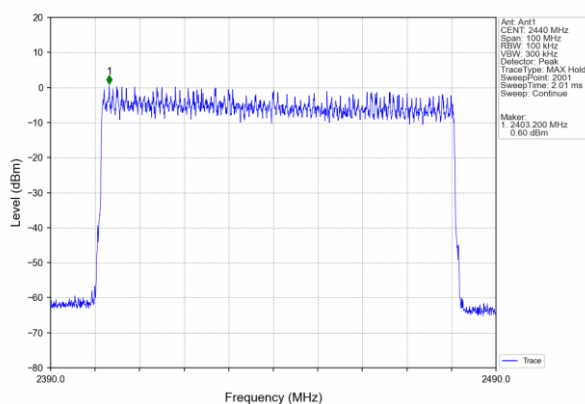






For Conducted

During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.



Test channel:	Lowest channel
---------------	----------------

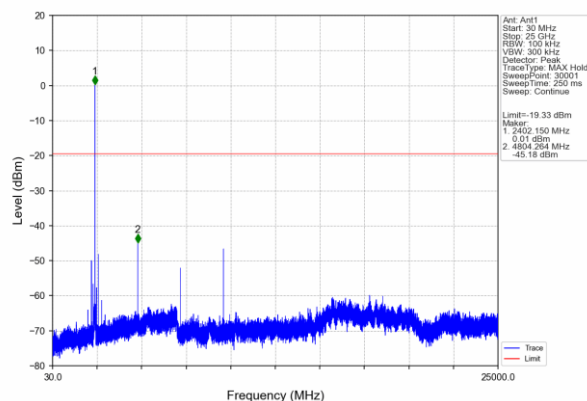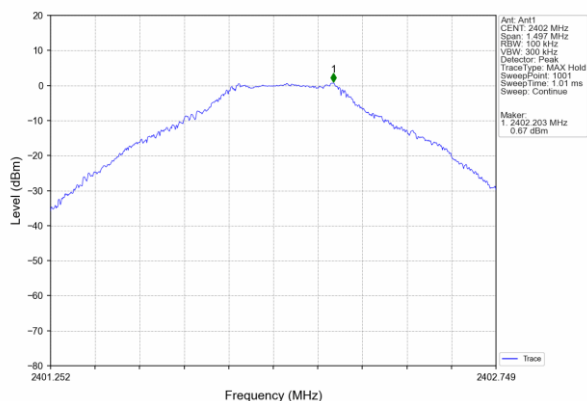

Test channel:	Middle channel
---------------	----------------

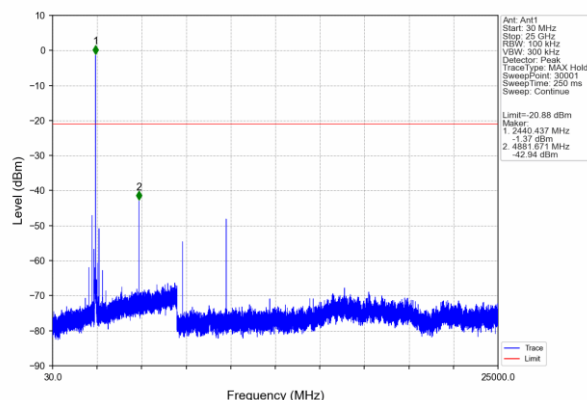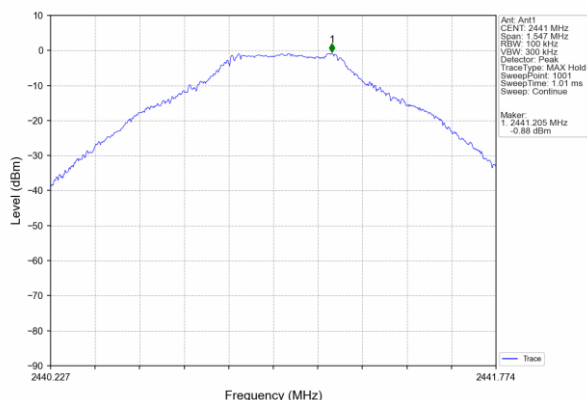

Test channel:	Highest channel
---------------	-----------------

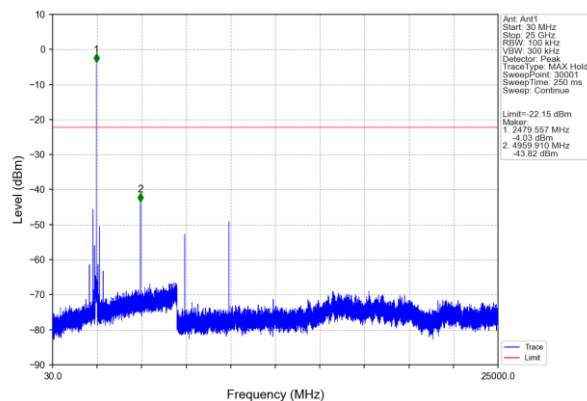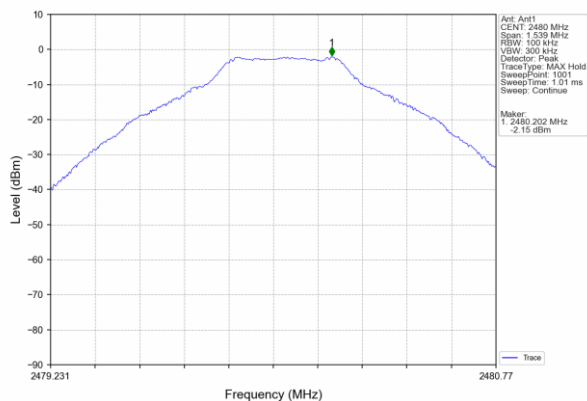



4. PEAK OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	20.96dBm	2400-2483.5	PASS

4.1.1 TEST PROCEDURE


Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW>20 dB bandwidth of the emission being measured.
- 3) VBW $\geq$ RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

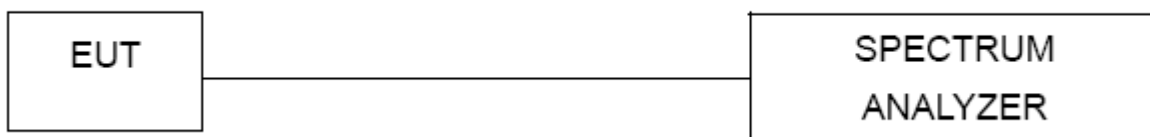


4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.1.5 TEST RESULTS**


Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Mode :	CH00/ CH39 /CH78 (1M/2M/3Mbps Mode)

Mode	Test Channel	Peak Output Power (dBm)	LIMIT (dBm)
GFSK	CH00	0.85	20.96
	CH39	-0.58	20.96
	CH78	-1.88	20.96
$\pi/4$ DQPSK	CH00	1.71	20.96
	CH39	0.31	20.96
	CH78	-0.97	20.96
8DPSK	CH00	2.09	20.96
	CH39	0.64	20.96
	CH78	-0.66	20.96

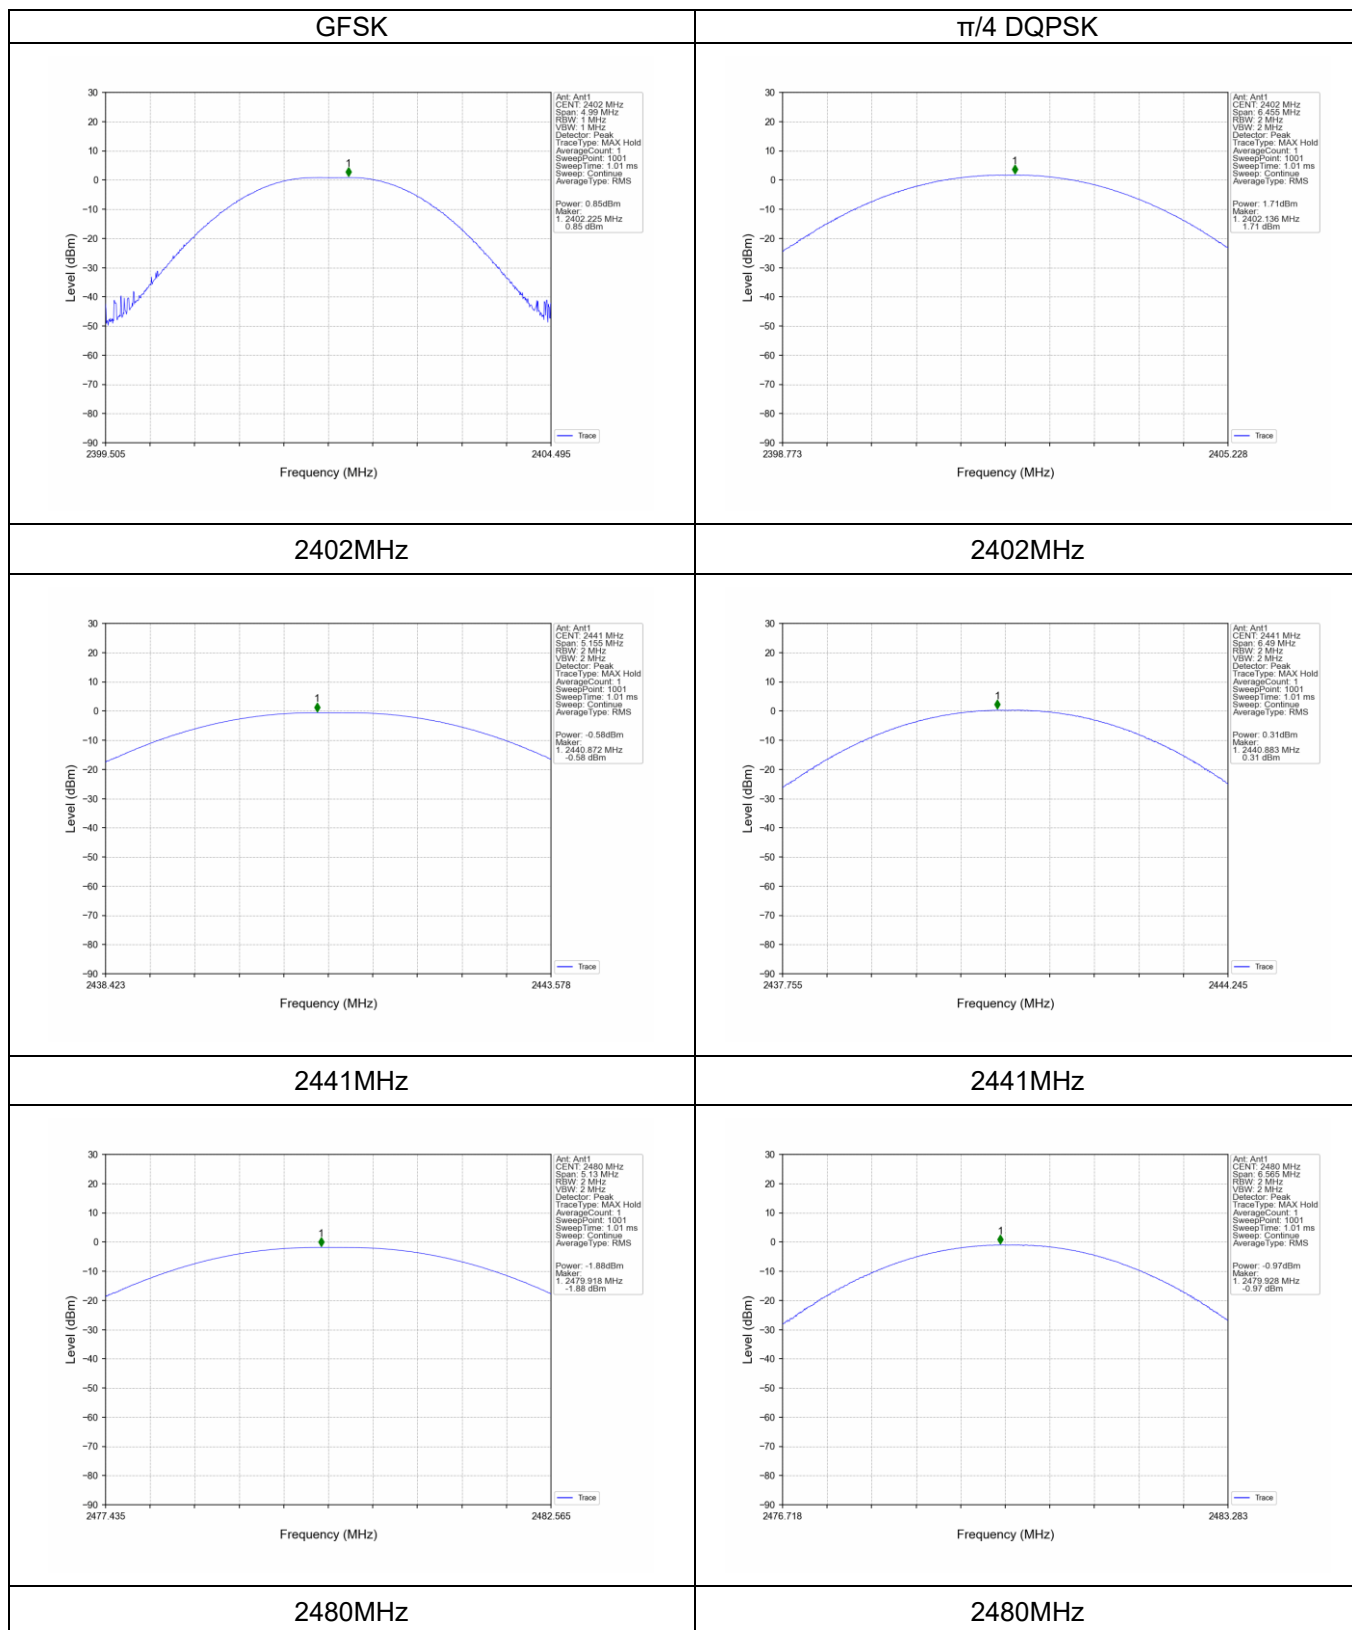





8DPSK

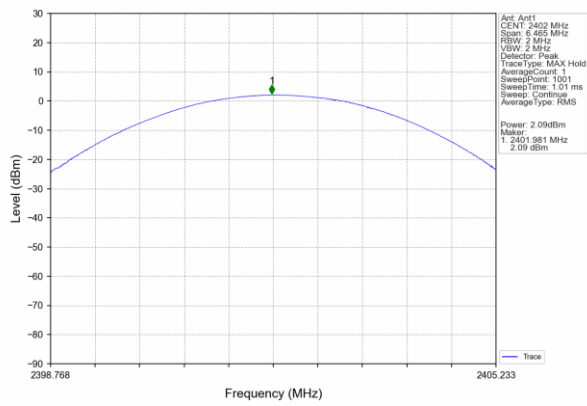

2402MHz

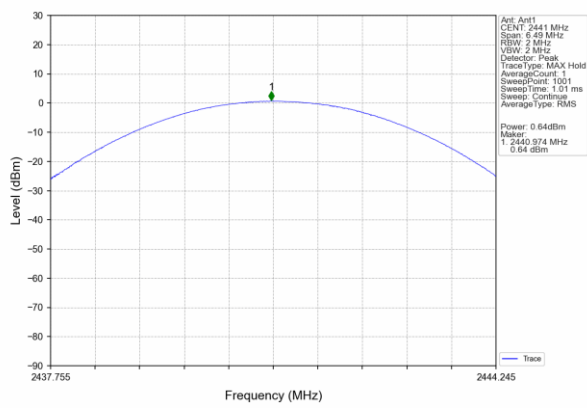

2441MHz

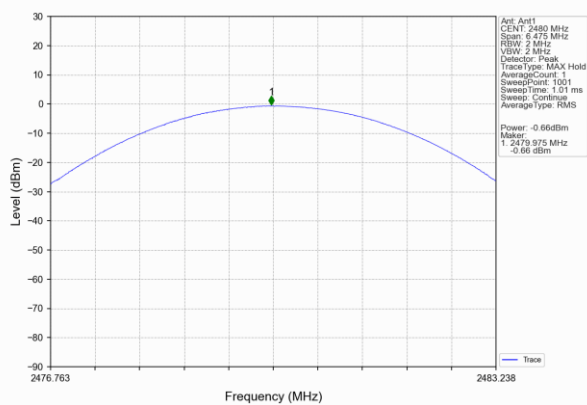

2480MHz



5. NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥ 15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW= 300KHz
VB	VBW $\geq$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 300KHz, VBW $\geq$ RBW, Sweep time = Auto.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS


Test Mode :	Hopping Mode		
Number of Hopping Channel	GFSK	79	
	$\pi/4$ DQPSK	79	
	8DPSK	79	




GFSK

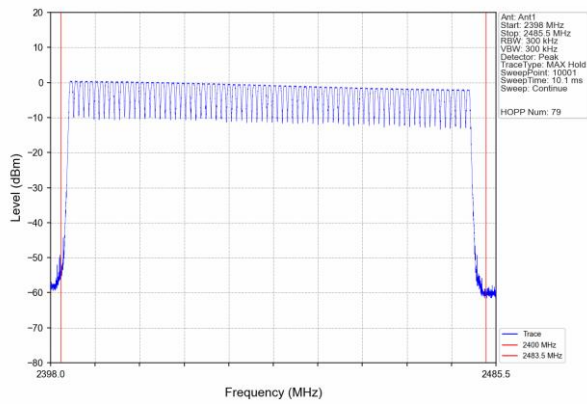

$\pi/4$ DQPSK

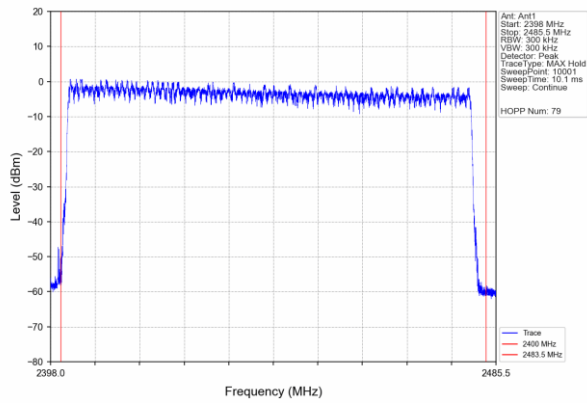

8DPSK

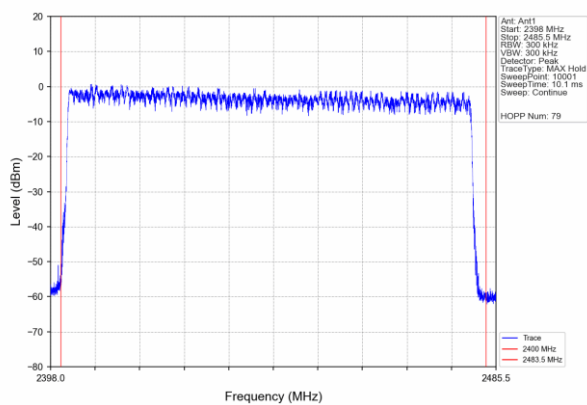



6. BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C	
Section	Test Item
15.247(a)(2)	Bandwidth


6.1.1 TEST PROCEDURE

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

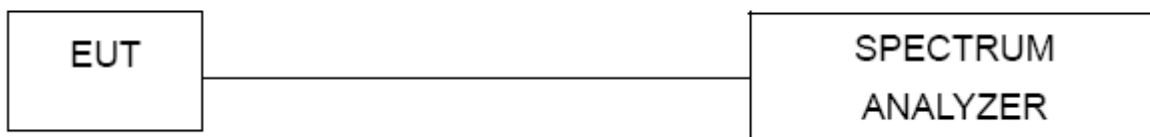


6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


**6.1.5 TEST RESULTS**

	Frequency (MHz)	20dB Bandwidth (MHz)	Result
GFSK	2402	0.998	Pass
	2441	1.031	Pass
	2480	1.026	Pass
$\pi/4$ DQPSK	2402	1.291	Pass
	2441	1.298	Pass
	2480	1.313	Pass
8DPSK	2402	1.293	Pass
	2441	1.298	Pass
	2480	1.295	Pass

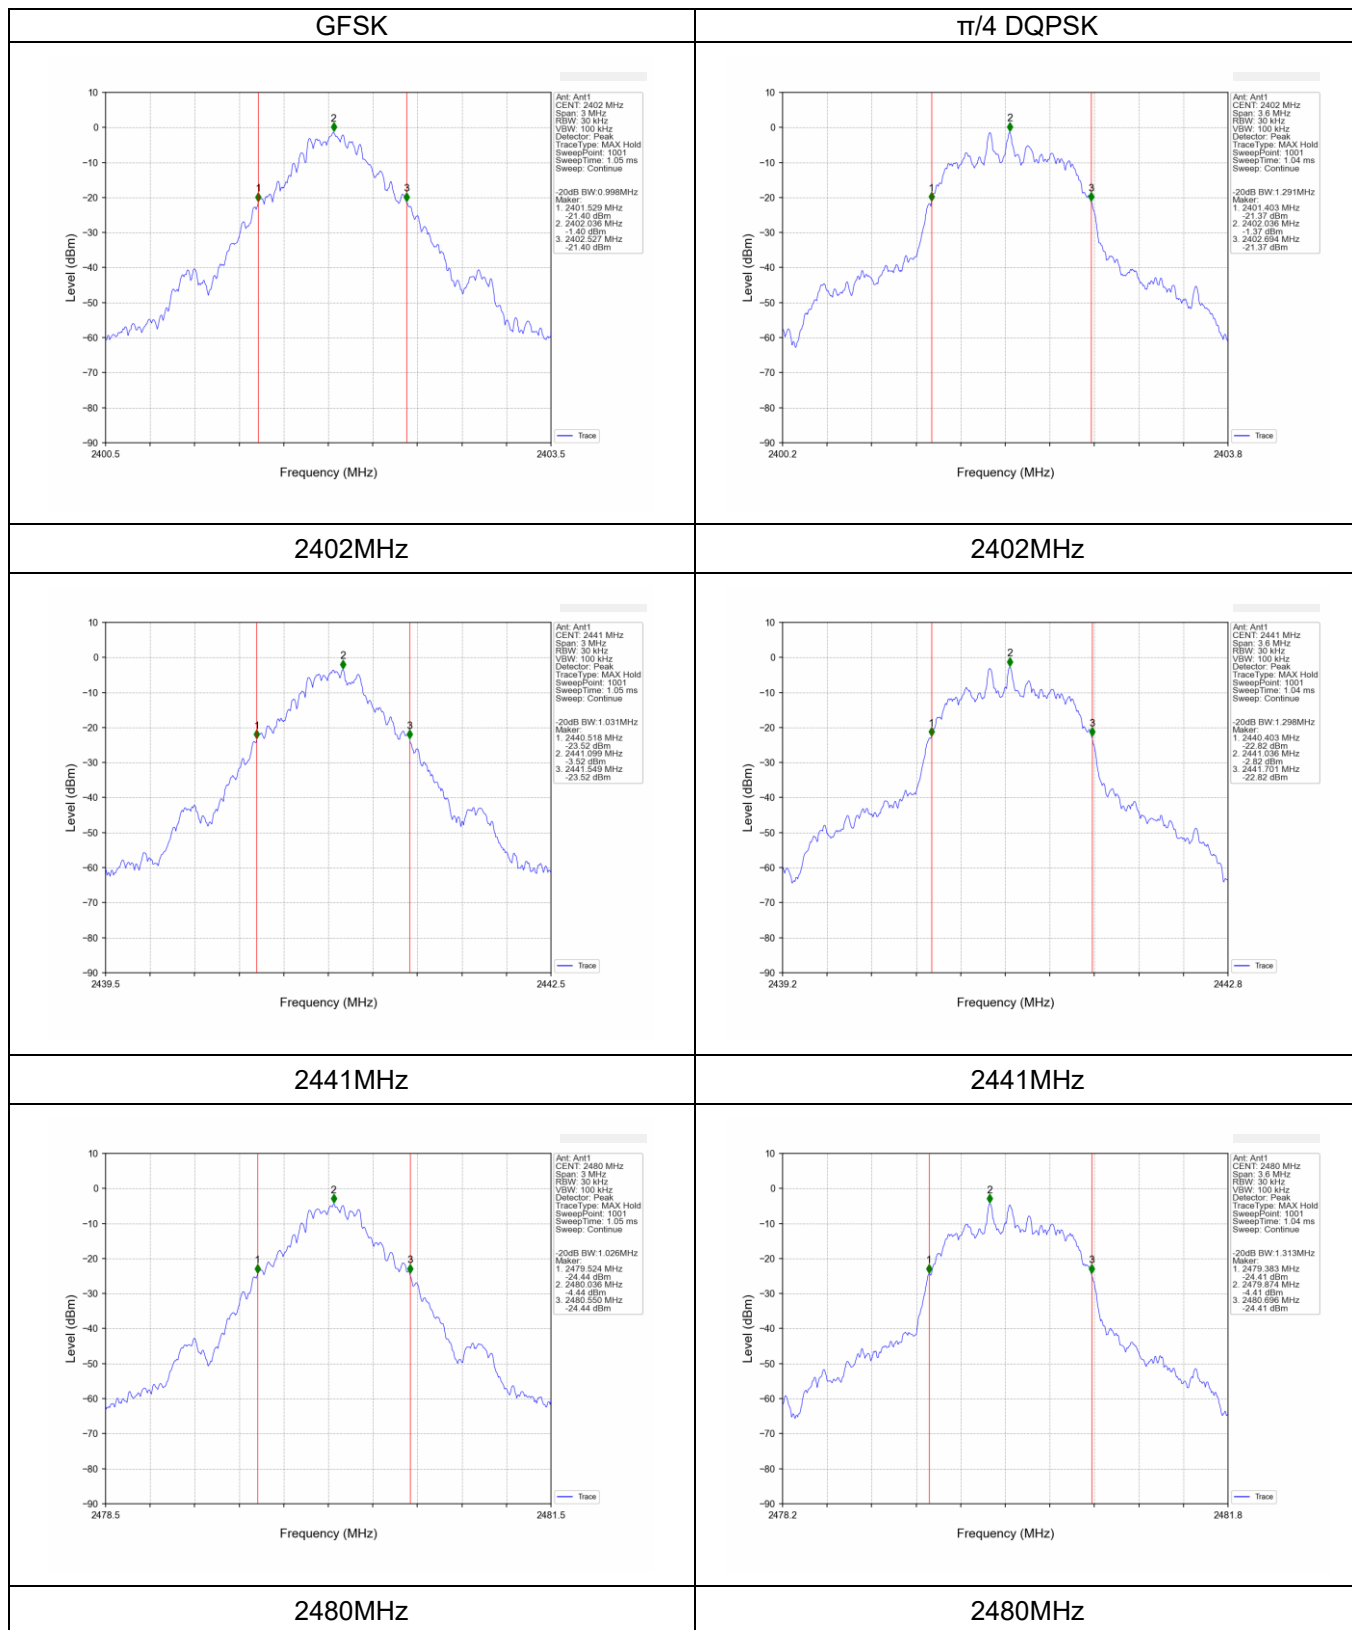





8DPSK

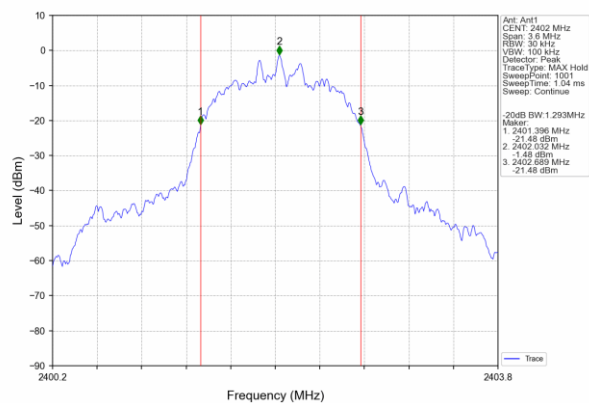

2402MHz

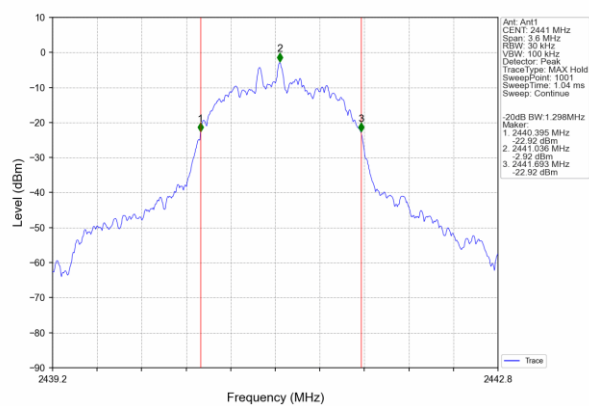

2441MHz

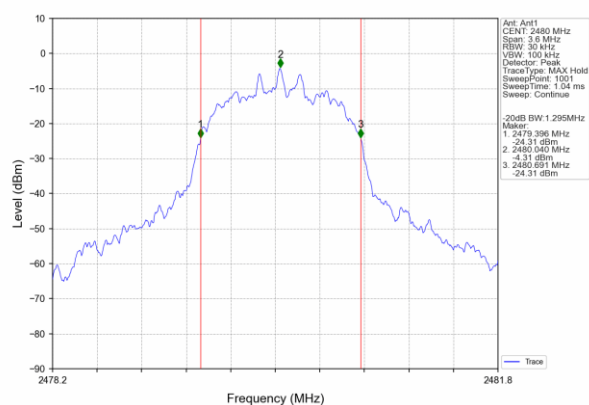

2480MHz



7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	300 kHz (Channel Separation)
VB	300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.1.1 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 300 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

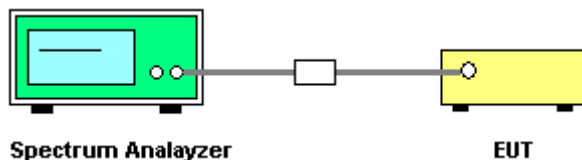

7.1.4 EUT OPERATION CONDITIONS


The EUT was programmed to be in continuously transmitting mode.

7.1.5 TEST RESULTS


Test Mode	Ch. Separation (MHz)	Max 20dB bandwidth(MHz)	Limit (MHz)	Result
GFSK	1.000	1.031	≥ 0.673	Pass
$\pi/4$ DQPSK	0.984	1.313	≥ 0.879	Pass
8DPSK	0.989	1.298	≥ 0.865	Pass




GFSK

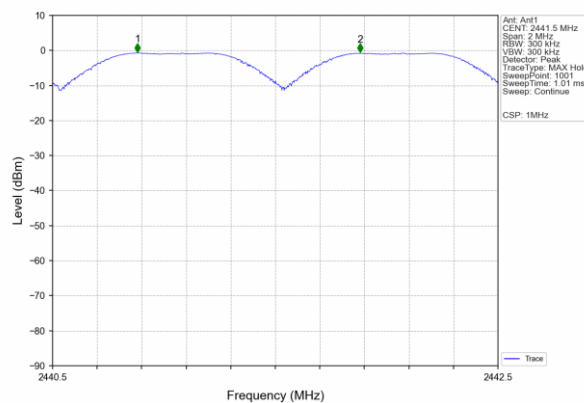

$\pi/4$ DPSK

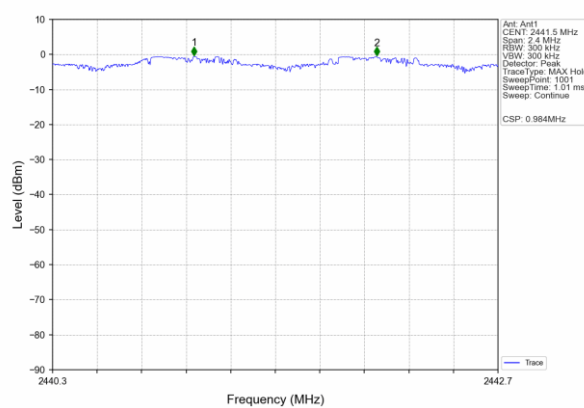

8DPSK

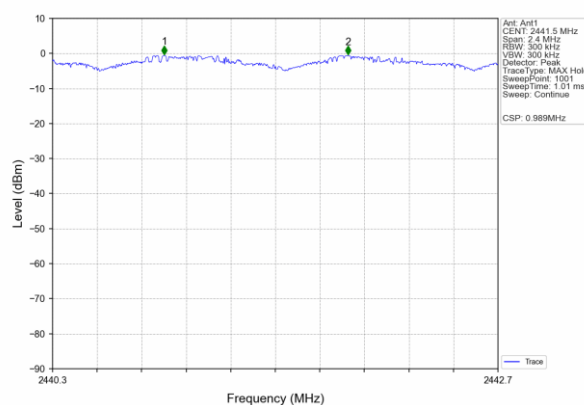



8. DWELL TIME OF OCCUPANCY

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- A Period Time = (channel number)*0.4
DH1 Time Slot: Reading * (1600/2)*31.6/(channel number)
DH3 Time Slot: Reading * (1600/4)*31.6/(channel number)
DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**8.1.5 TEST RESULTS**


Test Mode :	CH39-DH5, 2DH5, 3DH5
-------------	----------------------


Mode	Packet	Pulse time (ms)	Dwell time(ms)	Limit(s)	Result
GFSK	DH1	0.392	124.264	0.4	Pass
	DH3	1.646	255.130	0.4	Pass
	DH5	2.896	324.352	0.4	Pass
Pi/4DQPSK	2-DH1	0.398	126.564	0.4	Pass
	2-DH3	1.652	270.928	0.4	Pass
	2-DH5	2.902	333.730	0.4	Pass
8DPSK	3DH1	0.402	128.640	0.4	Pass
	3DH3	1.652	251.104	0.4	Pass
	3DH5	2.902	284.396	0.4	Pass

Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) × 31.6 Second for DH1, 2-DH1, 3-DH1


Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) × 31.6 Second for DH3, 2-DH3, 3-DH3

Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) × 31.6 Second for DH5, 2-DH5, 3-DH5

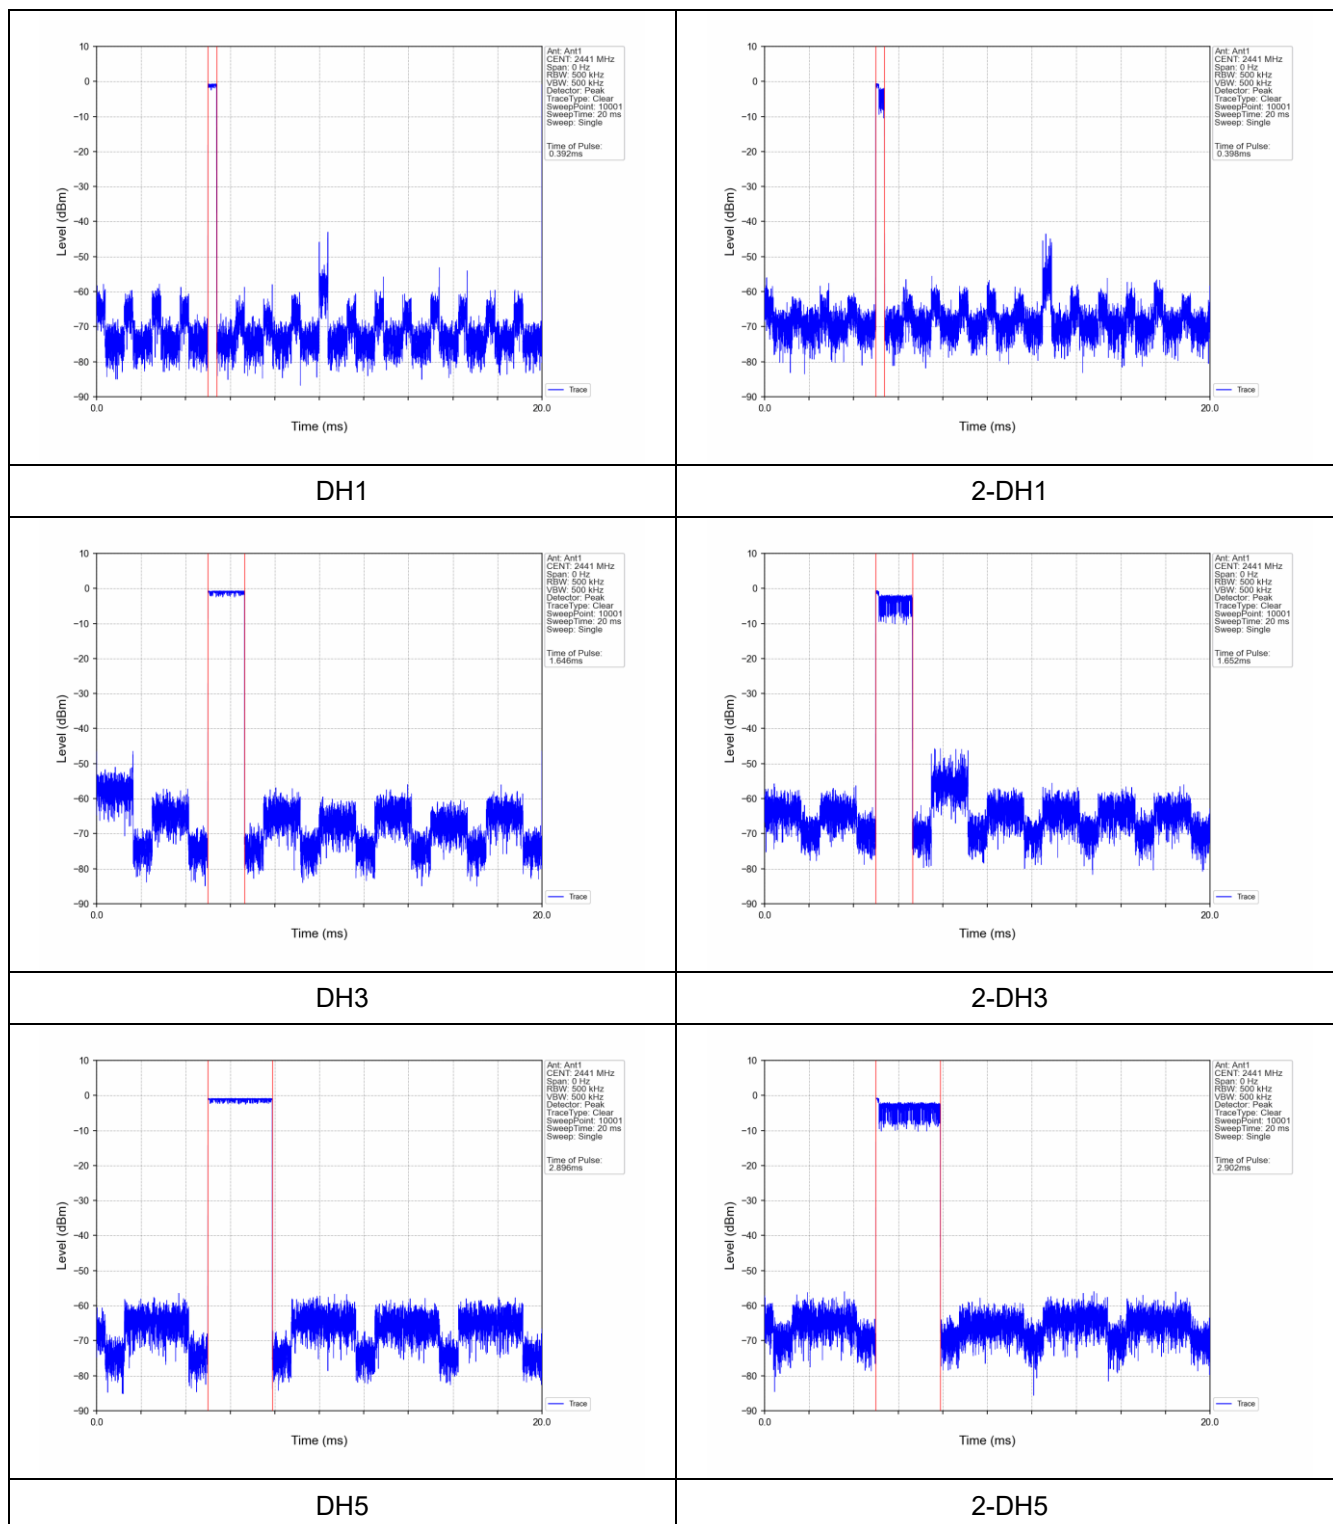


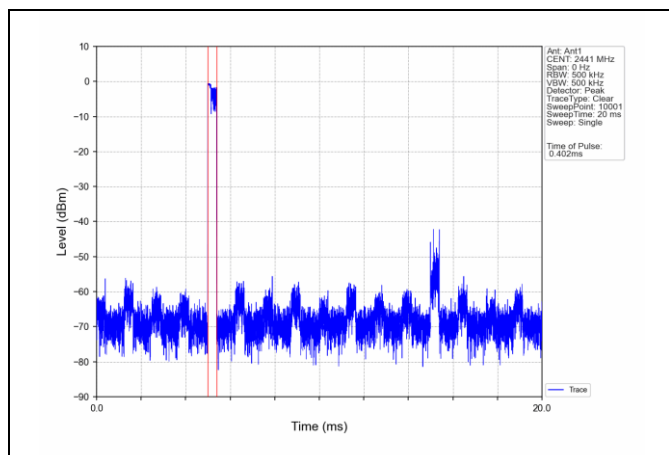

3-DH1

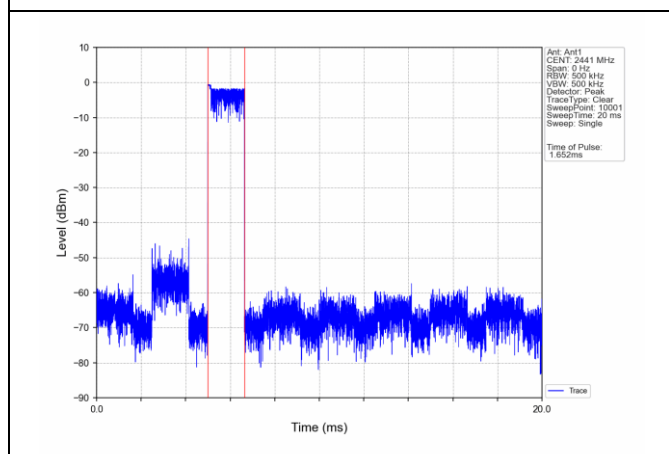

3-DH3

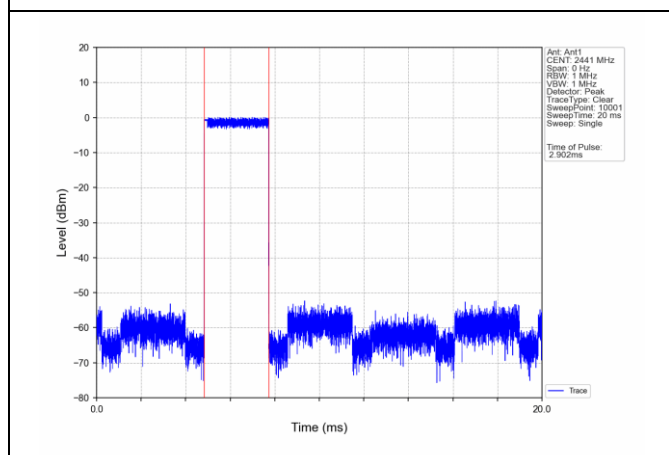

3-DH5



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is internal antenna,. It comply with the standard requirement.

10. TEST SEUUP PHOTO

Reference to the appendix I for details.

11. EUT PHOTO

Reference to the appendix II for details.

******* END OF REPORT *******