


# RF Test Report

**Applicant:** Eagle Electronics Inc.  
**Address:** 114 Venture Dr Paraskala, OH 43062-9239 United States  
**Product:** LTE Cat 4 module  
**Model No.:** I425-GLGD  
**Brand Name:** Eagle  
**FCC ID:** 2BNX7I425GLGDA  
**Standards:** 47 CFR Part 22  
47 CFR Part 24  
47 CFR Part 27  
47 CFR Part 90  
**Report No.:** PD20250031-R3A  
**Issue Date:** 2025/04/03  
**Test Result:** PASS \*

\* Testing performed at Hefei Panwin Technology Co., Ltd. on the above equipment indicates the product meets the requirements of the relevant standards.



**Reviewed By:** Charlie Wang



**Approved By:** Alec Yang

---

## Hefei Panwin Technology Co., Ltd.

Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin  
Avenue, High-tech Zone, Hefei City, Anhui Province, China  
TEL: +86-0551-63811775

## Revision History

| Report No.     | Version | Description    | Issue Date | Note  |
|----------------|---------|----------------|------------|-------|
| PD20250031-R3A | 01      | Initial Report | 2025/04/03 | Valid |

### Remark:

Model I425-GLGA(LTE Cat4 with Data and Voice), and I425-GLGD(LTE Cat4 with Data only) all use Qualcomm 9207 chipset and share the same chipset baseline and hardware/software design. The differences between them are that they support different with or without voice via software configuration.

Model I425-GLGD have two packaged types: LGA and MINIPCIE.

MINIPCIE is make up with I425-GLGD LGA module and PCIe carrier board.

There are no any other internal changes in these modules.

We hereby state that they are identical in interior structure and components, and just connector interface is different for the marketing requirement.

After evaluation, RF Output Power & Effective Radiated Power testing is required. This report spot check the Radiated Spurious Emission of worst bands, and the data results did not deteriorate. Test data is referenced from the original report (Report No.: PD20250026-R3A) issued on 2025/04/03.

## CONTENTS

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>1 General Information .....</b>                               | <b>11</b> |
| 1.1 Notes of the Test Report .....                               | 11        |
| 1.2 Test Facility .....                                          | 11        |
| 1.3 Testing Laboratory .....                                     | 11        |
| <b>2 General Description of Equipment under Test .....</b>       | <b>11</b> |
| 2.1 Details of Application .....                                 | 11        |
| 2.2 Details of EUT .....                                         | 12        |
| 2.3 Frequency List of Low/Middle/High Channels .....             | 14        |
| 2.4 Application Standards .....                                  | 19        |
| <b>3 Test Condition .....</b>                                    | <b>20</b> |
| 3.1 Test Environmental Conditions .....                          | 20        |
| 3.2 Test Configuration .....                                     | 20        |
| 3.3 Equipment List .....                                         | 22        |
| 3.4 Test Uncertainty .....                                       | 23        |
| <b>4 Test Items Description .....</b>                            | <b>24</b> |
| 4.1 RF Output Power & Effective (Isotropic) Radiated Power ..... | 24        |
| 4.2 EIRP Power Density .....                                     | 25        |
| 4.3 Peak-to-Average Ratio .....                                  | 26        |
| 4.4 Occupied Bandwidth .....                                     | 27        |
| 4.5 Conducted Band Edge Measurement .....                        | 28        |
| 4.6 Spurious Emissions at Antenna Terminals .....                | 29        |
| 4.7 Frequency Stability .....                                    | 30        |
| 4.8 Radiated Spurious Emission .....                             | 31        |
| <b>ANNEX A: Test Results .....</b>                               | <b>33</b> |
| <b>ANNEX B: The EUT Appearance .....</b>                         | <b>34</b> |
| <b>ANNEX C: Test Setup Photographs .....</b>                     | <b>35</b> |

## Test Summary

### GSM1900 / UMTS Band II / LTE Band 2 / 25

| No. | Test Case                                  | FCC Rules              | Limit                                                                                                        | Verdict                             |
|-----|--------------------------------------------|------------------------|--------------------------------------------------------------------------------------------------------------|-------------------------------------|
| 1   | RF Output Power & Effective Radiated Power | §2.1046,<br>§24.232(c) | EIRP ≤2 Watt                                                                                                 | PASS                                |
| 2   | Peak-to-Average Ratio                      | §24.232(d)             | ≤13 dB                                                                                                       | Reference report:<br>PD20250026-R3A |
| 3   | Occupied Bandwidth                         | §2.1049                | No limit.                                                                                                    |                                     |
| 4   | Conducted Band Edge Measurement            | §2.1051,<br>§24.238(a) | ≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.                    |                                     |
| 5   | Spurious Emissions at Antenna Terminals    | §2.1051,<br>§24.238(a) | ≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges. |                                     |
| 6   | Radiated Spurious Emission                 | §2.1053,<br>§24.238(a) | ≤ -13 dBm/1 MHz.                                                                                             |                                     |
| 7   | Frequency Stability                        | §2.1055<br>§24.235     | Within authorized bands of operation/frequency block.                                                        |                                     |

## UMTS Band IV / LTE Band 4 / 66

| No. | Test Case                                  | FCC Rules                | Limit                                                                                                        | Verdict                             |
|-----|--------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------|-------------------------------------|
| 1   | RF Output Power & Effective Radiated Power | §2.1046,<br>§27.50(d)(4) | EIRP ≤ 1 Watt                                                                                                | PASS                                |
| 2   | Peak-to-Average Ratio                      | §27.50(d)(5)             | ≤13 dB                                                                                                       | Reference report:<br>PD20250026-R3A |
| 3   | Occupied Bandwidth                         | §2.1049                  | No limit.                                                                                                    |                                     |
| 4   | Conducted Band Edge Measurement            | §2.1051,<br>§27.53(h)    | ≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.                    |                                     |
| 5   | Spurious Emissions at Antenna Terminals    | §2.1051,<br>§27.53(h)    | ≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges. |                                     |
| 6   | Radiated Spurious Emission                 | §2.1053,<br>§27.53(h)    | ≤ -13 dBm/1 MHz.                                                                                             |                                     |
| 7   | Frequency Stability                        | §2.1055<br>§27.54        | Within authorized bands of operation/frequency block.                                                        |                                     |

## GSM850 / UMTS Band V / LTE Band 5 / 26(824~849 MHz)

| No. | Test Case                                  | FCC Rules                 | Limit                                                                                                               | Verdict                             |
|-----|--------------------------------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| 1   | RF Output Power & Effective Radiated Power | §2.1046<br>§22.913 (a)(5) | ERP ≤ 7 Watt                                                                                                        | PASS                                |
| 2   | Peak-to-Average Ratio                      | §22.913 (d)               | ≤13 dB                                                                                                              | Reference report:<br>PD20250026-R3A |
| 3   | Occupied Bandwidth                         | §2.1049                   | No limit.                                                                                                           |                                     |
| 4   | Conducted Band Edge Measurement            | §2.1051<br>§22.917 (a)    | ≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.                           |                                     |
| 5   | Spurious Emissions at Antenna Terminals    | §2.1051<br>§22.917(a)     | FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges. |                                     |
| 6   | Radiated Spurious Emission                 | §2.1053<br>§22.917(a)     | FCC: ≤ -13 dBm/100 kHz.                                                                                             |                                     |
| 7   | Frequency Stability                        | §2.1055<br>§22.355        | < ±2.5 ppm                                                                                                          |                                     |

## LTE Band 26(814~824 MHz)

| No. | Test Case                                  | FCC Rules              | Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Verdict                             |
|-----|--------------------------------------------|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| 1   | RF Output Power & Effective Radiated Power | §2.1046,<br>§90.635(b) | < 100 W                                                                                                                                                                                                                                                                                                                                                                                                                                                | PASS                                |
| 2   | Peak-to-Average Ratio                      | --                     | ≤13 dB                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Reference report:<br>PD20250026-R3A |
| 3   | Occupied Bandwidth                         | §2.1049                | No limit.                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |
| 4   | Emission Mask                              | §2.1051<br>§ 90.691(a) | For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50 + 10 Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. |                                     |
| 5   | Spurious Emissions at Antenna Terminals    | §2.1051,<br>§90.691    | < 43 + 10Log10(P[Watts]) for all out-of- band emissions                                                                                                                                                                                                                                                                                                                                                                                                |                                     |
| 6   | Radiated Spurious Emission                 | §2.1053,<br>§90.691    |                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                     |
| 7   | Frequency Stability                        | §2.1055<br>§90.213     | Within authorized bands of operation/frequency block.                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |

## LTE Band 13


| No. | Test Case                                  | FCC Rules                          | Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Verdict                             |
|-----|--------------------------------------------|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| 1   | RF Output Power & Effective Radiated Power | §2.1046,<br>§27.50(b)(10)          | ERP ≤ 3 Watt                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | PASS                                |
| 2   | Peak-to-Average Ratio                      | --                                 | ≤13 dB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Reference report:<br>PD20250026-R3A |
| 3   | Occupied Bandwidth                         | §2.1049                            | No limit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |
| 4   | Conducted Band Edge Measurement            | §2.1051,<br>§27.53(c)              | On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;<br>Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;                                                        |                                     |
| 5   | Spurious Emissions at Antenna Terminals    | §2.1051,<br>§27.53(c)<br>§27.53(f) | FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.<br>On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;<br>For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. |                                     |
| 6   | Radiated Spurious Emission                 | §2.1053,<br>§27.53(c)<br>§27.53(f) | FCC: ≤ -13 dBm/100 kHz.<br>For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.                                                                                                                                                                                                                                                                      |                                     |
| 7   | Frequency Stability                        | §2.1055<br>§27.54                  | Within authorized bands of operation/frequency block.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |



## LTE Band 12

| No. | Test Case                                  | FCC Rules                 | Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Verdict                             |
|-----|--------------------------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| 1   | RF Output Power & Effective Radiated Power | §2.1046,<br>§27.50(c)(10) | ERP ≤ 3 Watt                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | PASS                                |
| 2   | Peak-to-Average Ratio                      | --                        | ≤13 dB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Reference report:<br>PD20250026-R3A |
| 3   | Occupied Bandwidth                         | §2.1049                   | No limit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                     |
| 4   | Conducted Band Edge Measurement            | §2.1051,<br>§27.53(g)     | For operations in the 600 MHz band and the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.<br>Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed. |                                     |
| 5   | Spurious Emissions at Antenna Terminals    | §2.1051,<br>§27.53(g)     | FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                     |
| 6   | Radiated Spurious Emission                 | §2.1053,<br>§27.53(g)     | FCC: ≤ -13 dBm/100 kHz.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                     |
| 7   | Frequency Stability                        | §2.1055<br>§27.54         | Within authorized bands of operation/frequency block.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |

## LTE Band 7 / 38 / 41
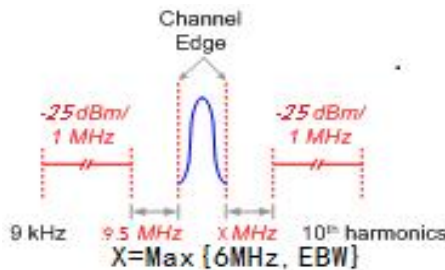
| No. | Test Case                                  | FCC Rules                | Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Verdict                             |
|-----|--------------------------------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| 1   | RF Output Power & Effective Radiated Power | §2.1046,<br>§27.50(h)(2) | $EIRP \leq 2 \text{ Watt}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | PASS                                |
| 2   | Peak-to-Average Ratio                      | --                       | $\leq 13 \text{ dB}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Reference report:<br>PD20250026-R3A |
| 3   | Occupied Bandwidth                         | §2.1049                  | No limit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |
| 4   | Conducted Band Edge Measurement            | §2.1051,<br>§27.53(m4)   | For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P) \text{ dB}$ on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P) \text{ dB}$ on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P) \text{ dB}$ on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P) \text{ dB}$ on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P) \text{ dB}$ at or below 2490.5 MHz. |                                     |
| 5   | Spurious Emissions at Antenna Terminals    | §2.1051,<br>§27.53(m)    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                     |
| 6   | Radiated Spurious Emission                 | §2.1053,<br>§27.53(m)    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                     |
| 7   | Frequency Stability                        | §2.1055<br>§27.54        | Within authorized bands of operation/frequency block.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |

Conducted detection date: 2025/03/06 to 2025/03/17

Date of sample received: 2025/03/06

- The samples tested have been evaluated in accordance with the procedures given in the application standards in **Section 2.4** of this report and have been shown to comply with the applicable technical standards.
- All indications of PASS/FAIL in this report are based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

## 1 General Information

### 1.1 Notes of the Test Report

This report is invalid without signature of auditor and approver or with any alterations. The report shall not be partially reproduced without written approval of the testing company. Entrusted test results are only responsible for incoming samples. If there is any objection to the testing report, it shall be raised to the testing company within 15 days from the date of receiving the report. In the test results, "NA" means "not applicable", and the test items marked with "Δ" are subcontracted projects.

### 1.2 Test Facility

#### A2LA (Certificate Number: 6849.01)

Hefei Panwin Technology Co., Ltd. has been accredited by American Association for Laboratory Accreditation to perform measurement.

#### FCC (Designation Number: CN1361, Test Firm Registration Number: 473156)

Hefei Panwin Technology Co., Ltd. has been accredited on the US Federal Communications Commission list of test facilities recognized to perform measurements.

### 1.3 Testing Laboratory

|              |                                                                                                                                |
|--------------|--------------------------------------------------------------------------------------------------------------------------------|
| Company Name | Hefei Panwin Technology Co., Ltd.                                                                                              |
| Address      | Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin Avenue, High-tech Zone, Hefei City, Anhui Province, China |
| Telephone    | +86-0551-63811775                                                                                                              |
| Post Code    | 230031                                                                                                                         |

## 2 General Description of Equipment under Test

### 2.1 Details of Application

|                      |                                                       |
|----------------------|-------------------------------------------------------|
| Applicant            | Eagle Electronics Inc.                                |
| Applicant Address    | 114 Venture Dr Paraskala, OH 43062-9239 United States |
| Manufacturer         | Eagle Electronics Inc.                                |
| Manufacturer Address | 114 Venture Dr Paraskala, OH 43062-9239 United States |

## 2.2 Details of EUT

|                        |               |                                                                                                                                                                                                              |   |              |    |                                                                                                                                                                                                                            |    |              |              |
|------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|--------------|--------------|
| Product                |               | LTE Cat 4 module                                                                                                                                                                                             |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Model                  |               | I425-GLGD                                                                                                                                                                                                    |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Hardware Version       |               | R1.0                                                                                                                                                                                                         |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Software Version       |               | I425GLGDR07A01M1G                                                                                                                                                                                            |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| GSM Specification      |               |                                                                                                                                                                                                              |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Single Band            |               | GSM850, GSM1900                                                                                                                                                                                              |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Multi-slot class       |               | GPRS: 33/ EGPRS: 33                                                                                                                                                                                          |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Type of Modulation     |               | GMSK(GPRS),8PSK (EGPRS)                                                                                                                                                                                      |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| UMTS Specification     |               |                                                                                                                                                                                                              |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Single Band            |               | WCDMA Band II, IV, V                                                                                                                                                                                         |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Power Class for UMTS   |               | PC3                                                                                                                                                                                                          |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Type of Modulation     |               | Supports QPSK, 16QAM and 64QAM modulations                                                                                                                                                                   |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| E-UTRA Specification   |               |                                                                                                                                                                                                              |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Single Band            |               | FDD Band: 2, 4, 5, 7, 12, 13, 25, 26, 66<br>TDD Band: 38, 41                                                                                                                                                 |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Power Class for LTE    |               | PC3                                                                                                                                                                                                          |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Type of Modulation     |               | UL: QPSK, 16QAM<br>DL: QPSK, 16QAM, 64QAM                                                                                                                                                                    |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Antenna Type           |               | <input checked="" type="checkbox"/> External <input type="checkbox"/> Integrated                                                                                                                             |   |              |    |                                                                                                                                                                                                                            |    |              |              |
| Antenna Gain           |               | GSM850: 2.13dBi<br>GSM1900: 1.59dBi<br>WCDMA Band II: 1.59dBi<br>WCDMA Band IV: 2.00dBi<br>WCDMA Band V: 2.13dBi<br>LTE Band 2: 1.59dBi<br>LTE Band 4: 2.00dBi<br>LTE Band 5: 2.13dBi<br>LTE Band 7: 3.00dBi |   |              |    | LTE Band 12: 3.26dBi<br>LTE Band 13: 4.45dBi<br>LTE Band 25: 1.59dBi<br>LTE Band 26(814 to 824MHz): 2.53dBi<br>LTE Band 26(824 to 849MHz): 2.13dBi<br>LTE Band 38: 2.06dBi<br>LTE Band 41: 3.00dBi<br>LTE Band 66: 2.00dBi |    |              |              |
| GSM Frequency Range(s) |               | Band                                                                                                                                                                                                         |   | Tx (MHz)     |    |                                                                                                                                                                                                                            |    | Rx (MHz)     |              |
|                        |               | GSM 850                                                                                                                                                                                                      |   | 824 to 849   |    |                                                                                                                                                                                                                            |    | 869 to 894   |              |
|                        |               | GSM 1900                                                                                                                                                                                                     |   | 1850 to 1910 |    |                                                                                                                                                                                                                            |    | 1930 to 1990 |              |
| Frequency Band(s)      | SISO Band     | Supported Channel Bandwidth (MHz)                                                                                                                                                                            |   |              |    |                                                                                                                                                                                                                            |    | Tx (MHz)     | Rx (MHz)     |
|                        |               | 1.4                                                                                                                                                                                                          | 3 | 5            | 10 | 15                                                                                                                                                                                                                         | 20 |              |              |
|                        | WCDMA Band II | -                                                                                                                                                                                                            | - | v            | -  | -                                                                                                                                                                                                                          | -  | 1850 to 1910 | 1930 to 1990 |
|                        | WCDMA Band IV | -                                                                                                                                                                                                            | - | v            | -  | -                                                                                                                                                                                                                          | -  | 1710 to 1755 | 2110 to 2155 |

|  |              |   |   |   |   |   |   |              |              |
|--|--------------|---|---|---|---|---|---|--------------|--------------|
|  | WCDMA Band V | - | - | v | - | - | - | 824 to 849   | 869 to 894   |
|  | LTE Band 2   | v | v | v | v | v | v | 1850 to 1910 | 1930 to 1990 |
|  | LTE Band 4   | v | v | v | v | v | v | 1710 to 1755 | 2110 to 2155 |
|  | LTE Band 5   | v | v | v | v | - | - | 824 to 849   | 869 to 894   |
|  | LTE Band 7   | - | - | v | v | v | v | 2500 to 2570 | 2620 to 2690 |
|  | LTE Band 12  | v | v | v | v | - | - | 699 to 716   | 729 to 746   |
|  | LTE Band 13  | - | - | v | v | - | - | 777 to 787   | 746 to 756   |
|  | LTE Band 25  | v | v | v | v | v | v | 1850 to 1915 | 1930 to 1995 |
|  | LTE Band 26  | v | v | v | v | v | - | 814 to 849   | 859 to 894   |
|  | LTE Band 38  | - | - | v | v | v | v | 2570 to 2620 | 2570 to 2620 |
|  | LTE Band 41  | - | - | v | v | v | v | 2496 to 2690 | 2496 to 2690 |
|  | LTE Band 66  | v | v | v | v | v | v | 1710 to 1780 | 2110 to 2180 |

**Note:** The declared of product specification for EUT and/or Antenna presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## Support Equipment

| Equipment | Manufacturer                            | Description                  | Model             | Serial Number   |
|-----------|-----------------------------------------|------------------------------|-------------------|-----------------|
| EVb       | Eagle Electronics Inc.                  | -                            | Q1-A0770          | MP825AK0Y000832 |
| Adapter   | Shenzhen Keyu Power Technology Co., LTD | AC to DC power supply to EVb | KA1801A-0503000DE | -               |

## 2.3 Frequency List of Low/Middle/High Channels

| GSM850 Channel and Frequency List |                        |        |        |         |
|-----------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                          | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 0.2                               | Channel                | 128    | 190    | 251     |
|                                   | Frequency              | 824.2  | 836.6  | 848.8   |

| GSM1900 Channel and Frequency List |                        |        |        |         |
|------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                           | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 0.2                                | Channel                | 512    | 661    | 810     |
|                                    | Frequency              | 1850.2 | 1880.0 | 1909.8  |

| WCDMA Band II Channel and Frequency List |                        |        |        |         |
|------------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                                 | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 5                                        | Channel                | 9262   | 9400   | 9538    |
|                                          | Frequency              | 1852.4 | 1880.0 | 1907.6  |

| WCDMA Band IV Channel and Frequency List |                        |        |        |         |
|------------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                                 | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 5                                        | Channel                | 1312   | 1413   | 1513    |
|                                          | Frequency              | 1712.4 | 1732.6 | 1752.6  |

| WCDMA Band V Channel and Frequency List |                        |        |        |         |
|-----------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                                | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 5                                       | Channel                | 4132   | 4182   | 4233    |
|                                         | Frequency              | 826.4  | 836.4  | 846.6   |

| LTE Band 2 Channel and Frequency List |                        |        |        |         |
|---------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                              | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 1.4                                   | Channel                | 18607  | 18900  | 19193   |
|                                       | Frequency              | 1850.7 | 1880   | 1909.3  |
| 3                                     | Channel                | 18615  | 18900  | 19185   |
|                                       | Frequency              | 1851.5 | 1880   | 1908.5  |
| 5                                     | Channel                | 18625  | 18900  | 19175   |
|                                       | Frequency              | 1852.5 | 1880   | 1907.5  |
| 10                                    | Channel                | 18650  | 18900  | 19150   |
|                                       | Frequency              | 1855   | 1880   | 1905    |
| 15                                    | Channel                | 18675  | 18900  | 19125   |
|                                       | Frequency              | 1857.5 | 1880   | 1902.5  |
| 20                                    | Channel                | 18700  | 18900  | 19100   |
|                                       | Frequency              | 1860   | 1880   | 1900    |

| LTE Band 4 Channel and Frequency List |                        |        |        |         |
|---------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                              | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 1.4                                   | Channel                | 19957  | 20175  | 20393   |
|                                       | Frequency              | 1710.7 | 1732.5 | 1754.3  |
| 3                                     | Channel                | 19965  | 20175  | 20385   |
|                                       | Frequency              | 1711.5 | 1732.5 | 1753.5  |
| 5                                     | Channel                | 19975  | 20175  | 20375   |
|                                       | Frequency              | 1712.5 | 1732.5 | 1752.5  |
| 10                                    | Channel                | 20000  | 20175  | 20350   |
|                                       | Frequency              | 1715   | 1732.5 | 1750    |
| 15                                    | Channel                | 20025  | 20175  | 20325   |
|                                       | Frequency              | 1717.5 | 1732.5 | 1747.5  |
| 20                                    | Channel                | 20050  | 20175  | 20300   |
|                                       | Frequency              | 1720   | 1732.5 | 1745    |

| LTE Band 5 Channel and Frequency List |                        |        |        |         |
|---------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                              | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 1.4                                   | Channel                | 20407  | 20525  | 20643   |
|                                       | Frequency              | 824.7  | 836.5  | 848.3   |
| 3                                     | Channel                | 20415  | 20525  | 20635   |
|                                       | Frequency              | 825.5  | 836.5  | 847.5   |
| 5                                     | Channel                | 20425  | 20525  | 20625   |
|                                       | Frequency              | 826.5  | 836.5  | 846.5   |
| 10                                    | Channel                | 20450  | 20525  | 20600   |
|                                       | Frequency              | 829    | 836.5  | 844     |

| LTE Band 7 Channel and Frequency List |                        |        |        |         |
|---------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                              | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 5                                     | Channel                | 20775  | 21100  | 21425   |
|                                       | Frequency              | 2502.5 | 2535   | 2567.5  |
| 10                                    | Channel                | 20800  | 21100  | 21400   |
|                                       | Frequency              | 2505   | 2535   | 2565    |
| 15                                    | Channel                | 20825  | 21100  | 21375   |
|                                       | Frequency              | 2507.5 | 2535   | 2562.5  |
| 20                                    | Channel                | 20850  | 21100  | 21350   |
|                                       | Frequency              | 2510   | 2535   | 2560    |

| LTE Band 12 Channel and Frequency List |                        |        |        |         |
|----------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                               | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 1.4                                    | Channel                | 23017  | 23095  | 23173   |
|                                        | Frequency              | 699.7  | 707.5  | 715.3   |
| 3                                      | Channel                | 23025  | 23095  | 23165   |
|                                        | Frequency              | 700.5  | 707.5  | 714.5   |
| 5                                      | Channel                | 23035  | 23095  | 23155   |
|                                        | Frequency              | 701.5  | 707.5  | 713.5   |
| 10                                     | Channel                | 23060  | 23095  | 23130   |
|                                        | Frequency              | 704    | 707.5  | 711     |

| LTE Band 13 Channel and Frequency List |                        |        |        |         |
|----------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                               | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 5                                      | Channel                | 23205  | 23230  | 23255   |
|                                        | Frequency              | 779.5  | 782    | 784.5   |
| 10                                     | Channel                | 23230  | 23230  | 23230   |
|                                        | Frequency              | 782    | 782    | 782     |

| LTE Band 25 Channel and Frequency List |                        |        |        |         |
|----------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                               | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 1.4                                    | Channel                | 26047  | 26365  | 26683   |
|                                        | Frequency              | 1850.7 | 1882.5 | 1914.3  |
| 3                                      | Channel                | 26055  | 26365  | 26675   |
|                                        | Frequency              | 1851.5 | 1882.5 | 1913.5  |
| 5                                      | Channel                | 26065  | 26365  | 26665   |
|                                        | Frequency              | 1852.5 | 1882.5 | 1912.5  |
| 10                                     | Channel                | 26090  | 26365  | 26640   |
|                                        | Frequency              | 1855   | 1882.5 | 1910    |
| 15                                     | Channel                | 26115  | 26365  | 26615   |
|                                        | Frequency              | 1857.5 | 1882.5 | 1907.5  |
| 20                                     | Channel                | 26140  | 26365  | 26590   |
|                                        | Frequency              | 1860   | 1882.5 | 1905    |

| LTE Band 26 (814 to 824MHz) Channel and Frequency List |                        |        |        |         |
|--------------------------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                                               | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 1.4                                                    | Channel                | 26697  | 26740  | 26783   |
|                                                        | Frequency              | 814.7  | 819    | 823.3   |
| 3                                                      | Channel                | 26705  | 26740  | 26775   |
|                                                        | Frequency              | 815.5  | 819    | 822.5   |
| 5                                                      | Channel                | 26715  | 26740  | 26765   |
|                                                        | Frequency              | 816.5  | 819    | 821.5   |
| 10                                                     | Channel                | 26740  | 26740  | 26740   |



|  |           |     |     |     |
|--|-----------|-----|-----|-----|
|  | Frequency | 819 | 819 | 819 |
|--|-----------|-----|-----|-----|

| LTE Band 26 (824 to 849MHz) Channel and Frequency List |                        |        |        |         |
|--------------------------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                                               | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 1.4                                                    | Channel                | 26797  | 26915  | 27033   |
|                                                        | Frequency              | 824.7  | 836.5  | 848.3   |
| 3                                                      | Channel                | 26805  | 26915  | 27025   |
|                                                        | Frequency              | 825.5  | 836.5  | 847.5   |
| 5                                                      | Channel                | 26815  | 26915  | 27015   |
|                                                        | Frequency              | 826.5  | 836.5  | 846.5   |
| 10                                                     | Channel                | 26840  | 26915  | 26990   |
|                                                        | Frequency              | 829.0  | 836.5  | 844.0   |
| 15                                                     | Channel                | 26865  | 26915  | 26965   |
|                                                        | Frequency              | 831.5  | 836.5  | 841.5   |

| LTE Band 38 Channel and Frequency List |                        |        |        |         |
|----------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                               | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 5                                      | Channel                | 37775  | 38000  | 38225   |
|                                        | Frequency              | 2572.5 | 2595   | 2617.5  |
| 10                                     | Channel                | 37800  | 38000  | 38200   |
|                                        | Frequency              | 2575   | 2595   | 2615    |
| 15                                     | Channel                | 37825  | 38000  | 38175   |
|                                        | Frequency              | 2577.5 | 2595   | 2612.5  |
| 20                                     | Channel                | 37850  | 38000  | 38150   |
|                                        | Frequency              | 2580   | 2595   | 2610    |

| LTE Band 41 (2496 to 2690MHz) Channel and Frequency List |                        |        |        |         |
|----------------------------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                                                 | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 5                                                        | Channel                | 39675  | 40620  | 41565   |
|                                                          | Frequency              | 2498.5 | 2593   | 2687.5  |
| 10                                                       | Channel                | 39700  | 40620  | 41540   |
|                                                          | Frequency              | 2501   | 2593   | 2685    |
| 15                                                       | Channel                | 39725  | 40620  | 41515   |
|                                                          | Frequency              | 2503.5 | 2593   | 2682.5  |
| 20                                                       | Channel                | 39750  | 40620  | 41490   |
|                                                          | Frequency              | 2506   | 2593   | 2680    |

| LTE Band 66 Channel and Frequency List |                        |        |        |         |
|----------------------------------------|------------------------|--------|--------|---------|
| BW [MHz]                               | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 1.4                                    | Channel                | 131979 | 132322 | 132665  |
|                                        | Frequency              | 1710.7 | 1745   | 1779.3  |
| 3                                      | Channel                | 131987 | 132322 | 132657  |
|                                        | Frequency              | 1711.5 | 1745   | 1778.5  |
| 5                                      | Channel                | 131997 | 132322 | 132647  |
|                                        | Frequency              | 1712.5 | 1745   | 1777.5  |
| 10                                     | Channel                | 132022 | 132322 | 132622  |
|                                        | Frequency              | 1715   | 1745   | 1775    |
| 15                                     | Channel                | 132047 | 132322 | 132597  |
|                                        | Frequency              | 1717.5 | 1745   | 1772.5  |
| 20                                     | Channel                | 132072 | 132322 | 132572  |
|                                        | Frequency              | 1720   | 1745   | 1770    |

## 2.4 Application Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

47 CFR Part 2

47 CFR Part 22

47 CFR Part 24

47 CFR Part 27

47 CFR Part 90

ANSI C63.26-2015

FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 3 Test Condition

### 3.1 Test Environmental Conditions

During testing, environmental conditions are described below.

| Normal Configuration |      | Extreme Configuration |            |           |
|----------------------|------|-----------------------|------------|-----------|
| Voltage              | 3.8V | Voltage               | High: 4.3V | Low: 3.3V |

### 3.2 Test Configuration

| GSM                                              |             |            |       |       |        |    |      |    |   |   |
|--------------------------------------------------|-------------|------------|-------|-------|--------|----|------|----|---|---|
| Test Case                                        | BW<br>(MHz) | Modulation |       |       |        | RB |      | CH |   |   |
|                                                  |             | GMSK       |       | 8PSK  |        | 1  | full | L  | M | H |
| RF Output Power & Effective (Isotropic) Radiated | 0.2         | v          |       | v     |        | -  | -    | v  | v | v |
| Occupied Bandwidth                               | -           | -          |       | -     |        | -  | -    | -  | - | - |
| Conducted Band Edge                              | -           | -          |       | -     |        | -  | -    | -  | - | - |
| Spurious Emissions at Antenna Terminals          | -           | -          |       | -     |        | -  | -    | -  | - | - |
| Peak-to-Average Ratio                            | -           | -          |       | -     |        | -  | -    | -  | - | - |
| Frequency Stability                              | -           | -          |       | -     |        | -  | -    | -  | - | - |
| Radiated Spurious Emission                       | Spot check  |            |       |       |        |    |      |    |   |   |
| WCDMA                                            |             |            |       |       |        |    |      |    |   |   |
| Test Case                                        | BW<br>(MHz) | Modulation |       |       |        | RB |      | CH |   |   |
|                                                  |             | QPSK       | 16QAM | 64QAM | 256QAM | 1  | full | L  | M | H |
| RF Output Power & Effective (Isotropic) Radiated | 5           | v          | --    | --    | --     | -- | --   | v  | v | v |
| Occupied Bandwidth                               | -           | -          | -     | -     | -      | -  | -    | -  | - | - |
| Conducted Band Edge                              | -           | -          | -     | -     | -      | -  | -    | -  | - | - |
| Spurious Emissions at Antenna Terminals          | -           | -          | -     | -     | -      | -  | -    | -  | - | - |
| Peak-to-Average Ratio                            | -           | -          | -     | -     | -      | -  | -    | -  | - | - |
| Frequency Stability                              | -           | -          | -     | -     | -      | -  | -    | -  | - | - |
| Radiated Spurious Emission                       | Spot check  |            |       |       |        |    |      |    |   |   |
| LTE                                              |             |            |       |       |        |    |      |    |   |   |
| Test Case                                        | BW          | Modulation |       |       |        | RB |      | CH |   |   |
|                                                  |             | QPSK       | 16QAM | 64QAM | 256QAM | 1  | full | L  | M | H |
| RF Output Power & Effective (Isotropic) Radiated | all         | v          | v     | --    | --     | v  | v    | v  | v | v |

|                                         |            |   |   |   |   |   |   |   |   |   |
|-----------------------------------------|------------|---|---|---|---|---|---|---|---|---|
| Occupied Bandwidth                      | -          | - | - | - | - | - | - | - | - | - |
| Conducted Band Edge                     | -          | - | - | - | - | - | - | - | - | - |
| Spurious Emissions at Antenna Terminals | -          | - | - | - | - | - | - | - | - | - |
| Peak-to-Average Ratio                   | -          | - | - | - | - | - | - | - | - | - |
| Frequency Stability                     | -          | - | - | - | - | - | - | - | - | - |
| Radiated Spurious Emission              | Spot check |   |   |   |   |   |   |   |   |   |

**Note:**

- 1.The mark " V " means that this configuration is chosen for testing.
- 2.The mark " -- " means that this bandwidth is not supported.
- 3.The device is investigated from 30Hz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
- 4.Frequency Stability : Normal Voltage = 3.8V ; Low Voltage =3.3V. ; High Voltage =4.3V

## 3.3 Equipment List

| Instrument                  | Manufacturer            | Model                  | Asset No. | Cal. Interval | Cal. Due Date |
|-----------------------------|-------------------------|------------------------|-----------|---------------|---------------|
| Conducted                   |                         |                        |           |               |               |
| Base Station Simulator      | R&S                     | CMW500                 | PWC0052   | 1 Year        | 2025/09/12    |
| Spectrum Analyzer           | KEYSIGHT                | N9020B                 | PWC0047   | 1 Year        | 2025/09/11    |
| DC Power                    | KEYSIGHT                | E3640A                 | PWC0043   | 1 Year        | 2025/09/12    |
| Climate Chamber             | Boyi                    | B-T-48C                | PWC0051   | 1 Year        | 2025/09/12    |
| Shielded Chamber            | Mao Rui                 | MR534                  | PWC0041   | 3 Years       | 2026/08/26    |
| RF cable                    | TIMES Microwave Systems | SFT205PUR-NMSWSM-1.50M | PWD0165   | 1 Year        | 2025/09/12    |
| RF cable                    | TIMES Microwave Systems | HF160-KMKMR-1.50M      | PWD0166   | 1 Year        | 2025/09/12    |
| Coupling unit               | COM-MW                  | ZDC6-10M1              | PWD0167   | 1 Year        | 2025/09/12    |
| Trigger cable               | -                       | ZT06-BNCJ-BNCJ-1M      | -         | -             | -             |
| Test Software               | Tonscend                | JS1120 V3.1.46         | -         | -             | -             |
| Radiated                    |                         |                        |           |               |               |
| Receiver                    | R&S                     | ESR7                   | PWB0023   | 1 Year        | 2025/09/11    |
| Spectrum Analyzer           | R&S                     | FSV3044                | PWB0024   | 1 Year        | 2025/09/11    |
| Loop Antenna                | R&S                     | HFH2-Z2E               | PWB0026   | 1 Year        | 2025/09/13    |
| TRILOG Broadband Antenna    | Schwarzbeck             | VULB9162               | PWB0029   | 1 Year        | 2025/09/09    |
| Double-Ridged Guide Antenna | ETS-Lindgren            | 3117                   | PWB0031   | 1 Year        | 2025/09/26    |
| k Type Horn Antenna         | Steatite Antennas       | QMS-00880              | PWB0035   | 1 Year        | 2025/09/08    |
| Pre-Amplifier               | R&S                     | OSP220 (OSP-B155G)     | PWB0042   | 1 Year        | 2025/09/11    |
| Pre-Amplifier               | COM-MW                  | DLNA8                  | PWB0094   | 1 Year        | 2025/09/11    |
| Pre-Amplifier               | R&S                     | SCU18F                 | PWB0034   | 1 Year        | 2025/09/11    |
| Pre-Amplifier               | R&S                     | SCU40F1                | PWB0036   | 1 Year        | 2025/09/11    |
| Anechoic Chamber            | ETS-Lindgren            | Fact 3-2m              | PWB0003   | 3 Years       | 2026/06/05    |
| Test Software               | Tonscend                | JS36                   | -         | -             | -             |

## 3.4 Test Uncertainty

| No. | Parameter                             | Uncertainty                                                                                   |
|-----|---------------------------------------|-----------------------------------------------------------------------------------------------|
| 1   | Maximum transmit power                | 0.677dB                                                                                       |
| 2   | Frequency error                       | 37.064Hz                                                                                      |
| 3   | Bandwidth occupied                    | 5.9kHz                                                                                        |
| 4   | Emission spurious, Band edge and PAPR | 10Hz-3.5GHz: 0.982dB<br>3.5GHz-18GHz: 1dB<br>18GHz-26.5GHz: 0.777dB<br>26.5GHz-40GHz: 1.066dB |
| 5   | Radiated Spurious Emission            | Below 1GHz: 4.88 dB<br>Above 1GH: 5.06 dB                                                     |
| 6   | Temperature                           | 3°C                                                                                           |
| 7   | Humidity                              | 1.3 %                                                                                         |
| 8   | Supply voltages                       | 0.006 V                                                                                       |

## 4 Test Items Description

### Ambient condition

Shielded Chamber

|                  |                |
|------------------|----------------|
| Temperature [°C] | 22.4 to 25.7   |
| Humidity [%RH]   | 33 to 46       |
| Pressure [kPa]   | 101.6 to 104.6 |

### 4.1 RF Output Power & Effective (Isotropic) Radiated Power

#### Methods of Measurement

Base Station Simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

According to KDB 412172 D01 Power Approach,


$EIRP = PT + GT - LC$ ,  $ERP = EIRP - 2.15$ , where

PT = transmitter output power in dBm

GT = gain of the transmitting antenna in dBi

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### Test Setup

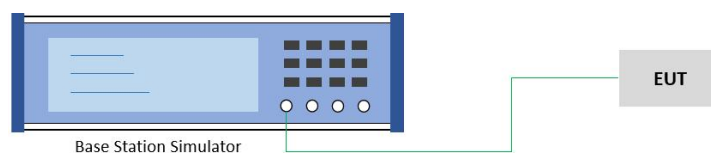

- 1.The testing follows ANSI C63.26 Section 5.2.
- 2.The transmitter output port was connected to the base station simulator.
- 3.Set EUT at maximum power through the base station simulator
- 4.Select lowest, middle, and highest channels for each band and different modulation.
- 5.Measure and record the power level from the system simulator.




## 4.2 EIRP Power Density

### Methods of Measurement

Measurement Procedure: C63.26 -2015 section 5.2.4

### Test Setup

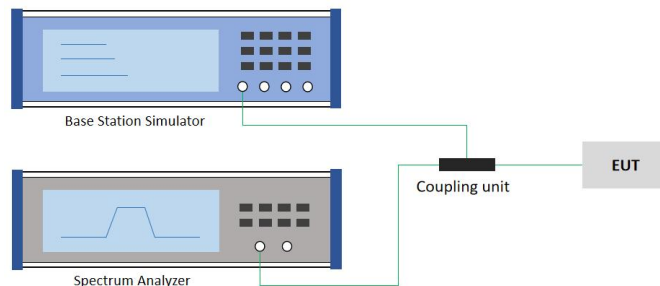


- 1.Set instrument center frequency to OBW center frequency.
- 2.Set span to at least 1.5 times the OBW.
- 3.Set the RBW to the specified reference bandwidth (often 1 MHz).
- 4.Set  $VBW \geq 3 \times RBW$ .
- 5.Detector = RMS (power averaging).
- 6.Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/RBW$ .
- 7.Sweep time = auto couple.
- 8.Employ trace averaging (RMS) mode over a minimum of 100 traces.
- 9.Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

### 4.3 Peak-to-Average Ratio

#### Methods of Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth.

#### Test Setup

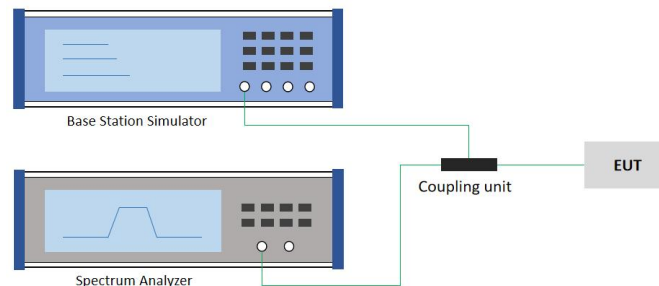

- 1.The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
- 2.The EUT was connected to spectrum and system simulator via a coupling unit.
- 3.Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- 4.The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 5.Record the deviation as Peak to Average Ratio.


## 4.4 Occupied Bandwidth

### Methods of Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### Test Setup

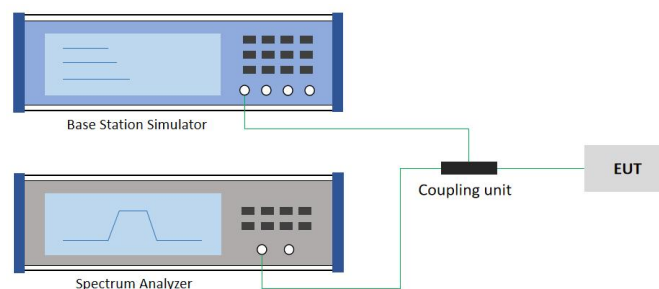

The testing follows ANSI C63.26 Section 5.4.

The EUT was connected to spectrum analyzer and system simulator via a coupling unit.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value).

Determine the '-26 dB down amplitude' as equal to (Reference Value – X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the '-X dB down amplitude' determined in step 6. If a marker is below this '-X dB down amplitude' value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.


## 4.5 Conducted Band Edge Measurement

### Methods of Measurement

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel). In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to RMS.

### Test Setup

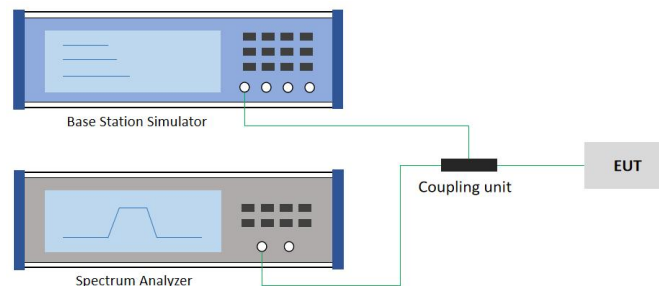

- 1.The testing follows ANSI C63.26 section 5.7
- 2.The EUT was connected to spectrum analyzer and system simulator via a coupling unit.
- 3.The band edges of low and high channels for the highest RF powers were measured.
- 4.Set RBW  $\geq 1\%$  EBW in the 1MHz band immediately outside and adjacent to the band edge.
- 5.Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used and the measured power was integrated over the full required measurement bandwidth of 1 MHz.
- 6.Set spectrum analyzer with RMS detector.
- 7.The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


## 4.6 Spurious Emissions at Antenna Terminals

### Methods of Measurement

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

### Test Setup

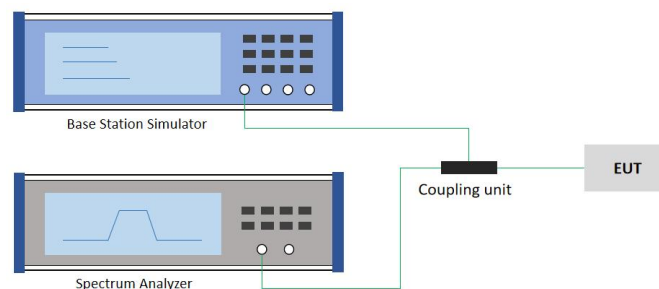

- 1.The testing follows ANSI C63.26 section 5.7
- 2.The EUT was connected to spectrum analyzer and system simulator via a coupling unit.
- 3.The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4.The middle channel for the highest RF power within the transmitting frequency was measured.
- 5.The conducted spurious emission for the whole frequency range was taken.
- 6.Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
- 7.Set spectrum analyzer with RMS detector.
- 8.Taking the record of maximum spurious emission.
- 9.The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


**Note:** As described in Section C63.26 4.2.3: Generally, the measurement must be corrected by adding  $10 \log [(reference\ bandwidth) / (resolution\ or\ measurement\ bandwidth)]$  to the measured value (such bandwidth scaling is limited to cases where the measurement bandwidth used to perform the measurement is less than the reference bandwidth). Therefore, the converted limit value is the standard limit value minus the conversion factor.

## 4.7 Frequency Stability

### Methods of Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### Test Setup

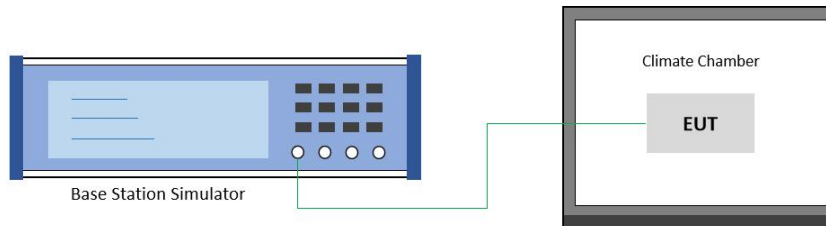

### Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4.8 Radiated Spurious Emission

### Methods of Measurement


The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


### Test Setup

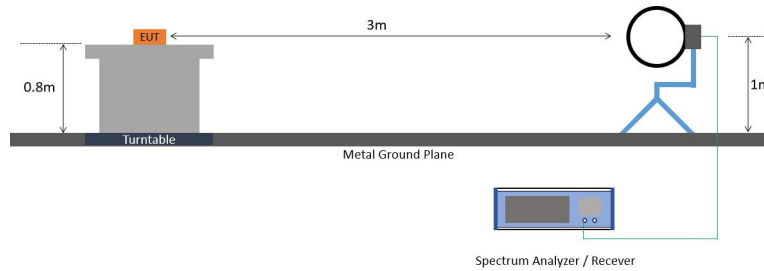

For radiated test below 30MHz

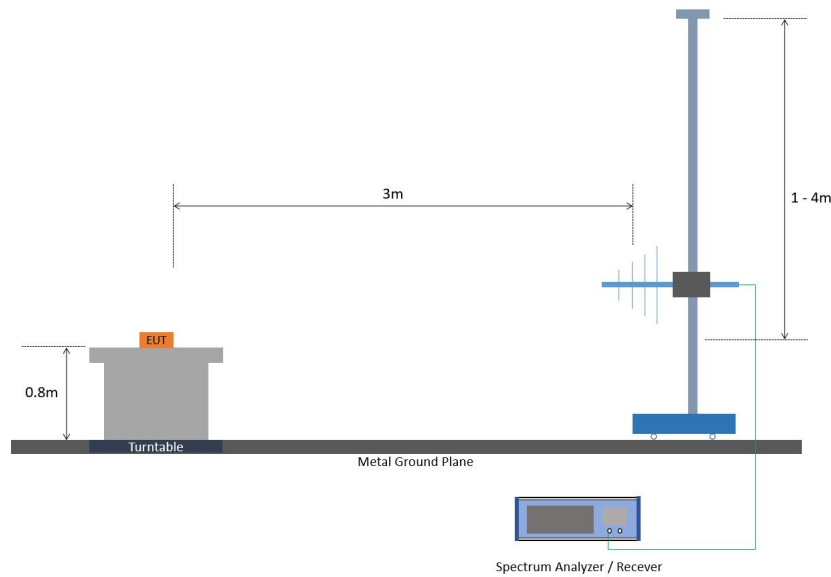

For radiated test from 30MHz to 1GHz

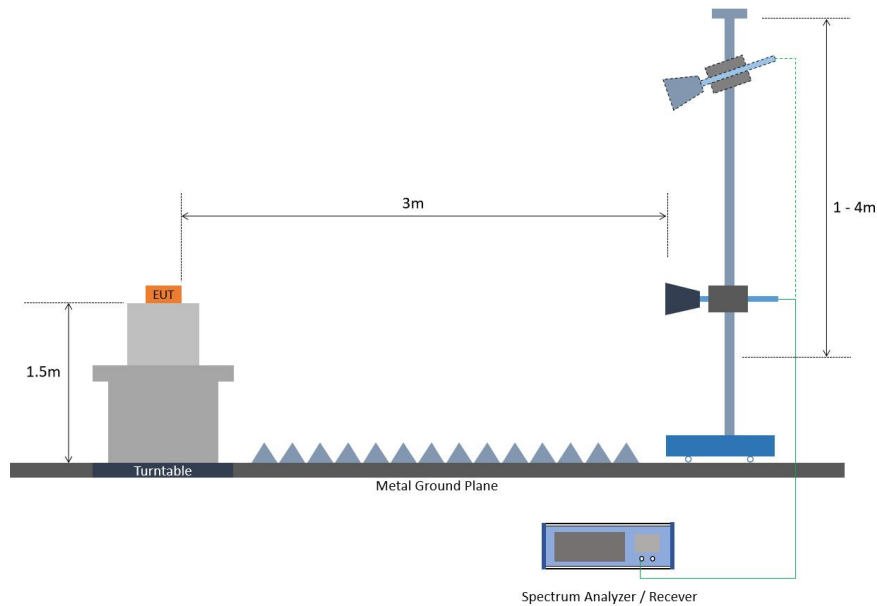

For radiated test above 1GHz

- 1.The testing follows ANSI C63.26 Section 5.5
- 2.The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
- 3.The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
- 4.The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5.The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
- 6.During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
- 7.Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 8.A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 9.Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 10.EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
- 11.ERP (dBm) = EIRP - 2.15
- 12.The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

**Remark:** The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

----- THE END -----



## ANNEX A: Test Results

### Test Results of Conducted Test

|                             |                     |
|-----------------------------|---------------------|
| GSM850                      | Refer to ANNEX A.1  |
| GSM1900                     | Refer to ANNEX A.2  |
| WCDMA Band II               | Refer to ANNEX A.3  |
| WCDMA Band IV               | Refer to ANNEX A.4  |
| WCDMA Band V                | Refer to ANNEX A.5  |
| LTE Band 2                  | Refer to ANNEX A.6  |
| LTE Band 4                  | Refer to ANNEX A.7  |
| LTE Band 5                  | Refer to ANNEX A.8  |
| LTE Band 7                  | Refer to ANNEX A.9  |
| LTE Band 12                 | Refer to ANNEX A.10 |
| LTE Band 13                 | Refer to ANNEX A.11 |
| LTE Band 25                 | Refer to ANNEX A.12 |
| LTE Band 26 (814 to 824MHz) | Refer to ANNEX A.13 |
| LTE Band 26 (824 to 849MHz) | Refer to ANNEX A.14 |
| LTE Band 38                 | Refer to ANNEX A.15 |
| LTE Band 41                 | Refer to ANNEX A.16 |
| LTE Band 66                 | Refer to ANNEX A.17 |

## ANNEX B: The EUT Appearance

The EUT Appearance (internal and external photographs) are submitted separately.

## ANNEX C: Test Setup Photographs

The Test Setup Photographs are submitted separately.