



RF Test Report

Applicant: Eagle Electronics Inc.
Address: 114 Venture Dr Paraskala, OH 43062-9239 United States
Product: 5G Sub-6 GHz LGA Module
Model No.: I5650V-NA
Brand Name: Eagle
FCC ID: 2BNX7I5650VNAA
47 CFR Part 2
47 CFR Part 22
Standards: 47 CFR Part 24
47 CFR Part 27
47 CFR Part 90
47 CFR Part 96
Report No.: PD20250087-R3B
Issue Date: 2025/08/23
Test Result: PASS *

* Testing performed at Hefei Panwin Technology Co., Ltd. on the above equipment indicates the product meets the requirements of the relevant standards.

Reviewed By: Charlie Wang

Approved By: Alec Yang

Hefei Panwin Technology Co., Ltd.

Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin Avenue, High-tech Zone, Hefei City, Anhui Province, China
TEL: +86-0551-63811775

Revision History

Report No.	Version	Description	Issue Date	Note
PD20250087-R3B	01	Initial Report	2025/08/23	Valid

CONTENTS

1 Test Laboratory	17
1.1 Notes of the Test Report	17
1.2 Test Facility	17
1.3 Testing Laboratory	17
2 General Description of Equipment under Test	17
2.1 Details of Application	17
2.2 Details of EUT	18
2.3 Frequency List of Low/Middle/High Channels	24
2.4 Application Standards	32
3 Test Condition	33
3.1 Test Environmental Conditions	33
3.2 Test Configuration	33
3.3 Equipment List	34
3.4 Test Uncertainty	35
4 Test Items Description	36
4.1 RF Output Power & Effective (Isotropic) Radiated Power	36
4.2 EIRP Power Density	37
4.3 Peak-to-Average Ratio	38
4.4 Occupied Bandwidth	39
4.5 Conducted Band Edge Measurement	40
4.6 Spurious Emissions at Antenna Terminals	41
4.7 Frequency Stability	42
4.8 Radiated Spurious Emission	43
ANNEX A: Test Results	45
ANNEX B: The EUT Appearance	46
ANNEX C: Test Setup Photographs	47

Test Summary

NR Band n2 / 25

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §24.232(c)	EIRP ≤2 Watt	PASS
2	Peak-to-Average Ratio	§24.232(d)	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	PASS
7	Frequency Stability	§2.1055 §24.235	Within authorized bands of operation/frequency block.	PASS

NR Band n66 / n70

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(d)(4)	EIRP ≤ 1 Watt	PASS
2	Peak-to-Average Ratio	§27.50(d)(5)	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS


NR Band n5 / n26(824~849 MHz)

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046 §22.913 (a)(5)	ERP ≤ 7 Watt	PASS
2	Peak-to-Average Ratio	§22.913 (d)	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051 §22.917 (a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051 §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053 §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	PASS
7	Frequency Stability	§2.1055 §22.355	< ±2.5 ppm	PASS

NR Band n26 (814~824 MHz)

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §90.635(b)	< 100 W	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log10}(f/6.1)$ decibels or $50 + 10 \text{ Log10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §90.691	< $43 + 10\text{Log10}(P[\text{Watts}])$ for all out-of- band emissions	PASS
6	Radiated Spurious Emission	§2.1053, §90.691		PASS
7	Frequency Stability	§2.1055 §90.213	Within authorized bands of operation/frequency block.	PASS

NR Band n7 / n38 / n41

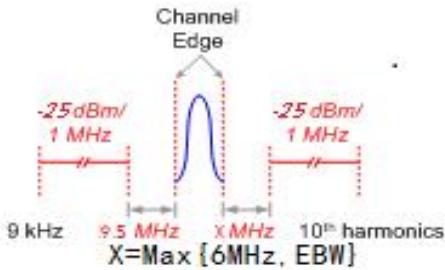No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(h)(2)	EIRP ≤ 2 Watt	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(m)		PASS
6	Radiated Spurious Emission	§2.1053, §27.53(m)		PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS

NR Band n13

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(b)(10)	ERP ≤ 3 Watt	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(c)	On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB; Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations; For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS

NR Band n14

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §90.542(d)	ERP ≤ 3 Watt	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Emission Mask	§2.1051 §90.210(n)	<p>Transmitters designed for operation under this part on frequencies other than listed in this section must meet the emission mask requirements of Emission Mask B. Equipment operating under this part on frequencies allocated to but shared with the Federal Government, must meet the applicable Federal Government technical standards.</p> <p>Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:</p> <ul style="list-style-type: none"> (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB. (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB. (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB. 	PASS
5	Conducted Band Edge Measurement	§2.1051, §90.543(e) (2)(3)	<ul style="list-style-type: none"> (1) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations. (2) On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. (3) On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB. 	PASS
6	Spurious Emissions at Antenna Terminals	§2.1051, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz	PASS
7	Radiated Spurious Emission	§2.1053, §90.543(c) §90.543(f)	equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	PASS
8	Frequency Stability	§2.1055 §90.213	Within authorized bands of operation/frequency block.	PASS

NR Band n12

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(c)(10)	ERP ≤ 3 Watt	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS

NR Band n30

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(a)(3)	EIRP ≤ 50mW/1MHz EIRP ≤ 250mW/5MHz	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(a)(4)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(a)(4)	(4) For mobile and portable stations operating in the 2305–2315 MHz and 2350–2360 MHz bands: (i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz; (ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz; (iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(a)(4)	≤ -40 dBm/MHz.	PASS
7	Frequency Stability	§2.1055 §27.54	within the range of the operating frequency blocks	PASS

NR Band n77(3450 to 3550MHz) / n78(3450 to 3550MHz)

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(k)(3)	EIRP ≤ 30dBm	PASS
2	Peak-to-Average Ratio	§27.50(k)(4)	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1053, §27.50(n)(2)		PASS
6	Radiated Spurious Emission	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS
7	Frequency Stability			

NR Band n77(3700 to 3980MHz) / n78(3700 to 3800MHz)

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(j)(3)	EIRP ≤ 1W	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(l)(2)	For mobile operations in the 3700–3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed –13 dBm/MHz. Compliance with this paragraph (l)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(l)(2)	not exceed -13 dBm/MHz.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(l)(2)	not exceed -13 dBm/MHz.	PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS

NR Band n48

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §96.41	EIRP≤ 23dBm/10MHz	PASS
2	Peak-to-Average Ratio	§96.41	≤13 dB	PASS
3	Occupied Bandwidth	§96.41	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz.	PASS
6	Radiated Spurious Emission	§2.1051, §96.41	(2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.	PASS
7	Frequency Stability	§2.1055	Fundamental emission stays within authorized frequency block	PASS
8	Adjacent Channel Leakage Ratio	§2.1051, §96.41	the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.	PASS

NR Band n71

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(c)(10)	ERP ≤ 3 Watt	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(g)	≤ -13 dBm/100kHz.	PASS
7	Frequency Stability	§2.1055 §27.54	within the authorized bands of operation.	PASS

Conducted detection date: 2025/06/04 to 2025/08/23

Radiated detection date: 2025/06/27 to 2025/08/22

Date of sample received: 2025/06/04

- The samples tested have been evaluated in accordance with the procedures given in the application standards in **Section 2.4** of this report and have been shown to comply with the applicable technical standards.
- All indications of PASS/FAIL in this report are based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

1 Test Laboratory

1.1 Notes of the Test Report

This report is invalid without signature of auditor and approver or with any alterations. The report shall not be partially reproduced without written approval of the testing company. Entrusted test results are only responsible for incoming samples. If there is any objection to the testing report, it shall be raised to the testing company within 15 days from the date of receiving the report. In the test results, "NA" means "not applicable", and the test items marked with "Δ" are subcontracted projects.

1.2 Test Facility

A2LA (Certificate Number: 6849.01)

Hefei Panwin Technology Co., Ltd. has been accredited by American Association for Laboratory Accreditation to perform measurement.

FCC (Designation Number: CN1361, Test Firm Registration Number: 473156)

Hefei Panwin Technology Co., Ltd. has been accredited on the US Federal Communications Commission list of test facilities recognized to perform measurements.

1.3 Testing Laboratory

Company Name	Hefei Panwin Technology Co., Ltd.
Address	Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin Avenue, High-tech Zone, Hefei City, Anhui Province, China
Telephone	+86-0551-63811775
Post Code	230031

2 General Description of Equipment under Test

2.1 Details of Application

Applicant	Eagle Electronics Inc.
Applicant Address	114 Venture Dr Paraskala, OH 43062-9239 United States
Manufacturer	Eagle Electronics Inc.
Manufacturer Address	114 Venture Dr Paraskala, OH 43062-9239 United States

2.2 Details of EUT

Product			5G Sub-6 GHz LGA Module				
Model			I5650V-NA				
Hardware Version			R1.0				
Software Version			I5650VNA01ACR02A01G8G				
SN			Conducted: E1Y24BQ27000087 Radiated: E1Y24BQ27000089				
Support			<input checked="" type="checkbox"/> SA	<input checked="" type="checkbox"/> NSA			
Operating Band for NR Bands in FR1	NR Band	Duplex Mode	Supported SCS & Bandwidth		ENDC	Tx (MHz)	Rx (MHz)
	n2	FDD	15KHz	5MHz	DC_4A_n2A	1850 to 1910	1930 to 1990
				10MHz	DC_5A_n2A		
				15MHz	DC_7A_n2A		
				20MHz	DC_12A_n2A		
				25MHz	DC_13A_n2A		
				30MHz	DC_14A_n2A		
				35MHz	DC_30A_n2A		
				40MHz	DC_48A_n2A		
	n5	FDD	15KHz	5MHz	DC_66A_n2A	824 to 849	869 to 894
				10MHz	DC_71A_n2A		
				15MHz	DC_2A_n5A		
				20MHz	DC_4A_n5A		
				20MHz	DC_7A_n5A		
	n7	FDD	15KHz	5MHz	DC_12A_n5A	2500 to 2570	2620 to 2690
				10MHz	DC_14A_n5A		
				15MHz	DC_30A_n5A		
				20MHz	DC_48A_n5A		
				25MHz	DC_66A_n5A		
				30MHz	DC_71A_n5A		
				35MHz	DC_2A_n7A		
				40MHz	DC_4A_n7A		
	n12	FDD	15KHz	5MHz	DC_5A_n7A	699 to 716	729 to 746
				10MHz	DC_12A_n7A		
				15MHz	DC_13A_n7A		

					DC_30A_n12A DC_48A_n12A DC_66A_n12A DC_71A_n12A		
n13	FDD	15KHz	5MHz	/	777 to 787	746 to 756	
			10MHz				
n14	FDD	15KHz	5MHz	DC_2A_n14A DC_30A_n14A DC_66A_n14A	788 to 798	758 to 768	
			10MHz				
n25	FDD	15KHz	5MHz	DC_5A_n25A DC_7A_n25A DC_12A_n25A DC_13A_n25A DC_26A_n25A DC_66A_n25A DC_71A_n25A	1850 to 1915	1930 to 1995	
			10MHz				
			15MHz				
			20MHz				
			25MHz				
			30MHz				
			35MHz				
			40MHz				
n26	FDD	15KHz	5MHz	DC_7A_n26A	814 to 849	859 to 894	
			10MHz				
			15MHz				
			20MHz				
n30	FDD	15KHz	5MHz	DC_2A_n30A DC_5A_n30A DC_12A_n30A DC_14A_n30A DC_66A_n30A	2305 to 2315	2350 to 2360	
			10MHz				
n38	TDD	30KHz	10MHz	DC_2A_n38A DC_4A_n38A DC_5A_n38A DC_12A_n38A DC_66A_n38A DC_71A_n38A	2570 to 2620	2570 to 2620	
			15MHz				
			20MHz				
			25MHz				
			30MHz				
			40MHz				
n41	TDD	30KHz	10MHz	DC_2A_n41A DC_4A_n41A DC_5A_n41A DC_12A_n41A DC_25A_n41A DC_26A_n41A DC_66A_n41A DC_71A_n41A	2496 to 2690	2496 to 2690	
			15MHz				
			20MHz				
			25MHz				
			30MHz				
			35MHz				
			40MHz				
			45MHz				
			50MHz				
			60MHz				

				70MHz 80MHz 90MHz 100MHz			
n48	TDD	30KHz		10MHz 15MHz 20MHz 30MHz 40MHz	DC_71A_n48A	3550 to 3700	3550 to 3700
				5MHz 10MHz 15MHz 20MHz 25MHz 30MHz 35MHz 40MHz 45MHz			
				DC_2A_n66A DC_5A_n66A DC_7A_n66A DC_12A_n66A DC_13A_n66A DC_14A_n66A DC_30A_n66A DC_48A_n66A DC_71A_n66A			
				/	1710 to 1780	2110 to 2180	
n70	FDD	15KHz		5MHz 10MHz 15MHz	/	1695 to 1710	1995 to 2020
				5MHz 10MHz 15MHz 20MHz			
				DC_2A_n71A DC_5A_n71A DC_7A_n71A DC_12A_n71A DC_13A_n71A DC_48A_n71A DC_66A_n71A			
n77	TDD	30KHz		10MHz 15MHz 20MHz 25MHz 30MHz 40MHz 50MHz 60MHz 70MHz 80MHz 90MHz 100MHz	DC_2A_n77A DC_5A_n77A DC_7A_n77A DC_12A_n77A DC_13A_n77A DC_14A_n77A DC_25A_n77A DC_30A_n77A DC_41A_n77A DC_66A_n77A DC_71A_n77A	3450 to 3550 3700 to 3980	3450 to 3550 3700 to 3980
n78	TDD	30Khz	10MHz	DC_2A_n78A	3450 to 3550	3450 to 3550	

				15MHz	DC_4A_n78A	3700 to 3800	3700 to 3800				
				20MHz	DC_5A_n78A						
				25MHz	DC_7A_n78A						
				30MHz	DC_12A_n78A						
				40MHz	DC_13A_n78A						
				50MHz	DC_25A_n78A						
				60MHz	DC_26A_n78A						
				70MHz	DC_38A_n78A						
				80MHz	DC_41A_n78A						
				90MHz	DC_66A_n78A						
				100MHz	DC_71A_n78A						
Modulation Type For NR Bands				UL Modulation	DL Modulation						
				DFT-s-OFDM PI/2BPSK	/						
				DFT-s-OFDM QPSK	/						
				DFT-s-OFDM 16 QAM	/						
				DFT-s-OFDM 64 QAM	/						
				DFT-s-OFDM 256 QAM	/						
				CP-OFDM QPSK	CP-OFDM QPSK						
				CP-OFDM 16 QAM	CP-OFDM 16 QAM						
				CP-OFDM 64 QAM	CP-OFDM 64 QAM						
				CP-OFDM 256 QAM	CP-OFDM 256 QAM						
Feature	UL 2*2 MIMO: n2, n5, n7, n25, n38, n41, n48, n66, n70, n71, n77, n78										
HPUE Power Class		Class 2: n38, n41, n77, n78									
		Class 2: MIMO n2, n5, n7, n25, n66, n71									
		Class 1.5: MIMO n38, n41, n77, n78									
NR CA		CA_n25A-n41A; CA_n41A-n66A; CA_n41A-n71A; CA_n7A-n78A; CA_n5A-n78A; CA_n66A-n78A; CA_n7A-n77A; CA_n2A-n77A; CA_n5A-n77A CA_n66A-n77A; CA_n30A-n77A; CA_n48A-n66A; CA_n2A-n48A; CA_n5A-n48A; CA_n48A-n70A; CA_n48A-n71A; CA_n71A-n77A; CA_n12A-n77A; CA_n14A-n77A; CA_n71A-n78A; CA_n2A-n78A; CA_n25A-n78A; CA_n38A-n66A; CA_n25A-n48A; CA_n25A-n77A; CA_n25A-n38A; CA_n2A-n41A; CA_n12A-n41A; CA_n12A-n78A; CA_n13A-n77A; CA_n5A-n41A; CA_n12A-n48A; CA_n70A-n78A; CA_n41A-n70A; CA_n26A-n78A; CA_n26A-n77A; CA_n70A-n77A; CA_n38A-n71A									
Antenna Type		<input checked="" type="checkbox"/> External <input type="checkbox"/> Integrated									
Antenna Gain		n2		1.60dBi (Ant1); 1.60dBi (Ant7)							
		n5		0.70dBi (Ant1); 0.70dBi (Ant7)							
		n7		2.70dBi (Ant7); 2.70dBi (Ant1)							
		n12		0.50dBi (Ant1)							
		n13		0.20dBi (Ant1)							

	n14	0.10dBi (Ant1)
	n25	1.70dBi (Ant1); 1.70dBi (Ant7)
	n26	0.70dBi (Ant1)
	n30	-5.70dBi (Ant7)
	n38	2.40dBi (Ant7); 2.40dBi (Ant1)
	n41	2.70dBi (Ant7); 2.70dBi (Ant1)
	n48	-6.120dBi (Ant1); -6.120dBi (Ant7)
	n66	1.40dBi (Ant1); 1.40dBi (Ant7)
	n70	1.30dBi (Ant1); 1.30dBi (Ant7)
	n71	1.22dBi (Ant1); 1.22dBi (Ant7)
	n77(3450 to 3550MHz)	-0.64dBi (Ant1); -0.64dBi (Ant7)
	n77(3700 to 3980MHz)	-0.64dBi (Ant1); -0.64dBi (Ant7)
	n78(3450 to 3550MHz)	-0.64dBi (Ant1); -0.64dBi (Ant7)
	n78(3700 to 3800MHz)	-0.64dBi (Ant1); -0.64dBi (Ant7)

Note 1: The declared of product specification for EUT and/or Antenna presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Note 2: The frequency band subcarrier interval of TDD is 30kHz, and the frequency band subcarrier interval of FDD is 15kHz.

Note 3: Tested the power and RSE of ENDC, report only show worst mode.

Note 4: 5G NR support SA mode and NSA mode. According to the worst mode between SA and NSA mode, SA covers NSA mode.

Note 5: The maximum ERP/EIRP is calculated from max output power and max antenna gain.

Note 6: All modulations have been tested.

Note 7: ENDC and NR CA only test RSE, report only show worst mode.

Note 8: From C63.26: As an alternative, the highest power level measured in a narrower RBW (relative to the specified reference bandwidth) can be scaled by applying a correction factor determined from: $10 \log \left[\frac{\text{reference bandwidth}}{\text{resolution or measurement bandwidth}} \right]$. When using a smaller RBW, the current usage limit needs to be converted from the original limit.

Note 9: For MIMO Model: FCC KDB 662911 D01 Multiple Transmitter Output v02r01

If all antennas have the same gain, GANT, Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS}=1)$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi

If transmit signals are correlated, then

Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N_{ANT}]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

If all transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10_{G1/10} + 10_{G2/10} + \dots + 10_{GN/10})/N_{ANT}]$ dBi

For MIMO mode, the conducted Bandedge/Spurious are tested at single antenna port and add $10 \log(N_{ANT})$ according to KDB 662911 D01, only the worst MIMO Ant is shown in the report.

Support Equipment

Equipment	Manufacturer	Description	Model	Serial Number
EVB	Eagle	-	Q1-C3955	D1A24KF1K000038 D1A24KF1K000023
Adapter	Dong Guan City GangQi Electronic Co.,Ltd	AC to DC power supply to EVB	GQ36-120300-AX	-
Base Station Simulator	Anritsu	-	MT8821C	PWC0039
Base Station Simulator	Anritsu	-	MT8000A	PWB0092

2.3 Frequency List of Low/Middle/High Channels

NR Band n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
25	Channel	372500	376000	379500
	Frequency	1862.5	1880	1897.5
30	Channel	373000	376000	379000
	Frequency	1865	376000	1895
35	Channel	373500	1880	378500
	Frequency	1867.5	376000	1892.5
40	Channel	374000	1880	378000
	Frequency	1870	376000	1890

NR Band n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
20	Channel	166800	167300	167800
	Frequency	834	836.5	839

NR Band n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560

25	Channel	502500	507000	511500
	Frequency	2512.5	2535	2557.5
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
35	Channel	503500	507000	510500
	Frequency	2517.5	2535	2552.5
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
50	Channel	505000	507000	509000
	Frequency	2525	2535	2545

NR Band n12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	140300	141500	142700
	Frequency	701.5	707.5	713.5
10	Channel	140800	141500	142200
	Frequency	704	707.5	711
15	Channel	141300	141500	141700
	Frequency	706.5	707.5	708.5

NR Band n13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	155900	156400	156900
	Frequency	779.5	782	784.5
10	Channel	/	156400	/
	Frequency	/	782	/

NR Band n14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	158100	158600	159100
	Frequency	790.5	793	795.5
10	Channel	/	158600	/
	Frequency	/	793	/

NR Band n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
15	Channel	371500	376500	381500

	Frequency	1857.5	1882.5	1907.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
25	Channel	372500	376500	380500
	Frequency	1862.5	1882.5	1902.5
30	Channel	373000	376500	380000
	Frequency	1865	1882.5	1900
35	Channel	373500	376500	379500
	Frequency	1867.5	1882.5	1897.5
40	Channel	374000	376500	379000
	Frequency	1870	1882.5	1895

NR Band n26 (824 to 849MHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
20	Channel	166800	167300	167800
	Frequency	834	836.5	839

NR Band n26 (814 to 824MHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	163300	163800	164300
	Frequency	816.5	819	821.5
10	Channel	/	163800	/
	Frequency	/	819	/

NR Band n30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	461500	462000	462500
	Frequency	2307.5	2310.0	2312.5
10	Channel	/	462000	/
	Frequency	/	2310.0	/

NR Band n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615

15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
25	Channel	516500	519000	521500
	Frequency	2582.5	2595	2607.5
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600

NR Band n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
25	Channel	501702	518598	535500
	Frequency	2508.51	2592.99	2677.5
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
35	Channel	502698	518598	534498
	Frequency	2513.49	2592.99	2672.49
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
45	Channel	503700	518598	533496
	Frequency	2518.5	2592.99	2667.48
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
60	Channel	505200	518598	532002
	Frequency	2526	2592.99	2660.01
70	Channel	506202	518598	531000
	Frequency	2531.01	2592.99	2655
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640

NR Band n48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	637000	641666	646332
	Frequency	3555	3624.99	3694.98
15	Channel	637168	641666	646166
	Frequency	3557.52	3624.99	3692.49
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690
30	Channel	637668	641666	645666
	Frequency	3565.02	3624.99	3684.99
40	Channel	638000	641666	645332
	Frequency	3570.00	3624.99	3679.98

NR Band n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
25	Channel	344500	349000	353500
	Frequency	1722.5	1745	1767.5
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
35	Channel	345500	349000	352500
	Frequency	1727.5	1745	1762.5
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
45	Channel	346500	349000	351500
	Frequency	1732.5	1745	1757.5

NR Band n70 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	339500	340500	341500
	Frequency	1697.5	1702.5	1707.5
10	Channel	340000	340500	341000
	Frequency	1700	1702.5	1705
15	Channel	340500	340500	340500
	Frequency	1702.5	1702.5	1702.5

NR Band n71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	133100	136100	139100
	Frequency	665.5	680.5	695.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
20	Channel	134600	136100	137600
	Frequency	673	680.5	688

NR Band n77 (3700 to 3980MHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
25	Channel	647500	656000	664498
	Frequency	3712.5	3840	3967.47
30	Channel	647666	656000	664332
	Frequency	3714.99	3840	3964.98
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
60	Channel	648668	656000	663334
	Frequency	3730.02	3840	3950.01
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930

NR Band n77/78 (3450 to 3550MHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
20	Channel	630666	633334	636000
	Frequency	3459.99	3500.01	3540
25	Channel	630834	633334	635834
	Frequency	3462.51	3500.01	3537.51
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
40	Channel	631334	633334	635334
	Frequency	3470.01	3500.01	3530.01
50	Channel	631666	633334	635000
	Frequency	3474.99	3500.01	3525
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
70	Channel	632334	633334	634334
	Frequency	3485.01	3500.01	3515.01
80	Channel	632666	633334	634000
	Frequency	3489.99	3500.01	3510
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
100	Channel	/	633334	/
	Frequency	/	3500.01	/

NR Band n78 (3700 to 3800MHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
25	Channel	647500	650000	652500
	Frequency	3712.5	3750	3787.5
30	Channel	647666	650000	652334
	Frequency	3714.99	3750	3785.01
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
50	Channel	648334	650000	651666

	Frequency	3725.01	3750	3774.99
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
70	Channel	649000	650000	651000
	Frequency	3735	3750	3765
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
100	Channel	/	650000	/
	Frequency	/	3750	/

2.4 Application Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

47 CFR Part 2
47 CFR Part 22
47 CFR Part 24
47 CFR Part 27
47 CFR Part 90
47 CFR Part 96
ANSI C63.26-2015
FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

3 Test Condition

3.1 Test Environmental Conditions

During testing, environmental conditions are described below.

Normal Configuration		Extreme Configuration		
Voltage	3.8V	Voltage	High: 4.4V	Low: 3.3V

3.2 Test Configuration

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). The worst cases were recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes (Z, X, Y axis), receiver antenna polarization (horizontal and vertical), the worst emission was found in ' Z ' position and the worst case was recorded.

Test Case	BW	modulation					RB		CH		
		BPSK	QPSK	16QAM	64QAM	256QAM	1	full	L	M	H
RF Output Power & Effective (Isotropic) Radiated Power	all	v	v	v	v	v	v	v	v	v	v
Occupied Bandwidth	all	--	v	v	v	v	--	v	--	v	--
Conducted Band Edge Measurement	all	v	v	--	--	--	v	v	v	--	v
Spurious Emissions at Antenna Terminals	all	v	v	--	--	--	v	--	v	v	v
Peak-to-Average Ratio	all	v	v	v	v	v	--	v	--	v	--
Frequency Stability	max	--	v	--	--	--	--	v	--	v	--
Radiated Spurious Emission	worst case										

Note:

- 1.The mark " V " means that this configuration is chosen for testing.
- 2.The mark " -- " means that this bandwidth is not supported.
- 3.The device is investigated from 30Hz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
- 4.Frequency Stability : Normal Voltage = 3.8V ; Low Voltage =3.3V. ; High Voltage =4.4V
- 5.For radiation spurious emission, the worst cases were recorded for PSK/QPSK modulation in this report.

3.3 Equipment List

Instrument	Manufacturer	Model	Asset No.	Cal. Interval	Cal. Due Date
Conducted					
Base Station Simulator	Keysight	E7515E	PWC0042	1 Year	2025/09/12
Spectrum Analyzer	Keysight	N9020B	PWC0049	1 Year	2025/09/12
Base Station Simulator	Anritsu	MT8000A_020/021	PWC0032	1 Year	2025/09/12
Spectrum Analyzer	R&S	FSV3044	PWC0036	1 Year	2025/10/20
Coupling unit	Tonscend	JS0806-1	PWC0056	1 Year	2025/09/12
DC Power	Keysight	E3640A	PWC0044	1 Year	2025/09/12
Climate Chamber	Boyi	B-T-48C	PWC0050	1 Year	2025/09/12
Shielded Chamber	Mao Rui	MR534	PWC0041	3 Years	2026/08/26
RF cable	TIMES Microwave Systems	SFT205PUR-NMSWSM-1.50M	PWD0154	1 Year	2025/09/12
RF cable	TIMES Microwave Systems	SFT205PUR-NMSWSM-1.50M	PWD0155	1 Year	2025/09/12
RF cable	TIMES Microwave Systems	HF160-KMKMR-1.50M	PWD0153	1 Year	2025/09/12
Test Software	Tonscend	JS1120 V2.4.1	-	-	-
Radiated					
Receiver	R&S	ESR7	PWB0023	1 Year	2025/09/11
Spectrum Analyzer	R&S	FSV3044	PWB0024	1 Year	2025/09/11
Loop Antenna	R&S	HFH2-Z2E	PWB0026	1 Year	2025/09/13
TRILOG Broadband Antenna	Schwarzbeck	VULB9162	PWB0029	1 Year	2025/09/09
Double-Ridged Guide Antenna	ETS-Lindgren	3117	PWB0031	1 Year	2025/09/26
k Type Horn Antenna	Steatite Antennas	QMS-00880	PWB0035	1 Year	2025/09/08
Pre-Amplifier	R&S	OSP220 (OSP-B155G)	PWB0042	1 Year	2025/09/11
Pre-Amplifier	COM-MW	DLNA8	PWB0094	1 Year	2025/09/11
Pre-Amplifier	R&S	SCU18F	PWB0034	1 Year	2025/09/11
Pre-Amplifier	R&S	SCU40F1	PWB0036	1 Year	2025/09/11
Anechoic Chamber	ETS-Lindgren	Fact 3-2m	PWB0003	3 Years	2026/06/05
Test Software	Tonscend	JS36 V5.0.0	-	-	-

3.4 Test Uncertainty

No.	Parameter	Uncertainty
1	Maximum transmit power	400MHz≤f < 3GHz 0.684dB 3GHz≤f < 6GHz 1.210dB
2	Frequency error	37.074Hz
3	Bandwidth occupied	5.9kHz
4	Emission spurious, Band edge and PAPR	10Hz-3.5GHz: 0.982dB 3.5GHz-18GHz: 1dB 18GHz-26.5GHz: 0.777dB 26.5GHz-40GHz: 1.066dB
5	Radiated Spurious Emission	Below 1GHz: 4.88 dB Above 1GHz: 5.06 dB
6	Temperature	3°C
7	Humidity	1.3 %
8	Supply voltages	0.006 V

4 Test Items Description

Ambient condition

Shielded Chamber

Temperature [°C]	21.5 to 24.6
Humidity [%RH]	37 to 45
Pressure [kPa]	101.4 to 103.9

Anechoic Chamber

Temperature [°C]	20.3 to 25.7
Humidity [%RH]	44 to 57
Pressure [kPa]	99.4 to 101.7

4.1 RF Output Power & Effective (Isotropic) Radiated Power

Methods of Measurement

Base Station Simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

According to KDB 412172 D01 Power Approach,


$EIRP = PT + GT - LC$, $ERP = EIRP - 2.15$, where

PT = transmitter output power in dBm

GT = gain of the transmitting antenna in dBi

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

Test Setup

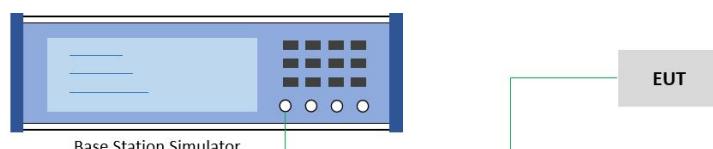


1. The testing follows ANSI C63.26 Section 5.2.
2. The transmitter output port was connected to the base station simulator.
3. Set EUT at maximum power through the base station simulator
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

4.2 EIRP Power Density

Methods of Measurement

Measurement Procedure: C63.26 -2015 section 5.2.4

Test Setup

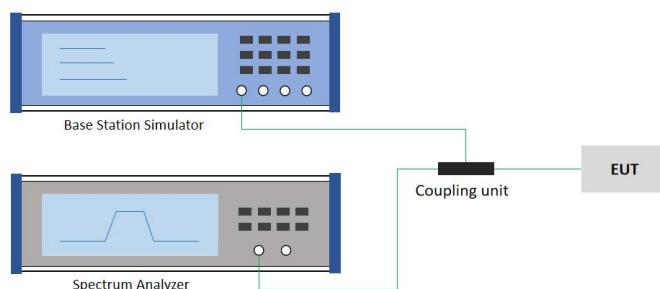


1. Set instrument center frequency to OBW center frequency.
2. Set span to at least 1.5 times the OBW.
3. Set the RBW to the specified reference bandwidth (often 1 MHz).
4. Set VBW $\geq 3 \times$ RBW.
5. Detector = RMS (power averaging).
6. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
7. Sweep time = auto couple.
8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

4.3 Peak-to-Average Ratio

Methods of Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth.

Test Setup

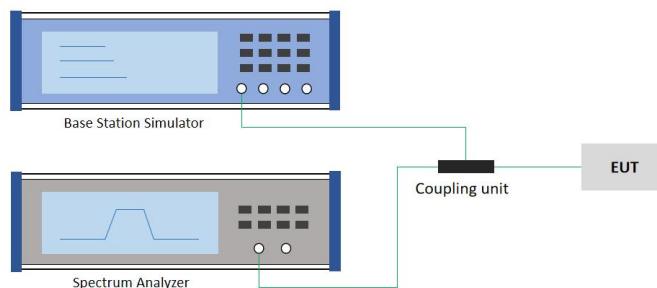

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a coupling unit.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.


4.4 Occupied Bandwidth

Methods of Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

Test Setup

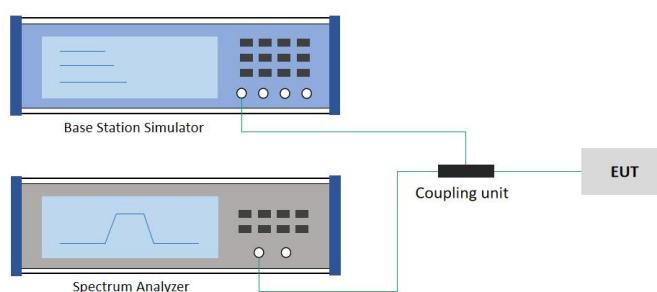

The testing follows ANSI C63.26 Section 5.4.

The EUT was connected to spectrum analyzer and system simulator via a coupling unit.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value).

Determine the '-26 dB down amplitude' as equal to (Reference Value – X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the '-X dB down amplitude' determined in step 6. If a marker is below this '-X dB down amplitude' value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.


4.5 Conducted Band Edge Measurement

Methods of Measurement

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel). In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to RMS.

Test Setup

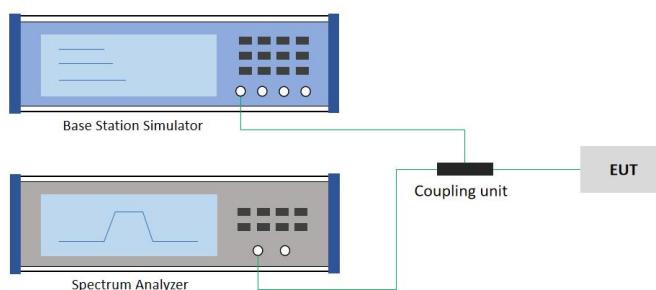

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a coupling unit.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used and the measured power was integrated over the full required measurement bandwidth of 1 MHz.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


4.6 Spurious Emissions at Antenna Terminals

Methods of Measurement

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Test Setup

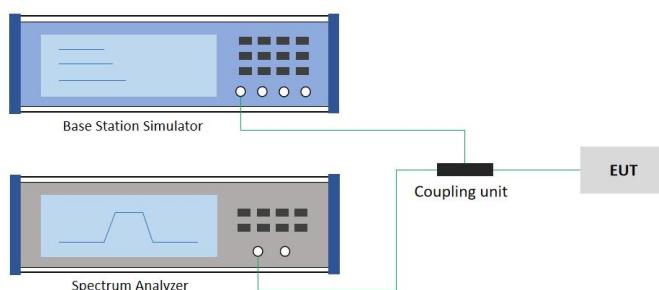

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a coupling unit.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Note: As described in Section C63.26 4.2.3: Generally, the measurement must be corrected by adding $10 \log [(\text{reference bandwidth}) / (\text{resolution or measurement bandwidth})]$ to the measured value (such bandwidth scaling is limited to cases where the measurement bandwidth used to perform the measurement is less than the reference bandwidth). Therefore, the converted limit value is the standard limit value minus the conversion factor.

4.7 Frequency Stability

Methods of Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

Test Setup

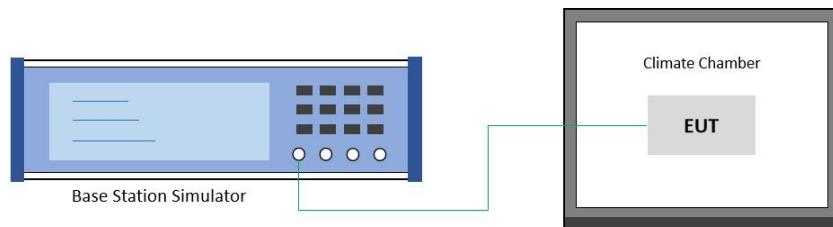

Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^\circ\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.



4.8 Radiated Spurious Emission


Methods of Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

Test Setup

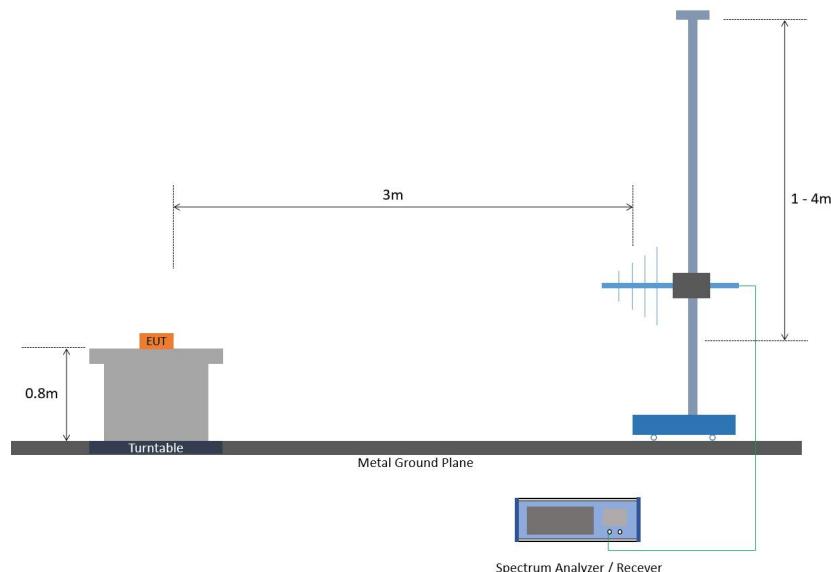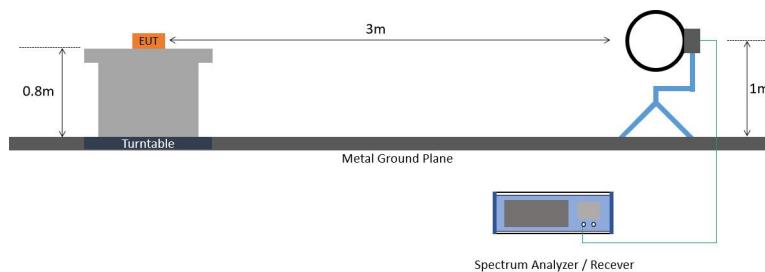

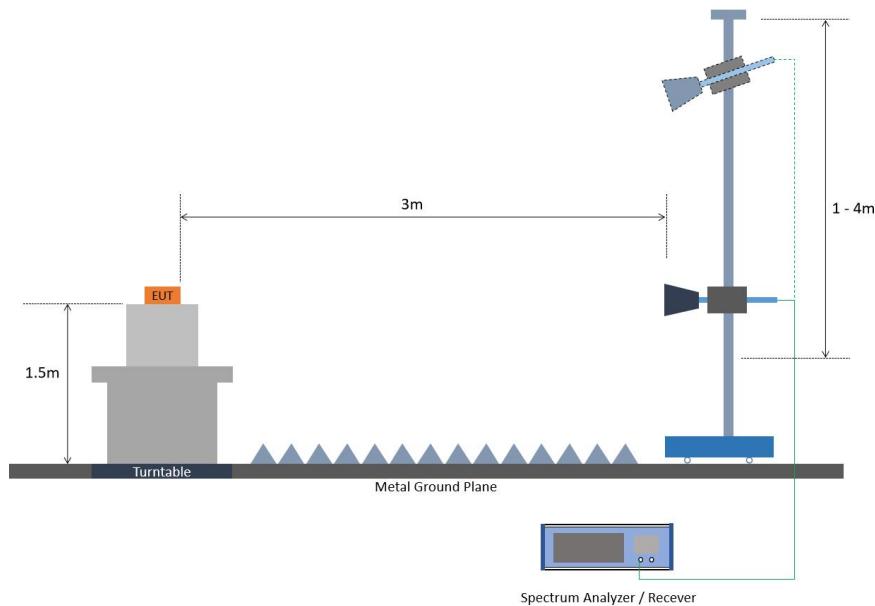

For radiated test above 1GHz

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
11. ERP (dBm) = EIRP - 2.15
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Remark: The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

----- THE END -----

ANNEX A: Test Results

Test Results of Conducted Test

NR Band n2	Refer to ANNEX A.1
NR Band n5	Refer to ANNEX A.2
NR Band n7	Refer to ANNEX A.3
NR Band n12	Refer to ANNEX A.4
NR Band n13	Refer to ANNEX A.5
NR Band n14	Refer to ANNEX A.6
NR Band n25	Refer to ANNEX A.7
NR Band n26(814-824MHz)	Refer to ANNEX A.8
NR Band n26(824-849MHz)	Refer to ANNEX A.9
NR Band n30	Refer to ANNEX A.10
NR Band n38	Refer to ANNEX A.11
NR Band n41	Refer to ANNEX A.12
NR Band n48	Refer to ANNEX A.13
NR Band n66	Refer to ANNEX A.14
NR Band n70	Refer to ANNEX A.15
NR Band n71	Refer to ANNEX A.16
NR Band n77(3450-3550MHz)	Refer to ANNEX A.17
NR Band n77(3700-3980MHz)	Refer to ANNEX A.18
NR Band n78(3450-3550MHz)	Refer to ANNEX A.19
NR Band n78(3700-3800MHz)	Refer to ANNEX A.20

Test Results of Radiated Test

Radiated Emission	Refer to ANNEX A.21
-------------------	---------------------

ANNEX B: The EUT Appearance

The EUT Appearance (internal and external photographs) are submitted separately.

ANNEX C: Test Setup Photographs

The Test Setup Photographs are submitted separately.