

FCC TEST REPORT

FCC ID: 2BNXC-XY001YB01

Report No. : SSP25070013-1E

Applicant : Shenzhen Xuanyaun Technology Co., Ltd.

Product Name : XORIGIN YONBO

Model Name : XY001YB01

Test Standard : FCC Part 15.247

Date of Issue : 2025-07-17



Shenzhen CCUT Quality Technology Co., Ltd.

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,
Guangdong, China; (Tel.:+86-755-23406590 website: www.ccuttest.com)

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

Test Report Basic Information

Applicant:	Shenzhen Xuanyaun Technology Co., Ltd. 3004, Galaxy WORLD Building B, Yabao Road No.1, Longgang District, Shenzhen, Guangdong, China
Manufacturer:	Inspur Intelligent Equipment Co., Ltd. West Area, First Floor, North, Building S06, No. 1036 Langchao Road, Jinan Area, Shandong Free Trade Pilot Zone, China
Product Name:	XORIGIN YONBO
Brand Name:	XORIGIN AI
Main Model:	XY001YB01
Series Models:	XY001YB02, XY001YB03
Test Standard:	FCC Part 15 Subpart C KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.4-2014 ANSI C63.10-2013
Date of Test	2025-07-02 to 2025-07-10
Test Result:	PASS
Tested By	 (Walker Wu)
Reviewed By:	 (Lorzix Luo)
Authorized Signatory:	 (Lahm Peng)
Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.	



CONTENTS

1. General Information.....	5
1.1 Product Information	5
1.2 Test Setup Information.....	6
1.3 Compliance Standards.....	7
1.4 Test Facilities.....	7
1.5 List of Measurement Instruments	8
1.6 Measurement Uncertainty	9
2. Summary of Test Results	10
3. Antenna Requirement.....	11
3.1 Standard and Limit.....	11
3.2 Test Result.....	11
4. Conducted Emissions	12
4.1 Standard and Limit.....	12
4.2 Test Procedure.....	12
4.3 Test Data and Results	13
5. Radiated Emissions	16
5.1 Standard and Limit.....	16
5.2 Test Procedure.....	16
5.3 Test Data and Results	18

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2025-07-17	Initial Release	Lahm Peng

1. General Information

1.1 Product Information

Product Name:	XORIGIN YONBO
Trade Name:	XORIGIN AI
Main Model:	XY001YB01
Series Models:	XY001YB02, XY001YB03
Rated Voltage:	DC 11.1V by battery, DC 9-12.6V Charging from Charging Base Charging Base Input: DC 5-20V, Output: DC 9-12.6V, 7.2A, 65W Max
Power Adapter:	INPUT:100-240V-50/60Hz, 1.5A, OUTPUT:5V=3.0A, 12V=3.0A, 15V=3.0A, 20V=3.25A, 65W Max
Battery:	DC 11.1V, 5000mAh
Test Sample No:	SSP25070013-1
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	
Note 2: The color of appearance and model name of series models listed are different from the main model, but the circuit and the electronic construction are the same, declared by the manufacturer.	

Wireless Specification	
Wireless Standard:	802.11b/g/n
Operating Frequency:	2412MHz ~ 2462MHz for 802.11b/g/n(HT20) 2422MHz ~ 2452MHz for 802.11n(HT40)
RF Output Power:	9.71dBm
Number of Channel:	11/7
Channel Separation:	5MHz
Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Antenna Gain:	2.03dBi
Type of Antenna:	FPCB Antenna
Type of Device:	☐ Portable Device ☒ Mobile Device ☐ Modular Device

1.2 Test Setup Information

List of Test Modes			
Test Mode	Description	Remark	
TM1	802.11b	2412MHz/2437MHz/2462MHz	
TM2	802.11g	2412MHz/2437MHz/2462MHz	
TM3	802.11n(H20)	2412MHz/2437MHz/2462MHz	
TM4	802.11n(H40)	2422MHz/2437MHz/2452MHz	
TM5	Charging	AC 120V/60Hz	
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
-	-	-	-
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
-	-	-	-
-	-	-	-

List of Channels							
No. of Channel	Frequency (MHz)	No. of Channel	Frequency (MHz)	No. of Channel	Frequency (MHz)	No. of Channel	Frequency (MHz)
01	2412	05	2432	09	2452	13	--
02	2417	06	2437	10	2457	14	--
03	2422	07	2442	11	2462	15	--
04	2427	08	2447	12	--	16	--

1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

1.4 Test Facilities

Laboratory Name:	Shenzhen CCUT Quality Technology Co., Ltd. 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6983.01
FCC Registration No.:	583813
FCC Designation No.:	CN1373
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

1.5 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Conducted Emissions					
AMN	ROHDE&SCHWARZ	ENV216	101097	2024-08-07	2025-08-06
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2024-08-07	2025-08-06
Test Cable	N/A	Cable 5	N/A	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	EMEC-3A1+	N/A	N/A
Radiated Emissions					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2024-08-07	2025-08-06
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2024-08-07	2025-08-06
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40-N	101692	2024-08-07	2025-08-06
Amplifier	SCHWARZBECK	BBV 9743B	00251	2024-08-07	2025-08-06
Amplifier	HUABO	YXL0518-2.5-45	--	2024-08-07	2025-08-06
Amplifier	COM-MW	DLAN-18G-4G-02	10229104	2024-08-07	2025-08-06
Loop Antenna	DAZE	ZN30900C	21104	2024-08-03	2025-08-02
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2024-08-03	2025-08-02
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2024-08-03	2025-08-02
Horn Antenna	COM-MW	ZLB7-18-40G-950	12221225	2024-08-03	2025-08-02
Attenuator	QUANJUDA	6dB	220731	2024-08-07	2025-08-06
Test Cable	N/A	Cable 1	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 2	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 3	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 4	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 8	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 9	N/A	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	FA-03A2 RE+	N/A	N/A
Conducted RF Testing					
RF Test System	MWRFTTest	MW100-RFCB	220418SQS-37	2024-08-07	2025-08-06
Spectrum Analyzer	KEYSIGHT	N9020A	ATO-90521	2024-08-07	2025-08-06
RF Test Software	MWRFTTest	MTS 8310	N/A	N/A	N/A
Laptop	Lenovo	ThinkPad E15 Gen 3	SPPOZ22485	N/A	N/A

1.6 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Emissions	9kHz ~ 30MHz	±1.64 dB
Radiated Emissions	9kHz ~ 30MHz	±2.88 dB
	30MHz ~ 1GHz	±3.32 dB
	1GHz ~ 18GHz	±3.50 dB
	18GHz ~ 40GHz	±3.66 dB
Conducted Output Power	9kHz ~ 26GHz	±0.50 dB
Occupied Bandwidth	9kHz ~ 26GHz	±4.0 %
Conducted Spurious Emission	9kHz ~ 26GHz	±1.32 dB
Power Spectrum Density	9kHz ~ 26GHz	±0.62 dB

2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.207	Conducted Emissions	Passed
FCC Part 15.209, 15.247(d)	Radiated Emissions	Passed
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable		

3. Antenna Requirement

3.1 Standard and Limit

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has an FPCB antenna, fulfill the requirement of this section.

4. Conducted Emissions

4.1 Standard and Limit


According to the rule FCC Part 15.207, Conducted emissions limit, the limit for a wireless device as below:

Frequency of Emission (MHz)	Conducted emissions (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz
 Note 2: The lower limit applies at the band edges

4.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.2.

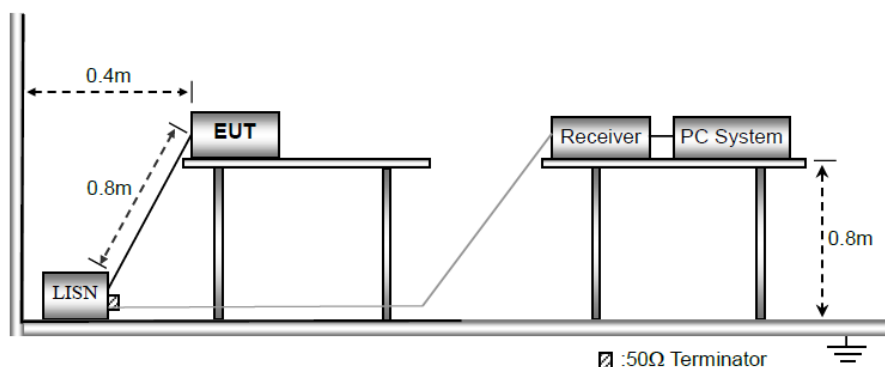

Test Setup Block Diagram

a) The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following is the setting of the receiver

Attenuation: 10dB

Start Frequency: 0.15MHz

Stop Frequency: 30MHz

IF Bandwidth: 9kHz

c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

f) LISN is at least 80 cm from nearest part of EUT chassis.

g) For the actual test configuration, please refer to the related Item - photographs of the test setup.


4.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.207 standard limit for a wireless device, and with the worst case as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Conducted Emissions

Tested Mode:	TM5
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

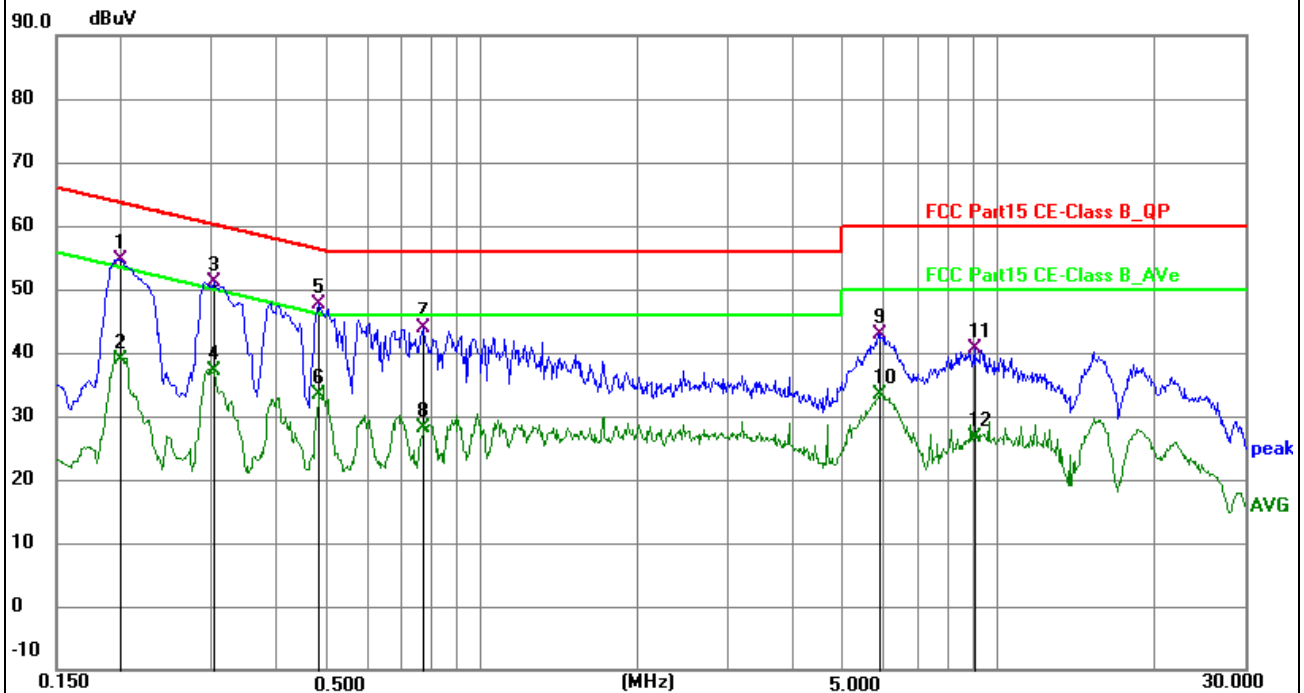

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1995	45.41	9.21	54.62	63.63	-9.01	QP	P	
2	0.1995	29.71	9.21	38.92	53.63	-14.71	AVG	P	
3	0.3030	41.68	9.40	51.08	60.16	-9.08	QP	P	
4	0.3030	27.78	9.40	37.18	50.16	-12.98	AVG	P	
5 *	0.4830	38.23	9.39	47.62	56.29	-8.67	QP	P	
6	0.4830	24.03	9.39	33.42	46.29	-12.87	AVG	P	
7	0.7710	34.51	9.40	43.91	56.00	-12.09	QP	P	
8	0.7710	18.82	9.40	28.22	46.00	-17.78	AVG	P	
9	5.8920	33.35	9.57	42.92	60.00	-17.08	QP	P	
10	5.8920	23.70	9.57	33.27	50.00	-16.73	AVG	P	
11	9.0060	30.96	9.56	40.52	60.00	-19.48	QP	P	
12	9.0060	16.95	9.56	26.51	50.00	-23.49	AVG	P	


Test Plots and Data of Conducted Emissions

Tested Mode: TM5

Test Voltage: AC 120V/60Hz

Test Power Line: Live

Remark:

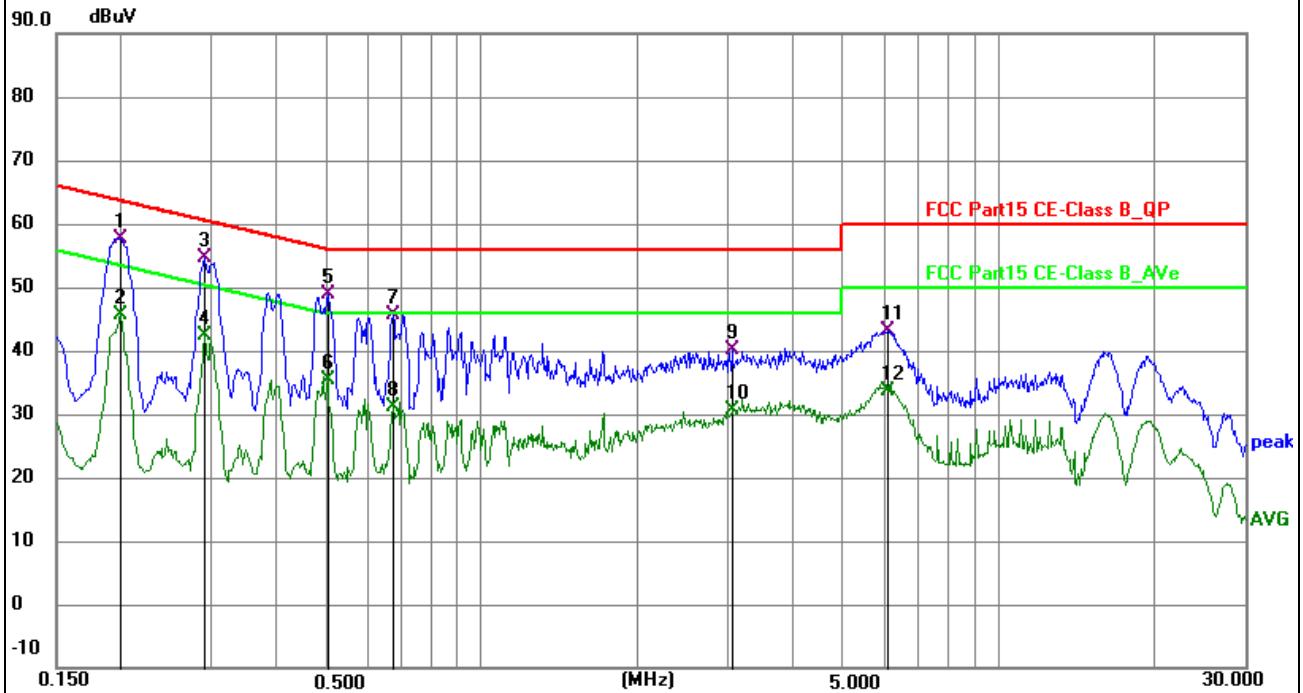

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1995	48.31	9.39	57.70	63.63	-5.93	QP	P	
2	0.1995	36.12	9.39	45.51	53.63	-8.12	AVG	P	
3	0.2893	44.97	9.57	54.54	60.54	-6.00	QP	P	
4	0.2893	32.80	9.57	42.37	50.54	-8.17	AVG	P	
5	0.5010	39.34	9.58	48.92	56.00	-7.08	QP	P	
6	0.5010	25.89	9.58	35.47	46.00	-10.53	AVG	P	
7	0.6720	36.12	9.57	45.69	56.00	-10.31	QP	P	
8	0.6720	21.46	9.57	31.03	46.00	-14.97	AVG	P	
9	3.0570	30.34	9.69	40.03	56.00	-15.97	QP	P	
10	3.0570	20.89	9.69	30.58	46.00	-15.42	AVG	P	
11	6.1035	33.41	9.76	43.17	60.00	-16.83	QP	P	
12	6.1035	23.75	9.76	33.51	50.00	-16.49	AVG	P	

5. Radiated Emissions

5.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

According to the rule FCC Part 15.209, Radiated emission limit for a wireless device as below:


Frequency of Emission (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3
Note: The more stringent limit applies at transition frequencies.		

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

5.2 Test Procedure


Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6.

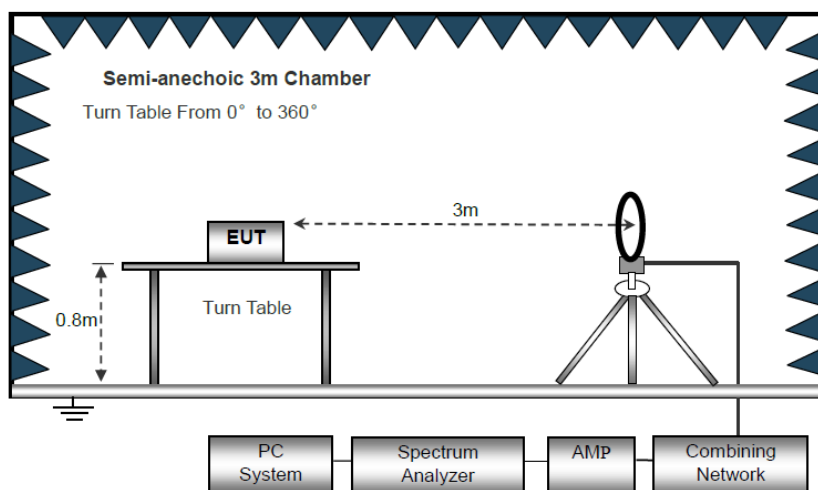

Block Diagram of Radiated Emission Below 30MHz

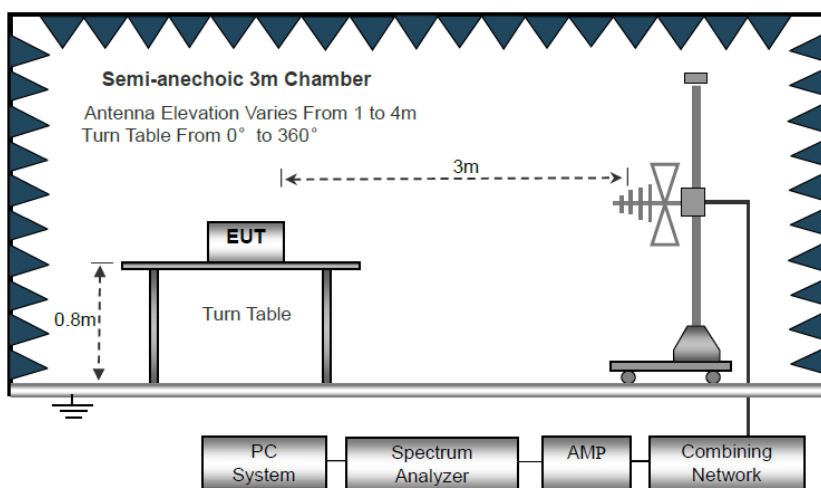

Block Diagram of Radiated Emission From 30MHz to 1GHz

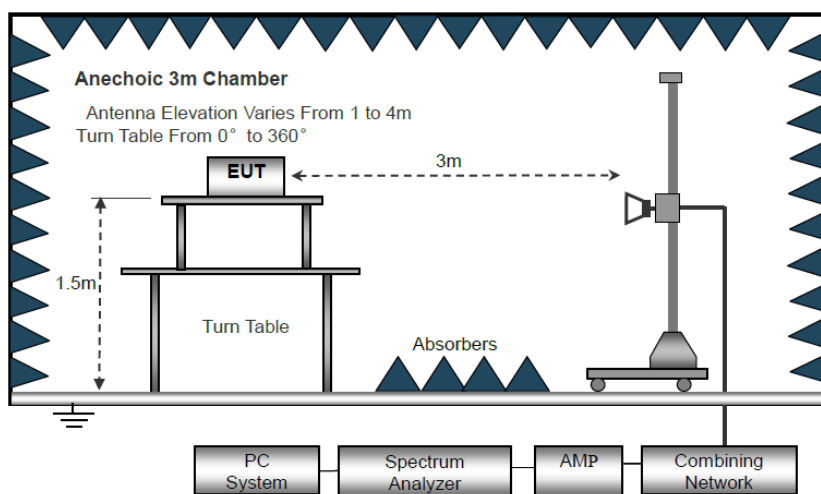

Block Diagram of Radiated Emission Above 1GHz

- a) The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.
- b) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- c) Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured
RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$, 10kHz for $f < 30\text{MHz}$
VBW $\geq$ RBW, Sweep = auto
Detector function = peak
Trace = max hold
- d) Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- e) The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.
- f) For the actual test configuration, please refer to the related item - EUT test photos.


5.3 Test Data and Results

All of the 802.11b, 802.11g and 802.11n modes have been tested, the EUT complied with the FCC Part 15.247 standard limit for a wireless device, and with the worst case 802.11b_2412MHz as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

Radiated Emission Test Data (30MHz to 1GHz)


Tested Mode:	TM1
Test Antenna Polarization:	Horizontal
Remark:	

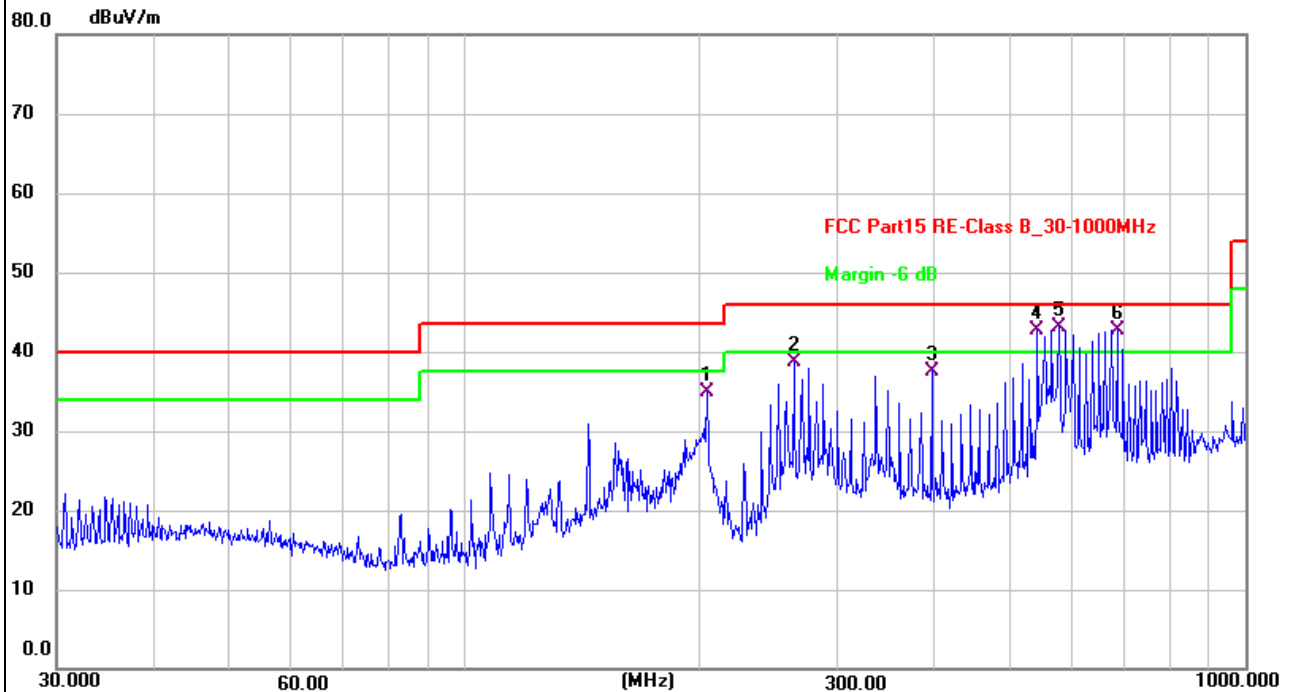

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	204.2376	46.92	-12.00	34.92	43.50	-8.58	QP	100	314	P	
2	263.8190	48.15	-9.49	38.66	46.00	-7.34	QP	100	222	P	
3	396.2414	43.16	-5.70	37.46	46.00	-8.54	QP	100	74	P	
4 !	541.3724	45.52	-2.83	42.69	46.00	-3.31	QP	100	254	P	
5 *	576.6443	45.20	-2.15	43.05	46.00	-2.95	QP	100	352	P	
6 !	684.7453	42.83	-0.07	42.76	46.00	-3.24	QP	100	24	P	

Radiated Emission Test Data (30MHz to 1GHz)

Tested Mode:	TM1
Test Antenna Polarization:	Vertical
Remark:	

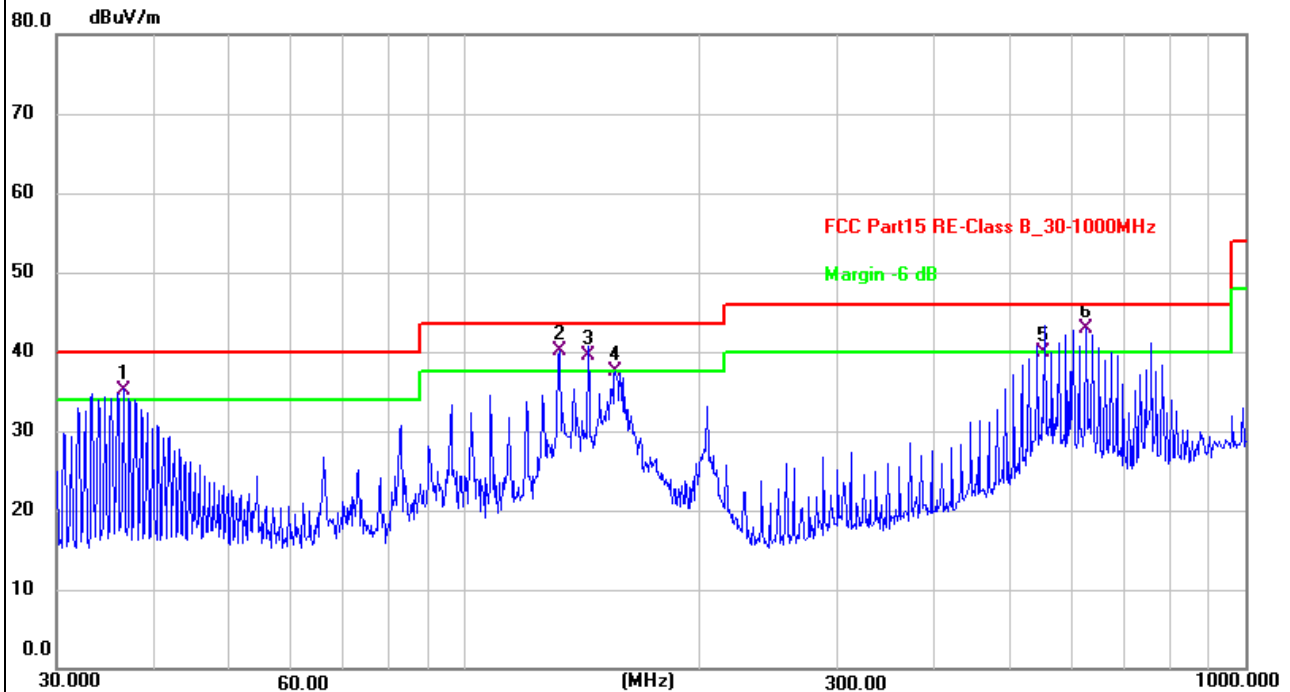

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 !	36.5092	44.07	-8.87	35.20	40.00	-4.80	QP	100	85	P	
2 !	132.2206	48.72	-8.69	40.03	43.50	-3.47	QP	100	12	P	
3 !	144.0195	47.48	-8.02	39.46	43.50	-4.04	QP	100	360	P	
4 !	155.9101	45.38	-7.81	37.57	43.50	-5.93	QP	100	188	P	
5	552.0183	42.55	-2.71	39.84	46.00	-6.16	QP	100	63	P	
6 *	625.0780	44.18	-1.22	42.96	46.00	-3.04	QP	100	291	P	

***** END OF REPORT *****