

Test Report

Report No. : MTi250219007-0903E4

Date of Issue : 2025-05-27

Applicant : OXAA Corp.

Product : 5 in 1 Wireless Charging Stand with Alarm
Clock & Speaker

Model(s) : OXWC1320, OXWC2320

FCC ID : 2BNYA-OXWC1320

Shenzhen Microtest Co., Ltd.

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	5
1.3	Description of support units	6
2	Measurement uncertainty	6
3	Test facilities and accreditations	7
3.1	Test laboratory	7
4	List of test equipment	8
5	Test result	9
5.2	Test setup	10
5.3	Test Procedures	10
5.4	Information of test equipment	11
5.5	Test results	12
	Photographs of the Test Setup	15
	Photographs of the EUT	15

Test Result Certification		
Applicant	OXAA Corp.	
Applicant Address	6-3545 Odyssey Dr, Mississauga, ON L5M 2S4, Canada	
Manufacturer	OXAA Corp.	
Manufacturer Address	6-3545 Odyssey Dr, Mississauga, ON L5M 2S4, Canada	
Factory	Shenzhen Aodehong Electronic Technology Co.,Ltd.	
Factory Address	Room 501, Building 2, Gaoya industrial park, No. 8 Liuhe Road, Liuyue, Henggang Street, Longgang District, Shenzhen City, Guangdong Province, China.	
Product description		
Product name	5 in 1 Wireless Charging Stand with Alarm Clock & Speaker	
Trademark	OXAA	
Model name	OXWC1320	
Series Model(s)	OXWC2320	
Standards	47 CFR PART 1, § 1.1310 47 CFR PART 2.1091	
Test method	KDB 680106 D01 Wireless Power Transfer v04	
Testing Information		
Date of test	2025-02-25 to 2025-05-23	
Test Result	Pass	
Prepared by:	Yanice.Xie	<i>Yanice Xie</i>
Reviewed by:	David Lee	<i>David. Lee</i>
Approved by:	Lewis Lian	<i>Lewis Lian</i>

1 General Description

1.1 Description of the EUT

Product name:	5 in 1 Wireless Charging Stand with Alarm Clock & Speaker
Model name:	OXWC1320
Series Model:	OXWC2320
Model difference:	All the models are the same circuit and module, except the model name and color.
Electrical rating:	Input:QC/PD 9V=3A Min Output:5W/7.5W/10W/15W(Smart Phone) Output:5W (Earphone) Output:2.5W (Smart Watch) Output:4 Ω 5W(BT Device) Battery:DC 3.7V 1000mAh 3.7Wh
Accessories:	Cable: USB-C to USB-C cable 1.4m*1
Hardware version:	1.0
Software version:	1.0
Test sample(s) number:	MTi250219007-09-R001
RF specification:	
Operation frequency:	Coil 1:115-205kHz(5W-EPP 15W) & 360 kHz(MPP 15W) Coil 2:115-205kHz Coil 3:300-350kHz
Modulation type:	ASK
Antenna type:	Coil

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Wireless output phone(5W)+Earbus(5W)+watch(2.5W)
Mode2	Wireless output phone(7.5W)+Earbus(5W)+watch(2.5W)
Mode3	Wireless output phone(10W)+Earbus(5W)+watch(2.5W)
Mode4	Wireless output phone(EPP:15W)+Earbus(5W)+watch(2.5W)
Mode5	Wireless output phone(MPP:15W)+ Earbus (3W)+watch(3W)
Mode6	Wireless output phone(5W)+Earbus(5W)
Mode7	Wireless output phone(7.5W)+Earbus(5W)
Mode8	Wireless output phone(10W)+Earbus(5W)
Mode9	Wireless output phone(EPP:15W)+Earbus(5W)
Mode10	Wireless output phone(MPP:15W)+Earbus(5W)
Mode11	Wireless output phone(5W)+watch(2.5W)
Mode12	Wireless output phone(7.5W)+watch(2.5W)
Mode13	Wireless output phone(10W)+watch(2.5W)
Mode14	Wireless output phone(EPP:15W)+watch(2.5W)
Mode15	Wireless output phone(MPP:15W)+watch(2.5W)
Mode16	Wireless output Earbus(5W)+watch(2.5W)
Mode17	Wireless output phone(5W)
Mode18	Wireless output phone(7.5W)
Mode19	Wireless output phone(10W)
Mode20	Wireless output phone(EPP:15W)
Mode21	Wireless output phone(MPP:15W)
Mode22	Wireless output watch(2.5W)
Mode23	Wireless output Earbus(5W)
Mode24	Stand by

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
HUAWEI QUICK CHARGE(65W)	HW-200200ZP1	JN67LSN7N03451	HUAWEI
Watch	Apple Watch SE	FH7PP6BAG91J6	Apple
Mobile phone	iPhone 15	KXPWNQFK90	Apple
Mobile phone	Find X3	bf6e6b3b	OPPO
Air Pods	MQD83CH/A	V1	Apple
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurements(3kHz~10MHz)	$\pm 14.8\%$
Electric field measurements(3kHz~10MHz)	$\pm 17.5\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 Test facilities and accreditations**3.1 Test laboratory**

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E143	Near-field Electric and Magnetic Field Sensor System	SPEAG	MAGPy-8H3 D+ED3	3101	2024/3/12	2027/3/11

No.	Equipment	Manufacturer	Model	Software version:	Cal. date	Cal. Due
MTI-E016S	MPE test software	SPEAG	MAGPY 2.6	2.6	/	/

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.


Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

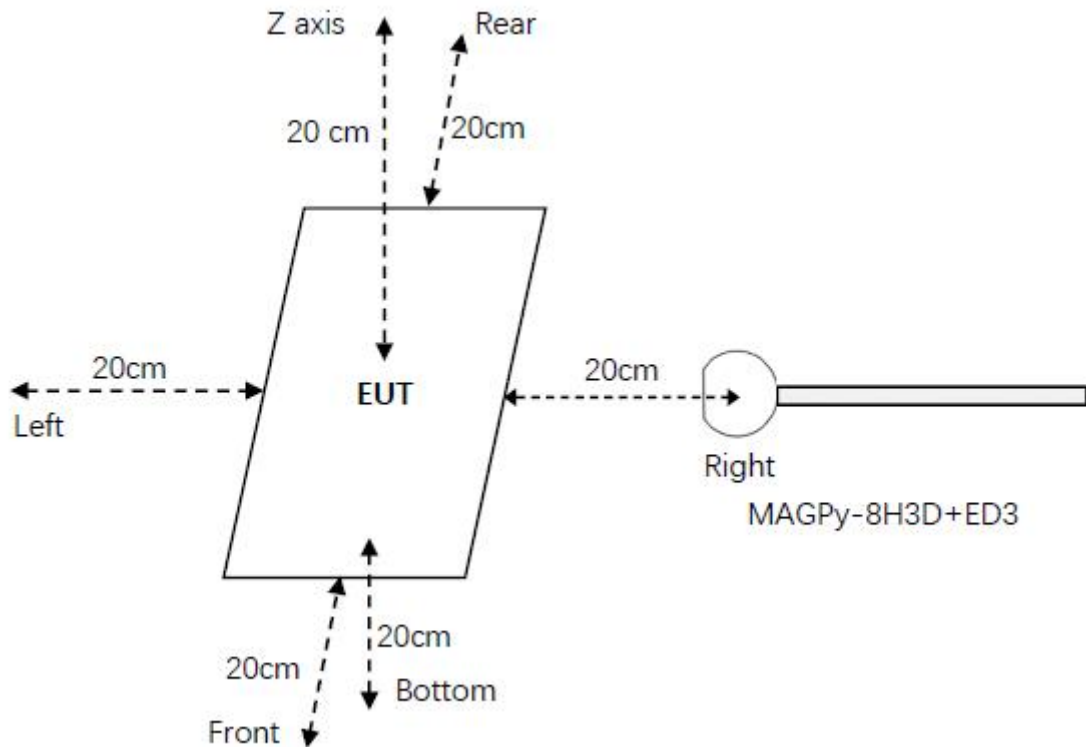5.2 Test setup**5.3 Test Procedures**

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with these devices considered to meet the § 2.1091-Mobile conditions (“generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source’s radiating structure(s) and [the nearest person]”).
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

5.4 Information of test equipment

Test equipment: MAGPy-8H3D+ED3	
Diameter	60mm
8 isotropic H-field sensors	Concentric loops of 1cm ² arranged at the corner of a cube of 22mm side length
1 isotropic E-field sensor	Orthogonal dipole/monopole (arm length: 50mm)
Measurement center	18.5mm from the probe tip
Dimensions	110*635*35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)

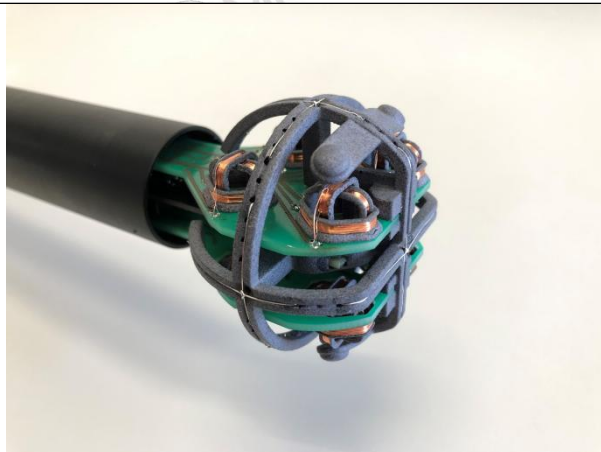

Test probe, without the casing

5.5 Test results

Test condition 1: Mode 4 operating mode with client device (1 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.62	614	0.26%	0.08	1.63	4.91%
Left	0.98			0.04		
Right	0.64			0.03		
Front	0.43			0.05		
Rear	0.67			0.04		
Bottom	1.01			0.01		

Test condition 2: Mode 4 operating mode with client device (50 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	1.30	614	0.21%	0.06	1.63	3.93%
Left	0.78			0.03		
Right	0.51			0.02		
Front	0.34			0.04		
Rear	0.54			0.03		
Bottom	0.81			0.01		

Test condition 3: Mode 4 operating mode with client device (99 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.05	614	0.17%	0.05	1.63	3.19%
Left	0.64			0.03		
Right	0.42			0.02		
Front	0.28			0.03		
Rear	0.44			0.03		
Bottom	0.66			0.01		

TEST REPORT

Report No.: MTi250219007-0903E4

Test condition 1: Mode 5 operating mode with client device (1 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.59	614	0.26%	0.05	1.63	3.07%
Left	1.03			0.03		
Right	0.98			0.03		
Front	0.84			0.02		
Rear	0.67			0.03		
Bottom	1.11			0.01		

Test condition 2: Mode 5 operating mode with client device (50 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	1.27	614	0.21%	0.04	1.63	2.45%
Left	0.82			0.02		
Right	0.78			0.02		
Front	0.67			0.02		
Rear	0.54			0.02		
Bottom	0.89			0.01		

Test condition 3: Mode 5 operating mode with client device (99 % battery status of client device)

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.03	614	0.17%	0.03	1.63	1.99%
Left	0.67			0.02		
Right	0.64			0.02		
Front	0.55			0.01		
Rear	0.44			0.02		
Bottom	0.72			0.009		

SIMULTANEOUS TRANSMISSIONS

When a number of sources at different frequencies, and/or broadband sources, contribute to the total exposure, it becomes necessary to weigh each contribution relative to the MPE. To comply with the MPE, the fraction of the MPE in terms of E2, H2 (or power density) incurred within each frequency interval should be determined and the sum of all such fractions should not exceed unity. In order to ensure compliance with the MPE for a controlled environment, the sum of the ratios of the power density to the corresponding MPE should not exceed unity. That is

$$\sum_{i=1}^n \frac{S_i}{MPE_i} \leq 1$$

Simultaneous transmit:

Operating Band	The MPE ratio
Bluetooth	0.1322
WPT	0.0491

WPT+Bluetooth=0.1664+0.0491=0.1813

For the max result: 0.1813 ≤ 1.0, No SAR is required.

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****