


# Quick User Guide



## Diagnostic Tools

### DeepScan Max

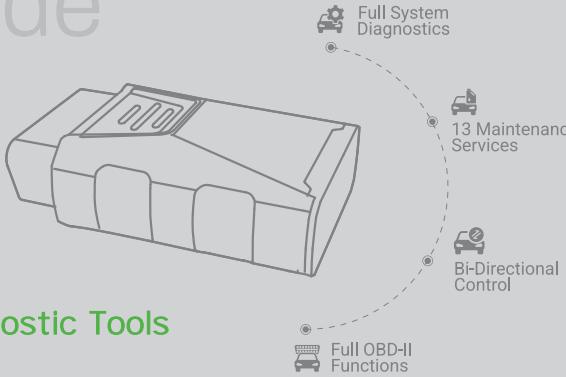

## Changsha Angsi E-commerce Co., Ltd.

Leifeng St. No.1839 Fenglin 3rd Rd., 139, A1, Hunan Leifeng Agricultural Market, Xiangjiang New Dist, Changsha, Hunan, China



Thank you for purchasing the DeepScan. This quick user guide will walk you through the basic setup and operation of the DeepScan wireless diagnostic dongle. For the best user experience, carefully read and follow all the instructions and warnings.

## 1

### Download & Install the APP



Search for "DeepScan OBD2 Scanner" in the [App Store](#) or [Google Play](#) to download and install.

## 2

### Register & Log In

**Log In**

Email

Password

Remember Password


**Log In**

[Forgot password?](#)

Open the APP and log in to your account. (If you do not have an account, please register with your email.)

## 3

### Bind the VCI

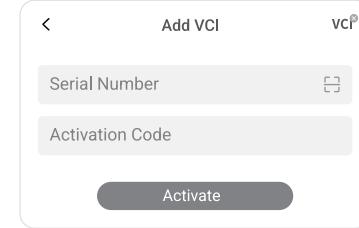


Tap Me > VCI Management > Add VCI.

To get the serial number and activation code, please scan the QR code on the product. (Alternatively, once the Bluetooth connection between the DeepScan and your phone is established, the serial number and activation code will be automatically recognized.) Then, tap **Activate**.

## 4


### Download the Diagnostic Software

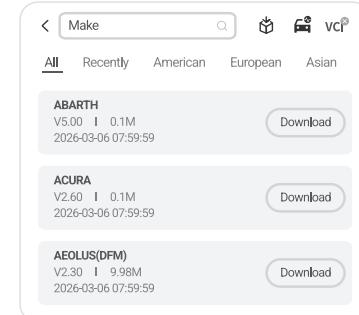

You will need to download the vehicle-specific software the first time you use the diagnostic function. Tap **Diagnostics** on the home screen and download the software you need.

## 5

## Plug the DeepScan into the vehicle's OBD-II port.

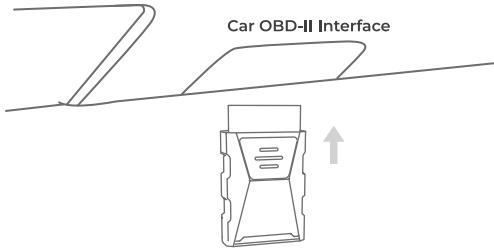

The vehicle's OBD-II port is usually located under the dashboard.

## 6


## Turn the ignition to the "ON" position.



The green LED light on the DeepScan indicates it is powered on.

## 7

## Bluetooth Connection

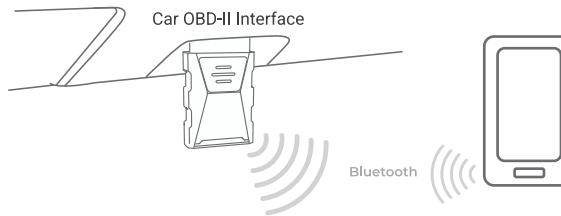

Tap **Diagnostics** on the home screen, then tap **VCI** at the top right of the screen to establish a Bluetooth connection with the unit. When connection is established, the LED light on the unit will turn solid blue.

**Your DeepScan is now ready for use.**

### FAQ

Q: What should I do if a communication error occurs?

A: Follow the steps below to identify the problem:

- 1) Check if the ignition is ON.
- 2) Check if the DeepScan is securely plugged into the vehicle's OBD-II port.
- 3) Turn the ignition off. Then, turn it on after 10 seconds and continue the operation.
- 4) Check if the vehicle's control module is defective.

Q: Why do I need to download the diagnostic software after installing the DeepScan OBD2 Scanner?

A: Since there are various vehicle manufacturers, different diagnostic software is required for different brands.

Q: What special functions does the DeepScan support?

A: The DeepScan supports 13 special functions, including Oil Reset, Throttle Adaptation, EPB Reset, ABS Bleeding, Steering Angle Reset, DPF Regeneration, Airbag Reset, BMS Reset, Injector Coding, Tire Pressure Monitoring System (TPMS) Reset, Sunroof Initialization, Seat Calibration, and Window Calibration.

Q: Do I need to update the firmware before using it for the first time?

A: Yes. Firmware will automatically update to the latest version once the DeepScan is connected with your phone via Bluetooth. You can also tap **Me > Firmware Update** to update the firmware manually.

## Compliance Information

### Regulatory Compliance

FCC ID: 2BNZ7-DSCAN IC: 33598-DSCAN HVIN: DeepScan Max

### FCC & ISED Statement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: – Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

– Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This device contains licence-exempt transmitter(s) /receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : 1) L'appareil ne doit pas produire de brouillage; 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance. Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 2.5 de RSS 102 et la conformité à l'exposition de RSS-102 rf, utilisateurs peuvent obtenir l'information canadienne sur l'exposition et la conformité de rf. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body. Cet émetteur ne doit pas être co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ou émetteur. Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

