



深圳市众成通讯科技有限公司

Shenzhen Zhongcheng Communication Technology Co., Ltd.

5th Floor, Building C, Huafeng Industrial Zone, Liuxian 2nd Road, Baoan
District 71, Shenzhen

Antenna specification


Customer: SHENZHEN YINGKE TECHNOLOGY CO.,LTD

Project	YK300-ANT		
Band	2400-2500MHz / 5150-5880MHz		
ZC PN	AE001-PA-96		
Version	R:A	Data	2024-4-10

RF		ME	
Checked By			
Confirmed By			
Cust Confirm			

1. Summary of the DUT

Antenna Picture

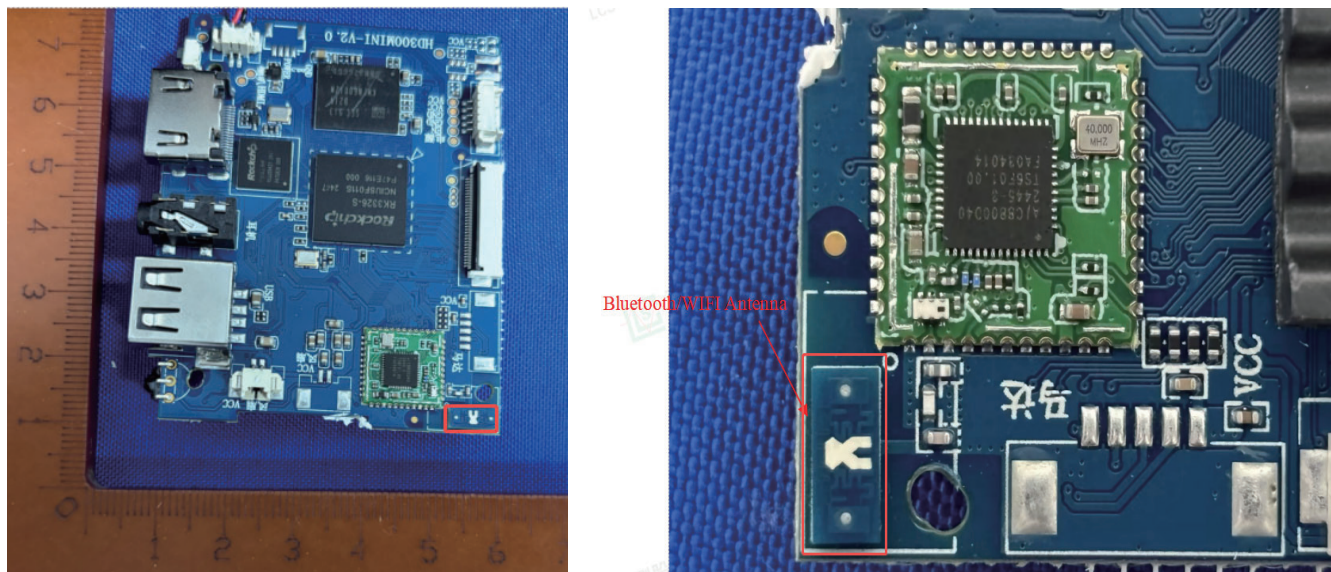

2. Electrical Specification:

Antenna types	PCB Antenna
Frequency	2400-2500 MHz / 5150-5880MHz
Impedance	50 Ω
VSWR	< 2.0
Peak Gain	2.4GHz : 1.73dBi (Max); 5GHz : 4.45dBi (Max)
Efficiency	>35 %
Antenna Material	PCB+Coaxial line
Connector Type	1.13 MHF-1-Plug

3. Test Condition

3.1	Test item	Test equipment and type	
Passive testing	1. Antenna Gain 2. S.W.R 3. Return Loss 4. Radiation Pattern	1. Network analyzer (R&S ZVL6) 2. Network analyzer (HP 8753D)	

3.2 Matching Circuit The matching circuit was Default

4. RF Performance

4.1 Passive parameters

Freq. (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain (dBi)	0.58	0.66	1.1	1.02	1.17	1.59	0.72	0.08	0.72	1.19	1.73

Freq. (MHz)	5150	5170	5190	5210	5230	5250	5270	5290	5310	5330	5350
Gain (dBi)	3.13	3.45	3.56	4.11	4.31	4.21	4.1	3.82	3.28	3.19	3.04


Freq. (MHz)	5720	5740	5760	5780	5800	5820	5840	5860	5880
Gain (dBi)	2.51	4.45	3.32	4.18	2.54	4.01	1.41	2.47	1.09

4.2 S Parameter

Frequency (MHz)	2400	2450	2480
Return Loss (dB)	-20.58	-22.74	-15.39
VSWR	1.63	1.28	1.81




4.3 Radiation

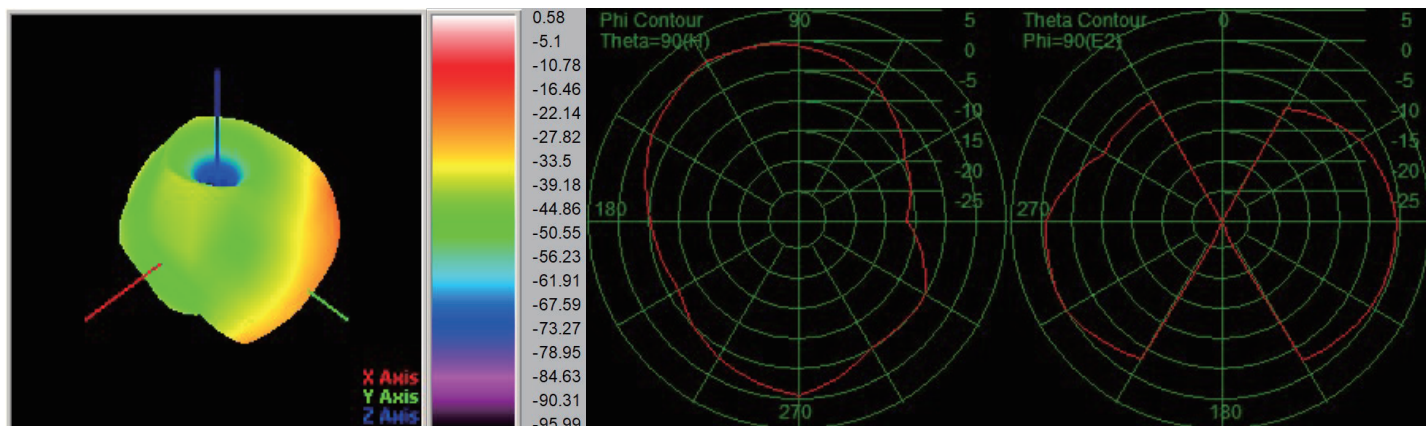


Passive -Freq2400.00MHZ

Gain:0.58(dBi)

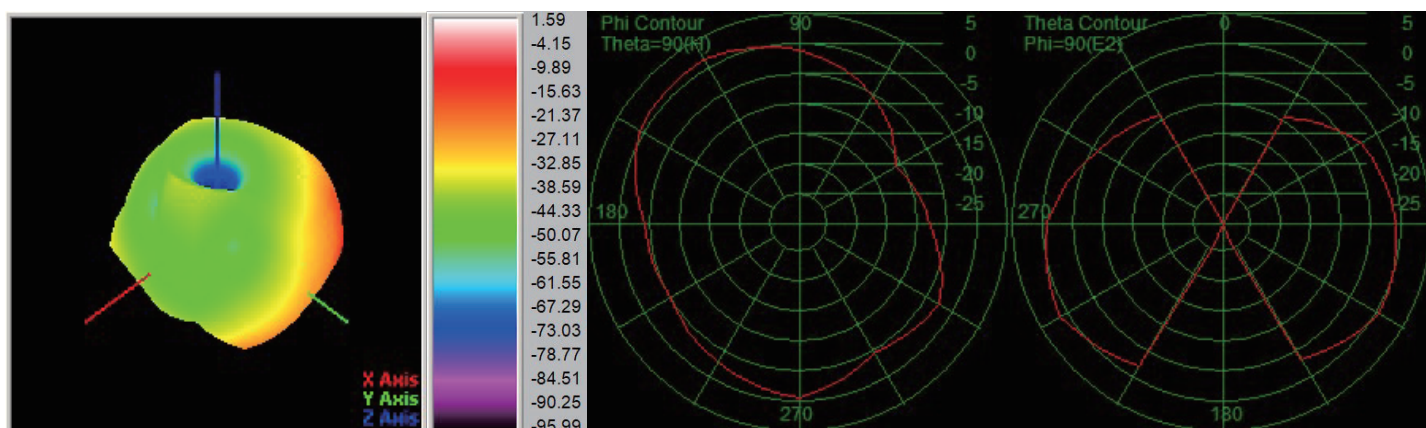


Passive -Freq2450.00MHZ

Gain: 1.59(dBi)

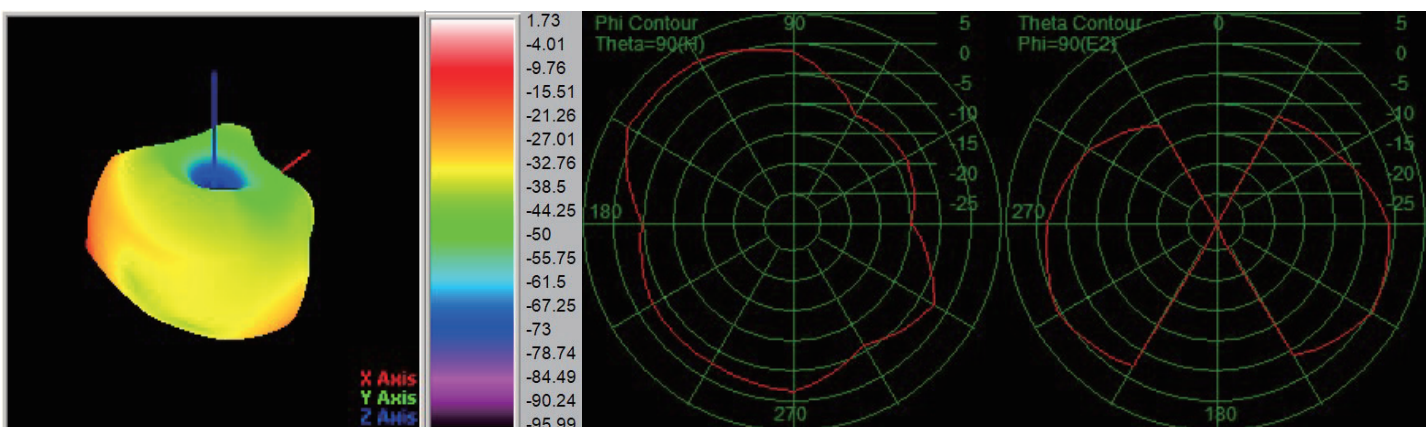


Passive -Freq2500.00MHZ

Gain: 1.73(dBi)

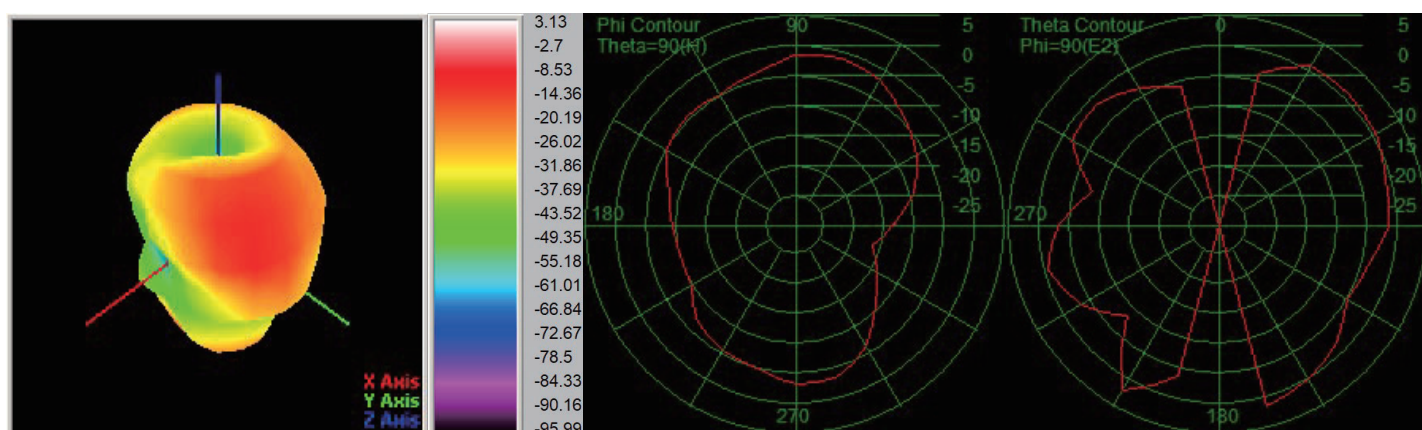


Passive -Freq5150.00MHZ

Gain: 3.13(dBi)

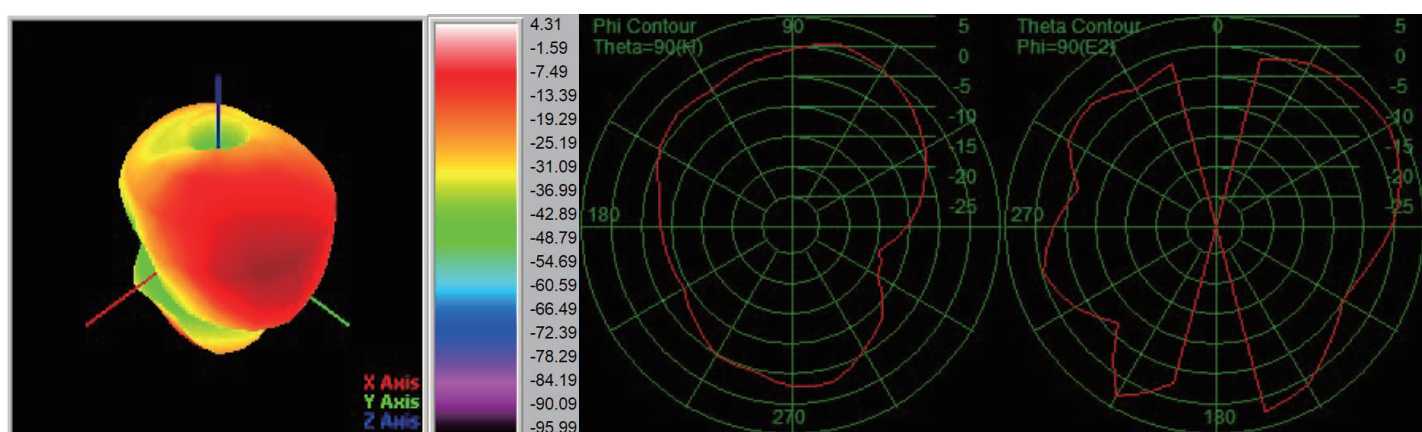

Passive -Freq5230.00MHZ

Gain: 4.31(dBi)

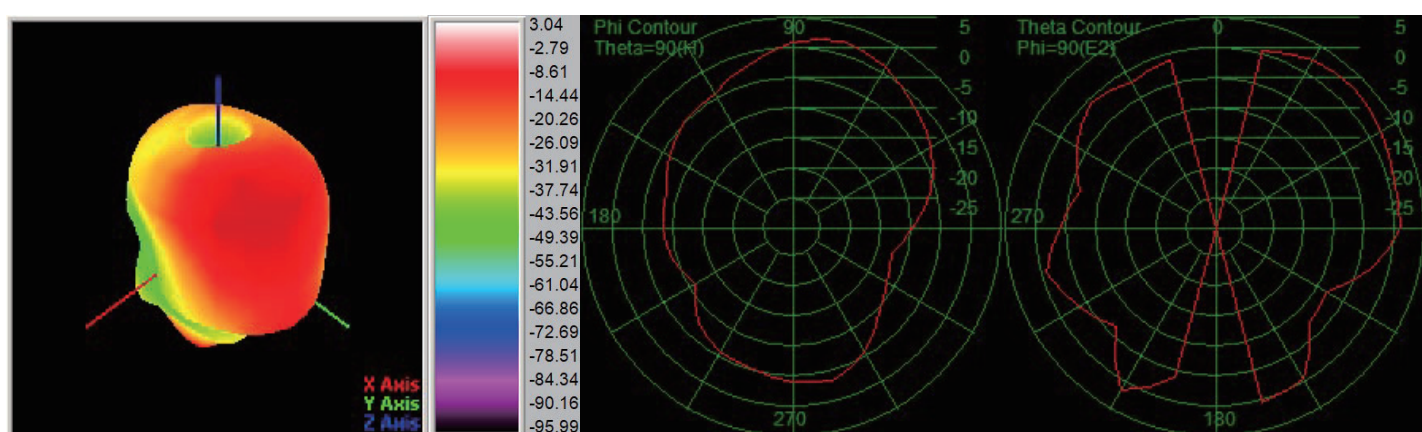

Passive -Freq5350.00MHZ

Gain: 3.04(dBi)

