

FCC RF Exposure report

for

Radio Walkie Talkie

Model No.: SC782

FCC ID: 2BO38-SC782

of

Applicant: Stellar Wavez Communications LLC

Address: 17595 Harvard Ave. Suite C #4050, Irvine, California, U.S.A.

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1072, TW1140, TW1146, TW1477, TW0037

Industry Canada filed test laboratory Reg. No.: 20037, 31634



Report No.: W6M22411-23911-EE

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wtls@wtls-lab.com




TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES	2
1.2	TESTING LABORATORY	3
1.3	APPLICATION DETAILS	3
1.4	GENERAL INFORMATION OF TEST ITEM	4
1.5	DUTY CYCLE AND FACTOR	5
1.6	TEST STANDARDS	7
2	TEST CONFIGURATION	8
2.1	TEST ENVIRONMENT	8
2.2	MEASUREMENT UNCERTAINTY	8
2.3	TEST EQUIPMENT LIST	8
3	EQUIVALENT ISOTROPIC RADIATED POWER (EIRP).....	9
3.1	EXEMPTION LIMITS FOR ROUTINE EVALUATION	9



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22411-23911-EE

FCC ID: 2BO38-SC782

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.
4. Antenna gain is provided by applicant and laboratory issue relevant data and results.

Tester:

April 30, 2025

Rick Chen

Rick Chen.

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

April 30, 2025

Kevin Wang

Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22411-23911-EE

FCC ID: 2BO38-SC782

1.2 Testing laboratory

1.2.1 Location

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber/Conducted Emission

No. 99, Sec. 1, Balian Rd., Xizhi Dist.,
New Taipei City 221032, Taiwan (R.O.C.)

Worldwide Testing Services (Taiwan) Co., Ltd.
6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6606-8877

1.2.2 Details of accreditation status

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1072, TW1140, TW1146, TW1477, TW0037

Industry Canada filed test laboratory Reg. No.: 20037, 31634

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.
Accredited no.: ./.
Street: ./.
Town: ./.
Country: ./.


1.3 Application details

Approval holder

Name: Stellar Wavez Communications LLC
Street: 17595 Harvard Ave. Suite C #4050,
City: Irvine, California,
Country: U.S.A.

Manufacturer: (if applicable)

Name: TST Technology Co., Ltd.
Street: 14F, No. 128, Sec. 3, Minsheng E. Rd., Songshan Dist.,
Town: Taipei City,
Country: Taiwan



Registration number: W6M22411-23911-EE

FCC ID: 2BO38-SC782

Date of receipt of test item: March 04, 2025

Date of test: from March 05, 2025 to March 31, 2025

1.4 General information of Test item

Type of test item: Radio Walkie Talkie

Model no.: SC782

Multi-listing model no.: ./.

Brand name: TST

Power supply: Adapter (I/P: 100-240V~50/60Hz, 0.5A
O/P: 12.0V, 1.0A, 12.0W)

Battery 7.7Vd.c.

Technical data

Mode	Channel	Conducted Power (dBm)
Bluetooth Normal mode	Ch 0 : 2402 MHz	1.96
	Ch 39 : 2441 MHz	1.63
	Ch 78 : 2480 MHz	0.99
Bluetooth EDR mode	Ch 0 : 2402 MHz	3.19
	Ch 39 : 2441 MHz	2.90
	Ch 78 : 2480 MHz	2.23
Bluetooth Low energy mode 1M	Ch 0 : 2402 MHz	3.53
	Ch 19 : 2440 MHz	3.28
	Ch 39 : 2480 MHz	2.63
Bluetooth Low energy mode 2M	Ch 0 : 2402 MHz	3.78
	Ch 19 : 2440 MHz	3.49
	Ch 39 : 2480 MHz	2.89

Type of antenna: Dipole Antenna

Antenna gain: 2.8 dBi

Operation modes: Duplex

Modulation type: GFSK、 $\pi/4$ DQPSK、8DPSK

Sample no.: #06

Classification:

Fixed Device	☐
Mobile Device (Human Body distance > 20cm)	☐
Portable Device (Human Body distance < 20cm)	☒
Modular Radio Device	☐


Registration number: W6M22411-23911-EE
FCC ID: 2BO38-SC782

1.5 Duty cycle and factor


The duty factor is computed as $[10 \log (1 / D)]$, where D is the duty cycle.

Mode	T _{on} (ms)	T _{on} +T _{off} (ms)	Duty cycle (%)	1/T - VBW (kHz)
BLE 1M	2.188	2.508	87.24%	0.46
BLE 2M	1.114	1.258	88.55%	0.90


Duty cycle plot
1M

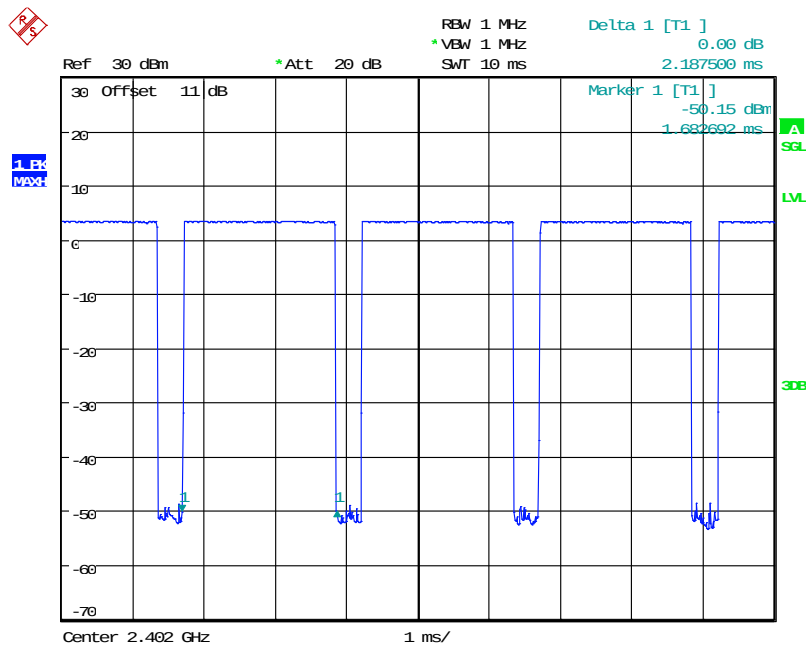

Date: 26.MAR.2025 15:49:48




Registration number: W6M22411-23911-EE
FCC ID: 2BO38-SC782

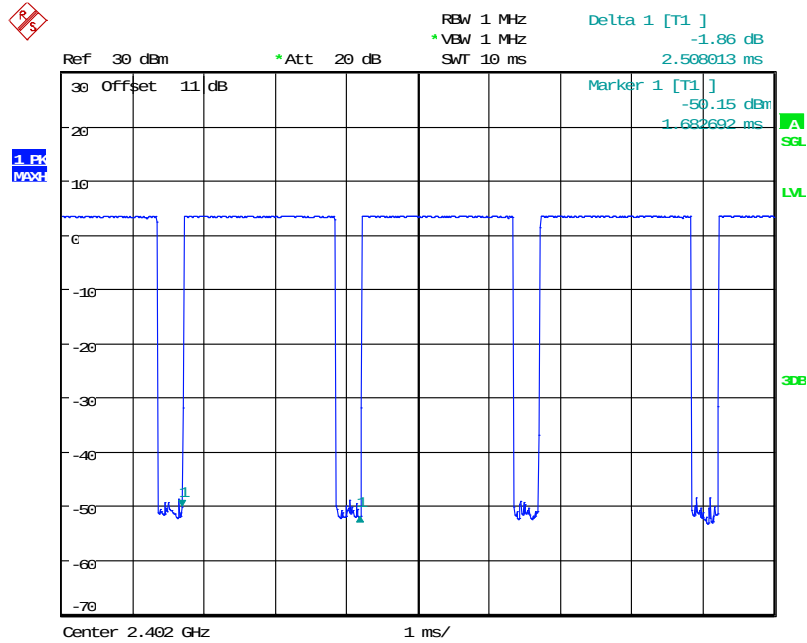


Date: 26.MAR.2025 15:50:08


2M

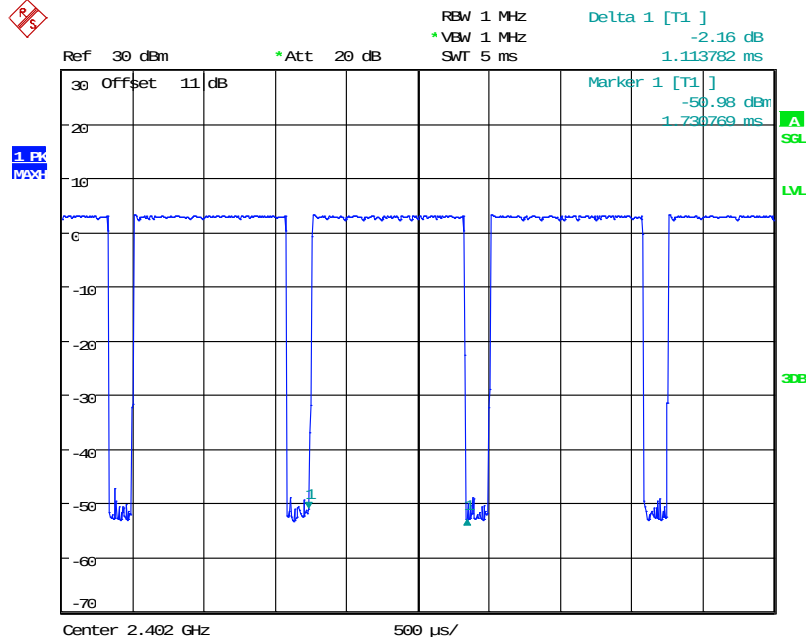

Date: 26.MAR.2025 15:48:58



Registration number: W6M22411-23911-EE
FCC ID: 2BO38-SC782

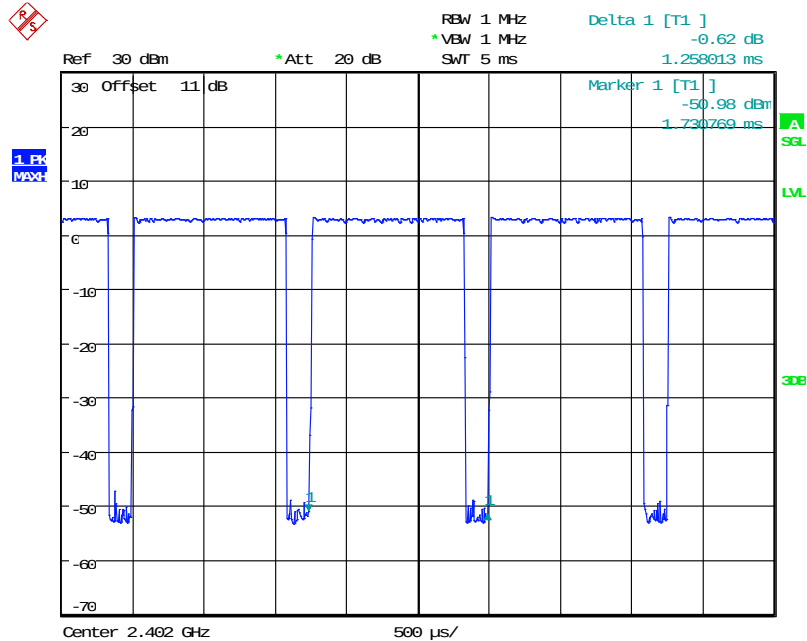


Date: 26.MAR.2025 15:48:38

1.7 Test standards

FCC KDB Publication

447498 D01 General RF Exposure Guidance v06



Registration number: W6M22411-23911-EE

FCC ID: 2BO38-SC782

2 Test configuration

2.1 Test environment

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Extreme conditions parameters: ./.

2.2 Measurement uncertainty

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Output Power Measurement (Peak Output Power (transmitter))	Expanded Uncertainty : 1.64 dB

The decision rule is: Measurement uncertainty is not included in the calculation of test results.

2.3 Test Equipment List

Max Output Power

Code No.	Test equipment	Mode No.	Serial No.	Brand	Cal. Date	Next Cal. Date
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2024/2/16	2025/2/15
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2024/3/7	2025/3/6
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2024/2/16	2025/2/15
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2024/2/16	2025/2/15



Registration number: W6M22411-23911-EE

FCC ID: 2BO38-SC782

3 Equivalent Isotropic Radiated Power (EIRP)

FCC Rule: 15.247

Normal & EDR mode

EIRP = max. conducted output power + antenna gain

EIRP = 3.19dBm+ (2.8dBi [antenna gain claimed by manufacturer]) = 5.99dBm =3.9719mW

Low energy mode

EIRP = max. conducted output power + antenna gain

EIRP = 3.78dBm+ (2.8dBi [antenna gain claimed by manufacturer]) = 6.58dBm =4.5499mW

3.1 Exemption Limits for Routine Evaluation according to FCC KDB Publication

RESULT:

Test standard : FCC KDB Publication
447498 D01 General RF Exposure Guidance v06

3.3.1 Exemption Limits for Routine Evaluation – SAR Evaluation

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table .

Table: SAR evaluation — Exemption limits for routine evaluation based on frequency and separation distance


MHz	5	10	15	20	25	mm
2402	10.09	19.26	29.35	38.52	48.52	SAR Test Exclusion Threshold (mW)

MHz	30	35	40	45	50	mm
2402	57.70	67.79	77.87	87.05	97.13	SAR Test Exclusion Threshold (mW)

Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power.

Established separation distance is 5 mm.

Operating frequency band : 2402-2480 MHz



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22411-23911-EE

FCC ID: 2BO38-SC782

Normal & EDR mode

Max. output power level at 5 mm separation distance at 2402 MHz according to table is: 10.09 mW

The product is exempt from SAR Evaluation/Testing because the output power of 3.9719 mW is below the exemption limit of 10.09 mW.

Low energy mode

Max. output power level at 5 mm separation distance at 2402 MHz according to table is: 10.09 mW

The product is exempt from SAR Evaluation/Testing because the output power of 4.5499 mW is below the exemption limit of 10.09 mW.