

# TEST REPORT

FCC LTE B12(17) Test for TM18FNNABM0  
Certification

**APPLICANT**  
LG Electronics Inc.

**REPORT NO.**  
HCT-RF-2506-FC054

**DATE OF ISSUE**  
June 17, 2025

Tested by  
Jae Ryang Do



Technical Manager  
Jong Seok Lee



Accredited by KOLAS, Republic of KOREA

**HCT CO., LTD.**  
*BongJai Huh*  
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea  
Tel. +82 31 645 6300 Fax. +82 31 645 6401



# TEST REPORT

REPORT NO.  
HCT-RF-2506-FC054

DATE OF ISSUE  
June 17, 2025

Applicant	LG Electronics Inc. 128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea
Product Name	Telematics
Model Name	TM18FNNABM0
Date of Test	February 08, 2025 ~ June 17, 2025
Location of Test	<input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing (Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)
FCC ID	2B03LTM18FNNABM0
FCC Classification:	PCS Licensed Transmitter (PCB)
Test Standard Used	FCC Rule Part: § 27
Test Results	PASS

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	June 17, 2025	Initial Release

## Notice

### Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked \*.

Information provided by the applicant is marked \*\*.

Test results provided by external providers are marked \*\*\*.

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

This test report provides test result(s) under the scope accredited by the Korea Laboratory Accreditation Scheme (KOLAS), which signed the ILAC-MRA.

(KOLAS (KS Q ISO/IEC 17025) Accreditation No. KT197)

## CONTENTS

1. GENERAL INFORMATION .....	5
1.1. SUPPORTED BANDS PER ANTENNA PORT .....	6
1.2 MAXIMUM OUTPUT POWER.....	7
2. INTRODUCTION .....	8
2.1 DESCRIPTION OF EUT .....	8
2.2 MEASURING INSTRUMENT CALIBRATION.....	8
2.3 TEST FACILITY .....	8
3. DESCRIPTION OF TESTS.....	9
3.1 TEST PROCEDURE.....	9
3.2 RADIATED POWER .....	10
3.3 RADIATED SPURIOUS EMISSIONS.....	12
3.4 OCCUPIED BANDWIDTH.....	13
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	14
3.6 BAND EDGE .....	15
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	17
3.8 PEAK- TO- AVERAGE RATIO .....	18
3.9 WORST CASE(RADIATED TEST) .....	19
3.10 WORST CASE(CONDUCTED TEST).....	20
4. LIST OF TEST EQUIPMENT.....	21
5. MEASUREMENT UNCERTAINTY .....	24
6. SUMMARY OF TEST RESULTS .....	25
7. SAMPLE CALCULATION.....	26
8. TEST DATA.....	28
8.1 EFFECTIVE RADIATED POWER.....	28
8.2 RADIATED SPURIOUS EMISSIONS.....	30
8.3 PEAK-TO-AVERAGE RATIO .....	33
8.4 OCCUPIED BANDWIDTH .....	34
8.5 CONDUCTED SPURIOUS EMISSIONS .....	35
8.6 BAND EDGE .....	35
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	36
9. TEST PLOTS.....	48
10. ANNEX A_ TEST SETUP PHOTO .....	121

## MEASUREMENT REPORT

## 1. GENERAL INFORMATION

Applicant Name:	LG Electronics Inc.
Address:	128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea
FCC ID:	2B03LTM18FNNABM0
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 27
EUT Type:	Telematics
Model(s):	TM18FNNABM0
Voltage:	4.2V
Tx Frequency:	699.7 MHz – 715.3 MHz (LTE – Band 12 (1.4 MHz)) 700.5 MHz – 714.5 MHz (LTE – Band 12 (3 MHz)) 701.5 MHz – 713.5 MHz (LTE – Band 12(17) (5 MHz)) 704.0 MHz – 711.0 MHz (LTE – Band 12(17) (10 MHz))
Date(s) of Tests:	February 08, 2025 ~ June 17, 2025
EUT Serial number:	Radiated : BMW ICON-25SF Radiated #1 Conducted : BMW ICON-25SF Conducted #3
Antenna Information	Please refer to the Antenna Specification document.

## 1.1. SUPPORTED BANDS PER ANTENNA PORT

Antenna Port	Supported bands
MIMO 1	<ul style="list-style-type: none"><li>- WCDMA: B2, 5</li><li>- LTE: B2, 4, 5, 7, 12, 13, 17, 25, 66, 26, 38, 42, 48, 71</li><li>- NR: n2, 5, 7, 12, 25, 41, 48, 66, 71, 77, 78</li></ul>
MIMO 2	<ul style="list-style-type: none"><li>- LTE: B42, 48</li><li>- NR: n48, 77, 78</li></ul>
MIMO 3	Only RX
MIMO 4	Only RX
Int. BUA (Back Up Antenna)	<ul style="list-style-type: none"><li>- WCDMA: B2, 5</li><li>- LTE: B2, 4, 5, 7, 25, 26, 38, 66</li><li>- NR: n2, 5, 7, 25, 41, 66</li></ul>

Note:

1. Since the Int. BUA uses the same antenna port as MIMO1, only radiated testing was performed.

## 1.2 MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 12 (1.4)	699.7 – 715.3	1M09G7D	QPSK	0.211	23.24
		1M09W7D	16QAM	0.184	22.64
		1M09W7D	64QAM	0.141	21.49
		1M09W7D	256QAM	0.068	18.34
LTE – Band 12 (3)	700.5 – 714.5	2M70G7D	QPSK	0.209	23.21
		2M69W7D	16QAM	0.185	22.66
		2M70W7D	64QAM	0.138	21.41
		2M70W7D	256QAM	0.068	18.34
LTE – Band 12(17) (5)	701.5 – 713.5	4M50G7D	QPSK	0.210	23.23
		4M49W7D	16QAM	0.181	22.58
		4M50W7D	64QAM	0.140	21.47
		4M50W7D	256QAM	0.068	18.35
LTE – Band 12(17) (10)	704.0 – 711.0	8M97G7D	QPSK	0.208	23.19
		8M99W7D	16QAM	0.184	22.64
		8M97W7D	64QAM	0.140	21.45
		8M99W7D	256QAM	0.067	18.29

## 2. INTRODUCTION

### 2.1 DESCRIPTION OF EUT

Please refer to the [3G] Test Report.

### 2.2 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3 TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8


### 3.2 RADIATED POWER

#### Test Overview


Radiated tests are performed in the semi-anechoic chamber. The equipment under test is placed on a non-conductive table on semi-anechoic chamber.

#### Test Configuration


Below 30 MHz

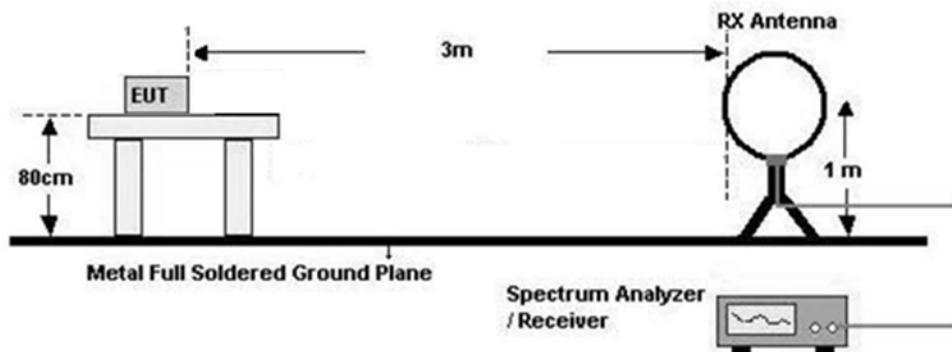

30 MHz - 1 GHz

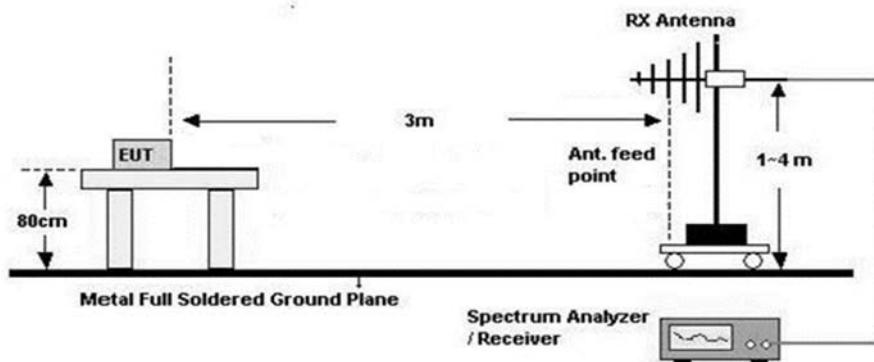

Above 1 GHz

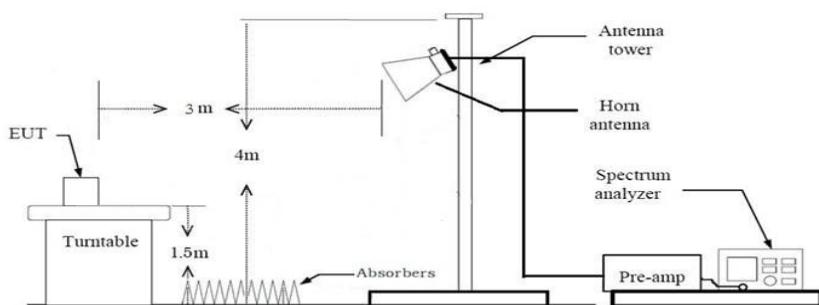

**Test Settings**

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

**Test Note**

1. The EUT is placed on a turntable, which is 0.8 m above ground plane. (Below 1 GHz)
2. The EUT is placed on a turntable, which is 1.5 m above ground plane. (Above 1 GHz)
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
6. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.
7. Total(dB $\mu$ V/m) = Measured Value(dB $\mu$ V) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F)
8. EIRP (dBm)  
= Total (dB $\mu$ V/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)  
= Total (dB $\mu$ V/m) - 95.2(dB)
9. ERP(dBm) = EIRP(dBm) - 2.15(dB)

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result (dBm)} = \text{Pg (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

Where: Pg is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15$$

### 3.4 OCCUPIED BANDWIDTH.

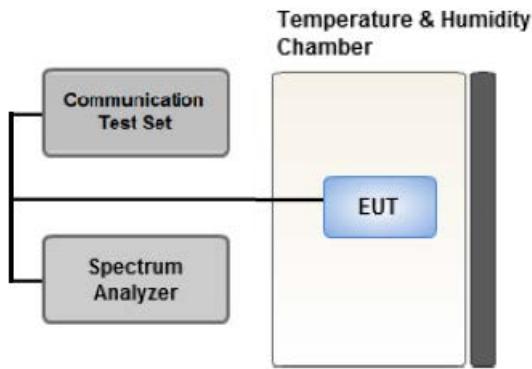

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

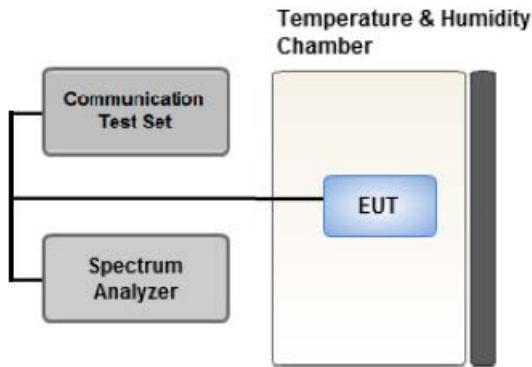

Test setup

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.6 BAND EDGE

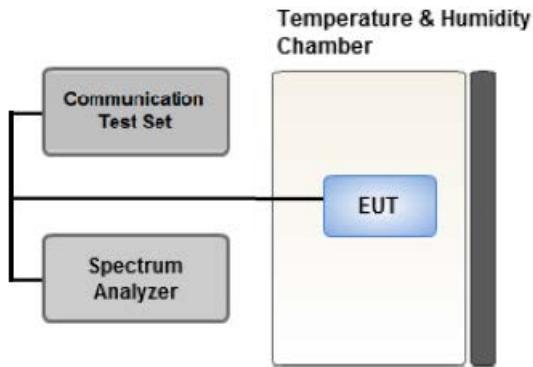

#### Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time > Number of points in sweep  $\times$  Symbol period
9. The trace was allowed to stabilize

**Test Notes**

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz} / \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

### 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

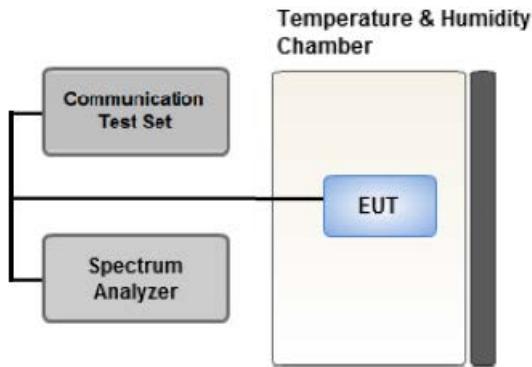

#### Test setup

##### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.


2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

##### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.8 PEAK- TO- AVERAGE RATIO

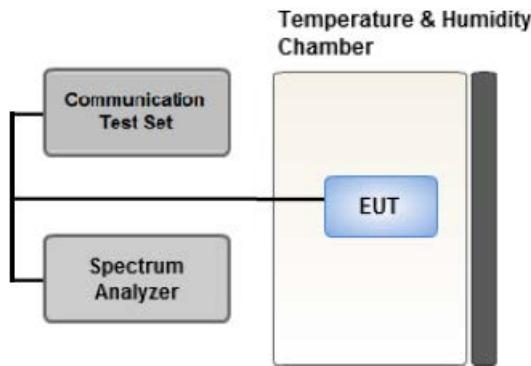

Test setup

#### CCDF Procedure for PAPR

##### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

### 3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 3 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data. Please refer to the table below.
- LTE Band 12 (699 – 716 MHz, 5/10 MHz bandwidth) overlaps the entire frequency range of LTE Band 17 (704 - 716 MHz) and they have the same Tune-up power.

Therefore, test data provided in this report covers Band 12 as well as Band 17

- MIMO3 and MIMO4 have three types of Rx antennas. Operating modes were investigated for all Rx antennas, and the worst-case configuration results were reported.  
(Worst-case: HKL antenna(Maximum gain: 5dBi))

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		Z
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		Y

### 3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- LTE Band 12 (699 – 716 MHz, 5/10 MHz bandwidth) overlaps the entire frequency range of LTE Band 17 (704 - 716 MHz) and they have the same Tune-up power.  
Therefore, test data provided in this report covers Band 12 as well as Band 17.
- Both 85% and 115% conditions were measured for the Frequency Stability test, and results for the worst-case configuration (85%) were reported.
- In accordance with the customer's specification of 3.7V as the lowest operating voltage, testing was performed at 3.7V instead of 85% (3.57V).

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10	Mid	Full RB	0
PEAK- TO- AVERAGE RATIO	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		1.4, 3, 5, 10	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10	Low, Mid, High	1	0

#### 4. LIST OF TEST EQUIPMENT

[Radiated]

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switch System	FBSR-04C(3G HPF+LNA)	TNM System	S4L1	03/12/2026	Annual
RF Switch System	FBSR-04C(7G HPF+LNA)	TNM System	S4L5	03/12/2026	Annual
RF Switch System	FBSR-04C(LNA)	TNM System	S4L4	03/12/2026	Annual
RF Switch System	FBSR-04C(Thru)	TNM System	S4L6	03/12/2026	Annual
Antenna Position Tower	MA4640	Innco systems	S4AM	08/07/2025	Annual
Turn Table	DS2000-S	Innco systems	N/A	N/A	-
Controller (Antenna mast & Turn Table)	CO3000	Innco systems	CO3000/1251/489 20320/P	N/A	-
Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM20090002	N/A	-
RF Switching System	Switch box(1G HPF+LNA)	HCT CO., LTD.,	F2L2	12/12/2025	Annual
RF Switching System	Switch box(3G HPF+LNA)	HCT CO., LTD.,	F2L3	12/12/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.,	F2L5	12/12/2025	Annual
RF Switching System	Switch box(6G HPF+LNA)	HCT CO., LTD.,	F2L14	12/12/2025	Annual
HIGHPASS FILTER	WHKX10-900-1000-15000-40SS	WAINWRIGHT INSTRUMENTS	16	07/24/2025	Annual
LOW NOISE AMPLIFIER	310N	SONOMA Instrument	186169	02/05/2026	Annual
LOW NOISE AMPLIFIER	TK-PA1840H	TESTEK	170011-L	10/11/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/19/2026	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/10/2026	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA9120D	Schwarzbeck	03197	11/28/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA9120D	Schwarzbeck	03201	11/28/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA9120	Schwarzbeck	937	02/07/2027	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	03/23/2027	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	ROHDE & SCHWARZ	101733	09/19/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	101436	02/04/2026	Annual
Signal & Spectrum Analyzer (2 Hz~67 GHz)	FSW67	REOHDE & SCHWARZ	101736	05/27/2026	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB 9168	Schwarzbeck	9168-0895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287701	05/14/2026	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6272613402	08/28/2025	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Automation Software	FCC LTE Radiated	HCT CO., LTD	-	-	-
Automation Software	FCC NR Radiated	HCT CO., LTD	-	-	-

[Conducted]

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Power Splitter (DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/10/2026	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Chamber	SU-642	ESPEC	93008124	02/11/2026	Annual
ATTENUATOR (20 dB)	8493C	Hewlett Packard	17280	04/10/2026	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/13/2025	Annual
UXM 5G Wireless Test Platform	E7515B	KEYSIGHT	MY60101126	02/10/2026	Annual
Signal Analyzer (2 Hz ~ 50.0 GHz)	N9030B	KEYSIGHT	MY56320554	02/03/2026	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.	-	-	-
Automation Software	FCC 2G/3G/4G Conducted	HCT CO., LTD	-	-	-
Automation Software	FCC NR Conducted	HCT CO., LTD	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm\text{kHz}$ )
Occupied Bandwidth	95 (Confidence level about 95 %, $k=2$ )
Frequency stability	28 (Confidence level about 95 %, $k=2$ )

Parameter	Expanded Uncertainty ( $\pm\text{dB}$ )
Block Edge	0.70 (Confidence level about 95 %, $k=2$ )
Conducted Spurious Emissions	1.18 (Confidence level about 95 %, $k=2$ )
Peak- to- Average Ratio	0.68 (Confidence level about 95 %, $k=2$ )
Radiated Power	4.74 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.68 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.75 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.82 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

-. The decision rule applies 'simple acceptance'

### 6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(g)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	Note <sup>1</sup>
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. Refer to the SAR report.

### 6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 27.50(c)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(g)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured (dB $\mu$ V/m)	Ant. Factor + Distance Factor (dB)	C.L (dB)	Total (dB $\mu$ V/m)	Pol.	Limit	ERP		RB	
								W	W	dBm	Size	Offset
699.7	LTE B12 (1.4 MHz)	QPSK	91.16	28.26	1.41	120.83	H	0.223 0.182 0.142 0.070	23.48		1	5
		16-QAM	90.28	28.26	1.41	119.95	H		22.60			
		64-QAM	89.20	28.26	1.41	118.87	H		21.52			
		256-QAM	86.16	28.26	1.41	115.83	H		18.48			
		QPSK	91.63	28.36	1.42	121.41	H	< 3.00	24.06		1	3
		16-QAM	90.76	28.36	1.42	120.54	H		23.19			
		64-QAM	89.76	28.36	1.42	119.54	H		22.19			
		256-QAM	86.59	28.36	1.42	116.37	H		19.02			
		QPSK	90.74	28.46	1.42	120.62	H	< 3.00	23.27		1	0
		16-QAM	89.92	28.46	1.42	119.80	H		22.45			
		64-QAM	88.78	28.46	1.42	118.66	H		21.31			
		256-QAM	86.00	28.46	1.42	115.88	H		18.53			

Freq (MHz)	Bandwidth	Modulation	Measured (dB $\mu$ V/m)	Ant. Factor + Distance Factor (dB)	C.L (dB)	Total (dB $\mu$ V/m)	Pol.	Limit	ERP		RB	
								W	W	dBm	Size	Offset
700.5	LTE B12 (3 MHz)	QPSK	91.50	28.26	1.41	121.17	H	< 3.00	23.82		1	14
		16-QAM	90.82	28.26	1.41	120.49	H		23.14			
		64-QAM	89.65	28.26	1.41	119.32	H		21.97			
		256-QAM	86.61	28.26	1.41	116.28	H		18.93			
		QPSK	91.88	28.36	1.42	121.66	H	< 3.00	24.31		1	0
		16-QAM	91.17	28.36	1.42	120.95	H		23.60			
		64-QAM	90.02	28.36	1.42	119.80	H		22.45			
		256-QAM	86.82	28.36	1.42	116.60	H		19.25			
		QPSK	91.16	28.46	1.42	121.04	H	< 3.00	23.69		1	0
		16-QAM	90.54	28.46	1.42	120.42	H		23.07			
		64-QAM	89.50	28.46	1.42	119.38	H		22.03			
		256-QAM	86.39	28.46	1.42	116.27	H		18.92			

Freq (MHz)	Bandwidth	Modulation	Measured (dB $\mu$ V/m)	Ant. Factor + Distance Factor (dB)	C.L (dB)	Total (dB $\mu$ V/m)	Pol.	Limit	ERP		RB		
									W	W	dBm	Size	Offset
701.5	LTE B12/17 (5 MHz)	QPSK	91.68	28.26	1.41	121.35	H	< 3.00	0.251	24.00			
		16-QAM	90.99	28.26	1.41	120.66	H		0.214	23.31		1	
		64-QAM	89.94	28.26	1.41	119.61	H		0.168	22.26		24	
		256-QAM	86.81	28.26	1.41	116.48	H		0.082	19.13			
		QPSK	91.62	28.36	1.42	121.40	H		0.254	24.05			
		16-QAM	91.12	28.36	1.42	120.90	H		0.226	23.55		1	
		64-QAM	89.92	28.36	1.42	119.70	H		0.172	22.35		13	
		256-QAM	86.79	28.36	1.42	116.57	H		0.084	19.22			
		QPSK	91.52	28.46	1.42	121.40	H	< 3.00	0.254	24.05			
		16-QAM	90.91	28.46	1.42	120.79	H		0.221	23.44		1	
713.5		64-QAM	89.71	28.46	1.42	119.59	H		0.168	22.24		0	
		256-QAM	86.60	28.46	1.42	116.48	H		0.082	19.13			

Freq (MHz)	Bandwidth	Modulation	Measured (dB $\mu$ V/m)	Ant. Factor + Distance Factor (dB)	C.L (dB)	Total (dB $\mu$ V/m)	Pol.	Limit	ERP		RB		
									W	W	dBm	Size	Offset
704.0	LTE B12/17 (10 MHz)	QPSK	91.76	28.26	1.41	121.43	H	< 3.00	0.256	24.08			
		16-QAM	91.17	28.26	1.41	120.84	H		0.223	23.49		1	
		64-QAM	90.12	28.26	1.41	119.79	H		0.175	22.44		49	
		256-QAM	86.82	28.26	1.41	116.49	H		0.082	19.14			
		QPSK	91.74	28.36	1.42	121.52	H		0.261	24.17			
		16-QAM	90.90	28.36	1.42	120.68	H	< 3.00	0.216	23.33		1	
		64-QAM	90.04	28.36	1.42	119.82	H		0.177	22.47		25	
		256-QAM	86.84	28.36	1.42	116.62	H		0.085	19.27			
		QPSK	91.77	28.46	1.42	121.65	H		0.269	24.30			
711.0		16-QAM	91.05	28.46	1.42	120.93	H	< 3.00	0.228	23.58		1	
		64-QAM	89.92	28.46	1.42	119.80	H		0.176	22.45		0	
		256-QAM	86.82	28.46	1.42	116.70	H		0.086	19.35			

## 8.2 RADIATED SPURIOUS EMISSIONS

MODE: LTE B12(17)  
 MODULATION SIGNAL: 3 MHz QPSK  
 DISTANCE: 3 meters

Ch	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
23025 (700.5)	1 401.00	-30.20	7.77	-43.21	1.85	V	-37.29	-13.00	1	7
	2 101.50	-22.79	9.53	-34.03	2.34	H	-26.84	-13.00		
	2 802.00	-52.84	10.62	-63.28	2.66	H	-55.32	-13.00		
	3 502.50	-51.78	11.59	-60.27	3.05	H	-51.73	-13.00		
	4 203.00	-53.24	11.71	-58.82	3.45	H	-50.56	-13.00		
	4 903.50	-54.95	11.34	-56.51	3.63	H	-48.80	-13.00		
23095 (707.5)	1 415.00	-30.60	7.84	-43.63	1.87	V	-37.66	-13.00	1	7
	2 122.50	-33.72	9.36	-45.36	2.28	H	-38.28	-13.00		
	2 830.00	-52.47	10.73	-62.70	2.70	V	-54.67	-13.00		
	3 537.50	-52.93	11.64	-60.76	3.06	V	-52.18	-13.00		
	4 245.00	-53.65	11.68	-59.52	3.35	V	-51.19	-13.00		
	4 952.50	-55.33	11.26	-56.91	3.69	V	-49.34	-13.00		
23165 (714.5)	1 429.00	-32.27	7.90	-45.14	1.87	H	-39.11	-13.00	1	7
	2 143.50	-41.27	9.22	-52.88	2.27	V	-45.93	-13.00		
	2 858.00	-52.29	10.78	-62.62	2.76	V	-54.60	-13.00		
	3 572.50	-54.13	11.72	-62.05	3.08	H	-53.41	-13.00		
	4 287.00	-53.45	11.57	-58.89	3.40	H	-50.72	-13.00		
	5 001.50	-54.58	11.15	-55.79	3.71	V	-48.35	-13.00		

## [UPLINK CARRIER AGGREGATION]

Test Note

1. All tests were evaluated for the two bands using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. All modes of operation were investigated and the worst case configuration results are reported in this section.  
Please refer to the table below.
3. The worst case is reported with the modulations, RB sizes and offsets.
  - 2A-12A, 12A-66A

(PCC - Modulation: QPSK, RB: 1, RB Offset: 49, SCC - Modulation: QPSK, RB: 1, RB Offset: 0)

Radiated Spurious Emissions

PCC	SCC	PCC		SCC	
		BW(MHz)	Channel	BW(MHz)	Channel
2A	12A	20	18700	3	23025
12A	66A	3	23025	3	132657

## 2A(PCC) - 12A(SCC)

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 720.00	-54.89	11.77	-62.15	3.13	V	-53.51	-13.00
5 580.00	-55.10	12.08	-56.64	3.91	H	-48.47	-13.00
7 440.00	-54.46	11.22	-50.41	4.58	H	-43.77	-13.00
9 300.00	-56.30	11.27	-45.32	5.30	H	-39.35	-13.00
11 160.00	-54.57	12.33	-48.10	5.83	H	-41.60	-13.00

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
1 401.00	-35.50	7.77	-48.51	1.85	H	-42.59	-13.00
2 101.50	-25.52	9.53	-36.76	2.34	H	-29.57	-13.00
2 802.00	-48.27	10.62	-58.71	2.66	H	-50.75	-13.00
3 502.50	-49.77	11.59	-58.26	3.05	H	-49.72	-13.00
4 203.00	-54.48	11.71	-60.06	3.45	H	-51.80	-13.00
4 903.50	-55.18	11.34	-56.74	3.63	V	-49.03	-13.00

## 12A(PCC) - 66A(SCC)

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
1 401.00	-37.26	7.77	-50.27	1.85	V	-44.35	-13.00
2 101.50	-23.24	9.53	-34.48	2.34	H	-27.29	-13.00
2 802.00	-52.41	10.62	-62.85	2.66	H	-54.89	-13.00
3 502.50	-51.51	11.59	-60.00	3.05	H	-51.46	-13.00
4 203.00	-55.13	11.71	-60.71	3.45	V	-52.45	-13.00
4 903.50	-55.89	11.34	-57.45	3.63	H	-49.74	-13.00

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 557.00	-54.82	11.67	-62.98	3.09	H	-54.40	-13.00
5 335.50	-54.98	11.72	-56.53	3.79	V	-48.60	-13.00
7 114.00	-55.14	10.73	-50.89	4.47	H	-44.63	-13.00
8 892.50	-55.56	11.35	-45.74	5.09	H	-39.48	-13.00
10 671.00	-54.84	11.71	-47.74	5.69	V	-41.72	-13.00

## 8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)	
12	1.4 MHz	707.5	QPSK	Full RB		5.75	
			16-QAM			6.59	
			64-QAM			6.51	
			256-QAM			6.63	
			QPSK			5.90	
	3 MHz		16-QAM			6.52	
			64-QAM			6.61	
			256-QAM			6.72	
			QPSK			5.79	
			16-QAM			6.50	
12/17	5 MHz		64-QAM			6.60	
			256-QAM			6.67	
			QPSK			5.85	
			16-QAM			6.46	
			64-QAM			6.68	
	10 MHz		256-QAM			6.72	

Note:

1. Plots of the EUT's P.A.P.R are shown Page 49 ~ 64.
2. P.A.P.R is not required. These values are reported for information only.

## 8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)	
12	1.4 MHz	707.5	QPSK	6	0	1.0924	
			16-QAM			1.0899	
			64-QAM			1.0911	
			256-QAM			1.0898	
	3 MHz		QPSK	15	0	2.7005	
			16-QAM			2.6904	
			64-QAM			2.6953	
			256-QAM			2.6974	
12(17)	5 MHz		QPSK	25	0	4.5044	
			16-QAM			4.4848	
			64-QAM			4.4982	
			256-QAM			4.4997	
	10 MHz		QPSK	50	0	8.9724	
			16-QAM			8.9862	
			64-QAM			8.9739	
			256-QAM			8.9899	

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 65 ~ 80.

## 8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
12	1.4	699.70	3.7289	29.320	-55.838	-26.518	
		707.50	4.0379	29.320	-55.710	-26.390	
		715.30	3.8086	29.320	-55.651	-26.331	
	3	700.50	9.8405	29.910	-56.234	-26.324	
		707.50	3.7688	29.320	-55.555	-26.235	
		714.50	3.8086	29.320	-55.443	-26.123	
12(17)	5	701.50	4.0180	29.320	-56.794	-27.474	-13.00
		707.50	5.2543	29.910	-55.606	-25.696	
		713.50	5.1346	29.910	-56.340	-26.430	
	10	704.00	5.4936	29.910	-56.004	-26.094	
		707.50	6.0020	29.910	-56.621	-26.711	
		711.00	7.2084	29.910	-55.682	-25.772	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 81 ~ 92.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.250
1 – 5	29.320
5 – 10	29.910
10 – 15	30.530
15 – 20	31.840
Above 20(26.5)	32.520


## 8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 93 ~ 120.

## 8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

MODE: LTE B12  
 OPERATING FREQUENCY: 699,700,000 Hz  
 CHANNEL: 23017 (1.4 MHz)  
 REFERENCE VOLTAGE: 4.200 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	699 700 002	0.0	0.000 000	0.000
100 %		-30	699 700 006	4.1	0.000 001	0.006
100 %		-20	699 700 005	2.3	0.000 000	0.003
100 %		-10	699 699 999	-3.4	0.000 000	-0.005
100 %		0	699 700 005	3.1	0.000 000	0.004
100 %		+10	699 700 006	3.4	0.000 000	0.005
100 %		+30	699 700 006	3.5	0.000 001	0.005
100 %		+40	699 699 998	-4.5	-0.000 001	-0.006
100 %		+50	699 700 006	3.5	0.000 001	0.005
Lowest voltage	3.700	+20	699 699 999	-3.4	0.000 000	-0.005

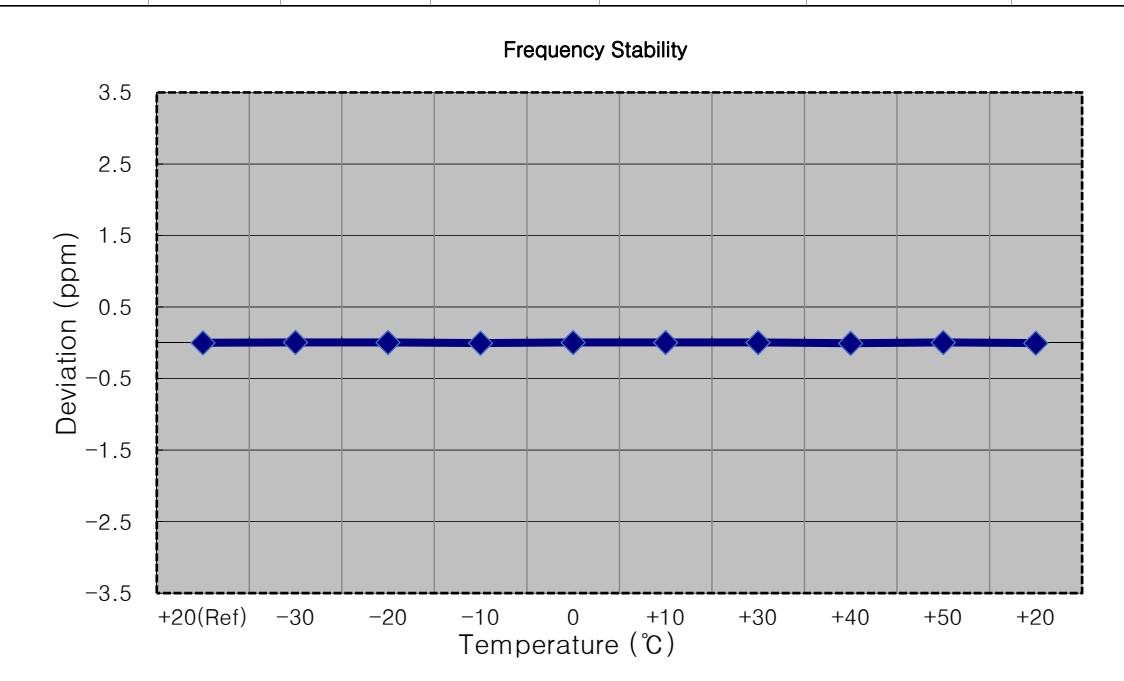

MODE: LTE B12


OPERATING FREQUENCY: 700,500,000 Hz

CHANNEL: 23025 (3 MHz)

REFERENCE VOLTAGE: 4.200 VDC

DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	700 499 996	0.0	0.000 000	0.000
100 %		-30	700 499 993	-3.1	0.000 000	-0.004
100 %		-20	700 499 999	3.0	0.000 000	0.004
100 %		-10	700 499 992	-4.3	-0.000 001	-0.006
100 %		0	700 499 992	-3.7	-0.000 001	-0.005
100 %		+10	700 499 991	-5.1	-0.000 001	-0.007
100 %		+30	700 499 992	-4.1	-0.000 001	-0.006
100 %		+40	700 499 990	-5.9	-0.000 001	-0.008
100 %		+50	700 499 992	-4.2	-0.000 001	-0.006
Lowest voltage	3.700	+20	700 499 993	-2.9	0.000 000	-0.004

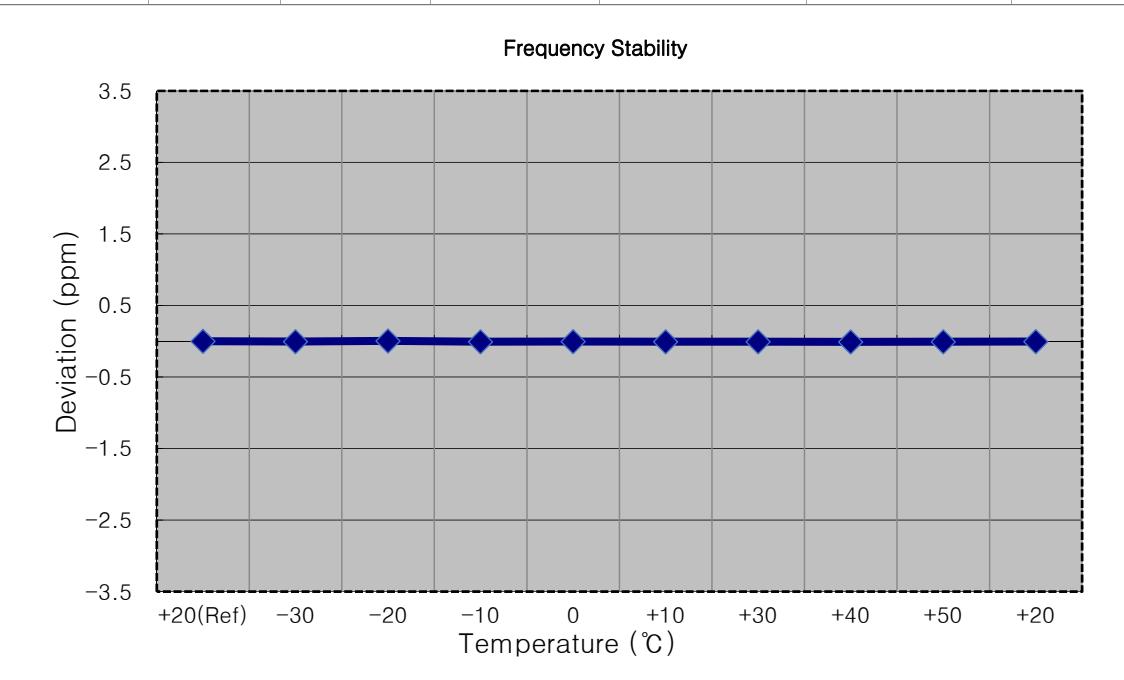

MODE: LTE B12(17)


OPERATING FREQUENCY: 701,500,000 Hz

CHANNEL: 23035 (5 MHz)

REFERENCE VOLTAGE: 4.200 VDC

DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	701 499 996	0.0	0.000 000	0.000
100 %		-30	701 499 991	-5.1	-0.000 001	-0.007
100 %		-20	701 499 994	-2.4	0.000 000	-0.003
100 %		-10	701 500 000	3.7	0.000 001	0.005
100 %		0	701 499 999	3.1	0.000 000	0.004
100 %		+10	701 499 992	-4.4	-0.000 001	-0.006
100 %		+30	701 500 001	5.0	0.000 001	0.007
100 %		+40	701 499 992	-4.7	-0.000 001	-0.007
100 %		+50	701 499 999	2.2	0.000 000	0.003
Lowest voltage	3.700	+20	701 500 001	4.9	0.000 001	0.007

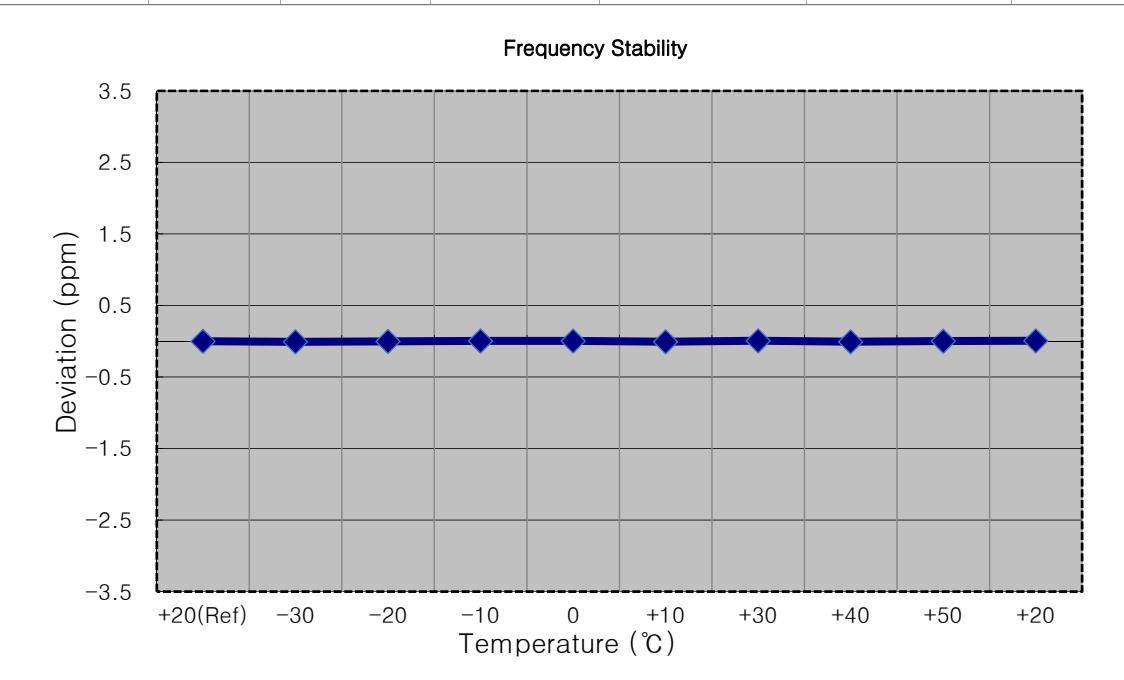

MODE: LTE B12(17)


OPERATING FREQUENCY: 704,000,000 Hz

CHANNEL: 23060 (10 MHz)

REFERENCE VOLTAGE: 4.200 VDC

DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	703 999 993	0.0	0.000 000	0.000
100 %		-30	703 999 986	-7.1	-0.000 001	-0.010
100 %		-20	703 999 987	-6.6	-0.000 001	-0.009
100 %		-10	703 999 991	-2.4	0.000 000	-0.003
100 %		0	703 999 986	-7.5	-0.000 001	-0.011
100 %		+10	703 999 986	-6.8	-0.000 001	-0.010
100 %		+30	703 999 990	-3.3	0.000 000	-0.005
100 %		+40	703 999 990	-3.5	0.000 000	-0.005
100 %		+50	703 999 996	2.4	0.000 000	0.003
Lowest voltage	3.700	+20	703 999 986	-6.8	-0.000 001	-0.010

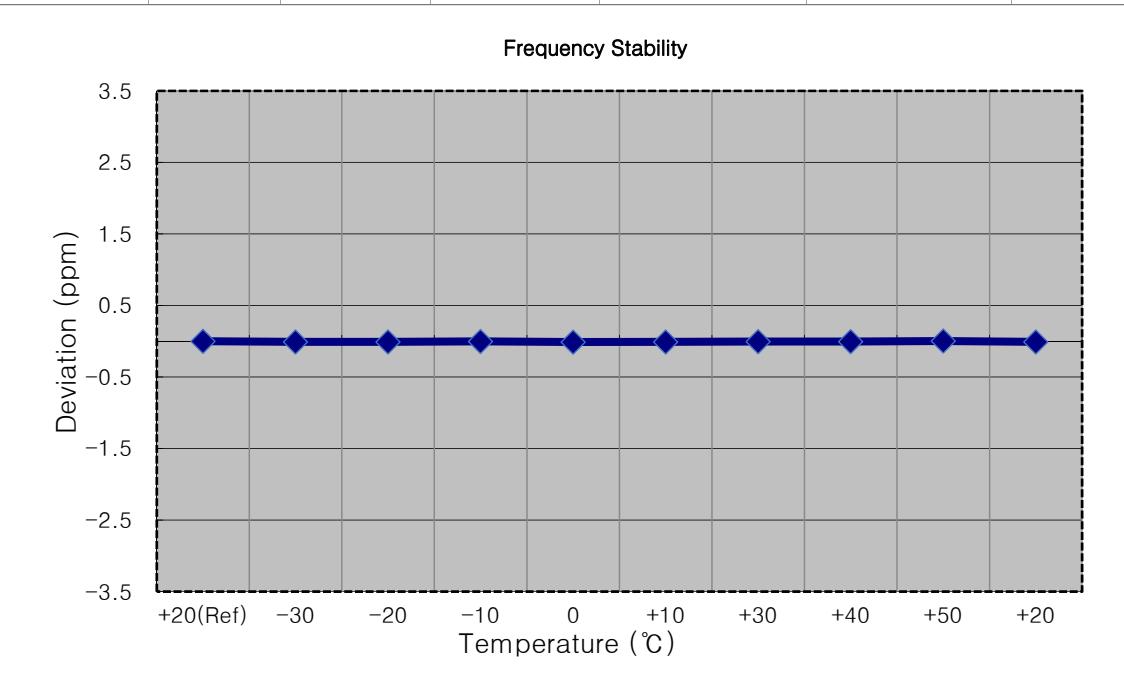

MODE: LTE B12


OPERATING FREQUENCY: 707,500,000 Hz

CHANNEL: 23095 (1.4 MHz)

REFERENCE VOLTAGE: 4.200 VDC

DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	707 499 993	0.0	0.000 000	0.000
100 %		-30	707 499 998	5.2	0.000 001	0.007
100 %		-20	707 499 987	-5.3	-0.000 001	-0.007
100 %		-10	707 499 987	-6.1	-0.000 001	-0.009
100 %		0	707 499 985	-7.2	-0.000 001	-0.010
100 %		+10	707 499 986	-7.0	-0.000 001	-0.010
100 %		+30	707 499 988	-4.5	-0.000 001	-0.006
100 %		+40	707 499 996	3.3	0.000 000	0.005
100 %		+50	707 499 995	2.4	0.000 000	0.003
Lowest voltage	3.700	+20	707 499 997	4.4	0.000 001	0.006

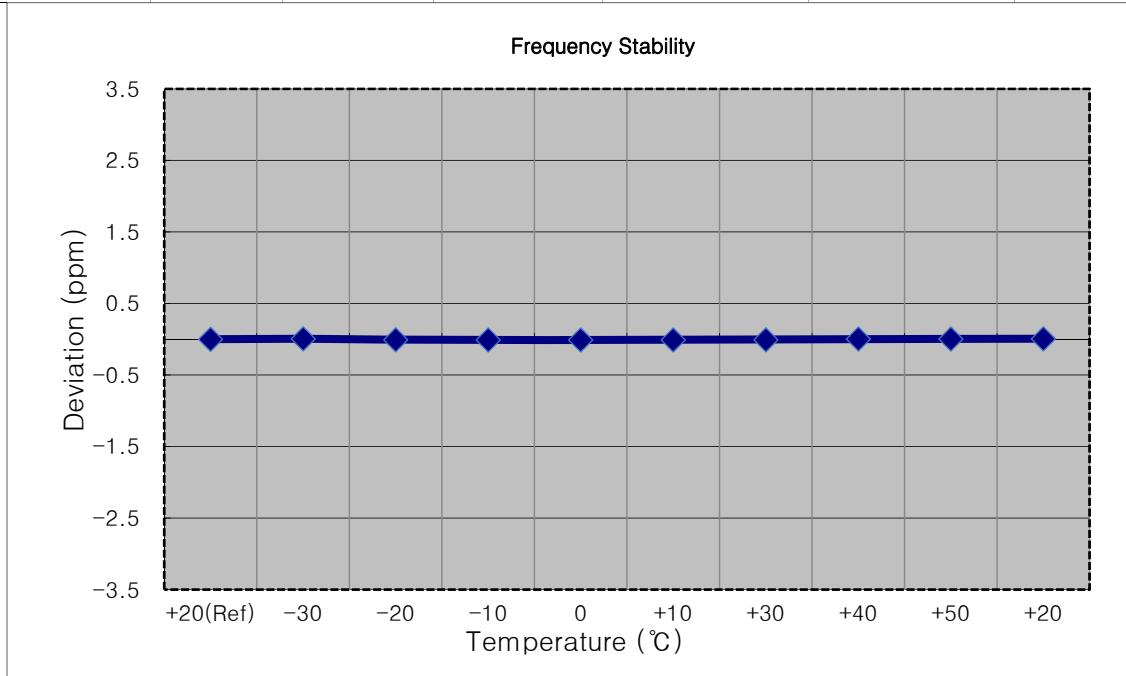

MODE: LTE B12


OPERATING FREQUENCY: 707,500,000 Hz

CHANNEL: 23095 (3 MHz)

REFERENCE VOLTAGE: 4.200 VDC

DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	707 500 006	0.0	0.000 000	0.000
100 %		-30	707 500 002	-4.0	-0.000 001	-0.006
100 %		-20	707 500 000	-5.4	-0.000 001	-0.008
100 %		-10	707 500 002	-3.5	0.000 000	-0.005
100 %		0	707 500 003	-2.8	0.000 000	-0.004
100 %		+10	707 500 001	-4.2	-0.000 001	-0.006
100 %		+30	707 500 010	4.0	0.000 001	0.006
100 %		+40	707 500 010	4.3	0.000 001	0.006
100 %		+50	707 500 002	-3.9	-0.000 001	-0.006
Lowest voltage	3.700	+20	707 500 003	-2.5	0.000 000	-0.004

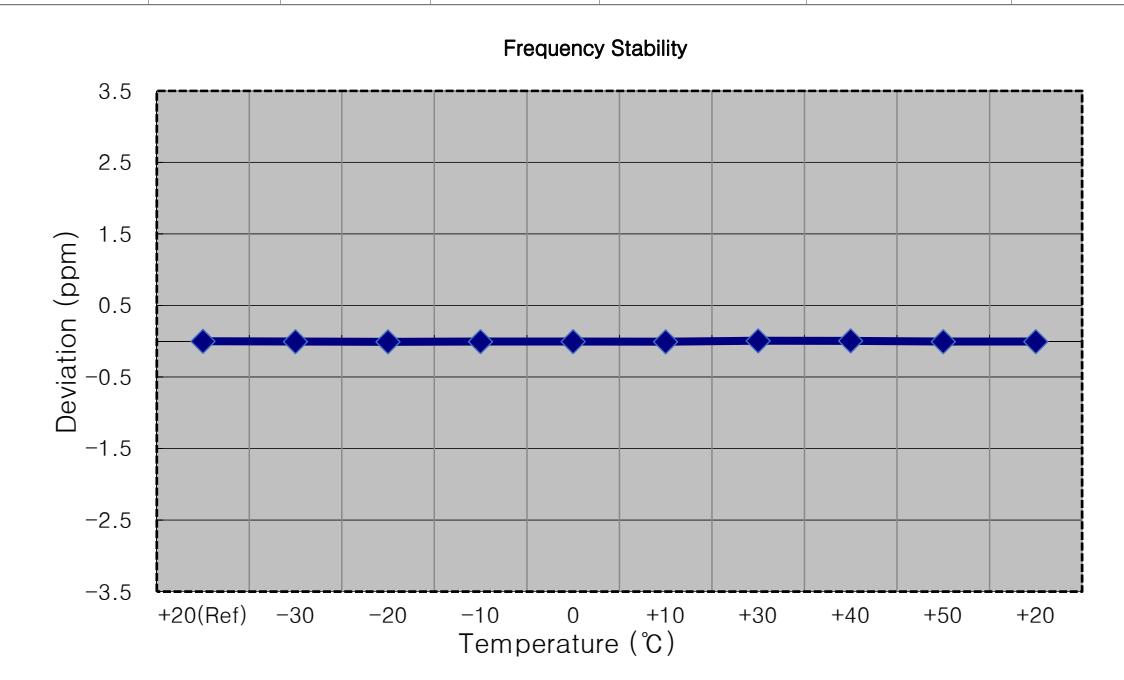

MODE: LTE B12(17)


OPERATING FREQUENCY: 707,500,000 Hz

CHANNEL: 23095 (5 MHz)

REFERENCE VOLTAGE: 4.200 VDC

DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	707 499 996	0.0	0.000 000	0.000
100 %		-30	707 499 992	-4.0	-0.000 001	-0.006
100 %		-20	707 499 991	-4.1	-0.000 001	-0.006
100 %		-10	707 499 992	-3.3	0.000 000	-0.005
100 %		0	707 499 991	-4.9	-0.000 001	-0.007
100 %		+10	707 499 991	-4.8	-0.000 001	-0.007
100 %		+30	707 499 990	-5.2	-0.000 001	-0.007
100 %		+40	707 499 992	-4.0	-0.000 001	-0.006
100 %		+50	707 499 993	-2.7	0.000 000	-0.004
Lowest voltage	3.700	+20	707 499 992	-3.4	0.000 000	-0.005

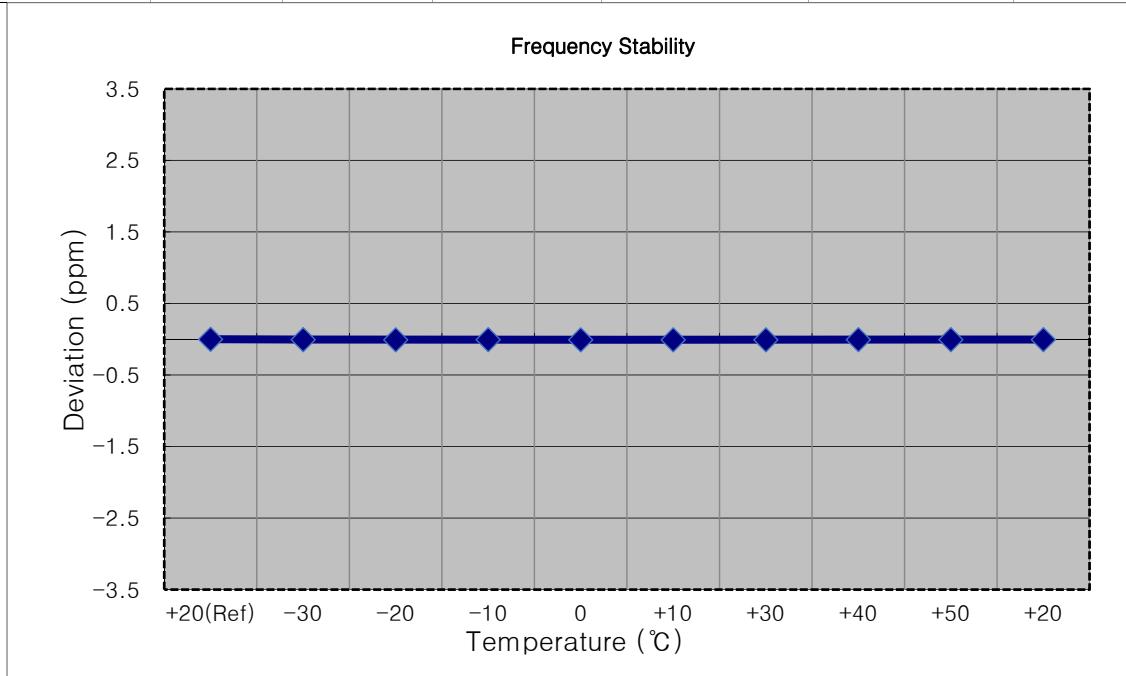

MODE: LTE B12(17)


OPERATING FREQUENCY: 707,500,000 Hz

CHANNEL: 23095 (10 MHz)

REFERENCE VOLTAGE: 4.200 VDC

DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	707 500 003	0.0	0.000 000	0.000
100 %		-30	707 500 000	-3.0	0.000 000	-0.004
100 %		-20	707 500 007	4.1	0.000 001	0.006
100 %		-10	707 500 000	-3.6	-0.000 001	-0.005
100 %		0	707 500 000	-3.3	0.000 000	-0.005
100 %		+10	707 500 000	-3.1	0.000 000	-0.004
100 %		+30	707 500 007	3.5	0.000 000	0.005
100 %		+40	707 500 000	-3.2	0.000 000	-0.005
100 %		+50	707 500 007	3.5	0.000 000	0.005
Lowest voltage	3.700	+20	707 499 999	-3.8	-0.000 001	-0.005

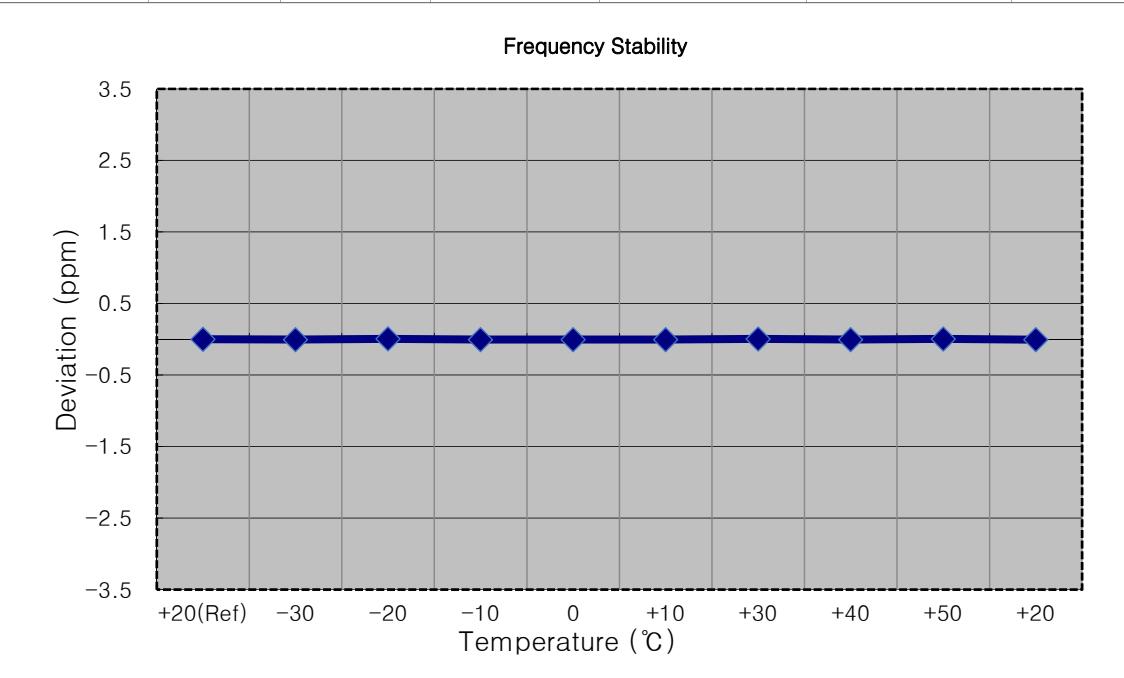

MODE: LTE B12


OPERATING FREQUENCY: 715,300,000 Hz

CHANNEL: 23173 (1.4 MHz)

REFERENCE VOLTAGE: 4.200 VDC

DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	715 300 006	0.0	0.000 000	0.000
100 %		-30	715 300 011	5.2	0.000 001	0.007
100 %		-20	715 300 000	-5.6	-0.000 001	-0.008
100 %		-10	715 300 000	-6.5	-0.000 001	-0.009
100 %		0	715 300 001	-5.1	-0.000 001	-0.007
100 %		+10	715 300 000	-5.8	-0.000 001	-0.008
100 %		+30	715 300 000	-6.5	-0.000 001	-0.009
100 %		+40	715 300 003	-3.4	0.000 000	-0.005
100 %		+50	715 300 011	5.3	0.000 001	0.007
Lowest voltage	3.700	+20	715 300 011	4.9	0.000 001	0.007

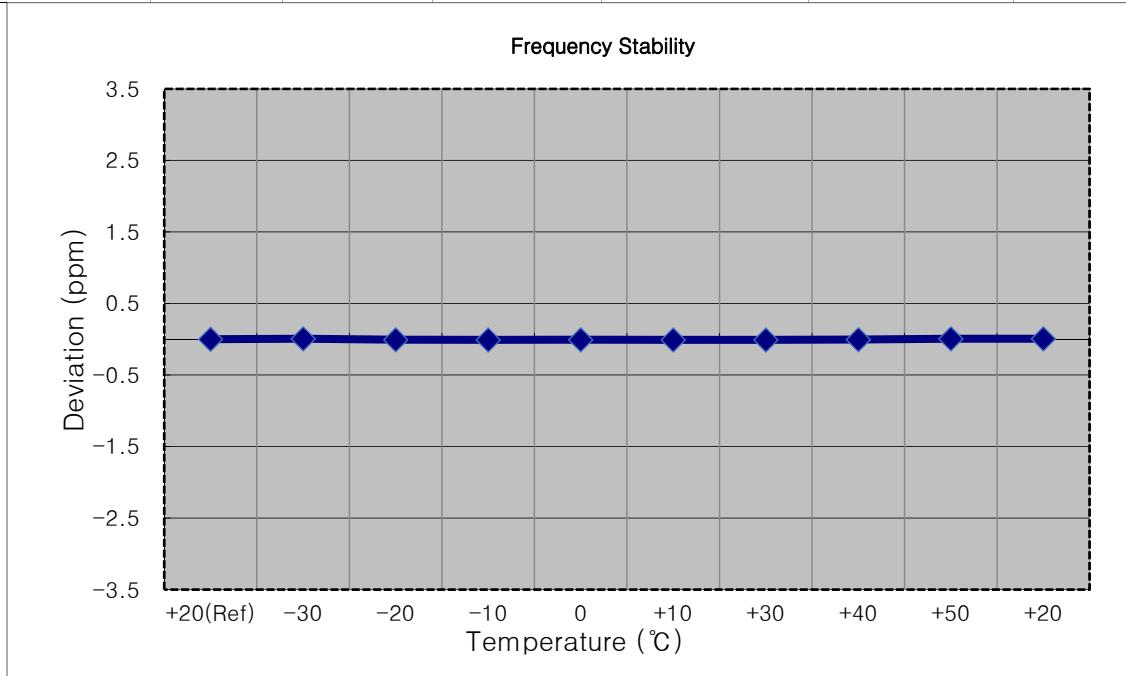

MODE: LTE B12


OPERATING FREQUENCY: 714,500,000 Hz

CHANNEL: 23165 (3 MHz)

REFERENCE VOLTAGE: 4.200 VDC

DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	714 499 991	0.0	0.000 000	0.000
100 %		-30	714 499 982	-9.4	-0.000 001	-0.013
100 %		-20	714 499 981	-10.6	-0.000 001	-0.015
100 %		-10	714 499 983	-8.2	-0.000 001	-0.011
100 %		0	714 499 999	7.5	0.000 001	0.010
100 %		+10	714 499 983	-7.9	-0.000 001	-0.011
100 %		+30	714 499 985	-6.5	-0.000 001	-0.009
100 %		+40	714 499 981	-10.0	-0.000 001	-0.014
100 %		+50	714 499 985	-6.2	-0.000 001	-0.009
Lowest voltage	3.700	+20	714 499 981	-9.9	-0.000 001	-0.014

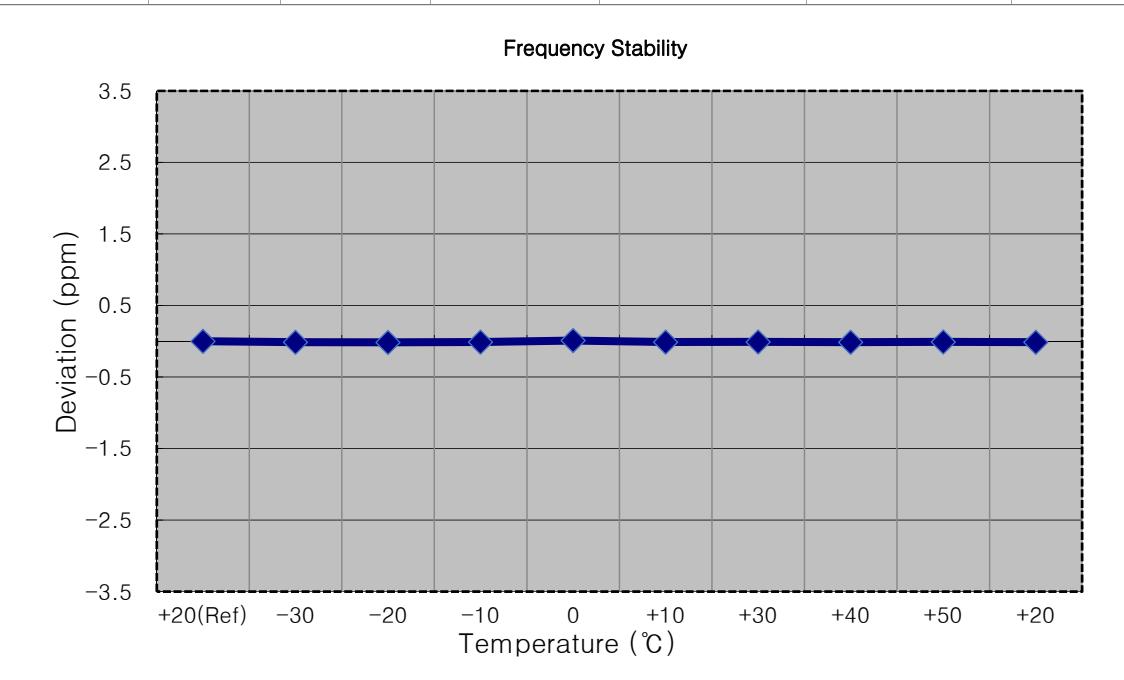

MODE: LTE B12(17)


OPERATING FREQUENCY: 713,500,000 Hz

CHANNEL: 23155 (5 MHz)

REFERENCE VOLTAGE: 4.200 VDC

DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	713 499 997	0.0	0.000 000	0.000
100 %		-30	713 499 999	1.8	0.000 000	0.003
100 %		-20	713 499 994	-3.4	0.000 000	-0.005
100 %		-10	713 500 000	2.5	0.000 000	0.004
100 %		0	713 499 999	2.0	0.000 000	0.003
100 %		+10	713 500 003	5.8	0.000 001	0.008
100 %		+30	713 500 001	4.2	0.000 001	0.006
100 %		+40	713 500 001	3.5	0.000 000	0.005
100 %		+50	713 499 994	-2.6	0.000 000	-0.004
Lowest voltage	3.700	+20	713 499 993	-4.3	-0.000 001	-0.006

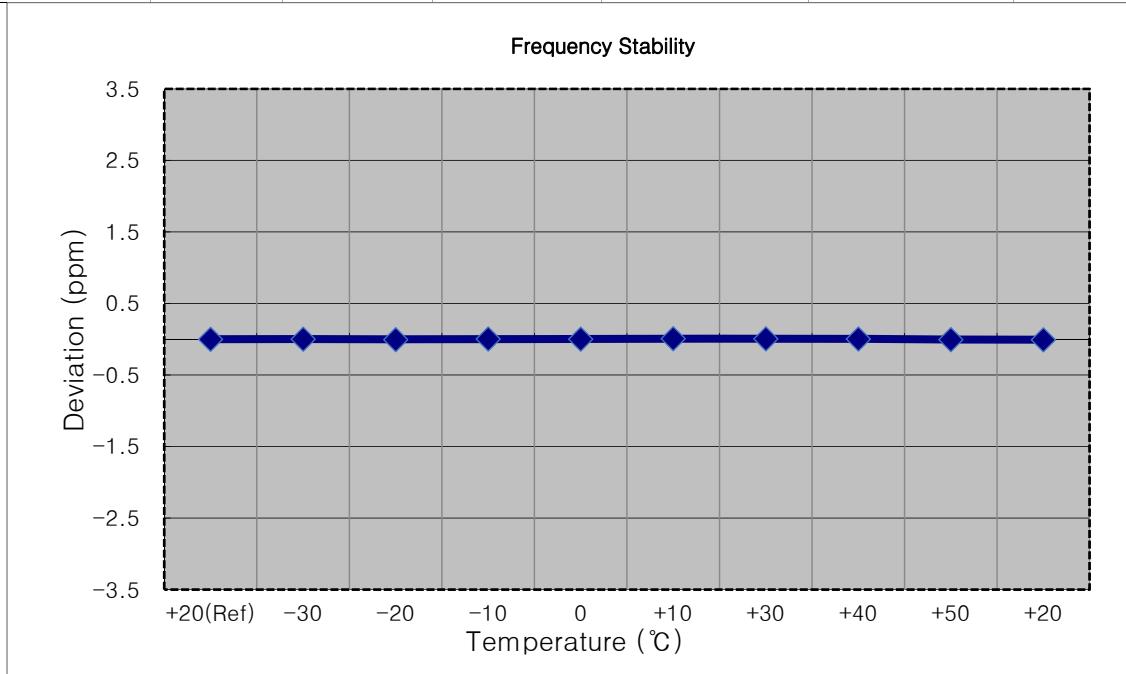

MODE: LTE B12(17)


OPERATING FREQUENCY: 711,000,000 Hz

CHANNEL: 23130 (10 MHz)

REFERENCE VOLTAGE: 4.200 VDC


DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	4.200	+20(Ref)	711 000 003	0.0	0.000 000	0.000
100 %		-30	711 000 007	4.2	0.000 001	0.006
100 %		-20	711 000 009	5.8	0.000 001	0.008
100 %		-10	711 000 007	4.4	0.000 001	0.006
100 %		0	711 000 007	4.1	0.000 001	0.006
100 %		+10	711 000 001	-2.5	0.000 000	-0.004
100 %		+30	711 000 006	3.0	0.000 000	0.004
100 %		+40	711 000 007	3.9	0.000 001	0.005
100 %		+50	711 000 006	3.0	0.000 000	0.004
Lowest voltage	3.700	+20	711 000 008	4.9	0.000 001	0.007

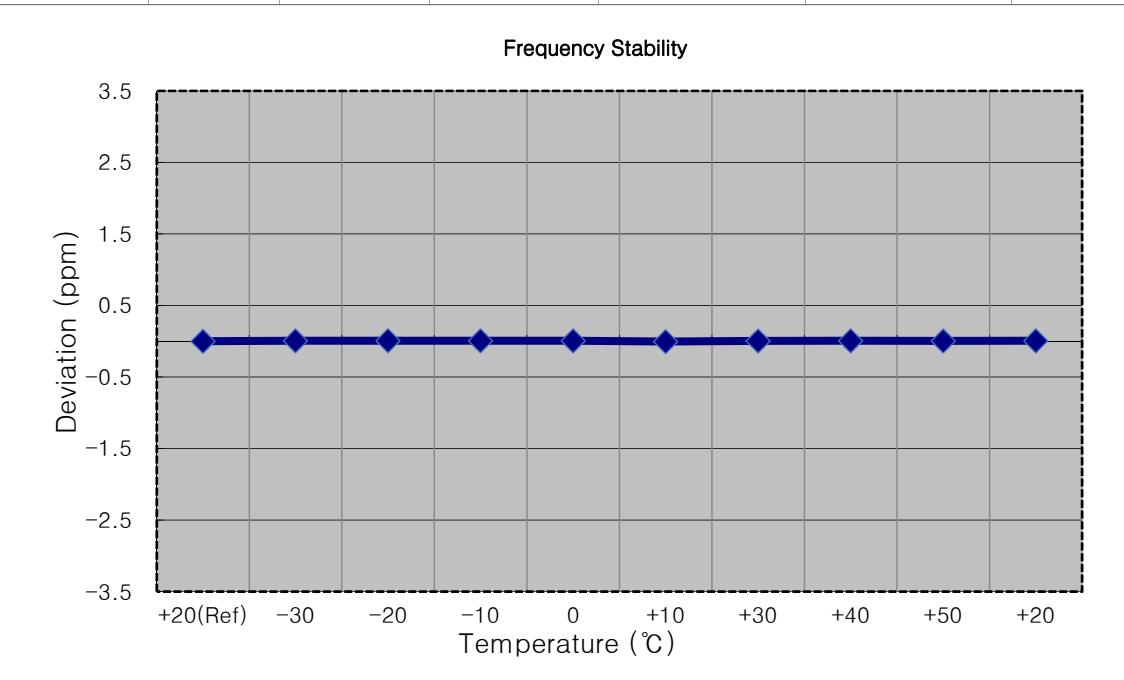

## 9. TEST PLOTS


## LTE B12\_1.4M\_PAR\_Mid\_QPSK\_FullRB

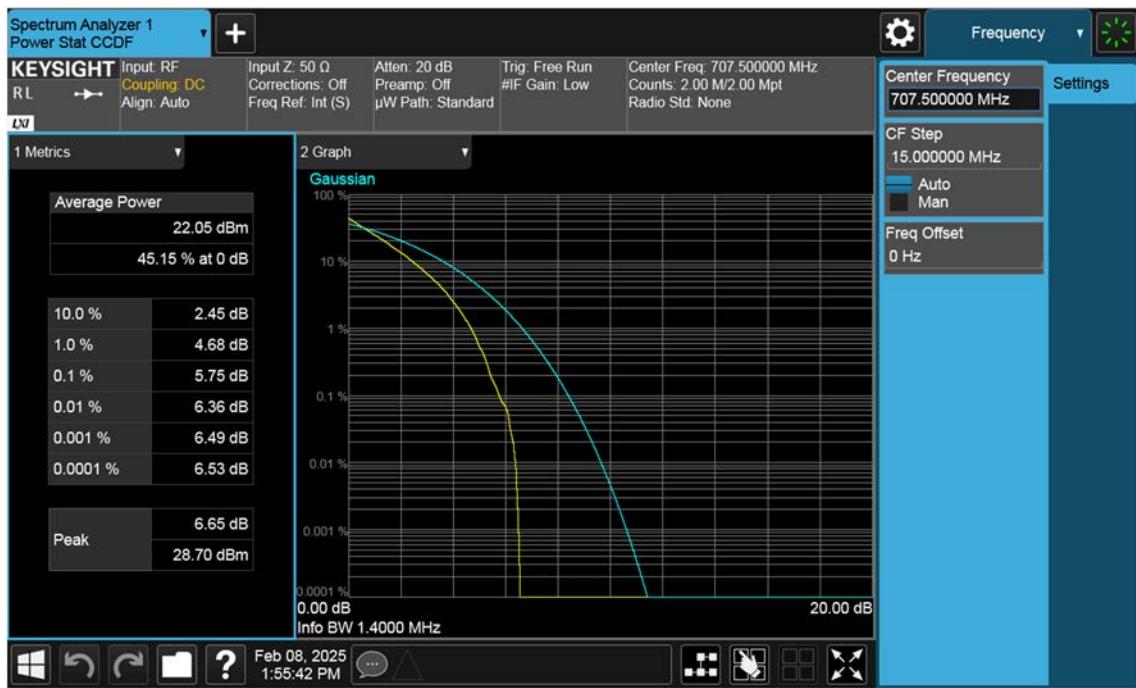

## LTE B12\_1.4M\_PAR\_Mid\_16QAM\_FullRB



## LTE B12\_1.4M\_PAR\_Mid\_64QAM\_FullRB

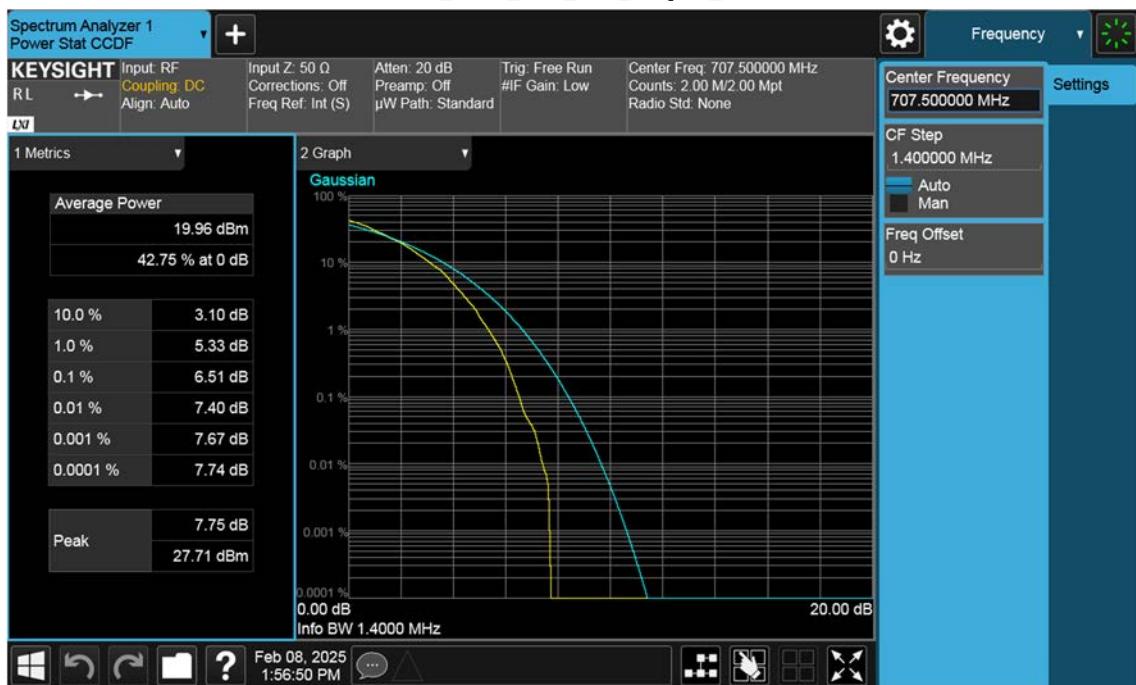

## LTE B12\_1.4M\_PAR\_Mid\_256QAM\_FullRB




## LTE B12\_3 M\_PAR\_Mid\_QPSK\_FullRB




## LTE B12\_3 M\_PAR\_Mid\_16QAM\_FullRB



## LTE B12\_3 M\_PAR\_Mid\_64QAM\_FullRB

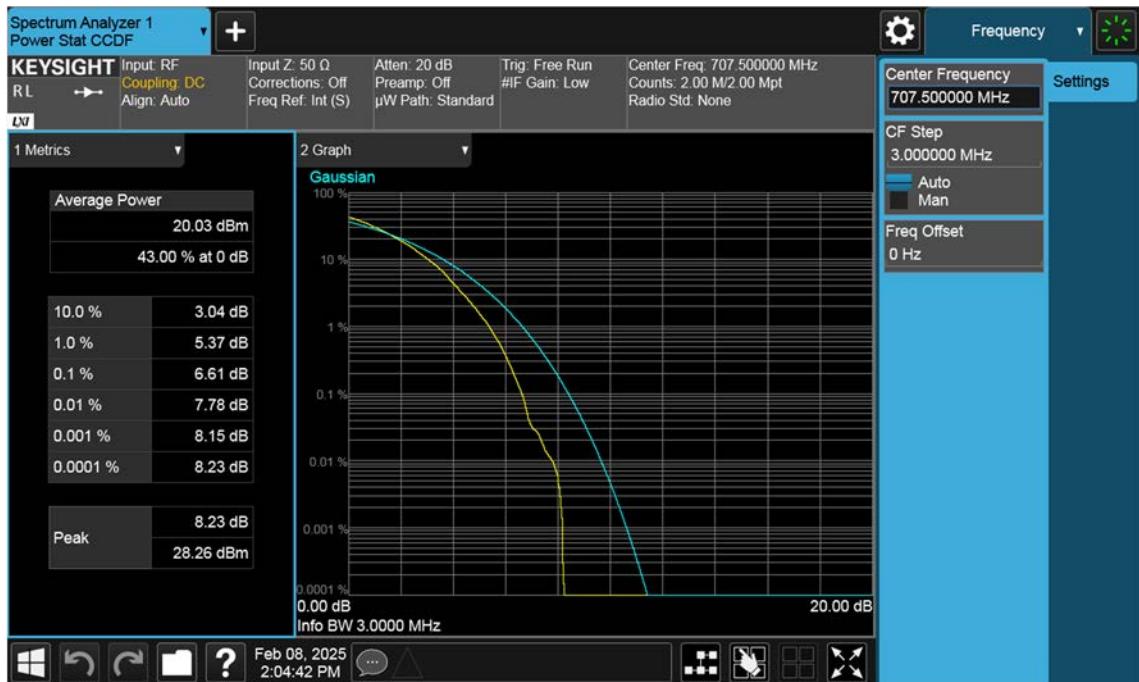

## LTE B12\_3 M\_PAR\_Mid\_256QAM\_FullRB

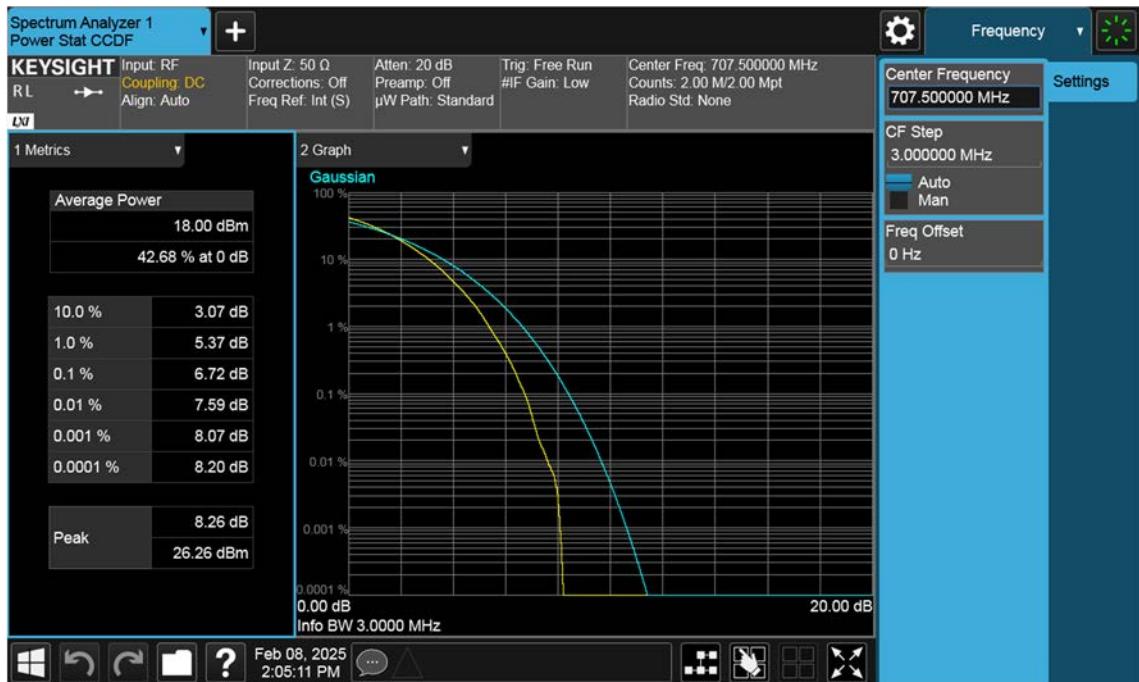

## LTE B12\_5 M\_PAR\_Mid\_QPSK\_FullRB



## LTE B12\_5 M\_PAR\_Mid\_16QAM\_FullRB




## LTE B12\_5 M\_PAR\_Mid\_64QAM\_FullRB



## LTE B12\_5 M\_PAR\_Mid\_256QAM\_FullRB



## LTE B12\_10 M\_PAR\_Mid\_QPSK\_FullRB

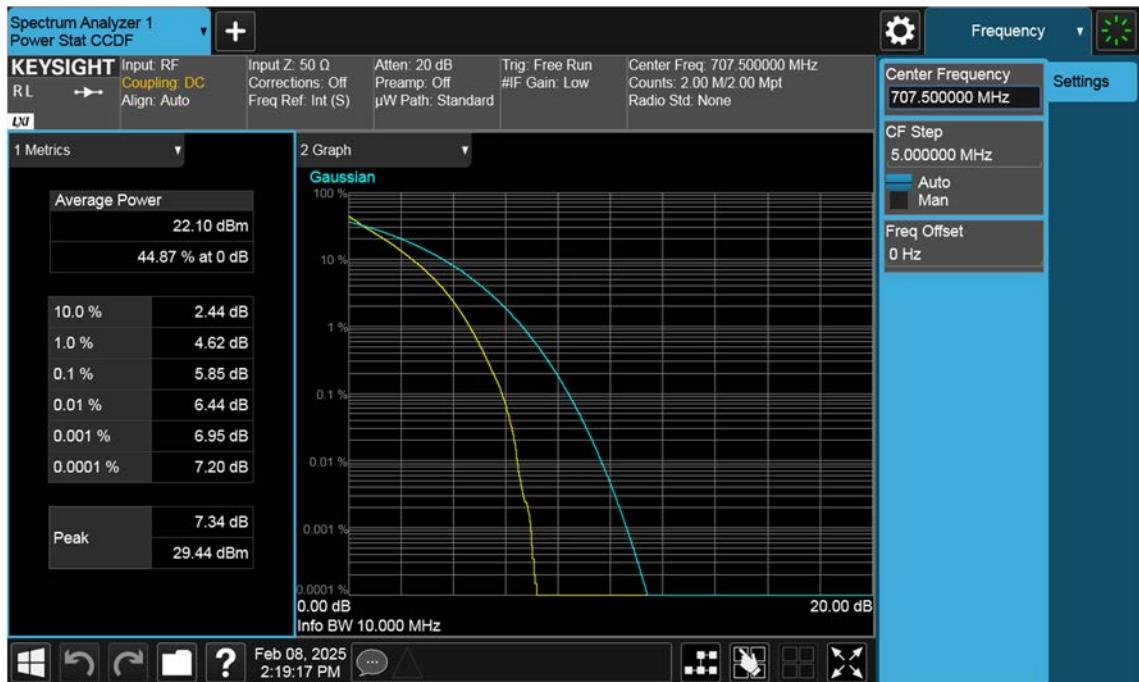

## LTE B12\_10 M\_PAR\_Mid\_16QAM\_FullRB



## LTE B12\_10 M\_PAR\_Mid\_64QAM\_FullRB



## LTE B12\_10 M\_PAR\_Mid\_256QAM\_FullRB




## LTE B12\_1.4M\_OBW\_Mid\_QPSK\_FullRB



## LTE B12\_1.4M\_OBW\_Mid\_16QAM\_FullRB



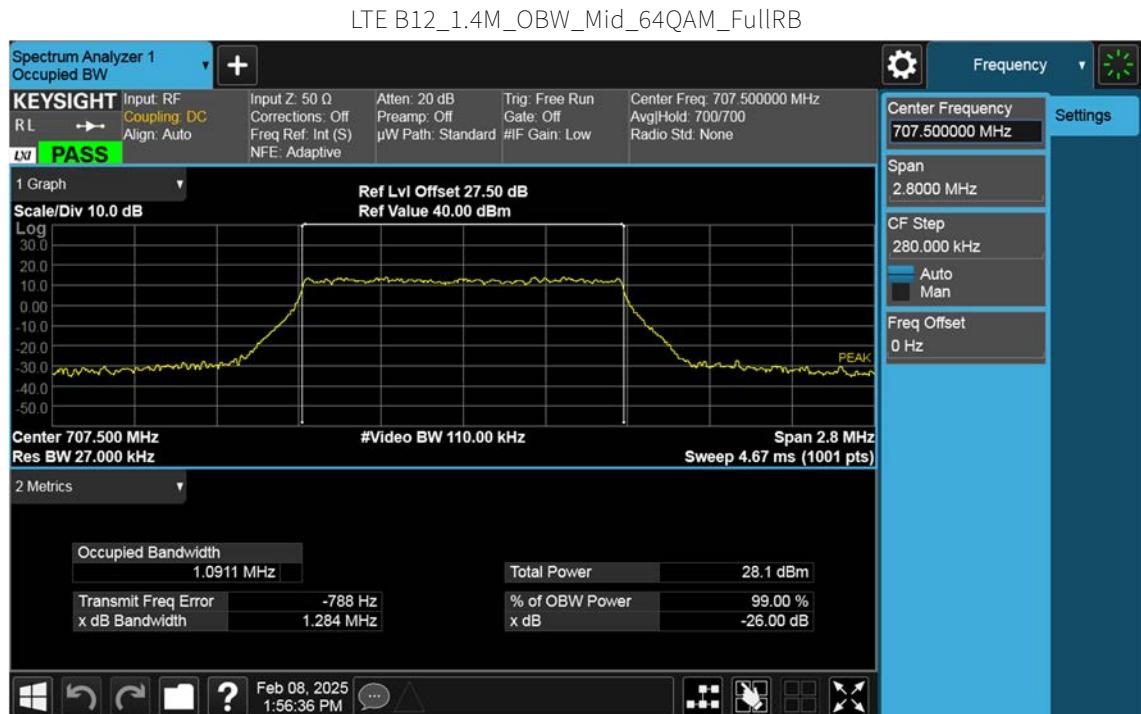



## LTE B12\_1.4M\_OBW\_Mid\_256QAM\_FullRB




## LTE B12\_3 M\_OBW\_Mid\_QPSK\_FullRB



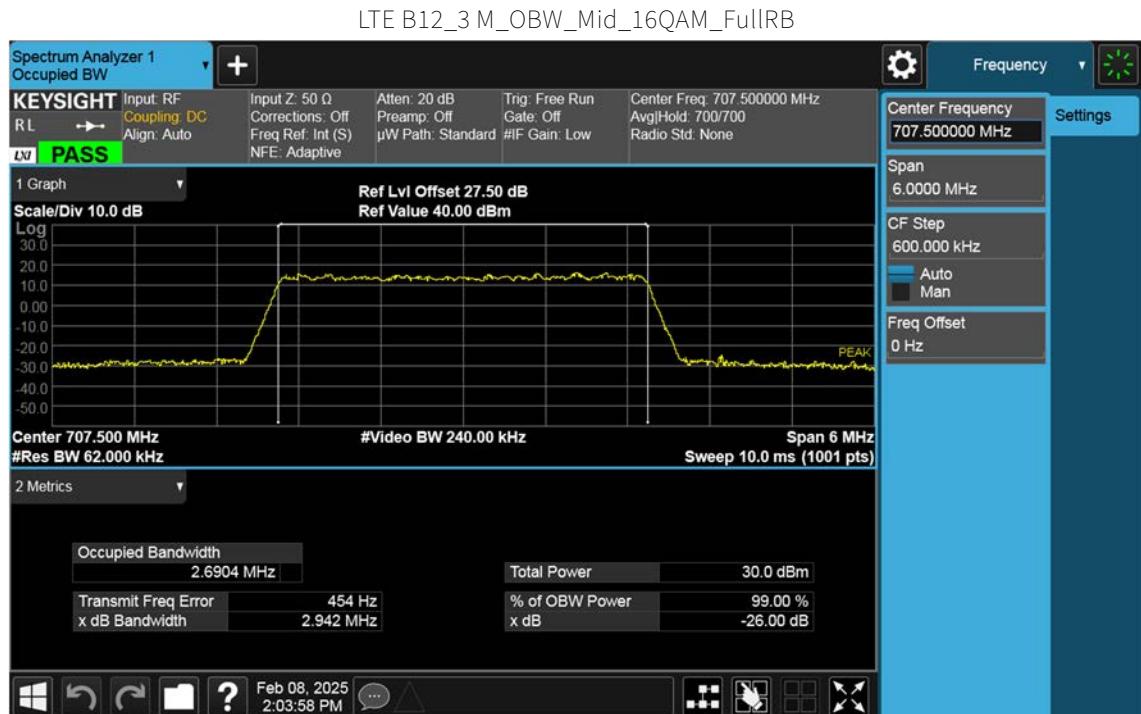


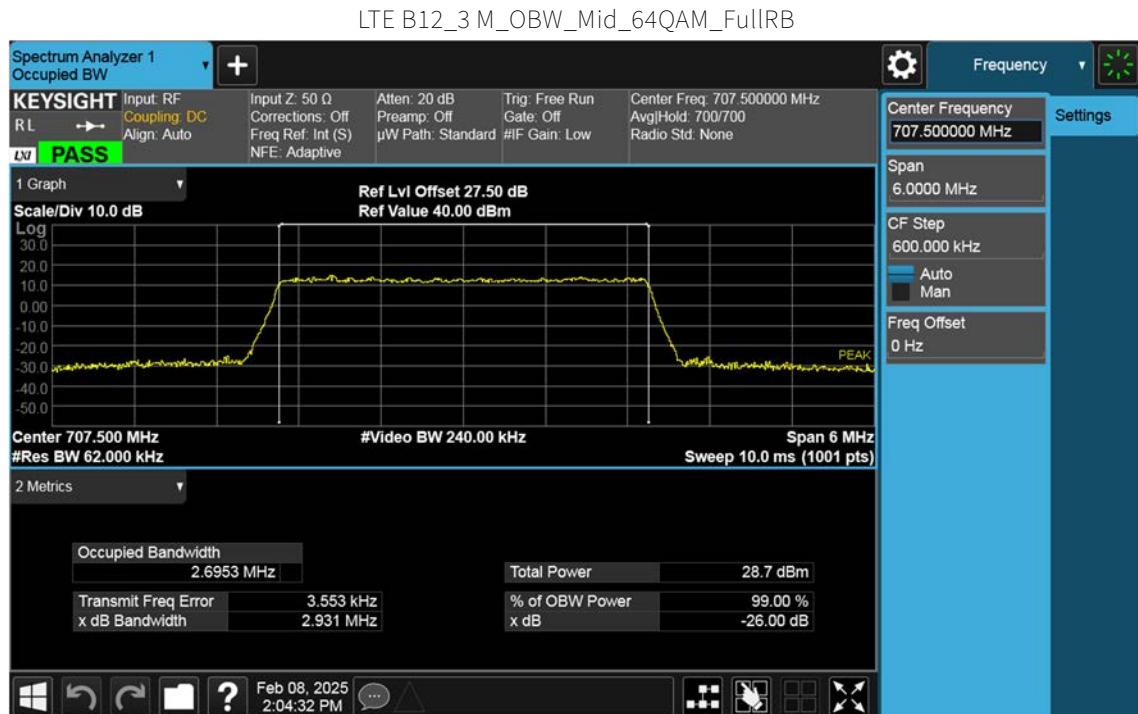


## LTE B12\_3 M\_OBW\_Mid\_256QAM\_FullRB

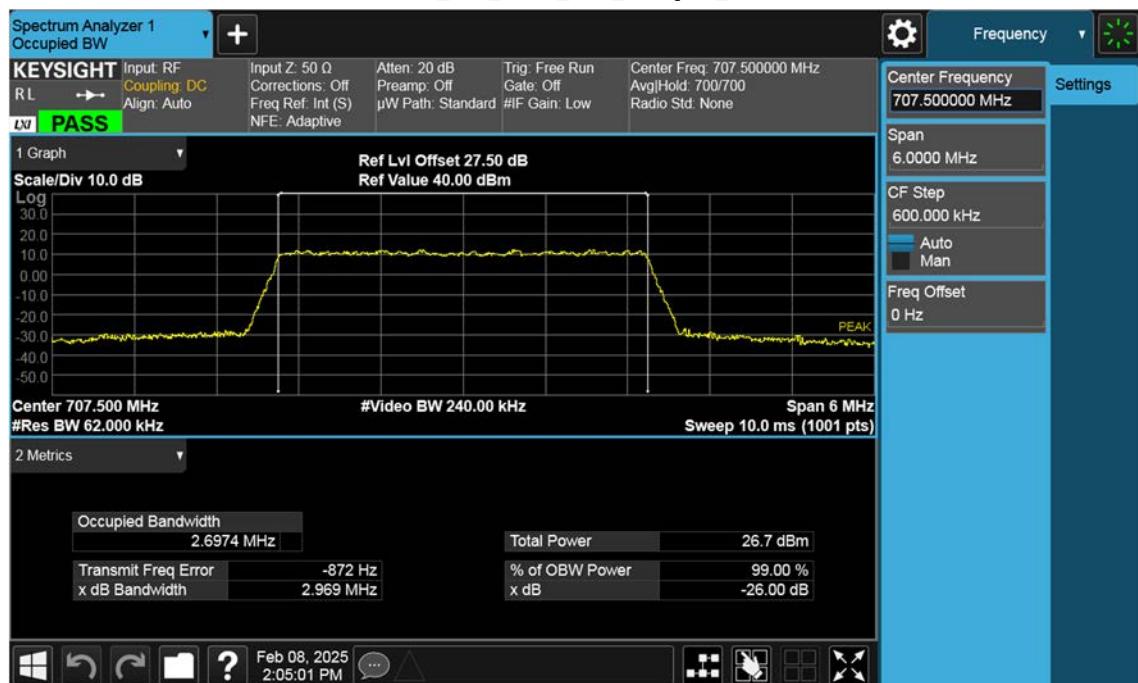


## LTE B12\_5 M\_OBW\_Mid\_QPSK\_FullRB

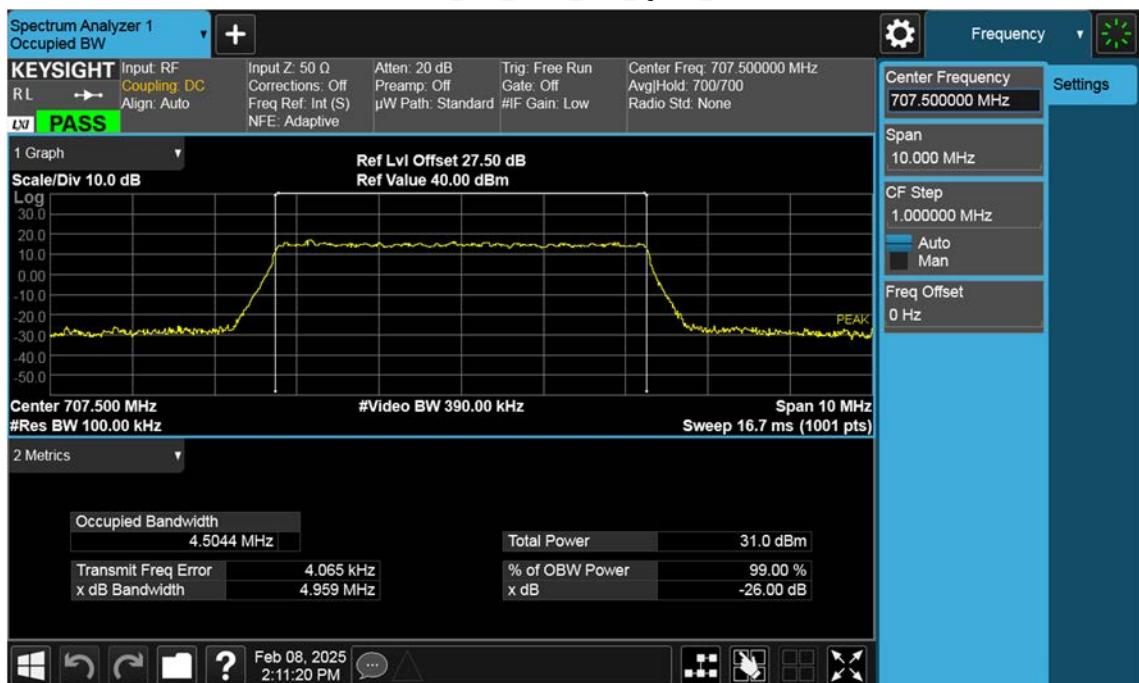


## LTE B12\_5 M\_OBW\_Mid\_16QAM\_FullRB

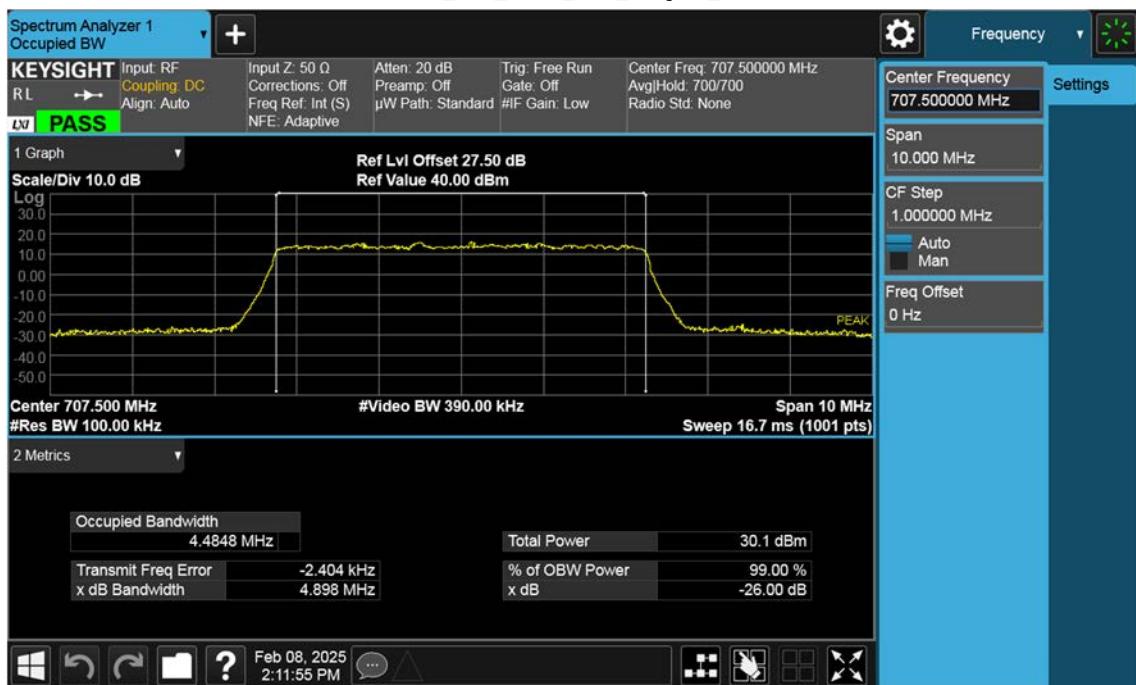


## LTE B12\_5 M\_OBW\_Mid\_64QAM\_FullRB

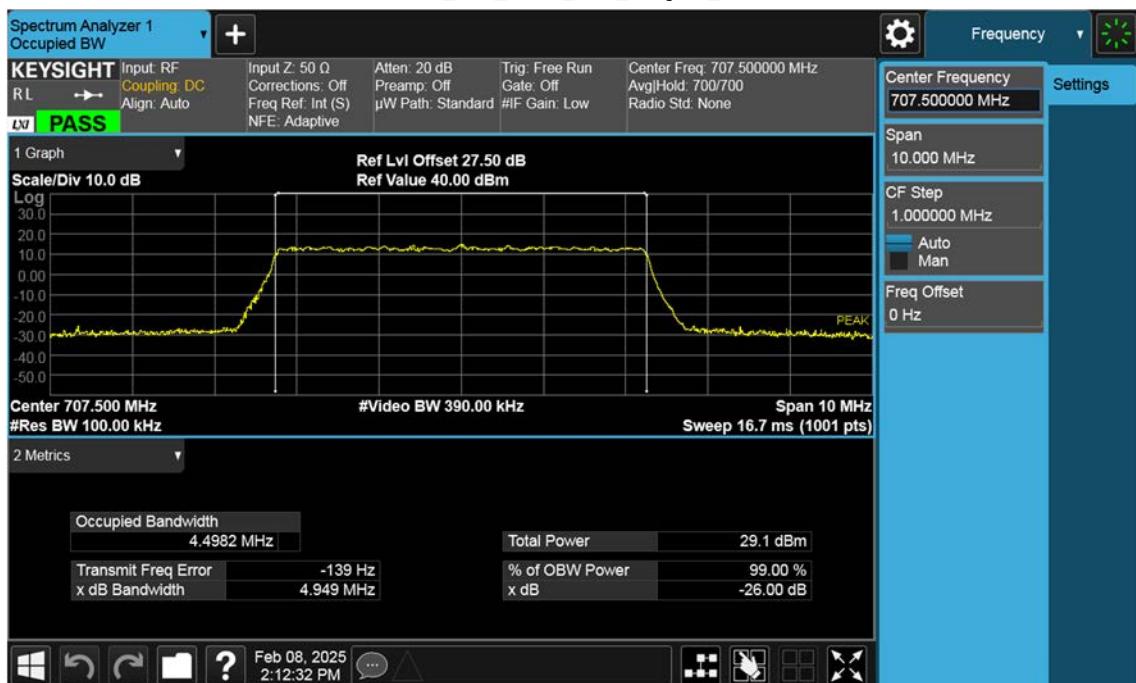


## LTE B12\_5 M\_OBW\_Mid\_256QAM\_FullRB

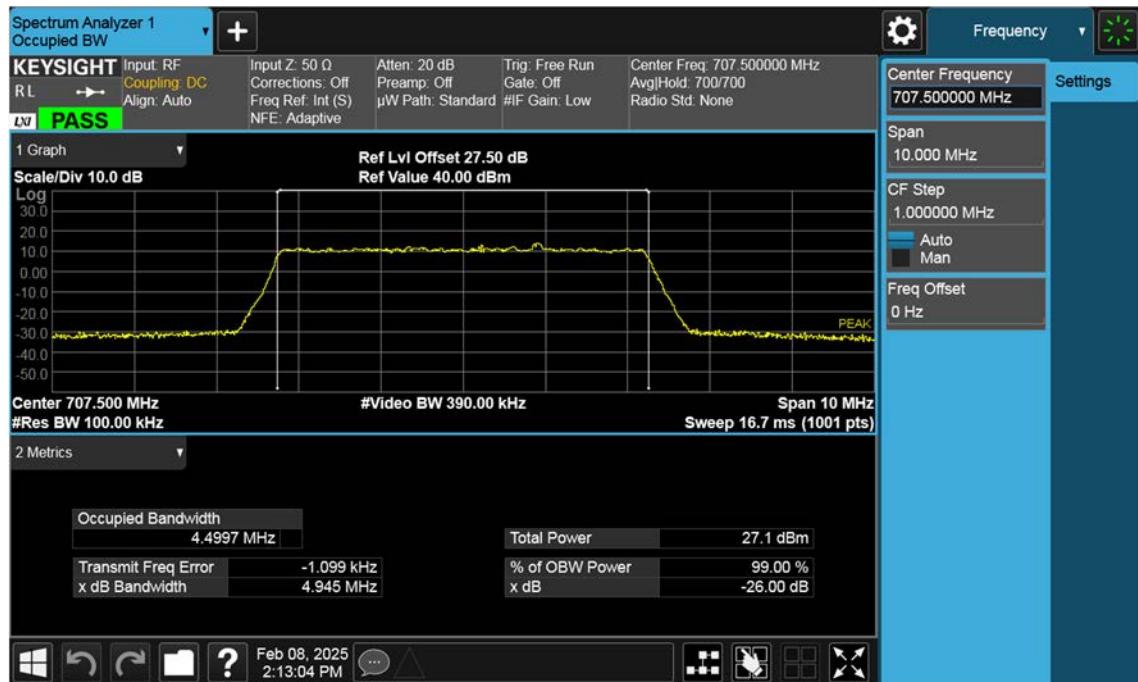


## LTE B12\_10 M\_OBW\_Mid\_QPSK\_FullIRB

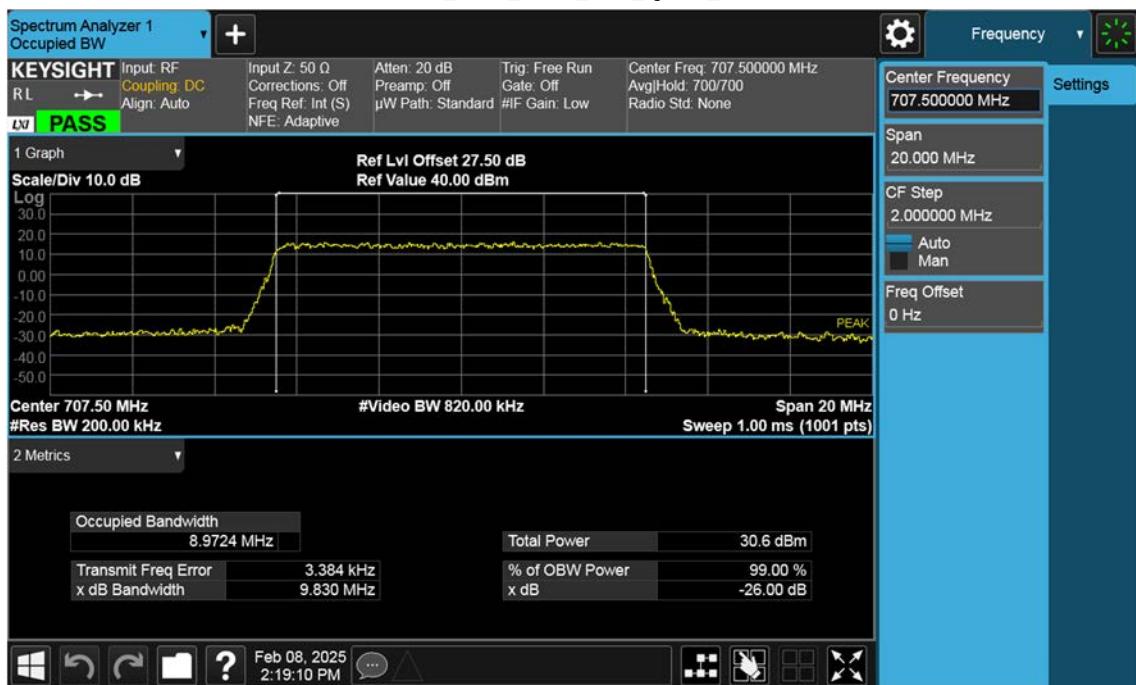


## LTE B12\_10 M\_OBW\_Mid\_16QAM\_FullRB

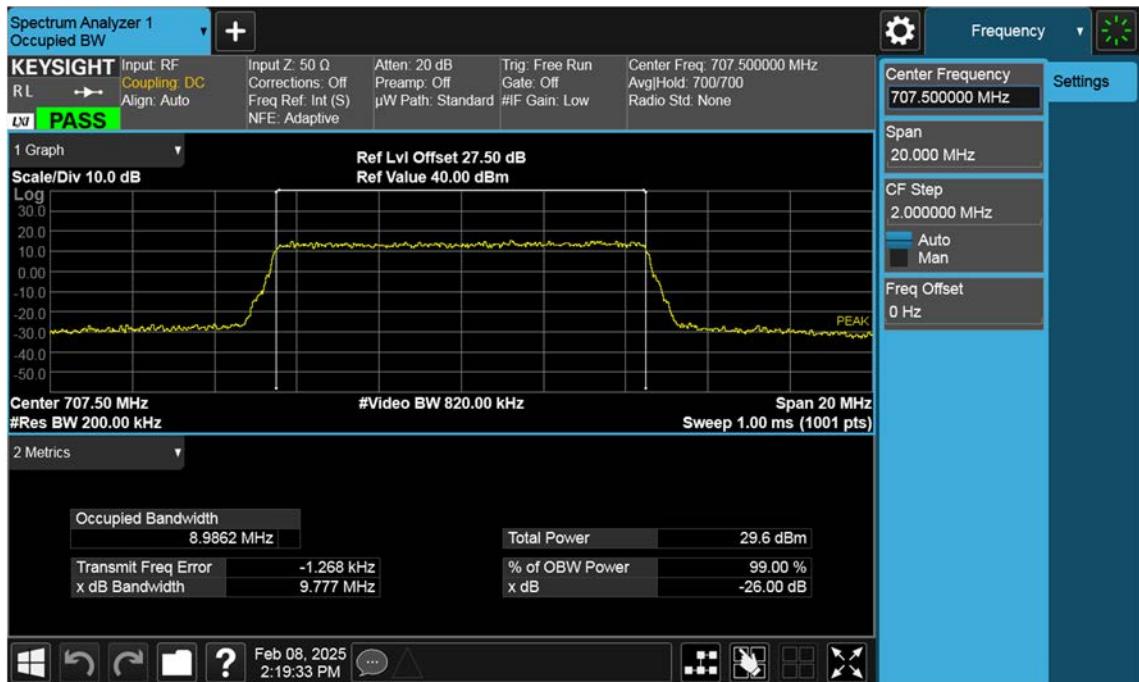


## LTE B12\_10 M\_OBW\_Mid\_64QAM\_FullRB

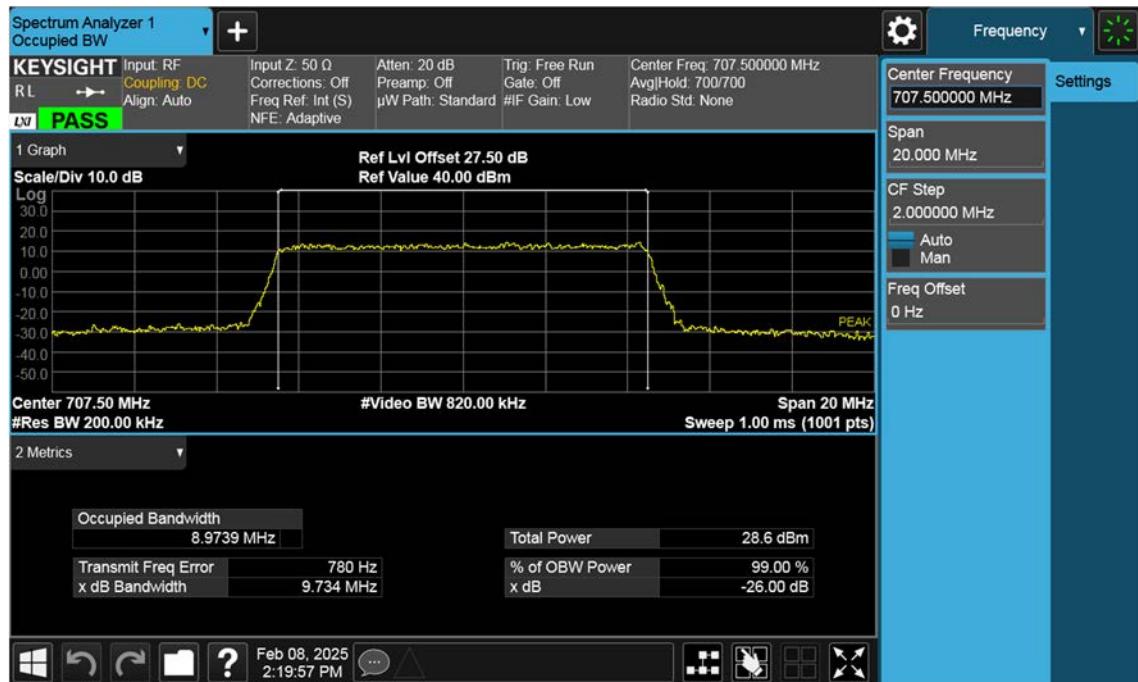

## LTE B12\_10 M\_OBW\_Mid\_256QAM\_FullRB

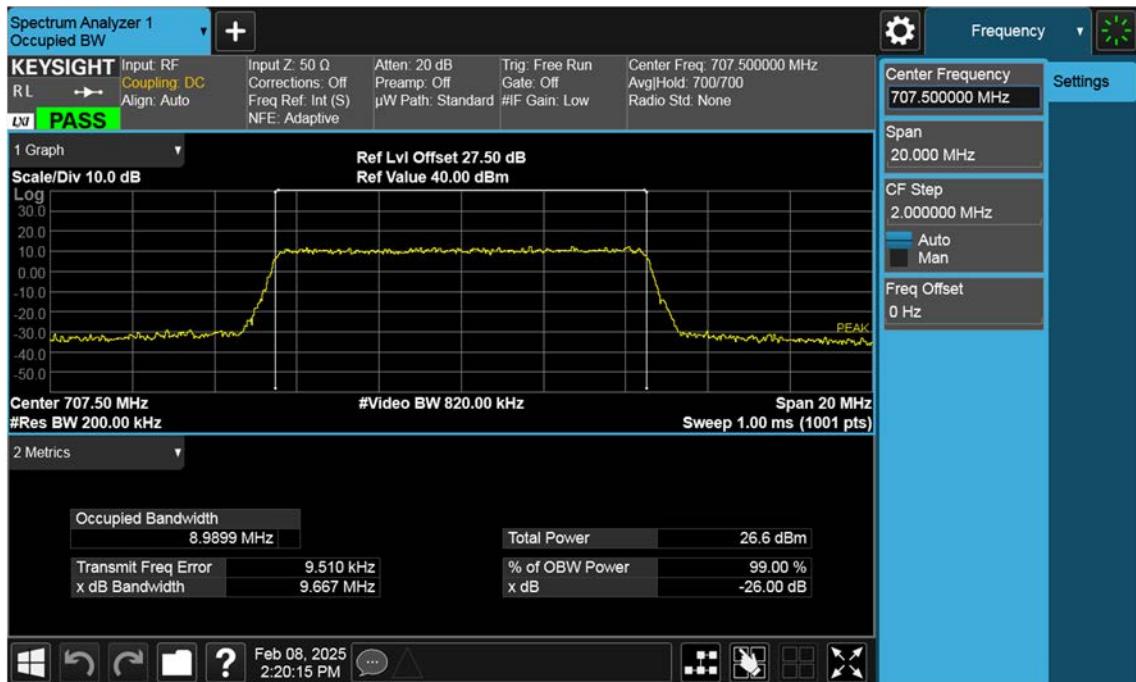


## LTE B12\_1.4M\_Conducted Spurious(30 M-10 G)\_Low\_QPSK\_1RB

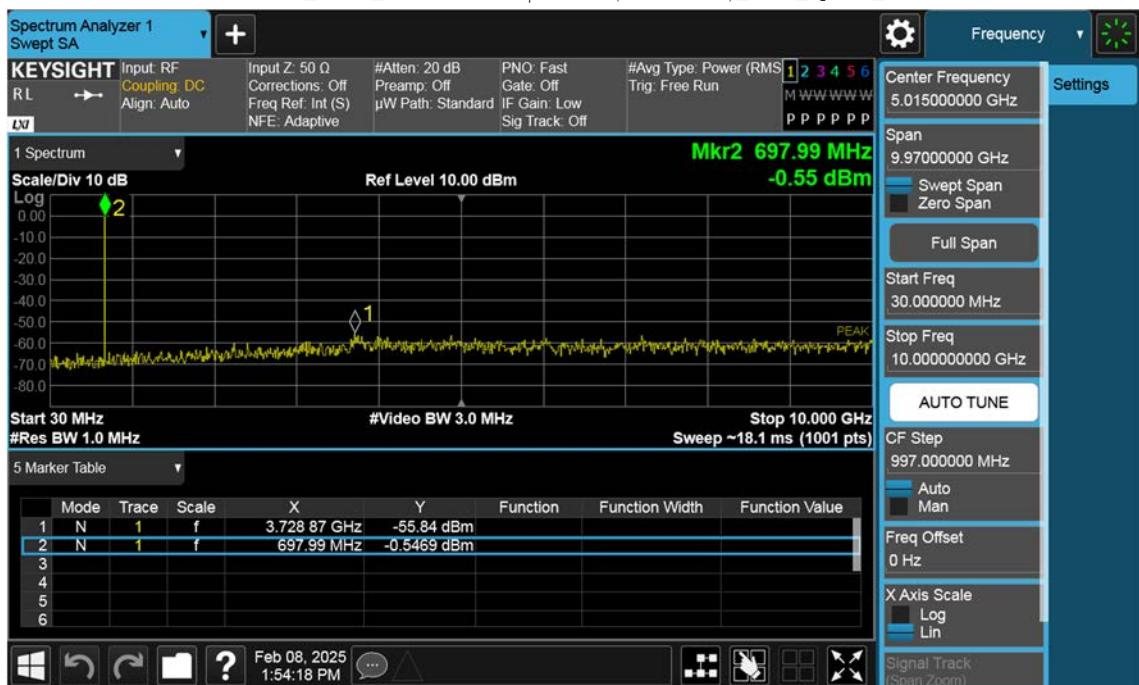


## LTE B12\_1.4M\_Conducted Spurious(30 M-10 G)\_Mid\_QPSK\_1RB



## LTE B12\_1.4M\_Conducted Spurious(30 M-10 G)\_High\_QPSK\_1RB

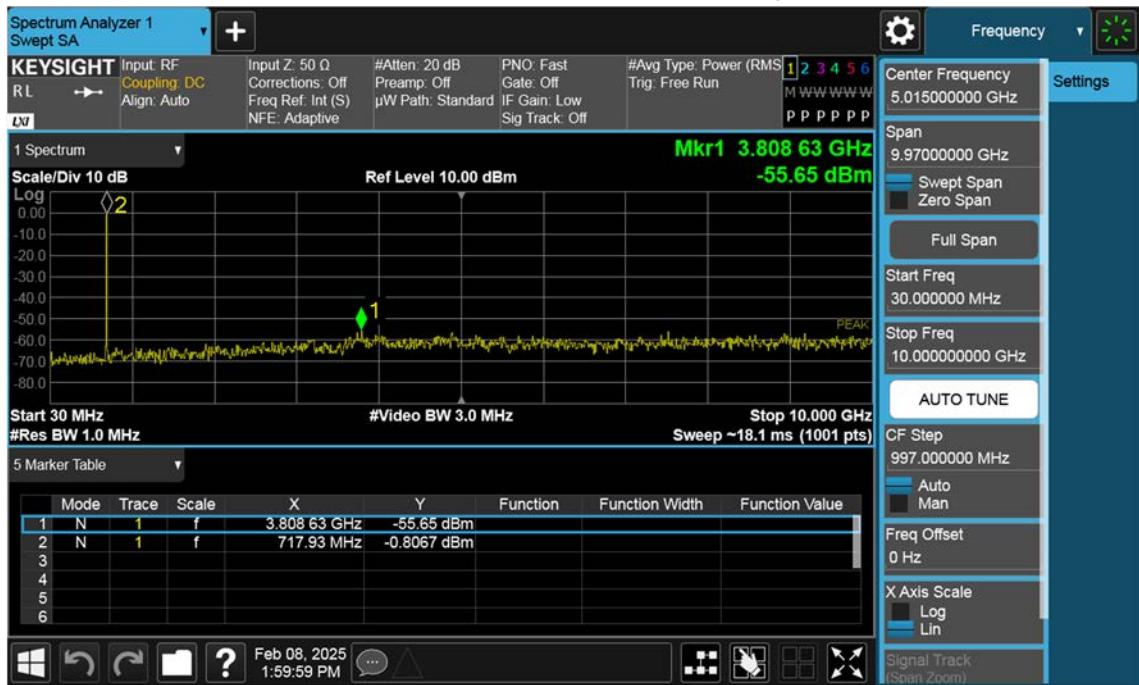


## LTE B12\_3 M\_Conducted Spurious(30 M-10 G)\_Low\_QPSK\_1RB

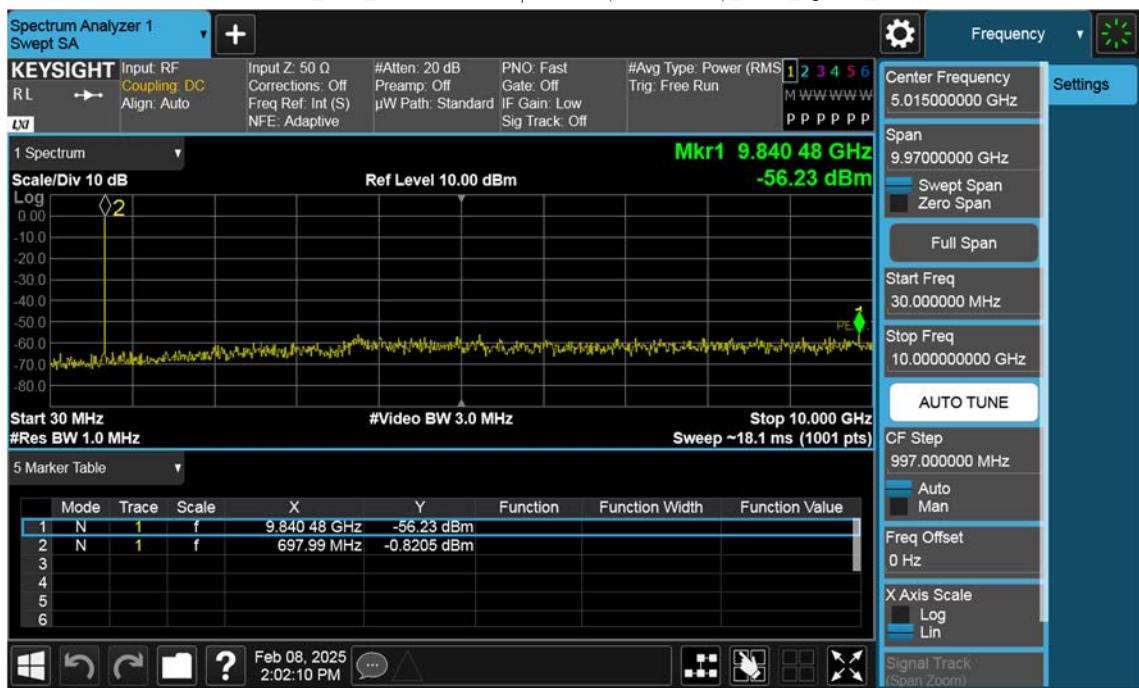

## LTE B12\_3 M\_Conducted Spurious(30 M-10 G)\_Mid\_QPSK\_1RB




## LTE B12\_3 M\_Conducted Spurious(30 M-10 G)\_High\_QPSK\_1RB

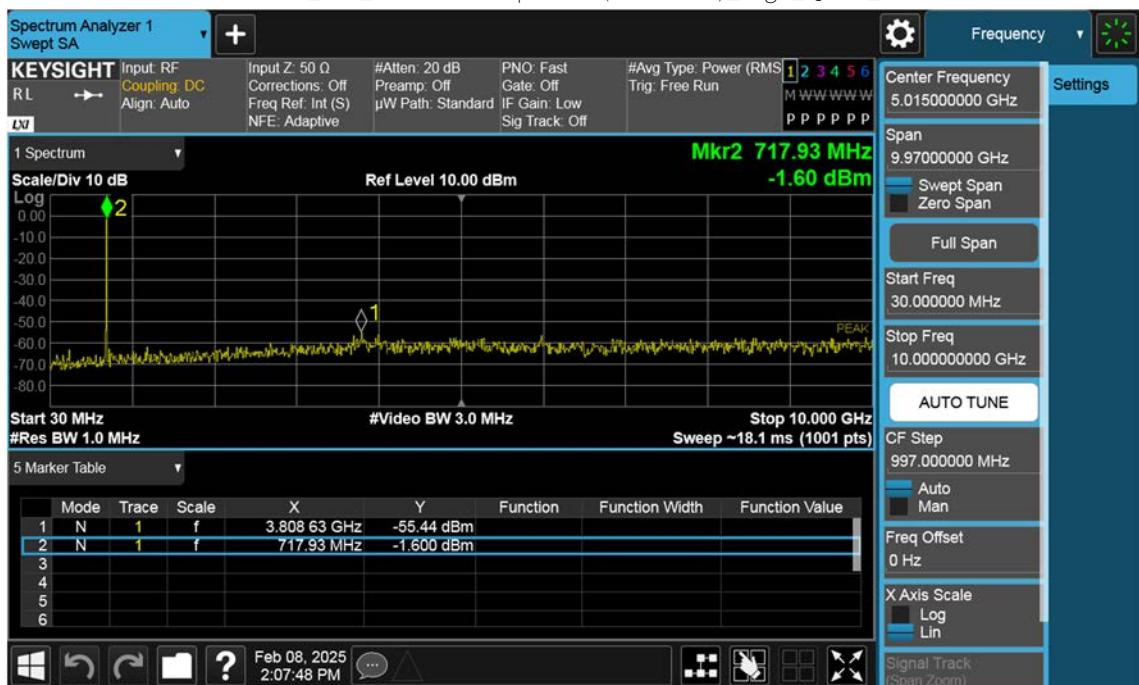

## LTE B12\_5 M\_Conducted Spurious(30 M-10 G)\_Low\_QPSK\_1RB




## LTE B12\_5 M\_Conducted Spurious(30 M-10 G)\_Mid\_QPSK\_1RB

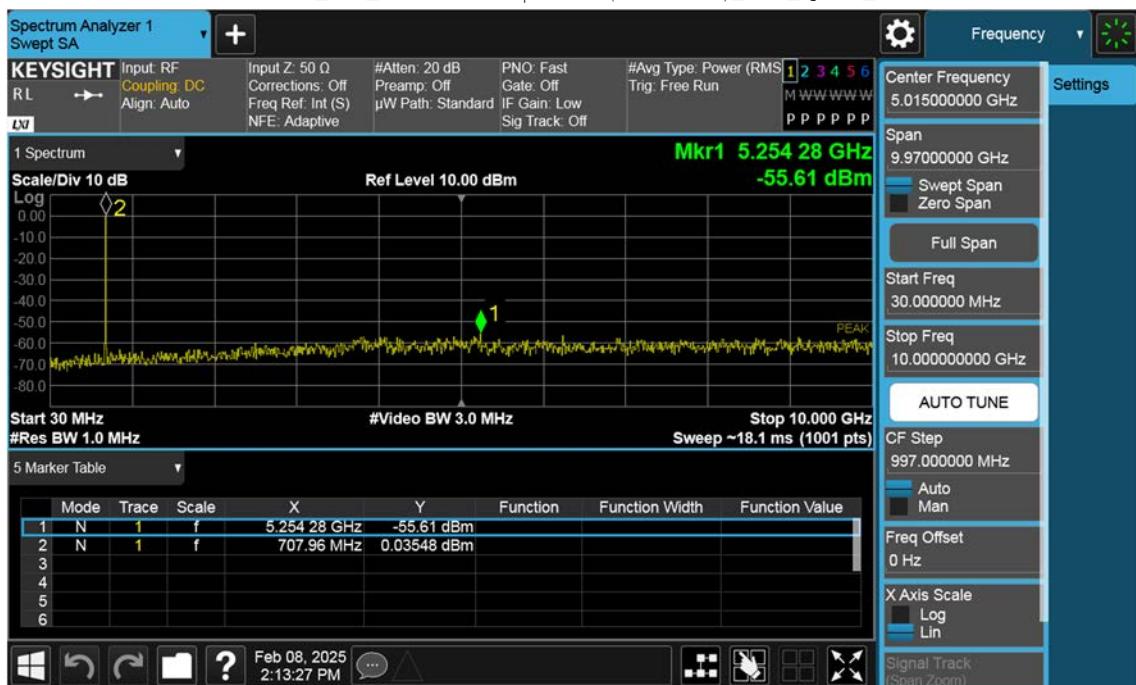


## LTE B12\_5 M\_Conducted Spurious(30 M-10 G)\_High\_QPSK\_1RB




## LTE B12\_10 M\_Conducted Spurious(30 M-10 G)\_Low\_QPSK\_1RB

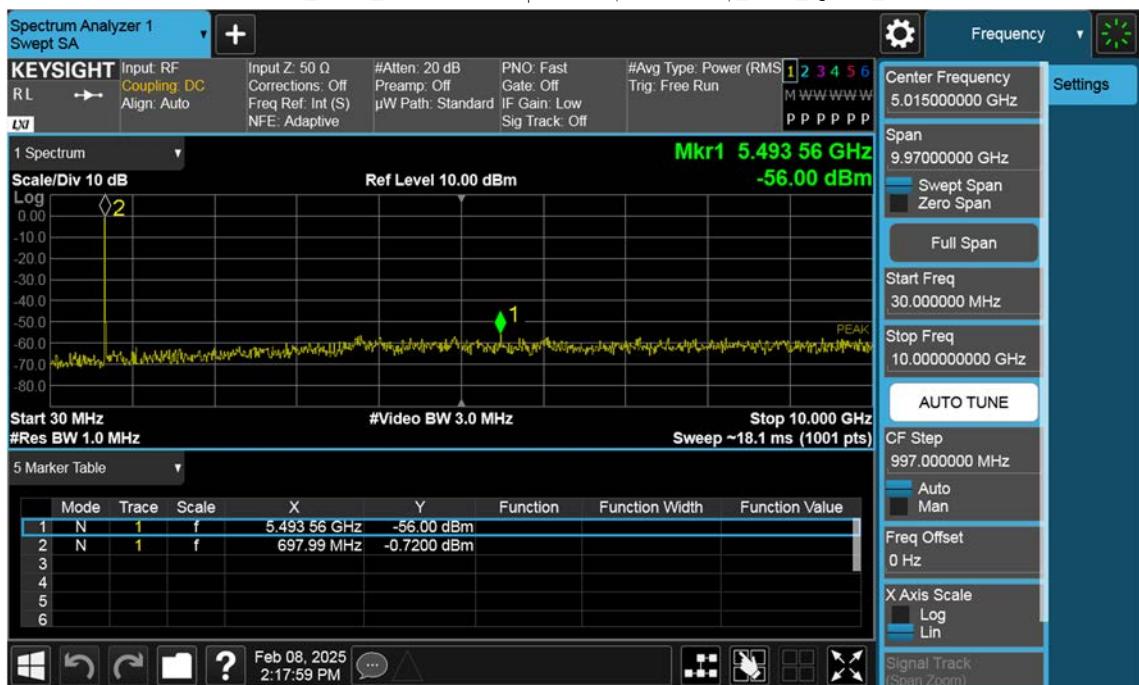

## LTE B12\_10 M\_Conducted Spurious(30 M-10 G)\_Mid\_QPSK\_1RB

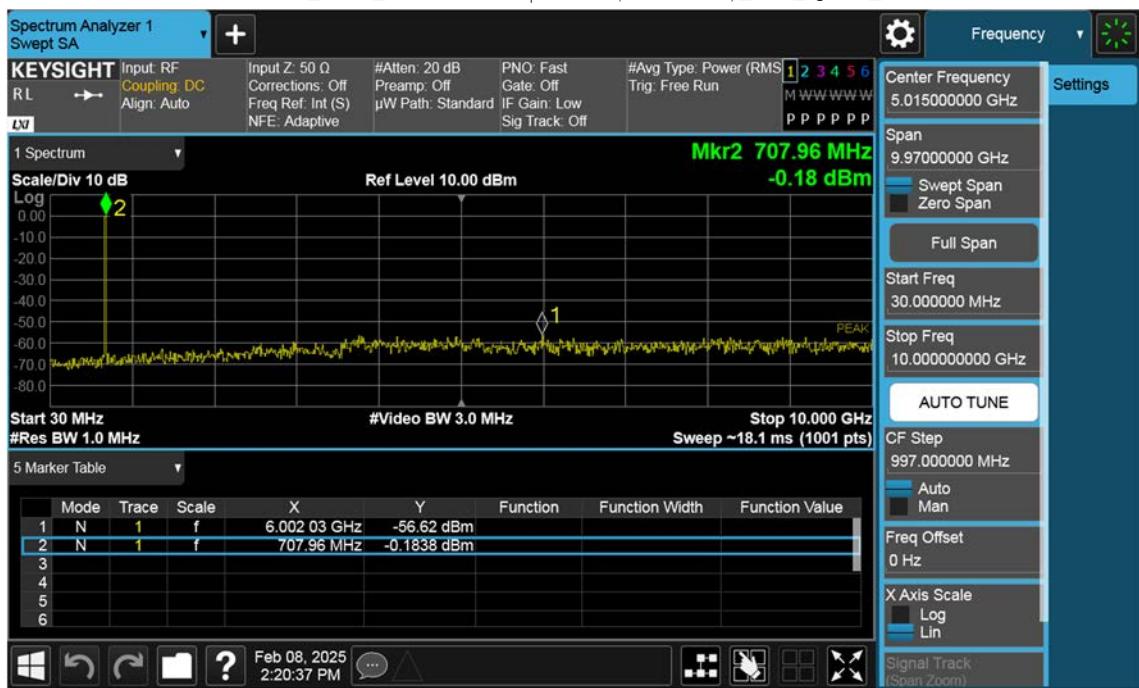

## LTE B12\_10 M\_Conducted Spurious(30 M-10 G)\_High\_QPSK\_1RB

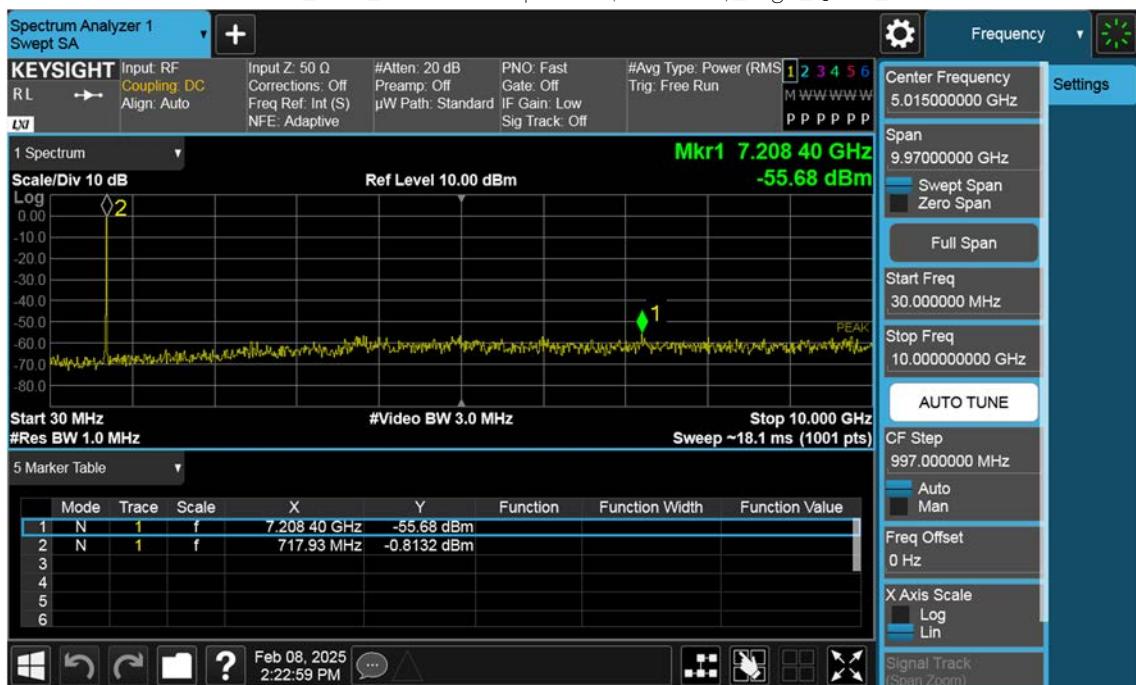

## LTE B12\_1.4M\_Band Edge\_Low\_QPSK\_1RB



## LTE B12\_1.4M\_Band Edge\_Low\_QPSK\_FullRB



## LTE B12\_1.4M\_Extended Band Edge\_Low\_QPSK\_FullRB



## LTE B12\_1.4M\_Band Edge\_High\_QPSK\_1RB(1)



## LTE B12\_1.4M\_Band Edge\_High\_QPSK\_1RB(2)




## LTE B12\_1.4M\_Band Edge\_High\_QPSK\_FullRB



## LTE B12\_1.4M\_Extended Band Edge\_High\_QPSK\_FullRB



## LTE B12\_3 M\_Band Edge\_Low\_QPSK\_1RB

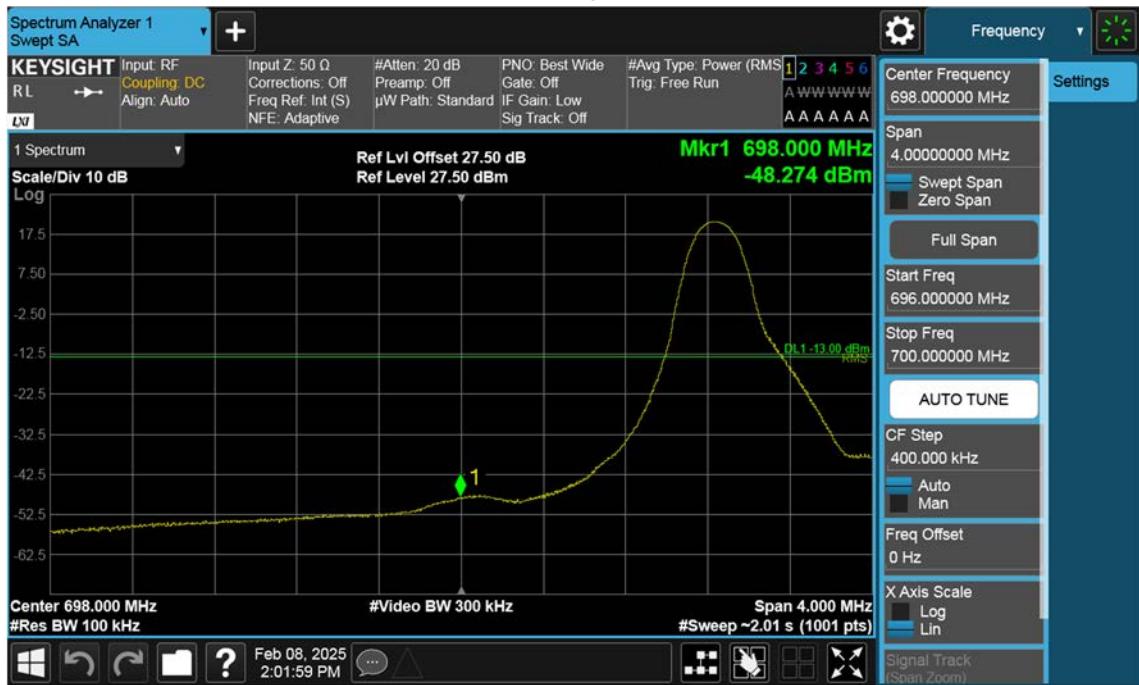

## LTE B12\_3 M\_Band Edge\_Low\_QPSK\_FullIRB



## LTE B12\_3 M\_Extended Band Edge\_Low\_QPSK\_FullIRB



## LTE B12\_3 M\_Band Edge\_High\_QPSK\_1RB(1)



## LTE B12\_3 M\_Band Edge\_High\_QPSK\_1RB(2)



## LTE B12\_3 M\_Band Edge\_High\_QPSK\_FullRB



## LTE B12\_3 M\_Extended Band Edge\_High\_QPSK\_FullRB



## LTE B12\_5 M\_Band Edge\_Low\_QPSK\_1RB



## LTE B12\_5 M\_Band Edge\_Low\_QPSK\_FullIRB



## LTE B12\_5 M\_Extended Band Edge\_Low\_QPSK\_FullIRB



## LTE B12\_5 M\_Band Edge\_High\_QPSK\_1RB(1)



## LTE B12\_5 M\_Band Edge\_High\_QPSK\_1RB(2)




## LTE B12\_5 M\_Band Edge\_High\_QPSK\_FullRB



## LTE B12\_5 M\_Extended Band Edge\_High\_QPSK\_FullRB



## LTE B12\_10 M\_Band Edge\_Low\_QPSK\_1RB

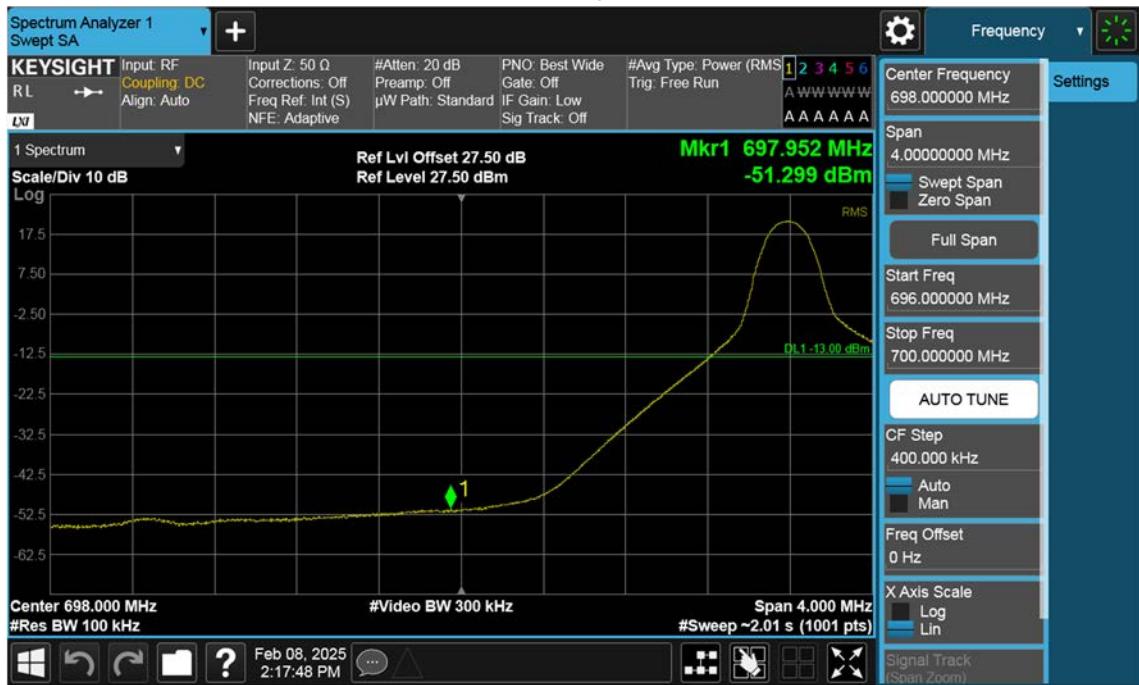

## LTE B12\_10 M\_Band Edge\_Low\_QPSK\_FullRB



## LTE B12\_10 M\_Extended Band Edge\_Low\_QPSK\_FullRB



## LTE B12\_10 M\_Band Edge\_High\_QPSK\_1RB(1)



## LTE B12\_10 M\_Band Edge\_High\_QPSK\_1RB(2)



## LTE B12\_10 M\_Band Edge\_High\_QPSK\_FullRB





## 10. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2506-FC054-P