



SPECIFICATIONS

Frequency (MHz)	2400-2480
Peak Gain (dBi)	-2.980
Average Gain (dBi)	>-9.746
VSWR	<3
Impedance (Ω)	50 Ω
Antenna Type	Metal Wire Antenna
Polarization	Linear

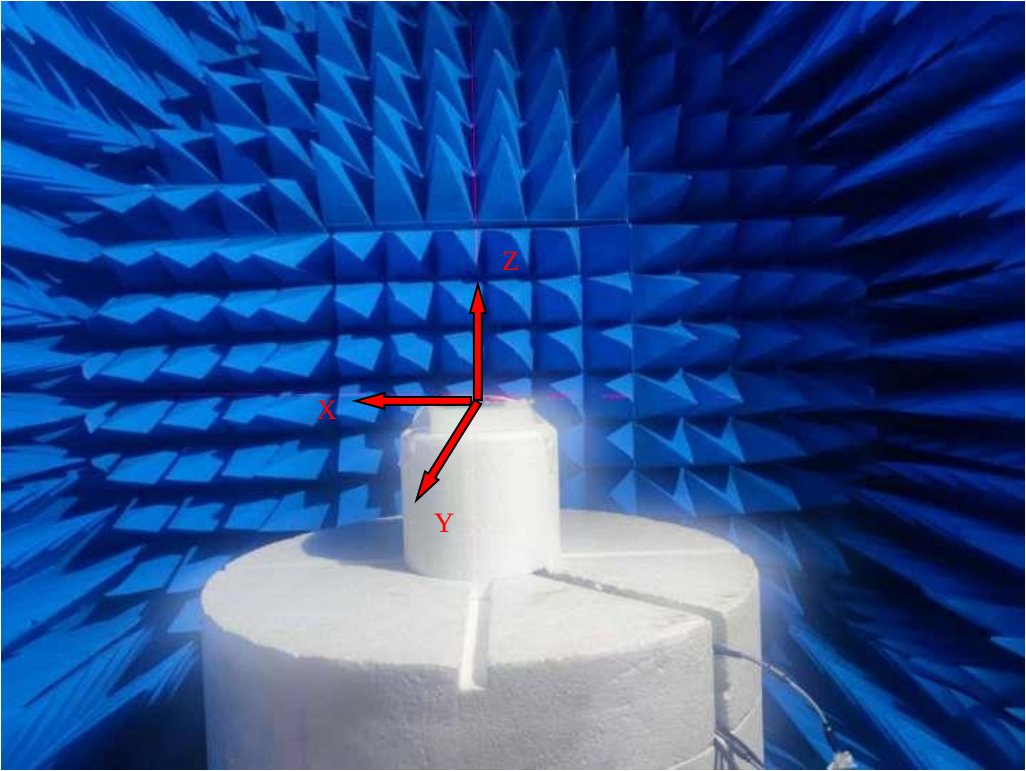


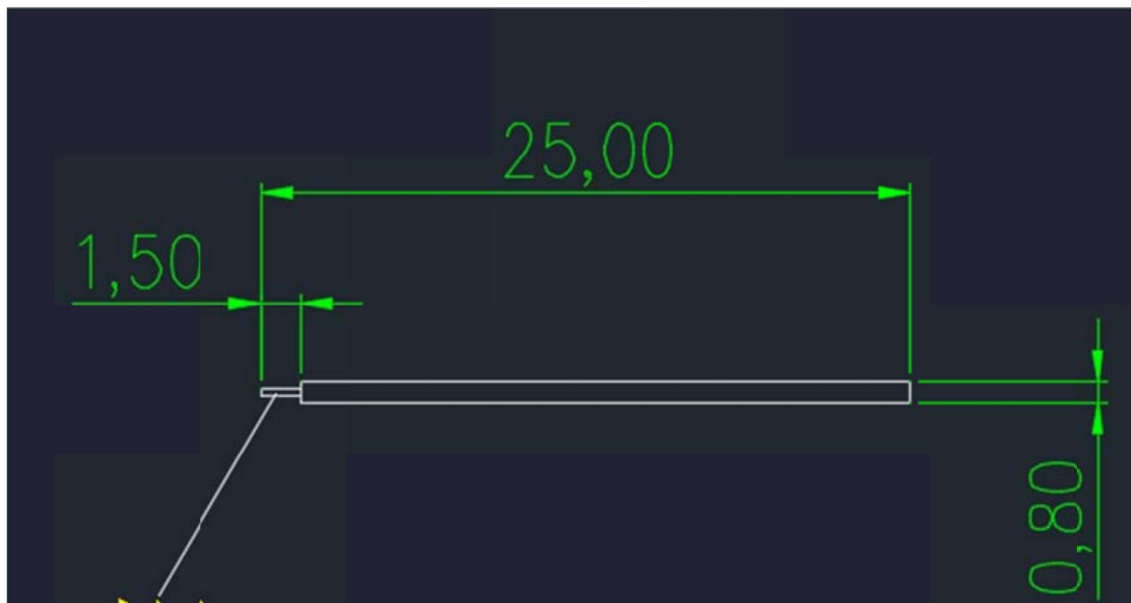


Ant.

Frequency (MHz)	Gain (dBi)	Effciency (%)	AverageGain (dBi)	Efficiency (dB)
2400	-4.885	13.06%	-9.239	-8.839
2410	-5.056	12.80%	-9.395	-8.929
2420	-4.924	12.51%	-9.414	-9.029
2430	-5.36	11.52%	-9.746	-9.387
2440	-5.257	11.34%	-9.711	-9.454
2450	-4.615	12.35%	-9.127	-9.085
2460	-3.954	14.05%	-8.513	-8.525
2470	-3.508	14.59%	-8.119	-8.359
2480	-2.98	16.16%	-7.637	-7.915
Average	-4.504	13.2%	-8.989	-8.836
Peak	-2.980	16.16%	-7.637	-7.915

2480MHz 2D-Theta Pattern

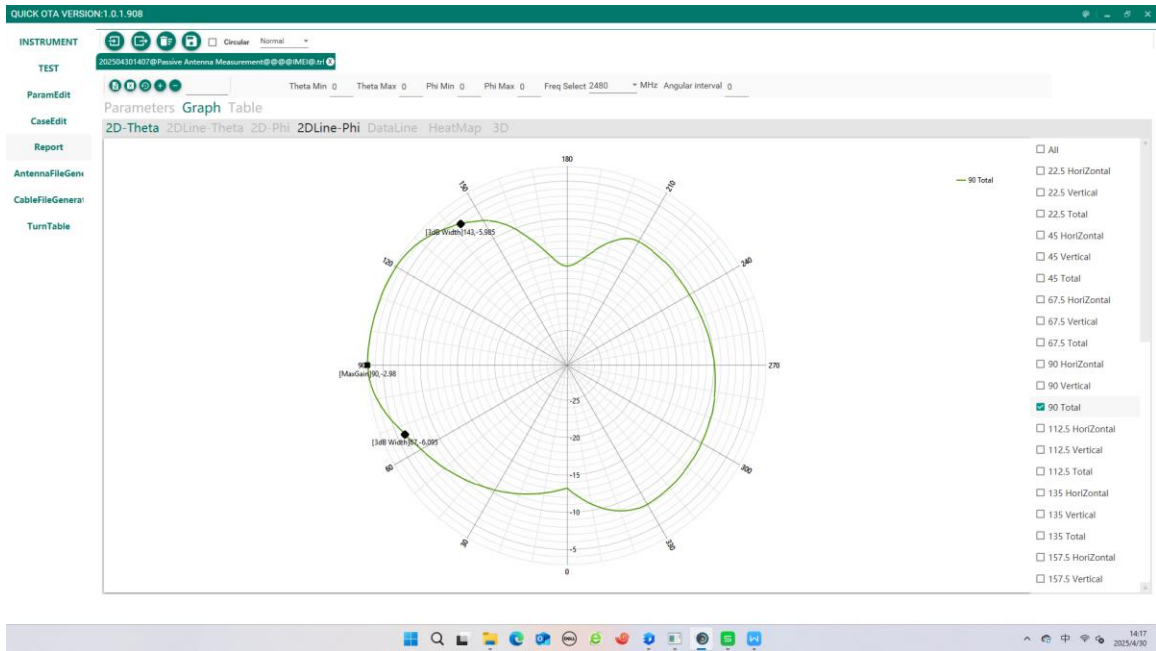

2480MHz 2D-Phi Pattern

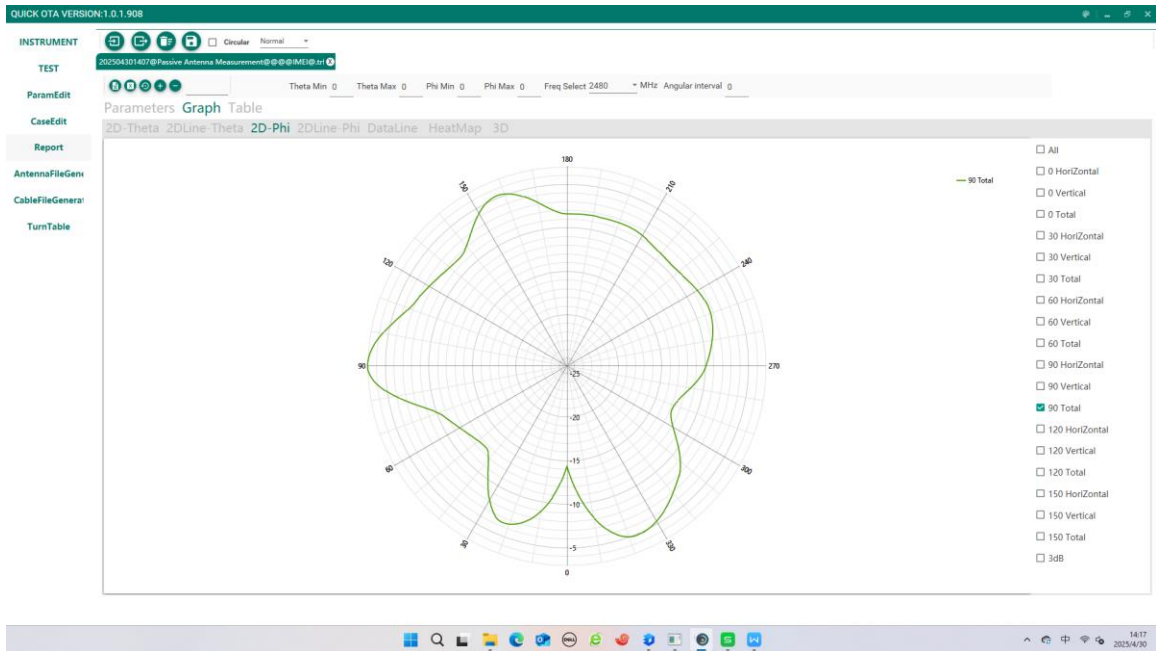

2480MHz 3D-Total Pattern

