



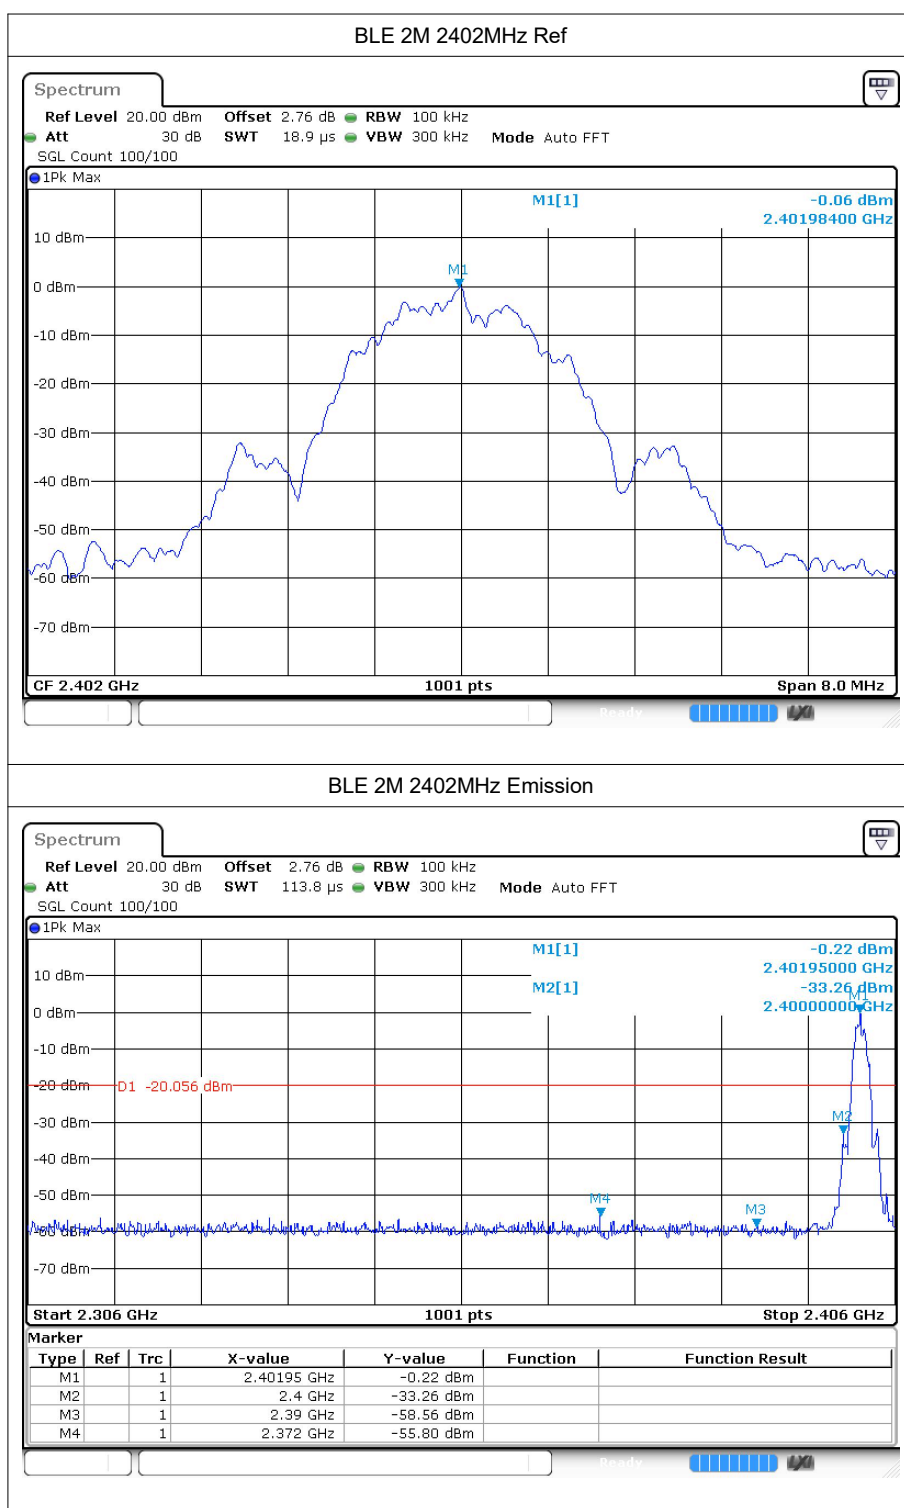

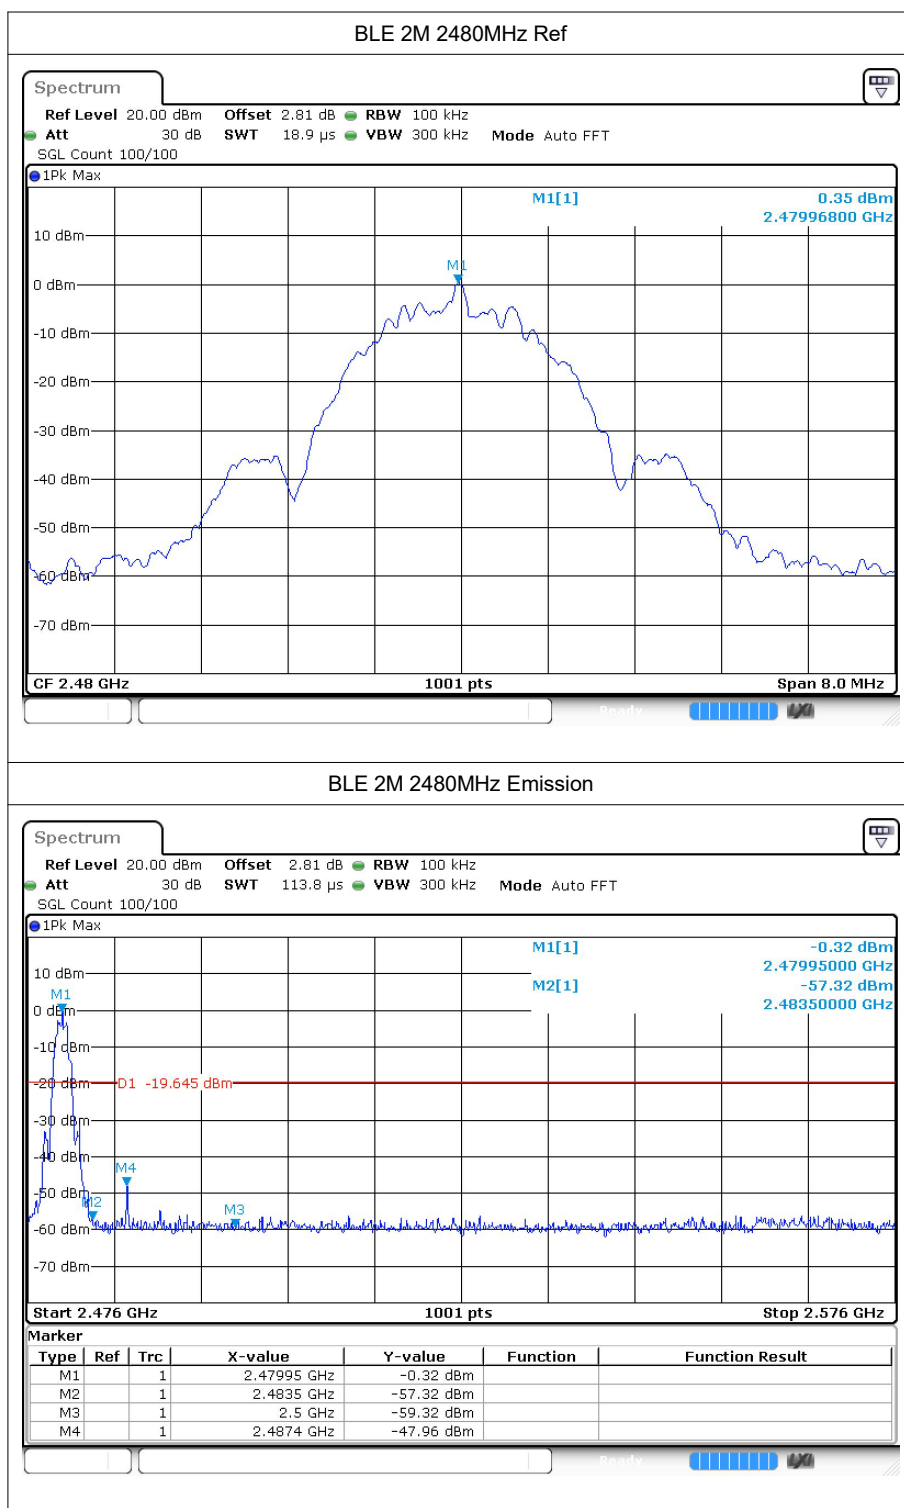



6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-43.71	-20	Pass
BLE 1M	2440	-43.72	-20	Pass
BLE 1M	2480	-42.86	-20	Pass
BLE 2M	2402	-43.65	-20	Pass
BLE 2M	2440	-42.98	-20	Pass
BLE 2M	2480	-43.51	-20	Pass


6.2 Test Graphs

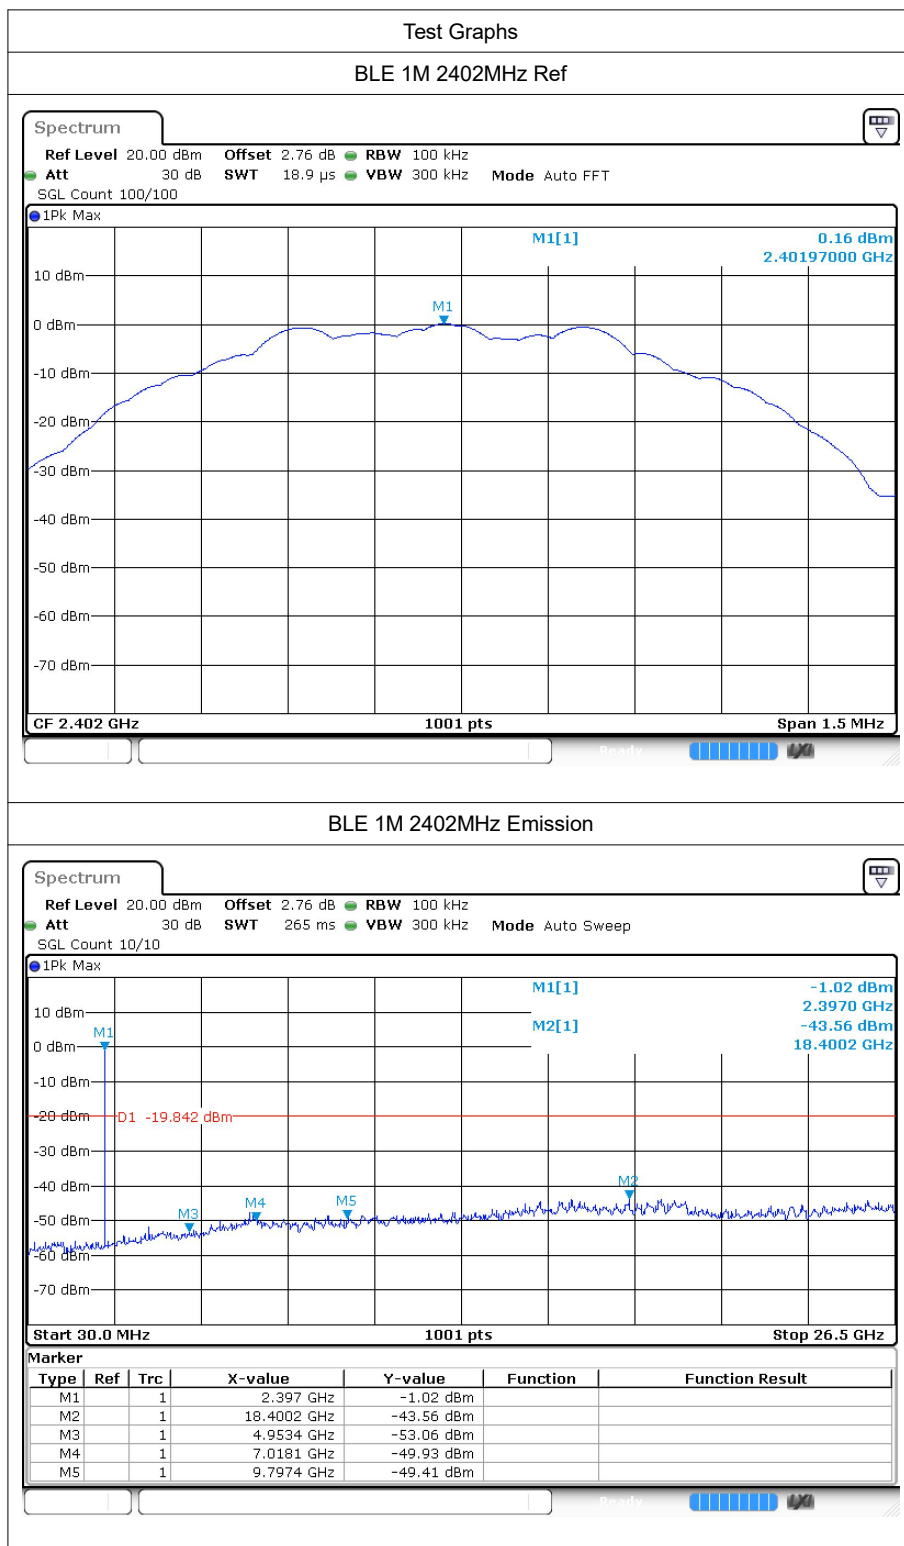


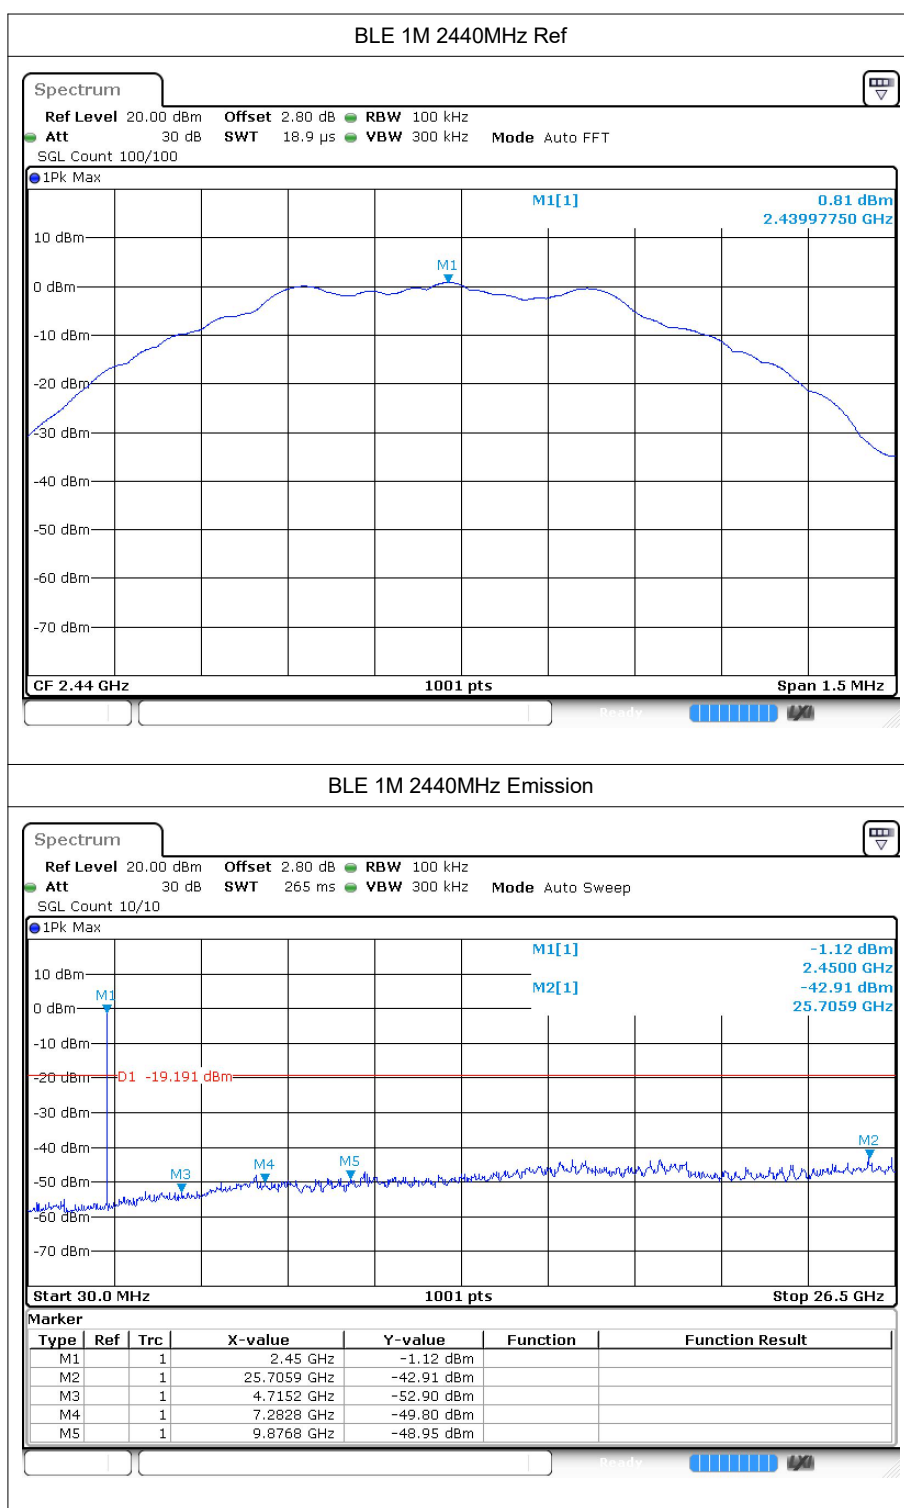

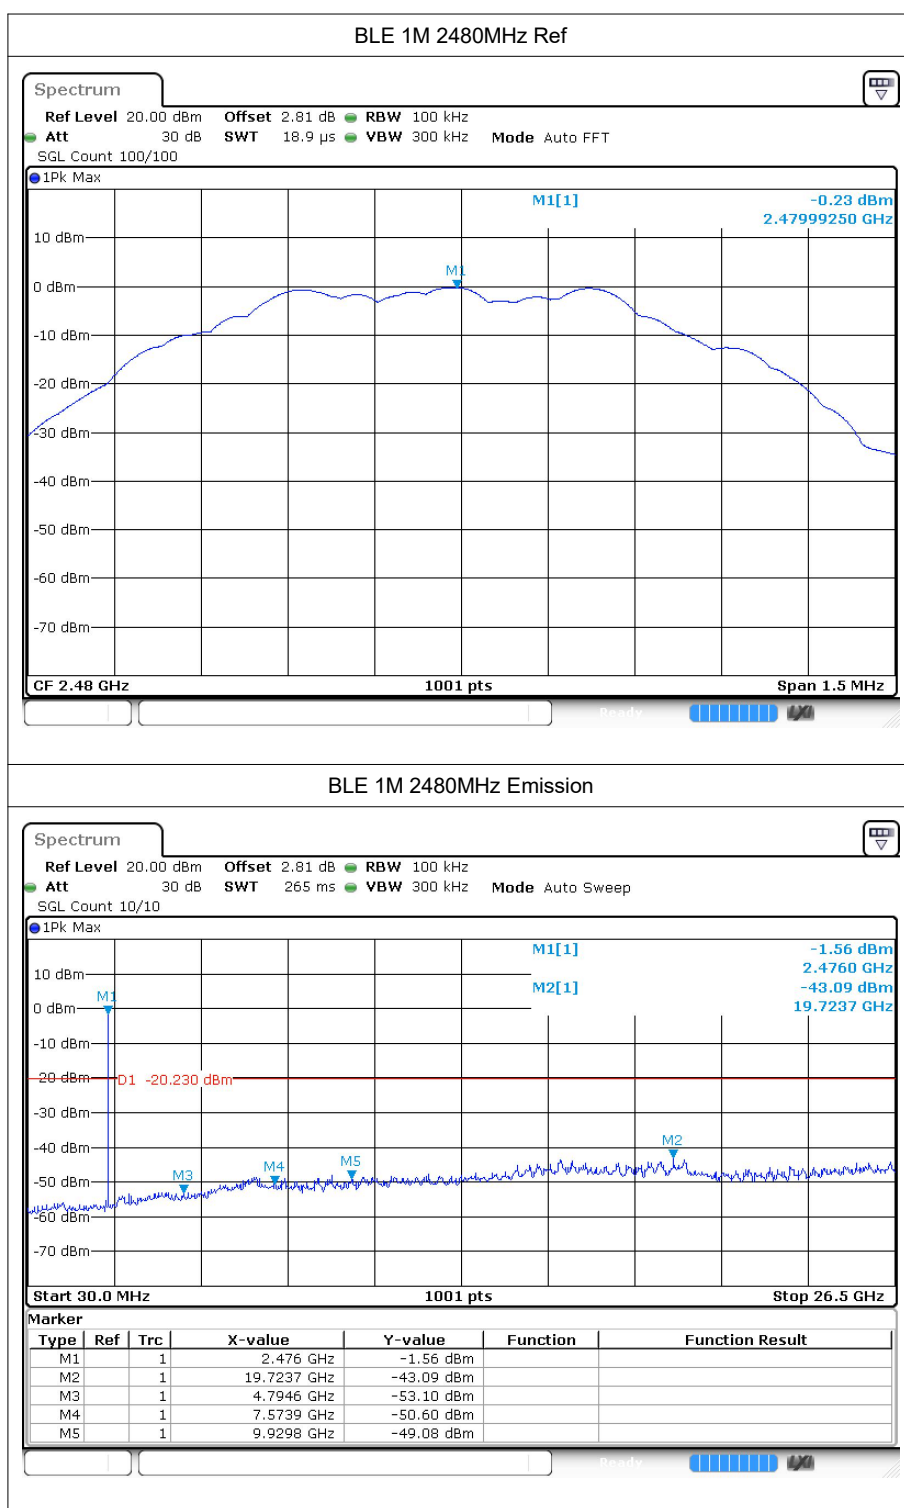

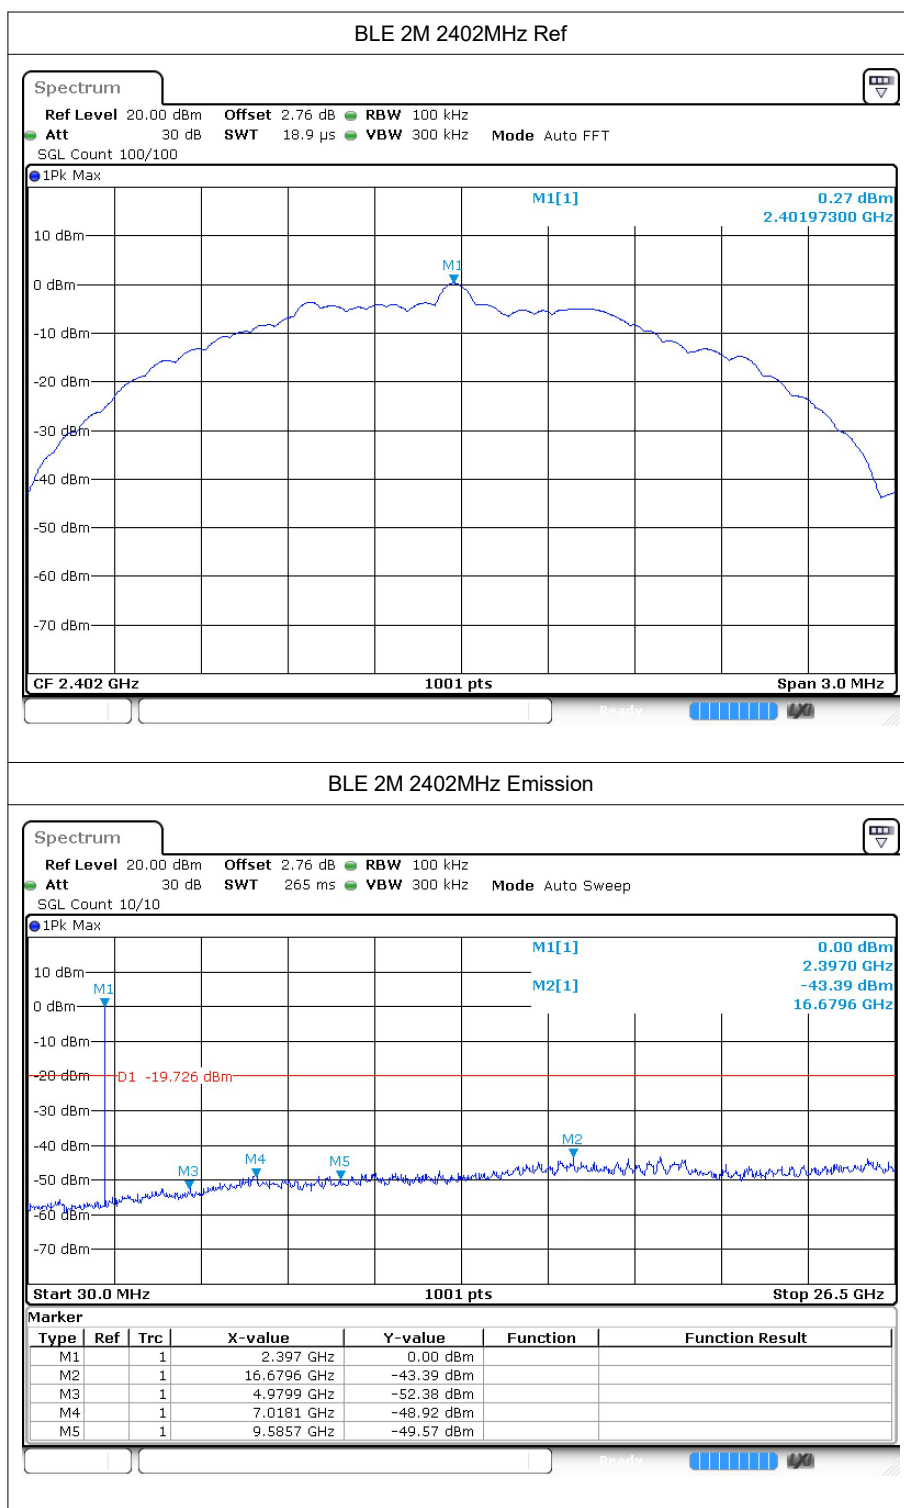

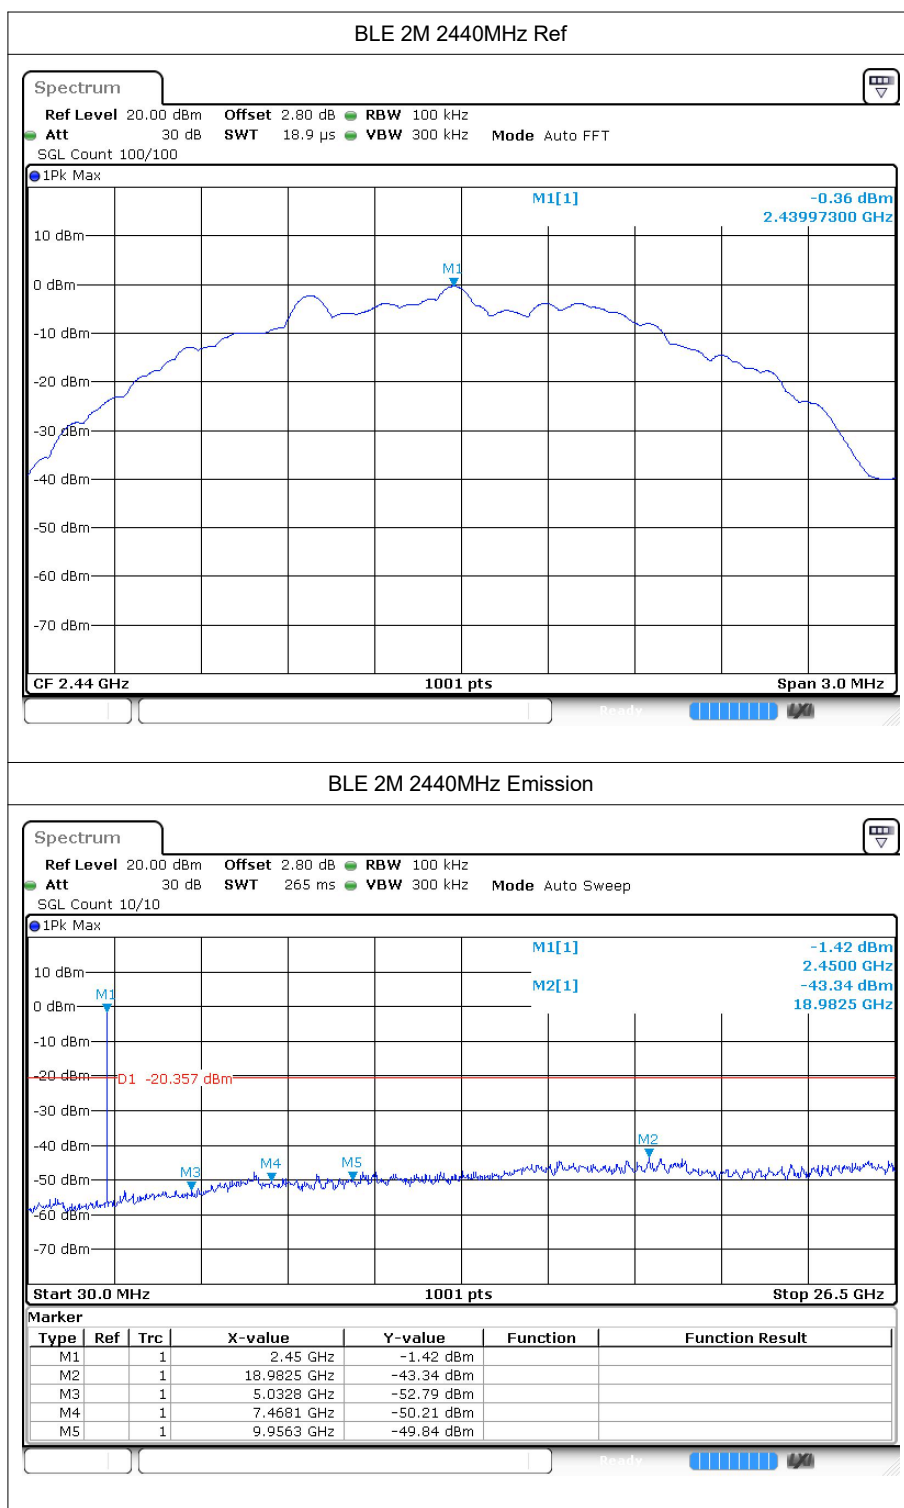

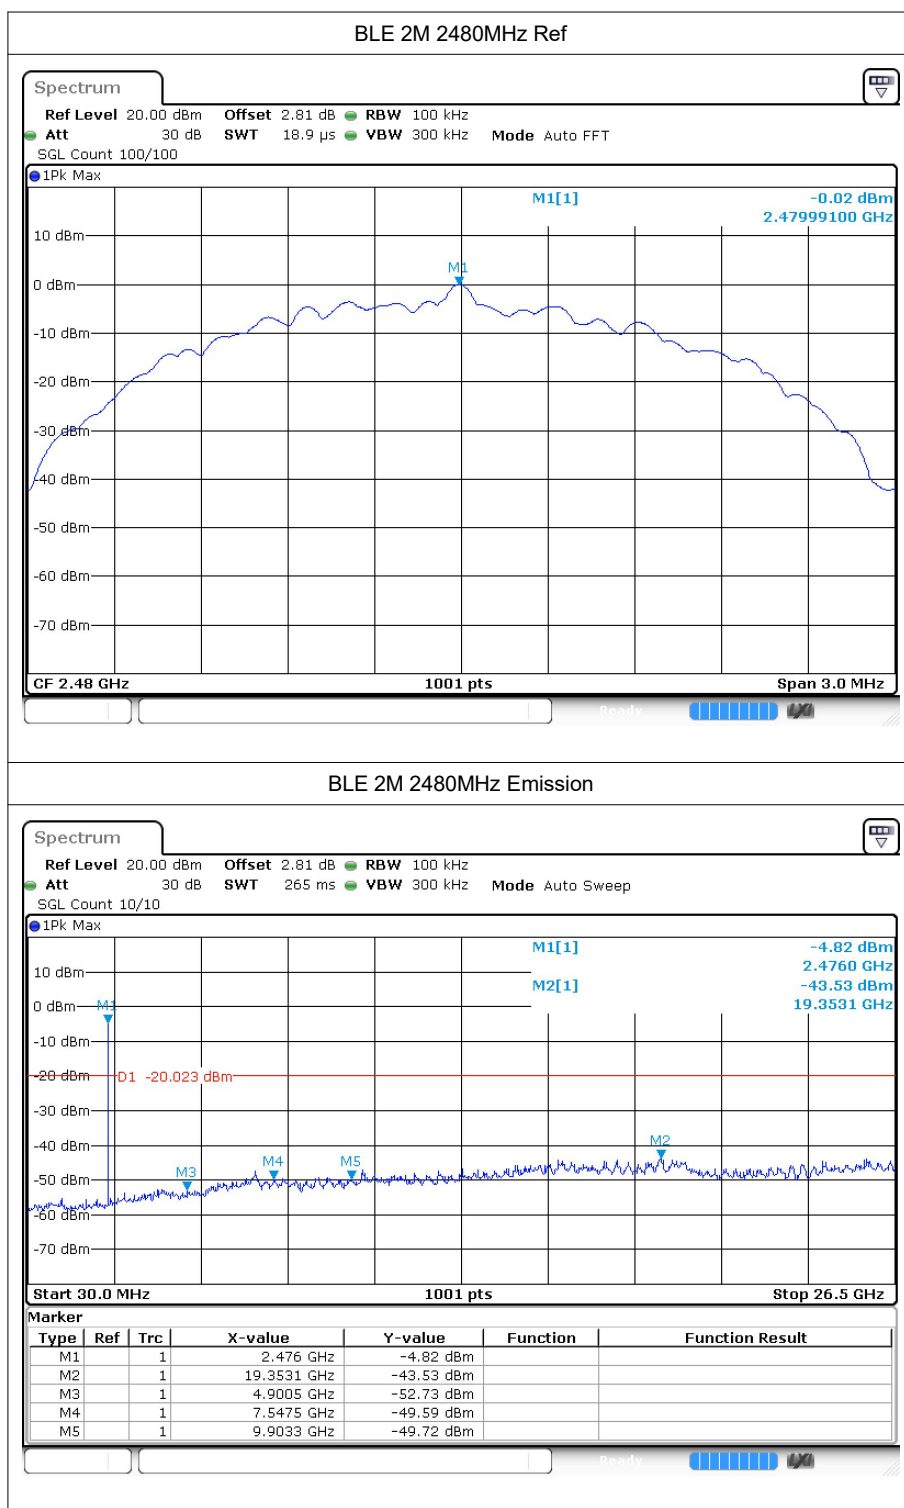





7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-50.15	2	-	47.11	Peak	74	Pass
BLE 1M	2402	2310	-56.31	2	1.94	42.89	Average	54	Pass
BLE 1M	2402	2338.032	-46.68	2	-	50.58	Peak	74	Pass
BLE 1M	2402	2340.144	-54.16	2	1.94	45.04	Average	54	Pass
BLE 1M	2402	2390	-49.57	2	-	47.69	Peak	74	Pass
BLE 1M	2402	2390	-56.56	2	1.94	42.64	Average	54	Pass
BLE 1M	2480	2483.5	-49.37	2	-	47.89	Peak	74	Pass
BLE 1M	2480	2483.5	-55.58	2	1.91	43.59	Average	54	Pass
BLE 1M	2480	2487.352	-45.91	2	-	51.35	Peak	74	Pass
BLE 1M	2480	2486.44	-55.29	2	1.91	43.88	Average	54	Pass
BLE 1M	2480	2500	-49.91	2	-	47.35	Peak	74	Pass
BLE 1M	2480	2500	-57.45	2	1.91	41.72	Average	54	Pass
BLE 2M	2402	2310	-47.34	2	-	49.92	Peak	74	Pass
BLE 2M	2402	2310	-57.43	2	4.53	44.36	Average	54	Pass
BLE 2M	2402	2344.656	-45.85	2	-	51.41	Peak	74	Pass
BLE 2M	2402	2340.048	-54.58	2	4.53	47.21	Average	54	Pass
BLE 2M	2402	2390	-50.47	2	-	46.79	Peak	74	Pass
BLE 2M	2402	2390	-57.15	2	4.53	44.64	Average	54	Pass
BLE 2M	2480	2483.5	-46.51	2	-	50.75	Peak	74	Pass
BLE 2M	2480	2483.5	-55.39	2	4.54	46.41	Average	54	Pass
BLE 2M	2480	2487.496	-46.16	2	-	51.1	Peak	74	Pass
BLE 2M	2480	2487.4	-55.03	2	4.54	46.77	Average	54	Pass
BLE 2M	2480	2500	-47.86	2	-	49.4	Peak	74	Pass
BLE 2M	2480	2500	-56.38	2	4.54	45.42	Average	54	Pass

7.2 Test Graphs

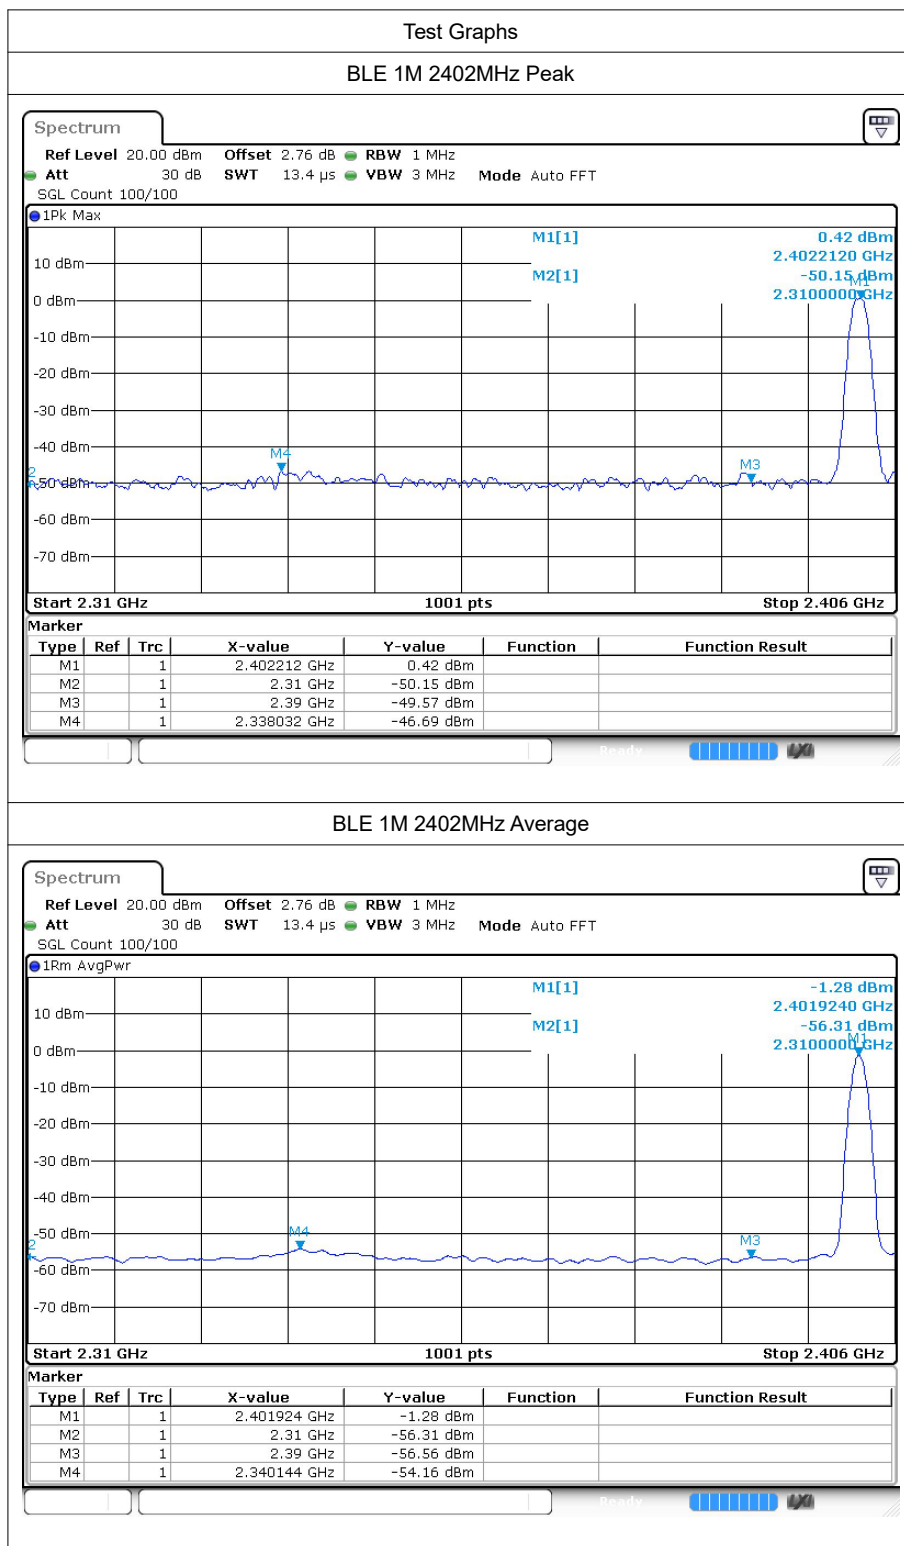

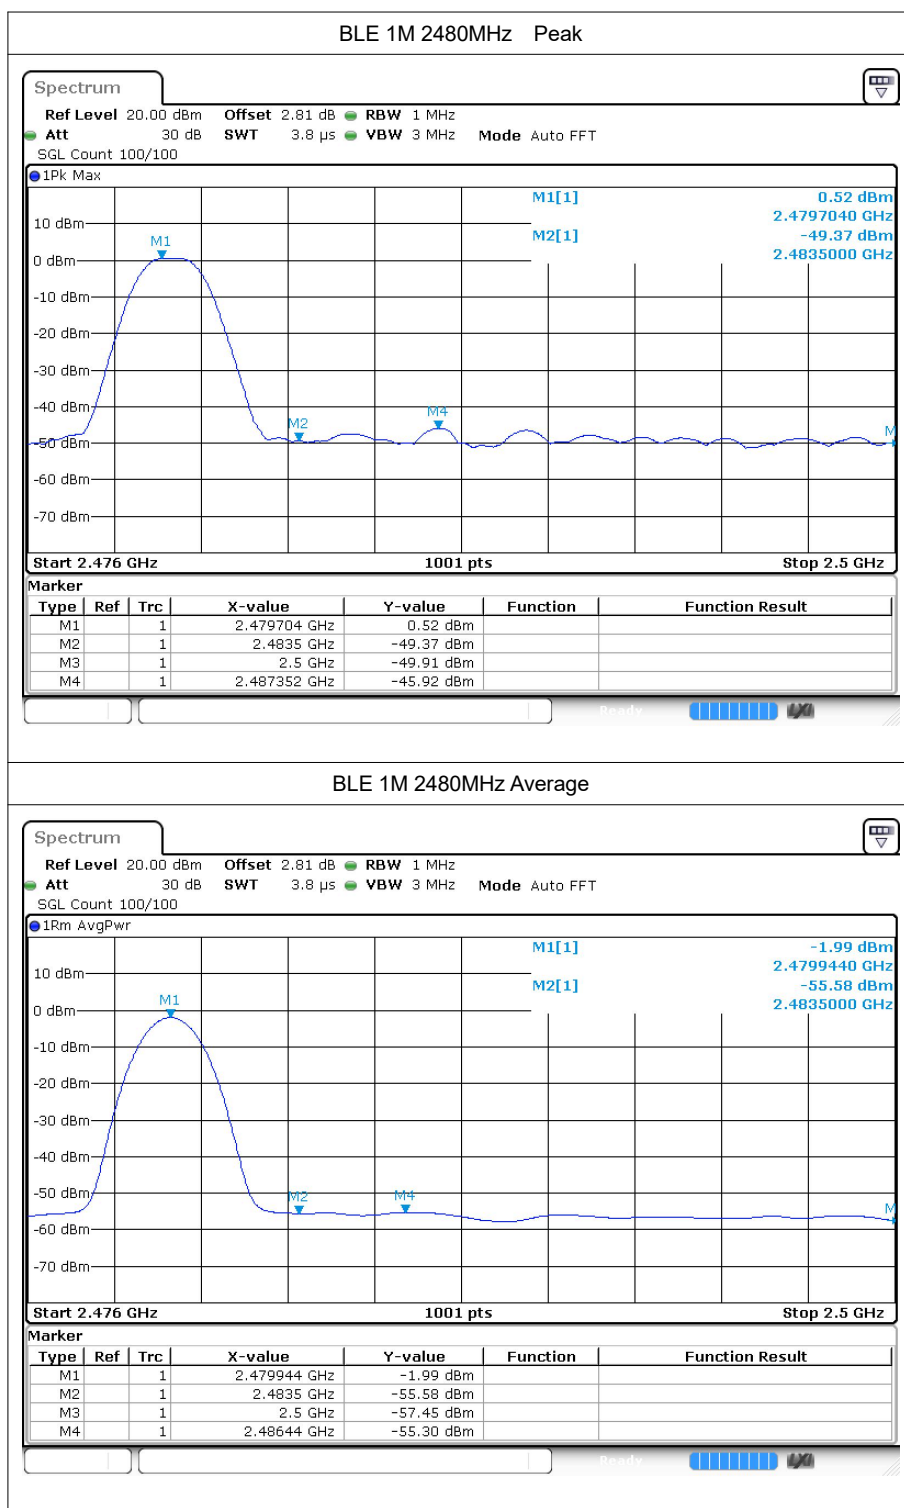

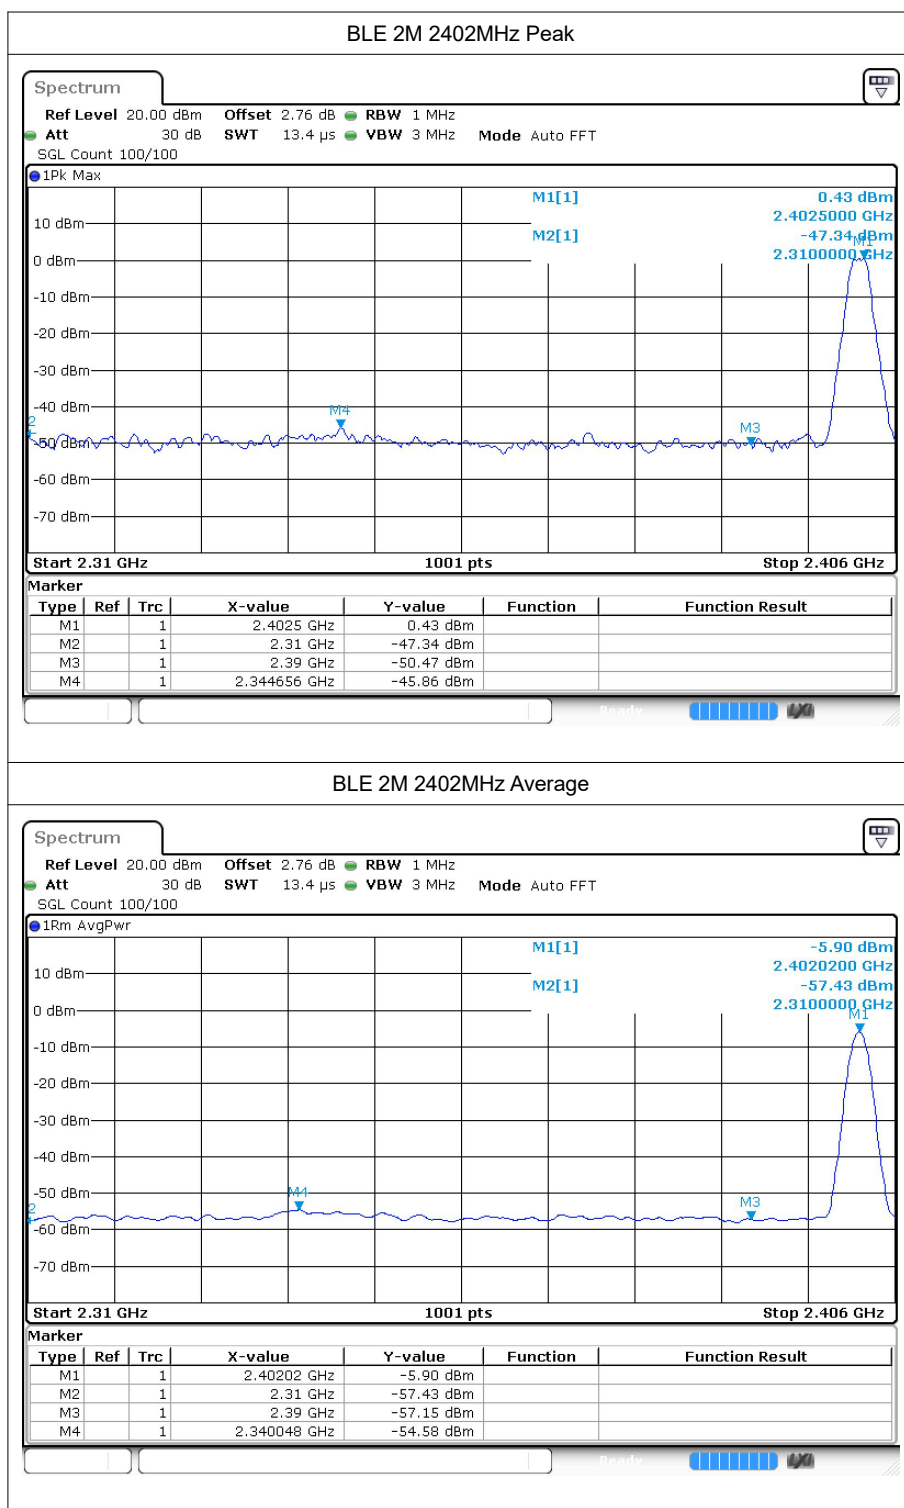

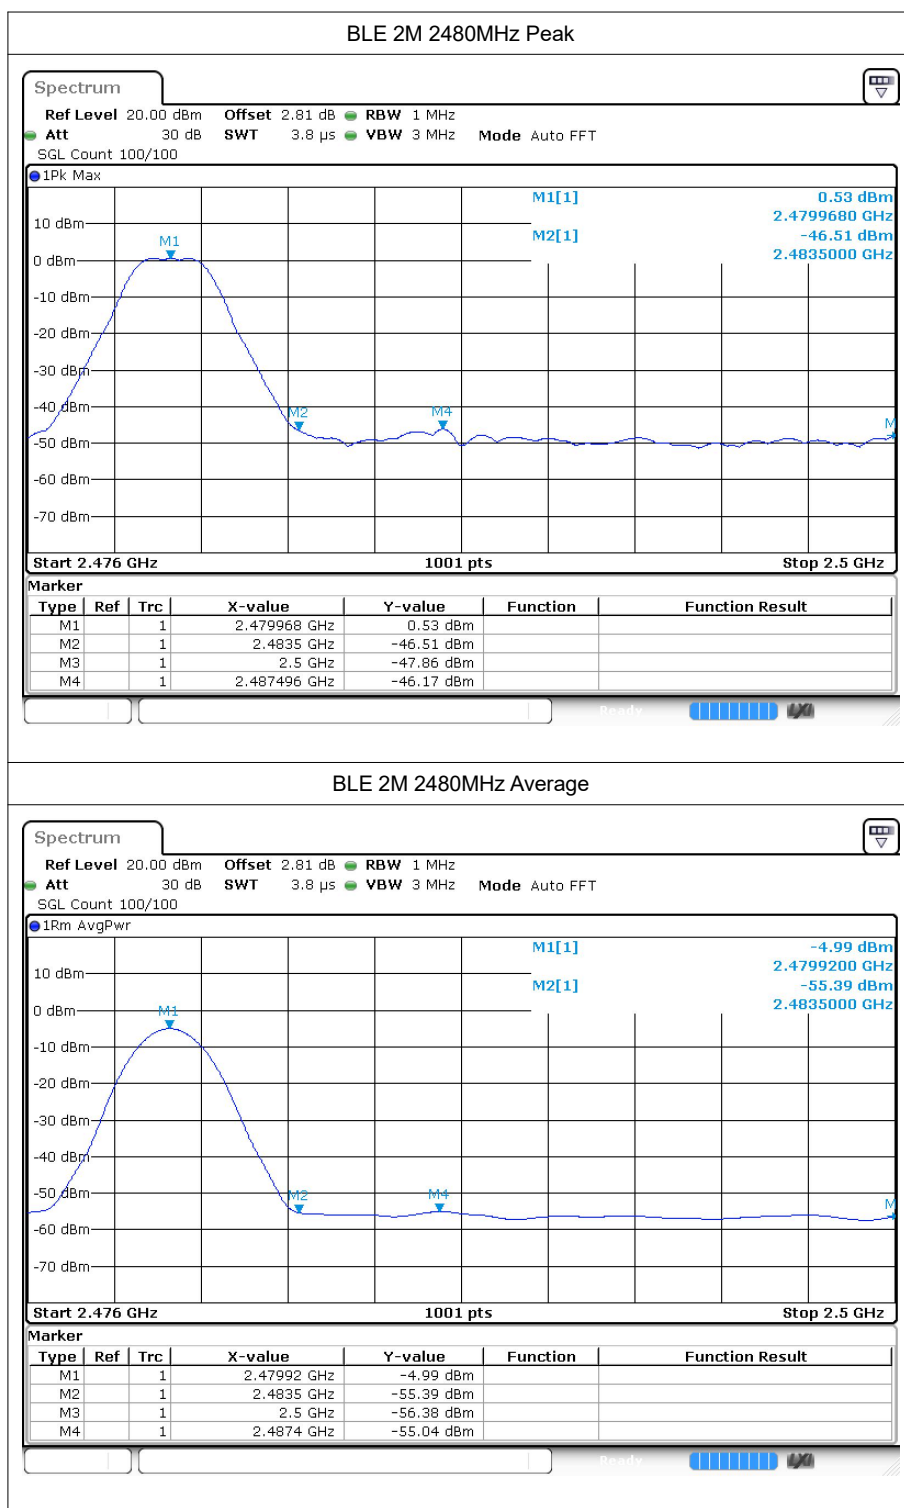

---The End---