



RF TEST REPORT

Product Name: Automatic Drip Coffee Brewer

Model Name: Venus- I

FCC ID: 2BO5E-VENUS

Issued For : Luckin Food Technology (Shanghai) Co LTD
Room 1001, 10th Floor, Building 1, No. 1728-1746, West Nanjing
Road, Jing 'an District, Shanghai

Issued By : Shenzhen LGT Test Service Co., Ltd.
Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT25D152RF01

Sample Received Date: April 22, 2025

Date of Test: April 22, 2025 ~ May 22, 2025

Date of Issue: May 22, 2025

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Luckin Food Technology (Shanghai) Co LTD
Address: Room 1001, 10th Floor, Building 1, No. 1728-1746, West Nanjing Road, Jing 'an District, Shanghai
Manufacturer: Luckin Food Technology (Shanghai) Co LTD
Address: Room 1001, 10th Floor, Building 1, No. 1728-1746, West Nanjing Road, Jing 'an District, Shanghai
Product Name: Automatic Drip Coffee Brewer
Trademark: N/A
Model Name: Venus- I
Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.247, Subpart C ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	10
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3. EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION MEASUREMENT	18
4. CONDUCTED SPURIOUS & BAND EDGE EMISSION	39
4.1 LIMIT	39
4.2 TEST PROCEDURE	39
4.3 DEVIATION FROM STANDARD	39
4.4 TEST SETUP	39
4.5 EUT OPERATION CONDITIONS	39
4.6 TEST RESULTS	39
5. POWER SPECTRAL DENSITY TEST	40
5.1 LIMIT	40
5.2 TEST PROCEDURE	40
5.3 DEVIATION FROM STANDARD	40
5.4 TEST SETUP	40
5.5 EUT OPERATION CONDITIONS	40
5.6 TEST RESULTS	40
6. BANDWIDTH TEST	41
6.1 LIMIT	41
6.2 TEST PROCEDURE	41
6.3 DEVIATION FROM STANDARD	41
6.4 TEST SETUP	41
6.5 EUT OPERATION CONDITIONS	41
6.6 TEST RESULTS	41



7. PEAK OUTPUT POWER TEST	42
7.1 LIMIT	42
7.2 TEST PROCEDURE	42
7.3 DEVIATION FROM STANDARD	42
7.4 TEST SETUP	42
7.5 EUT OPERATION CONDITIONS	42
7.6 TEST RESULTS	42
8. ANTENNA REQUIREMENT	43
8.1 STANDARD REQUIREMENT	43
8.2 EUT ANTENNA	43
APPENDIX I - TEST RESULTS	44
DUTY CYCLE	44
MAXIMUM PEAK CONDUCTED OUTPUT POWER	48
-6DB BANDWIDTH	49
OCCUPIED CHANNEL BANDWIDTH	53
MAXIMUM POWER SPECTRAL DENSITY LEVEL	57
BAND EDGE	61
CONDUCTED RF SPURIOUS EMISSION	66
APPENDIX II - MEASUREMENT PHOTOS	73



Revision History

Rev.	Issue Date	Revisions
00	May 22, 2025	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	$\pm 0.46\%$
2	RF Output Power, Conducted	$\pm 0.71\text{dB}$
3	Power Spectral Density, Conducted	$\pm 1.57\text{ dB}$
4	Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
5	Conducted emission	$\pm 2.80\text{dB}$
6	All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
7	All Emissions, Radiated (30MHz-1GHz)	$\pm 4.61\text{dB}$
8	All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$
9	Temperature	$\pm 0.5^{\circ}\text{C}$
10	Humidity	$\pm 2\%$
11	Duty Cycle	$\pm 2.3\%$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	Automatic Drip Coffee Brewer	
Trademark:	N/A	
Model Name:	Venus- I	
Series Model:	N/A	
Model Difference:	N/A	
Product Description:	Operation Frequency:	802.11b/g/n(20MHz): 2412~2462MHz
	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM
	Number of Channel:	802.11b/g/n: 11CH
	Antenna Designation:	PCB
	Antenna Gain(dBi):	3.5
Channel List:	Please refer to the Note 3.	
Rated Input:	Input: AC 208V/60Hz 32A	
Hardware Version:	PCB1-XA080XHW01W_XB-A01	
Software Version:	rk3568_r v0.31 8inch hd big xb multieth coexist Chrome AppManager 251xcan qsb double ntp EC200A 2511	
Connecting I/O Port(s):	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.



3.

Operation Frequency of channel	
802.11b/g/n(20MHz)	
Channel	Frequency
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n (HT20)	
Channel	Freq.(MHz)
01	2412
06	2437
11	2462



2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20 CH1	MCS 0
Mode 8	TX IEEE 802.11n HT20 CH6	MCS 0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS 0

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 10: Keeping TX + WLAN Link

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: 2.4G WIFI	
CMD Command	Mode Or Modulation type	Power setting
	b	8
	g	5
	n20	5



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
DC Power supply	Keysight	E3634A	MY58036468	N/A
Laptop	Lenovo	T470s	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
LISN	COM-POWER	LI-115	02032	2025.03.05	2026.03.04
LISN	SCHWARZBECK	NNLK 8122	00160	2025.03.05	2026.03.04
Transient Limiter	CYBERTEK	EM5010A	E225010004 9	2025.03.05	2026.03.04
Coaxial cables (9kHz-30MHz)	Juncoax	JMR600-N MNM-2M	N.A	2025.03.06	2026.03.05
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
Active loop Antenna	ETS	6502	00049544	2025.03.11	2028.03.10
Spectrum Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Trilog Broadband Antenna (30M-1G)	SCHWARZBECK	VULB 9168	2705	2024.05.17	2027.05.16
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2025.03.10	2028.03.09
Horn Antenna(18-40G)	SCHWARZBECK	BBHA 9170	685	2023.10.23	2026.10.22
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2025.03.06	2026.03.05
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2025.03.06	2026.03.05
Pre-amplifier(18-40G)	SCHWARZBECK	BBV 9721	9721-019	2024.10.21	2025.10.20
Coaxial cables (9kHz-1GHz)	Juncoax	JMR600-N MNM-8M	N.A	2025.03.06	2026.03.05
Coaxial cables (1GHz-18GHz)	TaiHe	UCD460B- NMSM-1M 9	N.A	2025.03.06	2026.03.05
Coaxial cables (18GHz-40GHz)	Junkosha Inc.	MWX241-0 5000KMSK MS	N.A	2025.03.08	2026.03.07
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.08.05	2025.08.04
Antenna Tower	SAEMC	BK-4AT-BS -D	SK20210930 08	N.A	N.A
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Testing Software	EMC-I_V1.4.0.3_SKET				

RF Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Signal Analyzer	Keysight	N9020A	MY50530994	2025.03.05	2026.03.04
Signal Analyzer	R&S	FSV40-N	102245	2025.02.17	2026.02.16
Power Sensor	R&S	NRP8S	149.0006K02 -104963-Ae	2025.03.06	2026.03.05
RF Automatic Test system	MW	MW100 -RFCB	MW220324L G-33	2025.03.06	2026.03.05
MXG Vector Signal	Keysight	N5182B	MY59100717	2025.03.05	2026.03.04



Generator					
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.08.05	2025.08.04
Attenuator	eastsheep	90db	N.A	2025.03.06	2026.03.05
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Digital multimeter	MASTECH	MS8261	MBGBC8305 3	2025.03.05	2026.03.04
DC source	Jiuyuan	QJ6010E	N.A	2025.03.09	2026.03.08
Testing Software	MTS8310_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

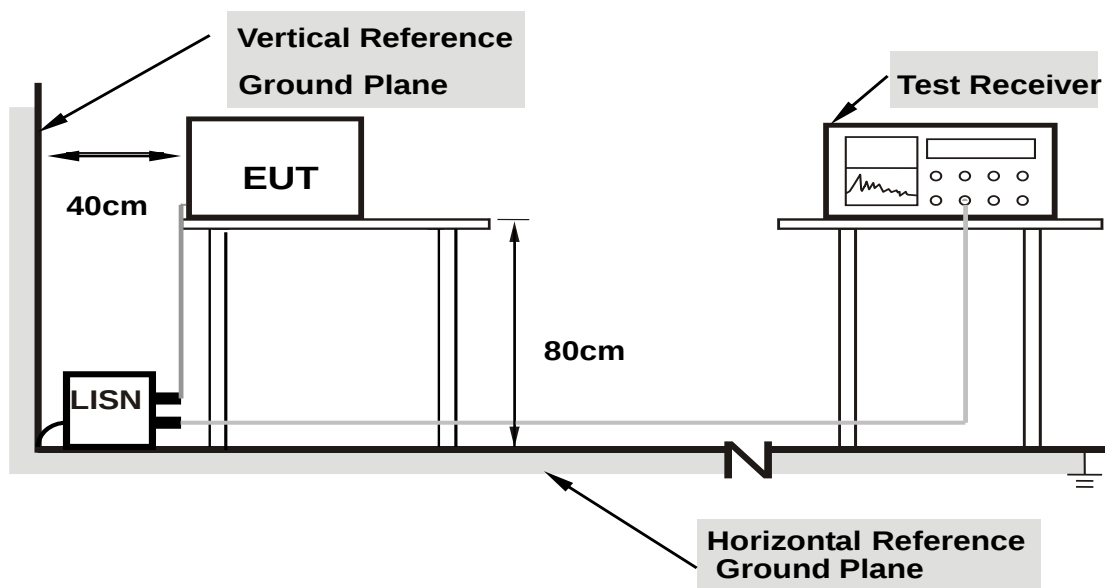

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULT


Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24.2°C
M/N: Venus- I	Humidity: 51%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-19
Test Mode: TX 802.11b 2412	
Note:	

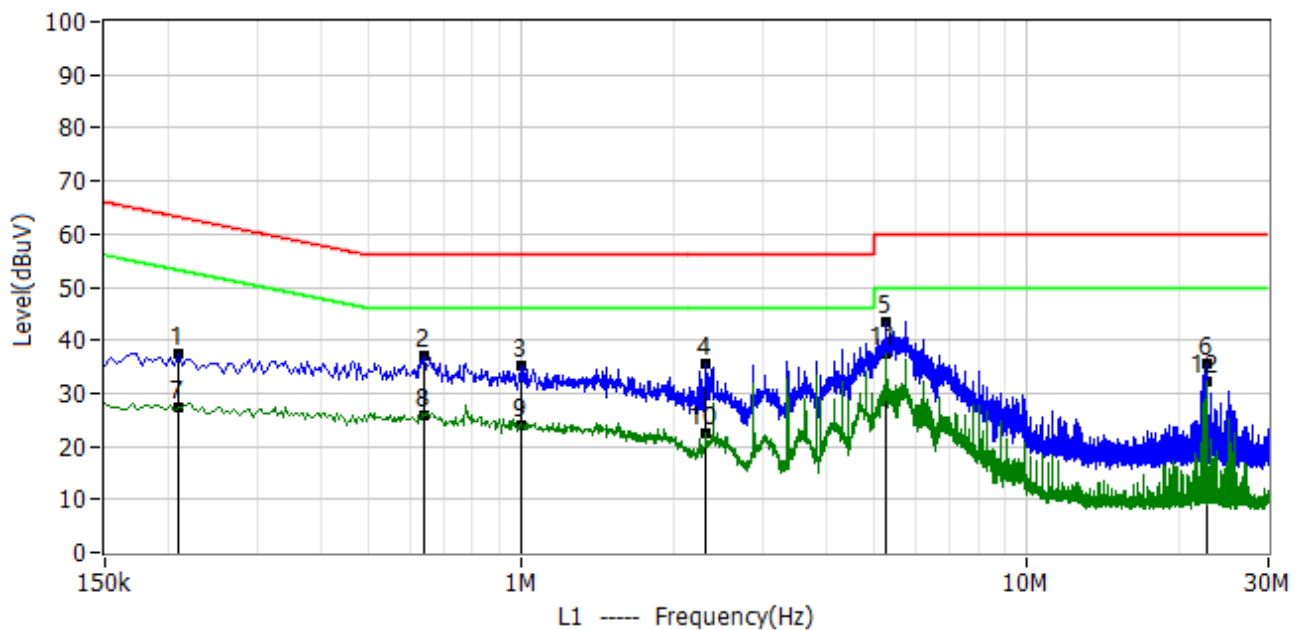

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.210	26.74	10.69	37.43	63.21	-25.78	QP	L1
2*	0.642	26.12	10.84	36.96	56.00	-19.04	QP	L1
3*	0.998	24.34	10.90	35.24	56.00	-20.76	QP	L1
4*	2.318	24.49	11.03	35.52	56.00	-20.48	QP	L1
5*	5.274	32.21	11.19	43.40	60.00	-16.60	QP	L1
6*	22.762	23.89	11.82	35.71	60.00	-24.29	QP	L1
7*	0.210	16.81	10.69	27.50	53.20	-25.70	AV	L1
8*	0.642	14.86	10.84	25.70	46.00	-20.30	AV	L1
9*	0.998	13.10	10.90	24.00	46.00	-22.00	AV	L1
10*	2.318	11.27	11.03	22.30	46.00	-23.70	AV	L1
11*	5.274	26.41	11.19	37.60	50.00	-12.40	AV	L1
12*	22.762	20.48	11.82	32.30	50.00	-17.70	AV	L1



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24.2°C
M/N: Venus- I	Humidity: 51%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-19
Test Mode: TX 802.11b 2412	
Note:	

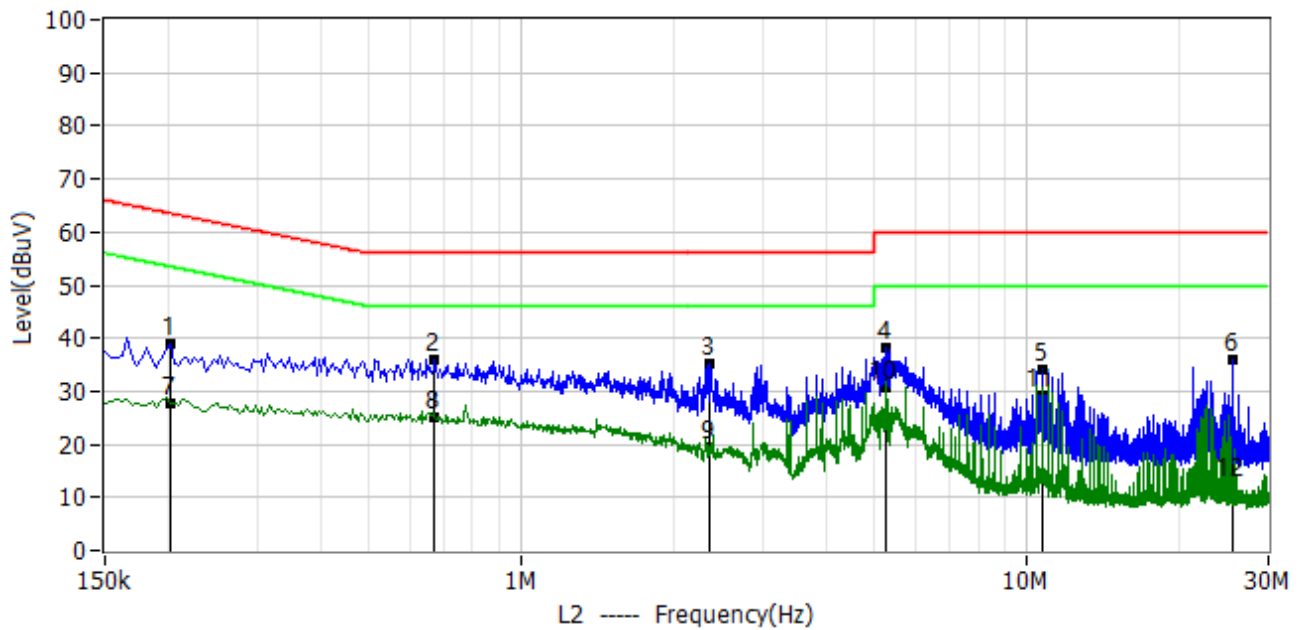

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.202	28.30	10.68	38.98	63.53	-24.55	QP	L2
2*	0.674	25.16	10.81	35.97	56.00	-20.03	QP	L2
3*	2.350	24.11	10.98	35.09	56.00	-20.91	QP	L2
4*	5.278	26.88	11.26	38.14	60.00	-21.86	QP	L2
5*	10.730	22.71	11.48	34.19	60.00	-25.81	QP	L2
6*	25.462	24.08	11.76	35.84	60.00	-24.16	QP	L2
7*	0.202	17.12	10.68	27.80	53.50	-25.70	AV	L2
8*	0.674	14.29	10.81	25.10	46.00	-20.90	AV	L2
9*	2.350	8.52	10.98	19.50	46.00	-26.50	AV	L2
10*	5.278	19.44	11.26	30.70	50.00	-19.30	AV	L2
11*	10.730	17.62	11.48	29.10	50.00	-20.90	AV	L2
12*	25.462	0.44	11.76	12.20	50.00	-37.80	AV	L2



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2310 to 2430 MHz Upper Band Edge: 2445 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

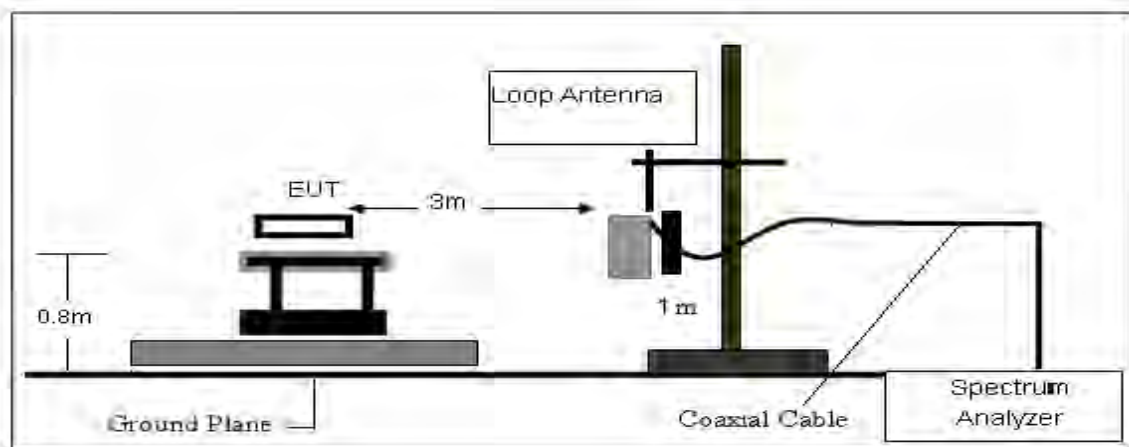

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

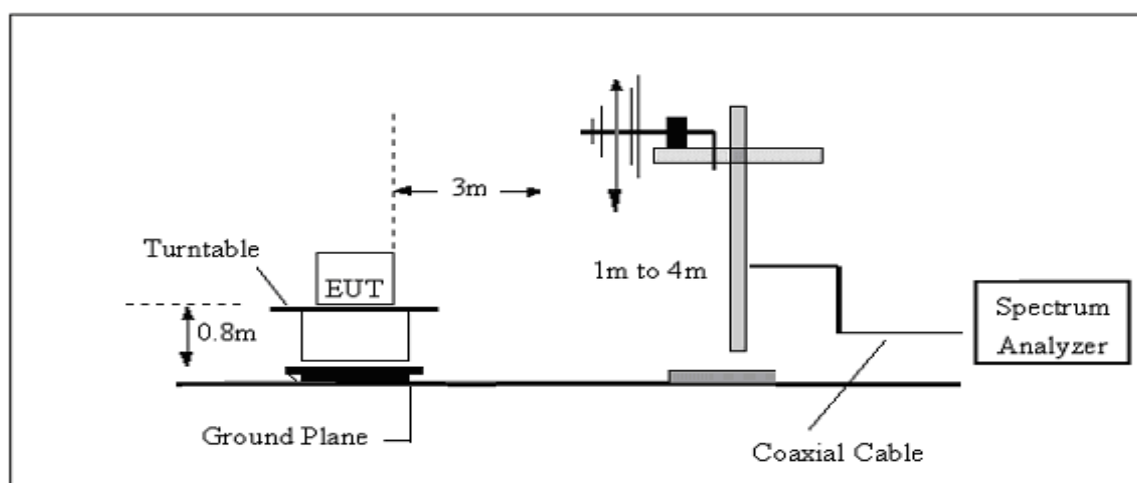

(C) Radiated Emission Test-Up Frequency Above 1GHz

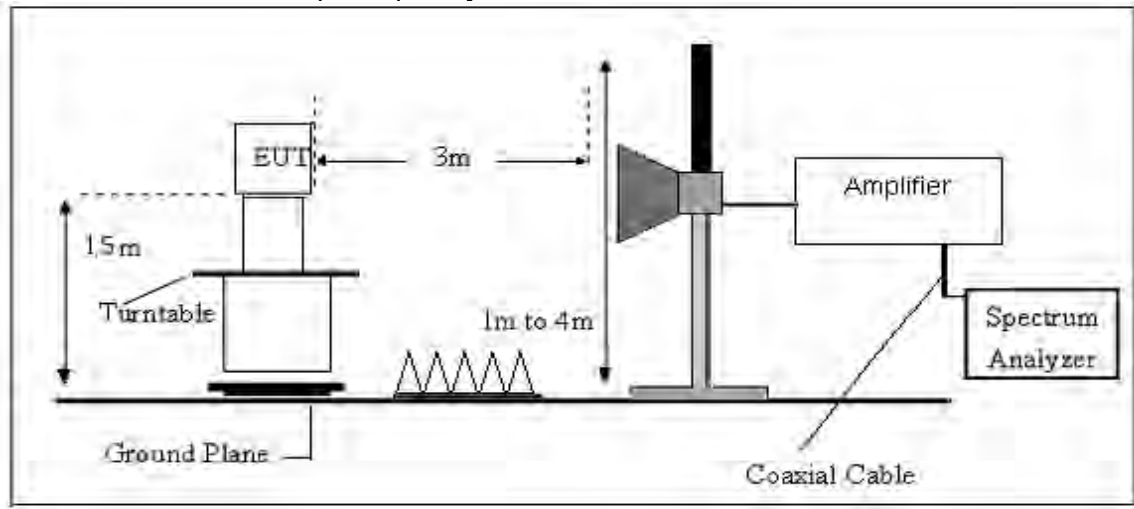

3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



3.2.6 TEST RESULT

Results of Radiated Emissions (9 KHz~30MHz)

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Remark
1*	-	-	-	-	-	-	-	See Note

Note:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.




Results of Radiated Emissions (30MHz~1000MHz)

Note:1. All mode has been tested, only shown the worst case data.

Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 55.5%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-20
Test Mode: TX 802.11b 2412	
Note:	

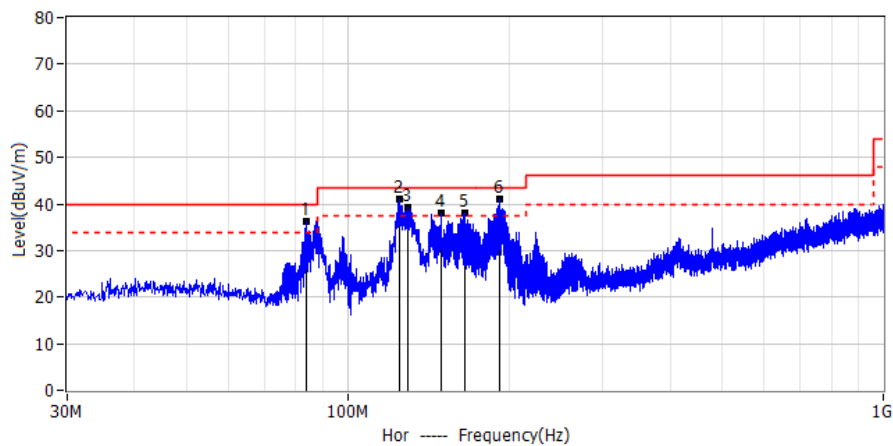

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	83.835	19.31	16.81	36.12	40.00	-3.88	QP	Hor
2*	124.939	20.53	20.40	40.93	43.50	-2.57	QP	Hor
3*	129.304	18.70	20.58	39.28	43.50	-4.22	QP	Hor
4*	149.431	16.14	21.90	38.04	43.50	-5.46	QP	Hor
5*	165.194	16.64	21.40	38.04	43.50	-5.46	QP	Hor
6*	192.354	22.53	18.61	41.14	43.50	-2.36	QP	Hor

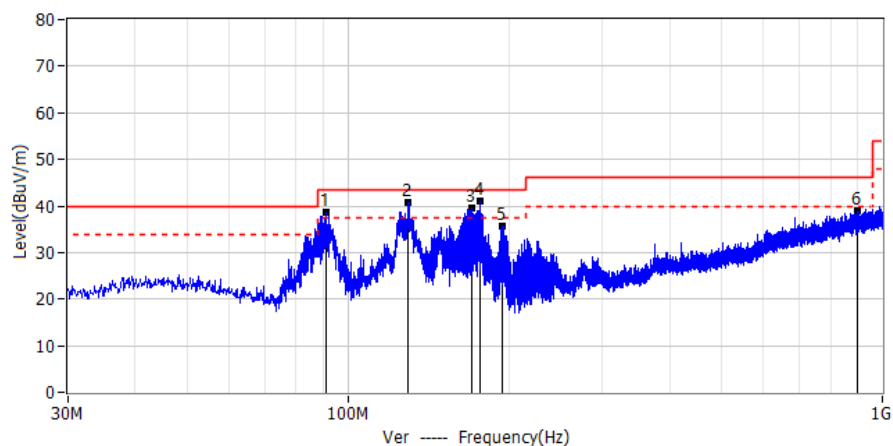


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	90.989	22.06	16.60	38.66	43.50	-4.84	QP	Ver
2*	129.910	19.90	20.82	40.72	43.50	-2.78	QP	Ver
3*	170.650	18.51	20.97	39.48	43.50	-4.02	QP	Ver
4*	176.591	20.98	19.95	40.93	43.50	-2.57	QP	Ver
5*	194.294	17.03	18.73	35.76	43.50	-7.74	QP	Ver
6*	897.301	4.76	34.30	39.06	46.00	-6.94	QP	Ver




Results of Radiated Emissions (Above 1000MHz)

Note:1. All mode has been tested, only shown the worst case data.

Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11b 2412	
Note:	

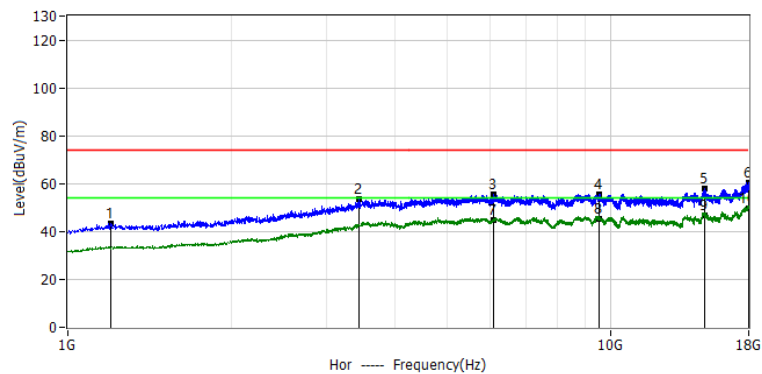


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1197.6000	63.82	-20.25	43.57	74.00	-30.43	PK	Hor
2*	3439.5000	56.86	-3.45	53.41	74.00	-20.59	PK	Hor
3*	6100.0000	59.03	-3.37	55.66	74.00	-18.34	PK	Hor
4*	9540.4000	59.05	-3.40	55.65	74.00	-18.35	PK	Hor
5*	14927.2000	58.01	-0.30	57.71	74.00	-16.29	PK	Hor
6*	17980.9000	56.16	4.14	60.30	74.00	-13.70	PK	Hor
7*	6100.0000	48.27	-3.37	44.90	54.00	-9.10	AV	Hor
8*	9540.4000	48.80	-3.40	45.40	54.00	-8.60	AV	Hor
9*	14927.2000	46.90	-0.30	46.60	54.00	-7.40	AV	Hor
10*	17980.9000	45.66	4.14	49.80	54.00	-4.20	AV	Hor

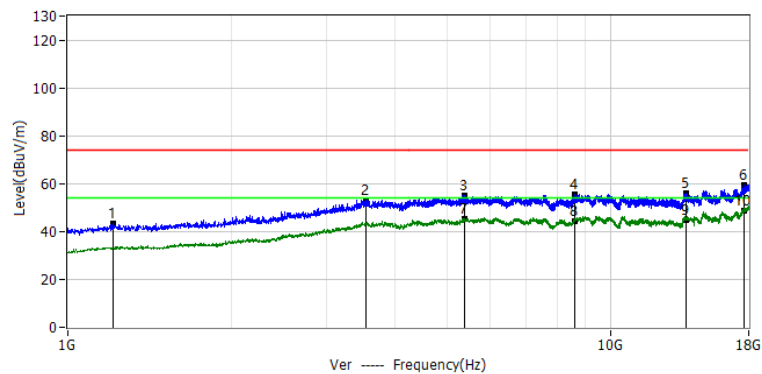


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1210.4000	63.59	-20.21	43.38	74.00	-30.62	PK	Ver
2*	3545.7000	56.08	-2.78	53.30	74.00	-20.70	PK	Ver
3*	5379.6000	58.26	-3.21	55.05	74.00	-18.95	PK	Ver
4*	8579.9000	59.91	-4.45	55.46	74.00	-18.54	PK	Ver
5*	13830.7000	57.66	-1.57	56.09	74.00	-17.91	PK	Ver
6*	17628.1000	56.82	2.63	59.45	74.00	-14.55	PK	Ver
7*	5379.6000	48.61	-3.21	45.40	54.00	-8.60	AV	Ver
8*	8579.9000	48.95	-4.45	44.50	54.00	-9.50	AV	Ver
9*	13830.7000	46.57	-1.57	45.00	54.00	-9.00	AV	Ver
10*	17628.1000	46.17	2.63	48.80	54.00	-5.20	AV	Ver



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11b 2437	
Note:	

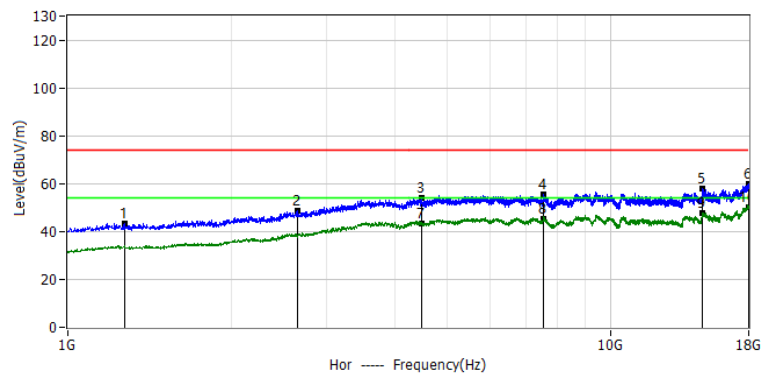


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1269.9000	63.53	-20.08	43.45	74.00	-30.55	PK	Hor
2*	2657.5000	57.20	-8.50	48.70	74.00	-25.30	PK	Hor
3*	4491.4000	56.80	-2.52	54.28	74.00	-19.72	PK	Hor
4*	7523.7000	59.97	-4.61	55.36	74.00	-18.64	PK	Hor
5*	14795.5000	58.10	-0.24	57.86	74.00	-16.14	PK	Hor
6*	17993.6000	55.47	4.24	59.71	74.00	-14.29	PK	Hor
7*	4491.4000	46.02	-2.52	43.50	54.00	-10.50	AV	Hor
8*	7523.7000	50.01	-4.61	45.40	54.00	-8.60	AV	Hor
9*	14795.5000	47.74	-0.24	47.50	54.00	-6.50	AV	Hor
10*	17993.6000	46.06	4.24	50.30	54.00	-3.70	AV	Hor

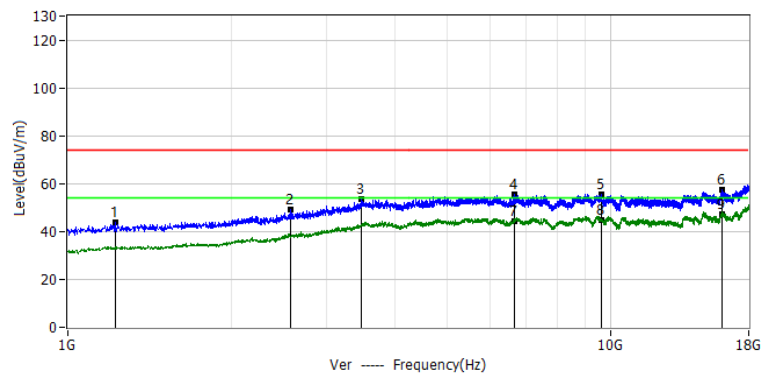


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1223.1000	63.77	-20.18	43.59	74.00	-30.41	PK	Ver
2*	2576.7000	58.01	-8.91	49.10	74.00	-24.90	PK	Ver
3*	3479.9000	56.54	-3.16	53.38	74.00	-20.62	PK	Ver
4*	6661.0000	59.47	-4.02	55.45	74.00	-18.55	PK	Ver
5*	9629.6000	58.77	-3.16	55.61	74.00	-18.39	PK	Ver
6*	16066.2000	56.55	0.82	57.37	74.00	-16.63	PK	Ver
7*	6661.0000	48.42	-4.02	44.40	54.00	-9.60	AV	Ver
8*	9629.6000	48.16	-3.16	45.00	54.00	-9.00	AV	Ver
9*	16066.2000	46.38	0.82	47.20	54.00	-6.80	AV	Ver



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11b 2472	
Note:	

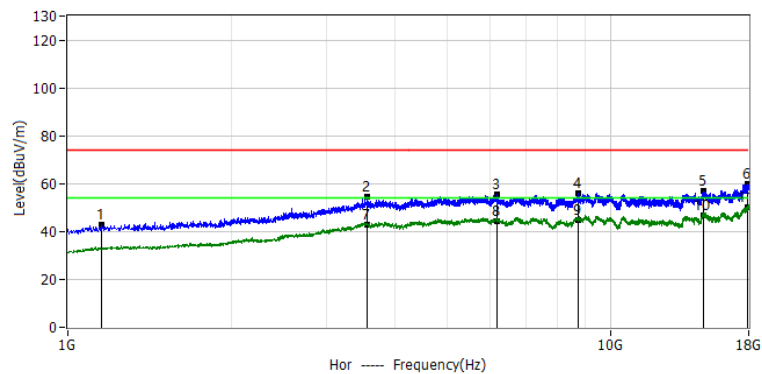


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1153.0000	63.30	-20.62	42.68	74.00	-31.32	PK	Hor
2*	3556.4000	57.15	-2.78	54.37	74.00	-19.63	PK	Hor
3*	6172.2000	59.40	-3.79	55.61	74.00	-18.39	PK	Hor
4*	8709.5000	59.89	-4.02	55.87	74.00	-18.13	PK	Hor
5*	14886.9000	57.07	-0.20	56.87	74.00	-17.13	PK	Hor
6*	17949.0000	56.24	3.89	60.13	74.00	-13.87	PK	Hor
7*	3556.4000	45.68	-2.78	42.90	54.00	-11.10	AV	Hor
8*	6172.2000	48.29	-3.79	44.50	54.00	-9.50	AV	Hor
9*	8709.5000	48.92	-4.02	44.90	54.00	-9.10	AV	Hor
10*	14886.9000	47.10	-0.20	46.90	54.00	-7.10	AV	Hor
11*	17949.0000	46.11	3.89	50.00	54.00	-4.00	AV	Hor

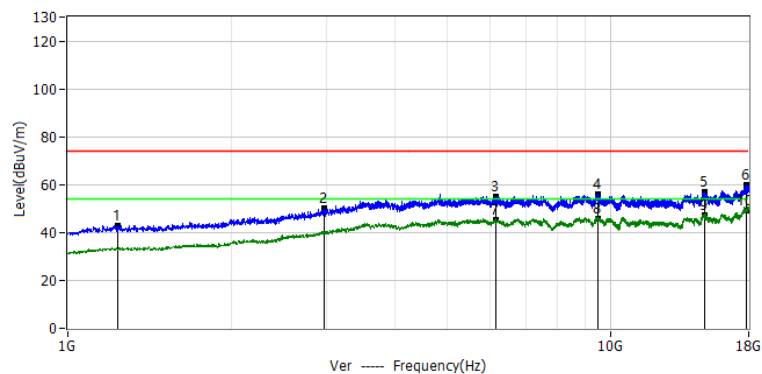


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1238.0000	63.10	-20.15	42.95	74.00	-31.05	PK	Ver
2*	2963.5000	56.52	-6.50	50.02	74.00	-23.98	PK	Ver
3*	6148.9000	58.60	-3.65	54.95	74.00	-19.05	PK	Ver
4*	9470.2000	59.46	-3.28	56.18	74.00	-17.82	PK	Ver
5*	14912.4000	57.39	-0.25	57.14	74.00	-16.86	PK	Ver
6*	17864.0000	56.37	3.29	59.66	74.00	-14.34	PK	Ver
7*	6148.9000	48.95	-3.65	45.30	54.00	-8.70	AV	Ver
8*	9470.2000	48.98	-3.28	45.70	54.00	-8.30	AV	Ver
9*	14912.4000	47.25	-0.25	47.00	54.00	-7.00	AV	Ver
10*	17864.0000	46.11	3.29	49.40	54.00	-4.60	AV	Ver



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11g 2412	
Note:	

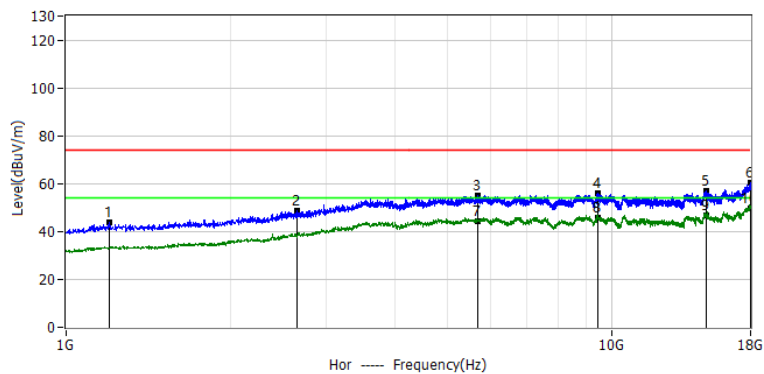


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1197.6000	63.86	-20.25	43.61	74.00	-30.39	PK	Hor
2*	2644.7000	57.34	-8.62	48.72	74.00	-25.28	PK	Hor
3*	5698.4000	58.15	-3.28	54.87	74.00	-19.13	PK	Hor
4*	9459.6000	59.22	-3.28	55.94	74.00	-18.06	PK	Hor
5*	14914.5000	57.03	-0.26	56.77	74.00	-17.23	PK	Hor
6*	17968.1000	56.20	4.04	60.24	74.00	-13.76	PK	Hor
7*	5698.4000	47.68	-3.28	44.40	54.00	-9.60	AV	Hor
8*	9459.6000	49.18	-3.28	45.90	54.00	-8.10	AV	Hor
9*	14914.5000	46.86	-0.26	46.60	54.00	-7.40	AV	Hor
10*	17968.1000	45.76	4.04	49.80	54.00	-4.20	AV	Hor

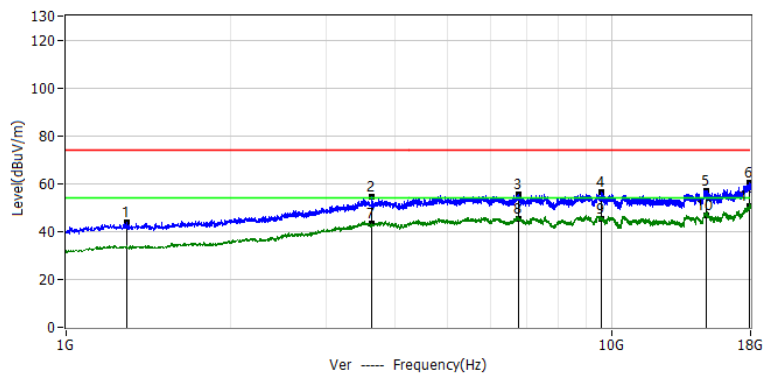


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1289.0000	63.72	-20.04	43.68	74.00	-30.32	PK	Ver
2*	3639.2000	57.15	-2.84	54.31	74.00	-19.69	PK	Ver
3*	6758.7000	59.20	-3.88	55.32	74.00	-18.68	PK	Ver
4*	9593.5000	59.73	-3.28	56.45	74.00	-17.55	PK	Ver
5*	14961.2000	57.56	-0.41	57.15	74.00	-16.85	PK	Ver
6*	17955.4000	56.45	3.94	60.39	74.00	-13.61	PK	Ver
7*	3639.2000	46.24	-2.84	43.40	54.00	-10.60	AV	Ver
8*	6758.7000	49.28	-3.88	45.40	54.00	-8.60	AV	Ver
9*	9593.5000	48.58	-3.28	45.30	54.00	-8.70	AV	Ver
10*	14961.2000	47.01	-0.41	46.60	54.00	-7.40	AV	Ver
11*	17955.4000	46.46	3.94	50.40	54.00	-3.60	AV	Ver



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11g 2437	
Note:	

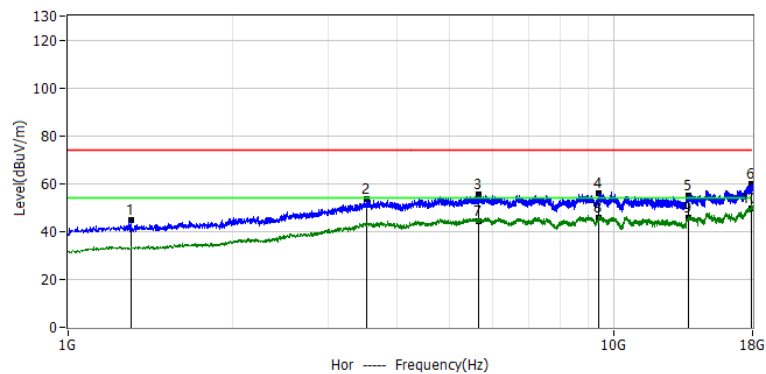


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1301.7000	64.77	-20.00	44.77	74.00	-29.23	PK	Hor
2*	3530.9000	56.22	-2.86	53.36	74.00	-20.64	PK	Hor
3*	5649.5000	58.58	-3.21	55.37	74.00	-18.63	PK	Hor
4*	9415.0000	59.36	-3.32	56.04	74.00	-17.96	PK	Hor
5*	13726.6000	57.13	-1.95	55.18	74.00	-18.82	PK	Hor
6*	17953.2000	55.99	3.92	59.91	74.00	-14.09	PK	Hor
7*	5649.5000	47.51	-3.21	44.30	54.00	-9.70	AV	Hor
8*	9415.0000	49.32	-3.32	46.00	54.00	-8.00	AV	Hor
9*	13726.6000	47.85	-1.95	45.90	54.00	-8.10	AV	Hor
10*	17953.2000	45.68	3.92	49.60	54.00	-4.40	AV	Hor

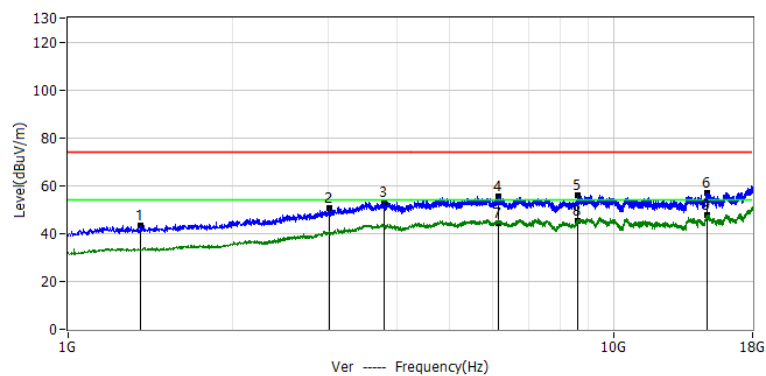


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1359.1000	62.98	-19.53	43.45	74.00	-30.55	PK	Ver
2*	3008.1000	57.09	-6.47	50.62	74.00	-23.38	PK	Ver
3*	3800.7000	55.33	-2.03	53.30	74.00	-20.70	PK	Ver
4*	6138.2000	59.21	-3.59	55.62	74.00	-18.38	PK	Ver
5*	8607.5000	60.05	-4.14	55.91	74.00	-18.09	PK	Ver
6*	14865.6000	57.03	-0.17	56.86	74.00	-17.14	PK	Ver
7*	6138.2000	47.89	-3.59	44.30	54.00	-9.70	AV	Ver
8*	8607.5000	49.34	-4.14	45.20	54.00	-8.80	AV	Ver
9*	14865.6000	47.97	-0.17	47.80	54.00	-6.20	AV	Ver



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11g 2462	
Note:	

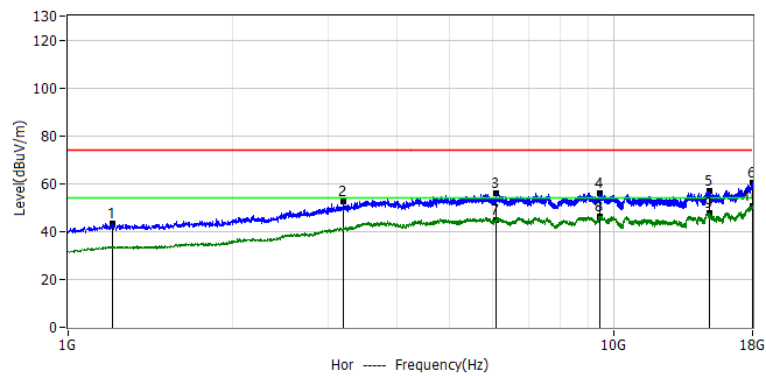


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1206.1000	63.66	-20.22	43.44	74.00	-30.56	PK	Hor
2*	3199.4000	57.34	-4.85	52.49	74.00	-21.51	PK	Hor
3*	6100.0000	59.15	-3.37	55.78	74.00	-18.22	PK	Hor
4*	9423.5000	59.15	-3.31	55.84	74.00	-18.16	PK	Hor
5*	14978.2000	57.41	-0.46	56.95	74.00	-17.05	PK	Hor
6*	18000.0000	56.29	4.29	60.58	74.00	-13.42	PK	Hor
7*	6100.0000	48.17	-3.37	44.80	54.00	-9.20	AV	Hor
8*	9423.5000	49.41	-3.31	46.10	54.00	-7.90	AV	Hor
9*	14978.2000	47.96	-0.46	47.50	54.00	-6.50	AV	Hor
10*	18000.0000	46.21	4.29	50.50	54.00	-3.50	AV	Hor

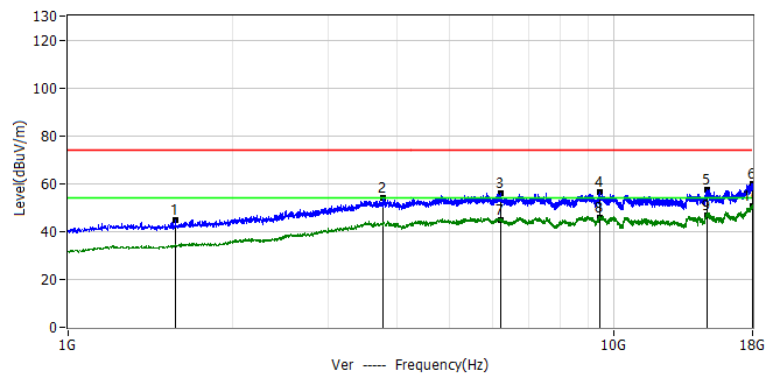


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1573.7000	62.83	-17.97	44.86	74.00	-29.14	PK	Ver
2*	3777.4000	55.96	-2.10	53.86	74.00	-20.14	PK	Ver
3*	6202.0000	59.93	-3.96	55.97	74.00	-18.03	PK	Ver
4*	9429.9000	59.73	-3.30	56.43	74.00	-17.57	PK	Ver
5*	14865.6000	57.63	-0.17	57.46	74.00	-16.54	PK	Ver
6*	17993.6000	55.79	4.24	60.03	74.00	-13.97	PK	Ver
7*	6202.0000	48.76	-3.96	44.80	54.00	-9.20	AV	Ver
8*	9429.9000	49.00	-3.30	45.70	54.00	-8.30	AV	Ver
9*	14865.6000	46.97	-0.17	46.80	54.00	-7.20	AV	Ver
10*	17993.6000	46.26	4.24	50.50	54.00	-3.50	AV	Ver



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11n20 2412	
Note:	

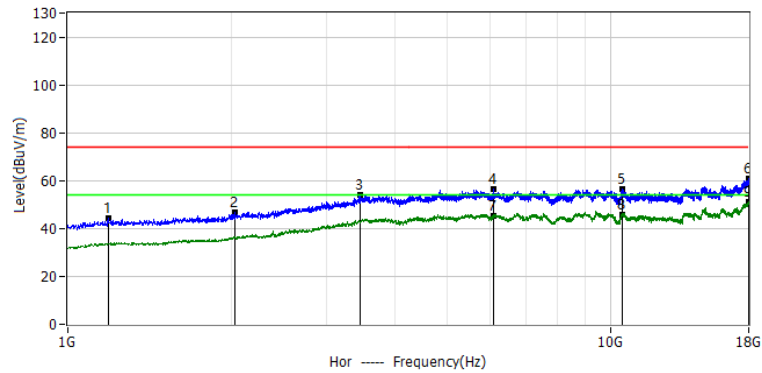


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1187.0000	64.89	-20.34	44.55	74.00	-29.45	PK	Hor
2*	2032.7000	60.39	-13.87	46.52	74.00	-27.48	PK	Hor
3*	3450.1000	57.34	-3.36	53.98	74.00	-20.02	PK	Hor
4*	6100.0000	59.82	-3.37	56.45	74.00	-17.55	PK	Hor
5*	10509.4000	58.22	-1.95	56.27	74.00	-17.73	PK	Hor
6*	17997.9000	56.77	4.27	61.04	74.00	-12.96	PK	Hor
7*	6100.0000	48.57	-3.37	45.20	54.00	-8.80	AV	Hor
8*	10509.4000	47.95	-1.95	46.00	54.00	-8.00	AV	Hor
9*	17997.9000	46.73	4.27	51.00	54.00	-3.00	AV	Hor

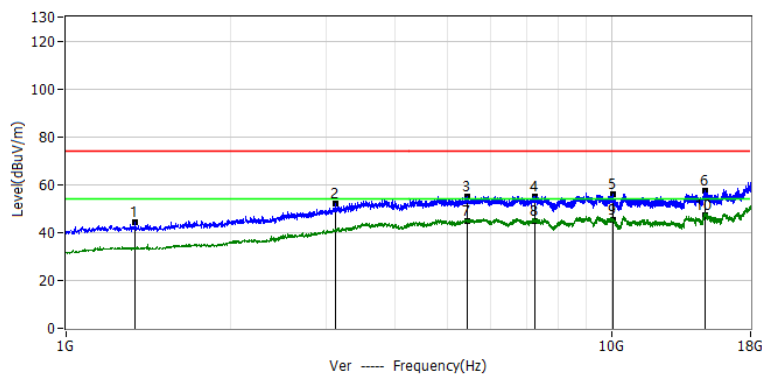


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1337.9000	64.12	-19.71	44.41	74.00	-29.59	PK	Ver
2*	3120.7000	57.45	-5.54	51.91	74.00	-22.09	PK	Ver
3*	5449.7000	57.87	-2.99	54.88	74.00	-19.12	PK	Ver
4*	7253.9000	59.18	-3.92	55.26	74.00	-18.74	PK	Ver
5*	10056.7000	59.12	-3.19	55.93	74.00	-18.07	PK	Ver
6*	14835.9000	57.77	-0.14	57.63	74.00	-16.37	PK	Ver
7*	5449.7000	47.69	-2.99	44.70	54.00	-9.30	AV	Ver
8*	7253.9000	48.62	-3.92	44.70	54.00	-9.30	AV	Ver
9*	10056.7000	48.39	-3.19	45.20	54.00	-8.80	AV	Ver
10*	14835.9000	47.34	-0.14	47.20	54.00	-6.80	AV	Ver



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11n20 2437	
Note:	

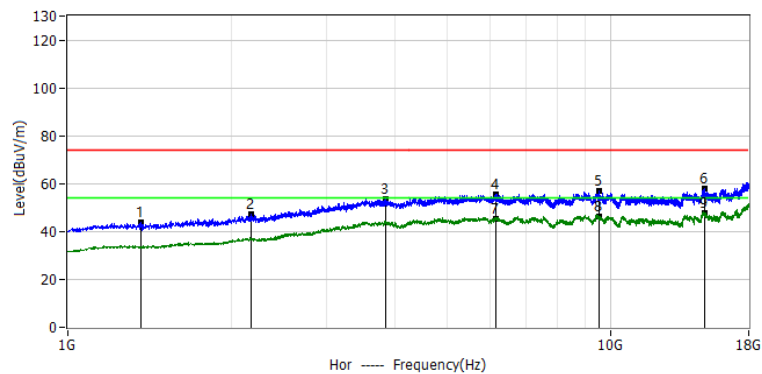


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1361.2000	63.28	-19.51	43.77	74.00	-30.23	PK	Hor
2*	2173.0000	59.82	-12.57	47.25	74.00	-26.75	PK	Hor
3*	3845.4000	55.74	-2.15	53.59	74.00	-20.41	PK	Hor
4*	6142.5000	58.96	-3.62	55.34	74.00	-18.66	PK	Hor
5*	9527.6000	60.15	-3.37	56.78	74.00	-17.22	PK	Hor
6*	14893.2000	57.94	-0.20	57.74	74.00	-16.26	PK	Hor
7*	6142.5000	48.72	-3.62	45.10	54.00	-8.90	AV	Hor
8*	9527.6000	49.47	-3.37	46.10	54.00	-7.90	AV	Hor
9*	14893.2000	48.00	-0.20	47.80	54.00	-6.20	AV	Hor

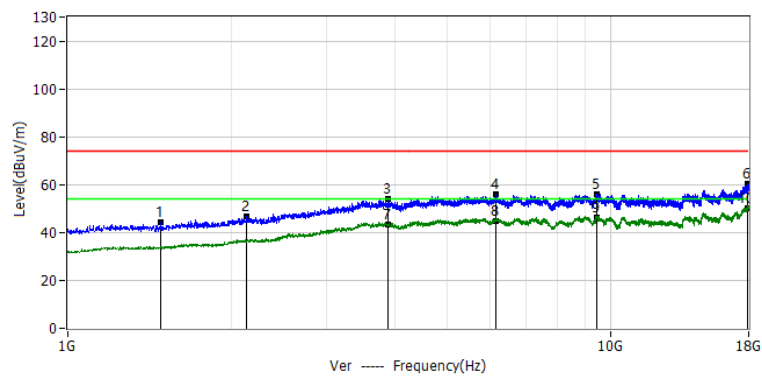


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1482.4000	63.15	-18.89	44.26	74.00	-29.74	PK	Ver
2*	2132.6000	59.61	-12.91	46.70	74.00	-27.30	PK	Ver
3*	3900.6000	56.75	-2.50	54.25	74.00	-19.75	PK	Ver
4*	6168.0000	59.91	-3.77	56.14	74.00	-17.86	PK	Ver
5*	9451.1000	59.30	-3.27	56.03	74.00	-17.97	PK	Ver
6*	17932.0000	56.59	3.76	60.35	74.00	-13.65	PK	Ver
7*	3900.6000	45.80	-2.50	43.30	54.00	-10.70	AV	Ver
8*	6168.0000	48.67	-3.77	44.90	54.00	-9.10	AV	Ver
9*	9451.1000	49.47	-3.27	46.20	54.00	-7.80	AV	Ver
10*	17932.0000	46.44	3.76	50.20	54.00	-3.80	AV	Ver



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11n20 2462	
Note:	

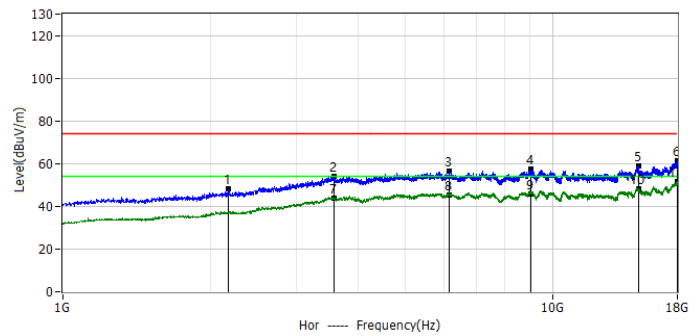

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2181.5000	60.49	-12.52	47.97	74.00	-26.03	PK	Hor
2*	3571.2000	56.85	-2.82	54.03	74.00	-19.97	PK	Hor
3*	6157.4000	60.01	-3.70	56.31	74.00	-17.69	PK	Hor
4*	9019.7000	60.73	-3.35	57.38	74.00	-16.62	PK	Hor
5*	14976.1000	59.51	-0.45	59.06	74.00	-14.94	PK	Hor
6*	18000.0000	56.83	4.29	61.12	74.00	-12.88	PK	Hor
7*	3571.2000	46.52	-2.82	43.70	54.00	-10.30	AV	Hor
8*	6157.4000	49.00	-3.70	45.30	54.00	-8.70	AV	Hor
9*	9019.7000	49.25	-3.35	45.90	54.00	-8.10	AV	Hor
10*	14976.1000	48.65	-0.45	48.20	54.00	-5.80	AV	Hor
11*	18000.0000	47.21	4.29	51.50	54.00	-2.50	AV	Hor

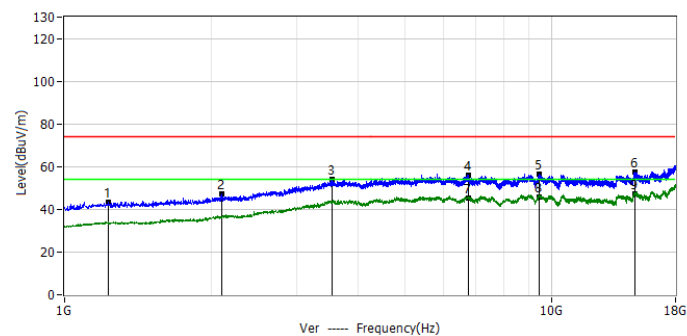

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1229.5000	63.74	-20.17	43.57	74.00	-30.43	PK	Ver
2*	2098.6000	60.38	-13.31	47.07	74.00	-26.93	PK	Ver
3*	3541.5000	56.63	-2.80	53.83	74.00	-20.17	PK	Ver
4*	6763.0000	59.82	-3.90	55.92	74.00	-18.08	PK	Ver
5*	9453.2000	59.77	-3.27	56.50	74.00	-17.50	PK	Ver
6*	14861.4000	57.58	-0.17	57.41	74.00	-16.59	PK	Ver
7*	6763.0000	49.40	-3.90	45.50	54.00	-8.50	AV	Ver
8*	9453.2000	49.17	-3.27	45.90	54.00	-8.10	AV	Ver
9*	14861.4000	47.47	-0.17	47.30	54.00	-6.70	AV	Ver

Remark:


In frequency ranges 18~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.




3.2.7 TEST RESULTS(Band edge Requirements)

Note:1. All mode has been tested, only shown the worst case data.

Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11b 2412	
Note:	

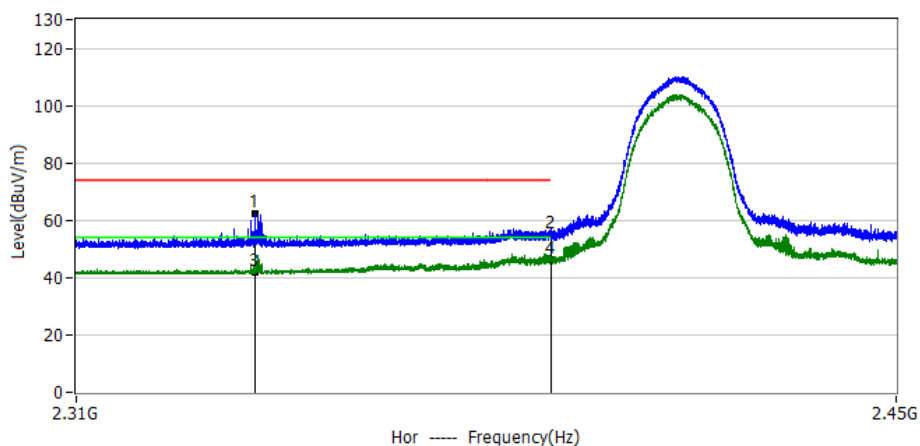


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2339.9000	26.32	36.15	62.47	74.00	-11.53	PK	Hor
2*	2390.0000	18.34	36.46	54.80	74.00	-19.20	PK	Hor
3*	2339.9000	5.95	36.15	42.10	54.00	-11.90	AV	Hor
4*	2390.0000	9.84	36.46	46.30	54.00	-7.70	AV	Hor

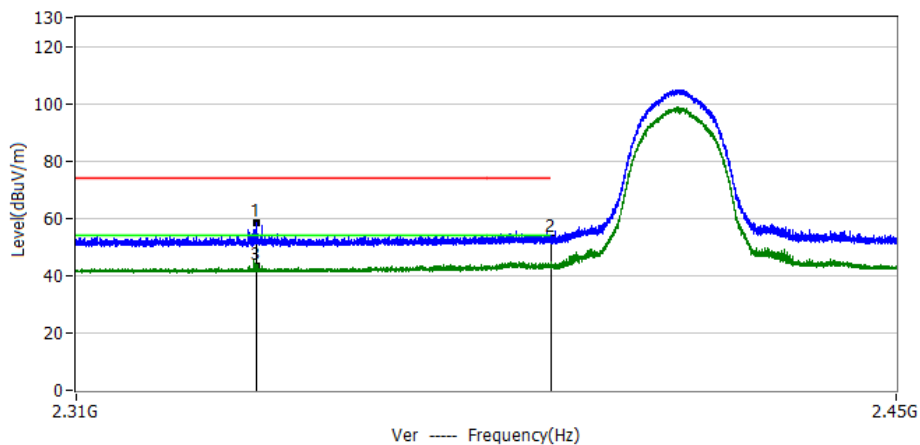


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2340.1000	22.31	36.16	58.47	74.00	-15.53	PK	Ver
2*	2390.0000	16.74	36.46	53.20	74.00	-20.80	PK	Ver
3*	2340.1000	6.94	36.16	43.10	54.00	-10.90	AV	Ver



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11b 2462	
Note:	

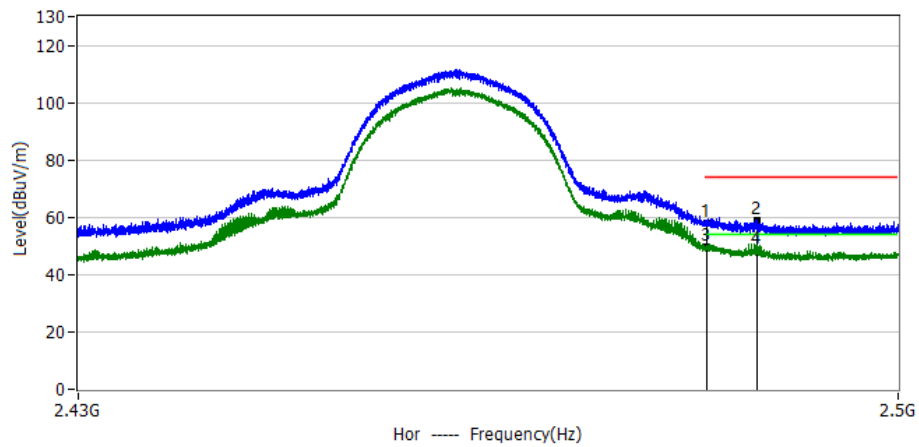


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	20.70	37.20	57.90	74.00	-16.10	PK	Hor
2*	2487.8000	21.78	37.25	59.03	74.00	-14.97	PK	Hor
3*	2483.5000	12.40	37.20	49.60	54.00	-4.40	AV	Hor
4*	2487.8000	11.45	37.25	48.70	54.00	-5.30	AV	Hor

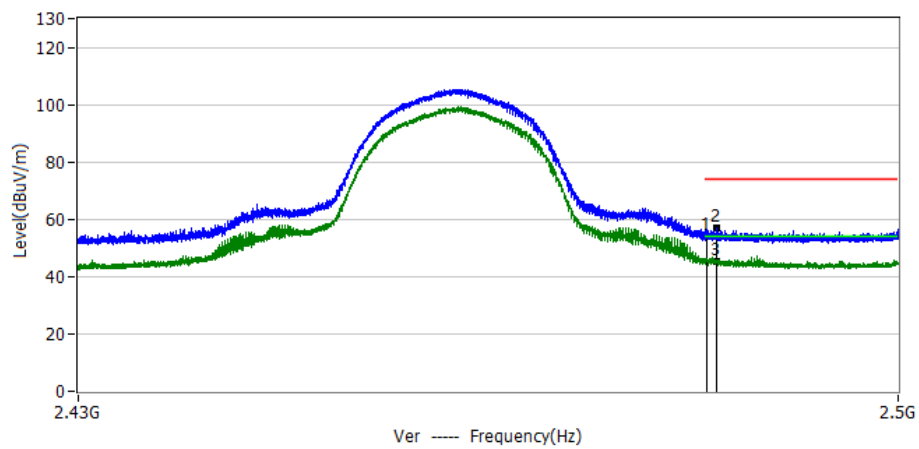


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	16.70	37.20	53.90	74.00	-20.10	PK	Ver
2*	2484.3000	19.81	37.21	57.02	74.00	-17.00	PK	Ver
3*	2484.3000	7.99	37.21	45.20	54.00	-8.80	AV	Ver



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11g 2412	
Note:	

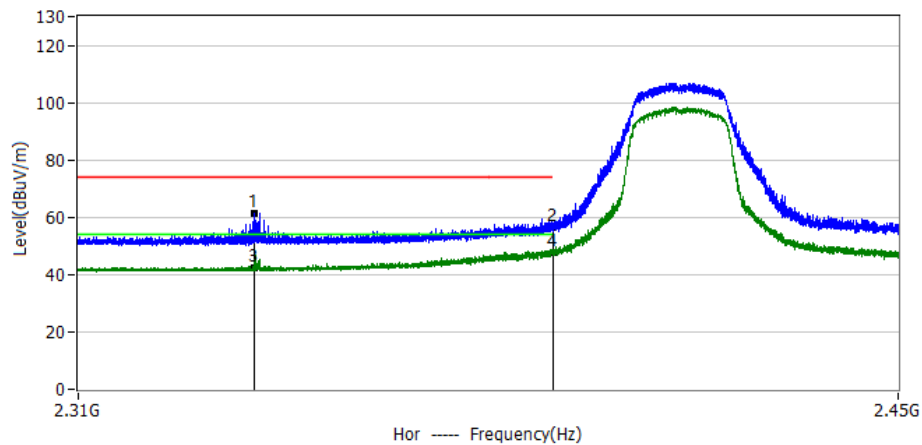


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2339.4000	25.07	36.15	61.22	74.00	-12.78	PK	Hor
2*	2390.0000	20.24	36.46	56.70	74.00	-17.30	PK	Hor
3*	2339.4000	6.05	36.15	42.20	54.00	-11.80	AV	Hor
4*	2390.0000	11.04	36.46	47.50	54.00	-6.50	AV	Hor

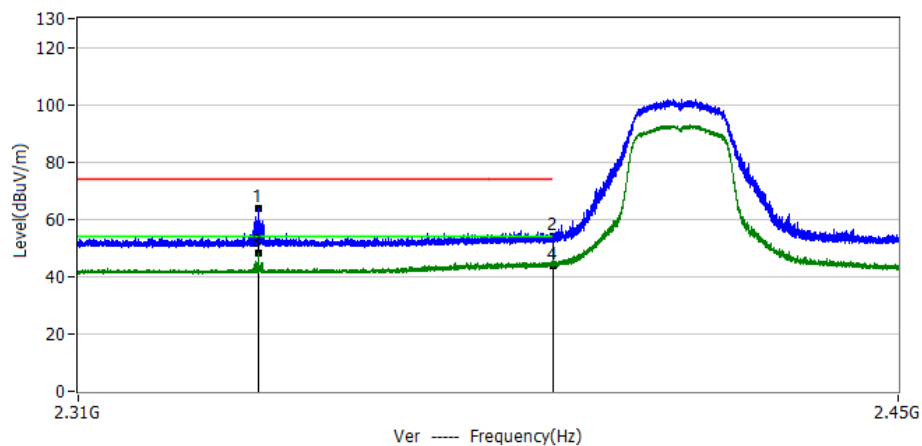


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2340.0000	27.63	36.16	63.79	74.00	-10.21	PK	Ver
2*	2390.0000	17.64	36.46	54.10	74.00	-19.90	PK	Ver
3*	2340.0000	11.83	36.16	47.99	54.00	-6.01	AV	Ver
4*	2390.0000	7.54	36.46	44.00	54.00	-10.00	AV	Ver



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11g 2462	
Note:	

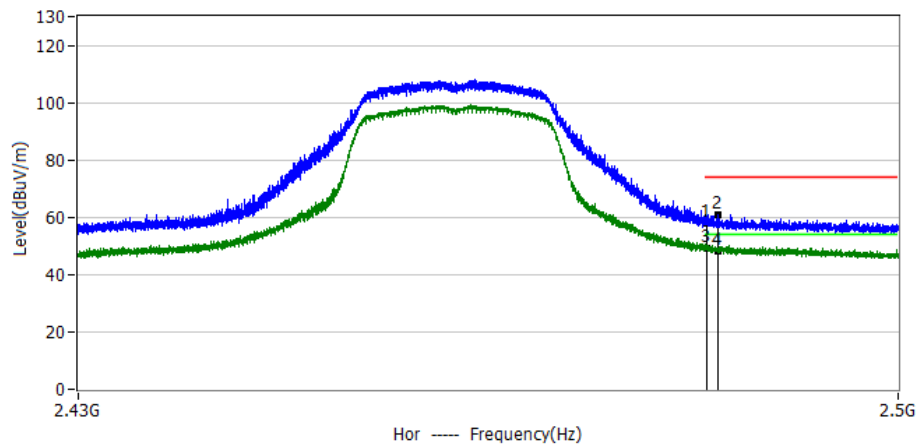


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	20.70	37.20	57.90	74.00	-16.10	PK	Hor
2*	2484.4000	23.73	37.21	60.94	74.00	-13.06	PK	Hor
3*	2483.5000	12.20	37.20	49.40	54.00	-4.60	AV	Hor
4*	2484.4000	11.19	37.21	48.40	54.00	-5.60	AV	Hor

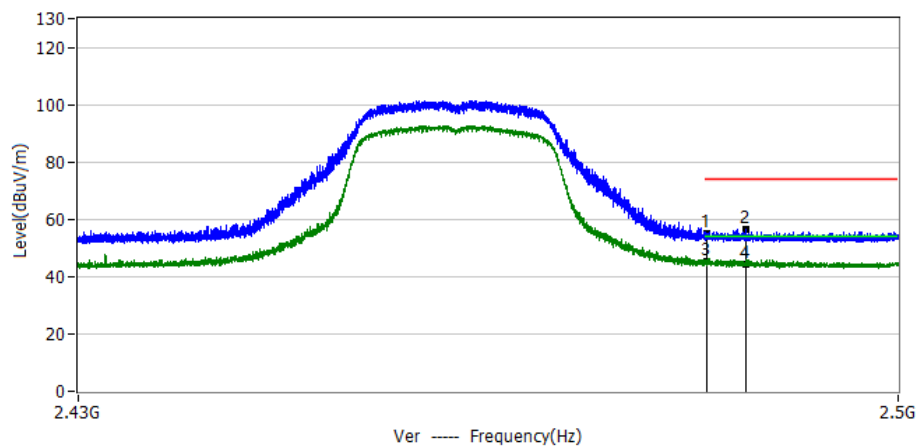


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	17.60	37.20	54.80	74.00	-19.20	PK	Ver
2*	2486.9000	19.05	37.24	56.29	74.00	-17.71	PK	Ver
3*	2483.5000	7.90	37.20	45.10	54.00	-8.90	AV	Ver
4*	2486.9000	6.86	37.24	44.10	54.00	-9.90	AV	Ver



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11n20 2412	
Note:	

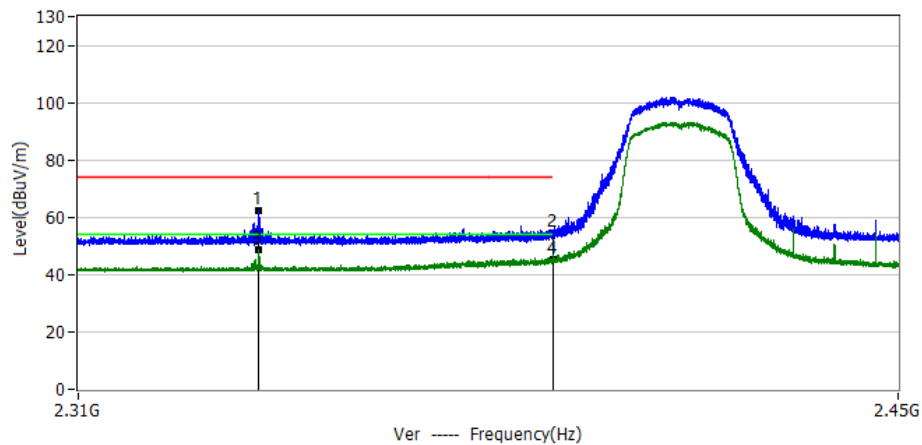


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2340.1000	26.32	36.16	62.48	74.00	-11.52	PK	Ver
2*	2390.0000	18.04	36.46	54.50	74.00	-19.50	PK	Ver
3*	2340.1000	12.40	36.16	48.56	54.00	-5.44	AV	Ver
4*	2390.0000	8.74	36.46	45.20	54.00	-8.80	AV	Ver

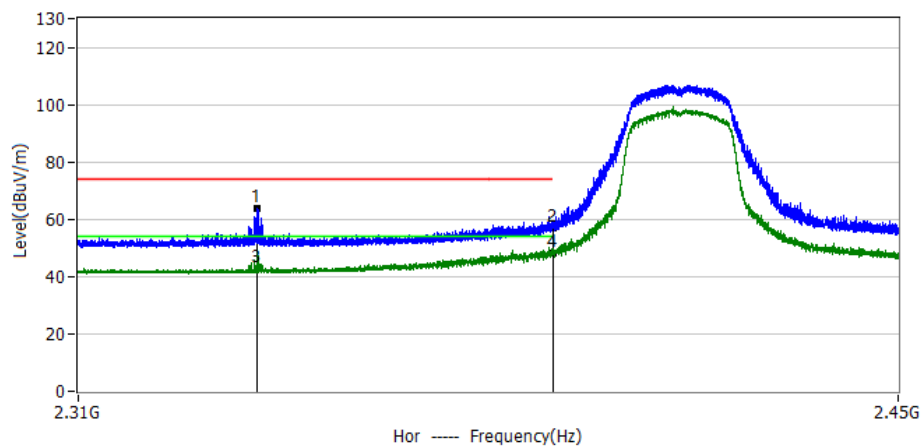


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2339.9000	27.75	36.15	63.90	74.00	-10.10	PK	Hor
2*	2390.0000	20.64	36.46	57.10	74.00	-16.90	PK	Hor
3*	2339.9000	6.85	36.15	43.00	54.00	-11.00	AV	Hor
4*	2390.0000	11.64	36.46	48.10	54.00	-5.90	AV	Hor



Project: LGT25D152	Test Engineer: LiuH
EUT: Automatic Drip Coffee Brewer	Temperature: 24°C
M/N: Venus- I	Humidity: 50%RH
Test Voltage: AC 208V/60Hz	Test Data: 2025-05-12
Test Mode: 802.11n20 2462	
Note:	

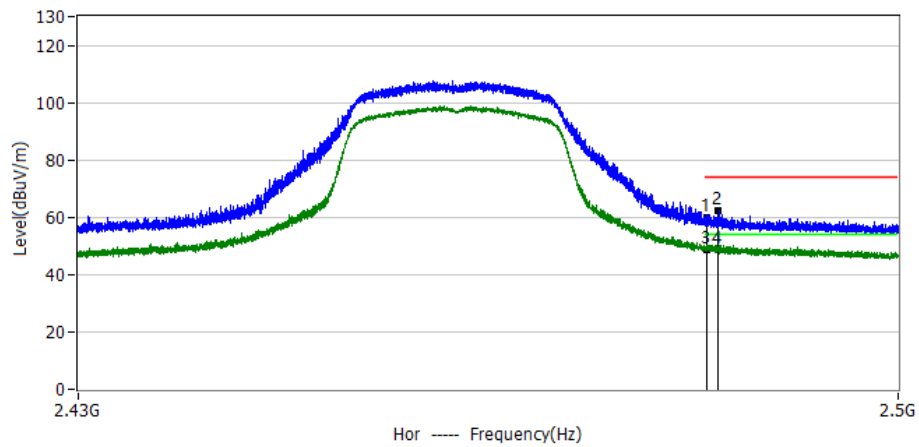

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	22.70	37.20	59.90	74.00	-14.10	PK	Hor
2*	2484.5000	25.22	37.21	62.43	74.00	-11.57	PK	Hor
3*	2483.5000	11.50	37.20	48.70	54.00	-5.30	AV	Hor
4*	2484.5000	11.29	37.21	48.50	54.00	-5.50	AV	Hor

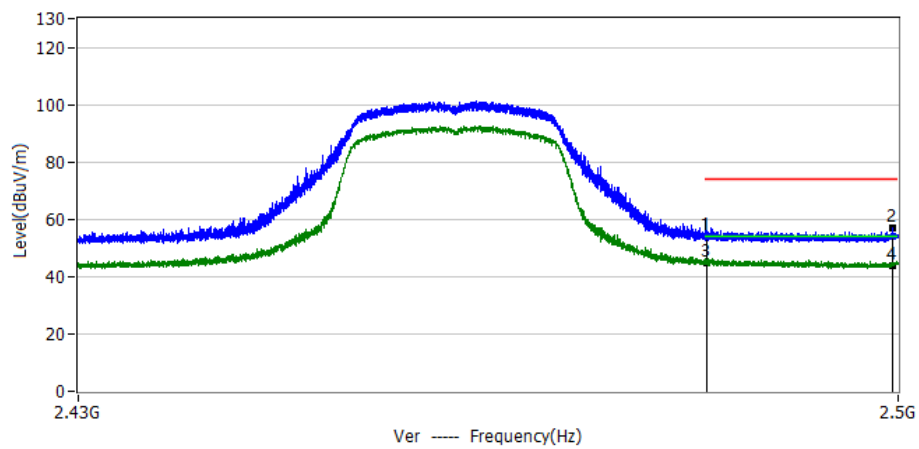

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2483.5000	16.90	37.20	54.10	74.00	-19.90	PK	Ver
2*	2499.5000	19.59	37.38	56.97	74.00	-17.03	PK	Ver
3*	2483.5000	7.80	37.20	45.00	54.00	-9.00	AV	Ver
4*	2499.5000	6.62	37.38	44.00	54.00	-10.00	AV	Ver



4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2432 MHz Upper Band Edge: 2442 to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

4.6 TEST RESULTS

For the measurement records, refer to the appendix I.

Note: Not recorded emission from 9 KHz to 30 MHz as emission level at least 20dBc lower than emission limit.



5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

FCC Part15.247 , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	≤ 8 dBm (RBW ≥ 3 KHz)	2400-2483.5	PASS

5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

5.6 TEST RESULTS

For the measurement records, refer to the appendix I.



6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

6.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.6 TEST RESULTS

For the measurement records, refer to the appendix I.



7. PEAK OUTPUT POWER TEST

7.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq$ [3 $\times$ RBW].
- Set span $\geq$ [3 $\times$ RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the

DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW $\geq$ [3 $\times$ RBW].
- Set the span $\geq$ [1.5 $\times$ DTS bandwidth].
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.


PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

7.6 TEST RESULTS

For the measurement records, refer to the appendix I.



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA


The EUT antenna is PCB Antenna. It comply with the standard requirement.





APPENDIX I - TEST RESULTS

Duty Cycle

Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	0.844	0.94	89.79	0.47	1.18
NVNT	b	2437	0.845	0.941	89.8	0.47	1.18
NVNT	b	2462	0.845	0.941	89.8	0.47	1.18
NVNT	g	2412	0.176	0.276	63.77	1.95	5.68
NVNT	g	2437	0.176	0.276	63.77	1.95	5.68
NVNT	g	2462	0.176	0.276	63.77	1.95	5.68
NVNT	n20	2412	0.164	0.265	61.89	2.08	6.1
NVNT	n20	2437	0.164	0.265	61.89	2.08	6.1
NVNT	n20	2462	0.164	0.265	61.89	2.08	6.1

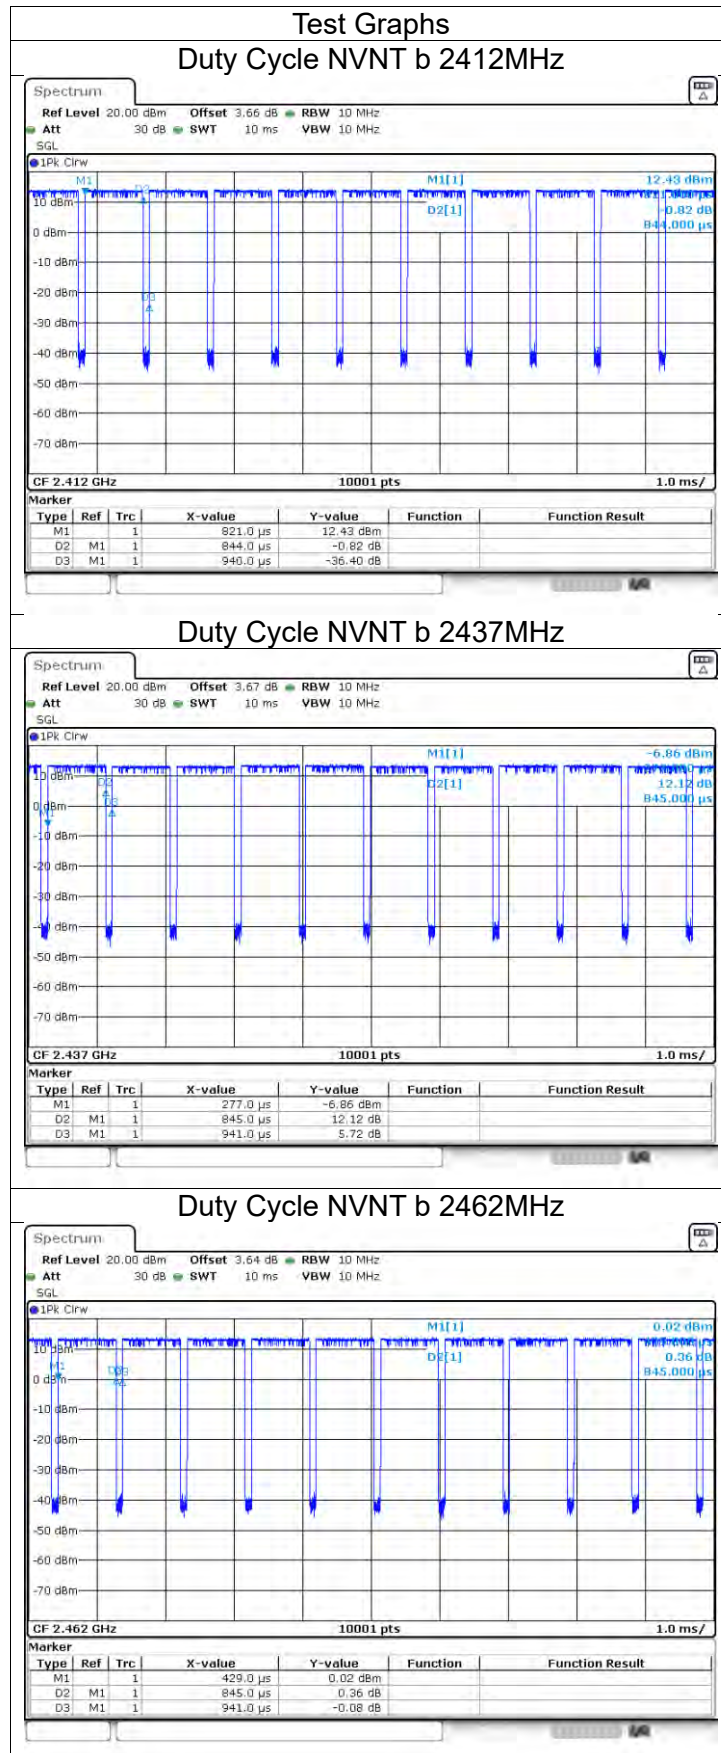

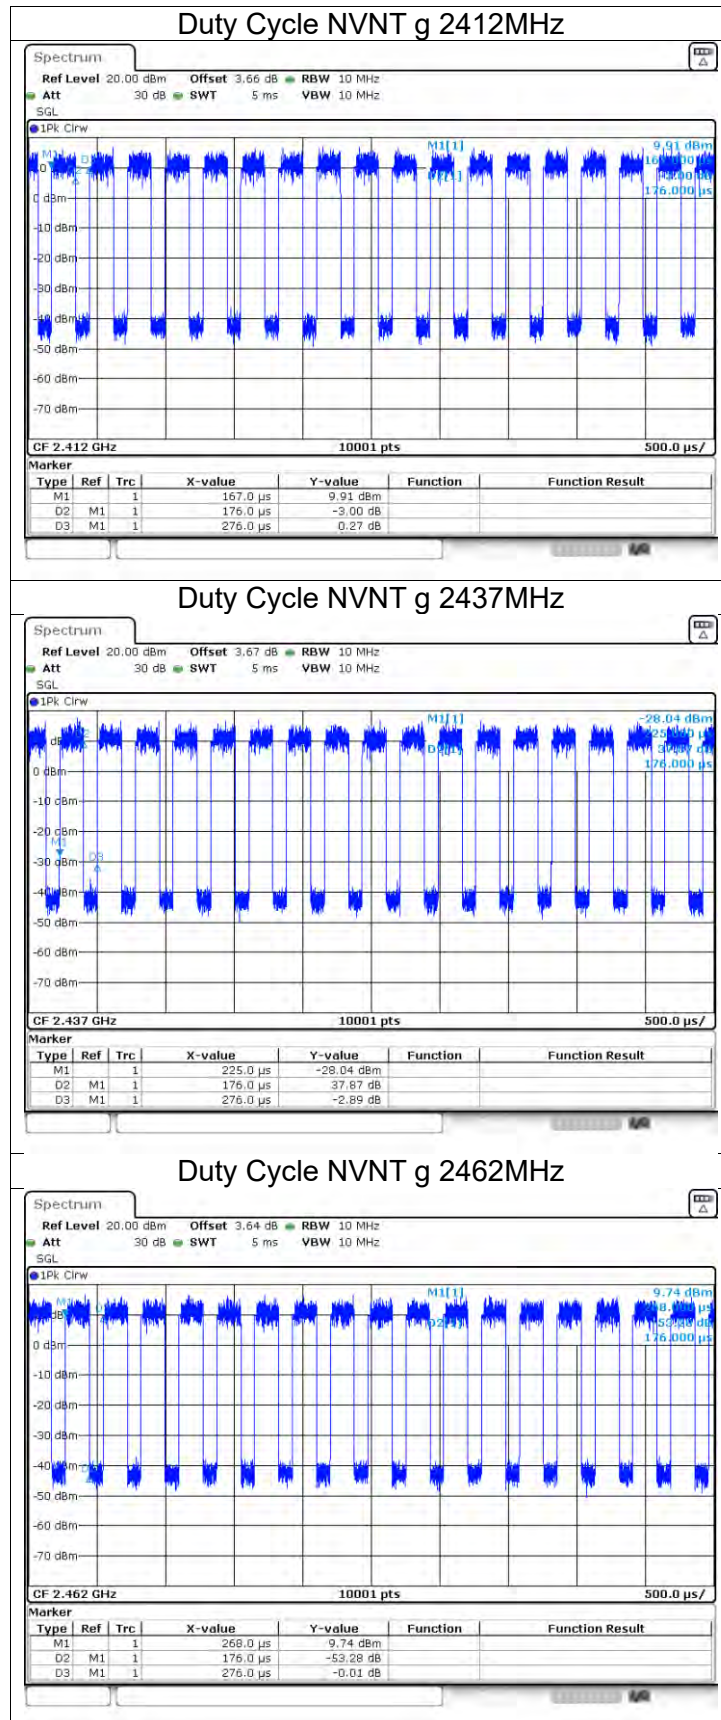

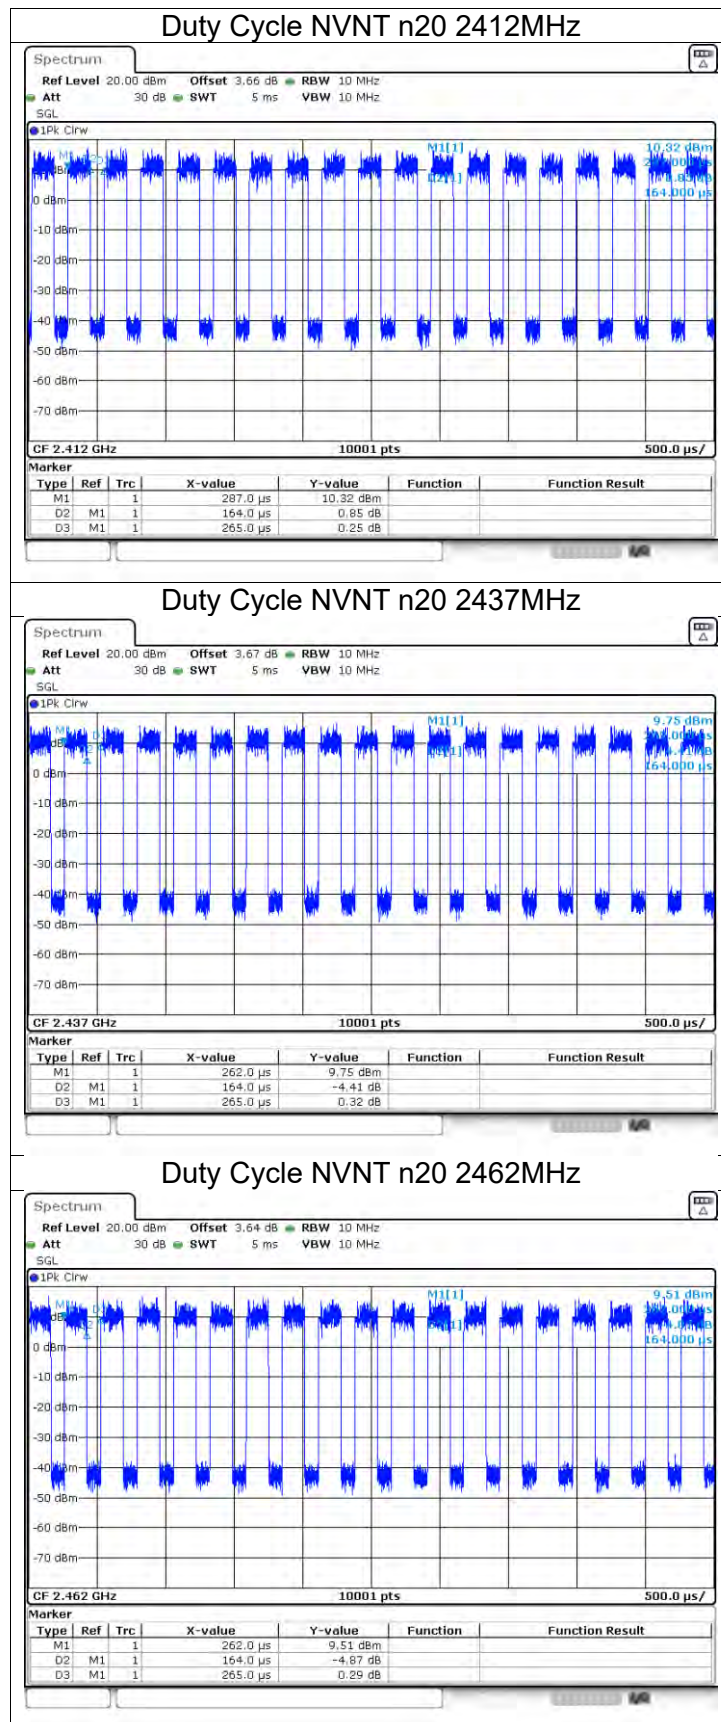



Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	17.9	30	Pass
NVNT	b	2437	17.42	30	Pass
NVNT	b	2462	17.31	30	Pass
NVNT	g	2412	16.3	30	Pass
NVNT	g	2437	16.1	30	Pass
NVNT	g	2462	16.02	30	Pass
NVNT	n20	2412	16.33	30	Pass
NVNT	n20	2437	15.92	30	Pass
NVNT	n20	2462	15.68	30	Pass




-6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	9.141	0.5	Pass
NVNT	b	2437	7.245	0.5	Pass
NVNT	b	2462	9.396	0.5	Pass
NVNT	g	2412	15.36	0.5	Pass
NVNT	g	2437	15.093	0.5	Pass
NVNT	g	2462	15.105	0.5	Pass
NVNT	n20	2412	15.093	0.5	Pass
NVNT	n20	2437	15.09	0.5	Pass
NVNT	n20	2462	15.375	0.5	Pass




Test Graphs


-6dB Bandwidth NVNT b 2412MHz

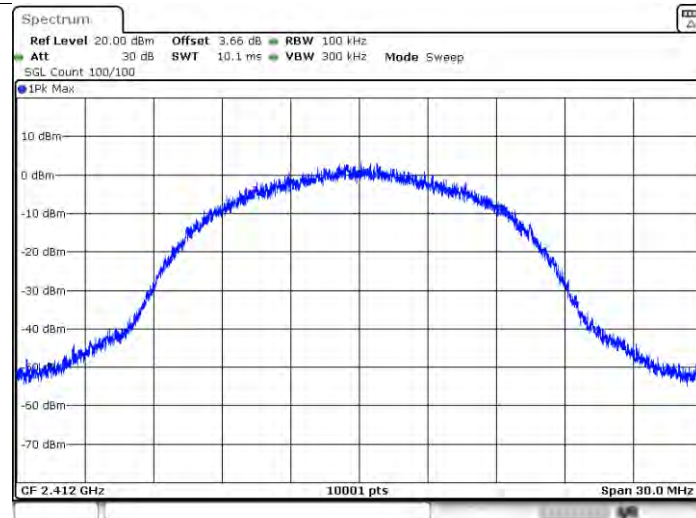



-6dB Bandwidth NVNT b 2437MHz

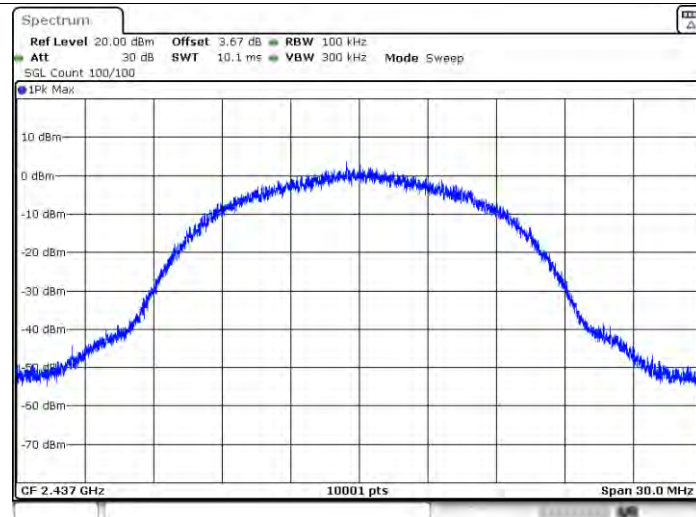

-6dB Bandwidth NVNT b 2462MHz

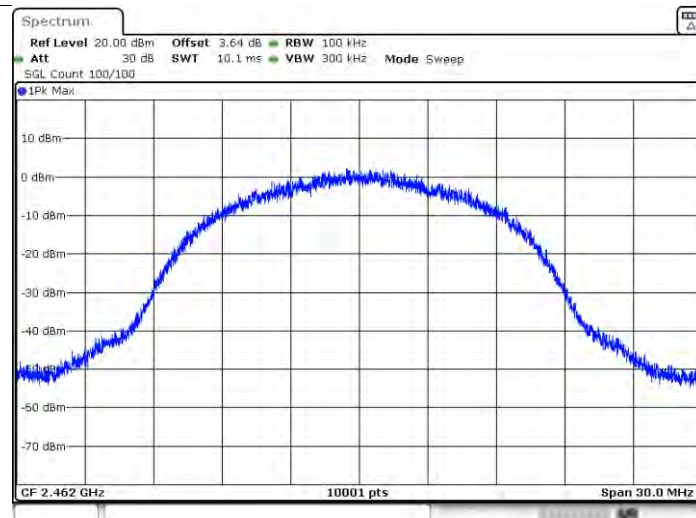

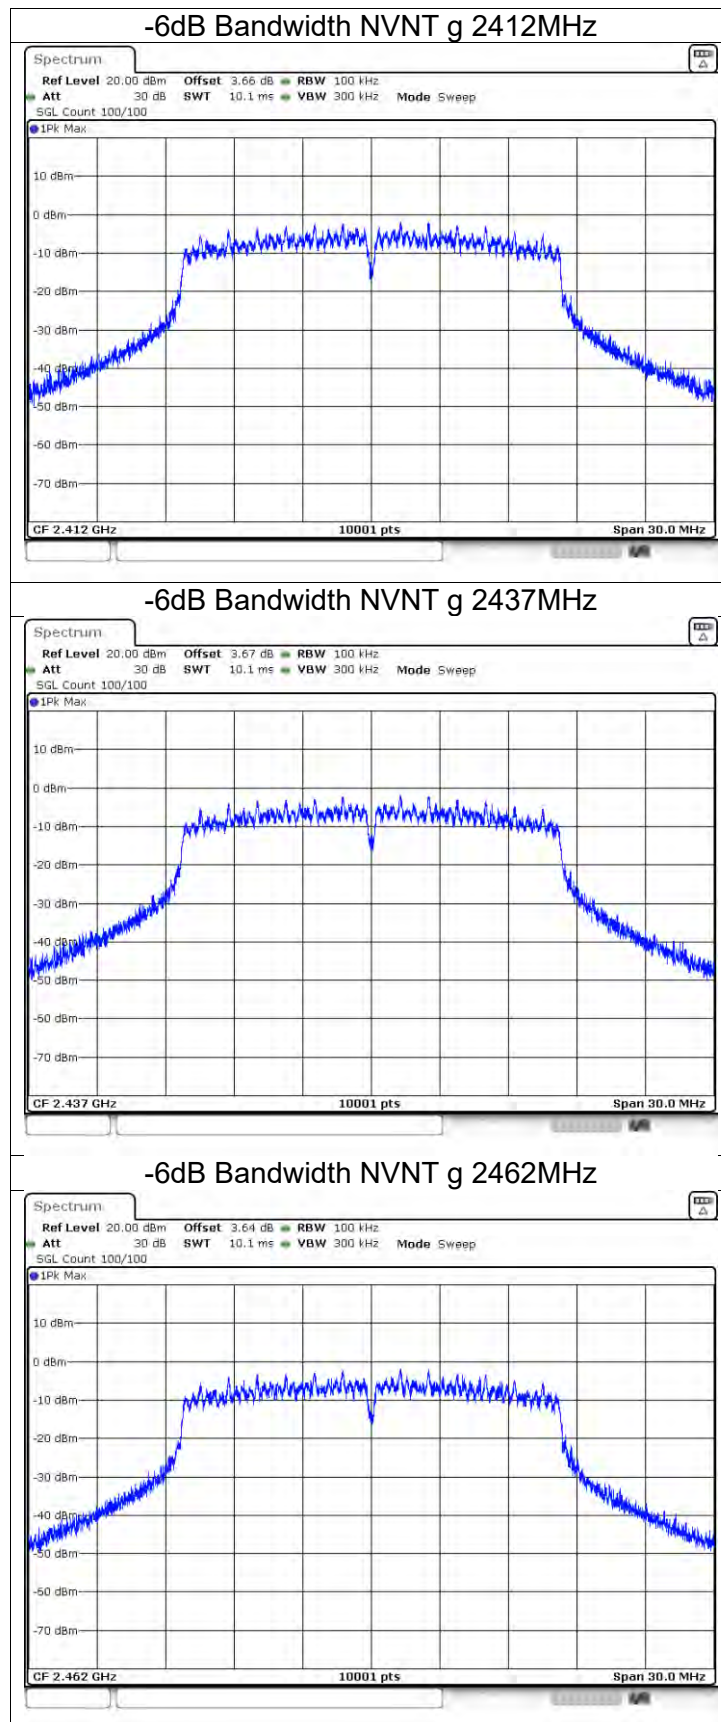


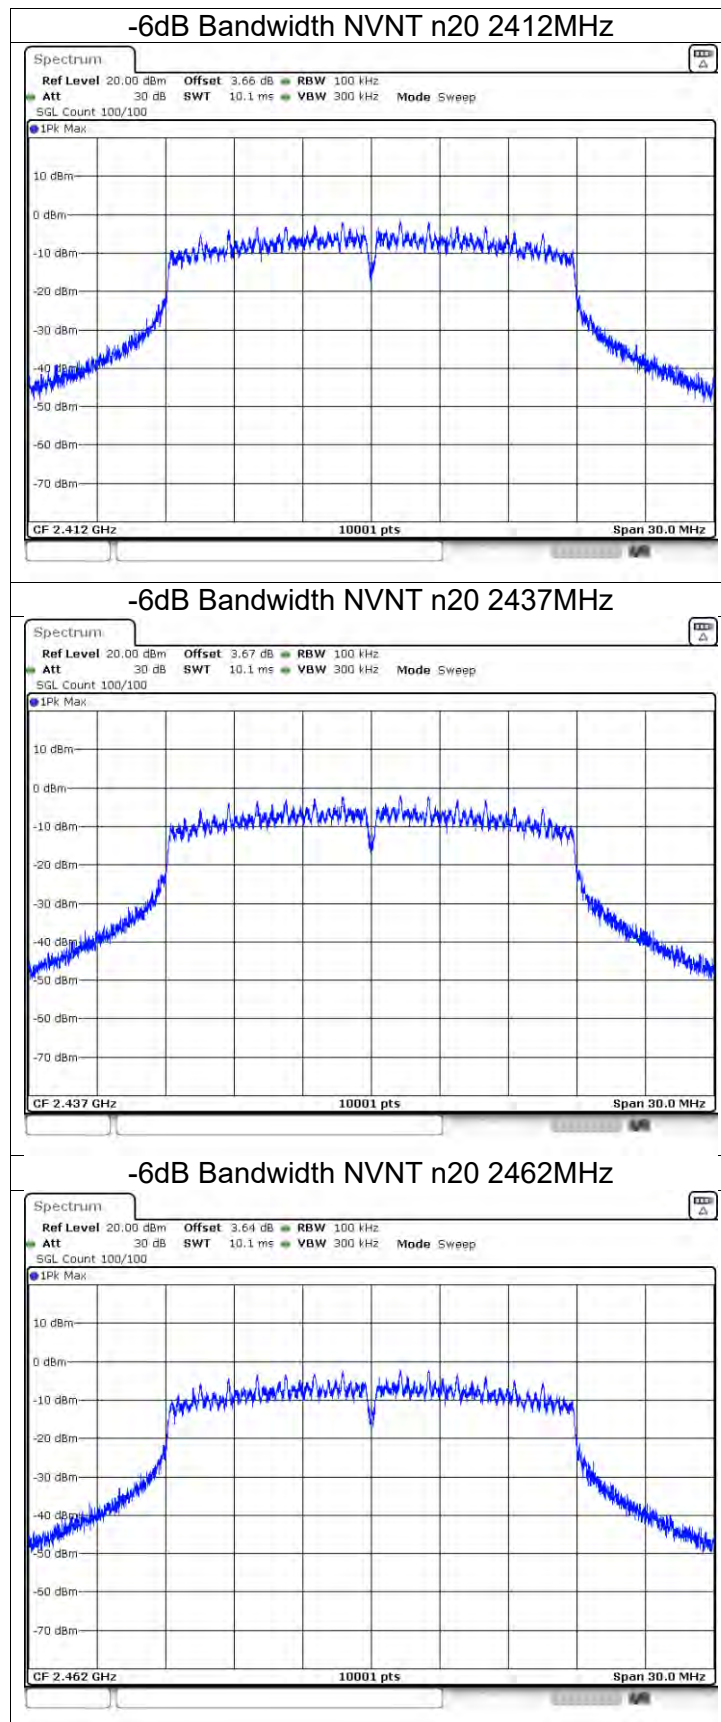





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	b	2412	13.844
NVNT	b	2437	13.811
NVNT	b	2462	13.808
NVNT	g	2412	16.315
NVNT	g	2437	16.324
NVNT	g	2462	16.309
NVNT	n20	2412	17.449
NVNT	n20	2437	17.467
NVNT	n20	2462	17.467

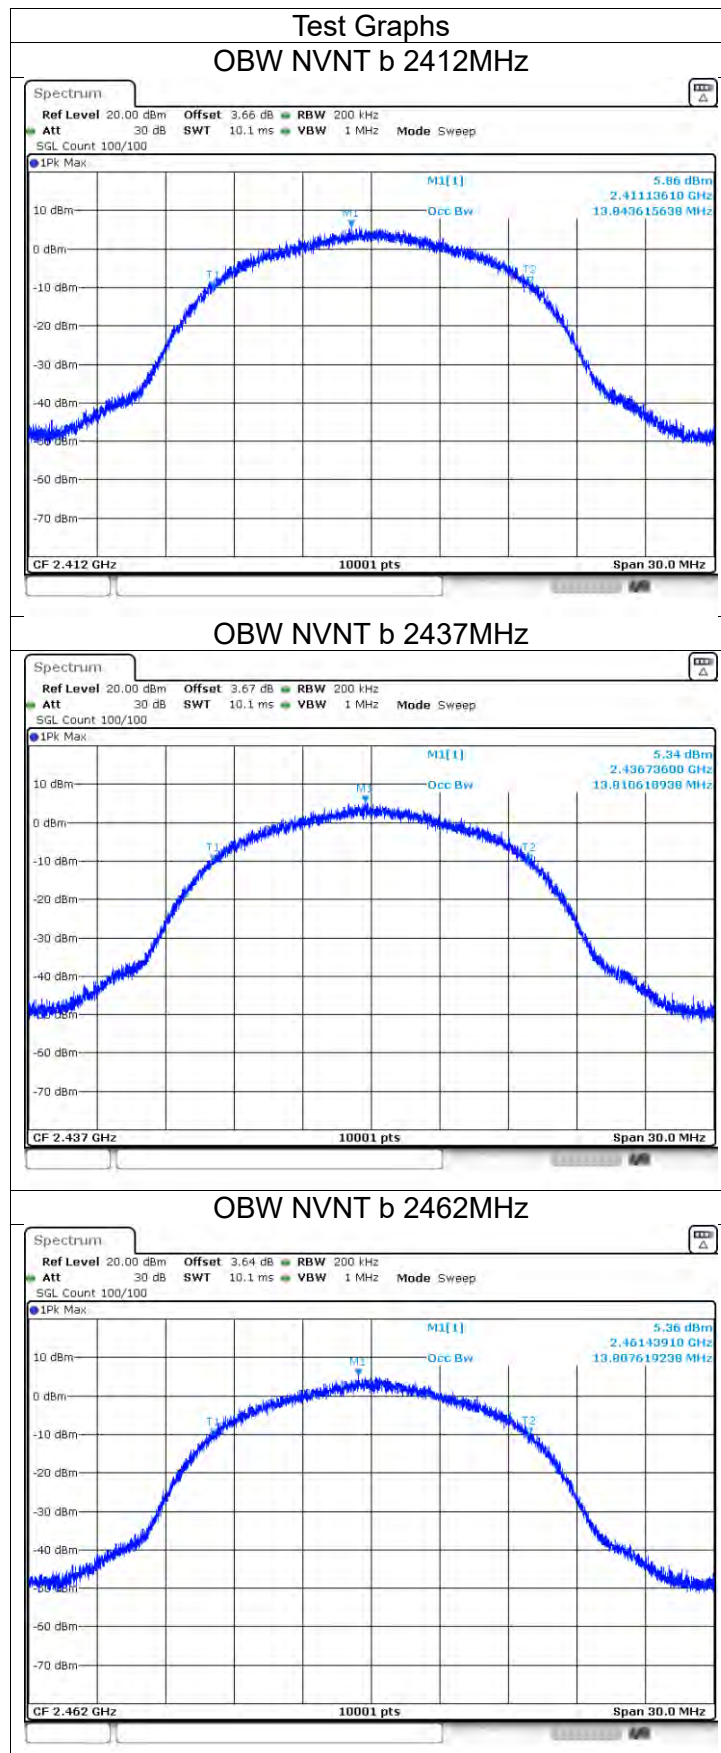

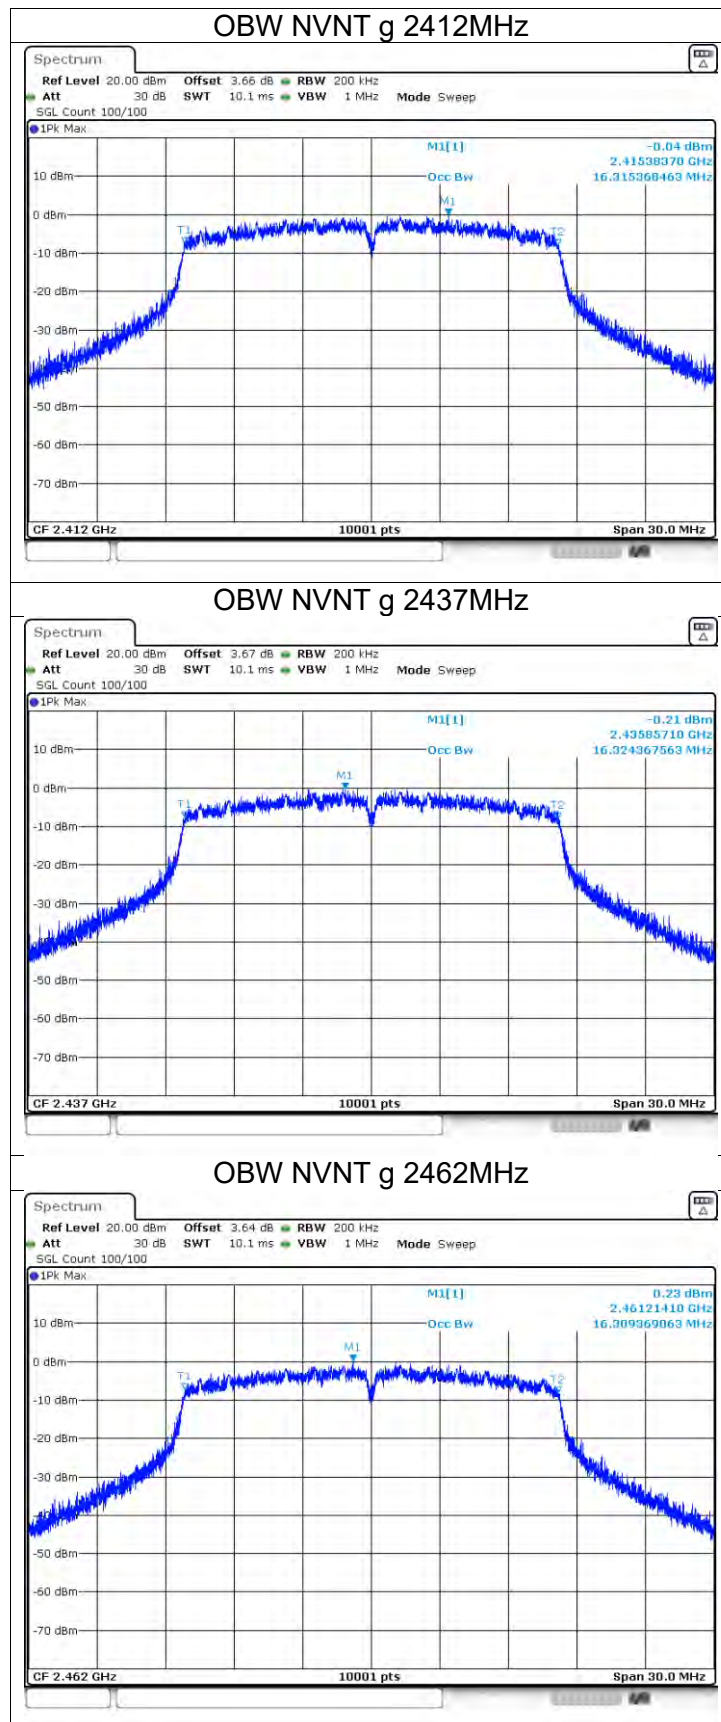


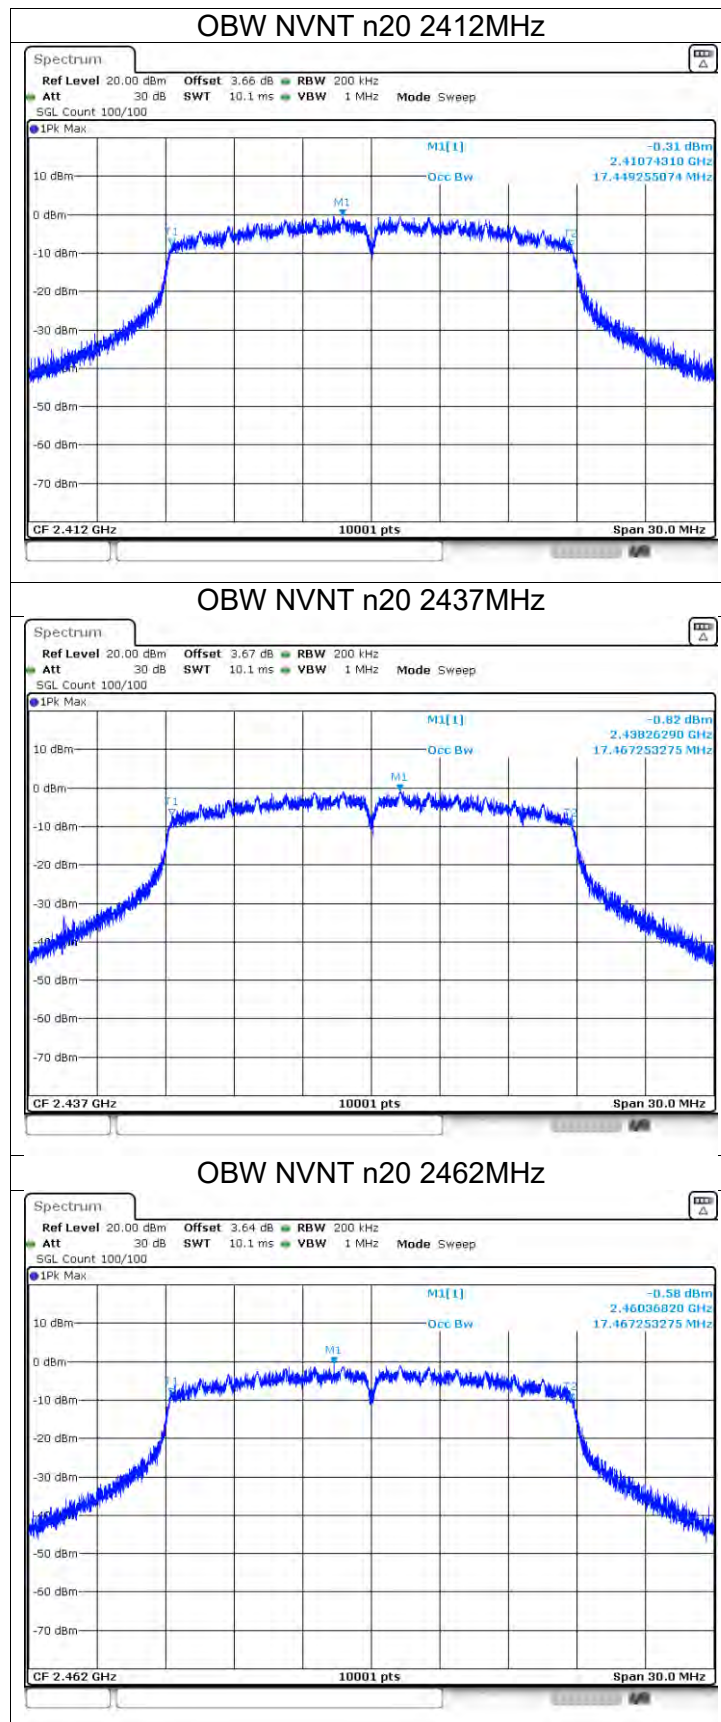





Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	-12.14	8	Pass
NVNT	b	2437	-12.02	8	Pass
NVNT	b	2462	-10.56	8	Pass
NVNT	g	2412	-16.46	8	Pass
NVNT	g	2437	-16.32	8	Pass
NVNT	g	2462	-16.36	8	Pass
NVNT	n20	2412	-15.5	8	Pass
NVNT	n20	2437	-16.62	8	Pass
NVNT	n20	2462	-15.93	8	Pass

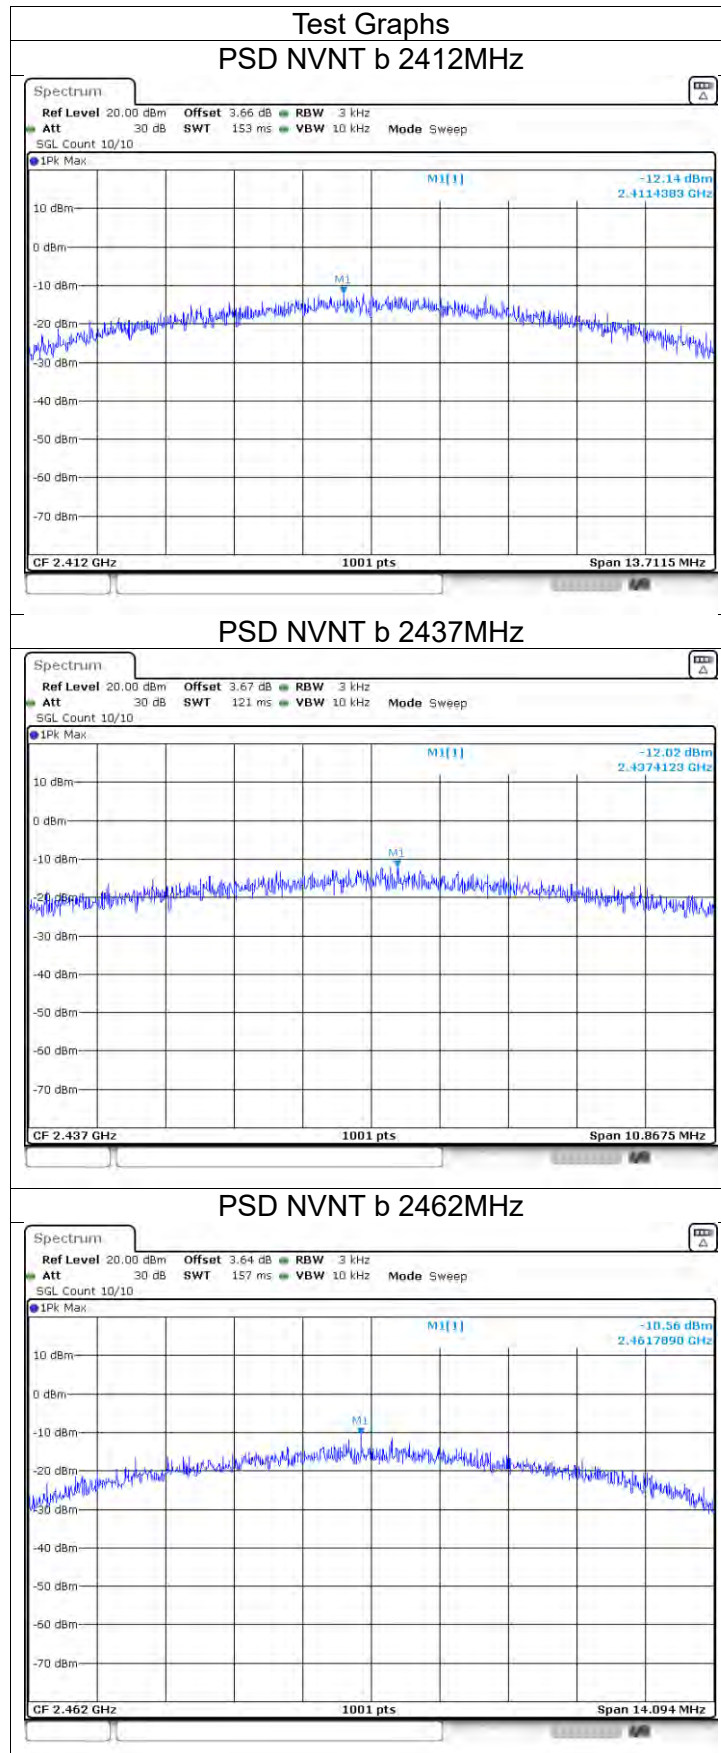

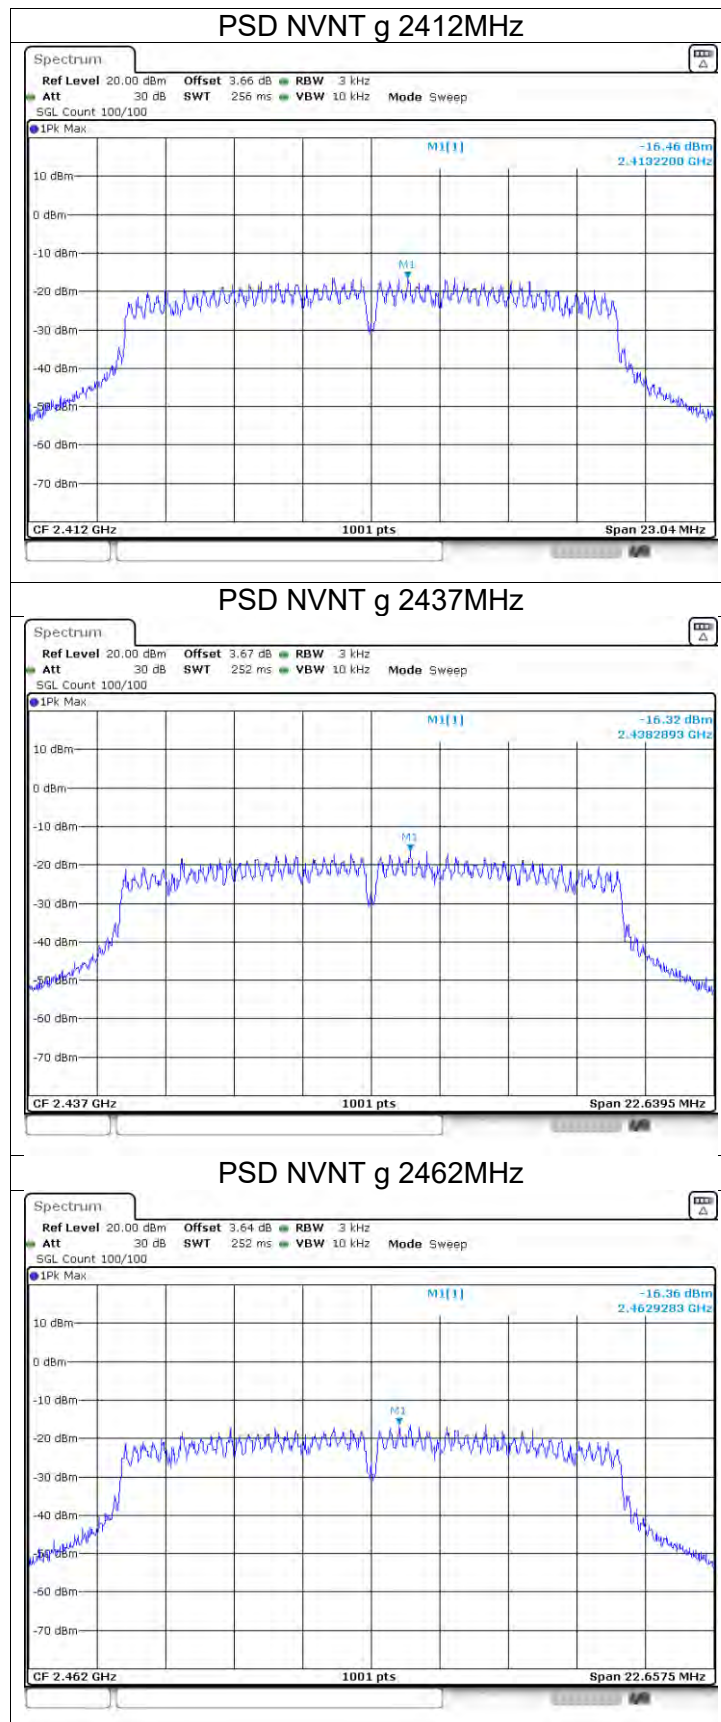


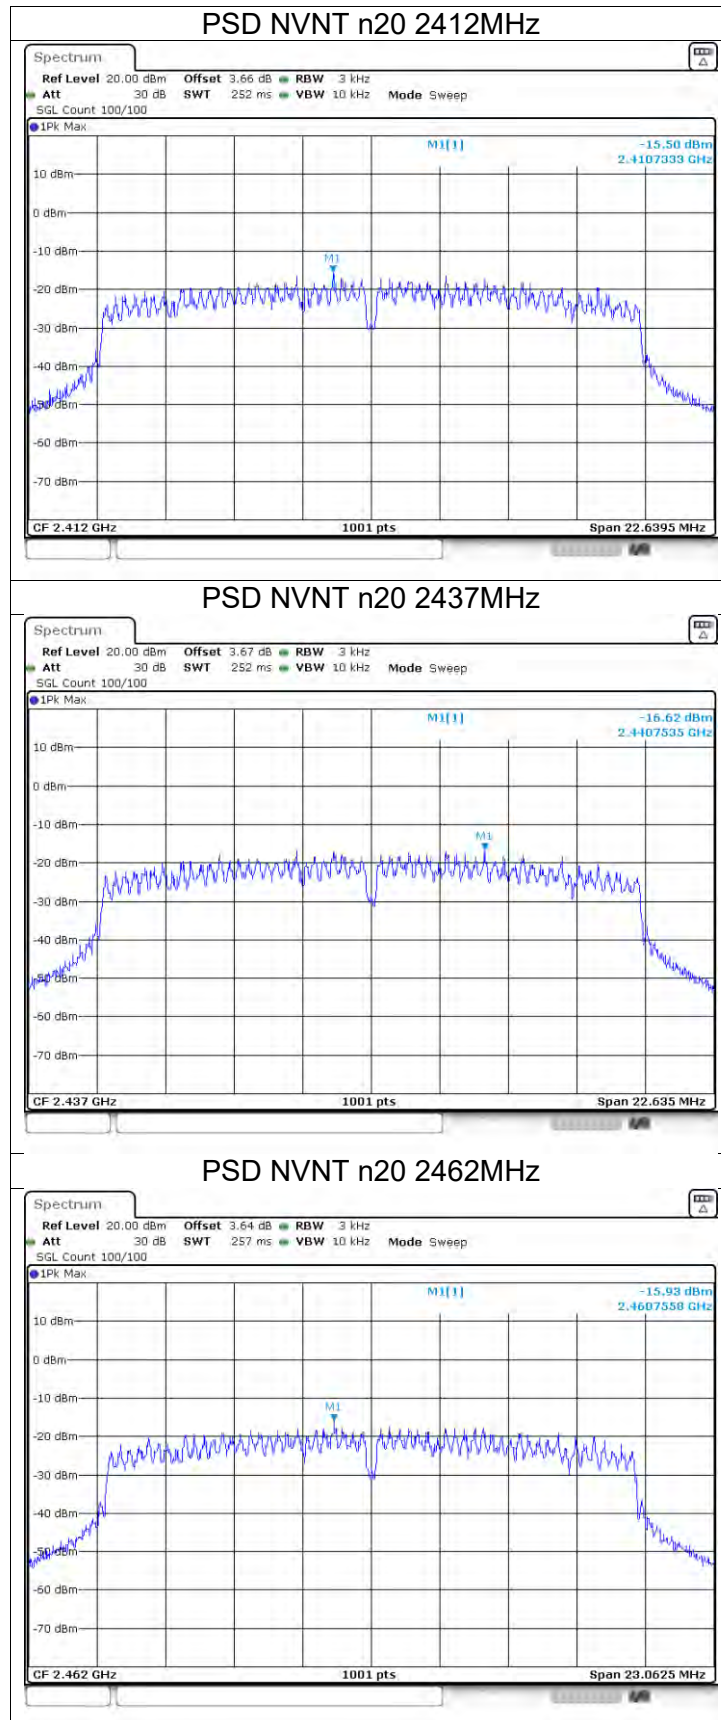




Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-46.65	-20	Pass
NVNT	b	2462	-51.14	-20	Pass
NVNT	g	2412	-34.27	-20	Pass
NVNT	g	2462	-46.5	-20	Pass
NVNT	n20	2412	-35.23	-20	Pass
NVNT	n20	2462	-46.92	-20	Pass

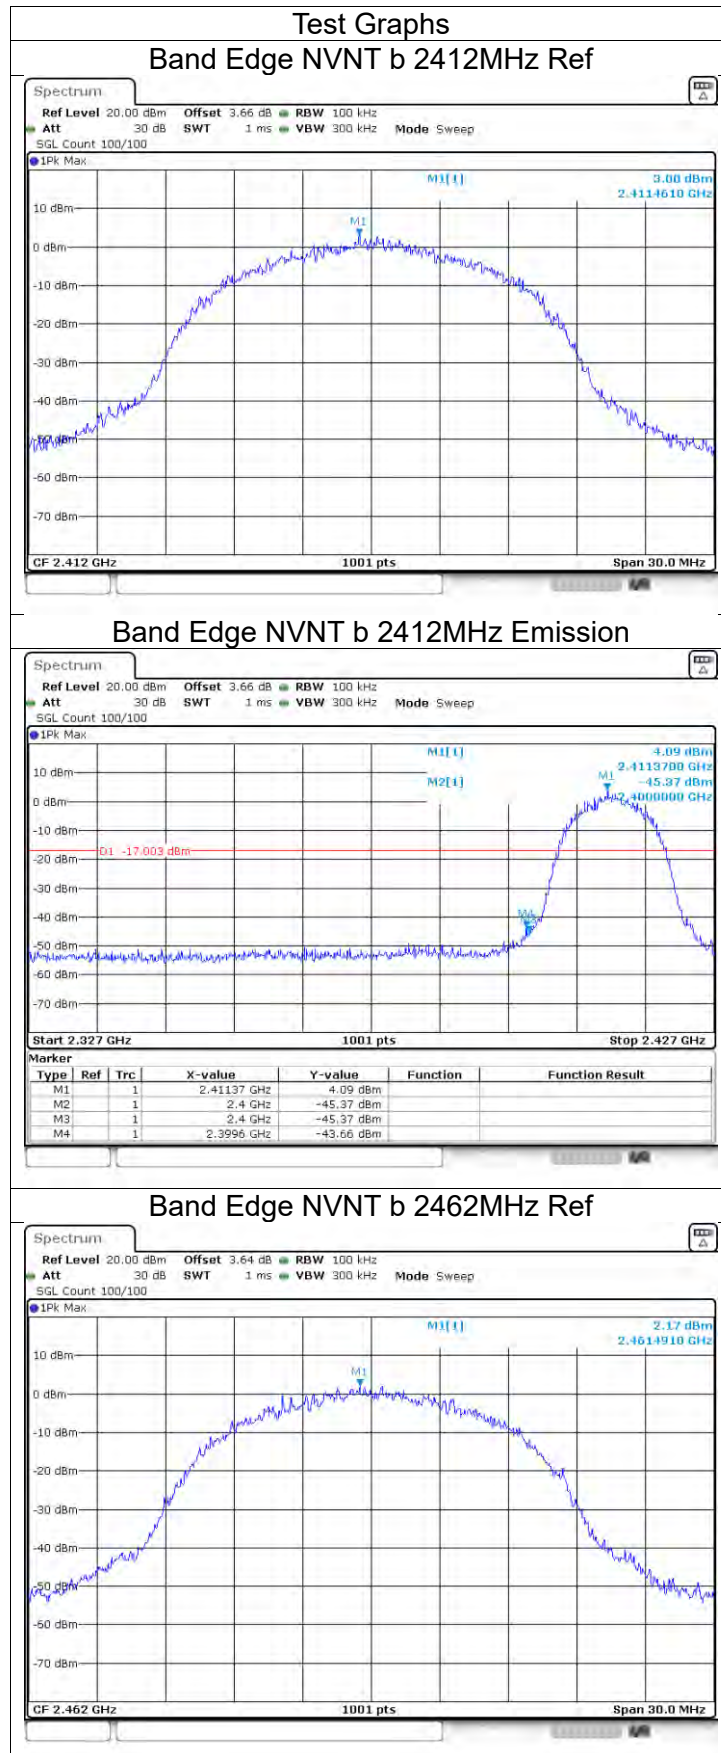





Band Edge NVNT b 2462MHz Emission

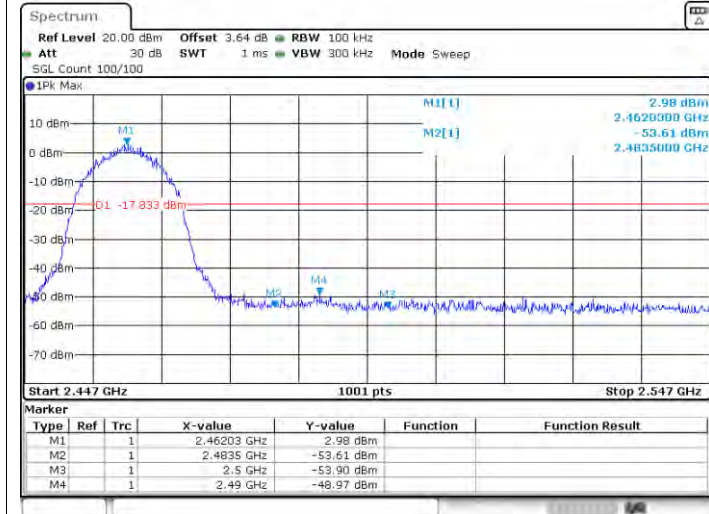

Band Edge NVNT g 2412MHz Ref

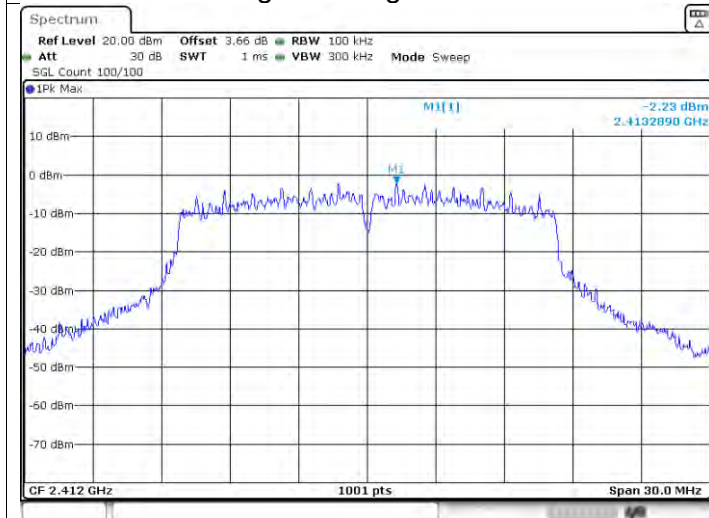


Band Edge NVNT g 2412MHz Emission

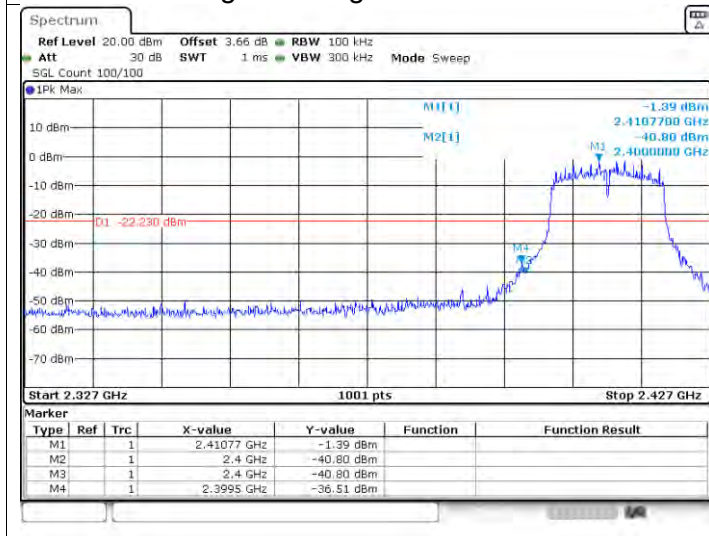





Band Edge NVNT g 2462MHz Ref

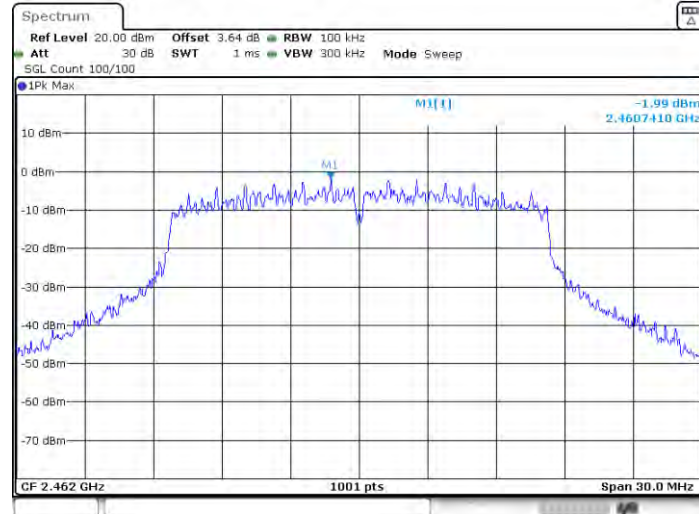

Band Edge NVNT g 2462MHz Emission

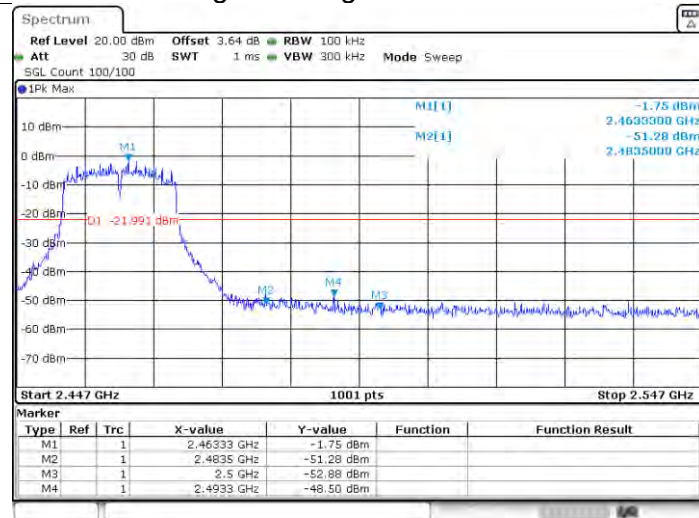


Band Edge NVNT n20 2412MHz Ref

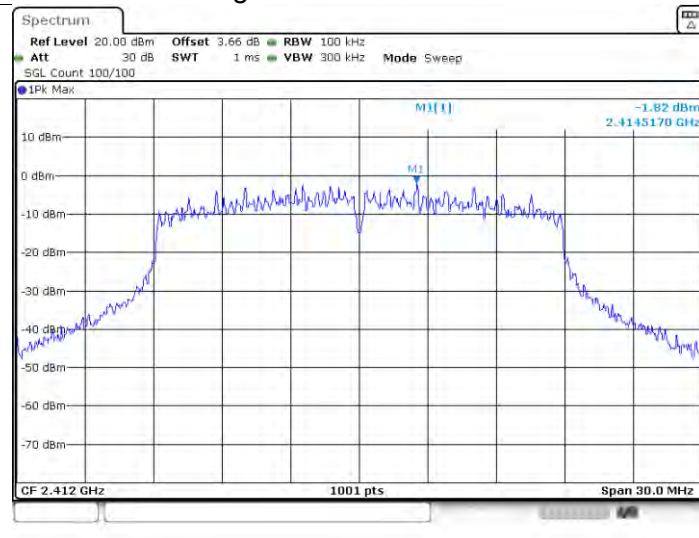





Band Edge NVNT n20 2412MHz Emission

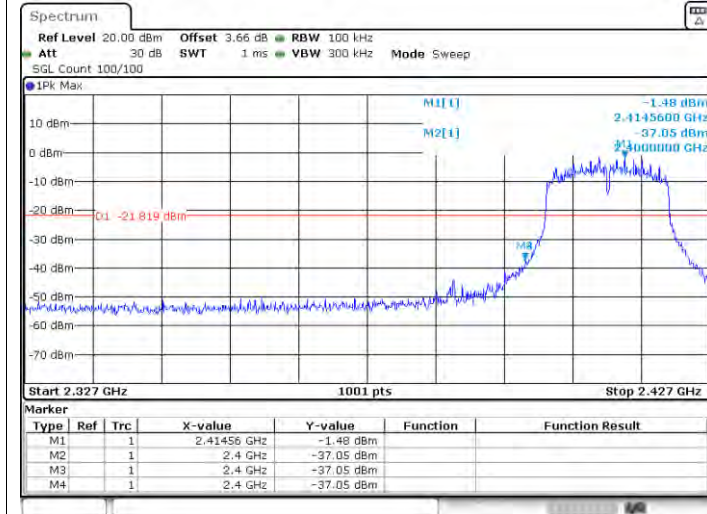

Band Edge NVNT n20 2462MHz Ref

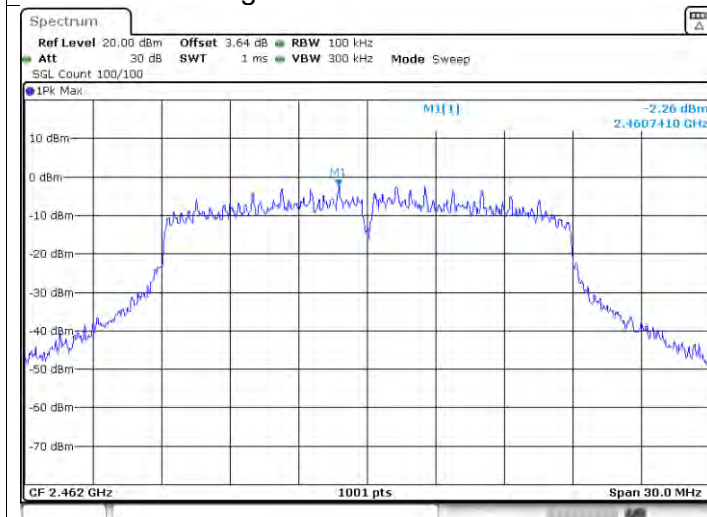


Band Edge NVNT n20 2462MHz Emission

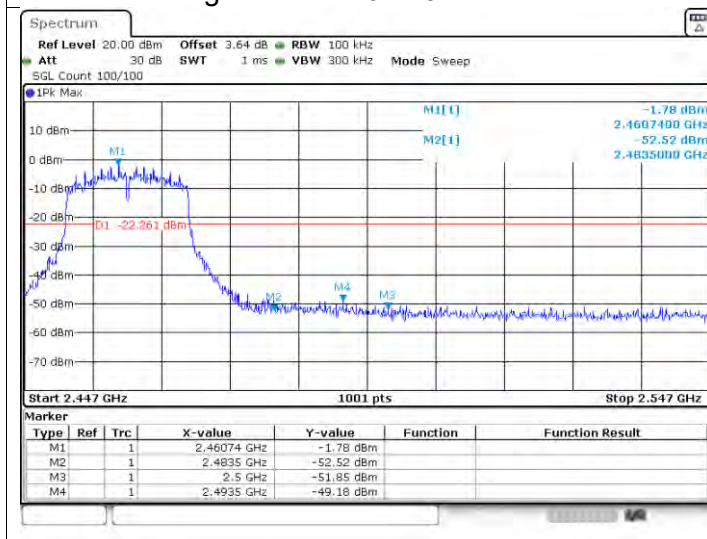




Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-34.79	-20	Pass
NVNT	b	2437	-34.13	-20	Pass
NVNT	b	2462	-33.83	-20	Pass
NVNT	g	2412	-29.84	-20	Pass
NVNT	g	2437	-29.54	-20	Pass
NVNT	g	2462	-29.6	-20	Pass
NVNT	n20	2412	-29.68	-20	Pass
NVNT	n20	2437	-28.39	-20	Pass
NVNT	n20	2462	-28.5	-20	Pass

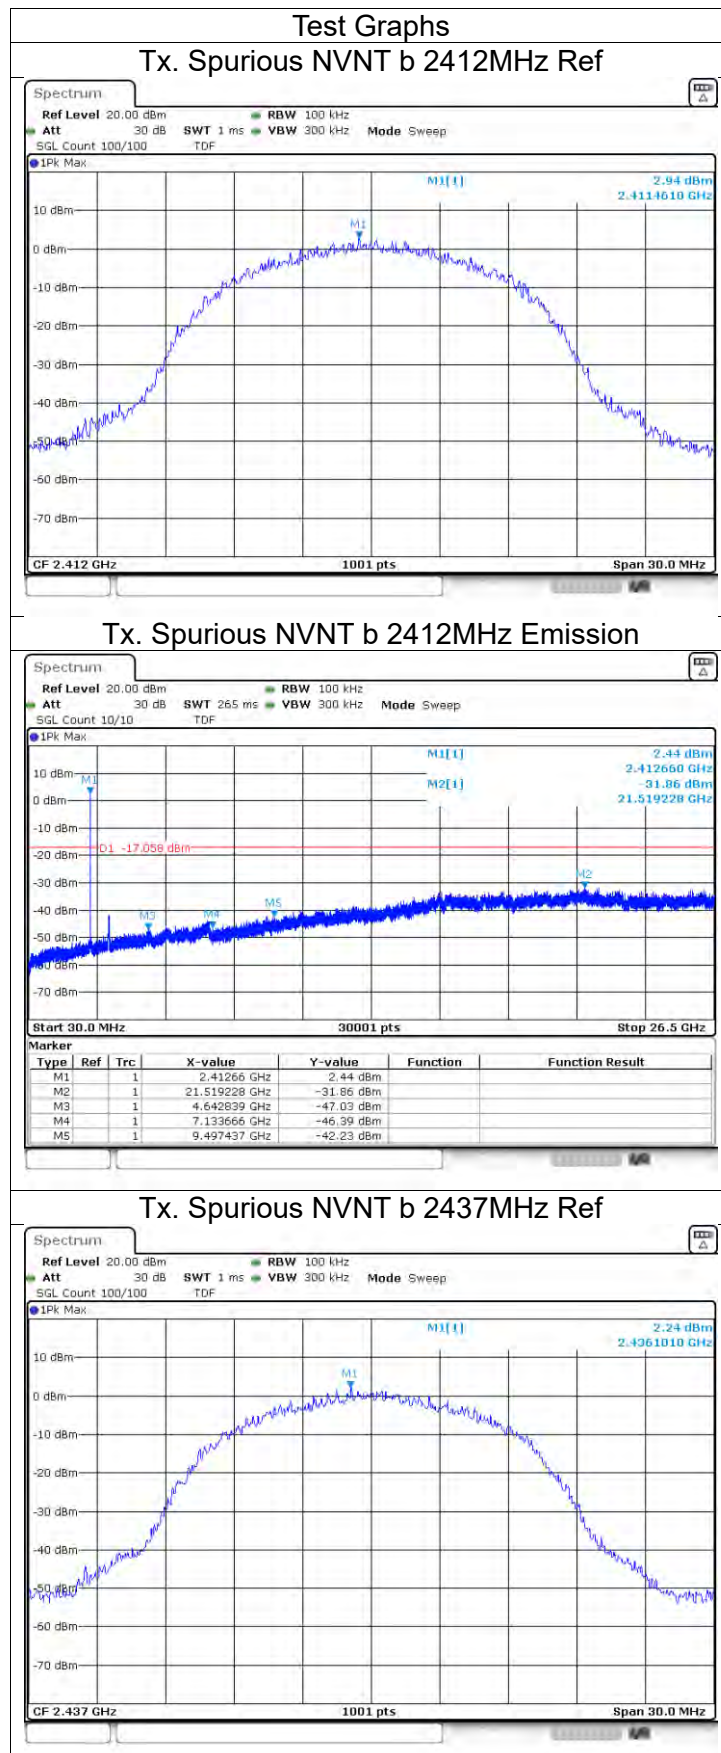





Tx. Spurious NVNT b 2437MHz Emission

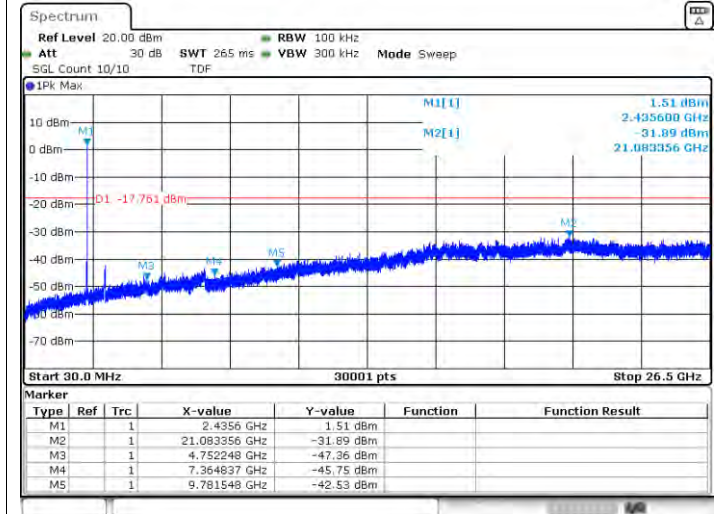

Tx. Spurious NVNT b 2462MHz Ref

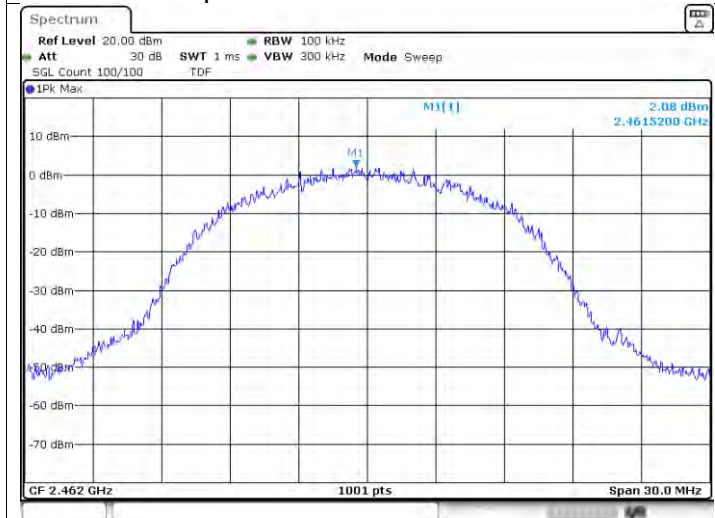


Tx. Spurious NVNT b 2462MHz Emission

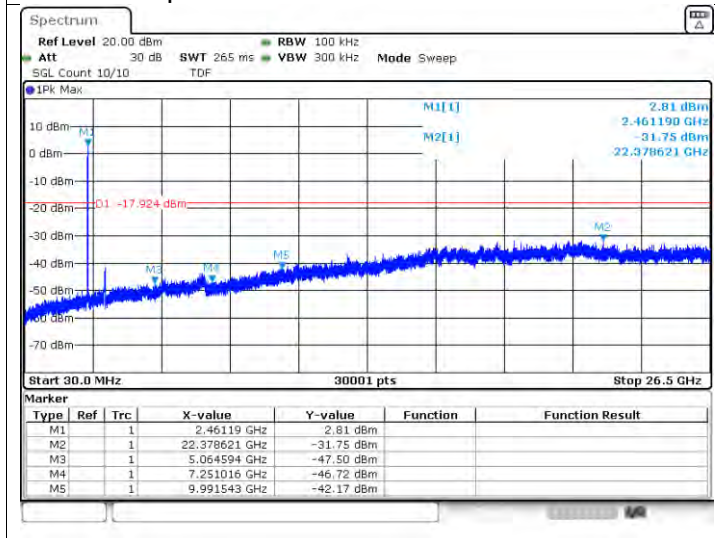





Tx. Spurious NVNT g 2412MHz Ref

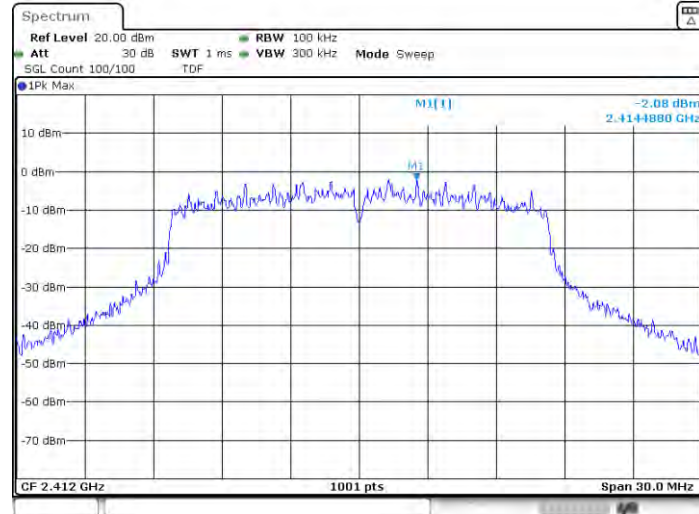

Tx. Spurious NVNT g 2412MHz Emission

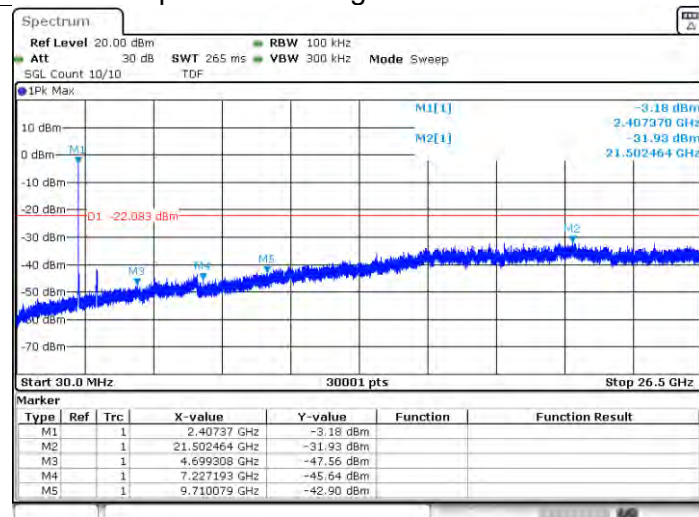


Tx. Spurious NVNT g 2437MHz Ref

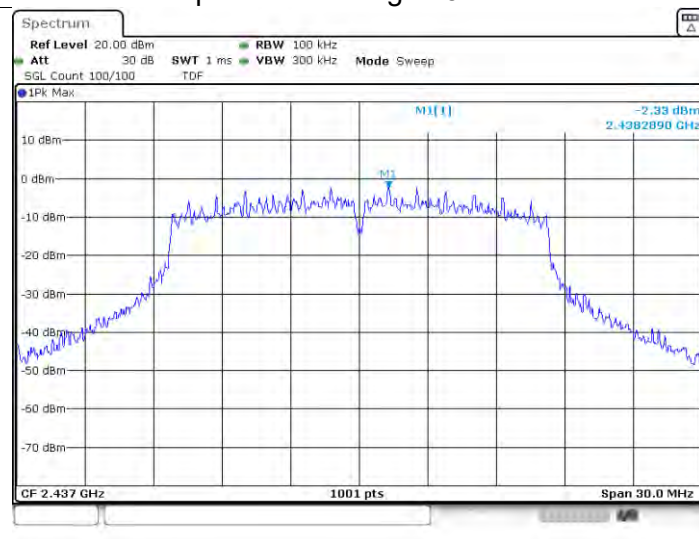





Tx. Spurious NVNT g 2437MHz Emission

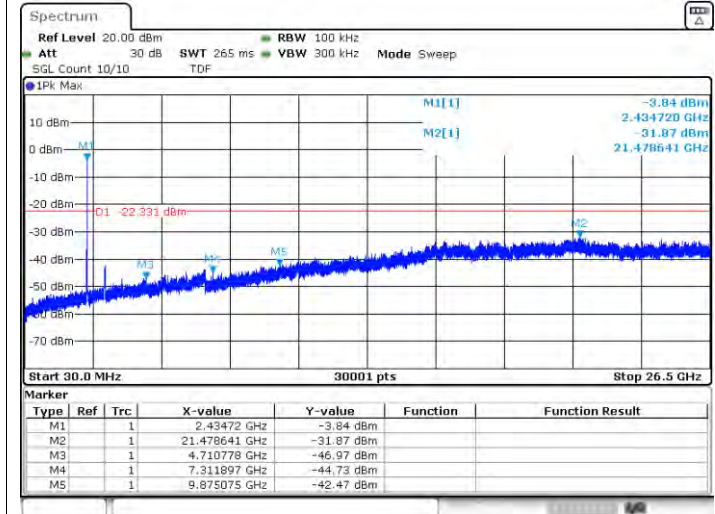

Tx. Spurious NVNT g 2462MHz Ref

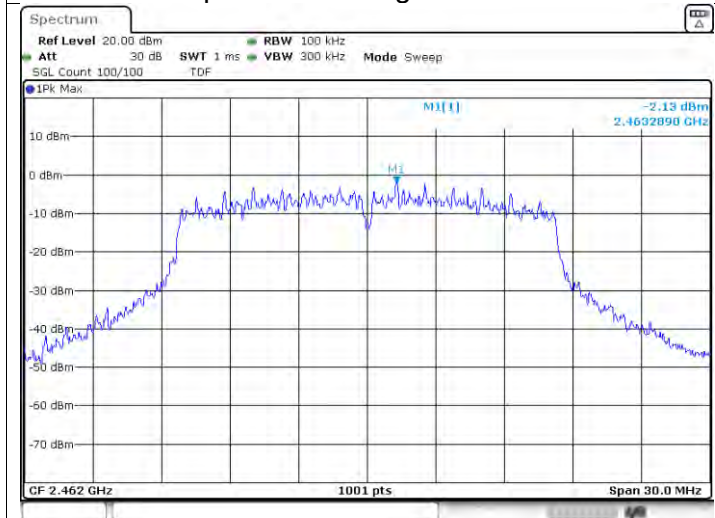


Tx. Spurious NVNT g 2462MHz Emission

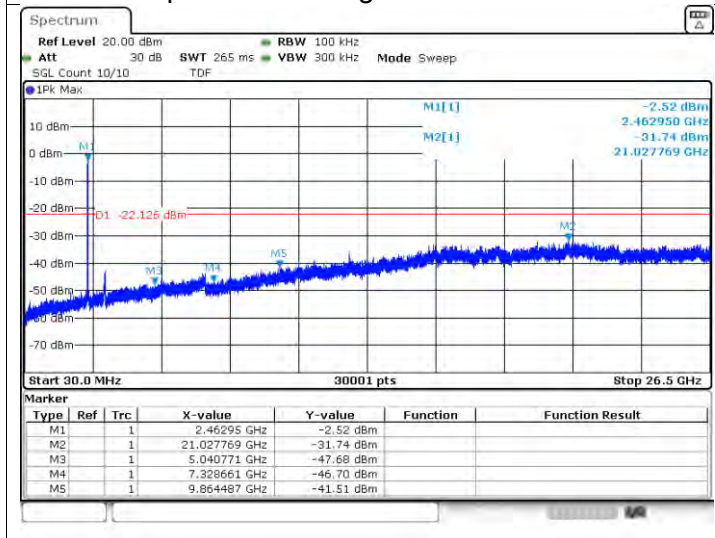





Tx. Spurious NVNT n20 2412MHz Ref

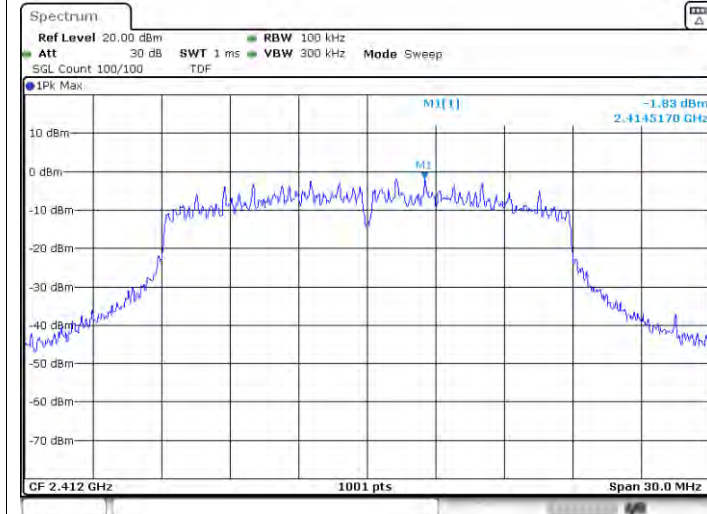

Tx. Spurious NVNT n20 2412MHz Emission

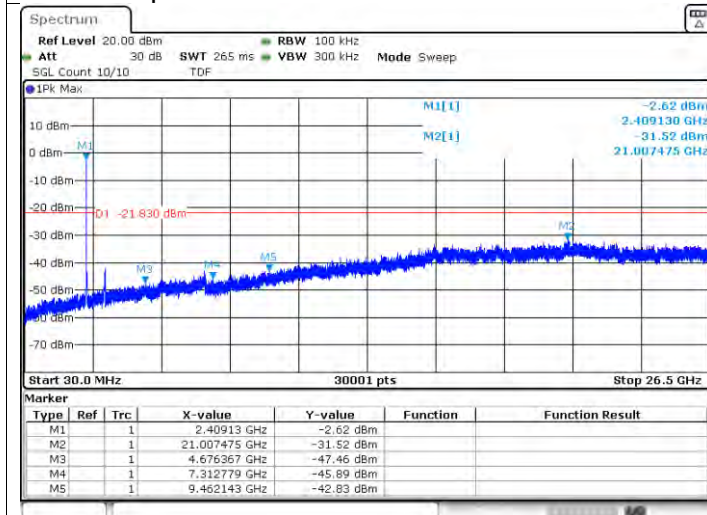


Tx. Spurious NVNT n20 2437MHz Ref

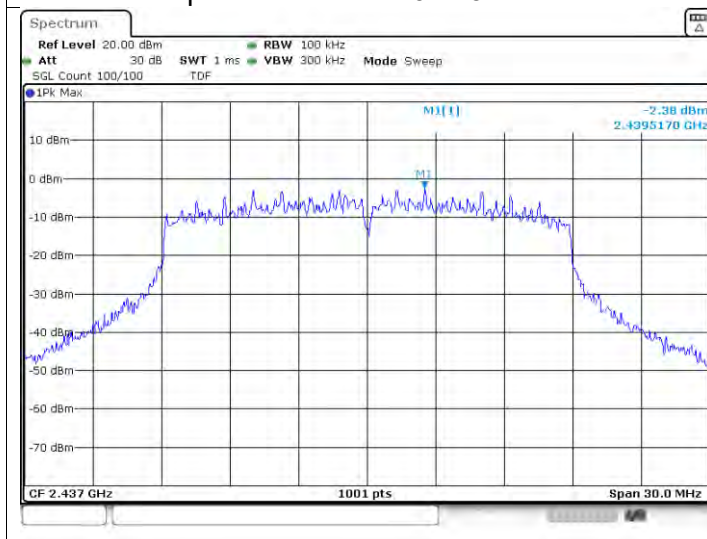





Tx. Spurious NVNT n20 2437MHz Emission

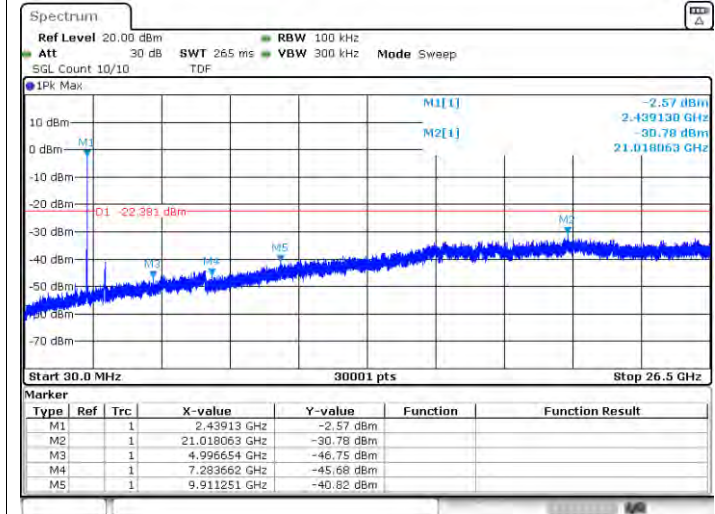

Tx. Spurious NVNT n20 2462MHz Ref

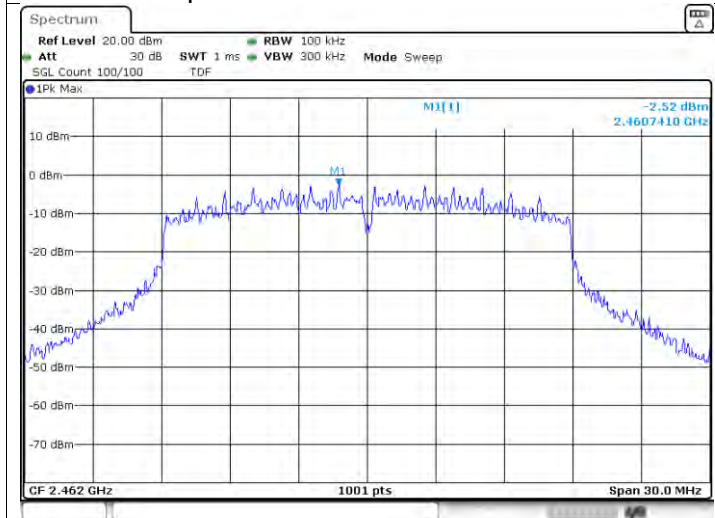

Tx. Spurious NVNT n20 2462MHz Emission

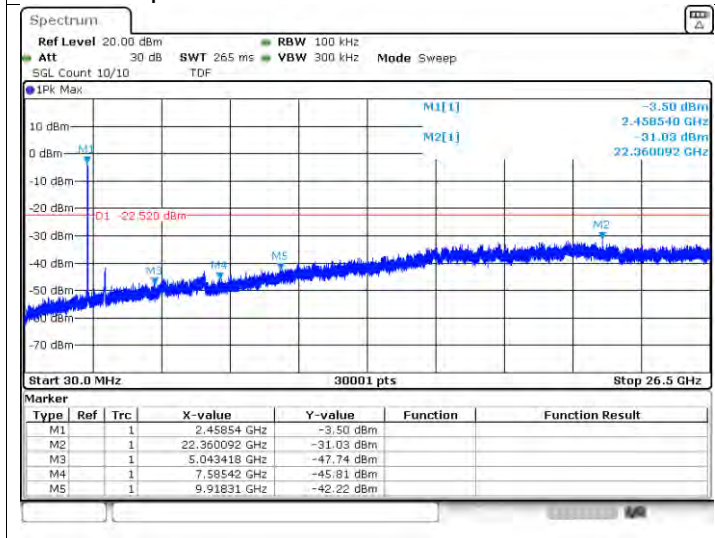



APPENDIX II - MEASUREMENT PHOTOS

Note: Please see the attached RF_Test Setup photos for FCC ID & IC.

※※※※※END OF THE REPORT※※※※※