

Test Plot 1#: GSM 850 Mid Body Back**DUT: Tablet PC; Type: ENV TAB GO PRO; Serial: 35I9-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.203$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.47, 9.47, 9.47) @836.6 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.293 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.454 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.131 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 46.6%

Maximum value of SAR (measured) = 0.388 W/kg

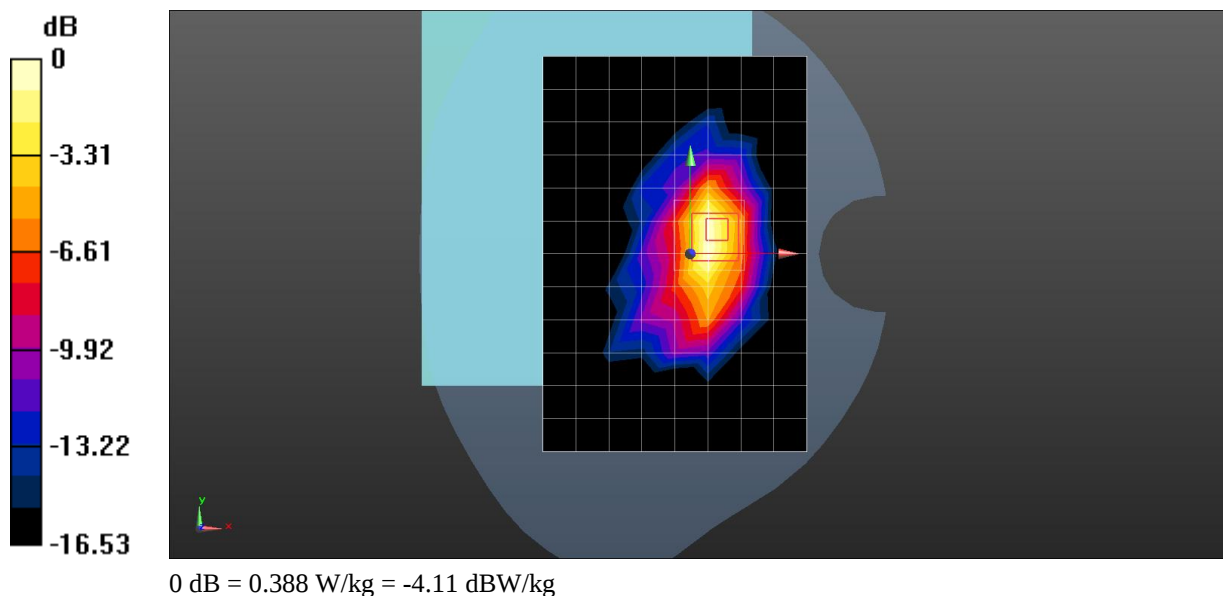

Test Plot 2#: GSM 1900 Low Body Back**DUT: Tablet PC; Type: ENV TAB GO PRO; Serial: 35I9-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.452 \text{ S/m}$; $\epsilon_r = 40.137$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1850.2 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.75 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.666 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.664 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 74.2%

Maximum value of SAR (measured) = 1.44 W/kg

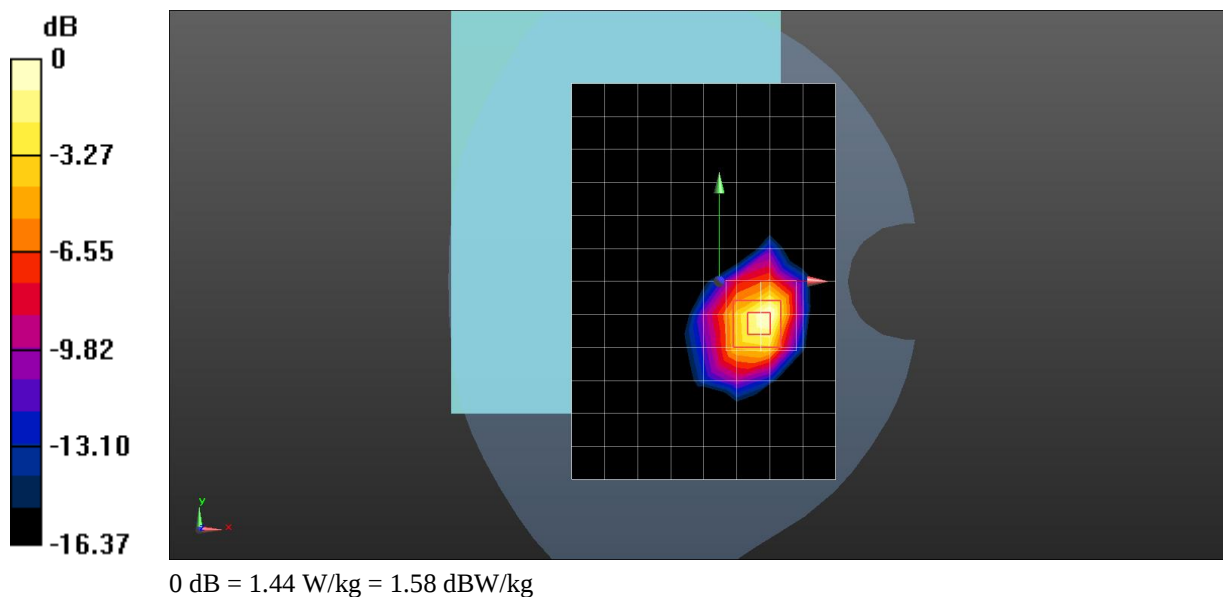

Test Plot 3#: WCDMA Band 2 Mid Body Back**DUT: Tablet PC; Type: ENV TAB GO PRO; Serial: 35I9-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.444$ S/m; $\epsilon_r = 41.064$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.447 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.547 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.274 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 69%

Maximum value of SAR (measured) = 0.561 W/kg

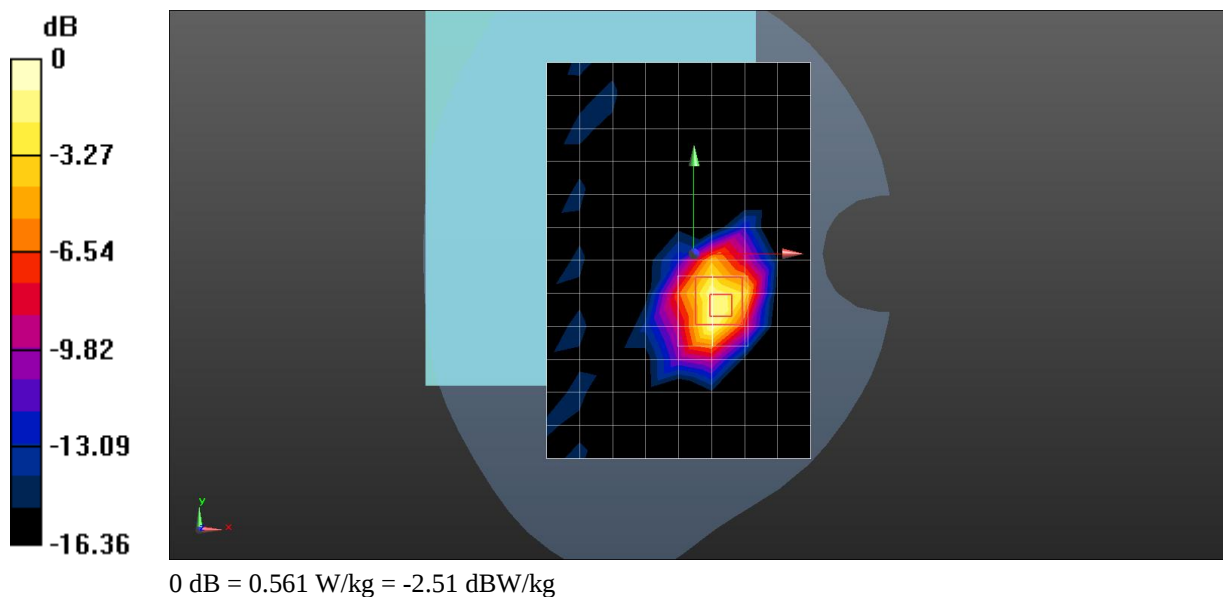

Test Plot 4#: WCDMA Band 5 Mid Body Back**DUT: Tablet PC; Type: ENV TAB GO PRO; Serial: 35I9-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.203$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.47, 9.47, 9.47) @836.6 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.713 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.806 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.335 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 0.787 W/kg

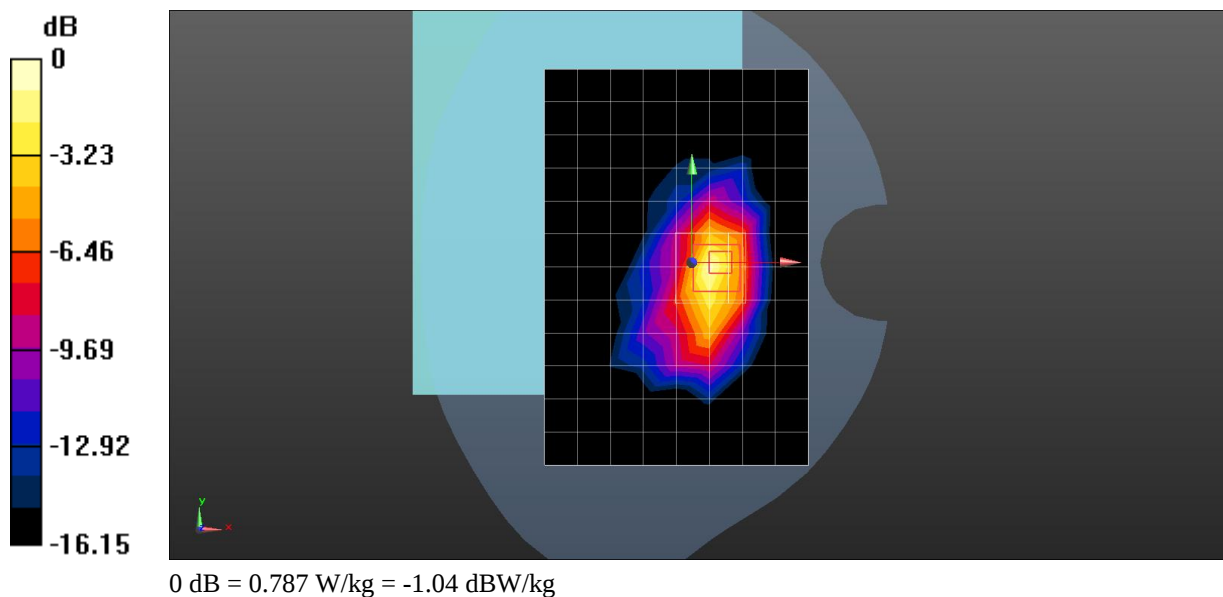

Test Plot 5#: LTE Band 2 1RB Low Body Back**DUT: Tablet PC; Type: ENV TAB GO PRO; Serial: 35I9-1**

Communication System: Generic FDD-LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.449$ S/m; $\epsilon_r = 40.442$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1860 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.897 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.397 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.788 W/kg; SAR(10 g) = 0.415 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 71.8%

Maximum value of SAR (measured) = 0.887 W/kg

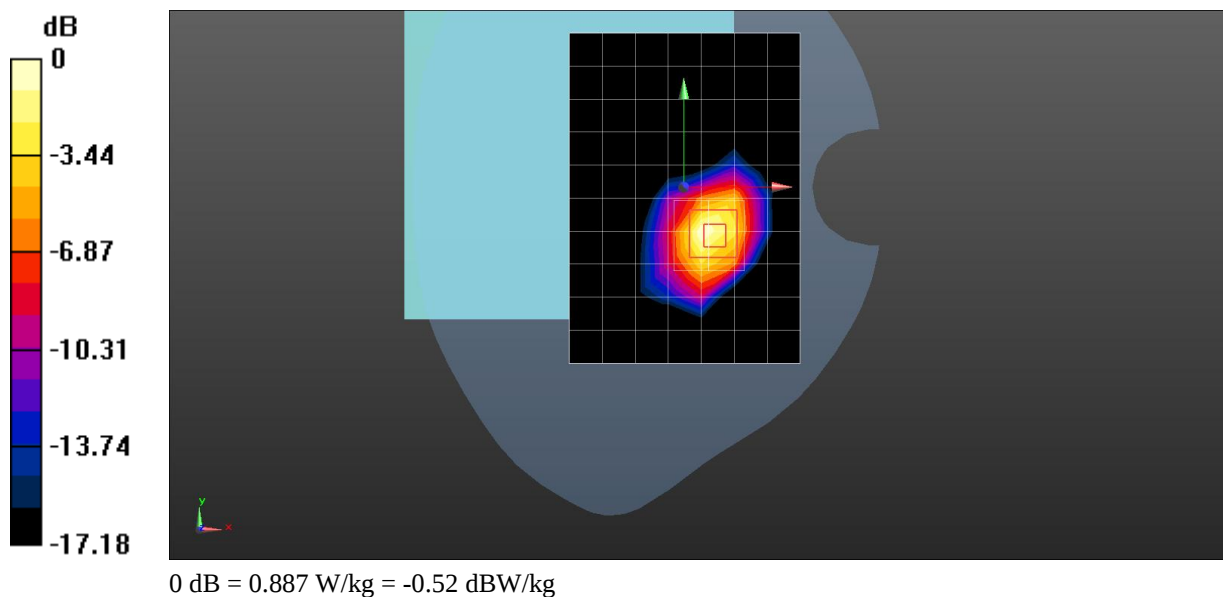

Test Plot 6#: LTE Band 4 1RB Mid Body Back**DUT: Tablet PC; Type: ENV TAB GO PRO; Serial: 35I9-1**

Communication System: Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.318$ S/m; $\epsilon_r = 41.109$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(8, 8, 8) @1732.5 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.65 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.615 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.713 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.7%

Maximum value of SAR (measured) = 1.65 W/kg

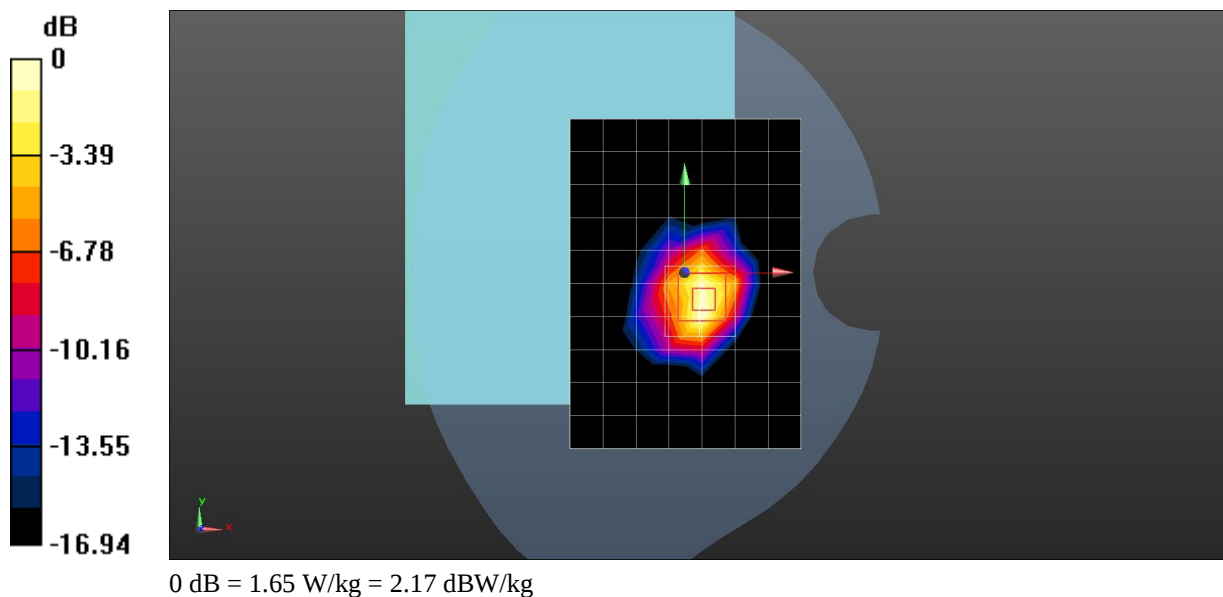

Test Plot 7#: LTE Band 7 1RB Mid Body Back**DUT: Tablet PC; Type: ENV TAB GO PRO; Serial: 35I9-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 40.128$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.2, 7.2, 7.2) @2535 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (13x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.103 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.254 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.039 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 75.7%

Maximum value of SAR (measured) = 0.0938 W/kg

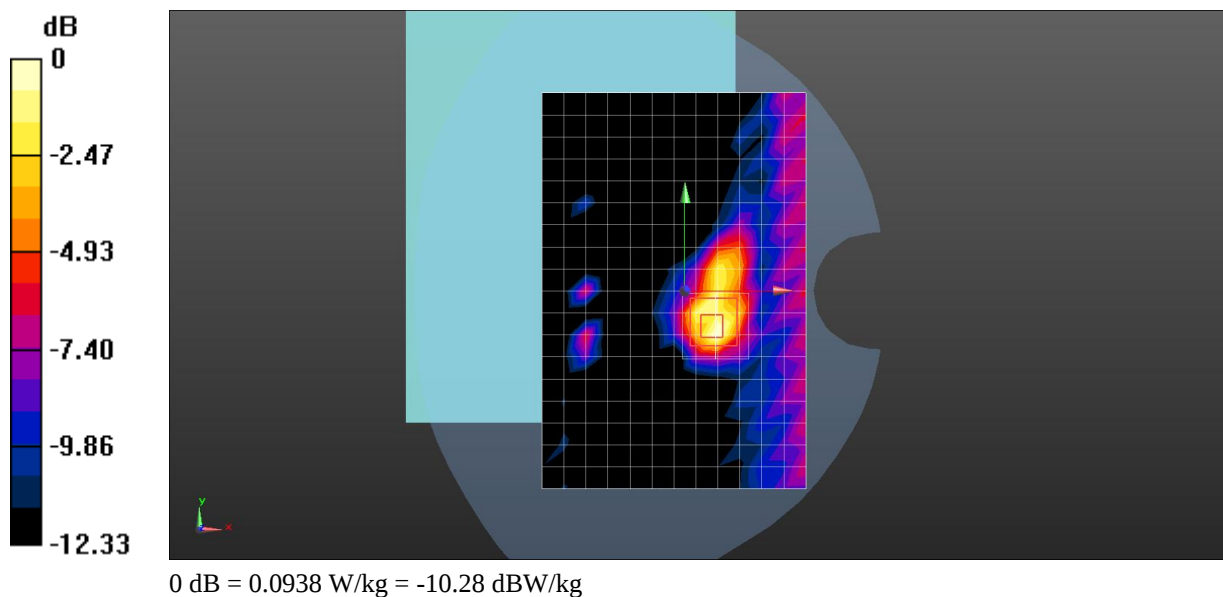

Test Plot 8#: WLAN 802.11b Mid Body Back**DUT: Tablet PC; Type: ENV TAB GO PRO; Serial: 35I9-1**


Communication System: 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1.021

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.83 \text{ S/m}$; $\epsilon_r = 40.639$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.2, 7.2, 7.2) @2437 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

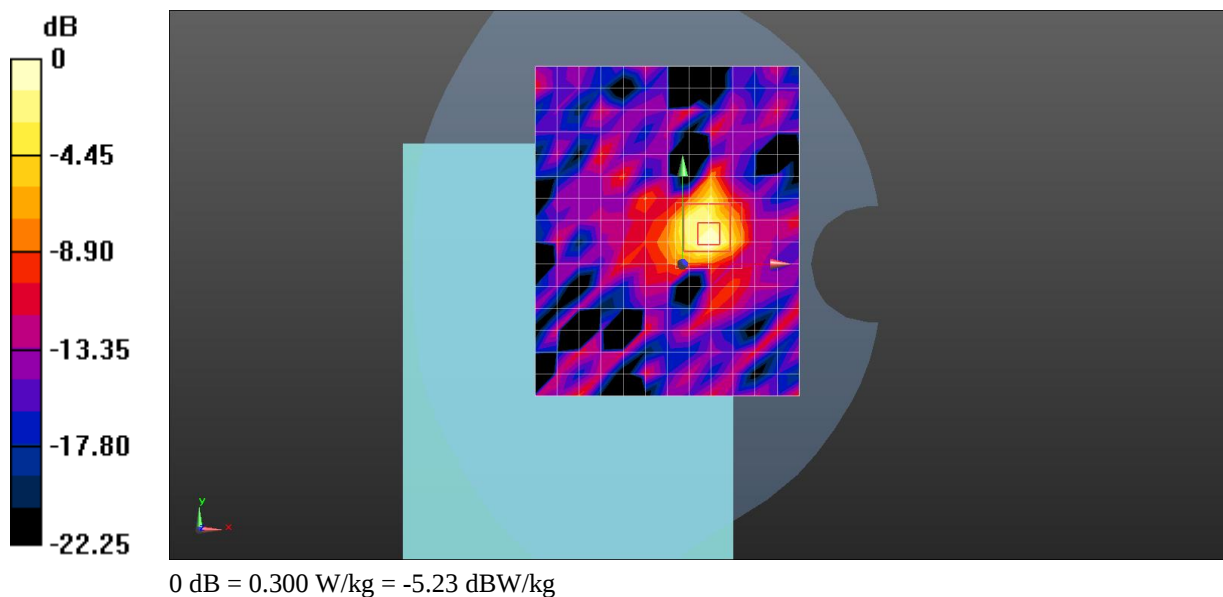Area Scan (13x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.397 W/kg **Zoom Scan (7x7x7) /Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.481 V/m ; Power Drift = 0.15 dB Peak SAR (extrapolated) = 0.534 W/kg **SAR(1 g) = 0.227 W/kg ; SAR(10 g) = 0.084 W/kg** Smallest distance from peaks to all points 3 dB below = 6 mm Ratio of SAR at M2 to SAR at M1 = 65.5% Maximum value of SAR (measured) = 0.300 W/kg 

Test Plot 9#: WLAN 5.2G 802.11a Mid Body Back**DUT: Tablet PC; Type: ENV TAB GO PRO; Serial: 35I9-1**

Communication System: 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.126
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.762$ S/m; $\epsilon_r = 37.351$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(5.36, 5.36, 5.36) @5200 MHz; Calibrated: 2024/10/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (13x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.257 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.5420 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.93 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 0.370 W/kg

