



天线规格
Antenna Specification

Electrical Properties	
Frequency	59.0–64.0GHz
Impedance	50 Ohm Nomial
VSWR	2.0
Gain	6dBi
Radiation	sector beam
Polarization	Linear
Physical Properties	
Connector	None
Cable Type	None
Cable Length	None
Cable Color	None
Operating Temp.	−40℃ ~ +85℃
Storage Temp/Humidity	25±5℃/<70%


Shenzhen Yiqifei Technology Co., Ltd
Room 419, Building 2, Fiber Optic Community, Bagua 3rd Road, Futian District, Shenzhen,
Guangdong Province, China

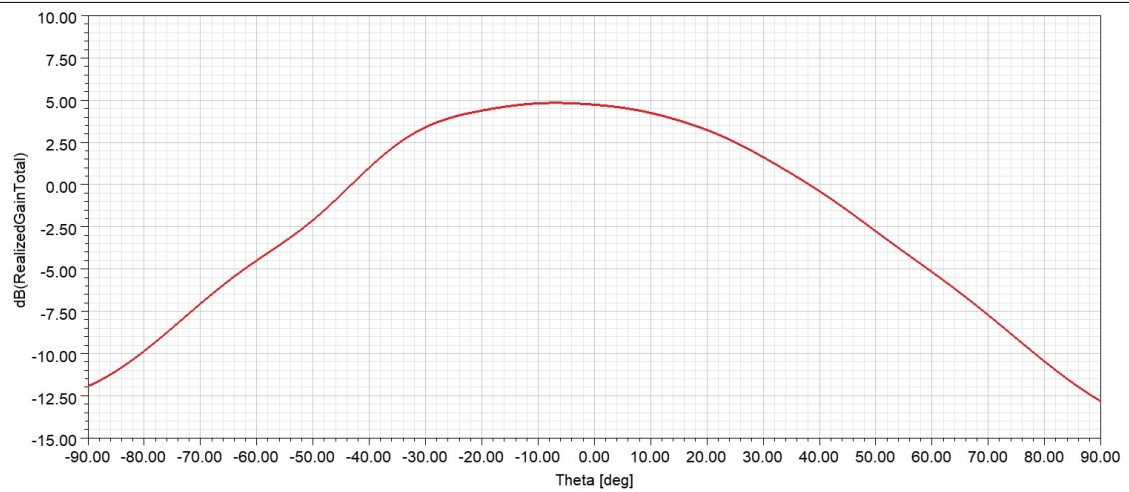


方位面方向图 (TX0) Freq: 59. 0GHz

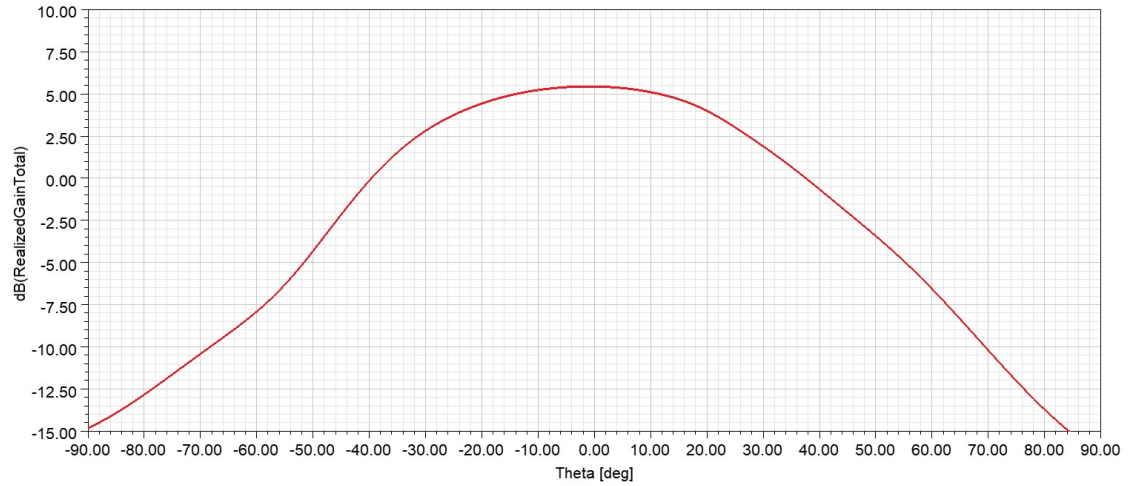


方位面方向图 (TX0) Freq: 61. 0GHz

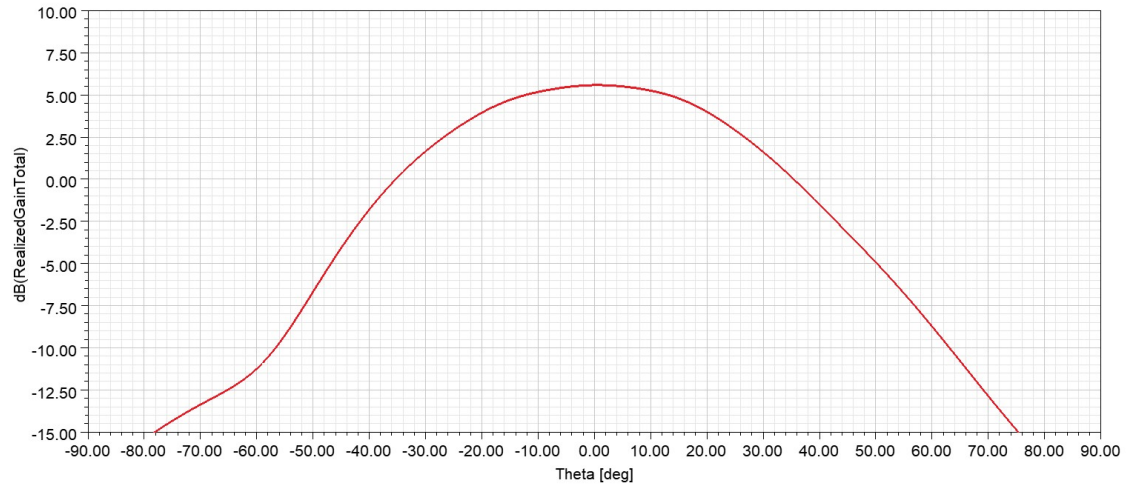


方位面方向图 (TX0) Freq: 62. 0GHz

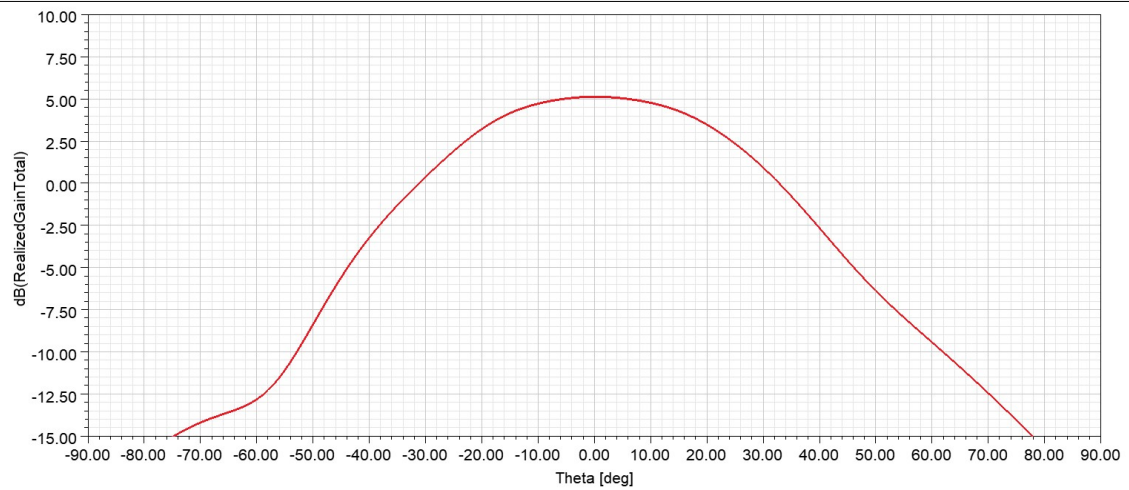


方位面方向图 (TX0) Freq: 63. 0GHz

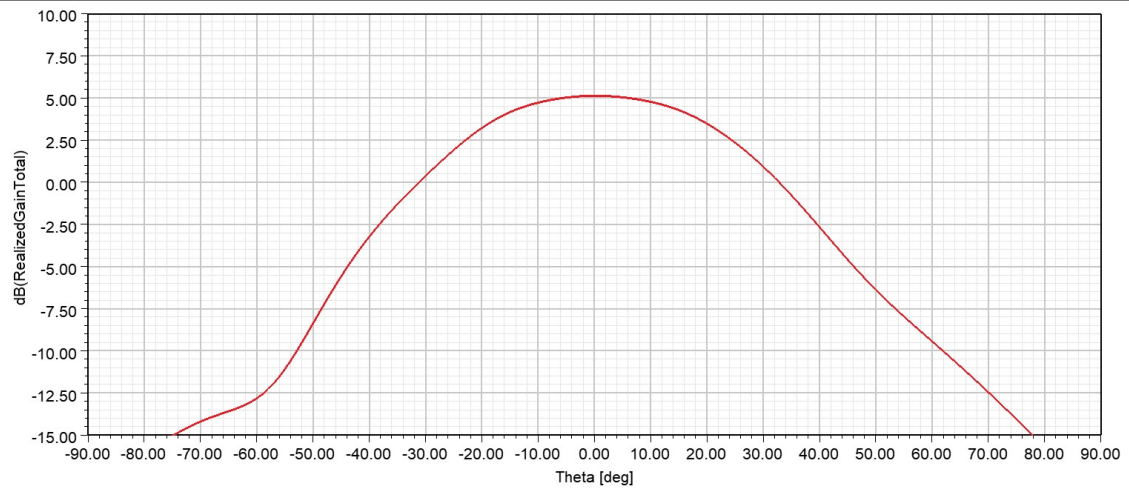


方位面方向图 (TX0) Freq: 64. 0GHz

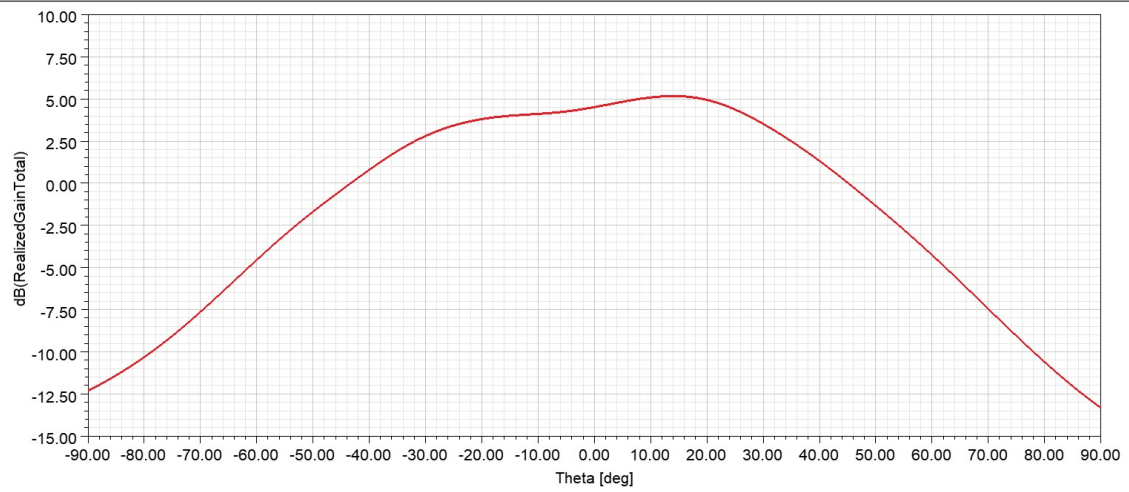


方位面方向图 (TX1) Freq: 60. 0GHz

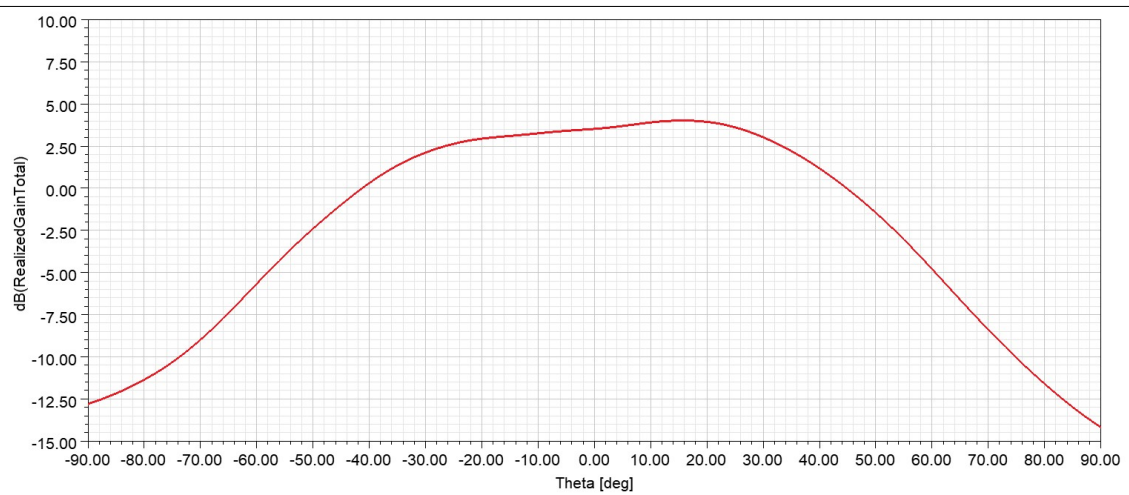


方位面方向图(TX1)Freq:61.0GHz

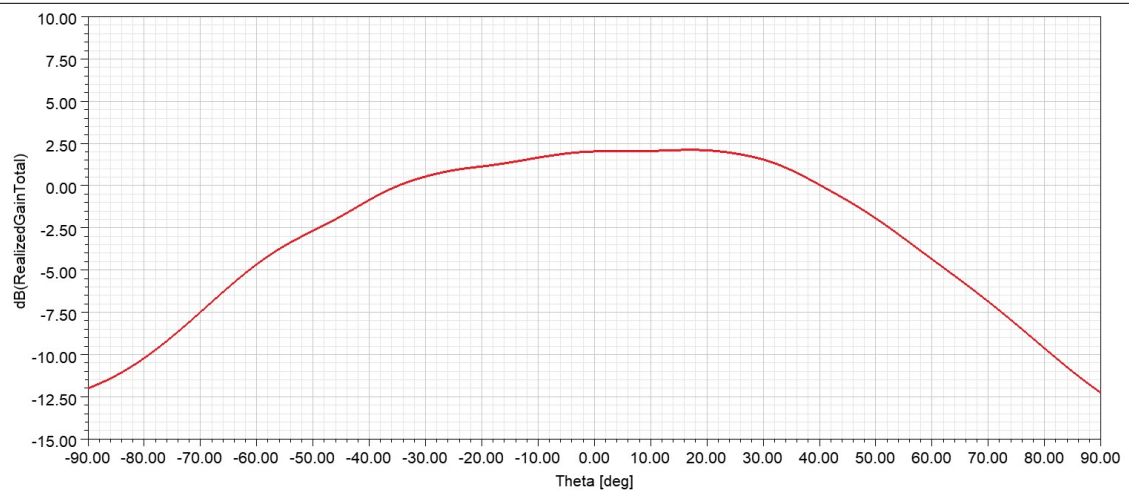


方位面方向图(TX1)Freq:62.0GHz

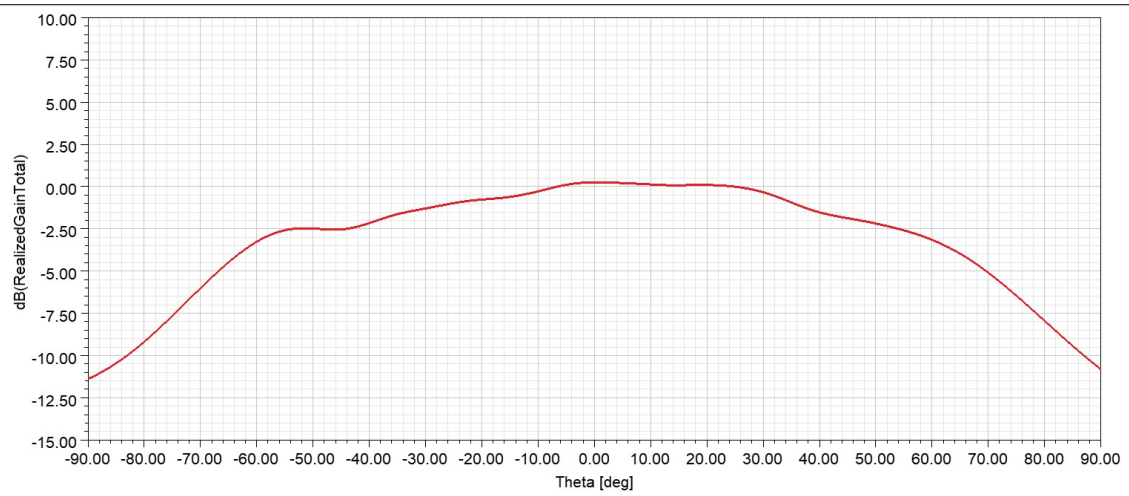


方位面方向图(TX1)Freq:63.0GHz

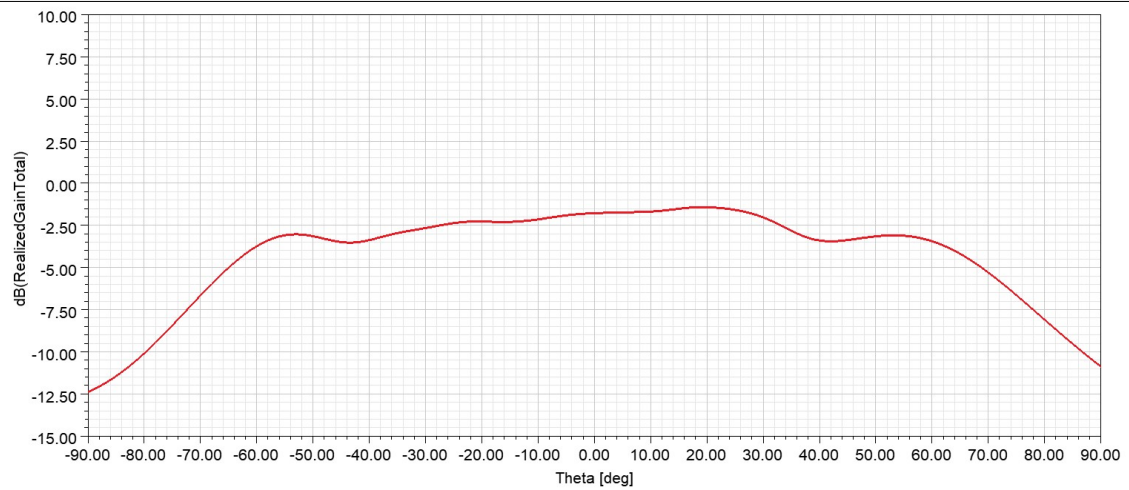


方位面方向图(TX1) Freq: 64. 0GHz

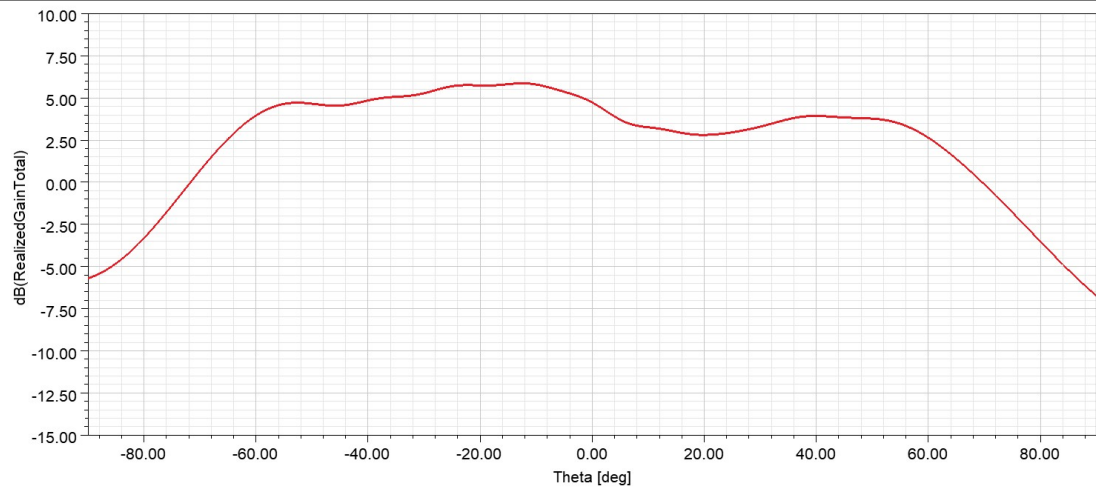


俯仰面方向图(TX0) Freq: 59 GHz

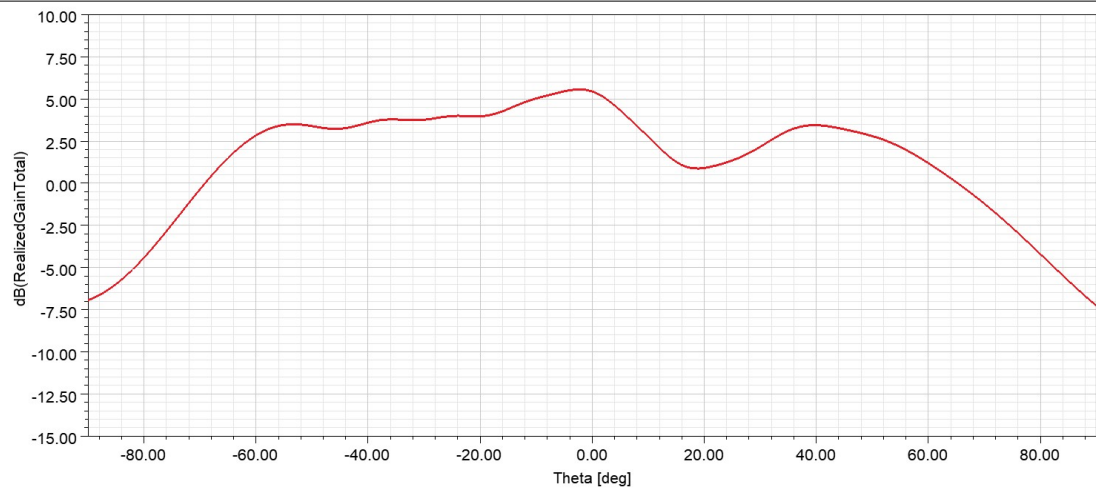


俯仰面方向图(TX0) Freq: 61. 0GHz

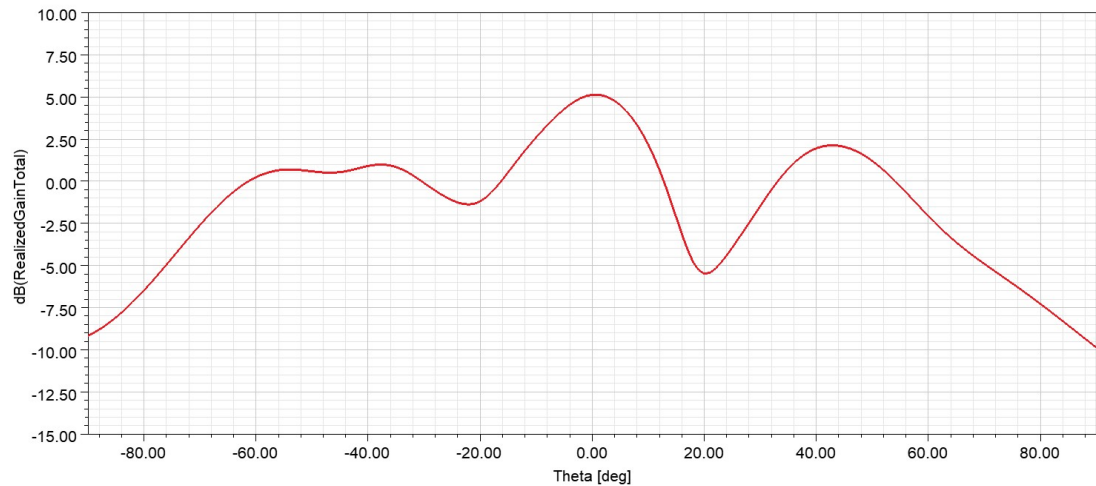


俯仰面向图 (TX0) Freq: 62. 0GHz

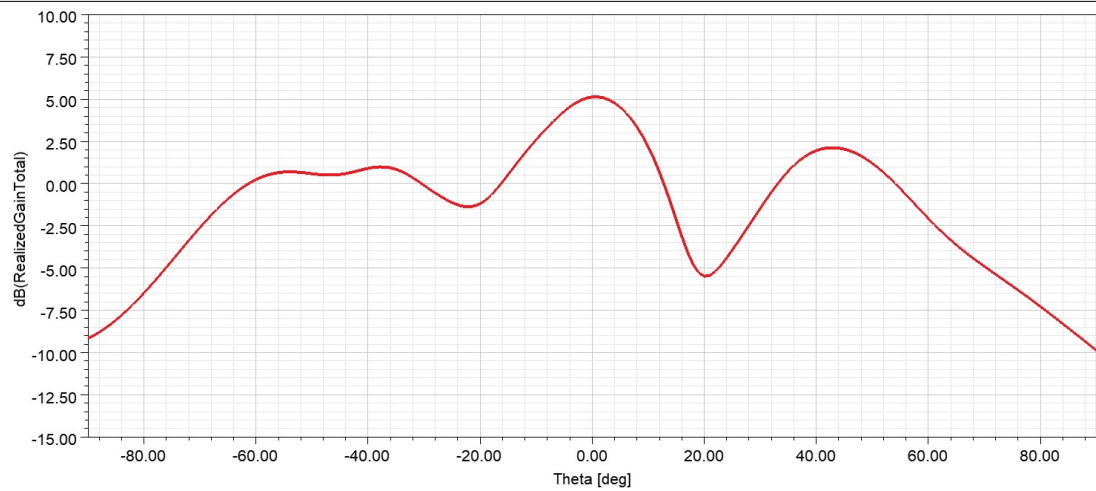


俯仰面方向图 (TX0) Freq: 63. 0GHz

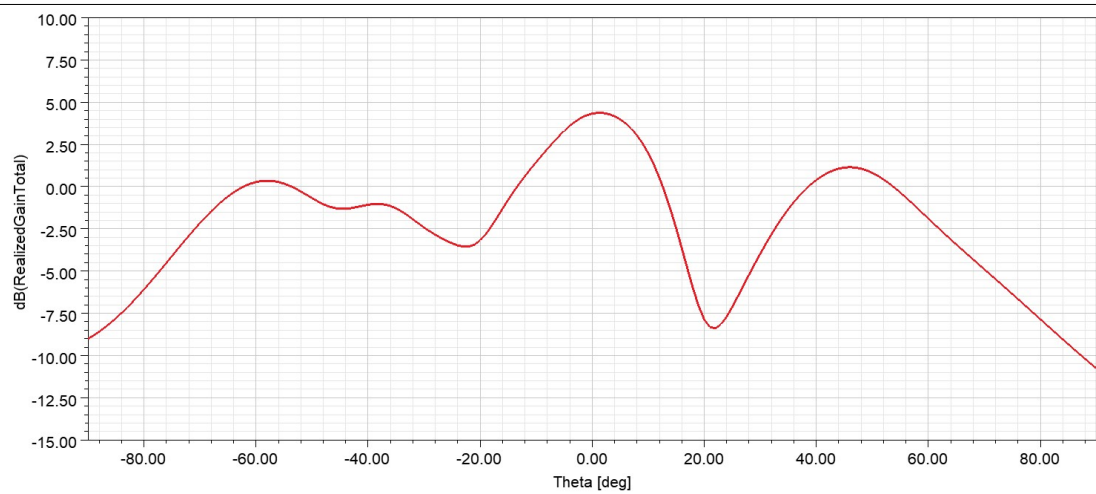


俯仰面方向图 (TX0) Freq: 64. 0GHz

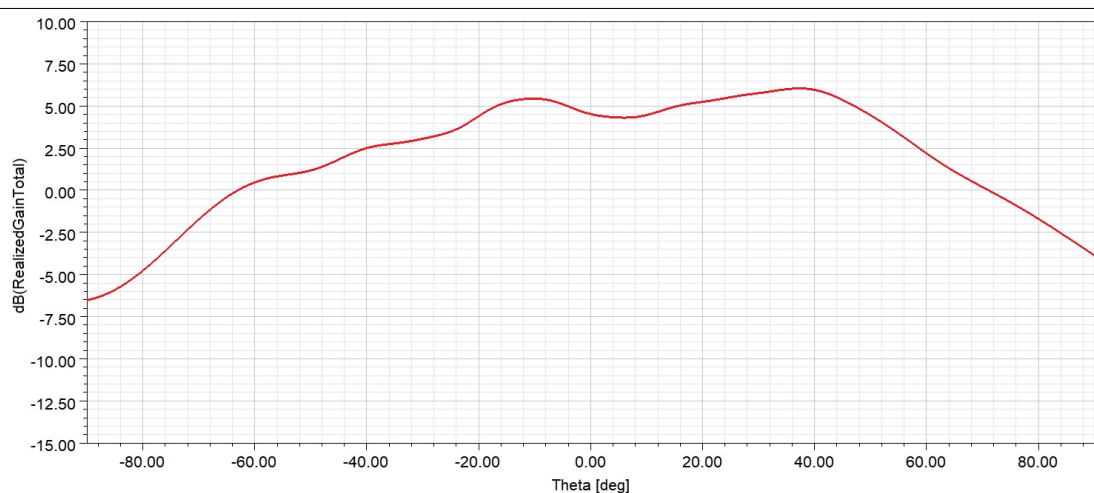


俯仰面方向图 (TX1) Freq: 60. 0GHz

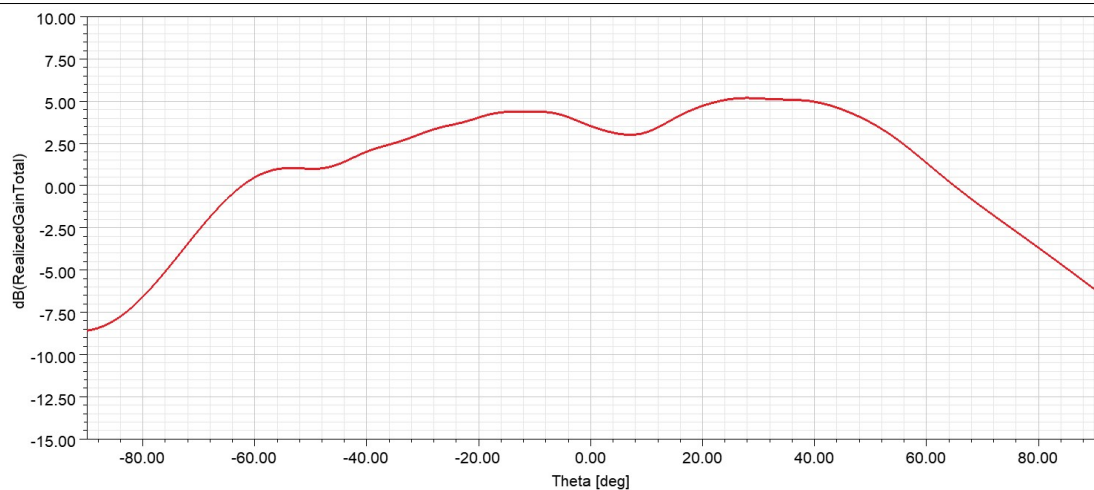


俯仰面方向图 (TX1) Freq: 61. 0GHz

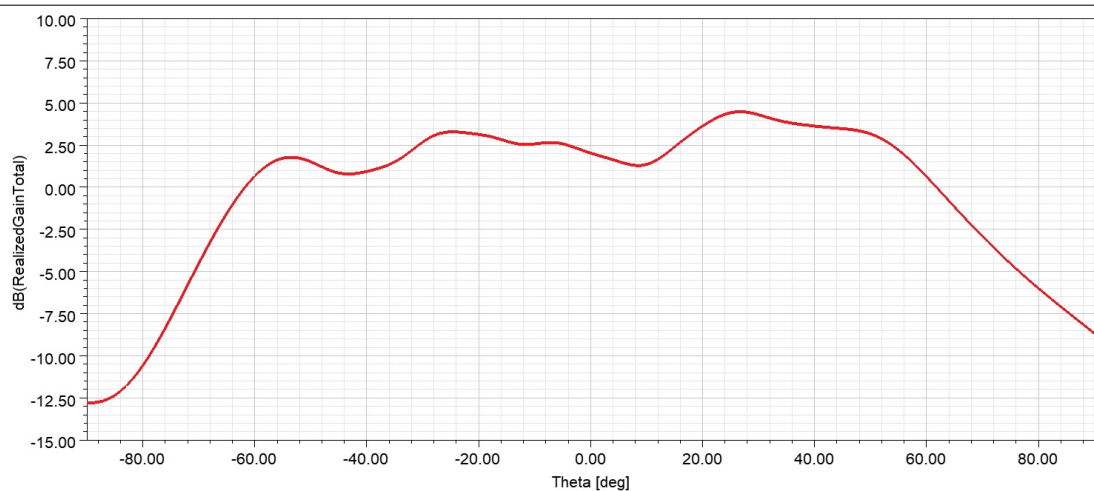

俯仰面方向图 (TX1) Freq: 62. 0GHz

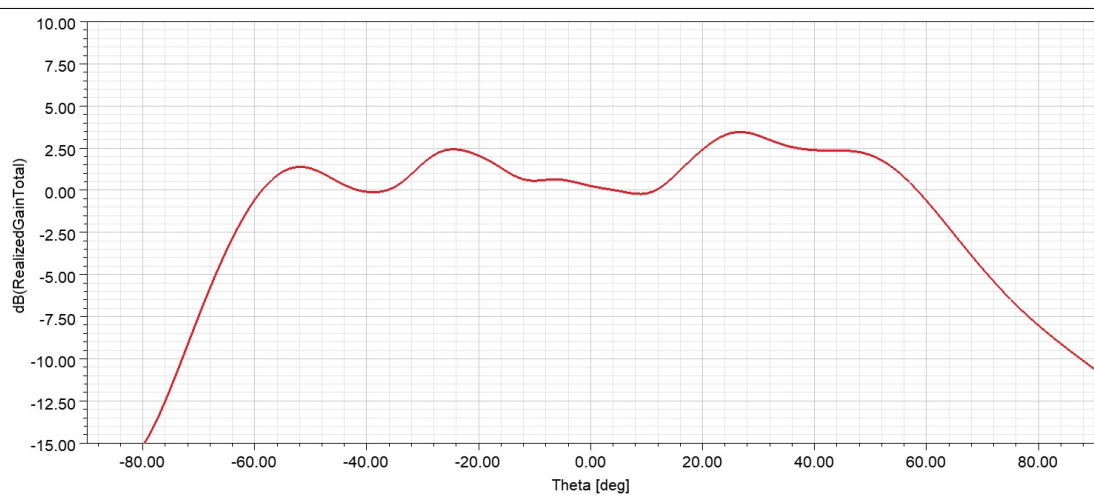


俯仰面方向图 (TX1) Freq: 63. 0GHz

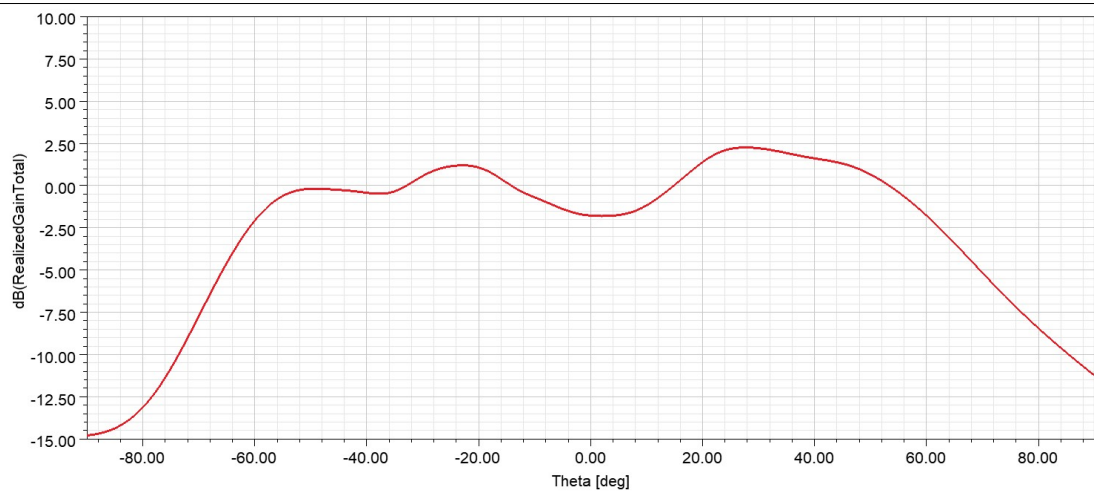

俯仰面方向图 (TX1) Freq: 64. 0GHz

Passive Test For Antenna	
Freq (GHz)	Gain (dBi)
59.0	4.8
61.0	5.4
62.0	5.5
63.0	5.1
64.0	4.3

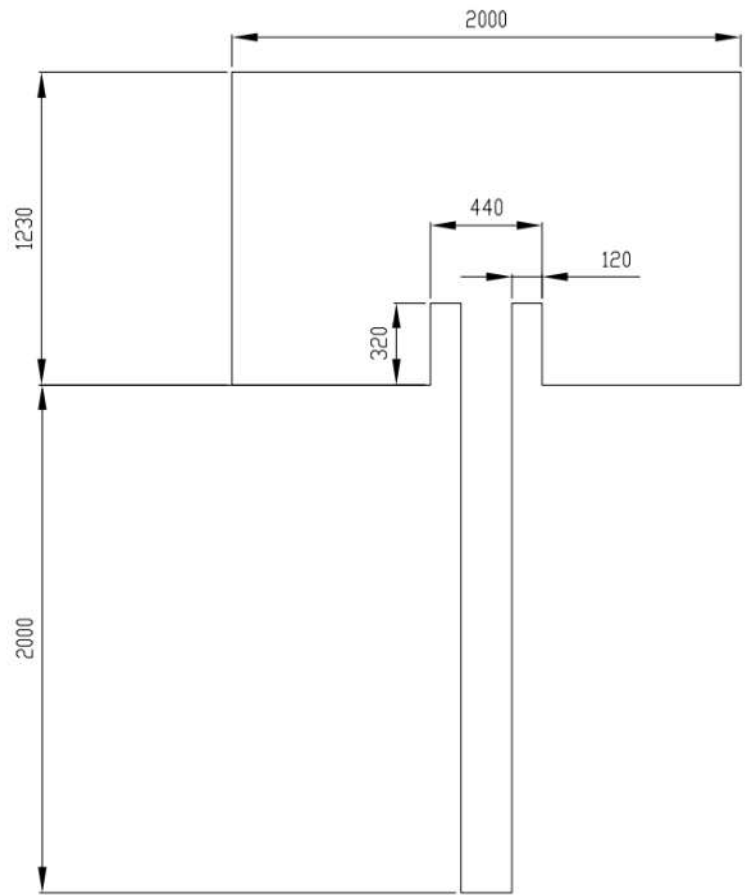

VER D

天线尺寸(单位 um)