



FCC/IC - TEST REPORT

Report Number : 4840125229300A Date of Issue: 2025.04.17

Model : PNUJ4110

Product Type : Robotic Pool Skimmer

Applicant : Quilo Technology (Jiaxing) Co., Ltd.

Address : Room 199, No. 2176 Fanggong Road, Dongzha Street, Nanhu District, Jiaxing City, Zhejiang Province, P.R.China

Manufacturer : Quilo Technology (Jiaxing) Co., Ltd.

Address : Room 199, No. 2176 Fanggong Road, Dongzha Street, Nanhu District, Jiaxing City, Zhejiang Province, P.R.China

Test Result : ☒ Positive ☐ Negative

Total pages including Appendices : 127



TÜV SÜD Certification and Testing (China) Co., Ltd. is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment under Test	4
4	Summary of Test Standards	6
5	Summary of Test Results	7
6	General Remarks	8
7	Test Setups	9
8	Systems test configuration	12
9	Technical Requirement	13
9.1	Conducted Emission	13
9.2	Conducted peak output power	16
9.3	6dB bandwidth and 99% Occupied Bandwidth	18
9.4	Power spectral density	31
9.5	Spurious RF conducted emissions	38
9.6	Band edge	63
9.7	Spurious radiated emissions for transmitter	72
10	Test Equipment List	125
11	System Measurement Uncertainty	126
12	Photographs of Test Set-ups	127
13	Photographs of EUT	127



2 Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd.

Floor 1-4, Building B, No.37, Tuanjie Road(Middle), Xishan Economic and Technological Development Zone, Wuxi, Jiangsu. China

Test Firm FCC
Registration
Number: 571980

Designation
number: CN1405

IC Company
Number: 33393

CAB identifier: CN0184

Telephone: +86 510 8820 3737
Fax: +86 510 8820 3636

3 Description of the Equipment under Test

Description of the Equipment Under Test

Product: Robotic Pool Skimmer

PMN / HVIN / Model no.: PNUJ4110

FCC ID: 2BOBWPNUJ4110

IC: 33430-PNUJ4110

Ratings: DC 14.4V (powered by internal battery)

information of adapter (for Model:GM39-200150-1DG
charging mode) input: AC 100-240V, 50/60Hz
output: DC 20V/1.5A

RF Transmission Frequency: Wi-Fi:
For 802.11b/g/n-HT20: 2412~2462 MHz
For 802.11n-HT40: 2422~2452 MHz

Bluetooth LE:2402~2480MHz

No. of Operated Channel: 2.4GHz WIFI: 11 for 802.11b/802.11g/802.11(H20);
7 for 802.11n(HT40)
2.4GHz BLE: 40

Modulation: Direct Sequence Spread Spectrum (DSSS) for 802.11b
Orthogonal Frequency Division Multiplexing (OFDM) for 802.11g/n;
2.4GHz BLE: GFSK

Channel list:

802.11b/g/n(HT20)				802.11n(HT40)			
Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)
1	2412	7	2442	3	2422	8	2447MHz
2	2417	8	2447	4	2427	9	2452MHz
3	2422	9	2452	5	2432		
4	2427	10	2457	6	2437		
5	2432	11	2462	7	2442		
6	2437						

Bluetooth Low Energy							
Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476



8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Antenna Type: Dipole Antenna

Antenna Gain: 1.65dBi

Description of the EUT: The Equipment Under Test (EUT) is a Robotic Pool Skimmer which support 2.4GHz Wi-Fi and BLE 4.2(support 1Mbps data rate). We tested it and listed the worst data in this report.
For the test of Conducted emission AC power port, the EUT is powered by the adapter,
for other tests, the EUT is powered by internal battery.

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.



4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 April 2018 + Amendment 1 March 2019 + Amendment 2 February 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 3 August 2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 and ANSI C63.10 (2020).

5 Summary of Test Results

Technical Requirements						
Test Condition		Pages	Test Site	Test Result		
				Pass	Fail	N/A
§15.207 & RSS-GEN 8.8	Conducted emission AC power port	12-16	Site 1	☒	☐	☐
§15.247 (b) (3) & RSS-247 5.4(d)	Conducted peak output power	17-19	Site 1	☒	☐	☐
§15.247(a)(2) & RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth and 99% Occupied Bandwidth	20-24	Site 1	☒	☐	☐
§15.247(e) & RSS-247 5.2(b)	Power spectral density	25-27	Site 1	☒	☐	☐
§15.247(d) & RSS-247 5.5	Spurious RF conducted emissions	28-34	Site 1	☒	☐	☐
§15.247(d) & RSS-247 5.5	Band edge	35-39	Site 1	☒	☐	☐
§15.247(d) & §15.209 & RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	40-47	Site 1	☒	☐	☐
§15.203 & RSS-Gen 6.8	Antenna requirement	See note 1		☒	☐	☐

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses a Dipole Antenna, which gain is 1.65dBi. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.



6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2BOBWPNUJ4110, IC: 33430-PNUJ4110 complies with Section 15.207,15.209,15.231,15.247 of the FCC Part 15, Subpart C Rules and RSS-247, RSS-GEN.

This report is only for the 2.4GHz Wi-Fi test report, for the 2.4GHz BLE test report please refer to 4840125229300B.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: March 4, 2025

Testing Start Date: March 4, 2025


Testing End Date: March 11, 2025

-TÜV SÜD Certification and Testing (China) Co., Ltd.


Reviewed by:

Prepared by:

Tested by:



Zhilan Xue
Review Engineer




Bo Dai
Project Engineer



Xu Zheng
Test Engineer

7 Test Setups


7.1 AC Power Line Conducted Emission test setups

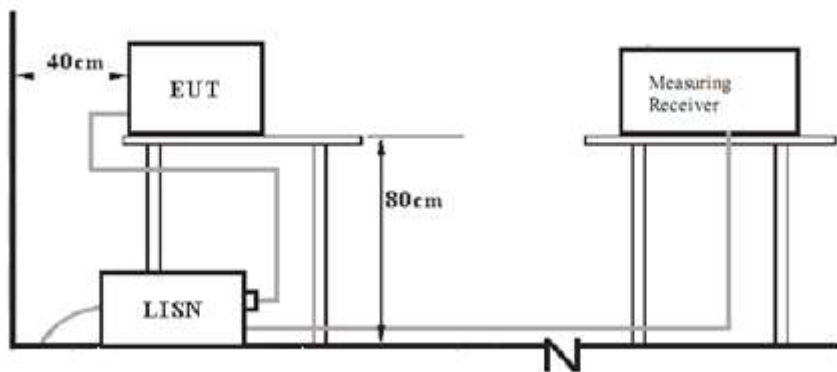

Note: for floor-standing equipment, the supporting table (80 cm) shall be replaced by a insulating material (up to 12 mm thick).


7.2 Radiated test setups

9kHz ~ 30MHz Test Setup:

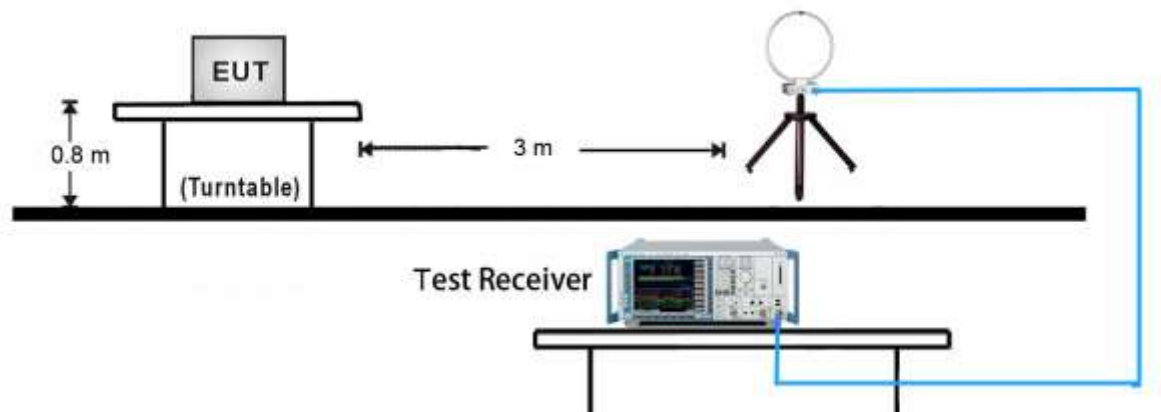


Note: for floor-standing equipment, the supporting table (80 cm) shall be replaced by a insulating material (up to 12 mm thick).

30MHz ~ 1GHz Test Setup:

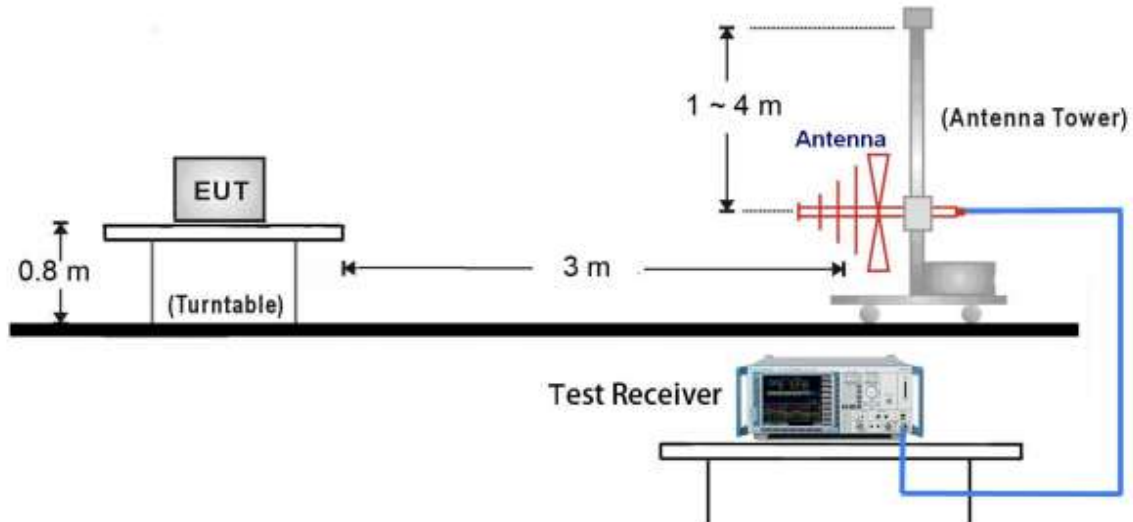


Note: for floor-standing equipment, the supporting table (80 cm) shall be replaced by a insulating material (up to 12 mm thick).

Above 1GHz Test Setup:

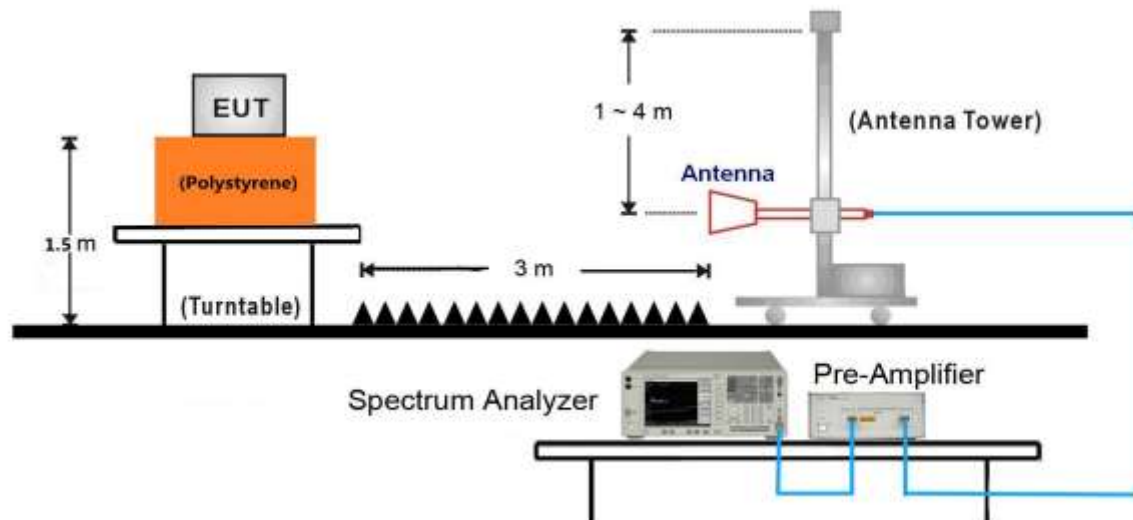


7.3 Conducted RF test setups

For Conducted peak output power

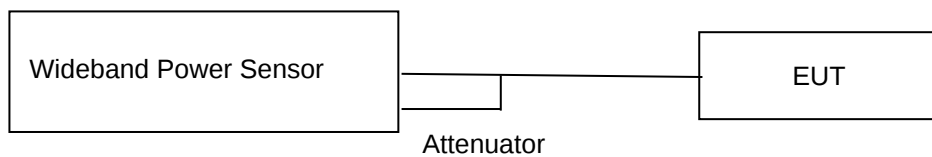

For other test items



8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
Notebook	HONOR	NDR-WFH	ET247
Notebook	HONOR	VLT-W50	ET137
adapter	FOSHAN SHUNDE GUANYUDA POWER SUPPLY CO.,LTD	GM39-200150-1DG	--

Test software: EspRFTestTool_v3.6_Manual

Test Mode Applicability and Tested Channel Detail:

Mode	Tested Channel	Data Rate	Modulation	Power level setting (Index Value)
802.11b	1	1 Mbps	DSSS	Default (0 attenuation)
	6			Default (0 attenuation)
	11			Default (0 attenuation)
802.11g	1	6 Mbps	OFDM	Default (0 attenuation)
	6			Default (0 attenuation)
	11			Default (0 attenuation)
802.11n HT20	1	MCS0 (6.5Mbps)	OFDM	Default (0 attenuation)
	6			Default (0 attenuation)
	11			Default (0 attenuation)
802.11n HT40	3	MCS0 (13.5Mbps)	OFDM	Default (0 attenuation)
	6			Default (0 attenuation)
	9			Default (0 attenuation)

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

Conducted Emission


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11g_2412MHz
Operator Name: Xu Zheng
Input: AC 120V 60Hz
Test Standard: FCC Part 15.207(a)
Comment: Phase L
Comment: Temp.:20.5°C,Humi.:49.7%,Atm.:1015.3hPa

Scan Setup: FCC Mains Voltage LISN 2 Lines 150kHz-30MHz Pre [EMI conducted]

Hardware Setup: Mains Voltage LISN 2 Lines 9kHz-30MHz
Receiver: [ESW 8]
Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
150 kHz - 30 MHz	4 kHz	PK+ ; AVG	9 kHz	0.01 s	0 dB

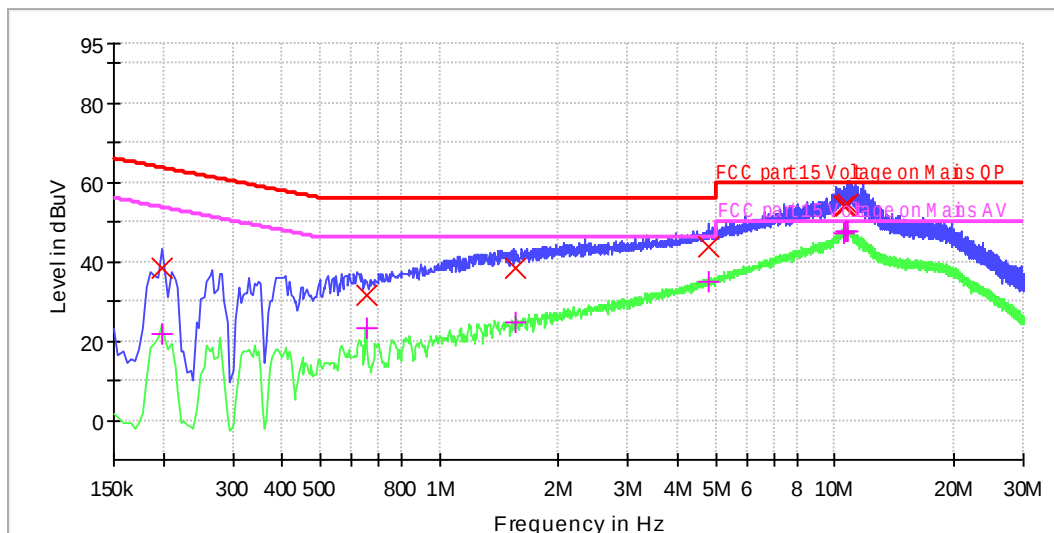

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV)	Margin - CAV (dB)	Limit - CAV (dBuV)
0.198000	38.1	21.9	1000.0	9.000	10.1	25.6	63.7	31.8	53.7
0.654000	31.6	23.1	1000.0	9.000	10.1	24.4	56.0	22.9	46.0
1.558000	38.4	24.6	1000.0	9.000	10.2	17.6	56.0	21.5	46.0
4.814000	43.6	34.7	1000.0	9.000	10.3	12.4	56.0	11.3	46.0
10.554000	53.8	47.4	1000.0	9.000	10.5	6.3	60.0	2.6	50.0
10.670000	54.1	47.5	1000.0	9.000	10.5	5.9	60.0	2.5	50.0
10.830000	54.2	47.4	1000.0	9.000	10.5	5.8	60.0	2.6	50.0

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB) + 10dB Attenuator


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11g_2412MHz
Operator Name: Xu Zheng
Input: AC 120V 60Hz
Test Standard: FCC Part 15.207(a)
Comment: Phase N
Comment: Temp.:20.5°C,Humi.:49.7%,Atm.:1015.3hPa

Scan Setup: FCC Mains Voltage LISN 2 Lines 150kHz-30MHz Pre [EMI conducted]

Hardware Setup: Mains Voltage LISN 2 Lines 9kHz-30MHz
Receiver: [ESW 8]
Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
150 kHz - 30 MHz	4 kHz	PK+ ; AVG	9 kHz	0.01 s	0 dB

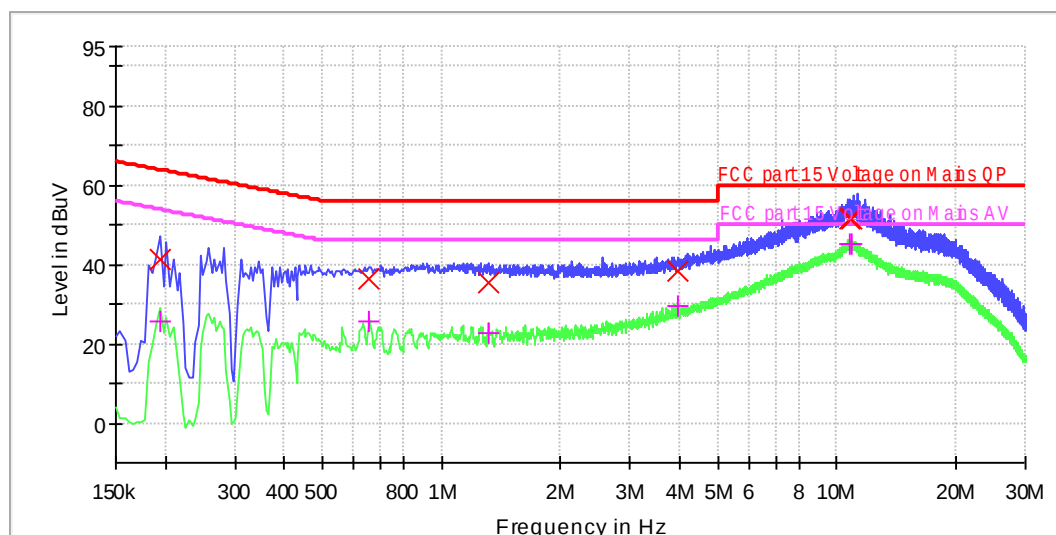

Limit and Margin


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV)	Margin - CAV (dB)	Limit - CAV (dBuV)
0.194000	41.3	25.5	1000.0	9.000	10.4	22.6	63.9	28.4	53.9
0.658000	36.5	25.8	1000.0	9.000	10.4	19.5	56.0	20.2	46.0
1.318000	35.6	22.9	1000.0	9.000	10.4	20.5	56.0	23.2	46.0
3.962000	38.4	29.7	1000.0	9.000	10.5	17.7	56.0	16.3	46.0
10.730000	51.4	45.1	1000.0	9.000	10.8	8.7	60.0	4.9	50.0
10.910000	51.4	45.1	1000.0	9.000	10.8	8.6	60.0	4.9	50.0

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)
Factor (dB) = Cable Loss (dB) + LISN Factor (dB) + 10dB Attenuator

9.2 Conducted peak output power

Test Method

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 4) Measure the peak power of the transmitter. This measurement is a peak over both the ON and OFF periods of the transmitter.

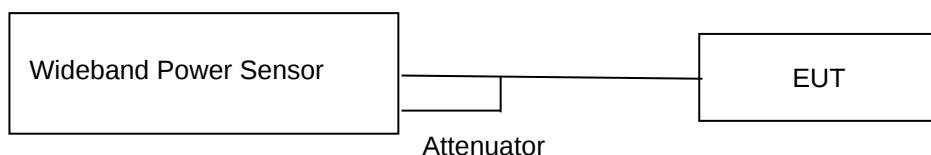

Power meter conducted test setup

Limits

According to §15.247 (b) (3) & RSS-247 5.4(d), conducted peak output power limit as below:

Conducted peak output power

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

e.i.r.p

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤4	≤36

Test result as below table

802.11B: Antenna gain=1.65dBi				
Frequency MHz	Conducted Peak Output Power(dBm) §15.247 (b) (3)	Result	e.i.r.p.(dBm) RSS-247 5.4(d)	Result
2412MHz	20.16	Pass	21.81	Pass
2437MHz	19.87	Pass	21.52	Pass
2462MHz	19.43	Pass	21.08	Pass

802.11G: Antenna gain=1.65dBi				
Frequency MHz	Conducted Peak Output Power(dBm) §15.247 (b) (3)	Result	e.i.r.p.(dBm) RSS-247 5.4(d)	Result
2412MHz	22.9	Pass	24.55	Pass
2437MHz	22.81	Pass	24.46	Pass



2462MHz	21.44	Pass	23.09	Pass
---------	-------	------	-------	------

802.11N20: Antenna gain=1.65dBi				
Frequency MHz	Conducted Peak Output Power(dBm) §15.247 (b) (3)	Result	e.i.r.p.(dBm) RSS-247 5.4(d)	Result
2412MHz	22.73	Pass	24.38	Pass
2437MHz	22.8	Pass	24.45	Pass
2462MHz	21.35	Pass	23	Pass

802.11N40: Antenna gain=1.65dBi				
Frequency MHz	Conducted Peak Output Power(dBm) §15.247 (b) (3)	Result	e.i.r.p.(dBm) RSS-247 5.4(d)	Result
2422MHz	22.73	Pass	24.38	Pass
2437MHz	22.6	Pass	24.25	Pass
2452MHz	22.64	Pass	24.29	Pass

9.3 6dB bandwidth and 99% Occupied Bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW=1% to 5% of the occupied bandwidth but not less than 100kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Test Method for 99 % Bandwidth

1. Connect EUT test port to spectrum analyzer.
Use the following spectrum analyzer settings:
RBW=1% to 5% of OBW, or a minimum of 1 MHz if this is not possible due to a large OBW, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the occupied bandwidth measurement capability of test receiver.
3. Allow the trace to stabilize, record the occupied bandwidth value.

Limit


6dB bandwidth Limit [kHz]	99% bandwidth Limit [kHz]
≥ 500	--



Test result



Test Mode	Frequency MHz	6dB bandwidth (MHz)		Result	99% occupied bandwidth MHz
		result	limit	verdict	
802.11b	2412	9.708	≥ 0.5	Pass	14.084
	2437	9.696	≥ 0.5	Pass	13.982
	2462	9.771	≥ 0.5	Pass	14.027
802.11g	2412	16.599	≥ 0.5	Pass	17.227
	2437	16.554	≥ 0.5	Pass	16.831
	2462	16.548	≥ 0.5	Pass	16.768
802.11n(HT20)	2412	17.388	≥ 0.5	Pass	17.821
	2437	17.292	≥ 0.5	Pass	17.683
	2462	17.283	≥ 0.5	Pass	17.65
802.11n(HT40)	2422	34.65	≥ 0.5	Pass	35.36
	2437	34.47	≥ 0.5	Pass	35.246
	2452	34.38	≥ 0.5	Pass	35.156







6dB Bandwidth


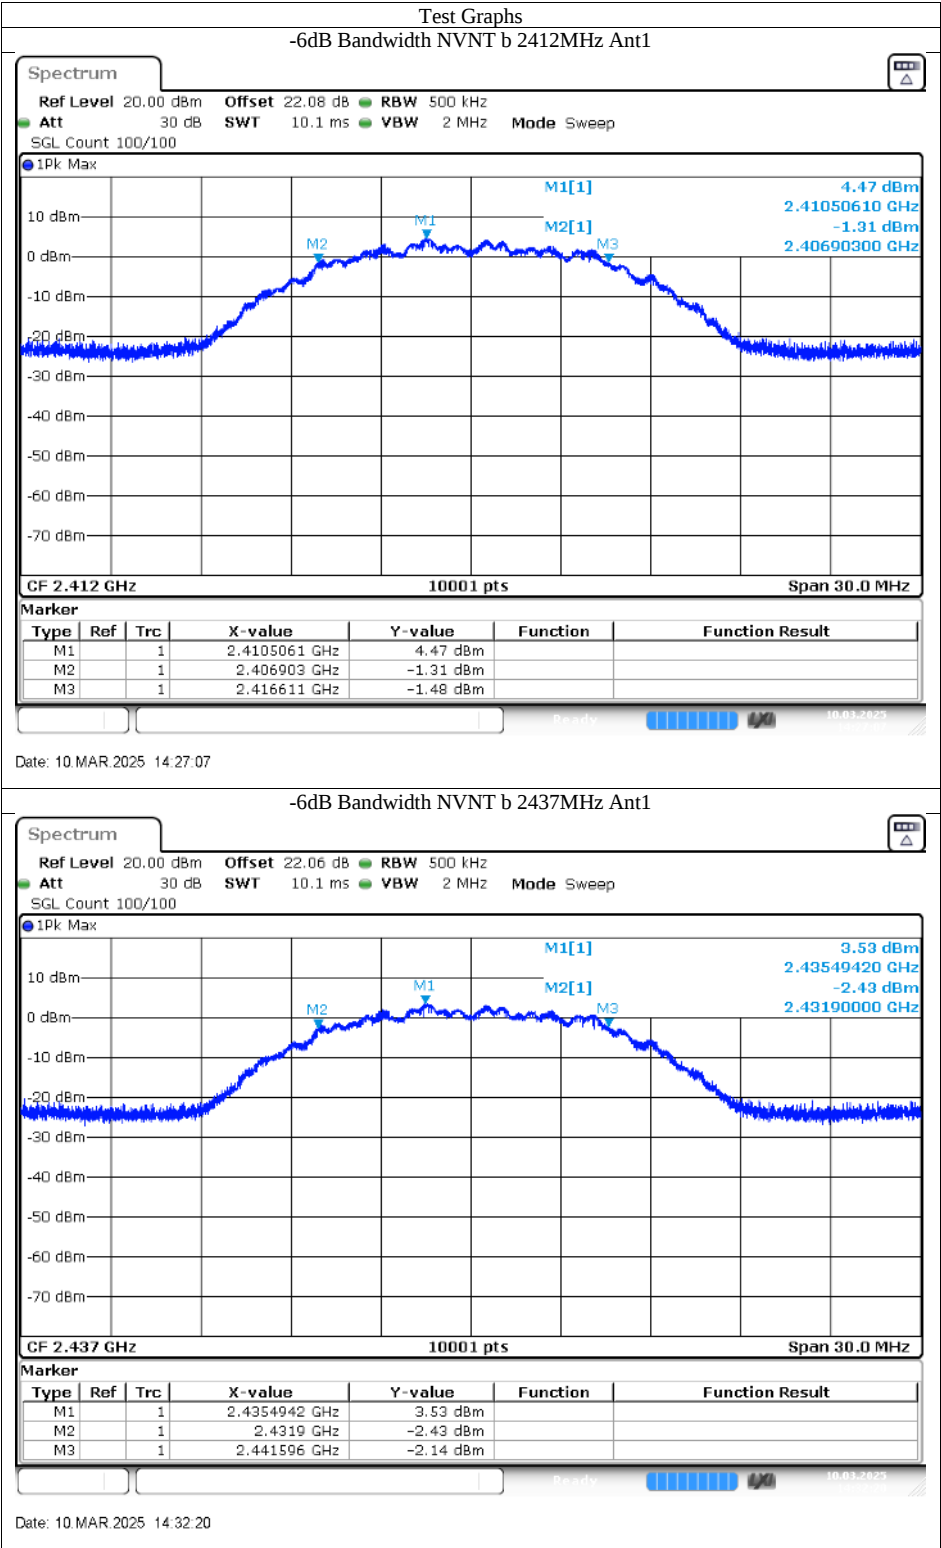


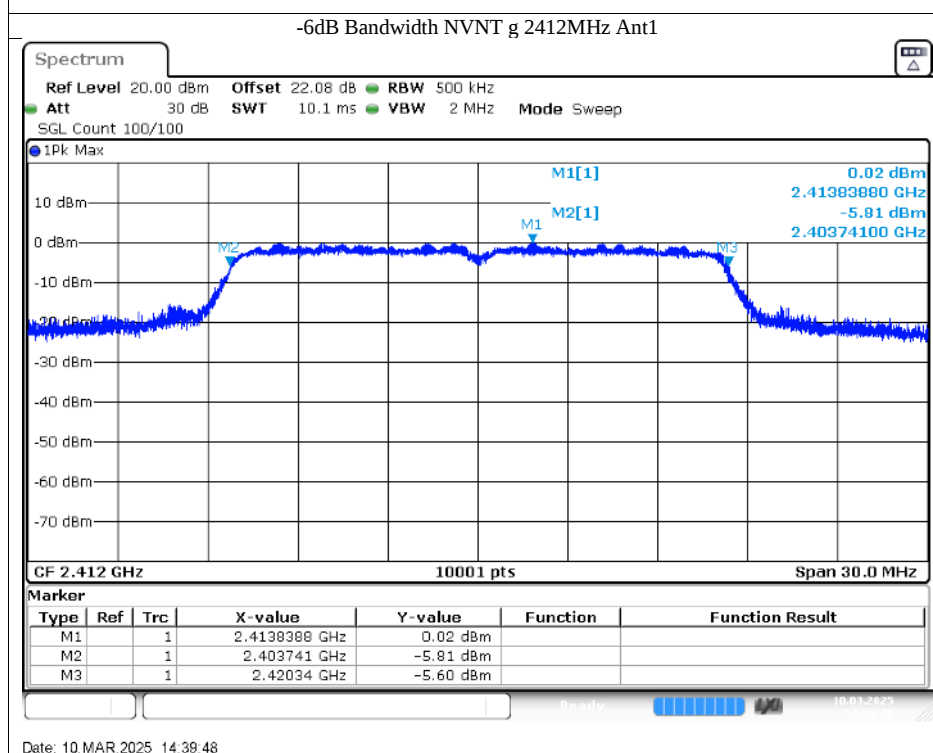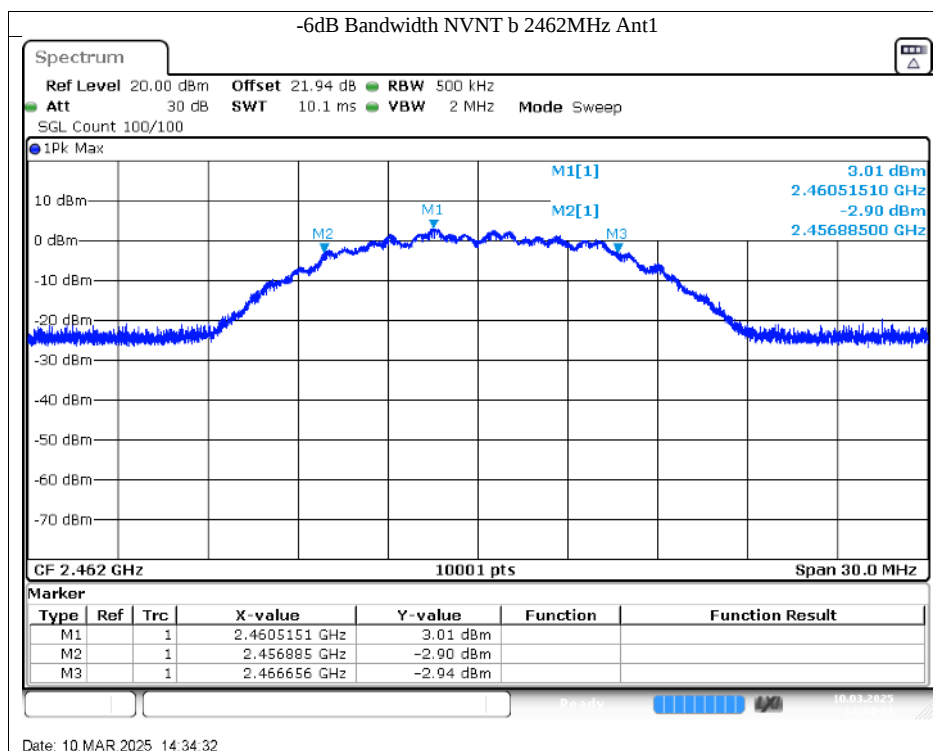

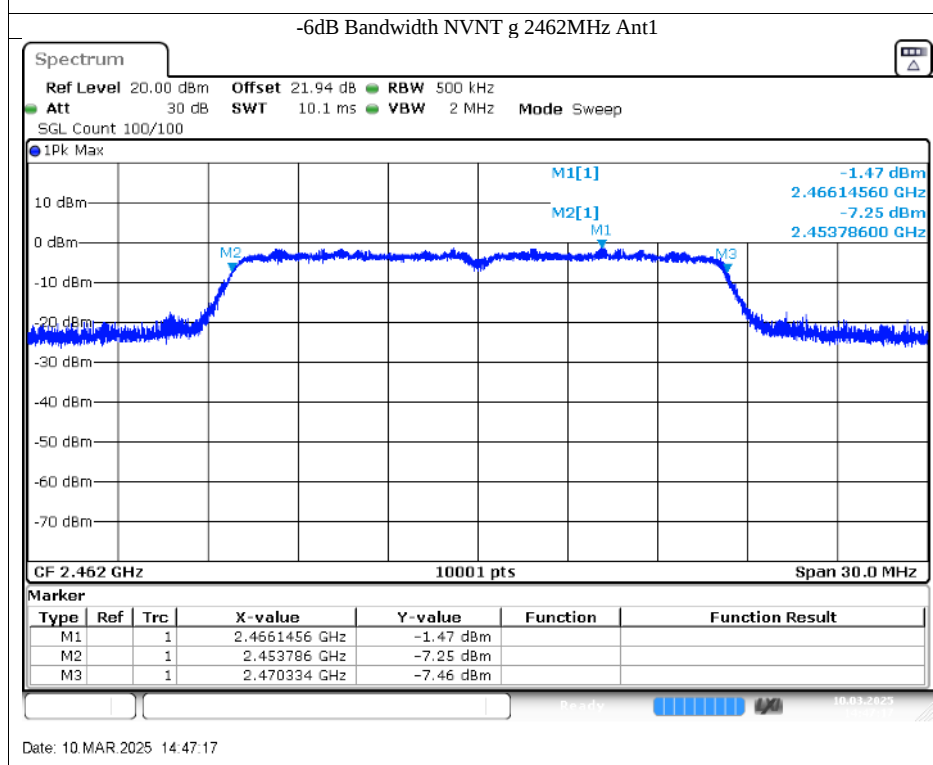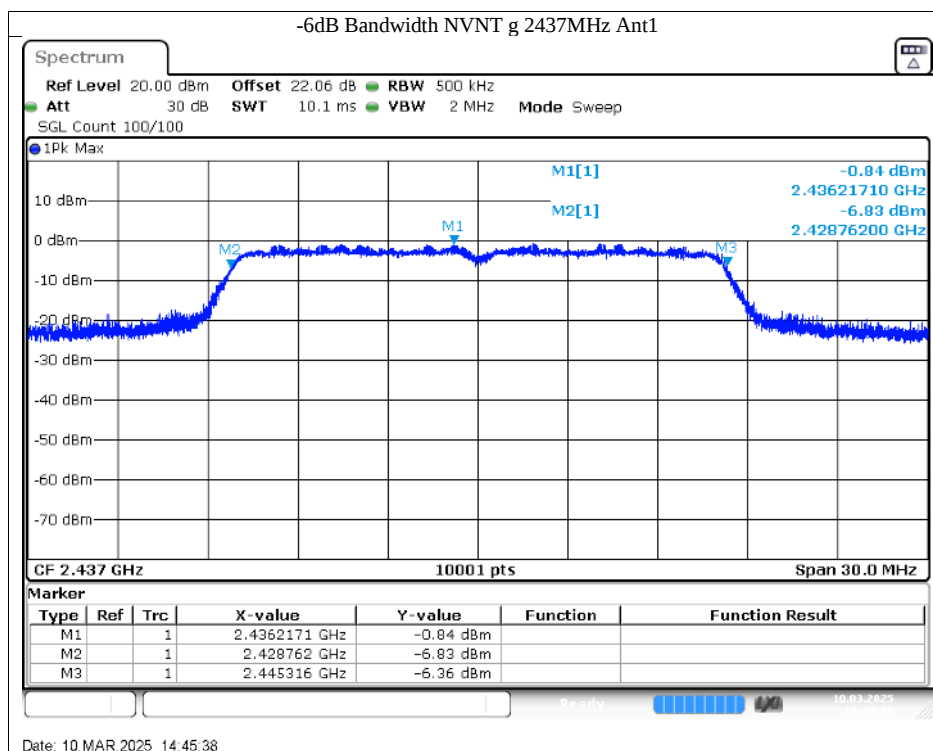

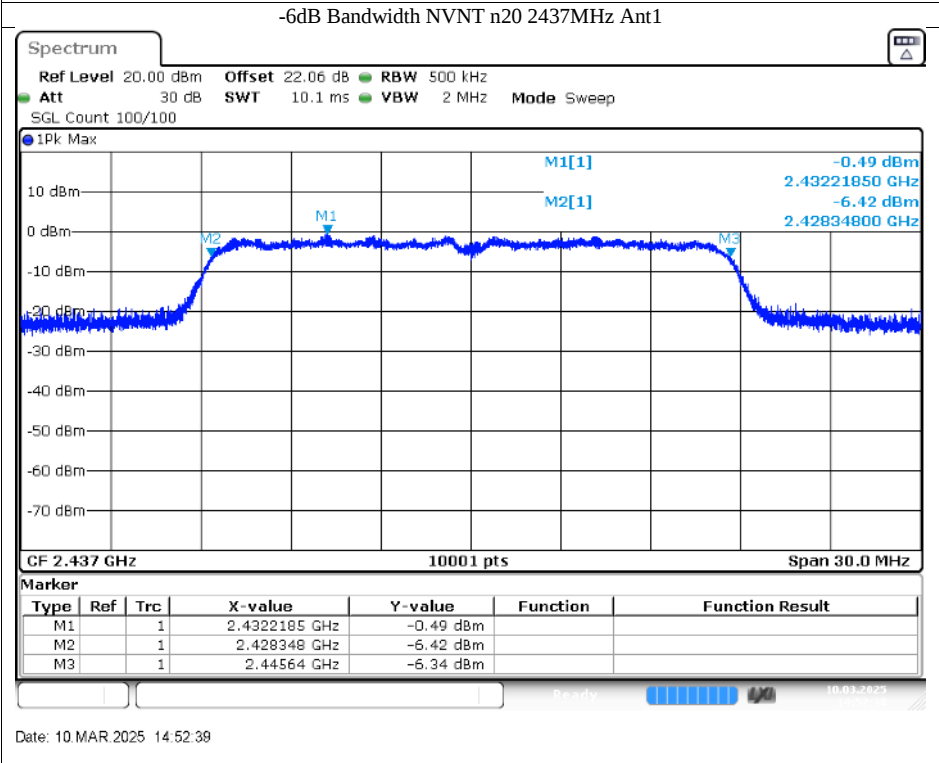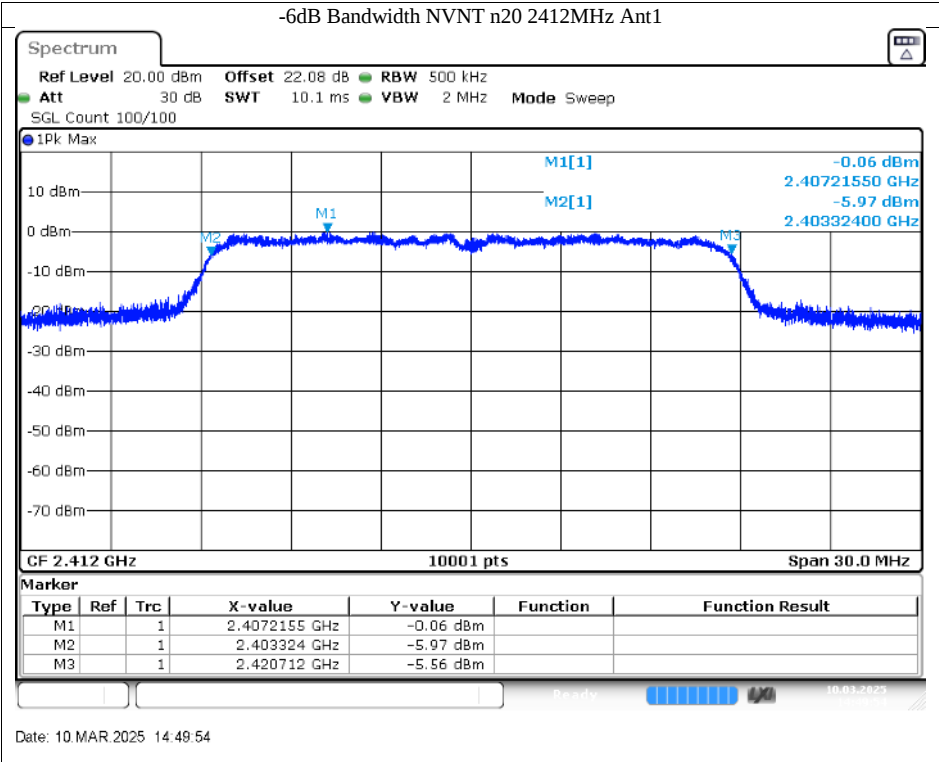


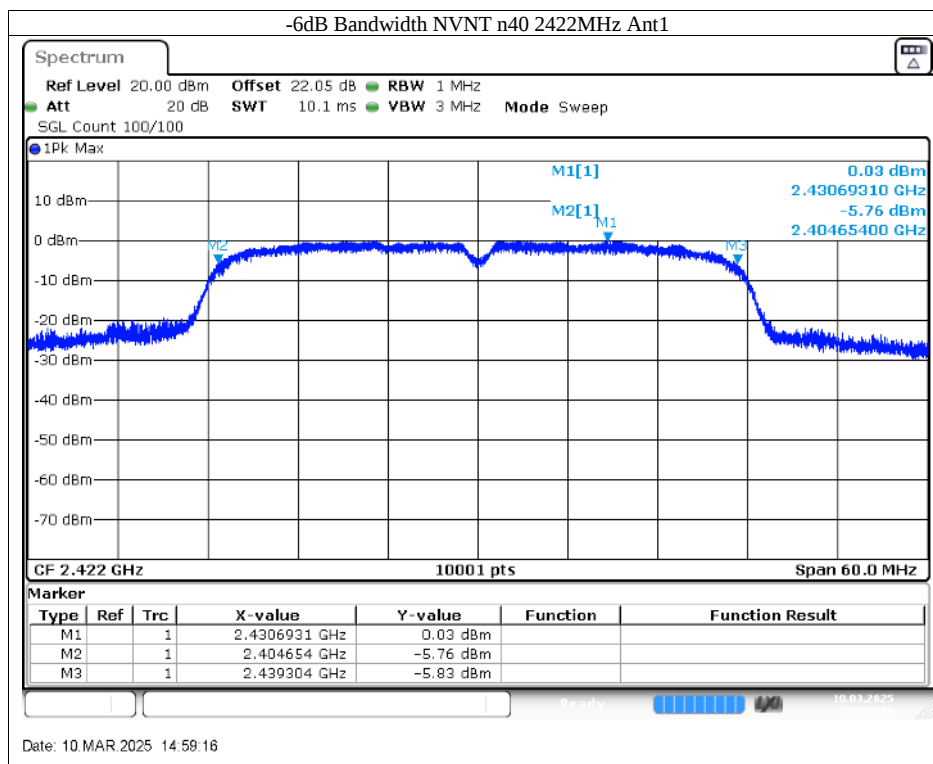
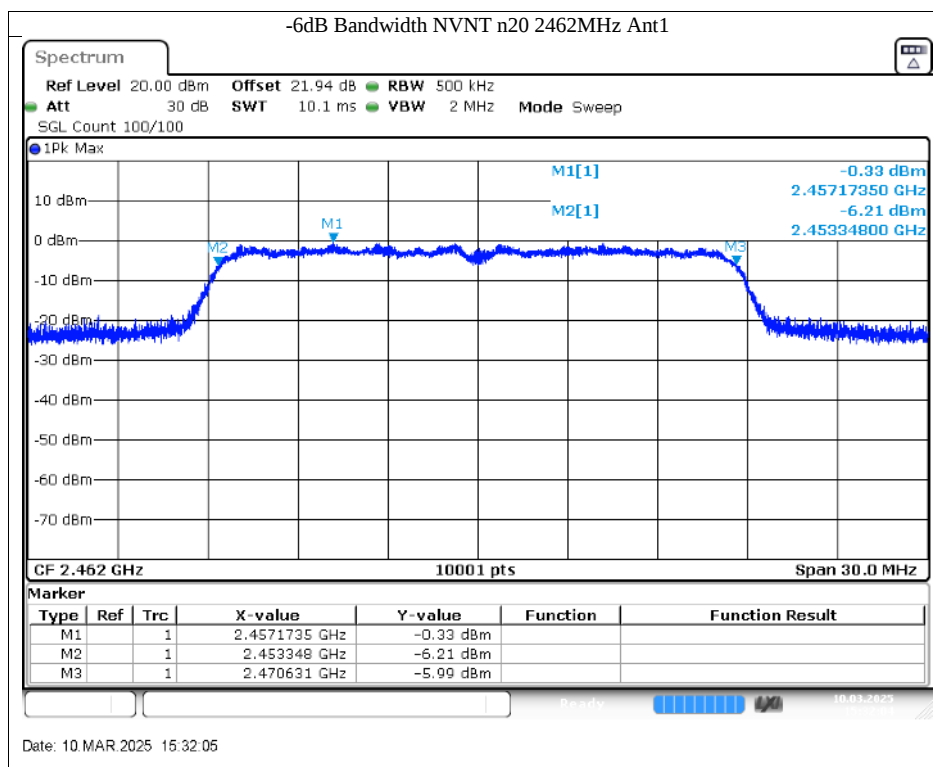


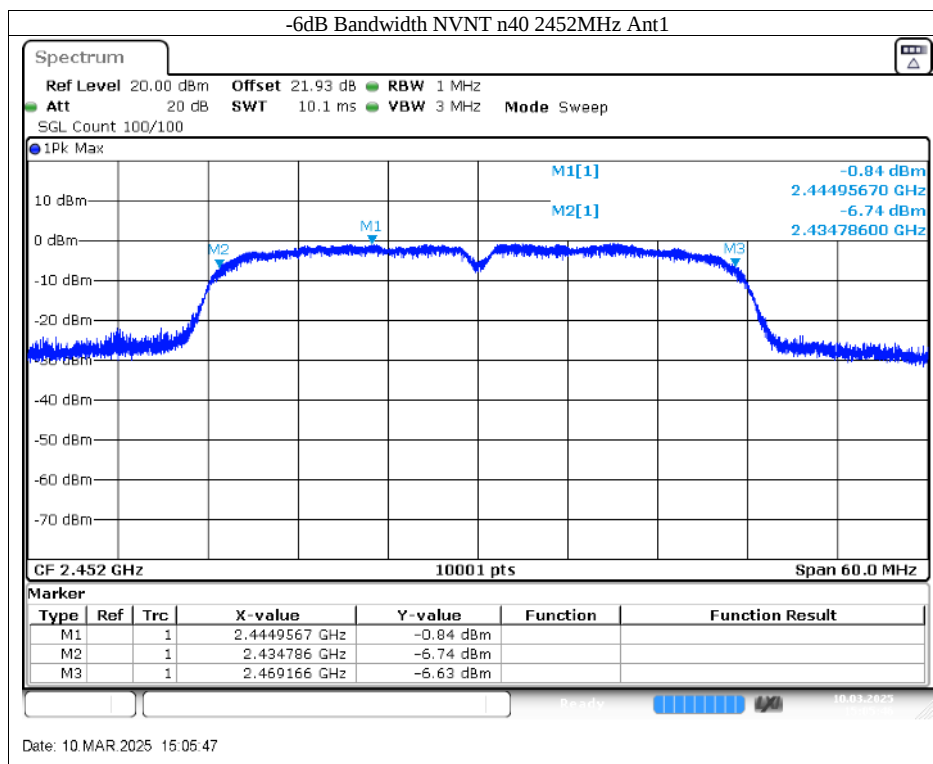
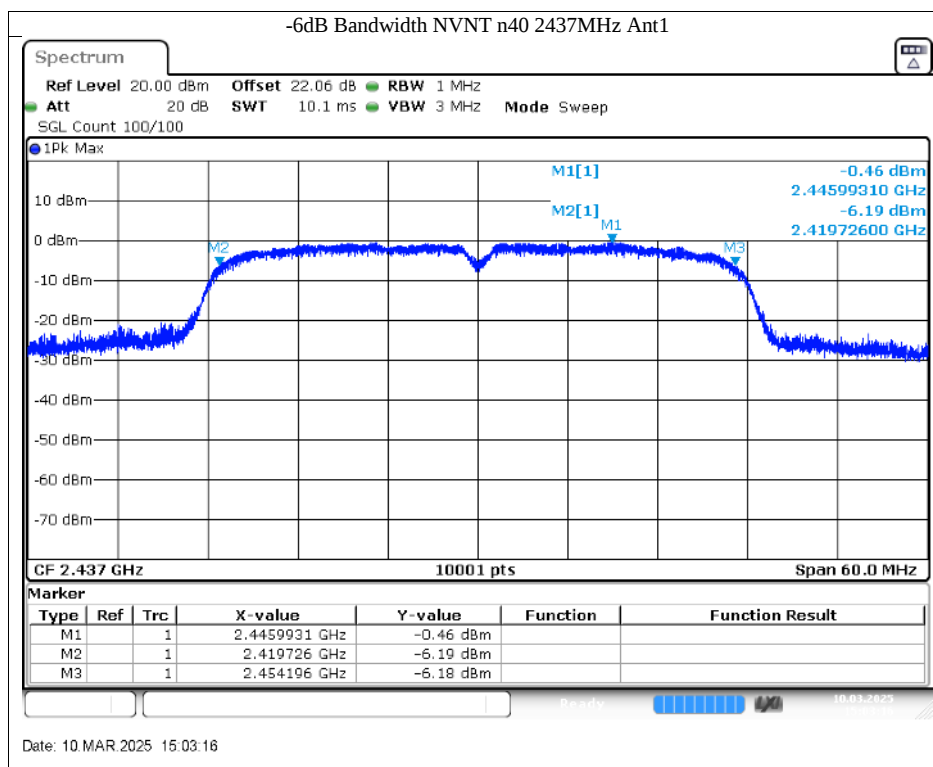








99% Bandwidth


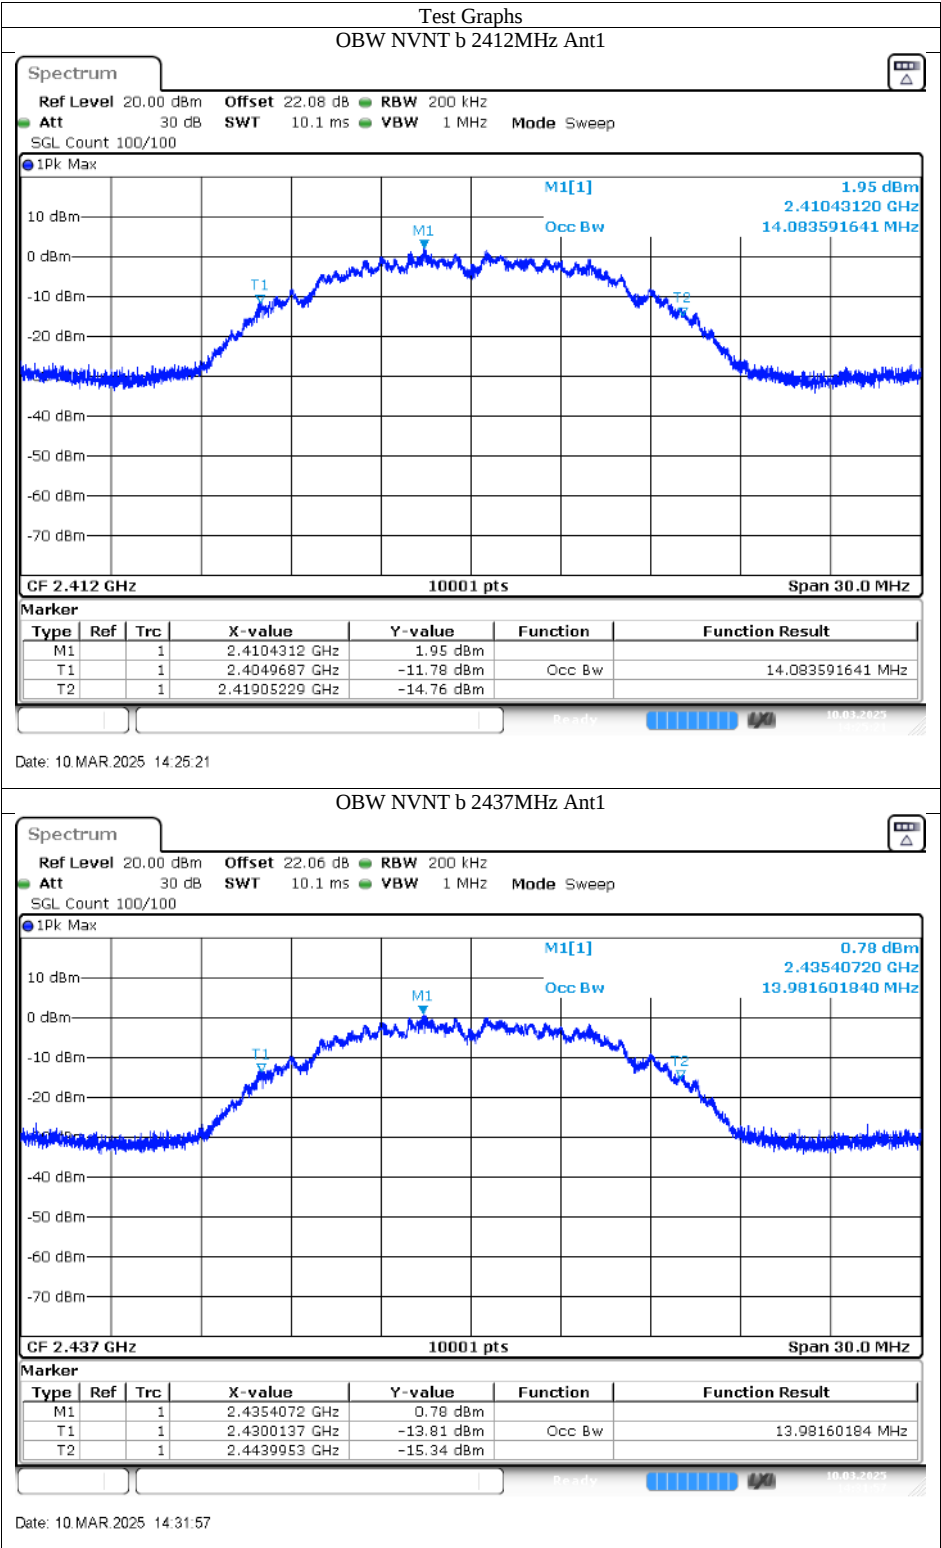


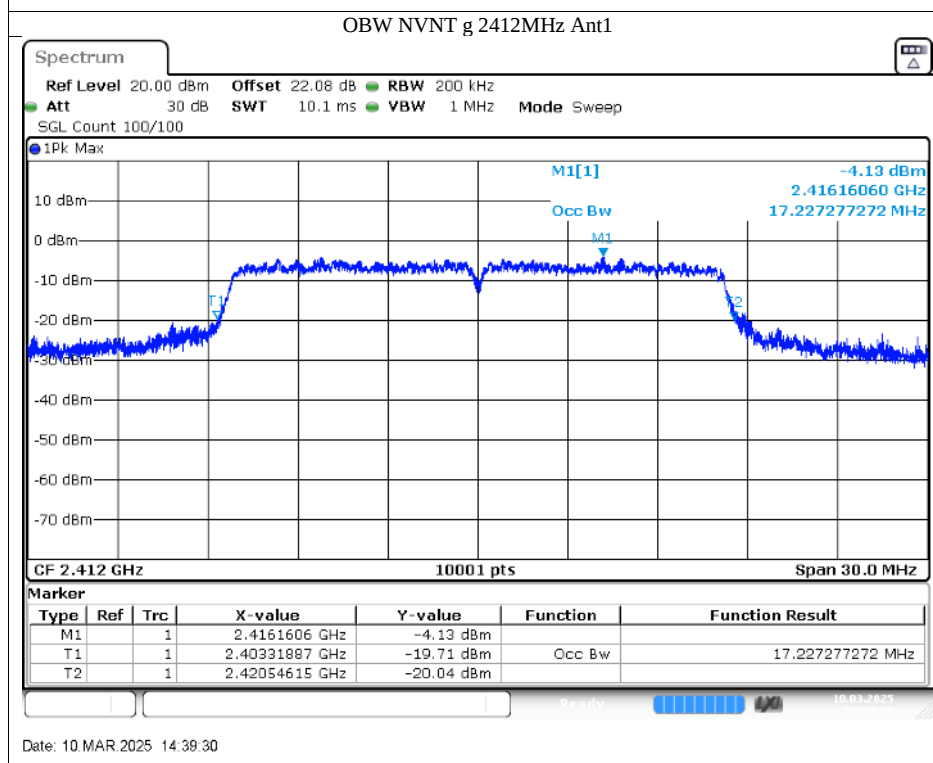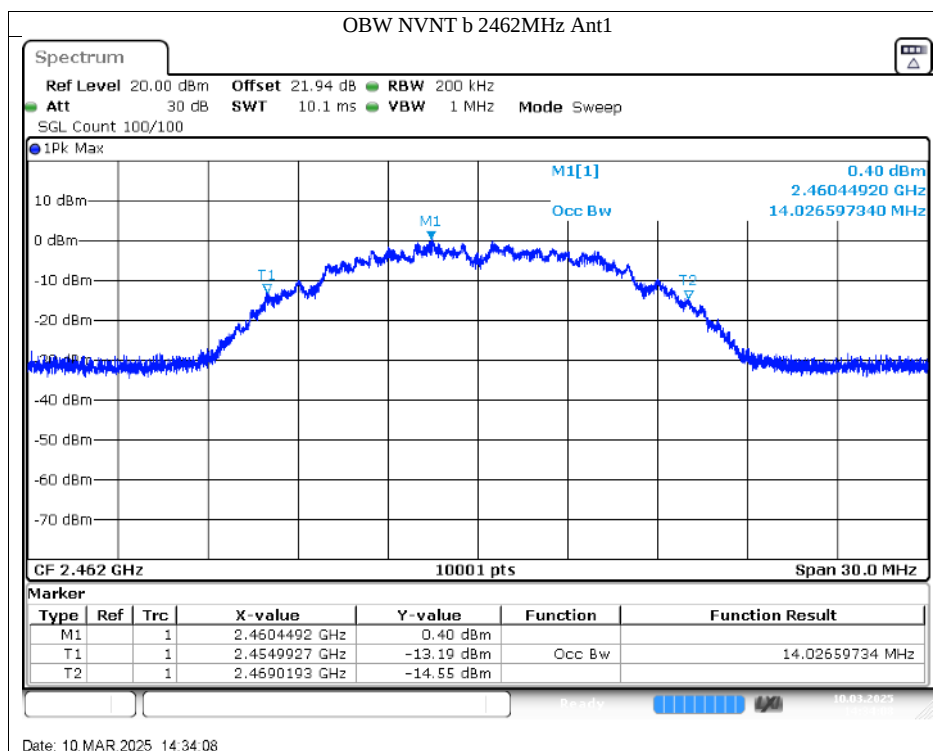

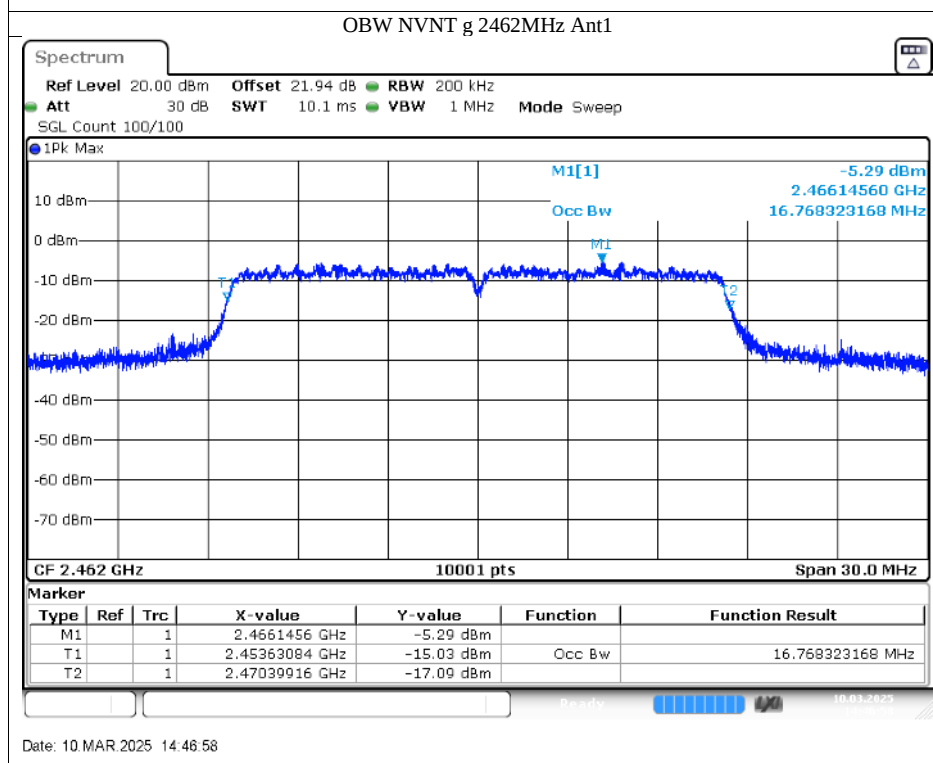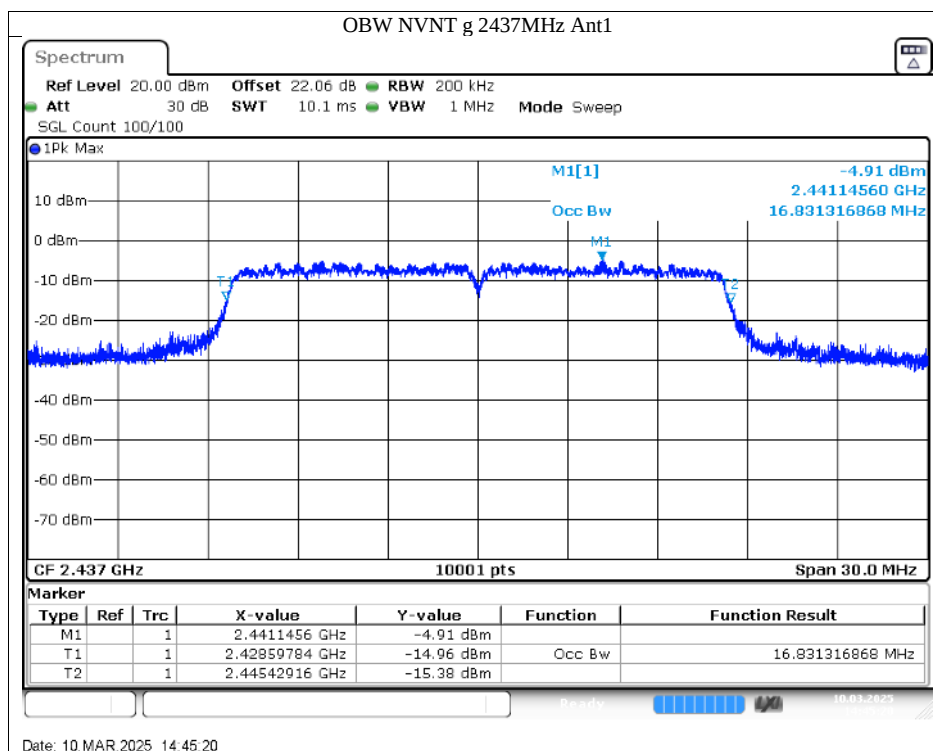

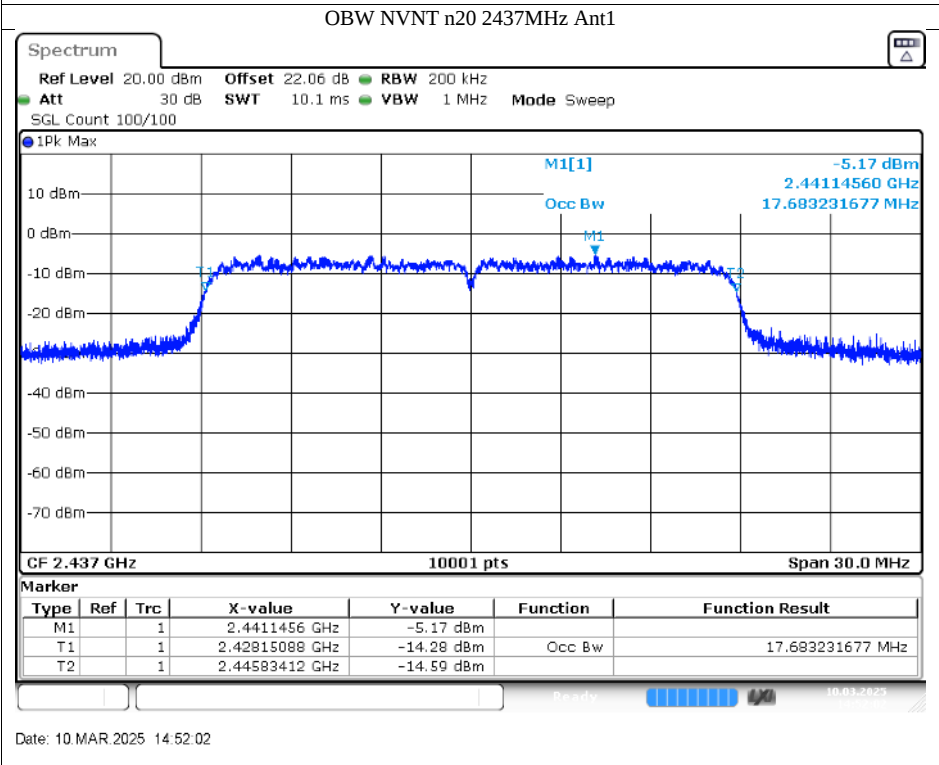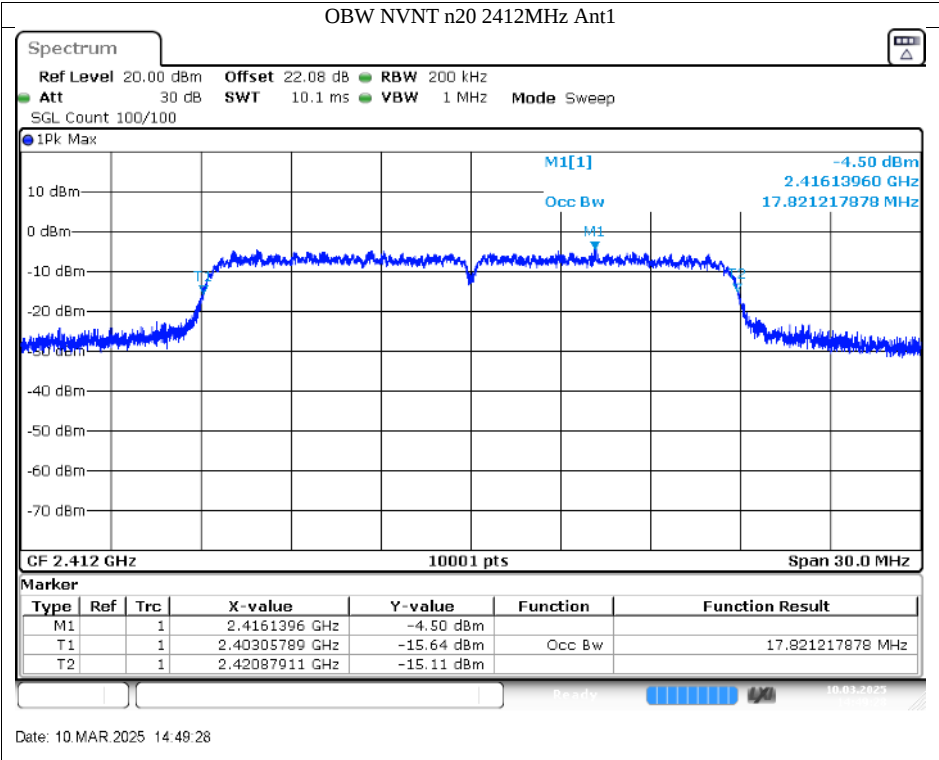

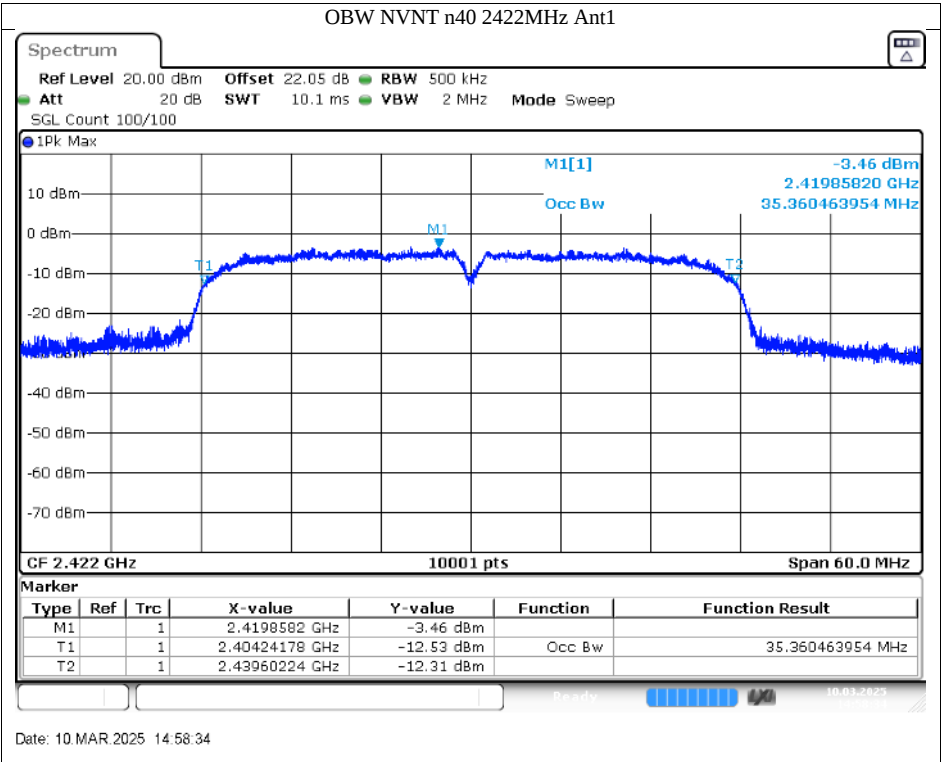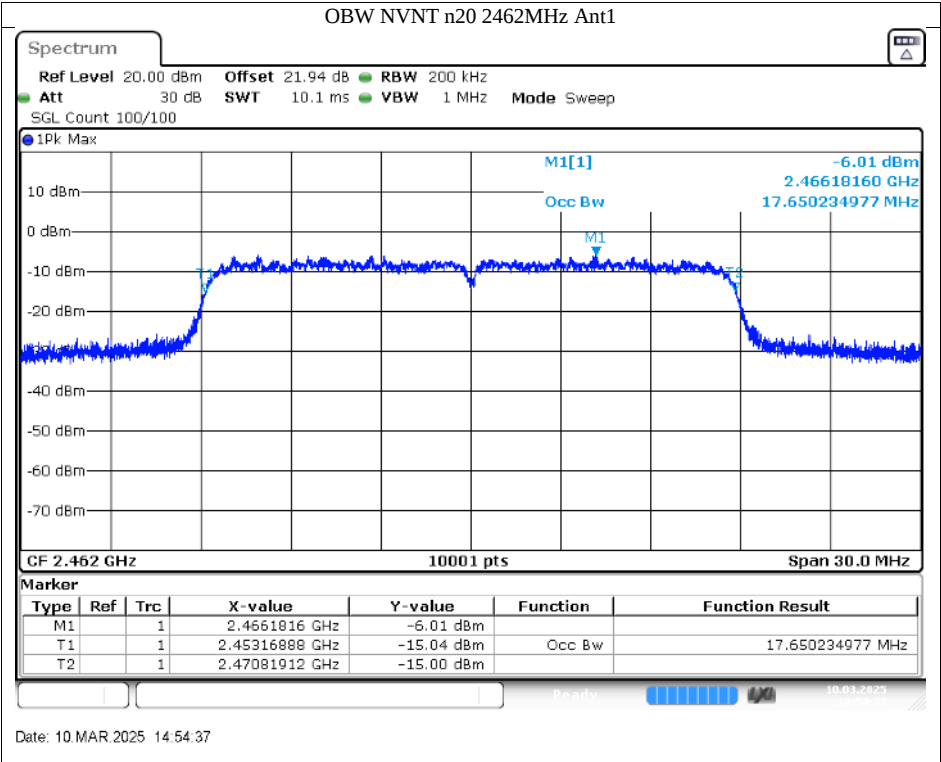

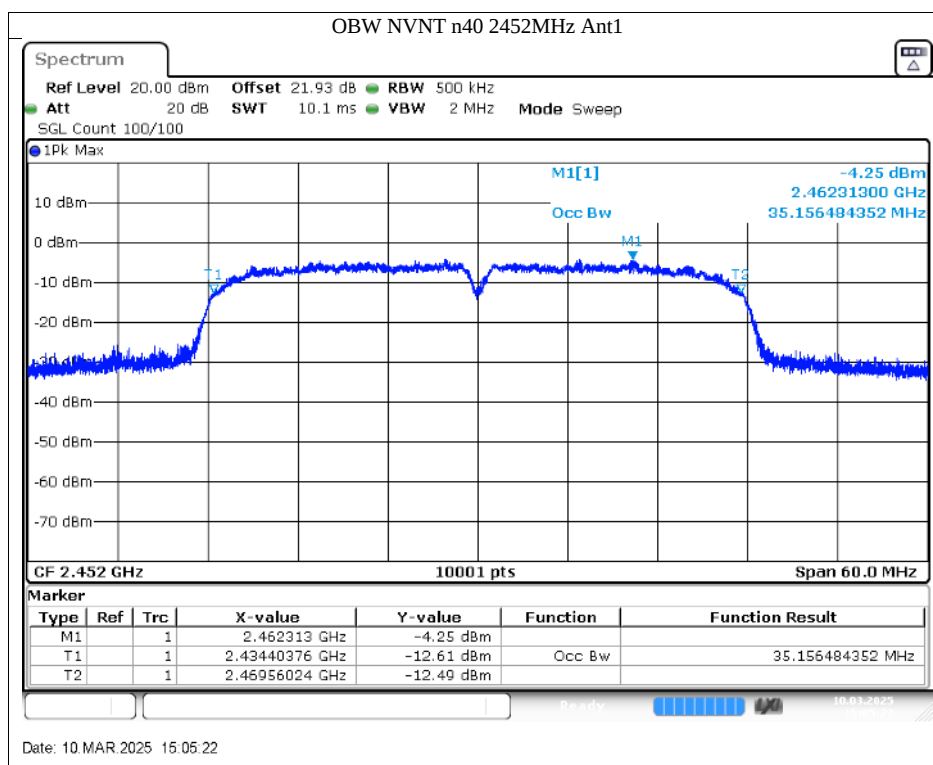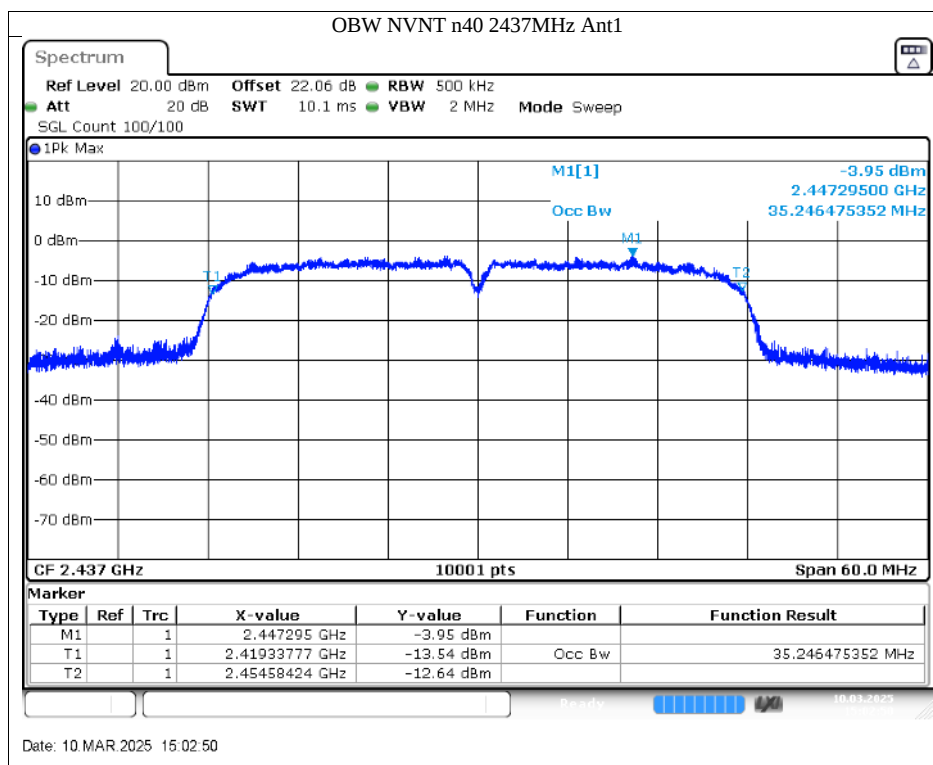

9.4 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency.
RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm/3kHz]

≤8

Test result

802.11 b

Frequency MHz	Power spectral density dBm/3kHz	Result
Low channel 2412MHz	-15.57	Pass
Middle channel 2437MHz	-16.59	Pass
High channel 2462MHz	-17.04	Pass

802.11 g



Frequency MHz	Power spectral density dBm/3kHz	Result
Low channel 2412MHz	-22.23	Pass
Middle channel 2437MHz	-22.97	Pass
High channel 2462MHz	-23.69	Pass



802.11 n (HT20)



Frequency MHz	Power spectral density dBm/3kHz	Result
Low channel 2412MHz	-21.42	Pass
Middle channel 2437MHz	-22.1	Pass
High channel 2462MHz	-22.65	Pass



802.11 n (HT40)



Frequency MHz	Power spectral density dBm/3kHz	Result
Low channel 2422MHz	-23.13	Pass
Middle channel 2437MHz	-23.67	Pass
High channel 2452MHz	-23.87	Pass

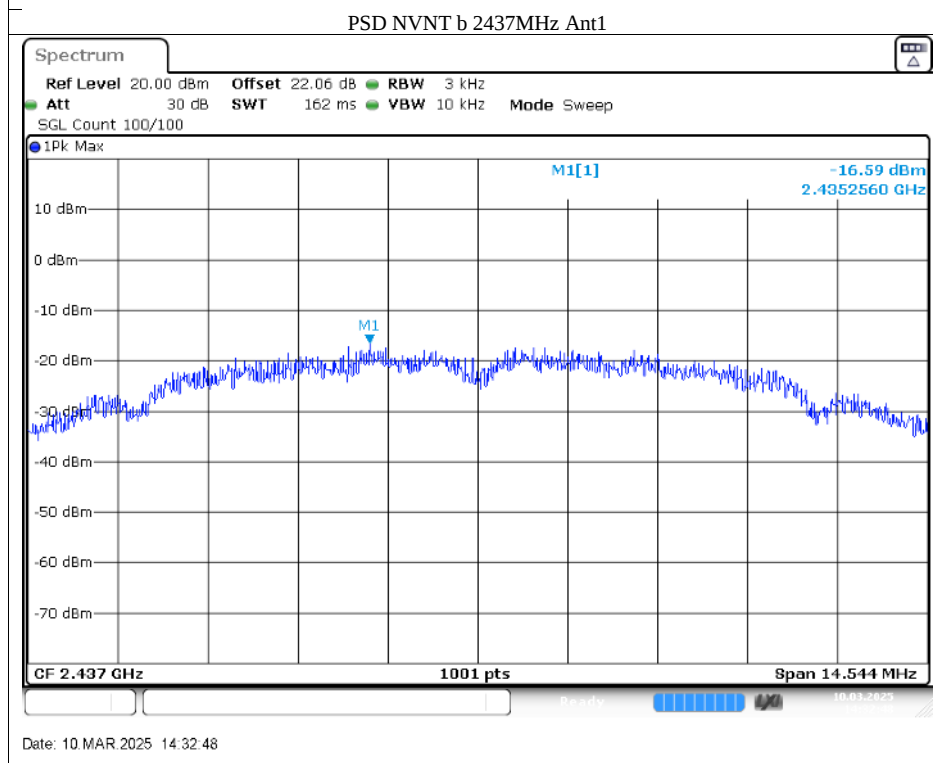
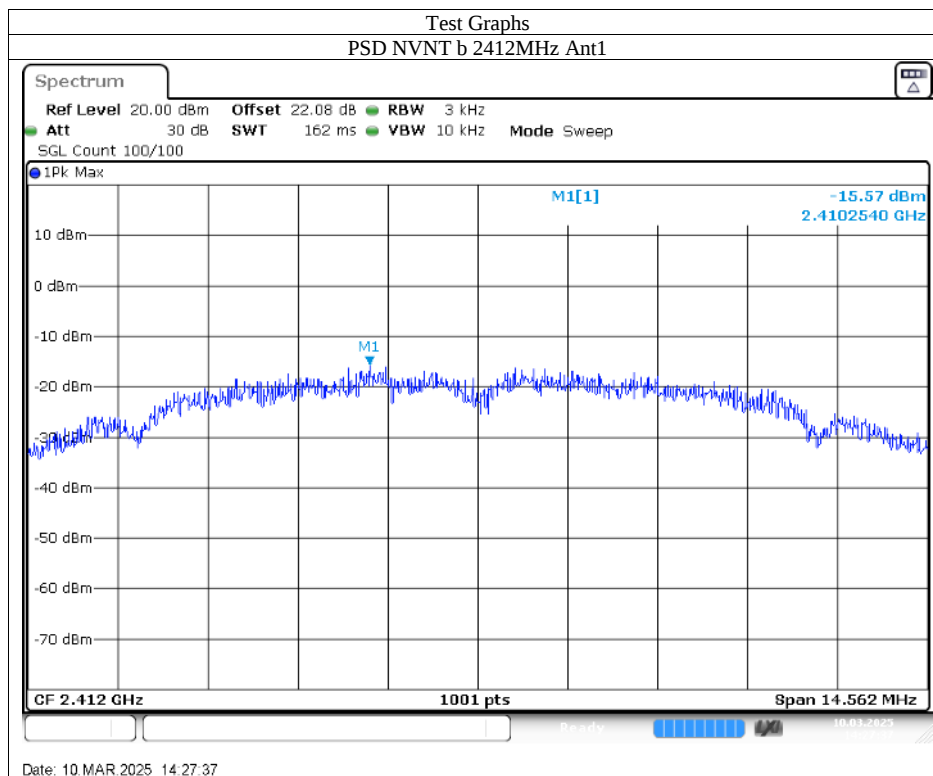


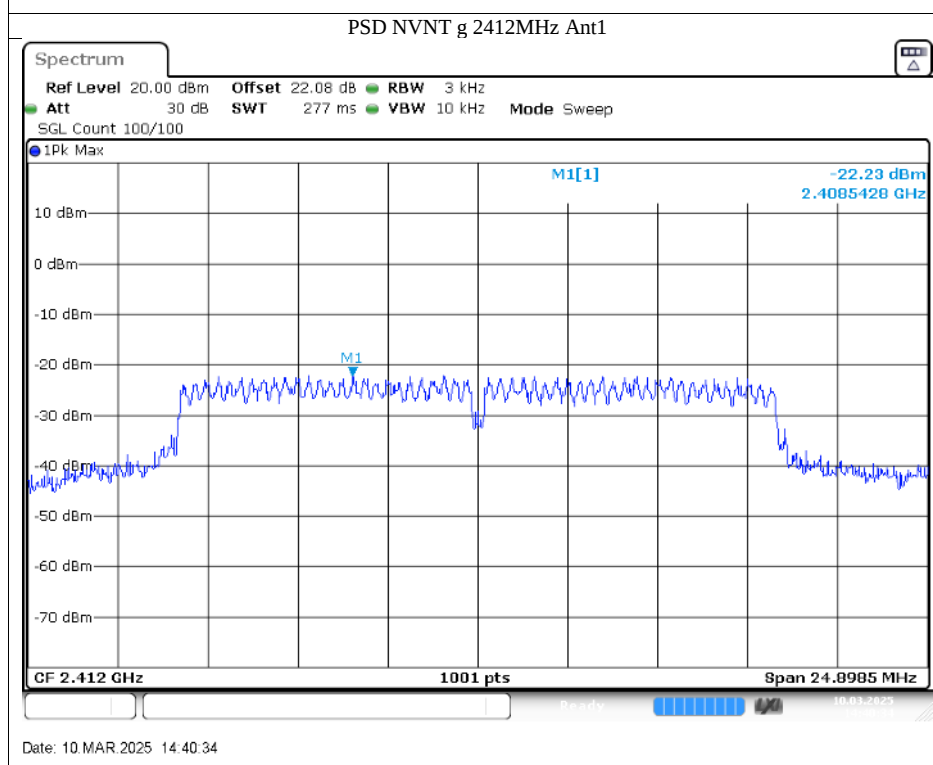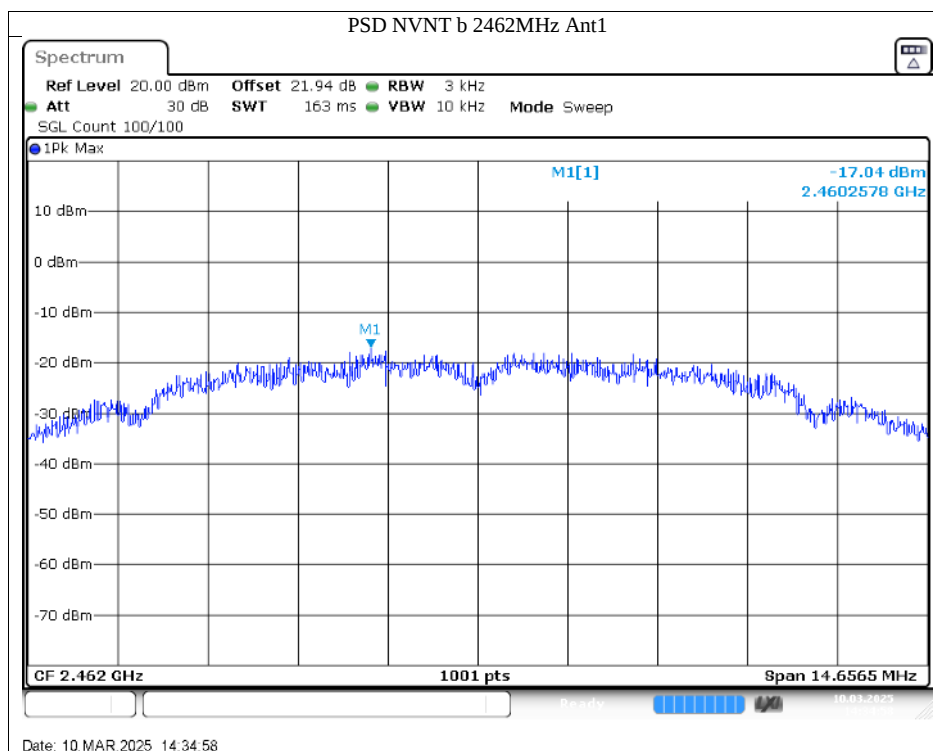

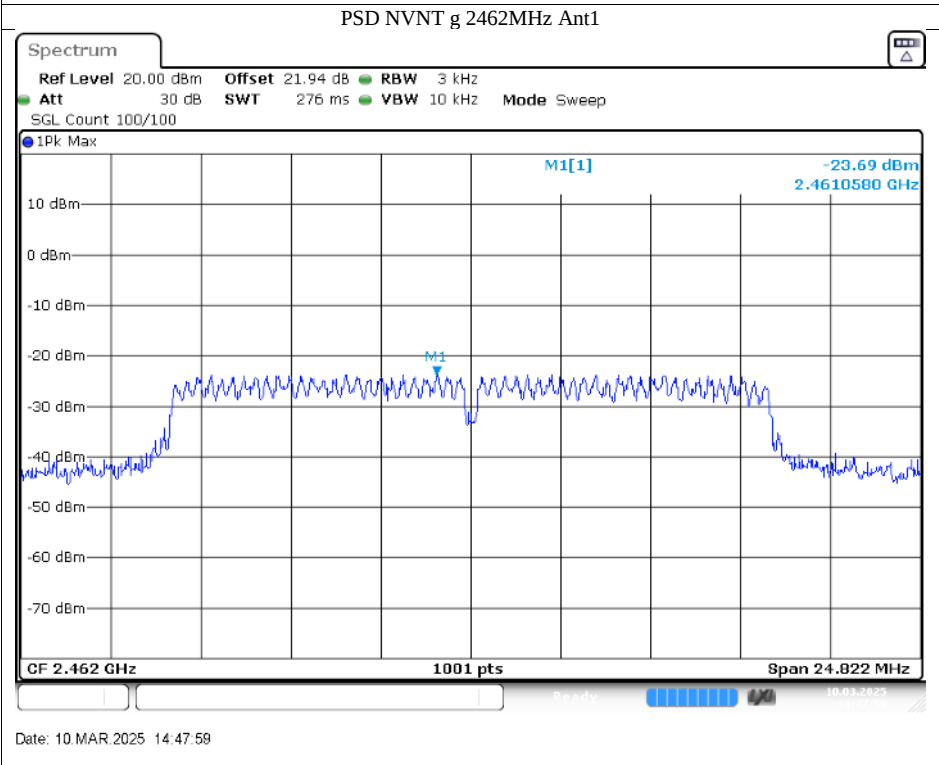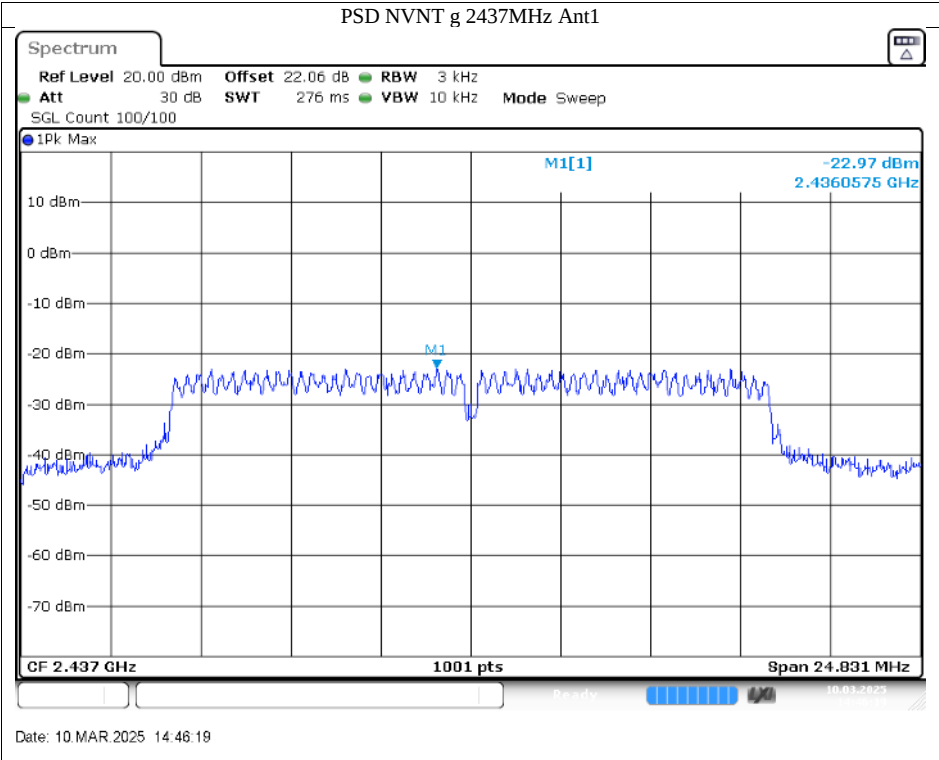

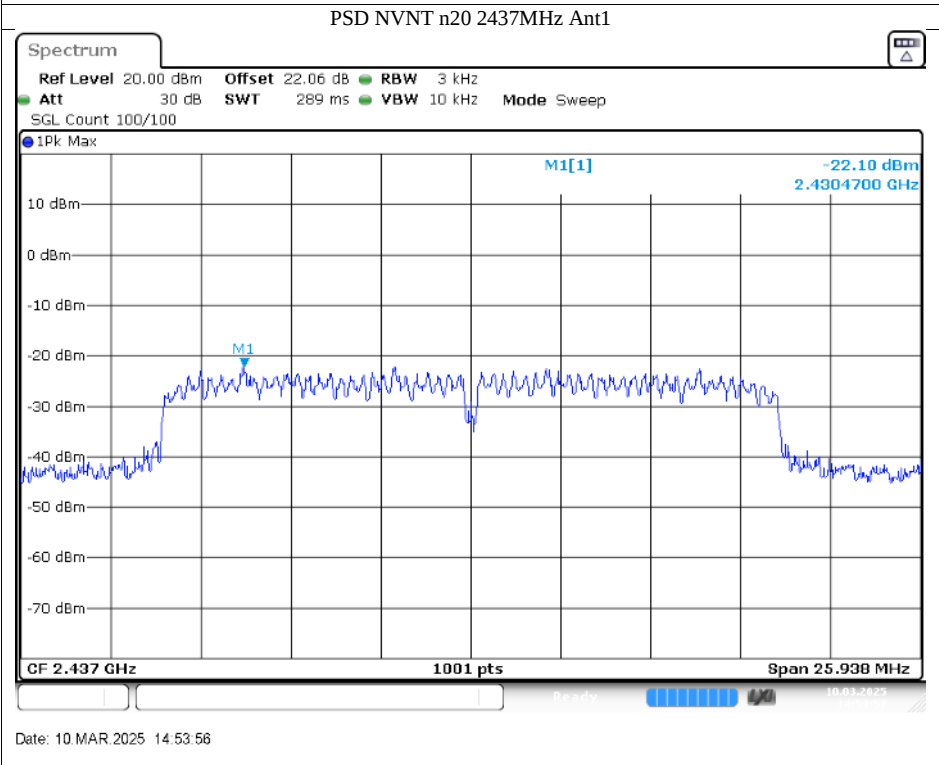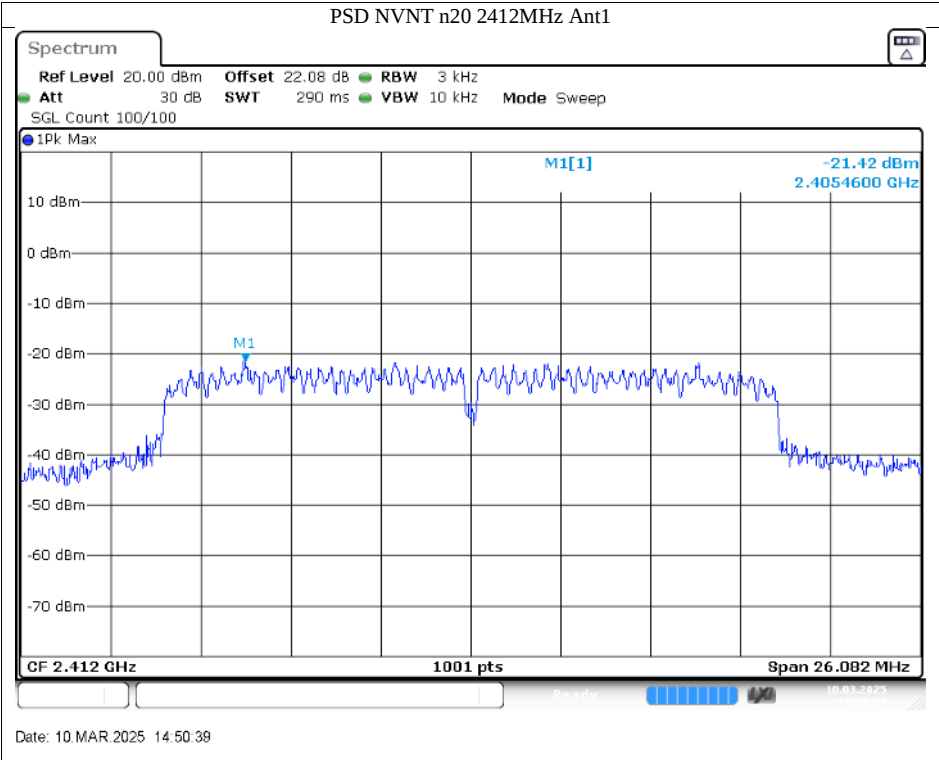

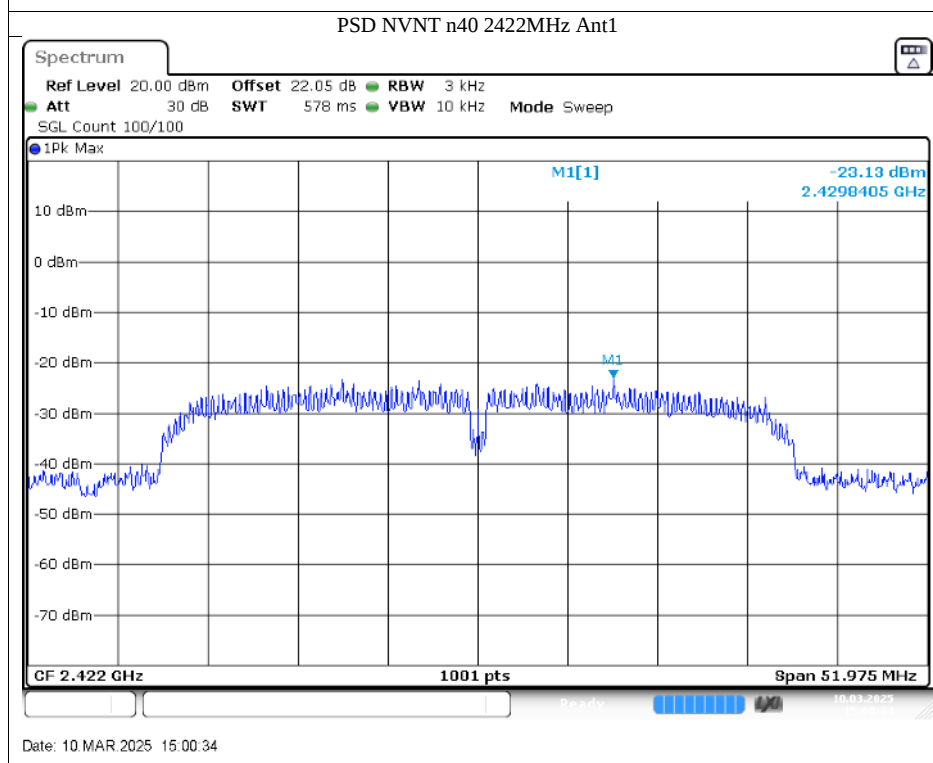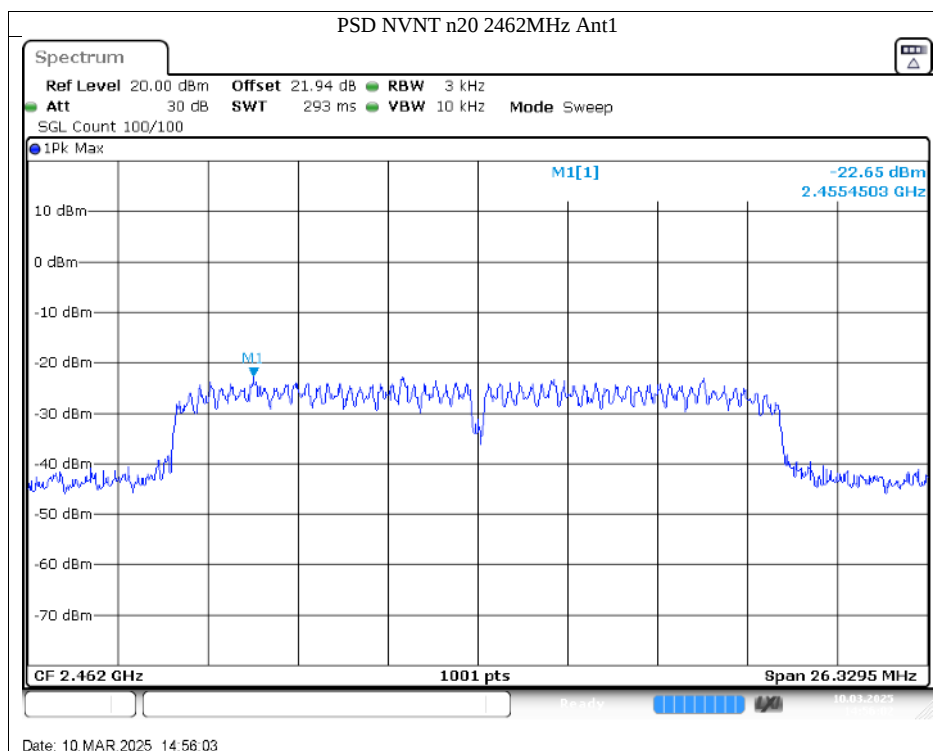

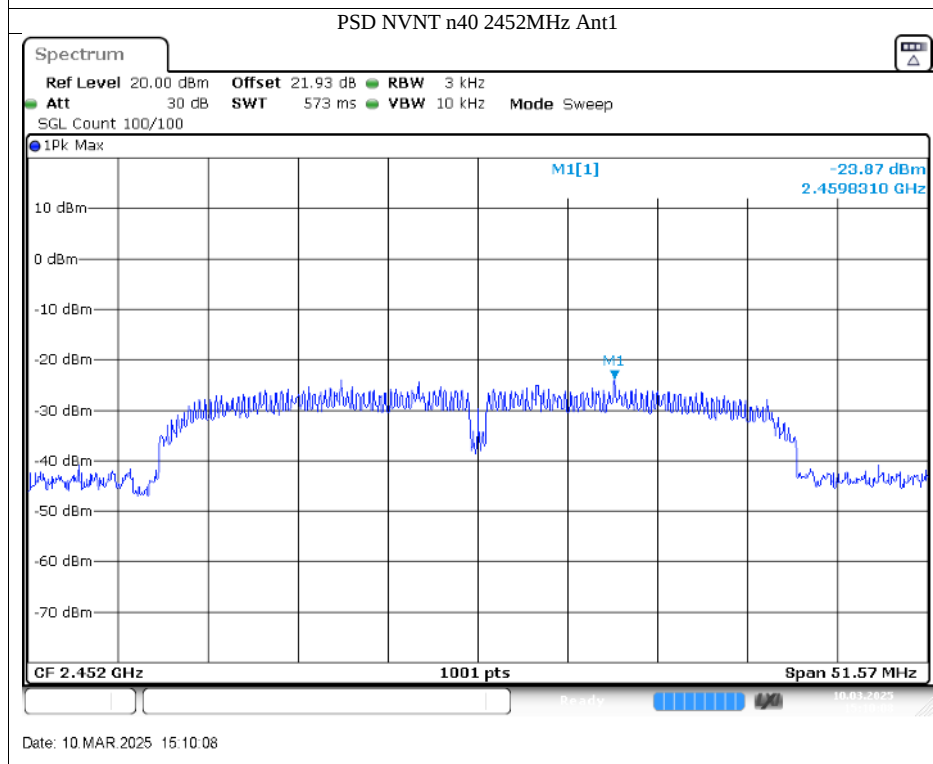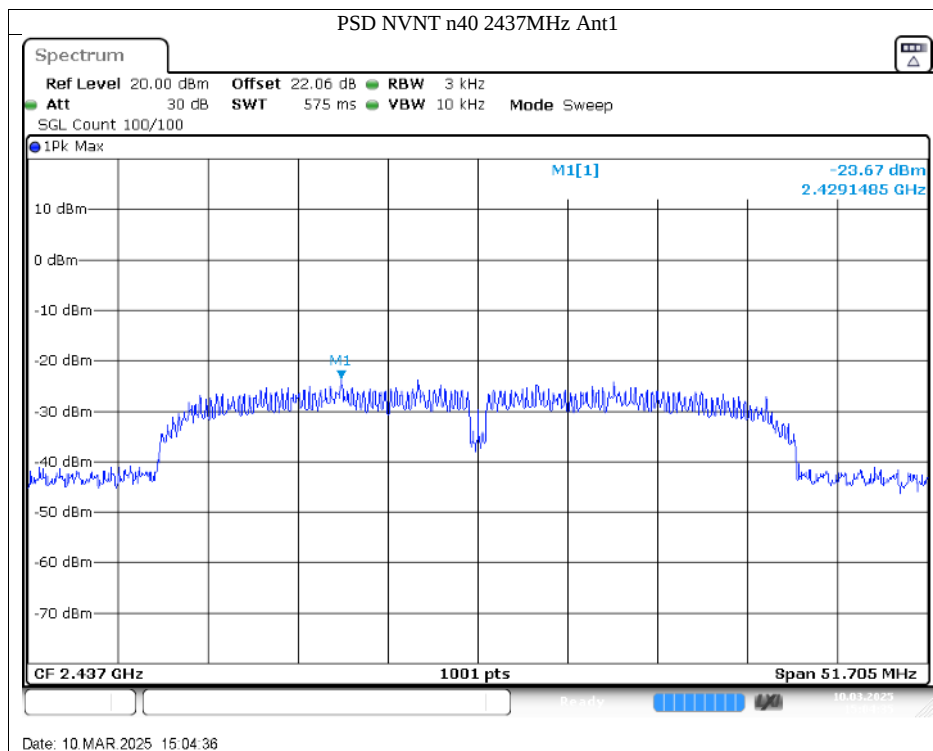


9.5 Spurious RF conducted emissions



Test Method



1. Establish a reference level by using the following procedure:
 - a. Set RBW=100 kHz. VBW $\geq$ 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
 - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
 - a. Set the center frequency and span to encompass frequency range to be measured.
 - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.



Limit



Frequency Range MHz	Limit (dBc)
30-25000	-20


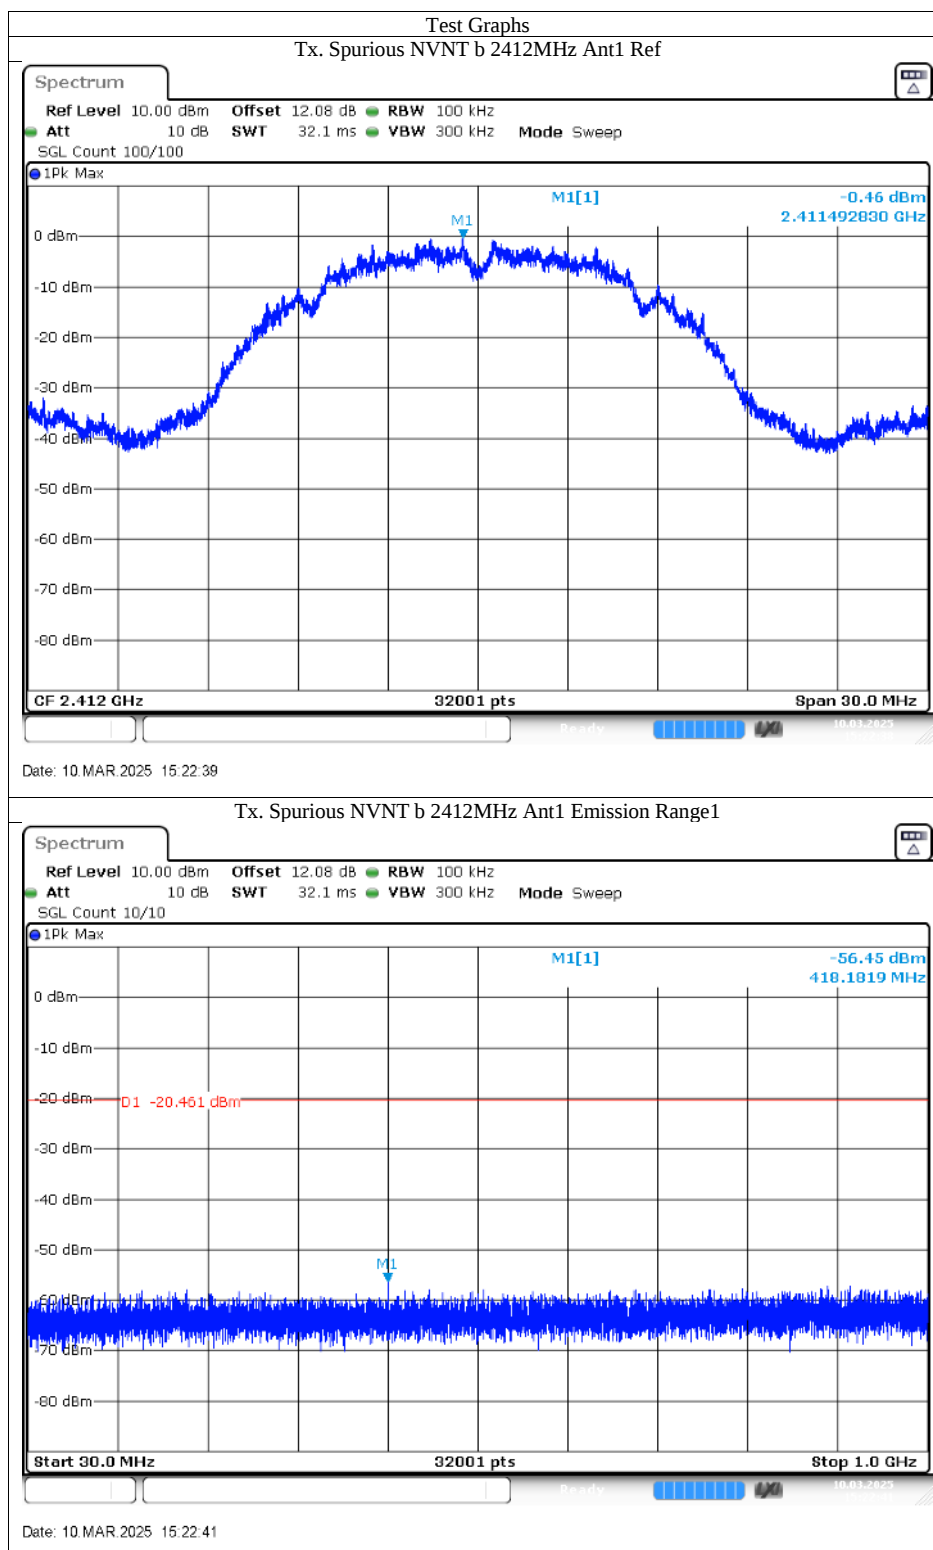
Spurious RF conducted emissions

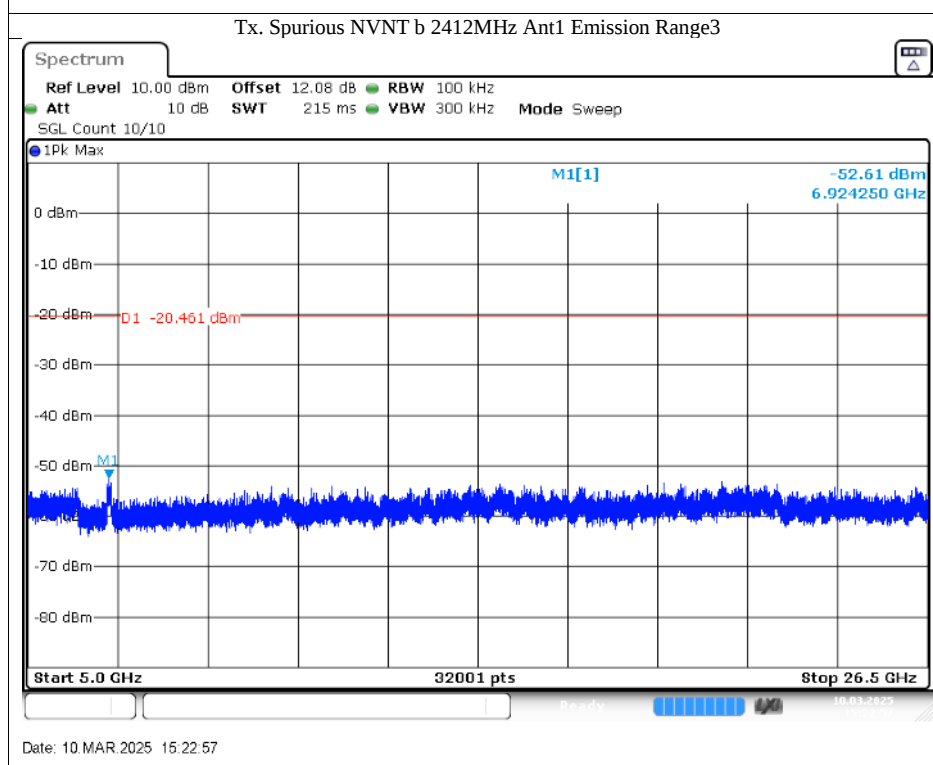
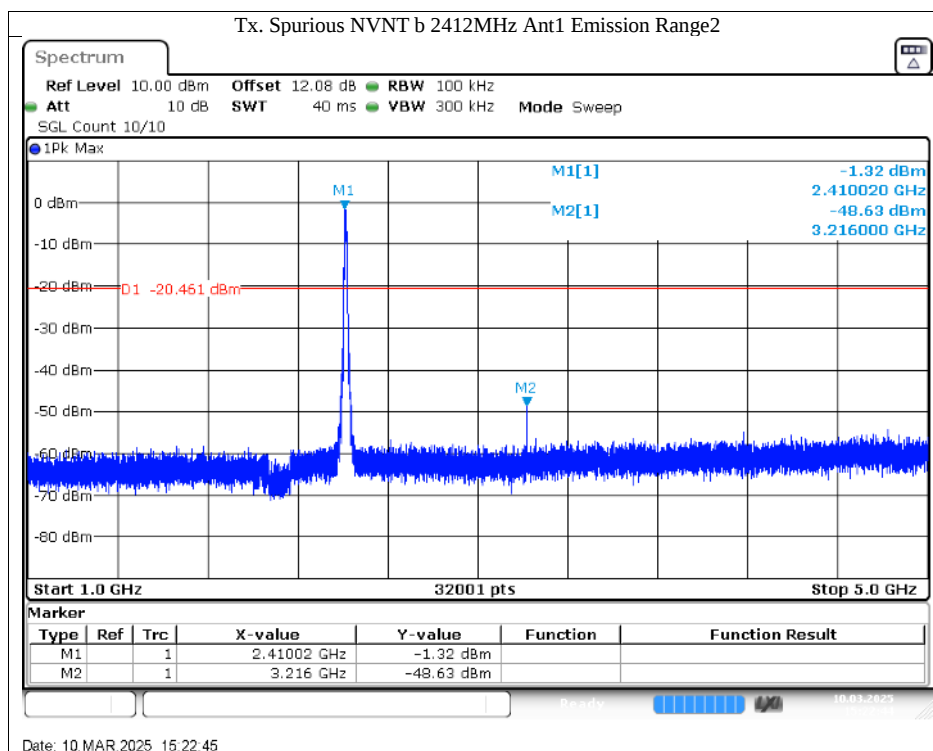


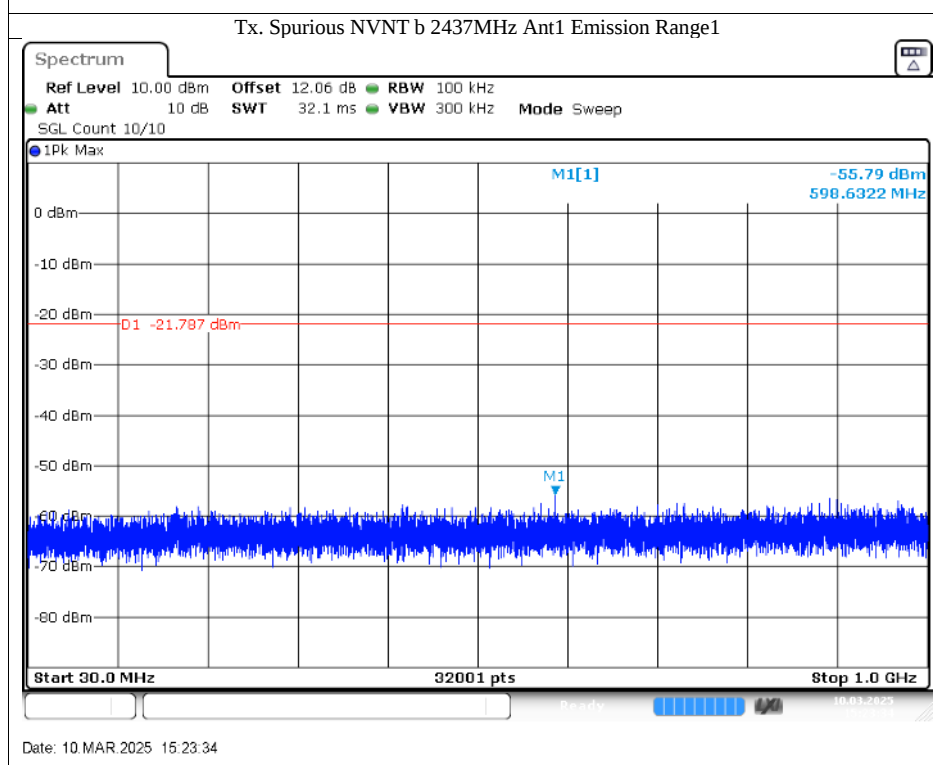
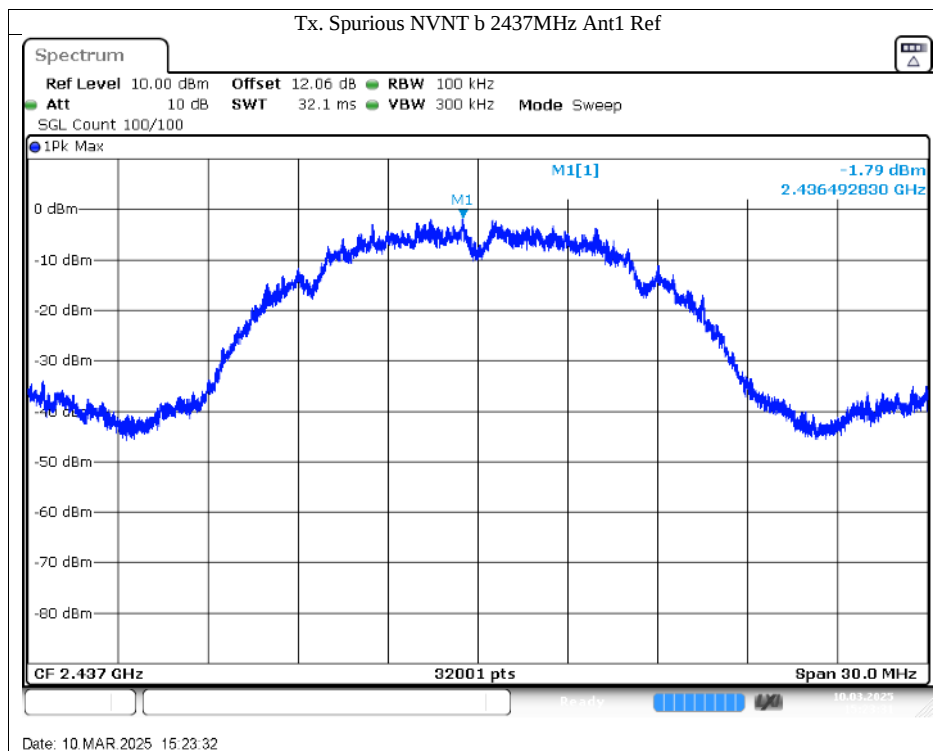


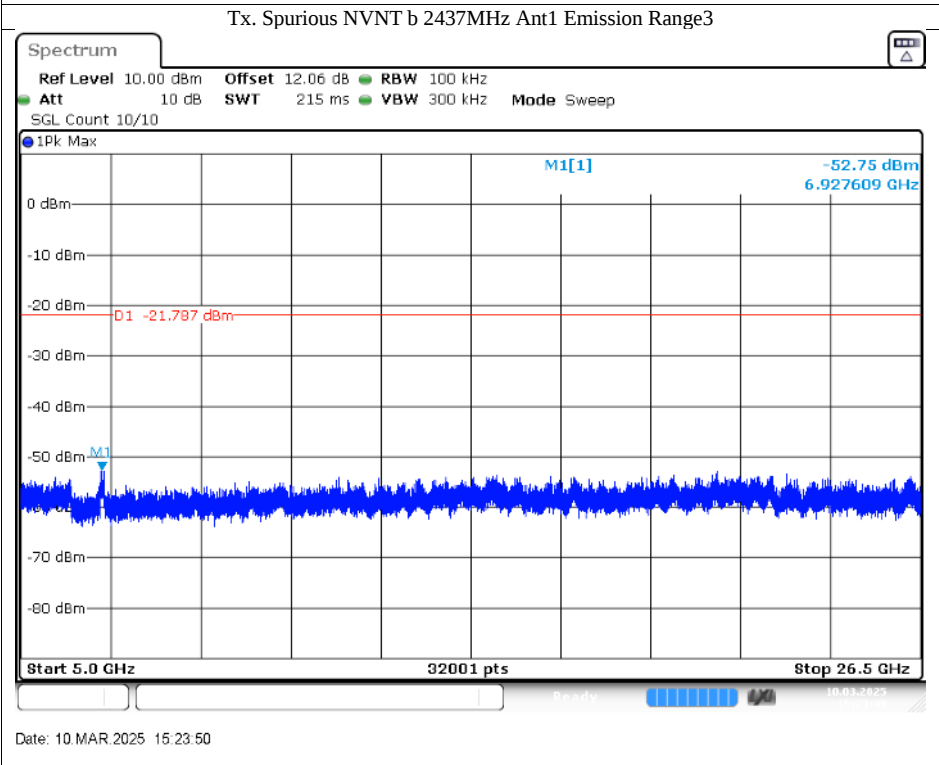
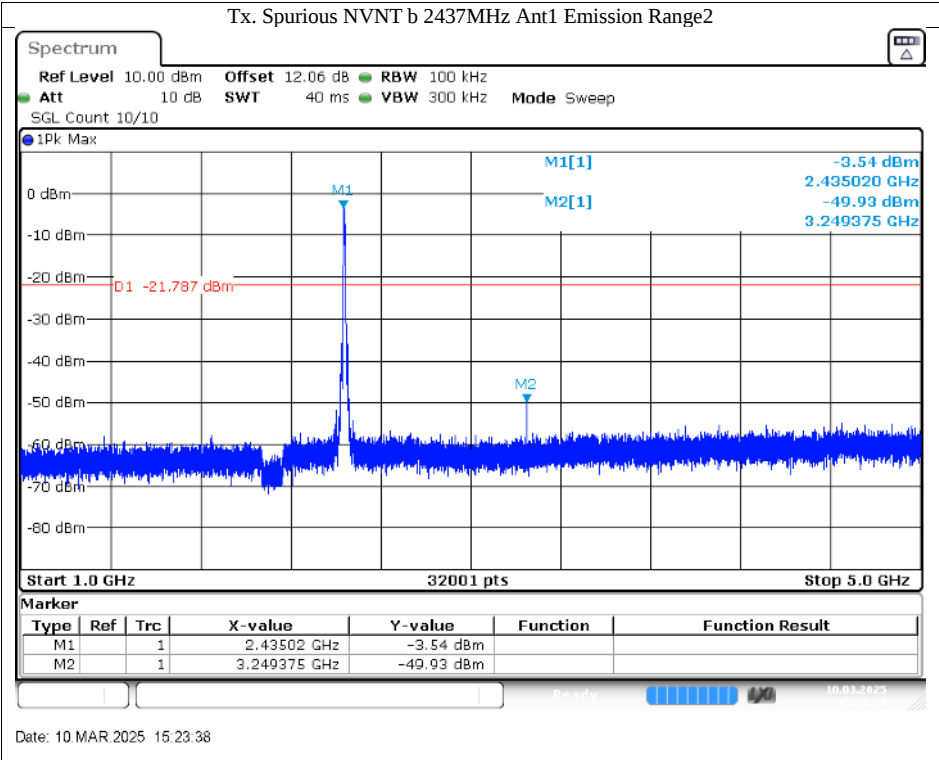


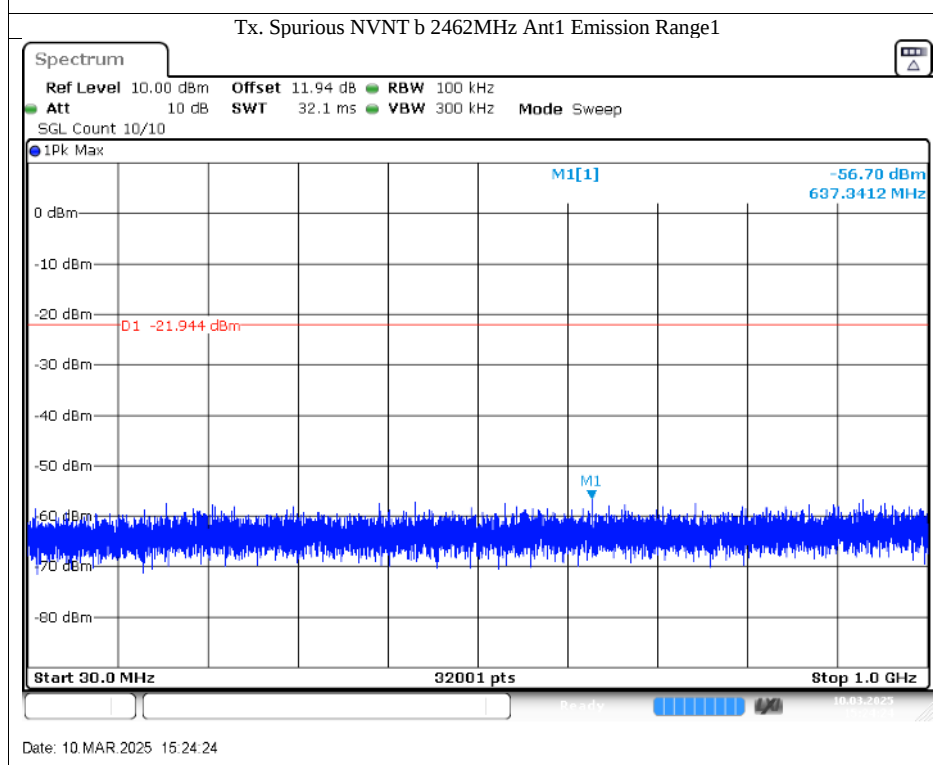
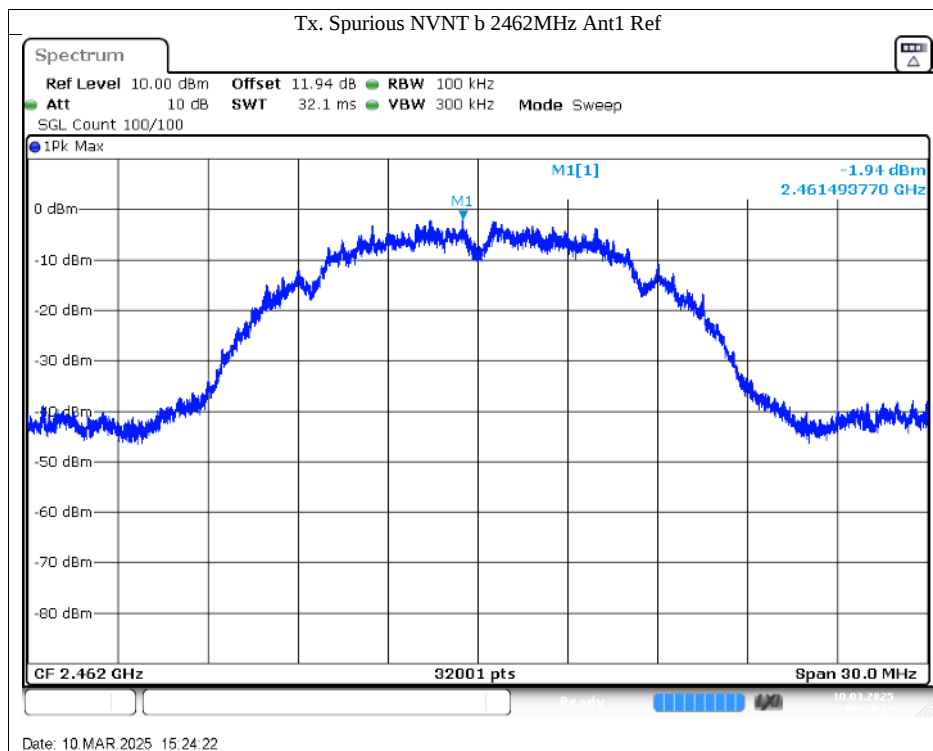


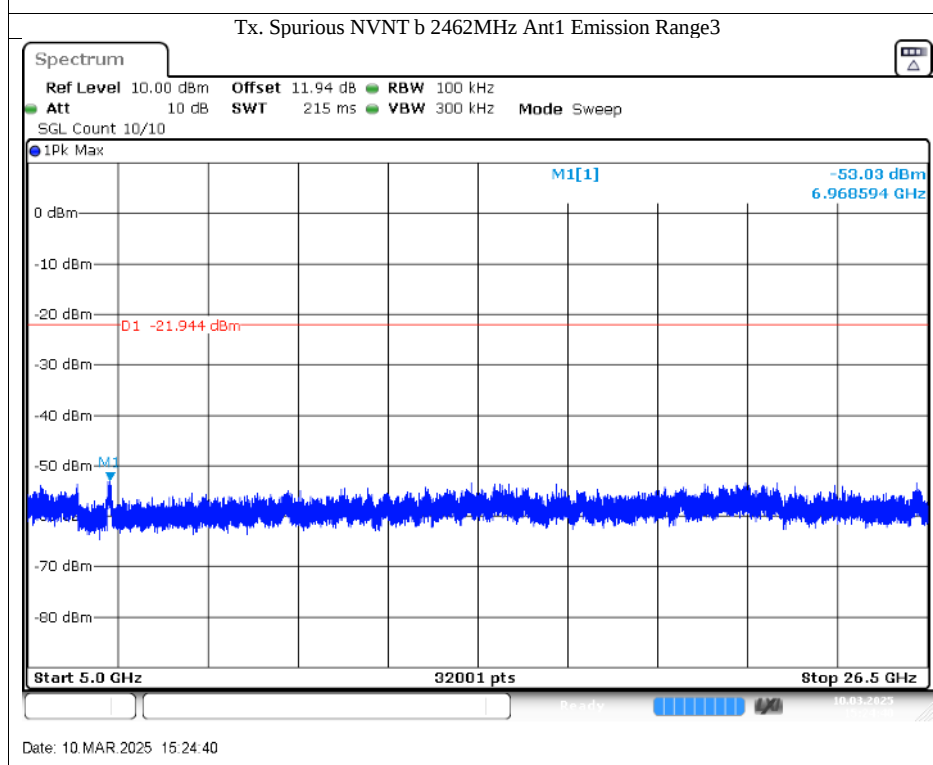
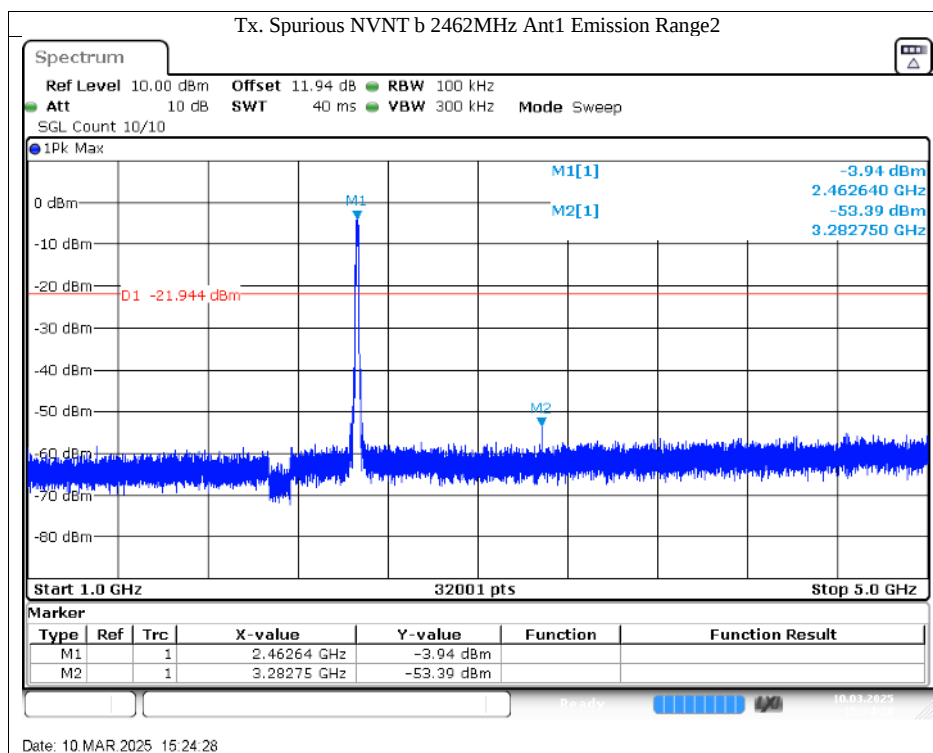


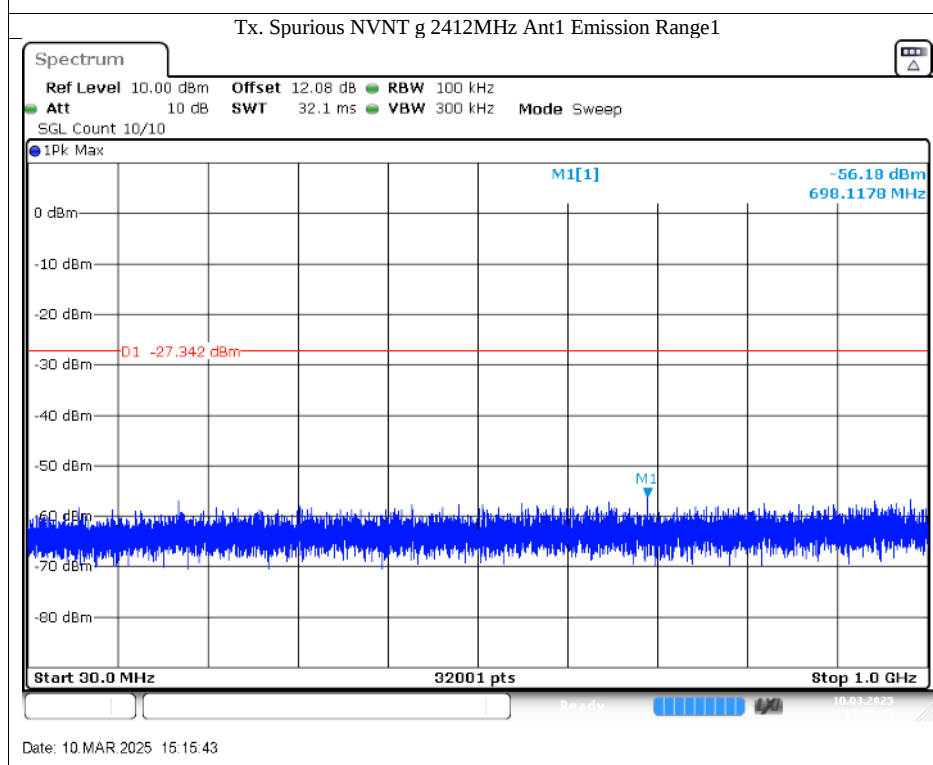
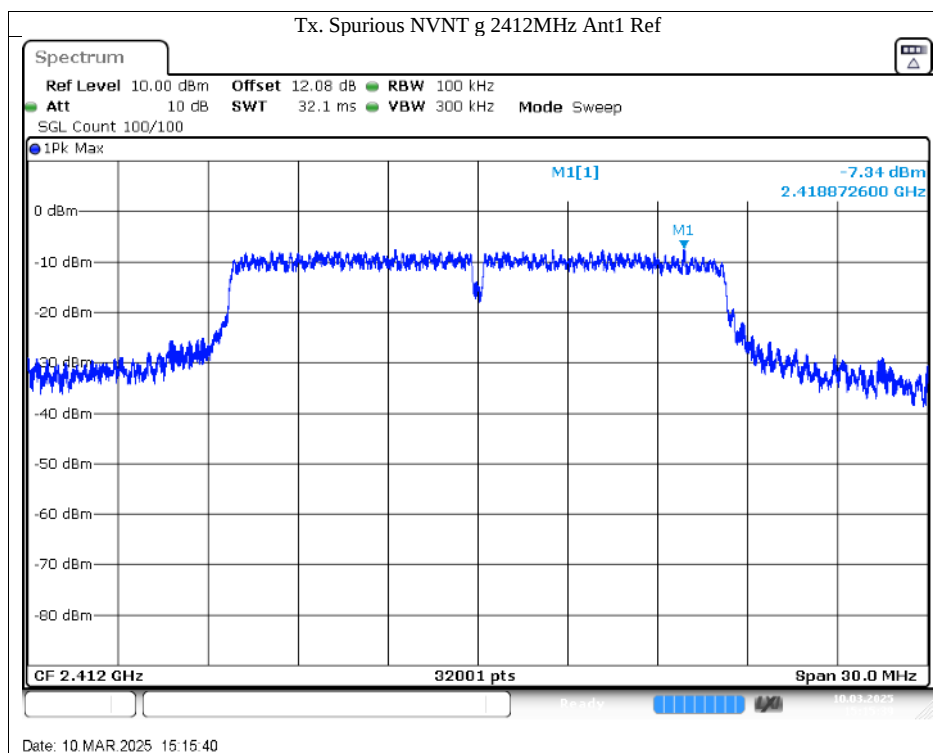


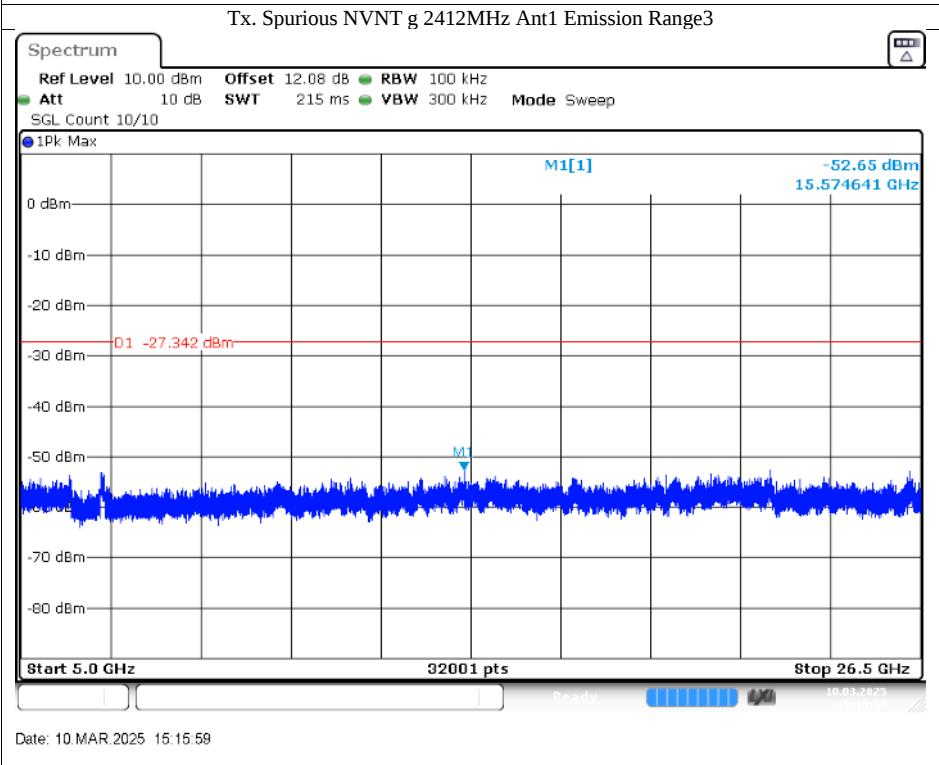
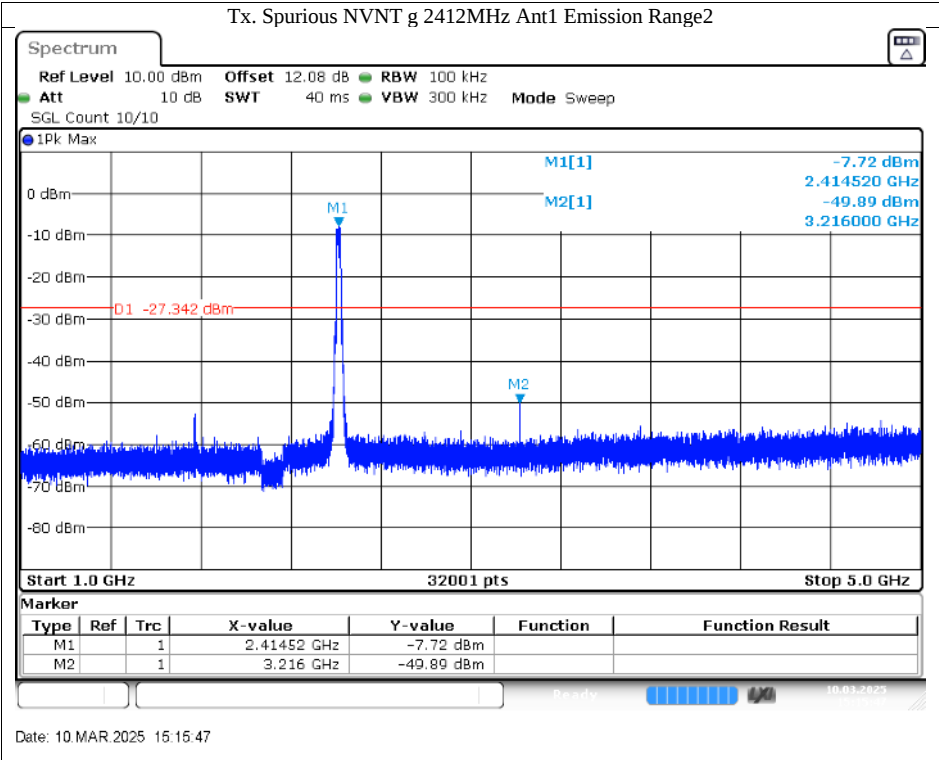


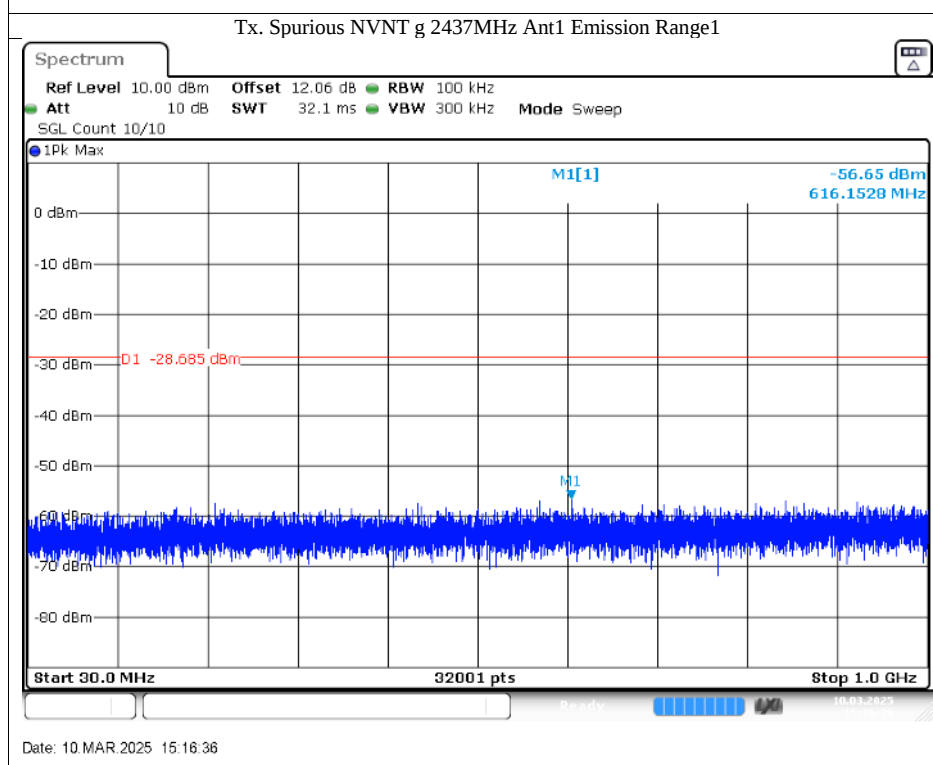
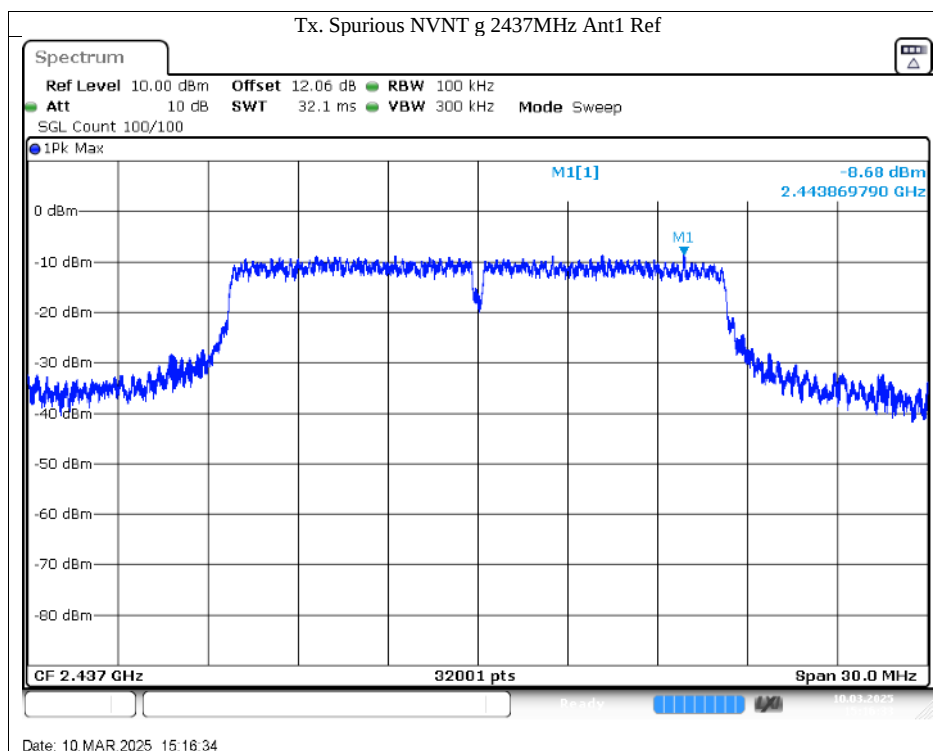


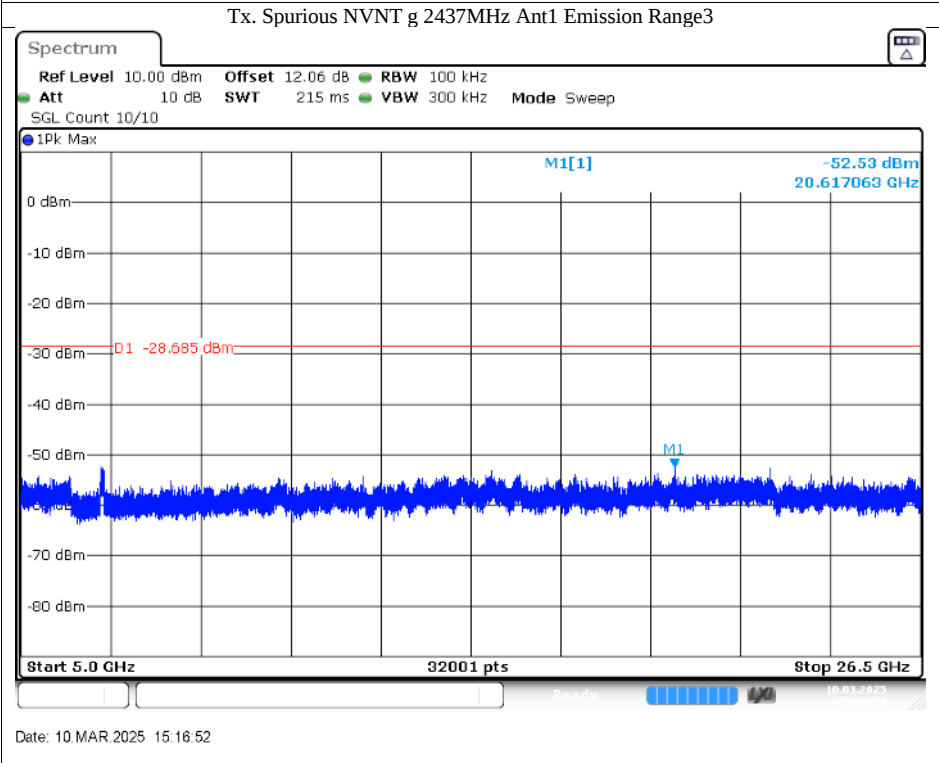
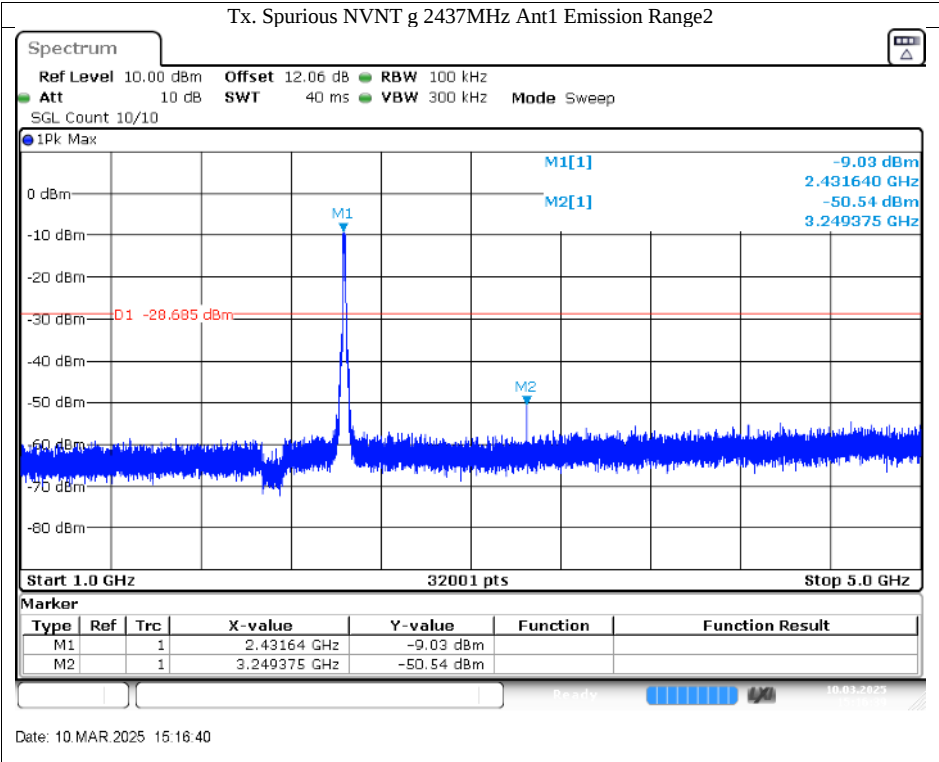


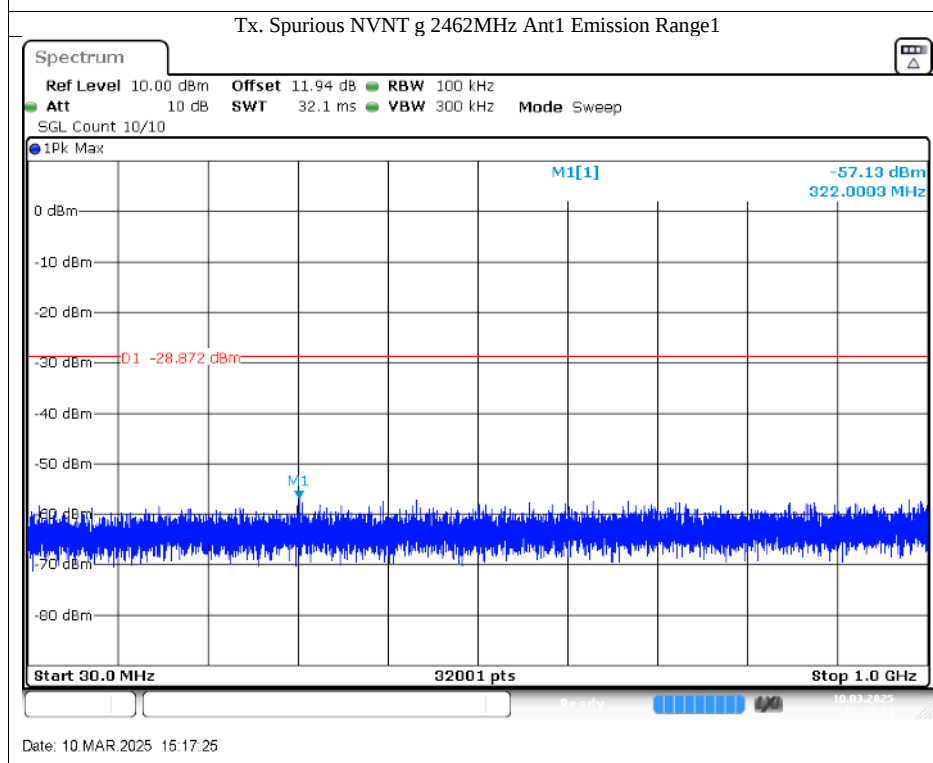
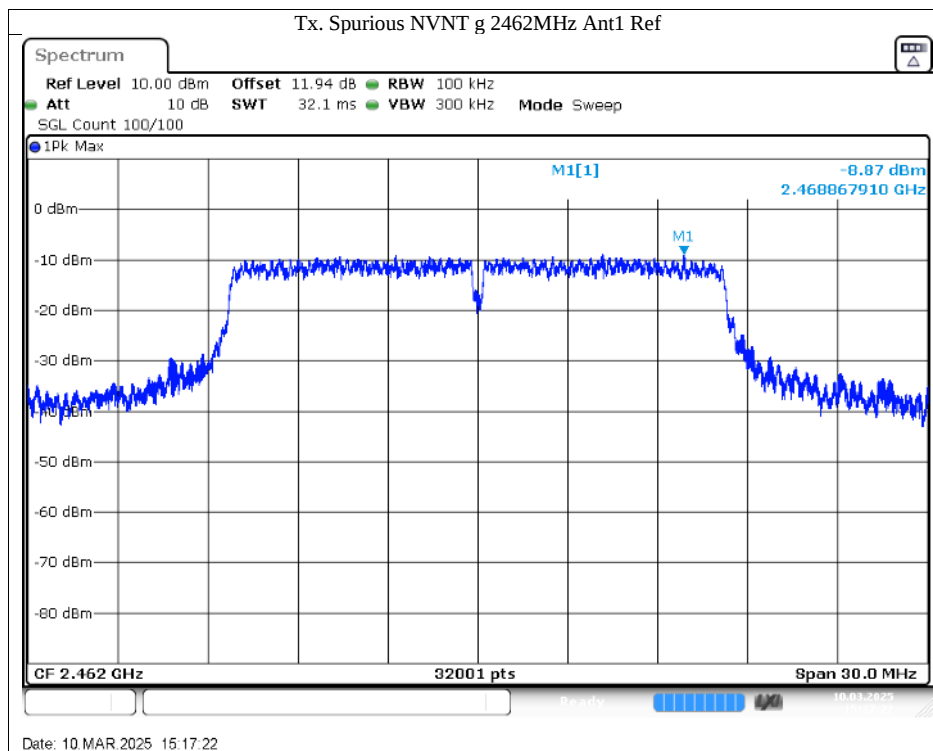


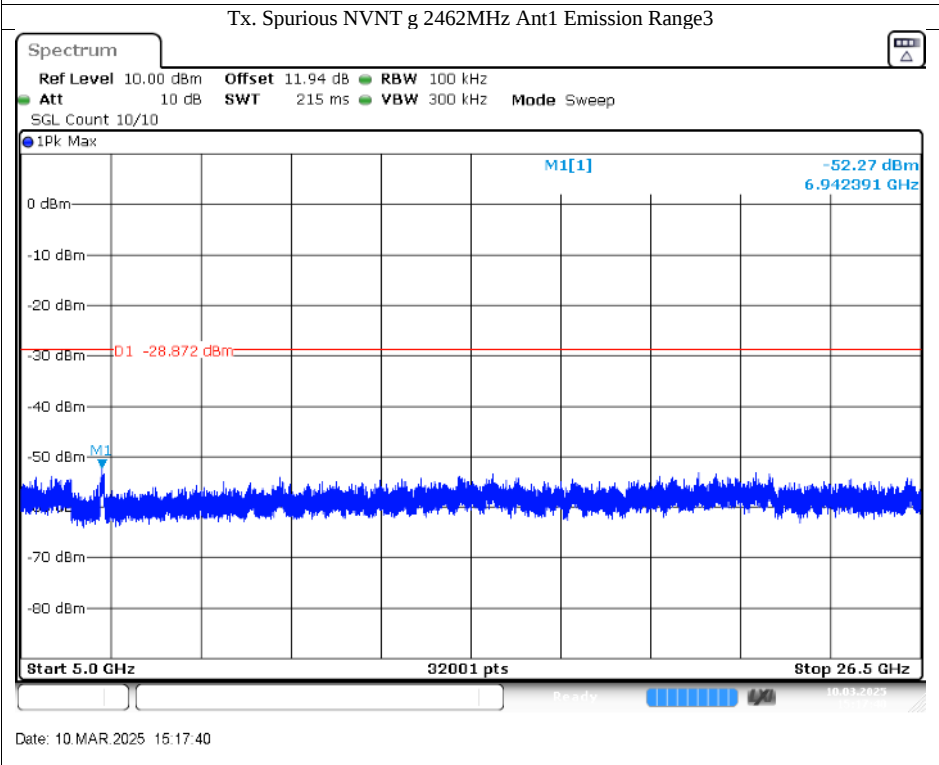
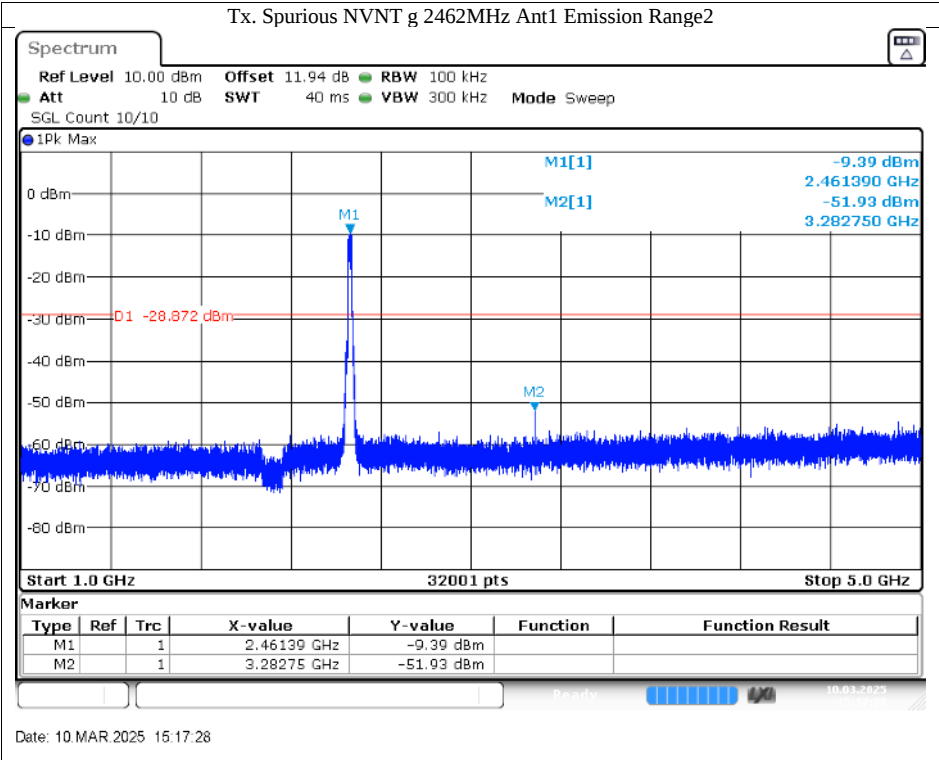


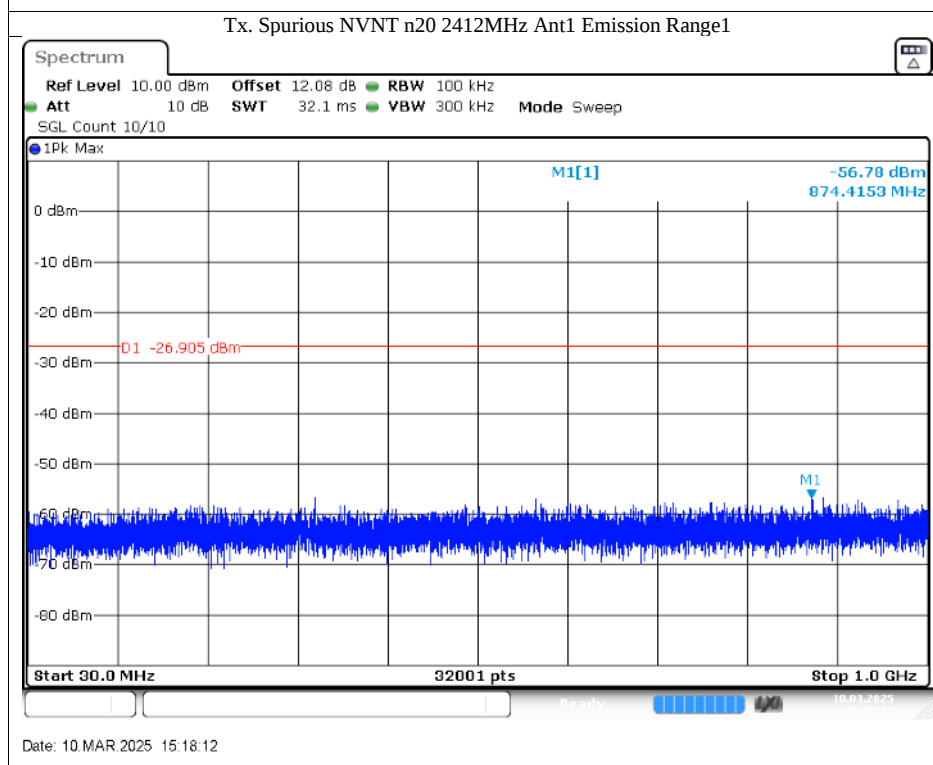
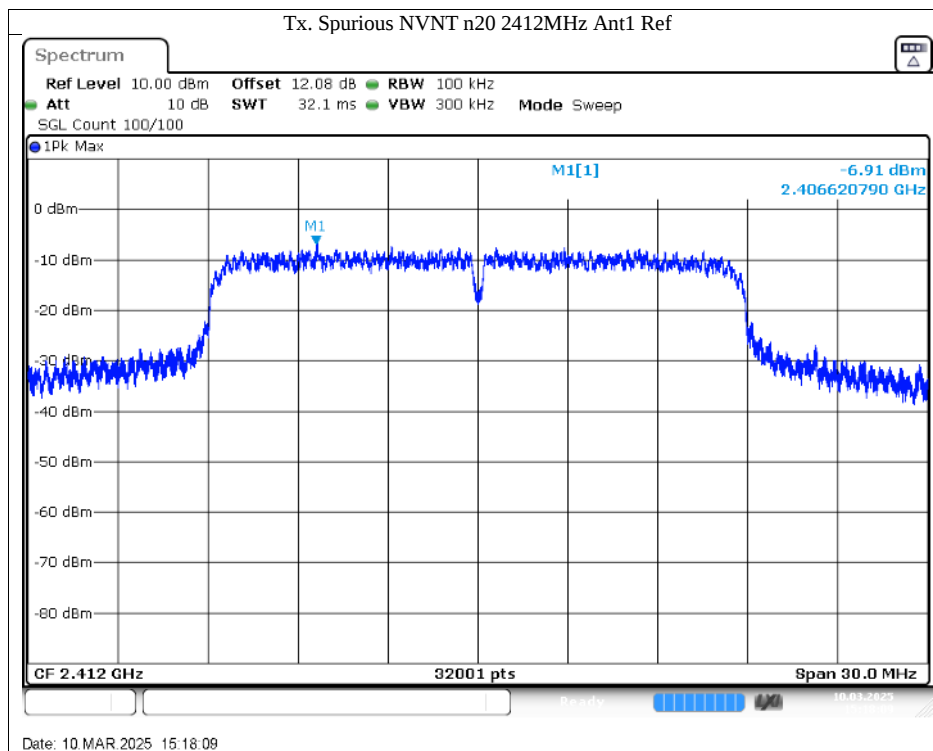


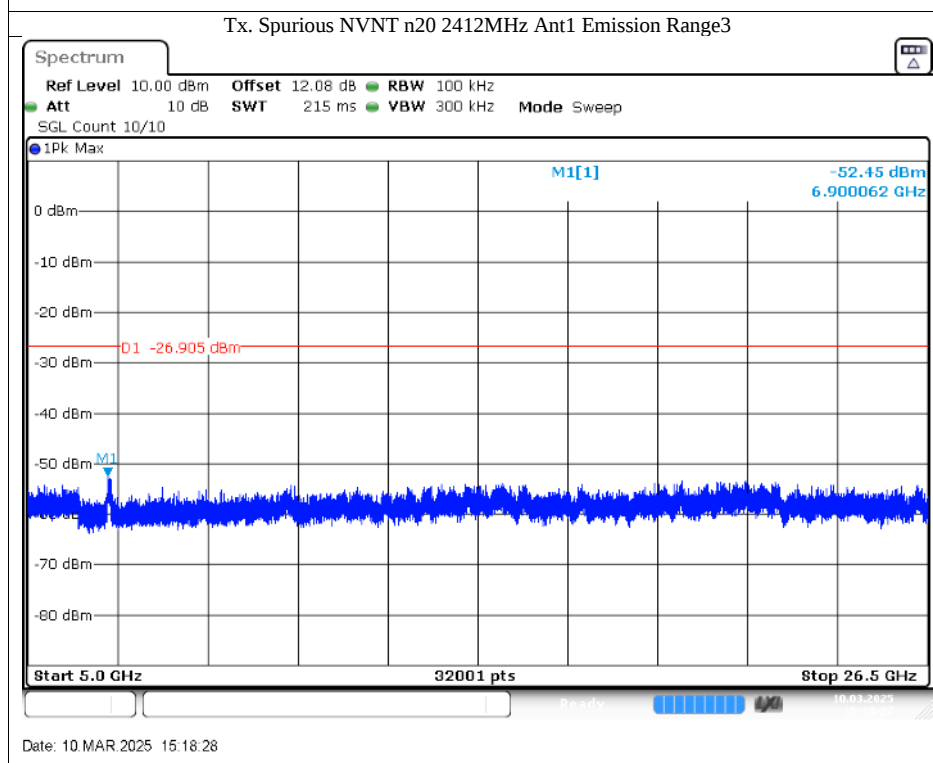
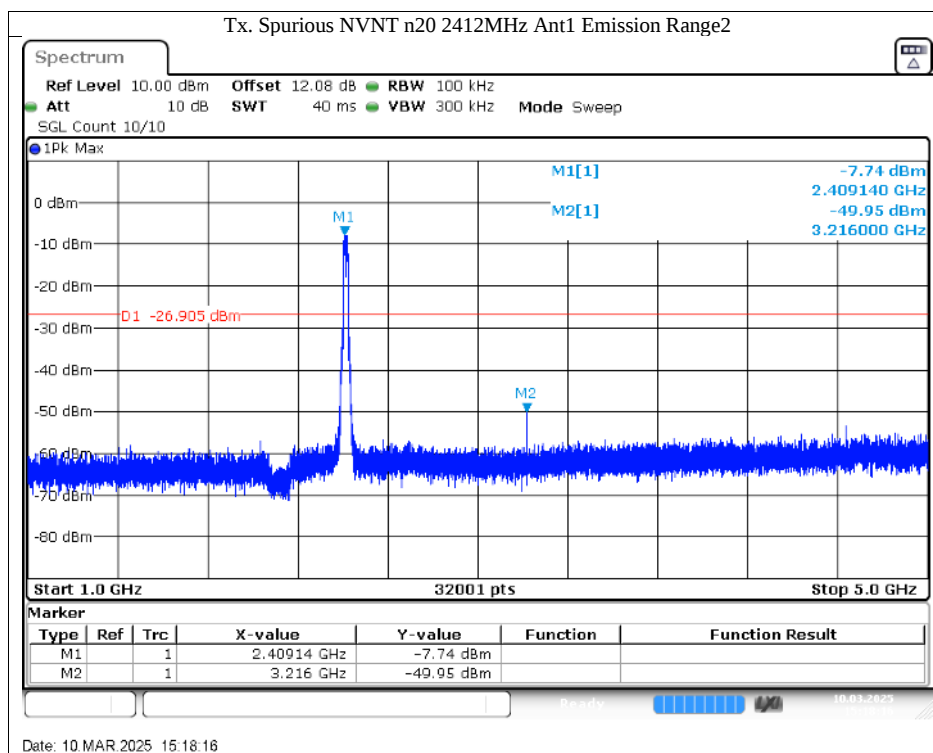


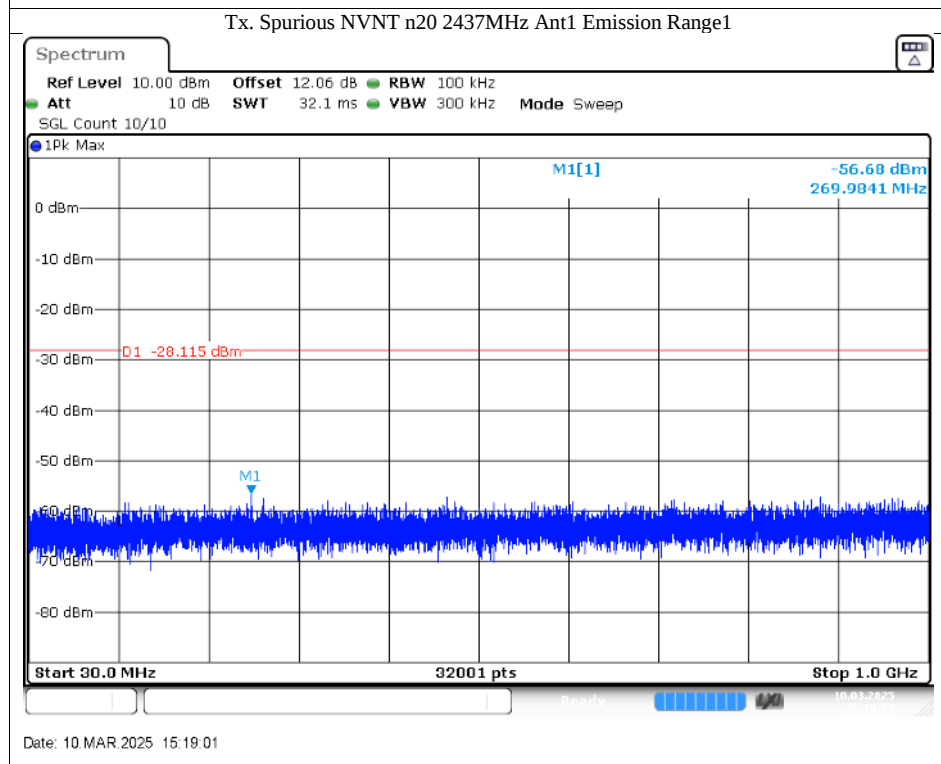
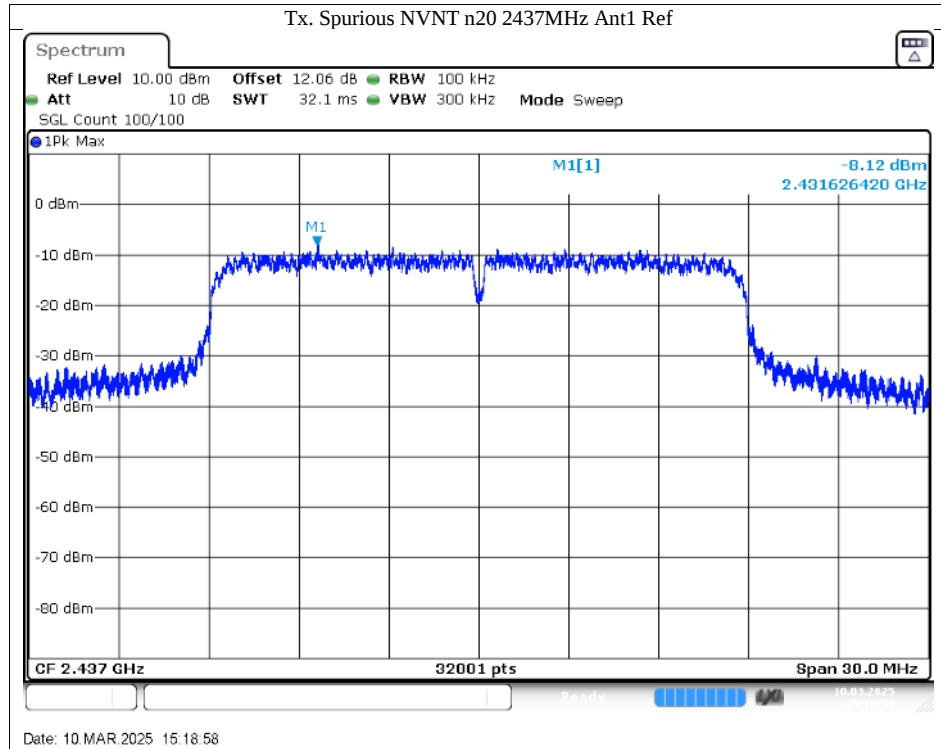


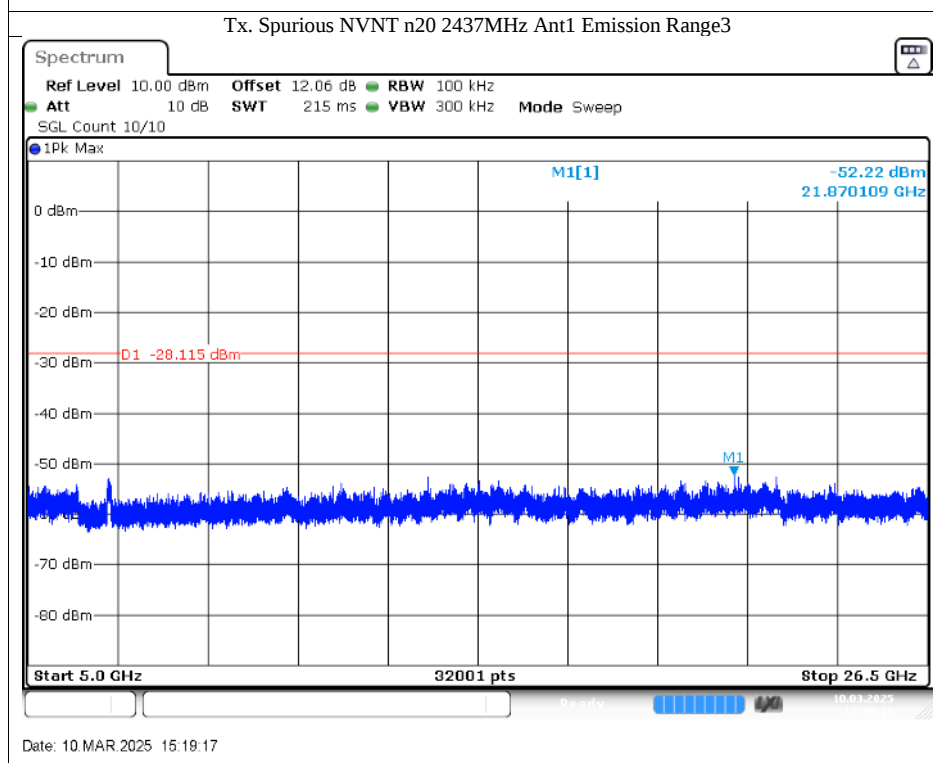
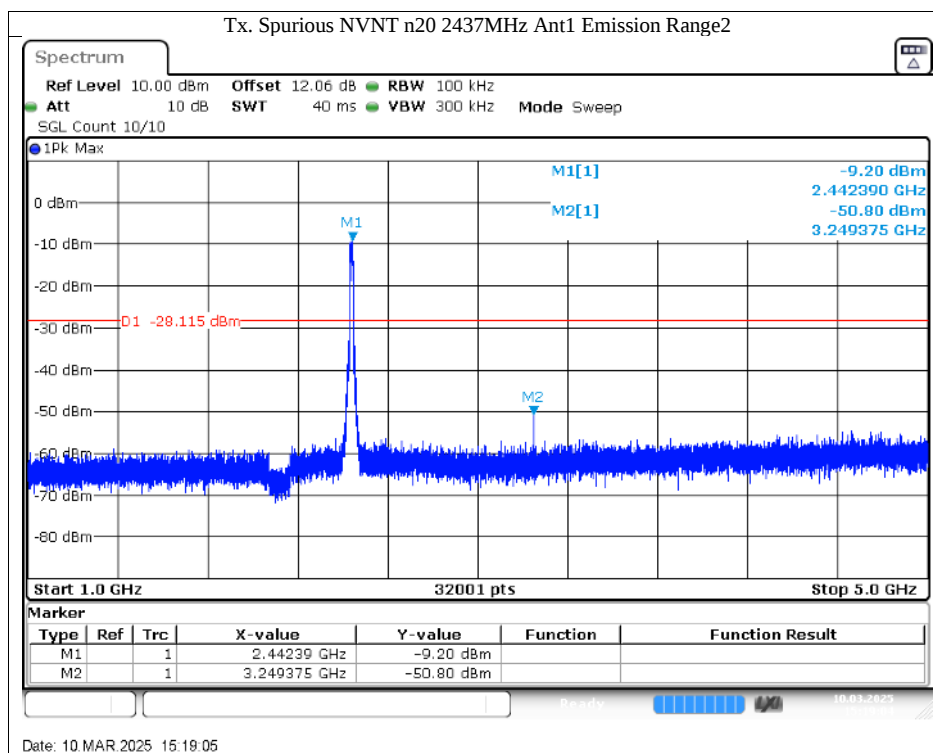


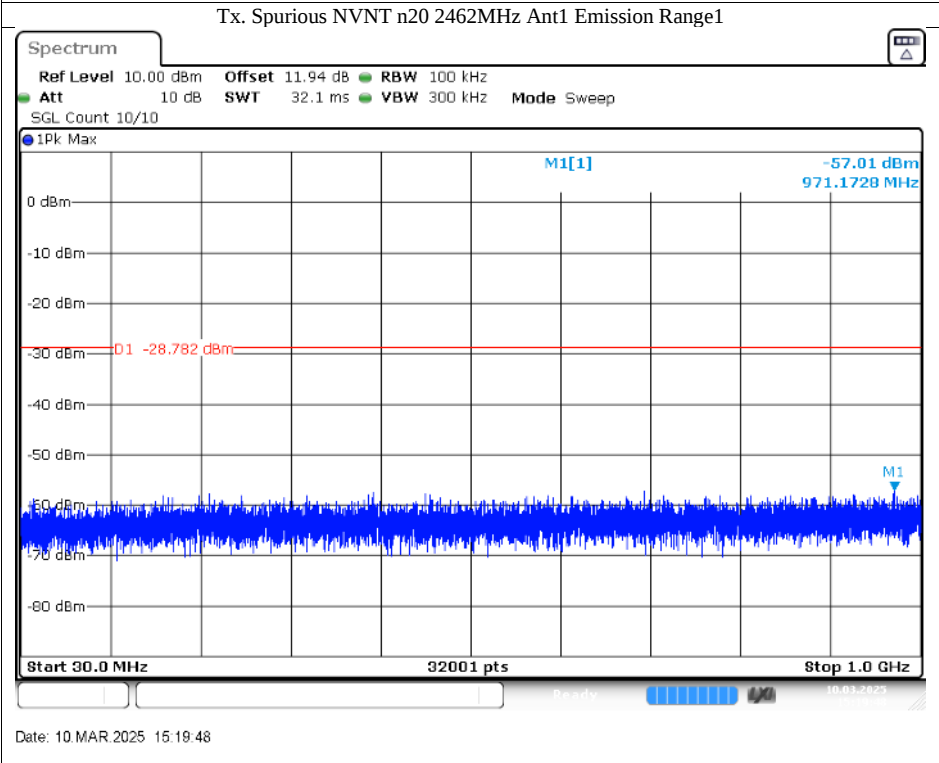
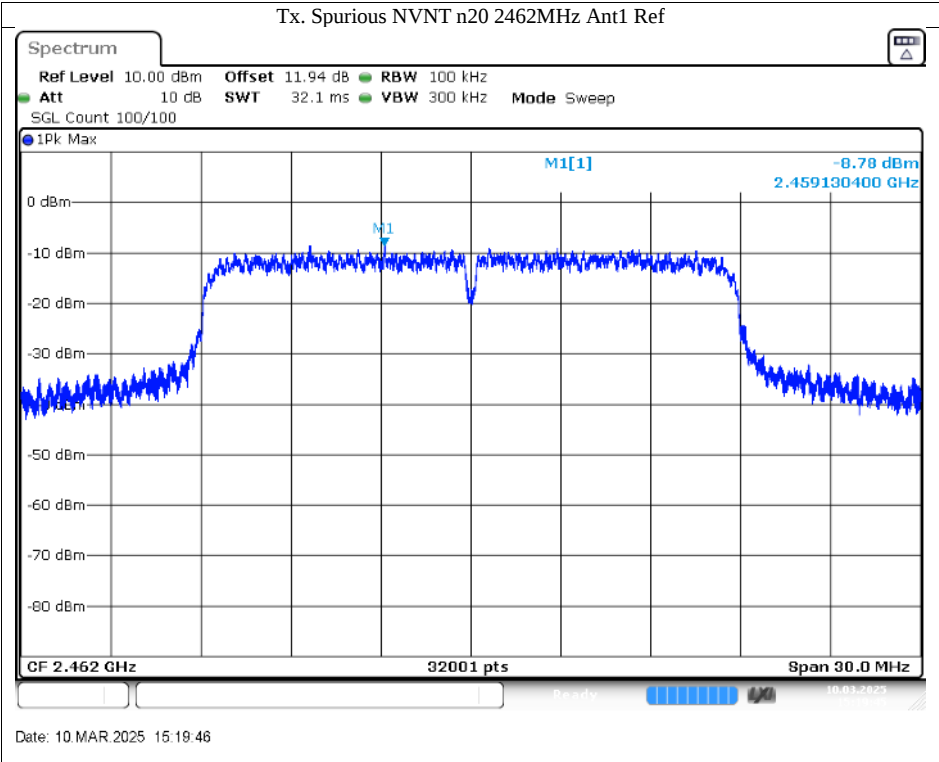


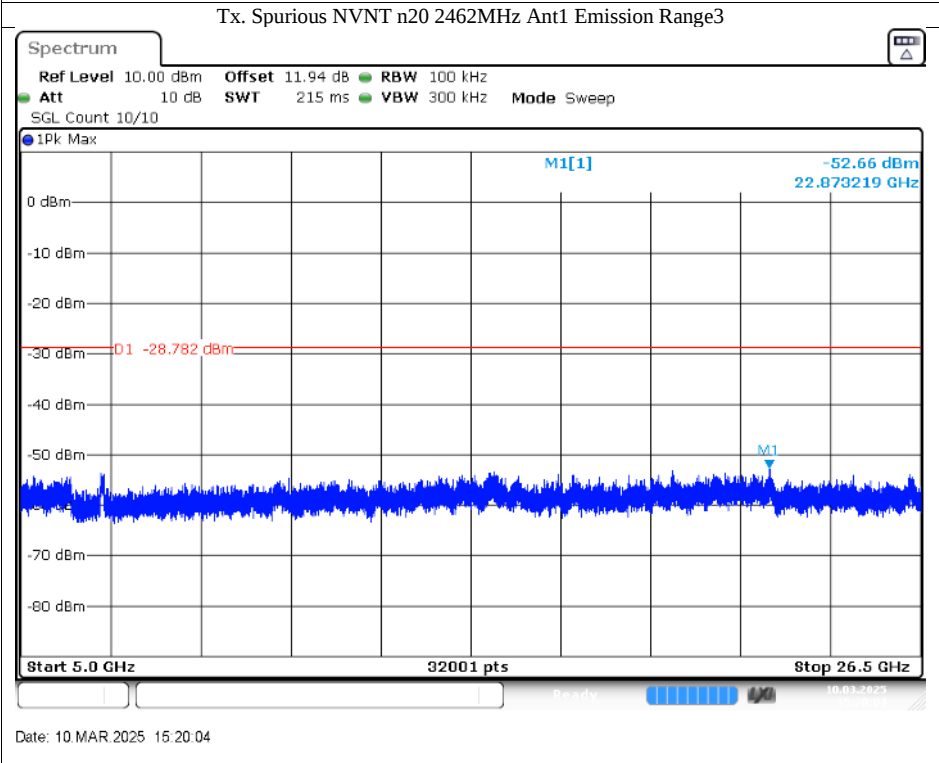
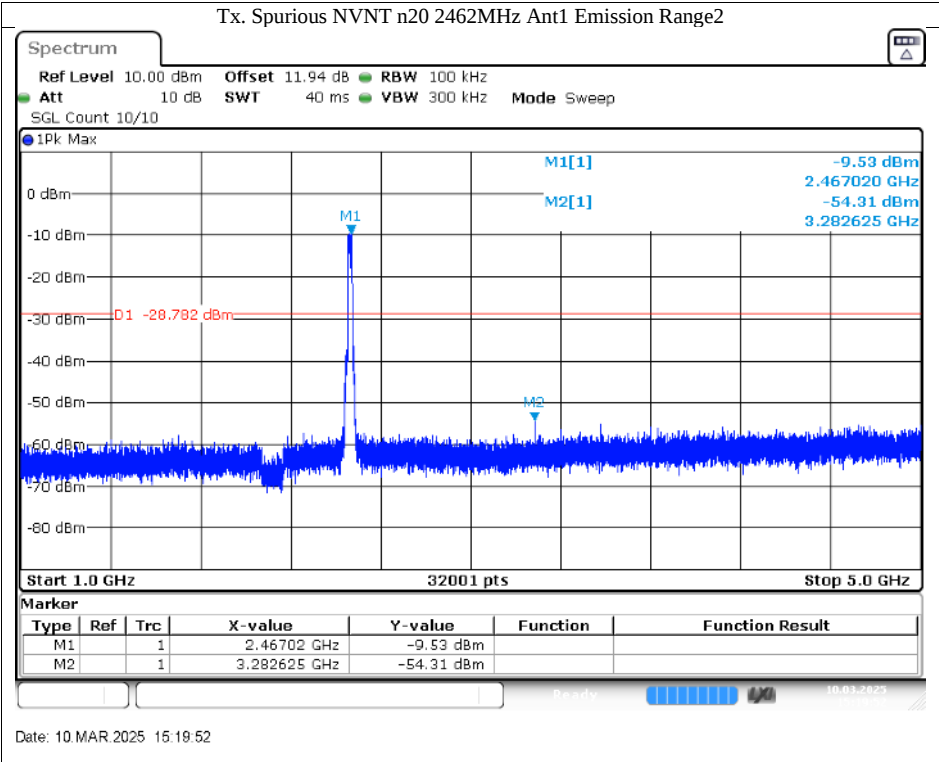


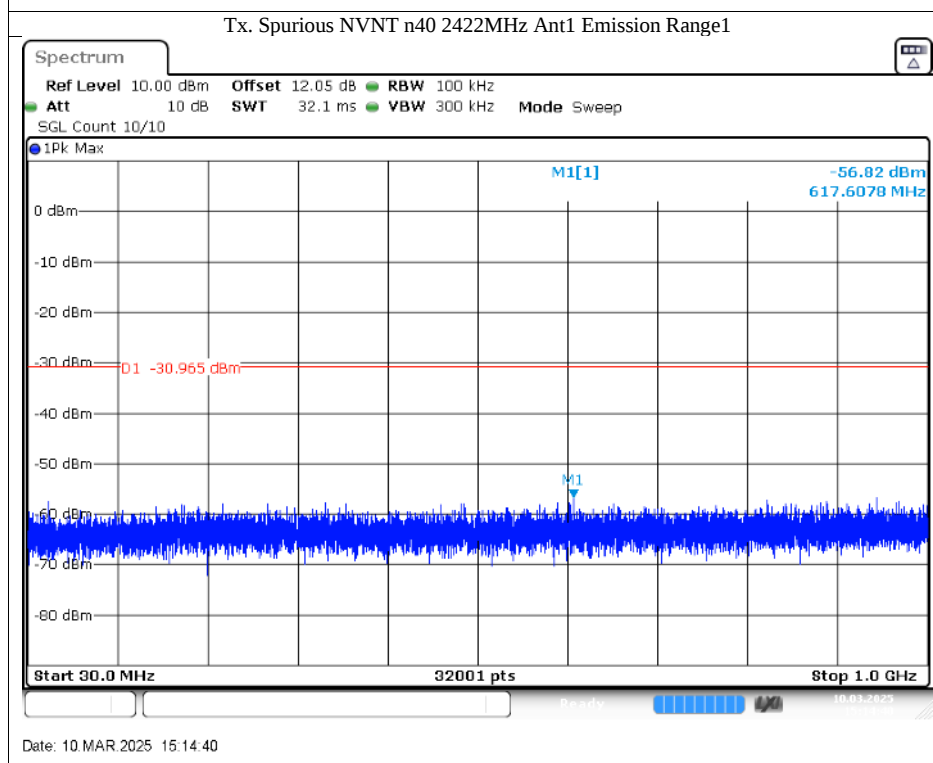
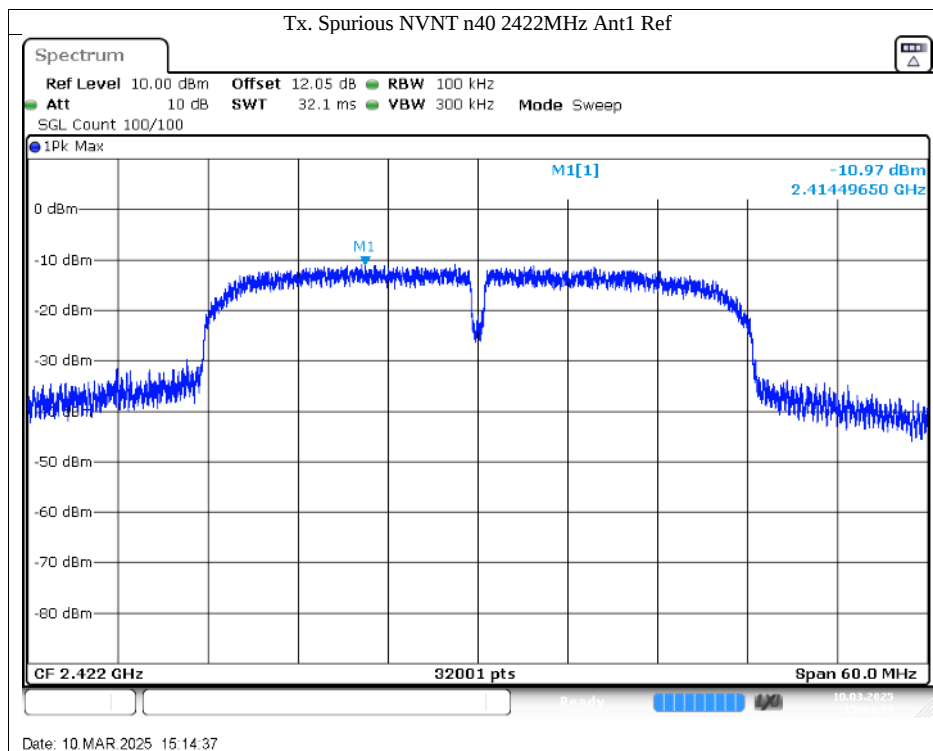


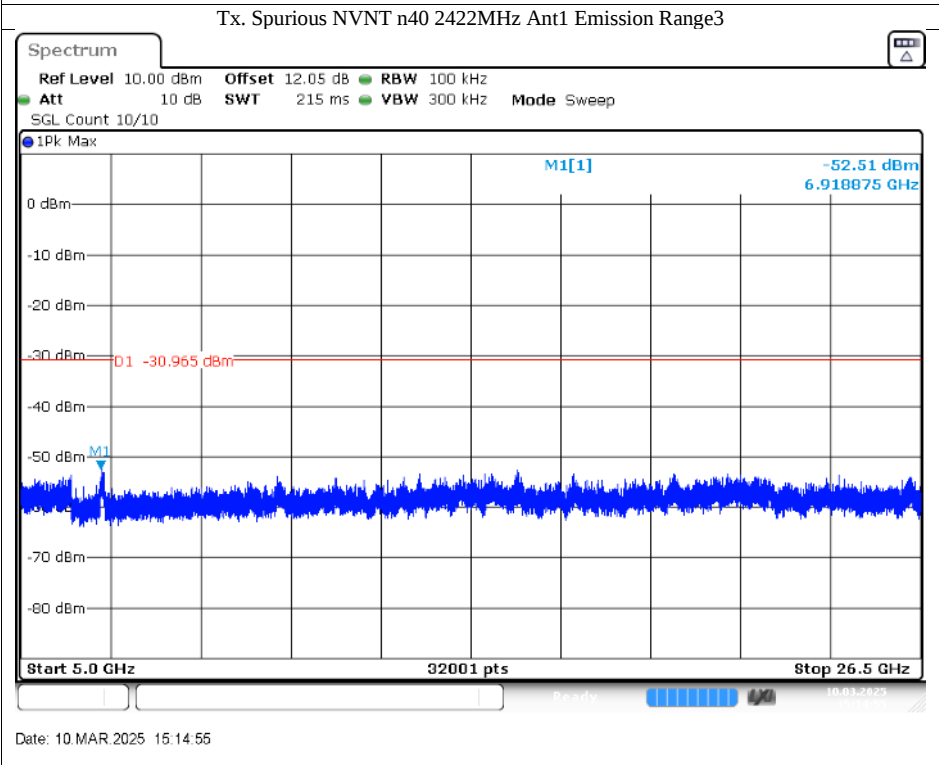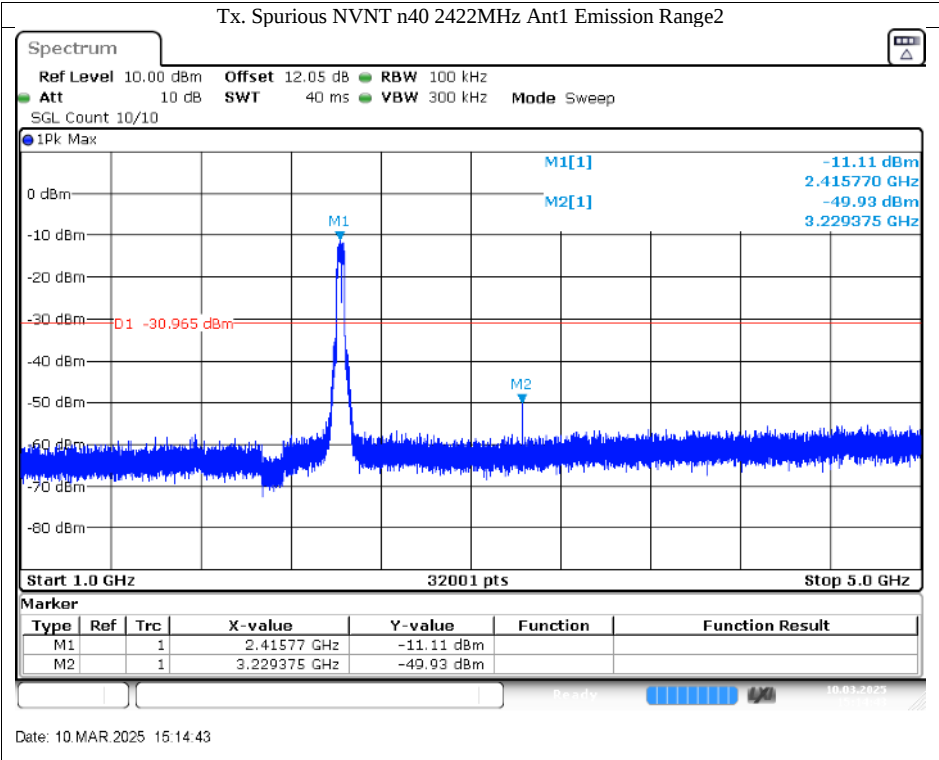

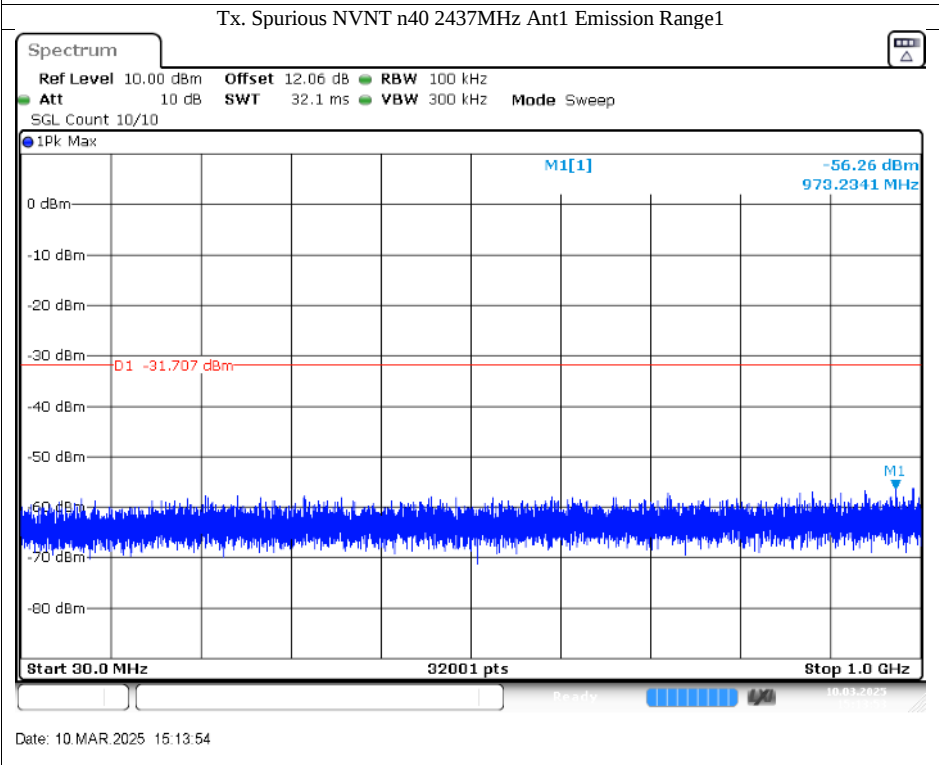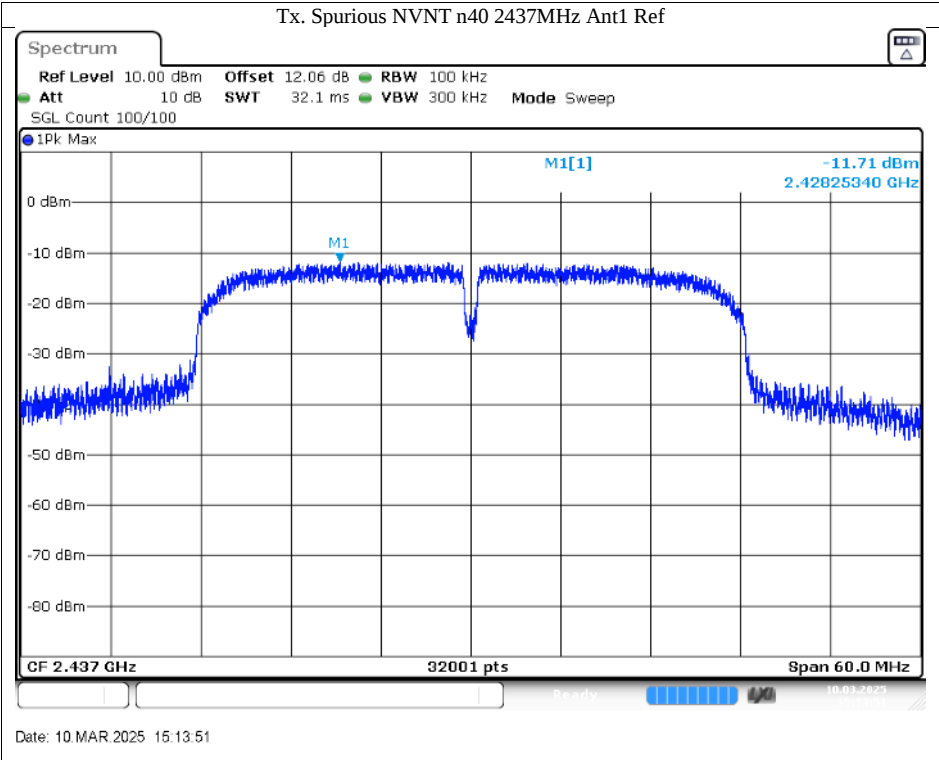

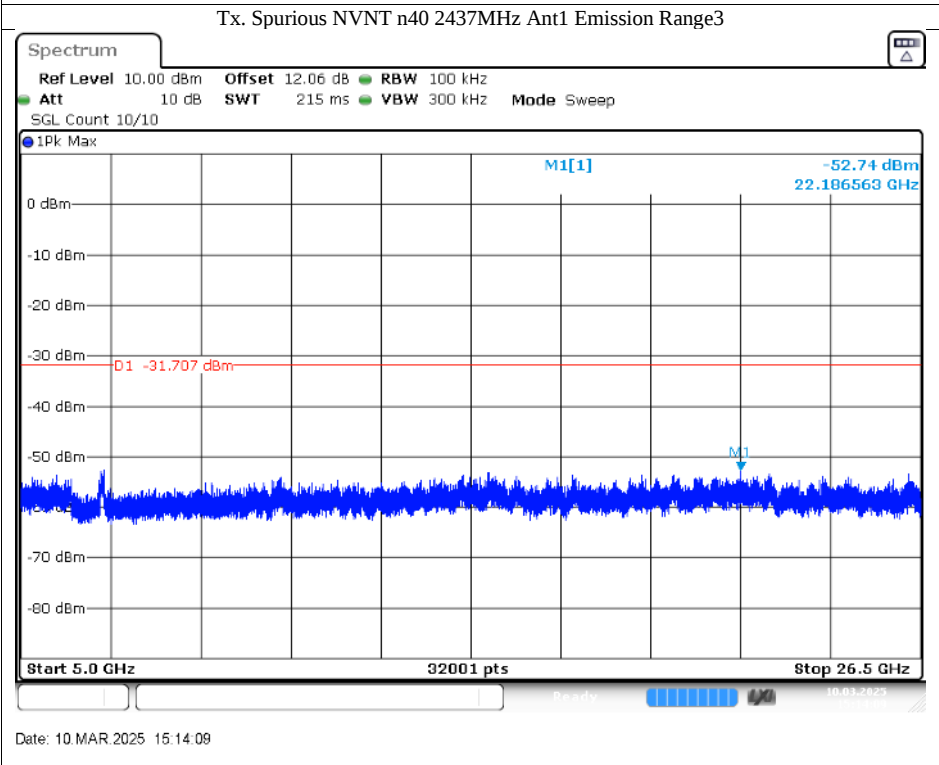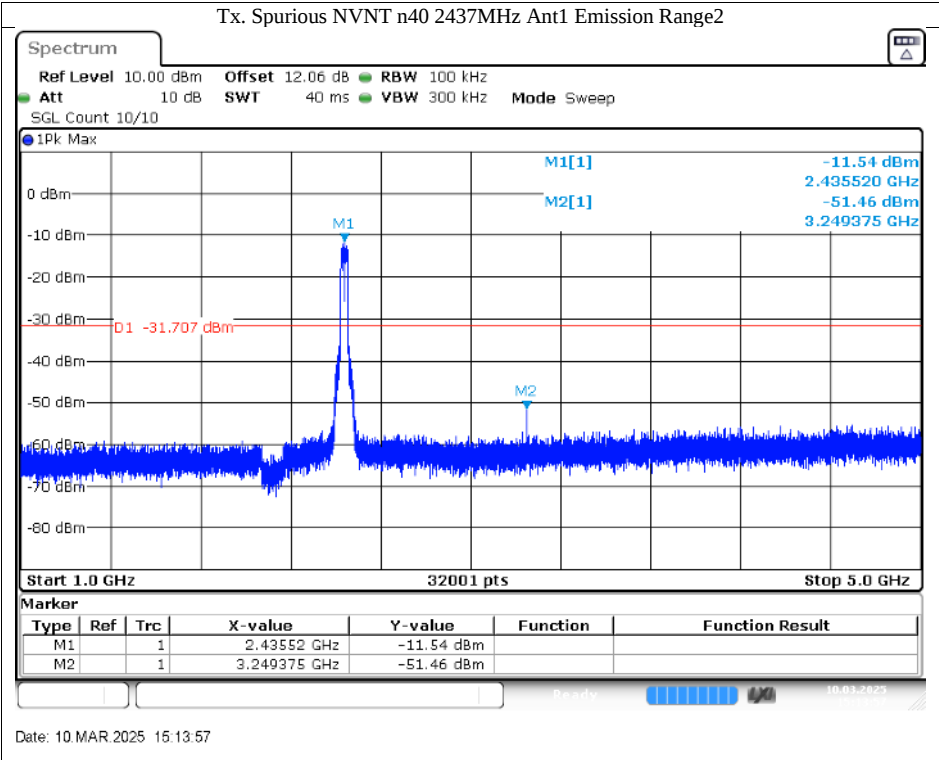

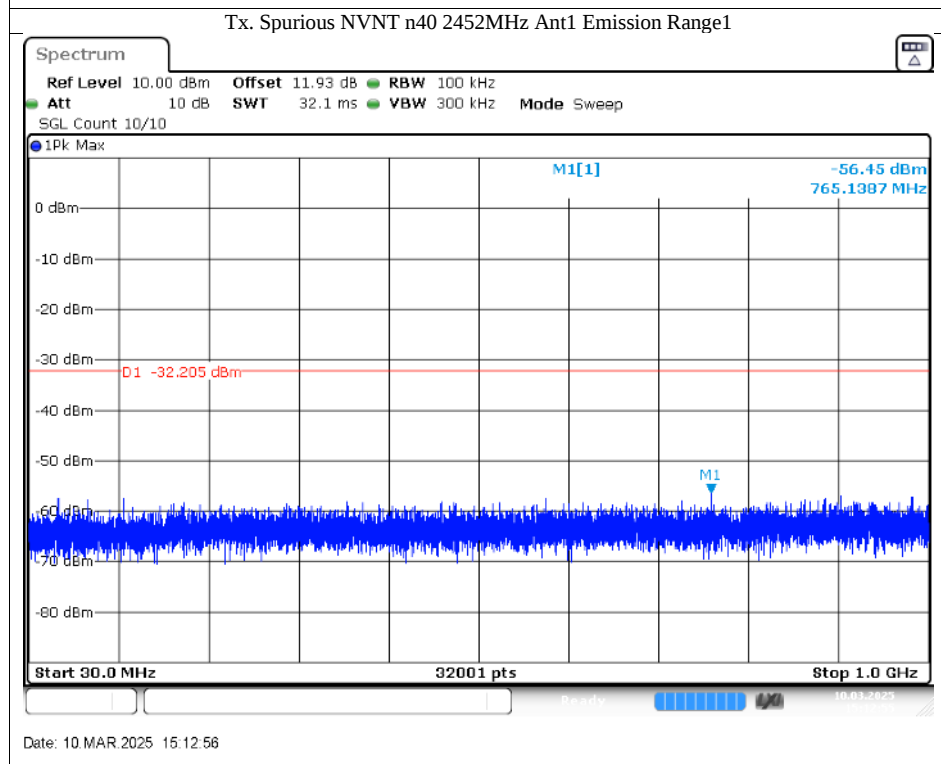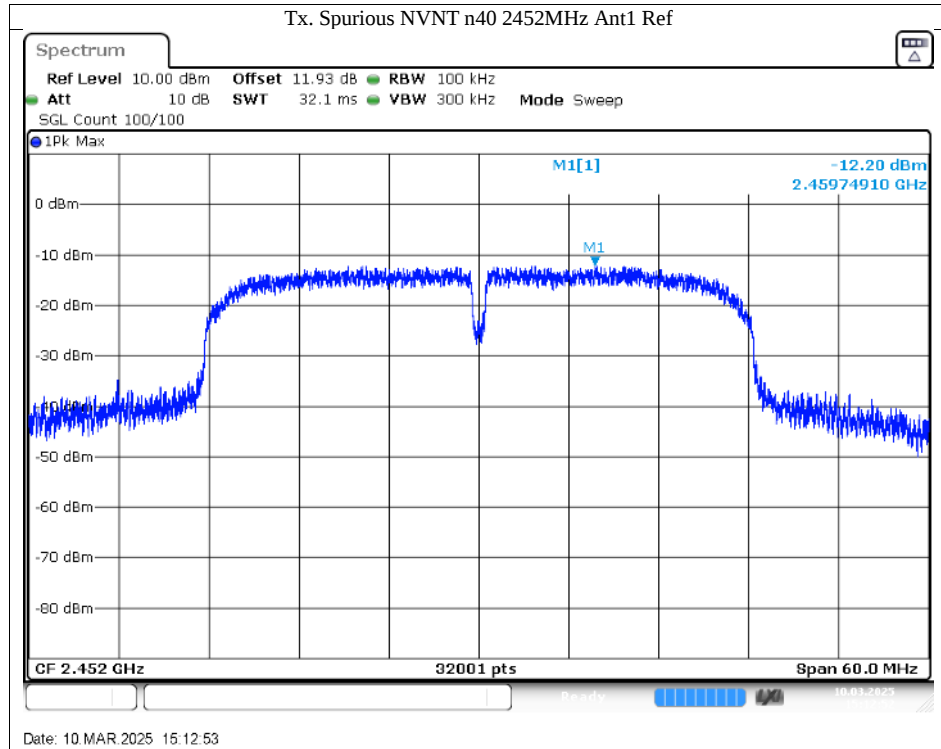

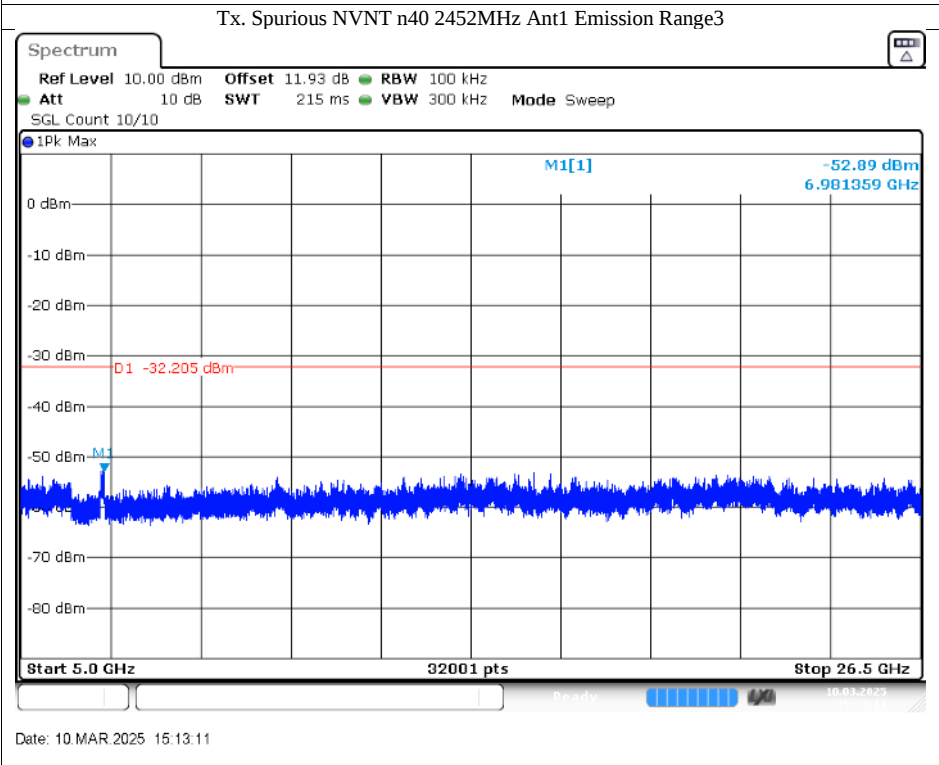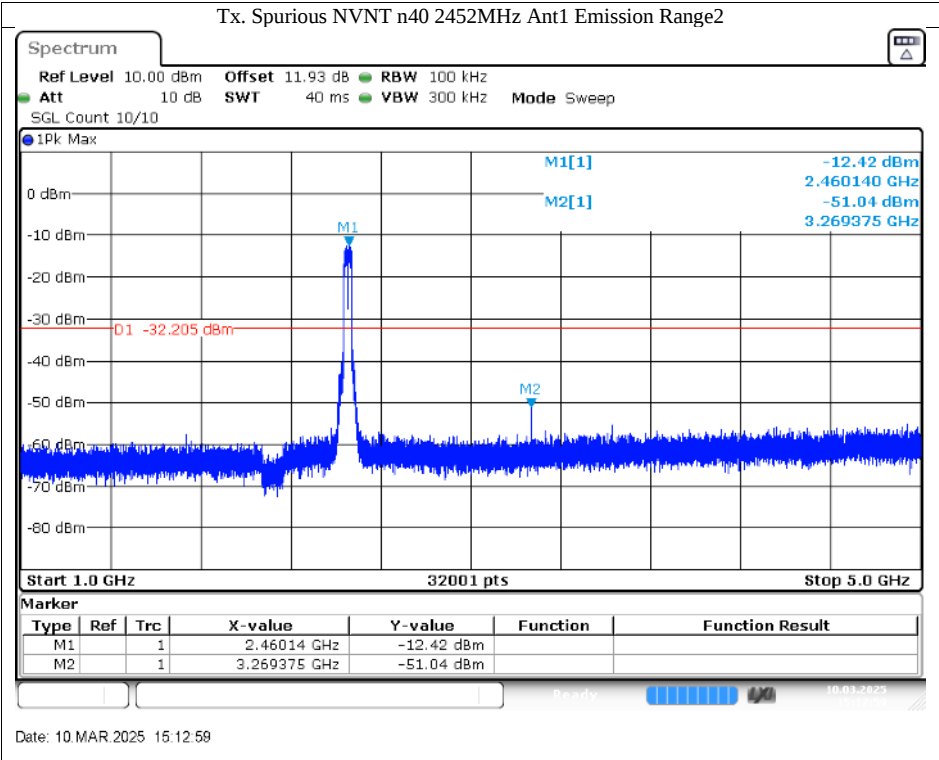

9.6 Band edge


Test Method



- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.



Limit



According to §15.247(d) and RSS-247 5.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) and RSS-Gen 8.10, must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)) and RSS-Gen.



Test result


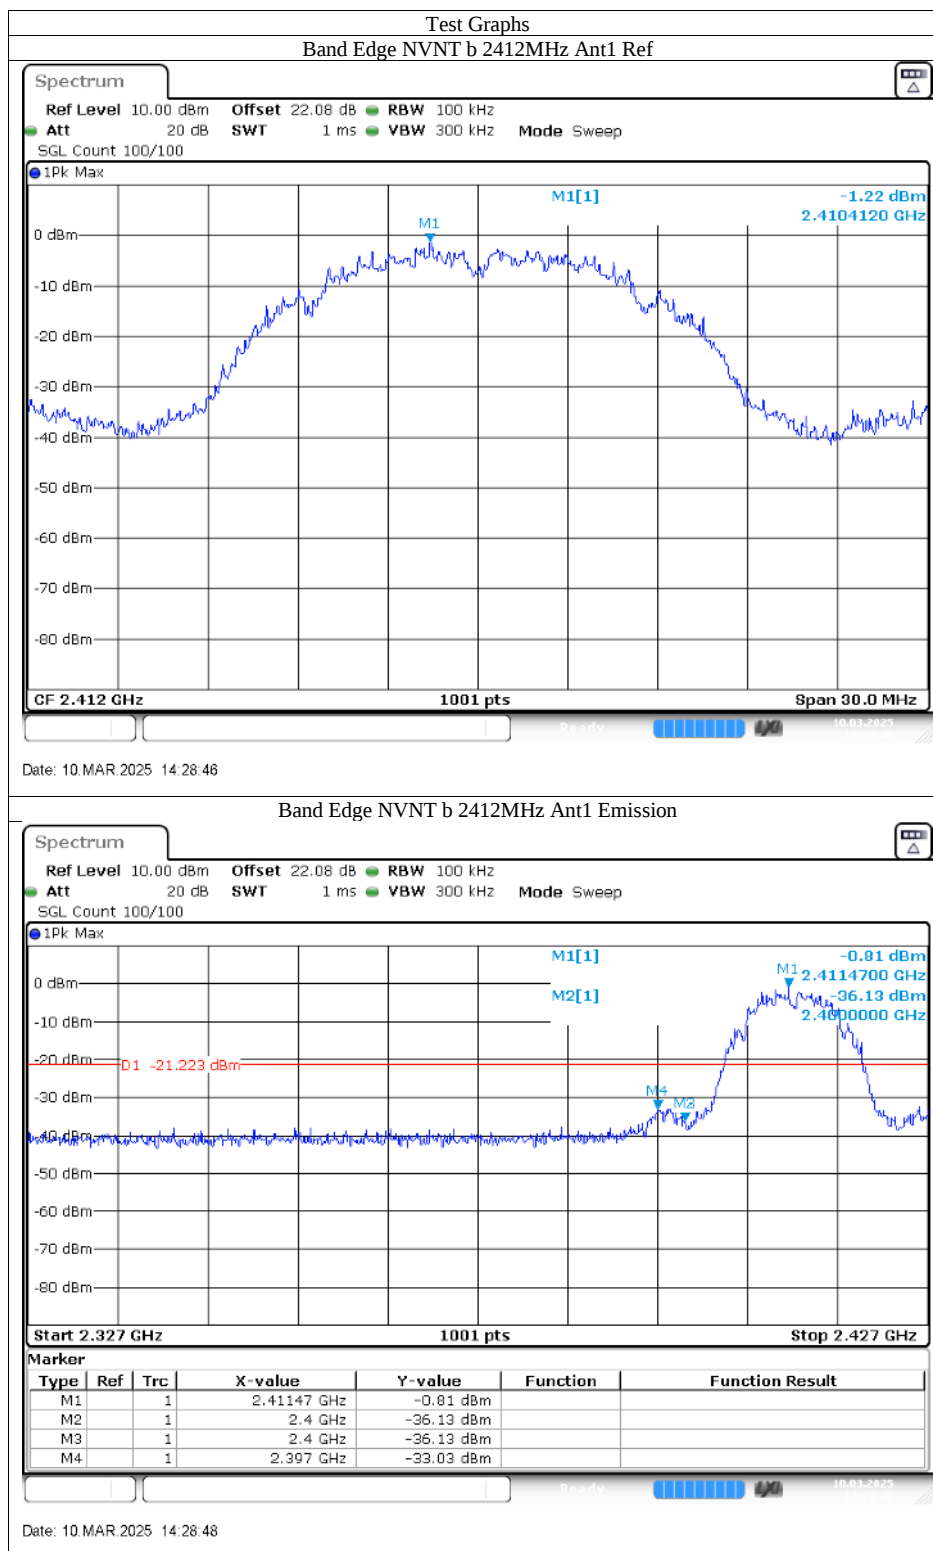


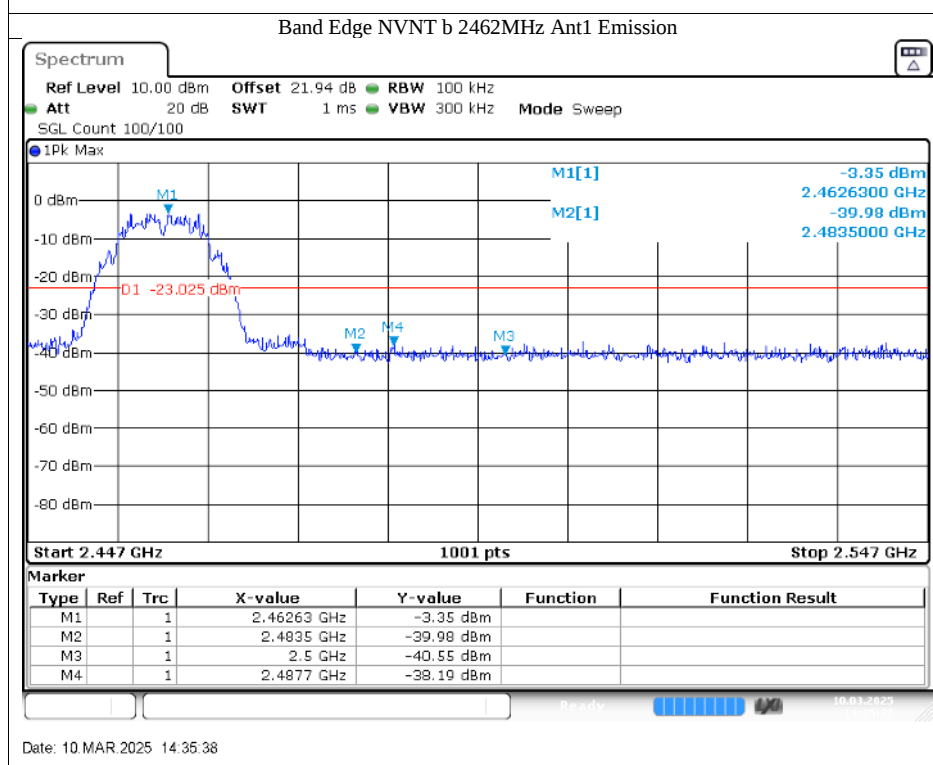
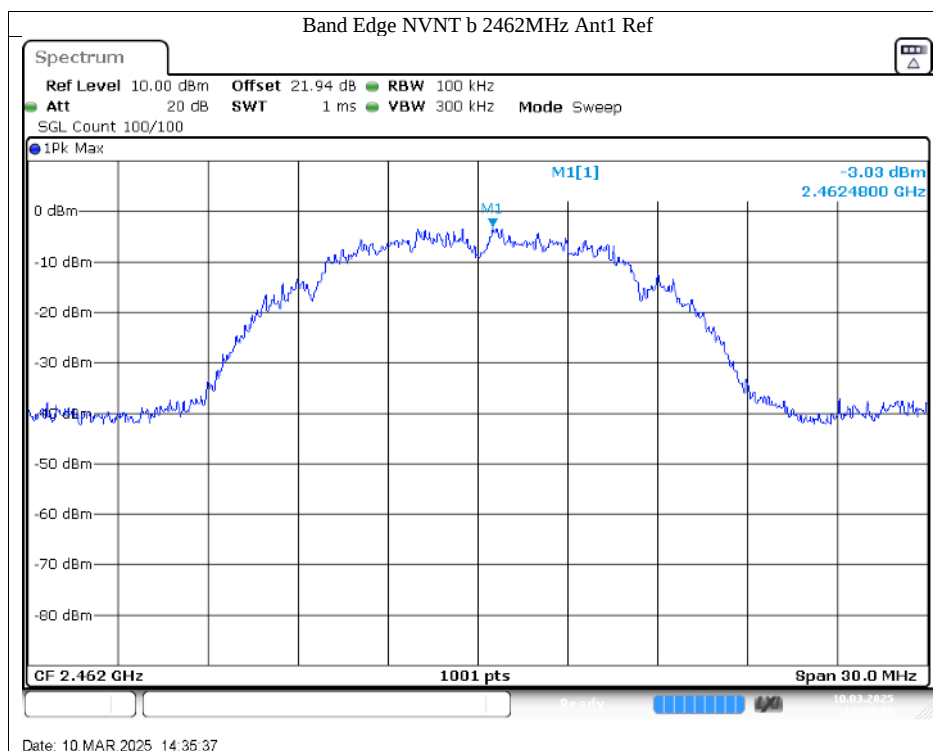


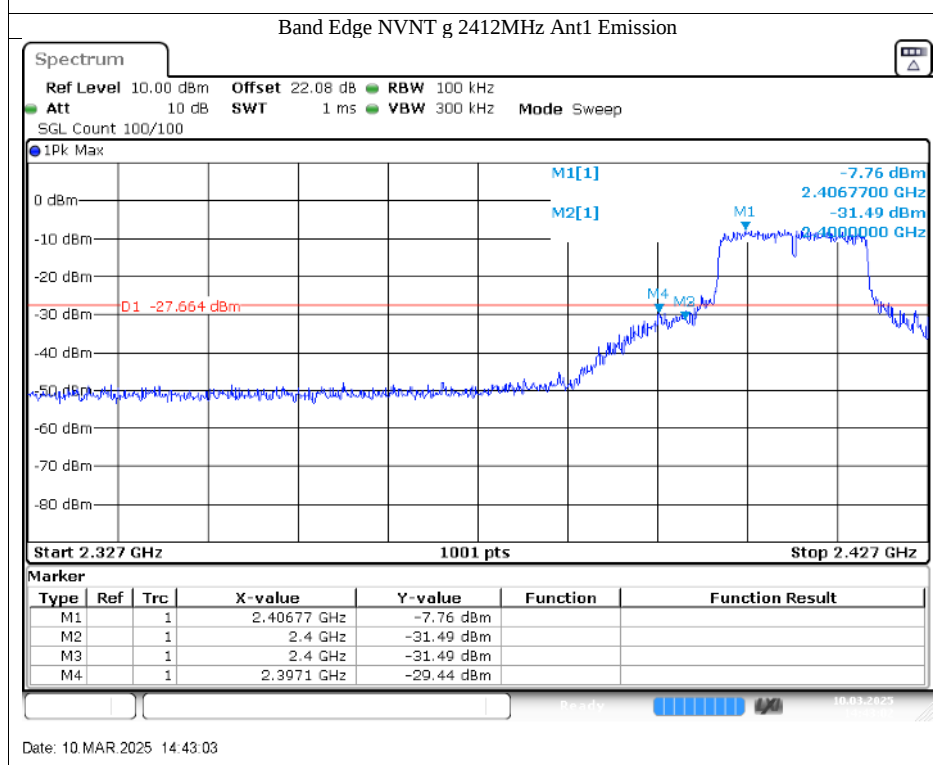
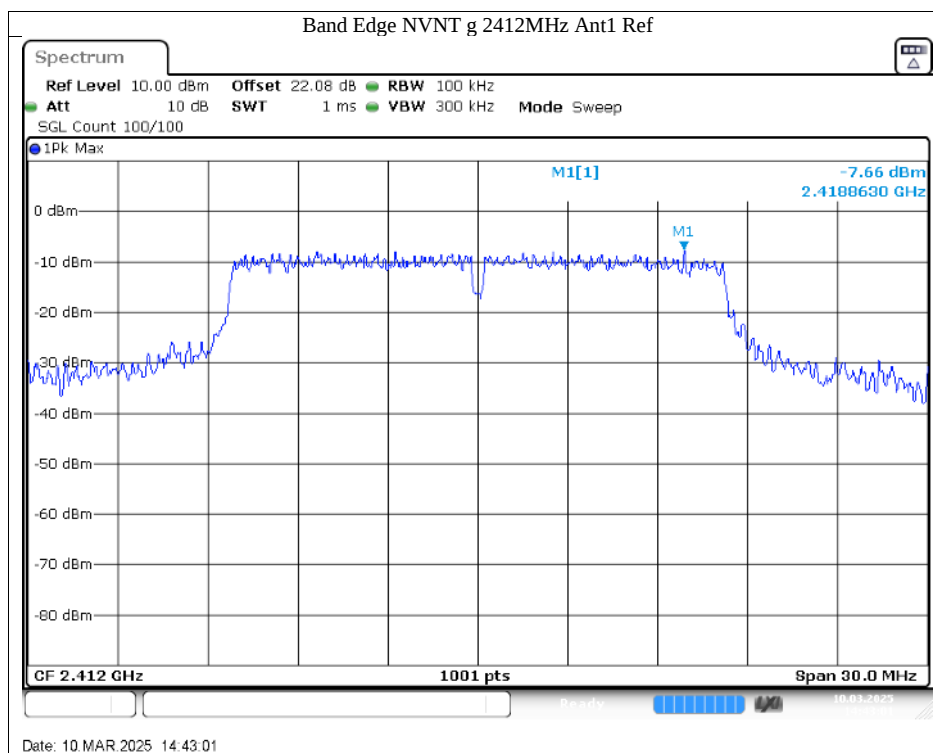


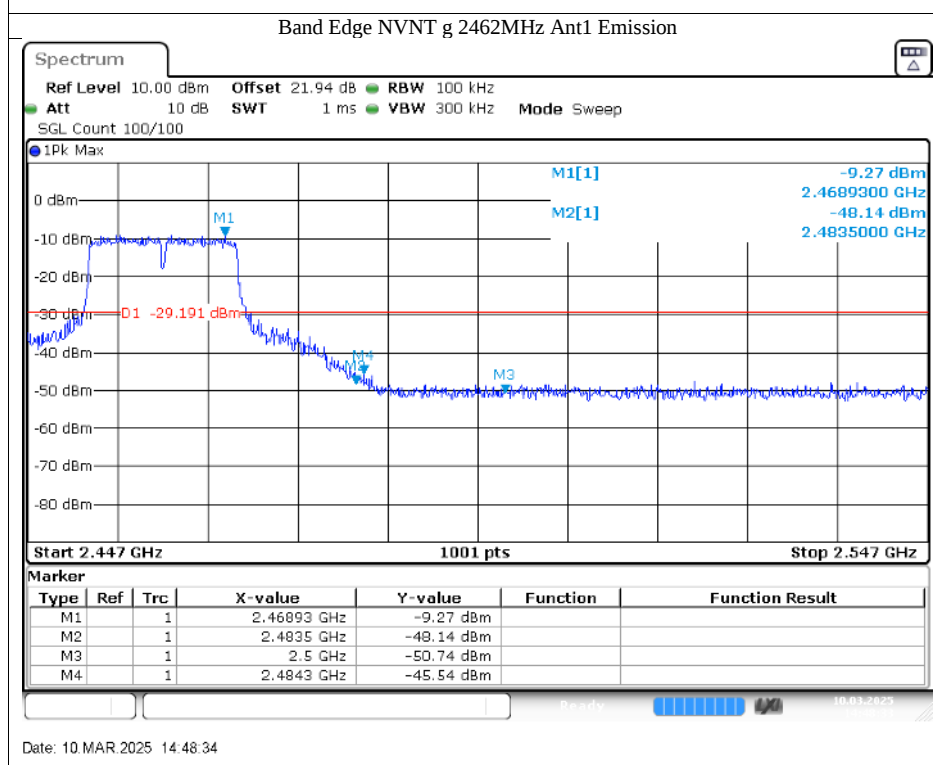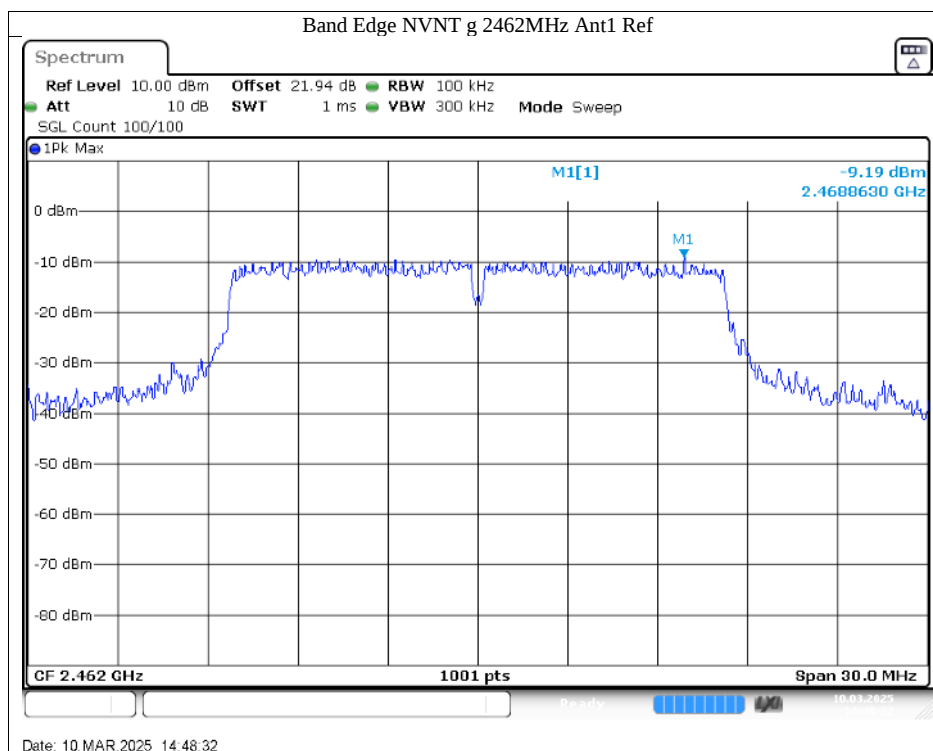

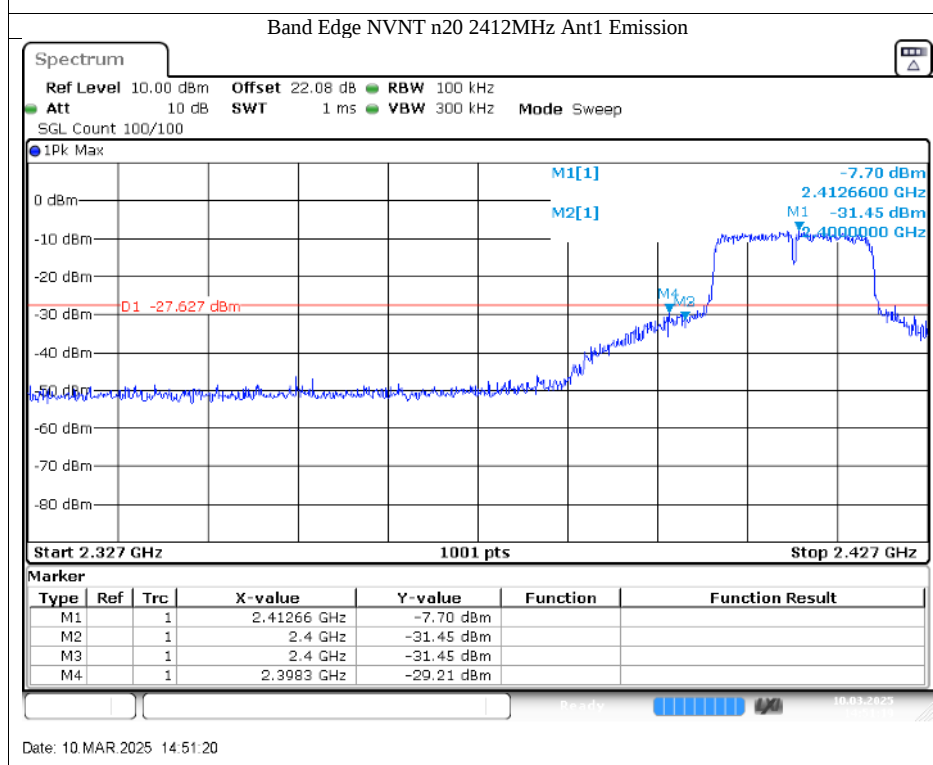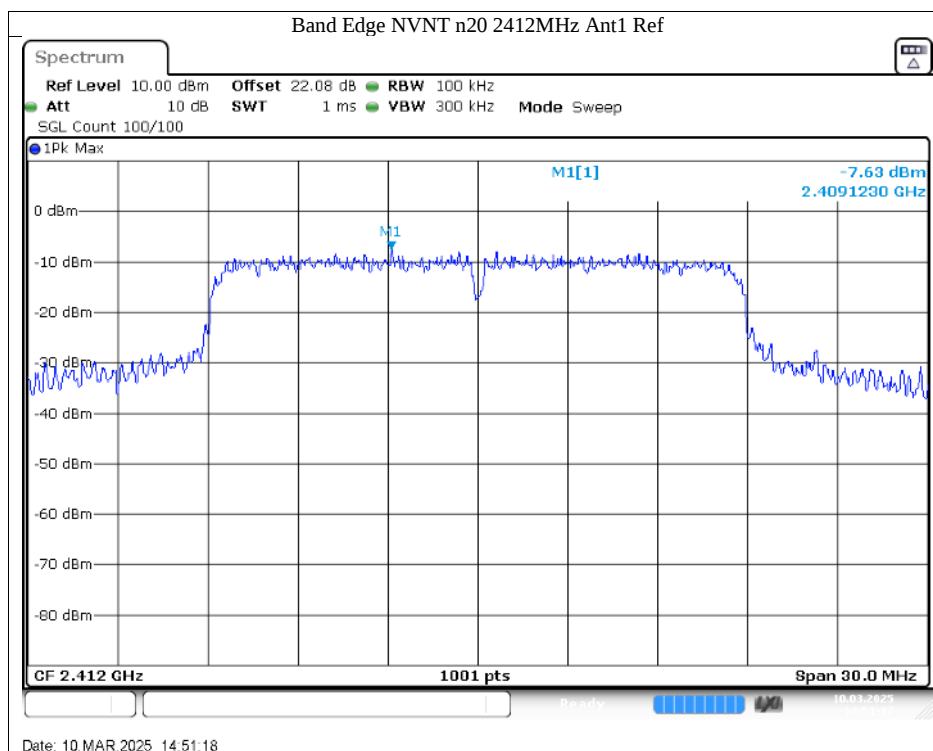

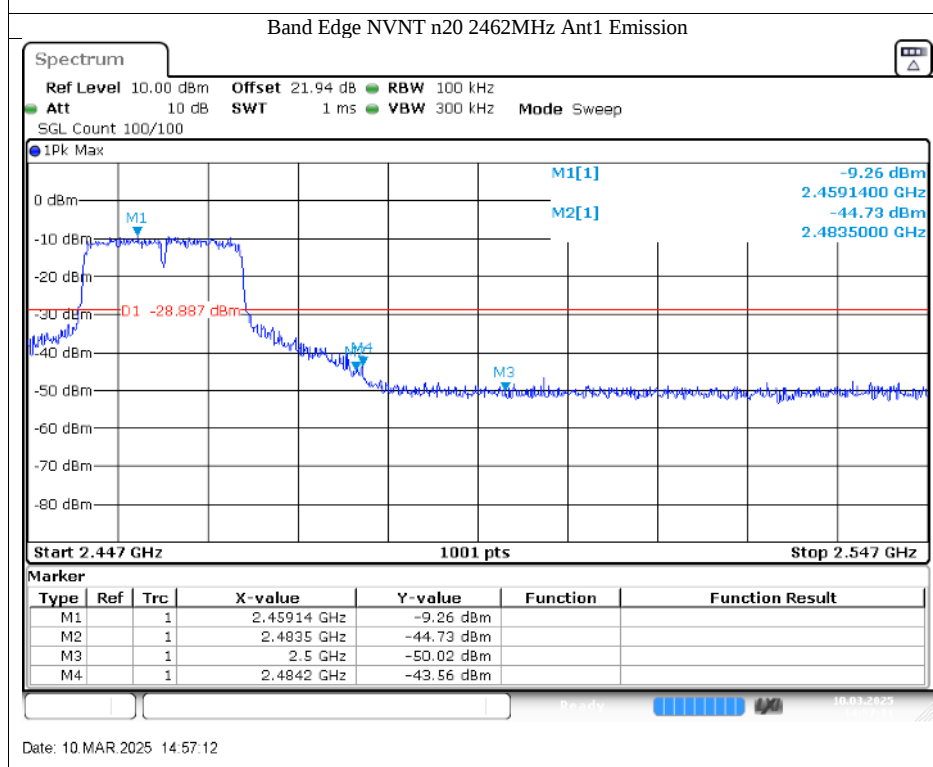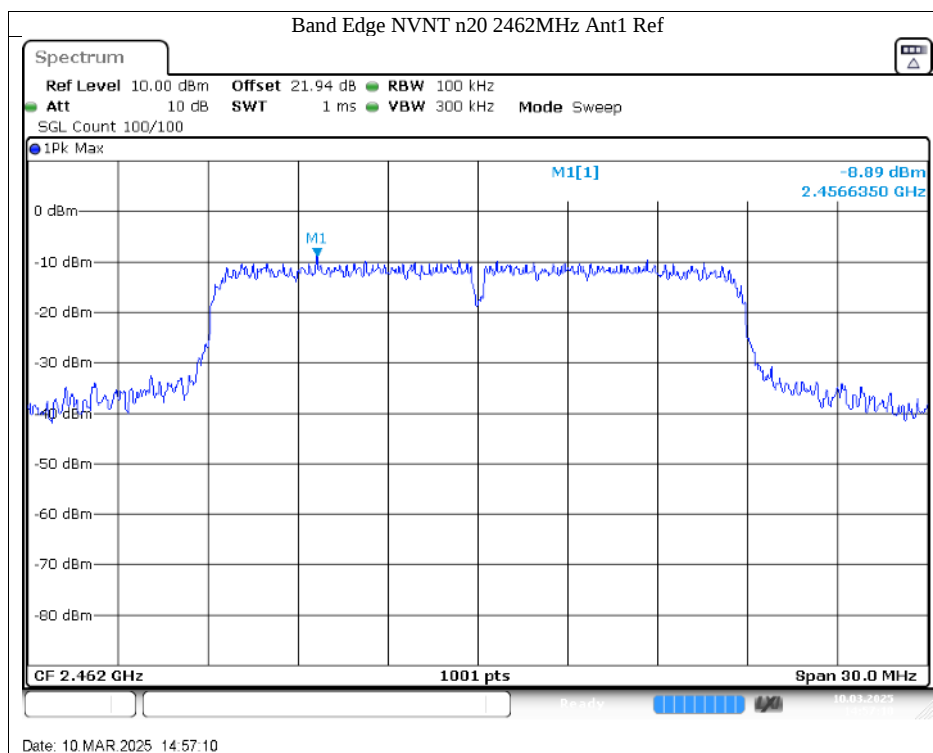

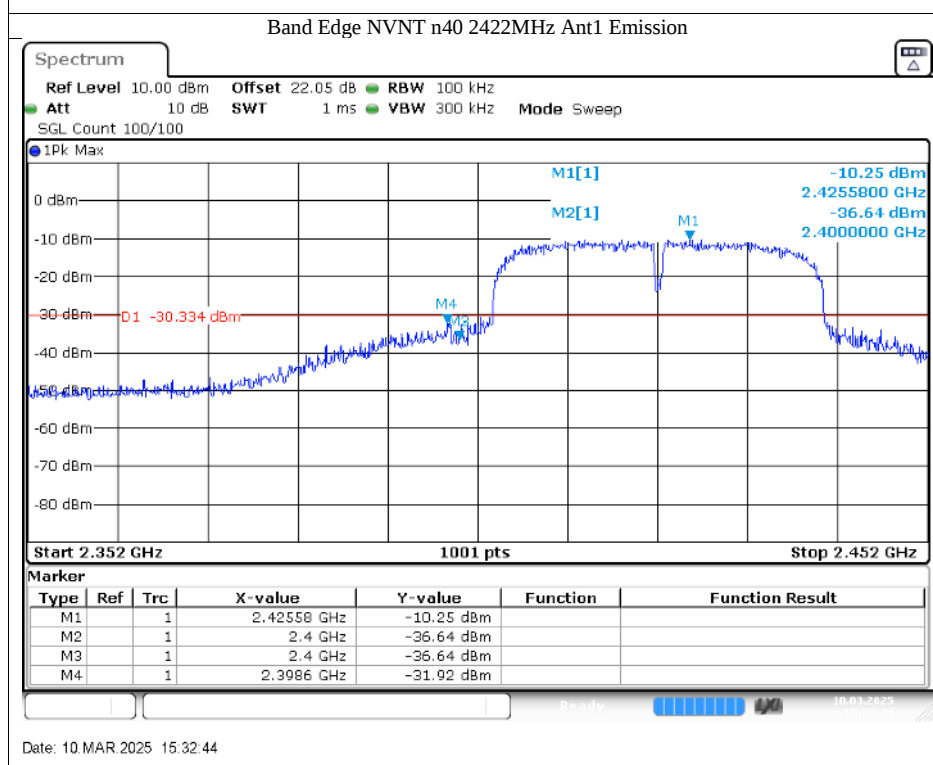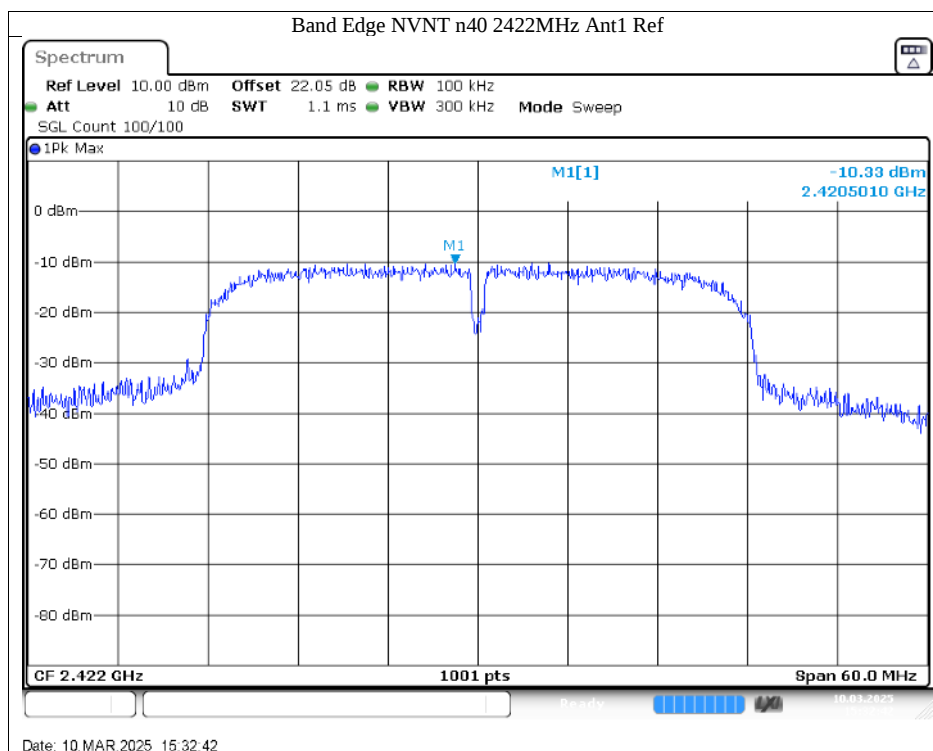

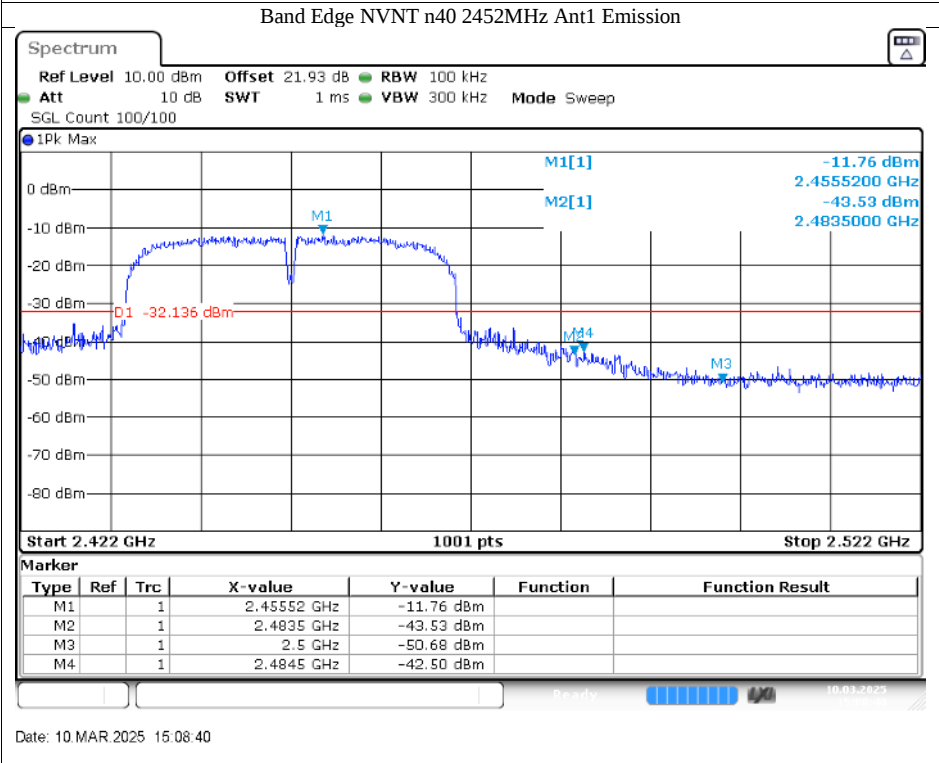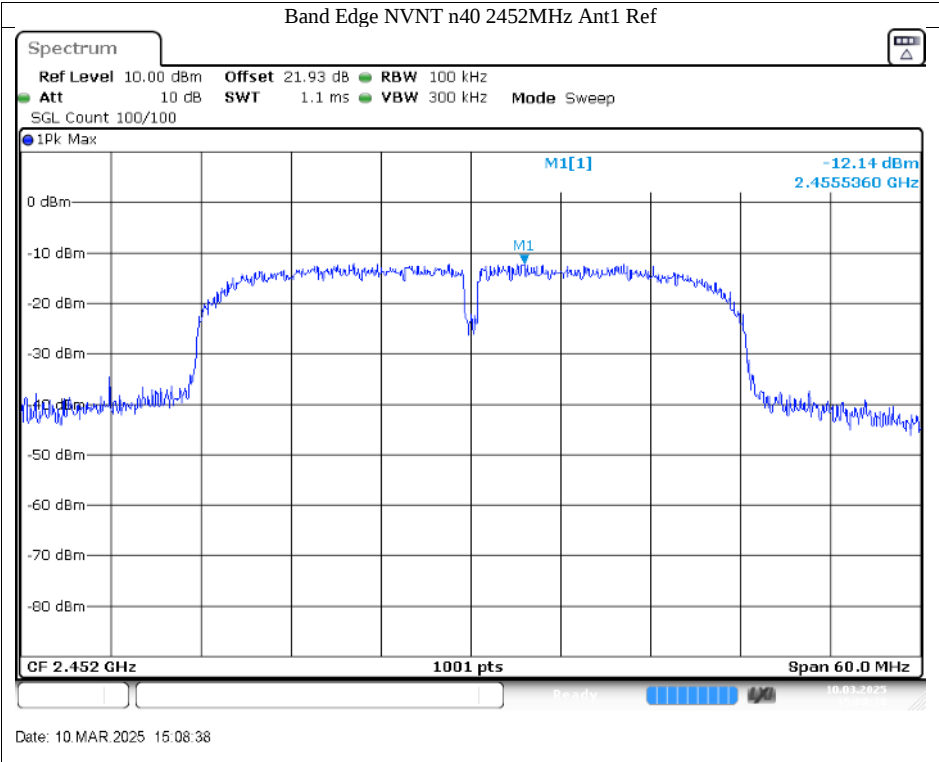

9.7 Spurious radiated emissions for transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz to 120 kHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

- a) RBW = 1MHz.
- b) $VBW \geq [3 \times RBW]$.
- c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq RBW / 2$.
Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:



- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS 247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a) and RSS-Gen section 8.9, must also comply with the radiated emission limits specified in § 15.209(a) and RSS-Gen section 8.10.

Below 30MHz

§15.247(d) & §15.209 & §15.205

Frequency MHz	Field Strength uV/m	Detector	Measured Distance Meters
0.009~0.090	2400/F (kHz)	AV	300
0.090~0.110	2400/F (kHz)	QP	300
0.110~0.490	2400/F (kHz)	AV	300
0.490~1.705	24000/F (kHz)	QP	30
1.705~30	30	QP	30

RSS-247 5.5 & RSS-Gen 6.13

Frequency MHz	Field Strength uA/m	Detector	Measured Distance Meters
0.009~0.090	6.37/F (kHz)	AV	300
0.090~0.110	6.37/F (kHz)	QP	300
0.110~0.490	6.37/F (kHz)	AV	300
0.490~1.705	63.7/F (kHz)	QP	30
1.705~30	0.08	QP	30

Note 1: Limit 3m(dBµV/m)=Limit 300m(dBµV/m)+40Log(300m/3m) (Below 30MHz)

Note 2: Limit 3m(dBµV/m)=Limit 30m(dBµV/m)+40Log(30m/3m) (Below 30MHz)



Above 30MHz

Frequency MHz	Field Strength uV/m	Field Strength dBμV/m	Detector	Measured Distance Meters
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit. The only worse case test result is listed in the report.

For test data in 1-18GHz, the highest emission (over limit) is the Intentional signal which need to be ignored

Test result

worst case listed as below:9KHz-30MHz
for FCC

9k-30MHz Radiated Emission Test


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: X-axis
Comment: Temp.:21.2°C,Humi.:48.3%,Atm.:1016.1hPa

Scan Setup: FCC_RE_9K-30M_Max_3m [EMI radiated]

Hardware Setup: Radiated E Field 9K-30MHz_3m
Receiver: [ESR 3]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	80 Hz	PK+	200 Hz	0.01 s	20 dB
150 kHz - 30 MHz	4 kHz	PK+	9 kHz	0.001 s	20 dB

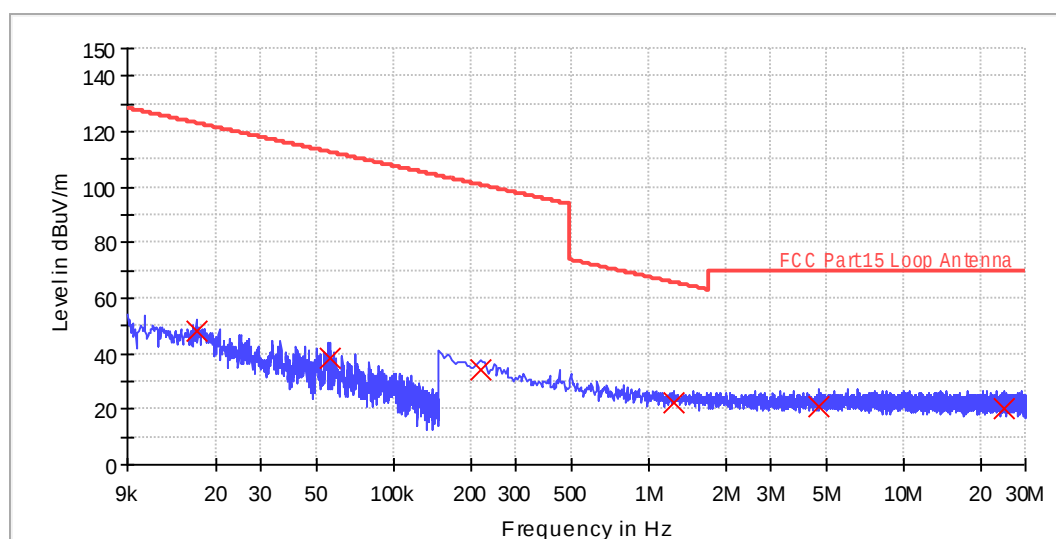

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
0.016760	48.1	1000.0	0.200	100.0	118.0	19.8	75.0	123.1
0.056360	38.6	1000.0	0.200	100.0	96.0	19.5	74.0	112.6
0.218000	34.1	1000.0	9.000	100.0	194.0	19.3	66.8	100.8
1.250000	22.1	1000.0	9.000	100.0	81.0	19.3	43.6	65.7
4.642000	20.6	1000.0	9.000	100.0	124.0	19.2	48.9	69.5
24.682000	20.4	1000.0	9.000	100.0	276.0	19.0	49.1	69.5


Common Information

EUT: Robotic Pool Skimmer
 Model: PNUJ4110
 Client: Quilo
 Operating Conditions: Power on, transmitting at 802.11n_2462MHz
 Operator Name: Xu Zheng
 Input: Powered by Battery, DC 14.4V
 Test Standard: FCC Part 15.209(a)
 Comment: Y-axis
 Comment: Temp.:21.2°C,Humi.:48.3%,Atm.:1016.1hPa

Scan Setup: FCC_RE_9K-30M_Max_3m [EMI radiated]

Hardware Setup: Radiated E Field 9K-30MHz_3m
 Receiver: [ESR 3]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	80 Hz	PK+	200 Hz	0.01 s	20 dB
150 kHz - 30 MHz	4 kHz	PK+	9 kHz	0.001 s	20 dB

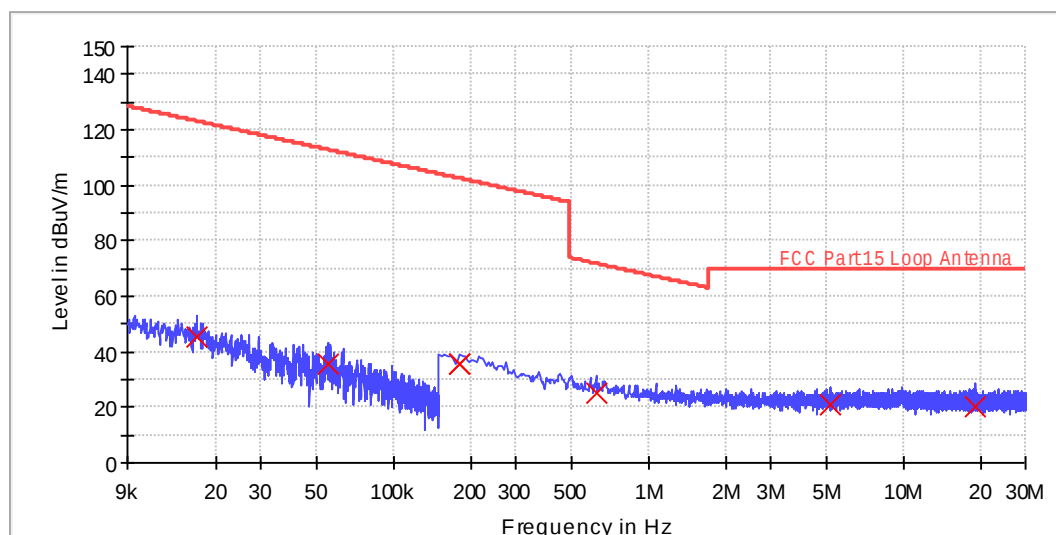

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
0.016920	45.7	1000.0	0.200	100.0	43.0	19.8	77.3	123.0
0.055320	35.4	1000.0	0.200	100.0	168.0	19.5	77.3	112.7
0.182000	35.8	1000.0	9.000	100.0	174.0	19.3	66.6	102.4
0.622000	25.0	1000.0	9.000	100.0	58.0	19.3	46.8	71.7
5.134000	20.7	1000.0	9.000	100.0	192.0	19.2	48.8	69.5
19.202000	20.2	1000.0	9.000	100.0	238.0	18.7	49.3	69.5




Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Z-axis
Comment: Temp.:21.2°C,Humi.:48.3%,Atm.:1016.1hPa

Scan Setup: FCC_RE_9K-30M_Max_3m [EMI radiated]

Hardware Setup: Radiated E Field 9K-30MHz_3m
Receiver: [ESR 3]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	80 Hz	PK+	200 Hz	0.01 s	20 dB
150 kHz - 30 MHz	4 kHz	PK+	9 kHz	0.001 s	20 dB

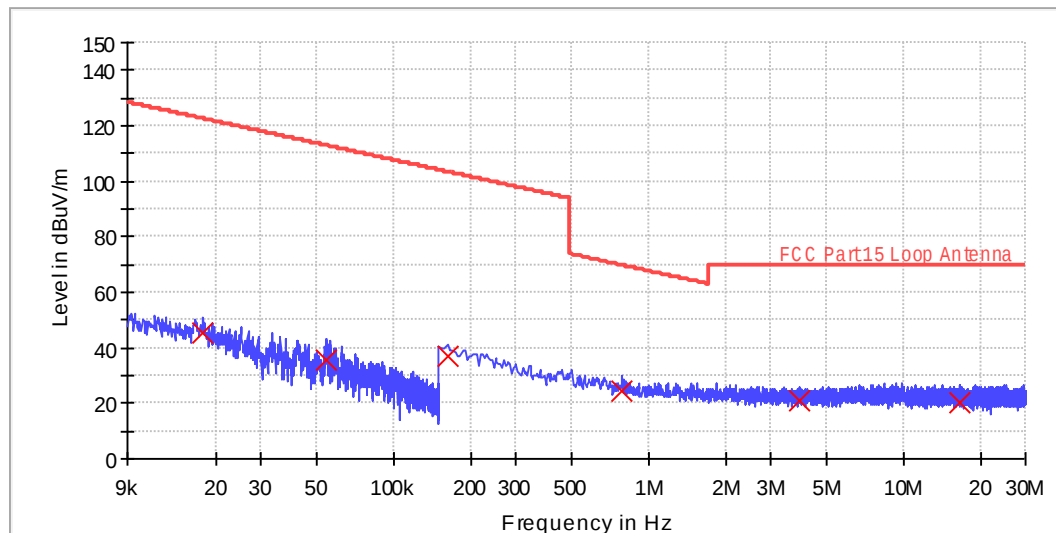

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
0.017880	45.7	1000.0	0.200	100.0	272.0	19.7	76.9	122.5
0.054520	35.8	1000.0	0.200	100.0	103.0	19.5	77.0	112.9
0.162000	37.2	1000.0	9.000	100.0	146.0	19.3	66.2	103.4
0.786000	24.6	1000.0	9.000	100.0	32.0	19.3	45.1	69.7
3.926000	20.6	1000.0	9.000	100.0	232.0	19.2	48.9	69.5
16.610000	20.5	1000.0	9.000	100.0	171.0	18.7	49.1	69.5

For IC


Common Information

EUT:	Robotic Pool Skimmer
Model:	PNUJ4110
Client:	Quilo
Operating Conditions:	Power on, transmitting at 802.11n_2462MHz
Operator Name:	Xu Zheng
Input:	Powered by Battery, DC 14.4V
Sample No.:	WUX-0890446-002
Test Standard:	RSS-GEN 8.9
Comment:	X-axis
Comment:	Temp.:21.2°C,Humi.:48.3%,Atm.:1016.1hPa

Scan Setup: IC_RE_9K-30M_Max_3m [EMI radiated]

Hardware Setup:	Radiated H Field 9K-30MHz_3m
Receiver:	[ESR 3]
Level Unit:	dBuA/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	80 Hz	PK+	200 Hz	0.01 s	20 dB
150 kHz - 30 MHz	4 kHz	PK+	9 kHz	0.005 s	20 dB

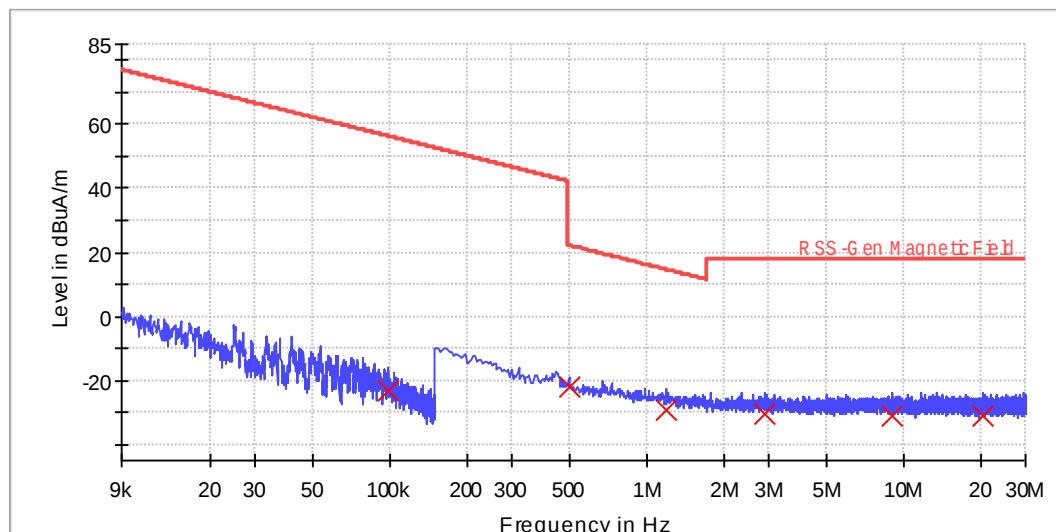

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuA/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuA/m)
0.099080	-23.3	1000.0	0.200	100.0	100.0	-32.1	79.5	56.2
0.498000	-22.0	1000.0	9.000	100.0	271.0	-32.2	44.2	22.2
1.198000	-29.3	1000.0	9.000	100.0	130.0	-32.3	43.9	14.6
2.914000	-30.7	1000.0	9.000	100.0	169.0	-32.5	48.7	18.0
9.058000	-31.0	1000.0	9.000	100.0	73.0	-32.7	49.0	18.0
20.618000	-31.3	1000.0	9.000	100.0	218.0	-32.8	49.3	18.0


Common Information

EUT: Robotic Pool Skimmer
 Model: PNUJ4110
 Client: Quilo
 Operating Conditions: Power on, transmitting at 802.11n_2462MHz
 Operator Name: Xu Zheng
 Input: Powered by Battery, DC 14.4V
 Sample No.: WUX-0890446-002
 Test Standard: RSS-GEN 8.9
 Comment: Y-axis
 Comment: Temp.:21.2°C,Humi.:48.3%,Atm.:1016.1hPa

Scan Setup: IC_RE_9K-30M_Max_3m [EMI radiated]

Hardware Setup: Radiated H Field 9K-30MHz_3m
 Receiver: [ESR 3]
 Level Unit: dBuA/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	80 Hz	PK+	200 Hz	0.01 s	20 dB
150 kHz - 30 MHz	4 kHz	PK+	9 kHz	0.005 s	20 dB

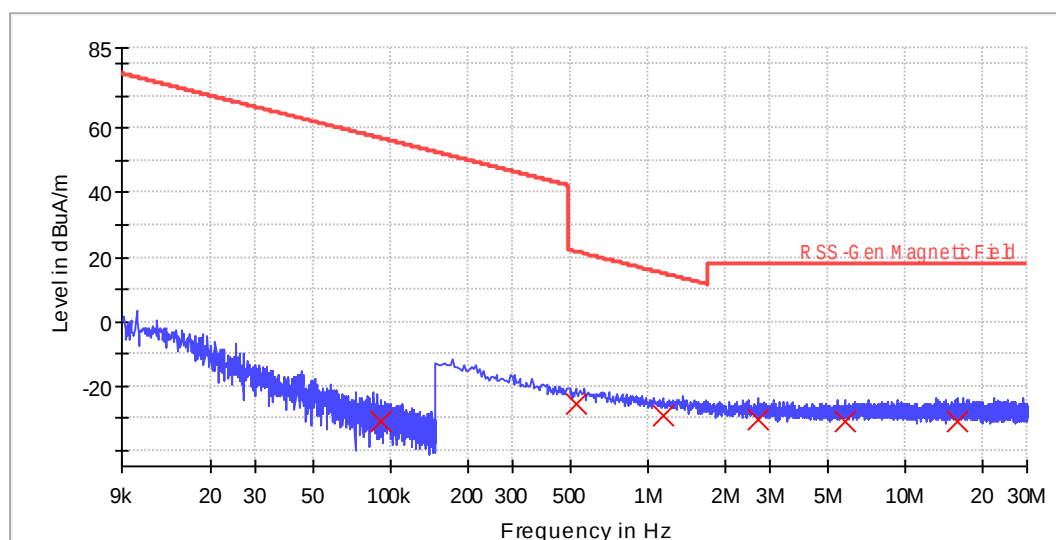

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuA/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuA/m)
0.092040	-31.1	1000.0	0.200	100.0	94.0	-32.1	87.9	56.8
0.526000	-25.8	1000.0	9.000	100.0	55.0	-32.2	47.5	21.7
1.146000	-29.1	1000.0	9.000	100.0	116.0	-32.2	44.1	14.9
2.706000	-30.7	1000.0	9.000	100.0	127.0	-32.5	48.7	18.0
5.854000	-31.0	1000.0	9.000	100.0	163.0	-32.7	49.0	18.0
16.106000	-31.0	1000.0	9.000	100.0	233.0	-32.8	49.0	18.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Sample No.: WUX-0890446-002
Test Standard: RSS-GEN 8.9
Comment: Z-axis
Comment: Temp.:21.2°C,Humi.:48.3%,Atm.:1016.1hPa

Scan Setup: IC_RE_9K-30M_Max_3m [EMI radiated]

Hardware Setup: Radiated H Field 9K-30MHz_3m
Receiver: [ESR 3]
Level Unit: dBuA/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	80 Hz	PK+	200 Hz	0.01 s	20 dB
150 kHz - 30 MHz	4 kHz	PK+	9 kHz	0.005 s	20 dB

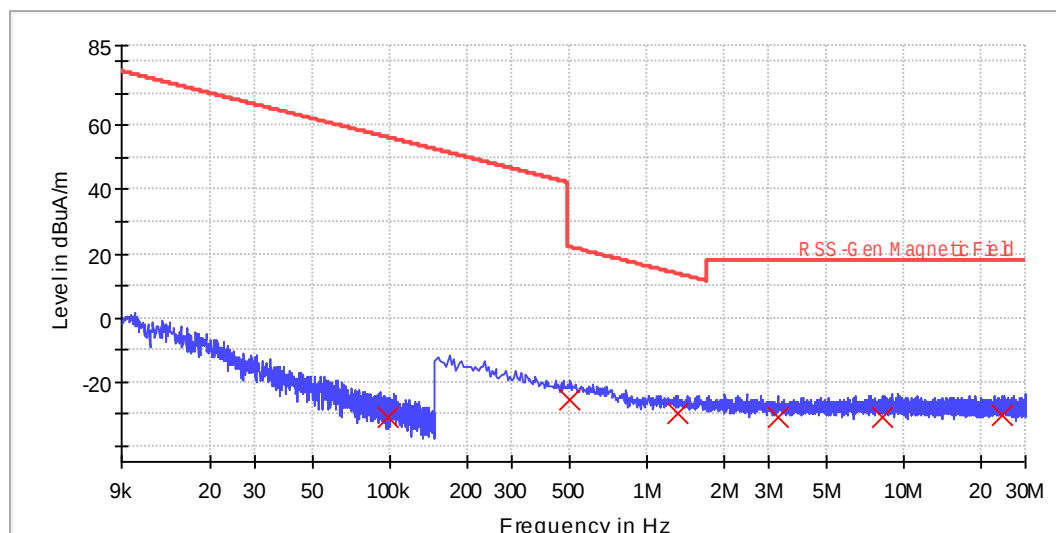

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuA/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuA/m)
0.099000	-30.9	1000.0	0.200	100.0	161.0	-32.1	87.1	56.2
0.506000	-25.5	1000.0	9.000	100.0	101.0	-32.2	47.5	22.0
1.318000	-29.7	1000.0	9.000	100.0	152.0	-32.3	43.4	13.7
3.278000	-30.9	1000.0	9.000	100.0	94.0	-32.6	48.9	18.0
8.258000	-30.9	1000.0	9.000	100.0	278.0	-32.7	48.9	18.0
24.506000	-30.7	1000.0	9.000	100.0	105.0	-32.5	48.7	18.0

30-1000MHz Radiated Emission Test


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11b_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:21.2°C,Humi.:48.3%,Atm.:1016.1hPa

Sweep Setup: RE_30M-1G_Sweep_3m [EMI radiated]

Hardware Setup: Radiated E Field 30MHz-1GHz_3m
Receiver: [ESR 3]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	1.5 s	20 dB

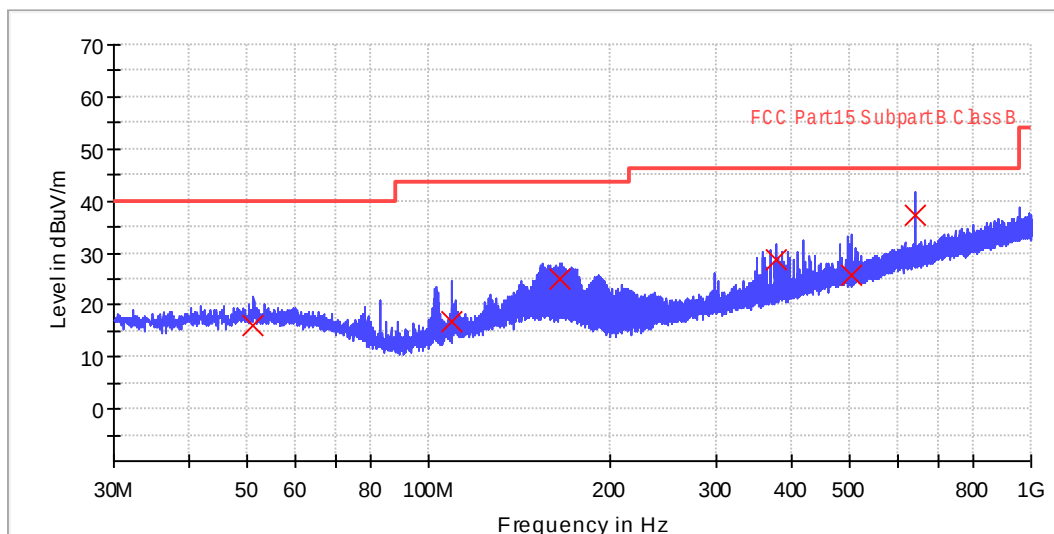

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
51.200000	16.0	1000.0	120.000	100.0	274.0	20.9	24.0	40.0
109.400000	16.7	1000.0	120.000	100.0	154.0	17.9	26.9	43.5
164.880000	25.0	1000.0	120.000	100.0	123.0	21.4	18.5	43.5
376.880000	28.6	1000.0	120.000	100.0	287.0	24.7	17.4	46.0
503.400000	25.8	1000.0	120.000	100.0	148.0	27.9	20.2	46.0
640.040000	37.4	1000.0	120.000	100.0	119.0	31.0	8.7	46.0


Common Information

EUT: Robotic Pool Skimmer
 Model: PNUJ4110
 Client: Quilo
 Operating Conditions: Power on, transmitting at 802.11b_2412MHz
 Operator Name: Xu Zheng
 Input: Powered by Battery, DC 14.4V
 Test Standard: FCC Part 15.209(a)
 Comment: Vertical
 Comment: Temp.:21.2°C,Humi.:48.3%,Atm.:1016.1hPa

Sweep Setup: RE_30M-1G_Sweep_3m [EMI radiated]

Hardware Setup: Radiated E Field 30MHz-1GHz_3m
 Receiver: [ESR 3]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	1.5 s	20 dB

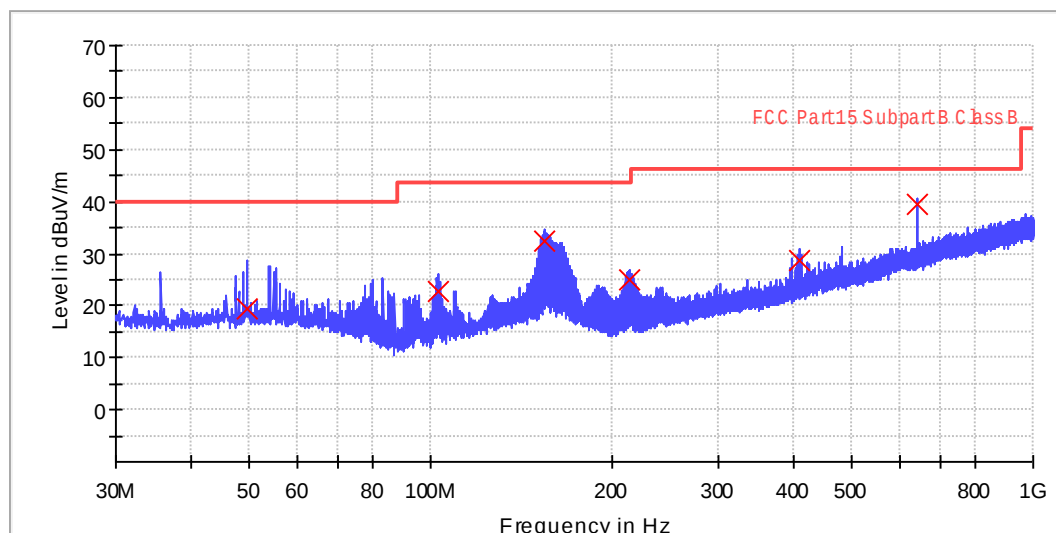

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
49.600000	19.3	1000.0	120.000	100.0	258.0	20.9	20.7	40.0
102.960000	22.9	1000.0	120.000	100.0	121.0	16.9	20.6	43.5
155.000000	32.4	1000.0	120.000	100.0	77.0	21.6	11.2	43.5
213.920000	24.9	1000.0	120.000	100.0	214.0	18.3	18.7	43.5
409.720000	28.8	1000.0	120.000	100.0	159.0	25.5	17.3	46.0
640.000000	39.6	1000.0	120.000	100.0	182.0	31.0	6.4	46.0

1-18G Radiated Emission Test


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11b_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

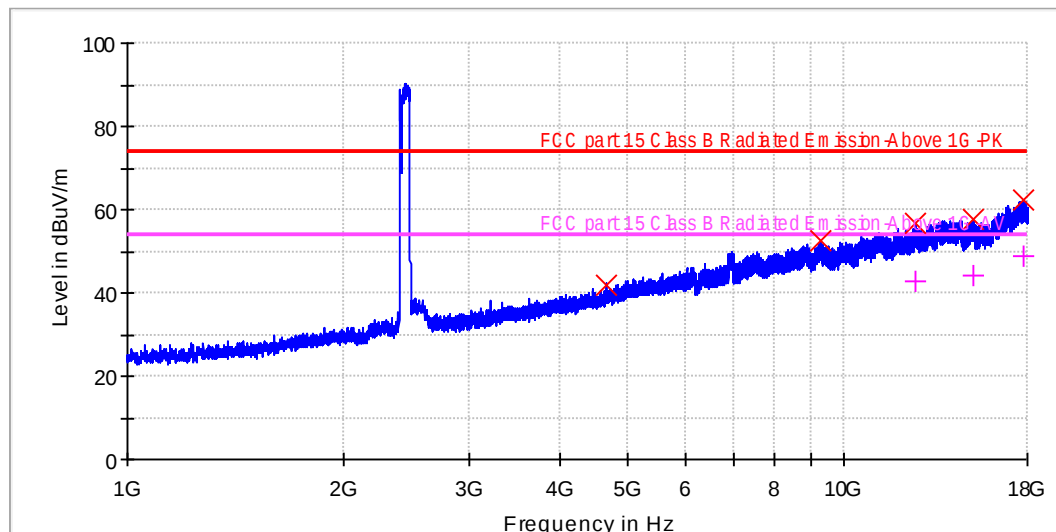

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
4655.000000	41.9	---	1000.0	150.0	H	58.0	-1.5	32.1	74.0	---	---
9293.000000	52.4	---	1000.0	150.0	H	268.0	12.1	21.6	74.0	---	---
12588.500000	56.6	43.0	1000.0	150.0	H	184.0	15.6	17.4	74.0	11.0	54.0
15144.000000	57.6	44.3	1000.0	150.0	H	226.0	16.1	16.4	74.0	9.7	54.0
17791.000000	62.1	49.0	1000.0	150.0	H	124.0	22.1	11.9	74.0	5.1	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11b_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

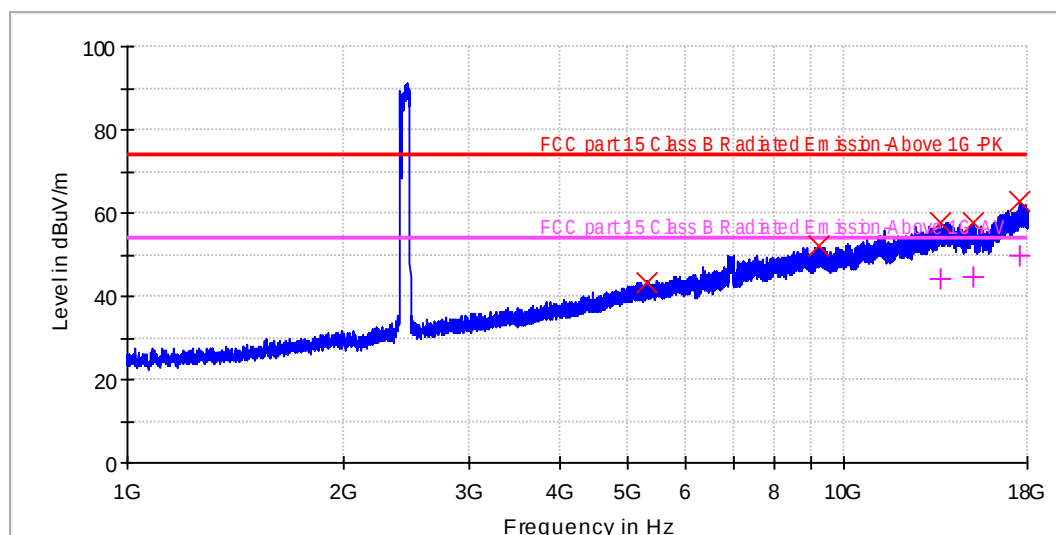

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
5311.000000	43.3	---	1000.0	150.0	V	136.0	0.8	30.8	74.0	---	---
9215.500000	52.2	---	1000.0	150.0	V	113.0	11.9	21.8	74.0	---	---
13581.000000	57.8	44.2	1000.0	150.0	V	144.0	17.1	16.2	74.0	9.8	54.0
15137.500000	57.9	44.8	1000.0	150.0	V	76.0	16.1	16.1	74.0	9.2	54.0
17606.500000	63.0	49.9	1000.0	150.0	V	287.0	22.0	11.0	74.0	4.1	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11b_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2300-2430 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.3 GHz - 2.43 GHz	26 kHz	PK+	1 MHz	1 s	20 dB

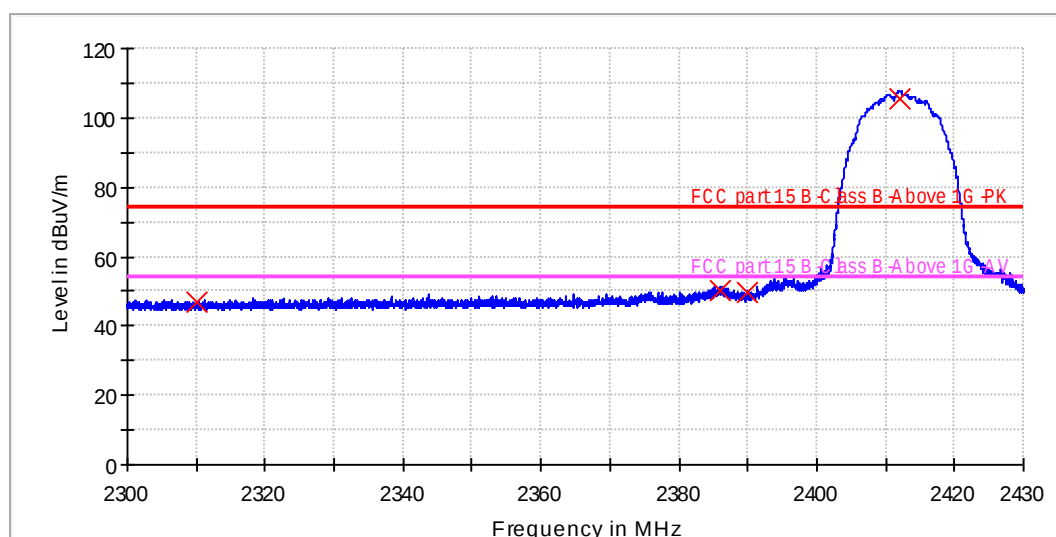

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2310.000000	47.1	1000.0	150.0	H	99.0	34.1	26.9	74.0
2386.000000	50.5	1000.0	150.0	H	120.0	34.4	23.5	74.0
2390.000000	49.7	1000.0	150.0	H	278.0	34.4	24.3	74.0
2412.000000	105.8	1000.0	150.0	H	195.0	34.5		


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11b_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2300-2430 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.3 GHz - 2.43 GHz	26 kHz	PK+	1 MHz	1 s	20 dB

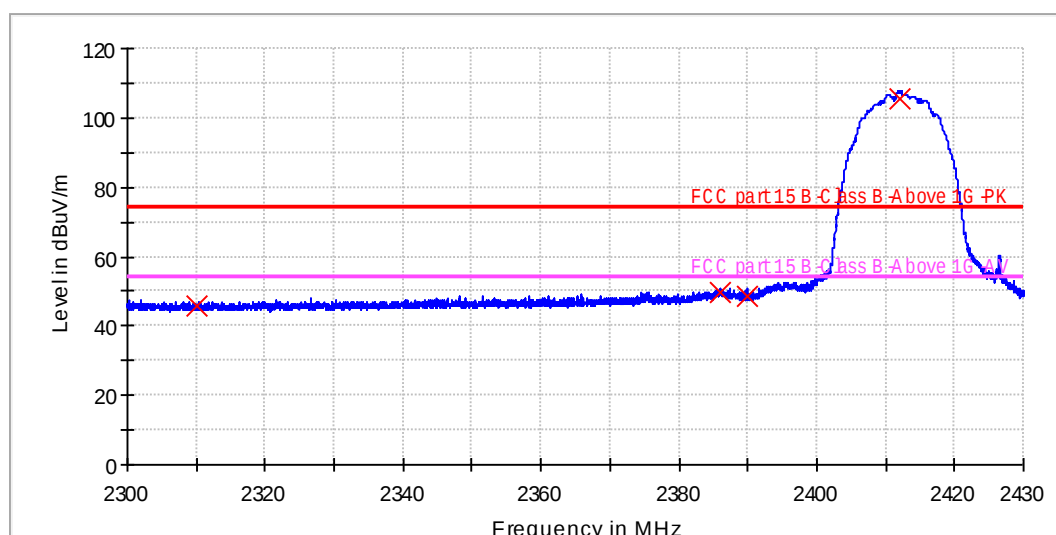

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2310.000000	45.6	1000.0	150.0	V	235.0	34.1	28.4	74.0
2386.000000	49.6	1000.0	150.0	V	91.0	34.4	24.4	74.0
2390.000000	48.5	1000.0	150.0	V	109.0	34.4	25.5	74.0
2412.000000	105.5	1000.0	150.0	V	84.0	34.5		


Common Information

EUT: Robotic Pool Skimmer
 Model: PNUJ4110
 Client: Quilo
 Operating Conditions: Power on, transmitting at 802.11b_2437MHz
 Operator Name: Xu Zheng
 Input: Powered by Battery, DC 14.4V
 Test Standard: FCC Part 15.209(a)
 Comment: Horizontal
 Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
 Receiver: [FSV 40]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

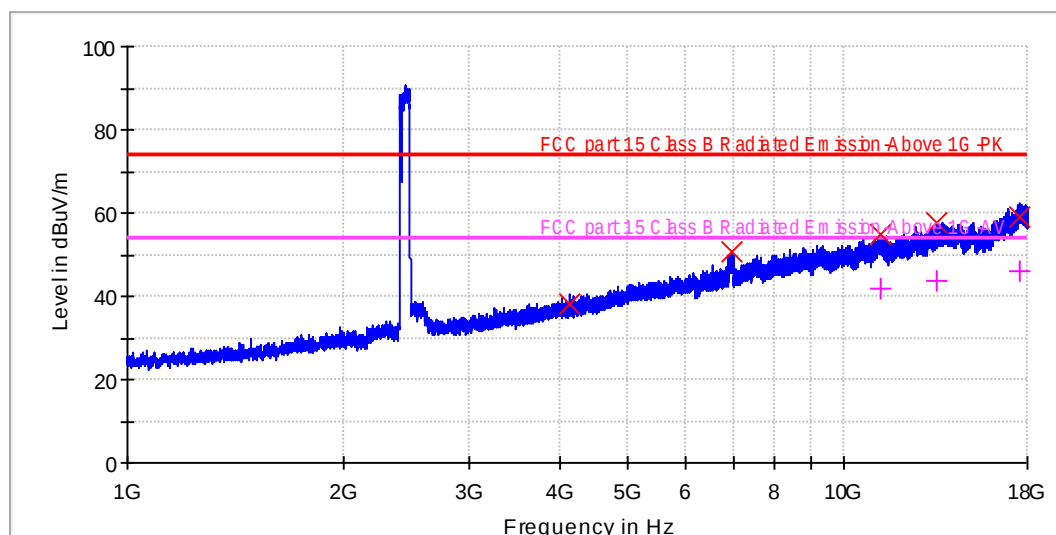

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
4137.500000	38.4	---	1000.0	150.0	H	176.0	-3.2	35.6	74.0	---	---
6981.500000	50.7	---	1000.0	150.0	H	214.0	7.3	23.3	74.0	---	---
11226.000000	55.0	41.9	1000.0	150.0	H	151.0	13.9	19.0	74.0	12.1	54.0
13485.000000	57.8	43.8	1000.0	150.0	H	59.0	17.2	16.2	74.0	10.2	54.0
17586.500000	58.8	45.9	1000.0	150.0	H	158.0	21.9	15.2	74.0	8.1	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11b_2437MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamplifier
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

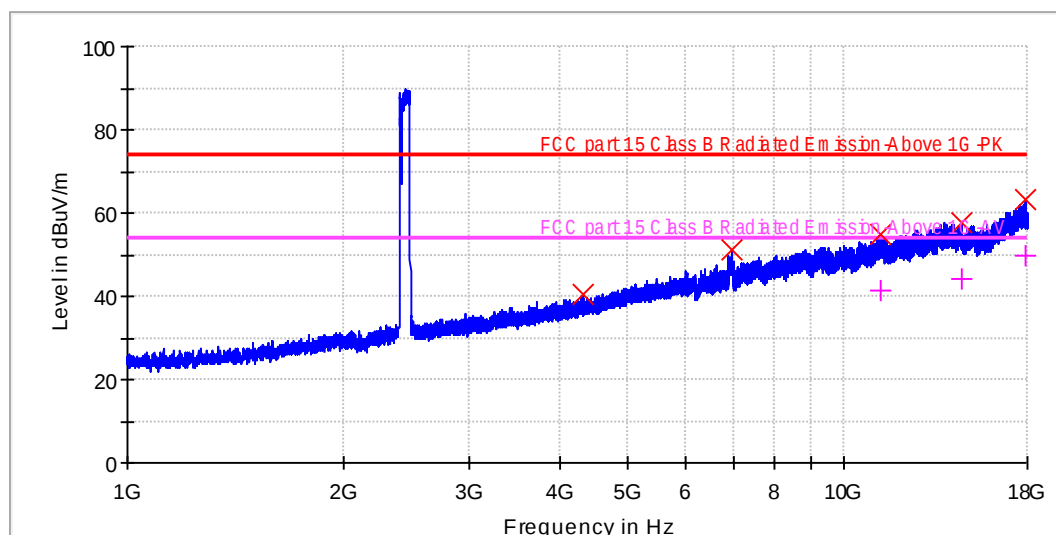

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
4314.500000	40.4	---	1000.0	150.0	V	148.0	-2.2	33.6	74.0	---	---
6956.000000	51.3	---	1000.0	150.0	V	233.0	7.2	22.7	74.0	---	---
11215.000000	55.0	41.6	1000.0	150.0	V	254.0	13.9	19.0	74.0	12.4	54.0
14533.000000	57.5	44.4	1000.0	150.0	V	106.0	16.4	16.6	74.0	9.6	54.0
17867.500000	63.1	49.7	1000.0	150.0	V	228.0	22.1	10.9	74.0	4.3	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11b_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

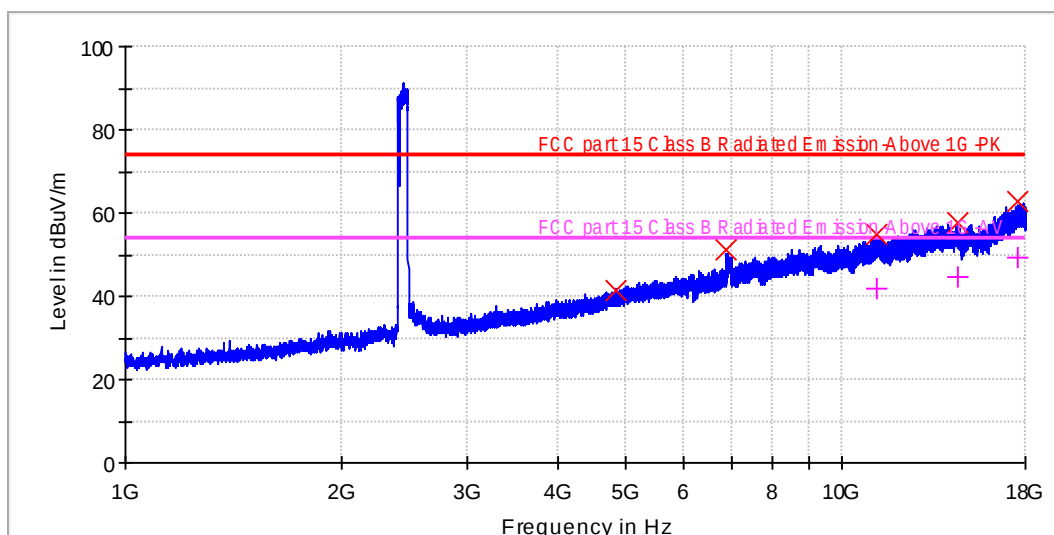

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
4821.500000	41.4	---	1000.0	150.0	H	245.0	-0.4	32.6	74.0	---	---
6897.000000	51.3	---	1000.0	150.0	H	112.0	7.3	22.8	74.0	---	---
11175.500000	54.9	41.9	1000.0	150.0	H	183.0	13.9	19.1	74.0	12.1	54.0
14443.500000	57.7	44.5	1000.0	150.0	H	34.0	16.6	16.3	74.0	9.5	54.0
17577.000000	62.7	49.2	1000.0	150.0	H	151.0	21.9	11.4	74.0	4.8	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11b_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

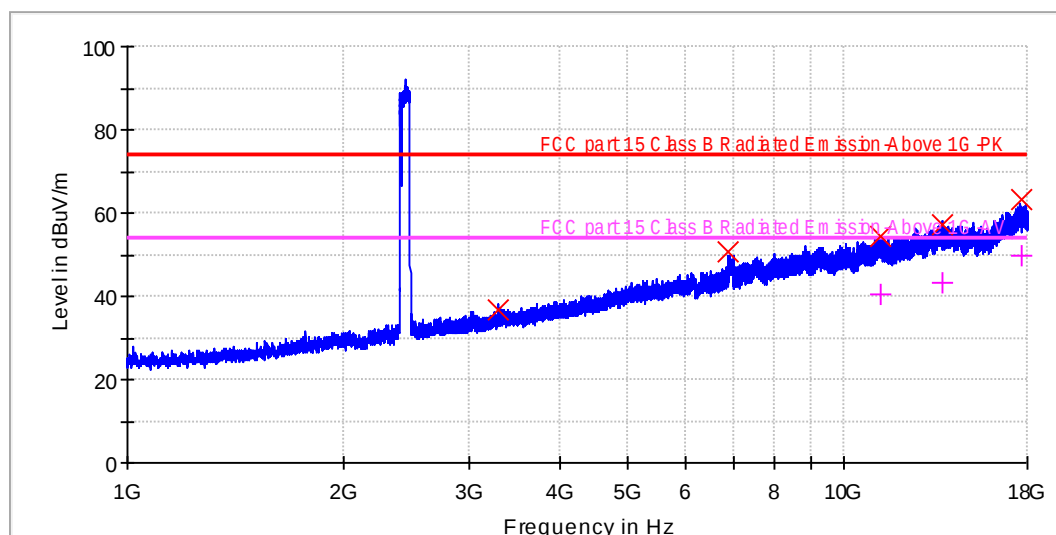

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
3280.500000	36.6	---	1000.0	150.0	V	147.0	-5.5	37.5	74.0	---	---
6897.000000	50.6	---	1000.0	150.0	V	31.0	7.3	23.4	74.0	---	---
11201.500000	54.5	40.4	1000.0	150.0	V	239.0	13.9	19.6	74.0	13.6	54.0
13703.000000	57.1	43.3	1000.0	150.0	V	180.0	17.0	16.9	74.0	10.7	54.0
17613.500000	63.4	49.8	1000.0	150.0	V	252.0	22.0	10.6	74.0	4.2	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11b_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2440-2530 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.44 GHz - 2.53 GHz	18 kHz	PK+	1 MHz	1 s	20 dB

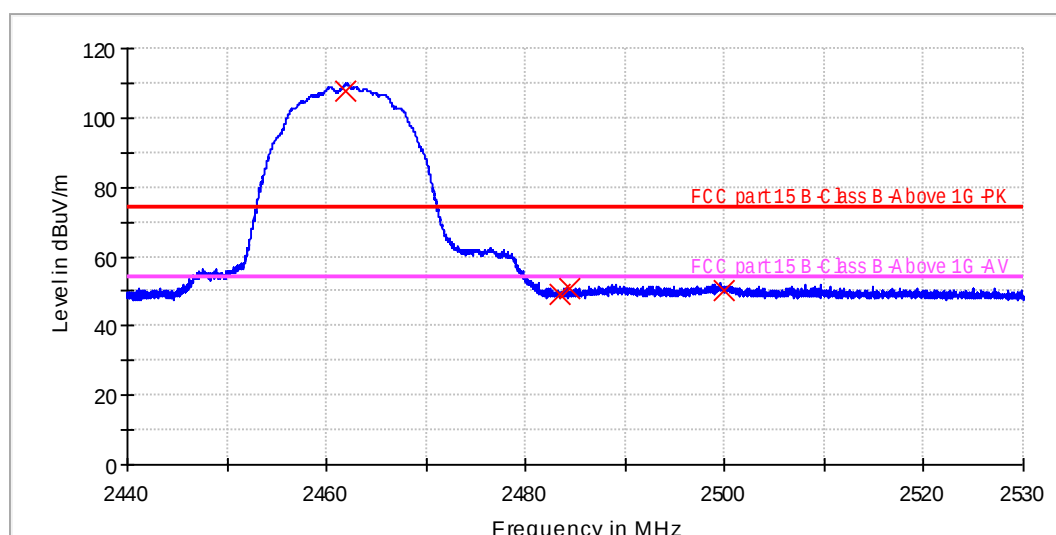

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2462.000000	107.9	1000.0	150.0	H	158.0	34.8		
2483.500000	49.2	1000.0	150.0	H	112.0	34.8	24.8	74.0
2484.500000	50.6	1000.0	150.0	H	69.0	34.8	23.4	74.0
2500.000000	50.3	1000.0	150.0	H	121.0	34.8	23.7	74.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11b_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2440-2530 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.44 GHz - 2.53 GHz	18 kHz	PK+	1 MHz	1 s	20 dB

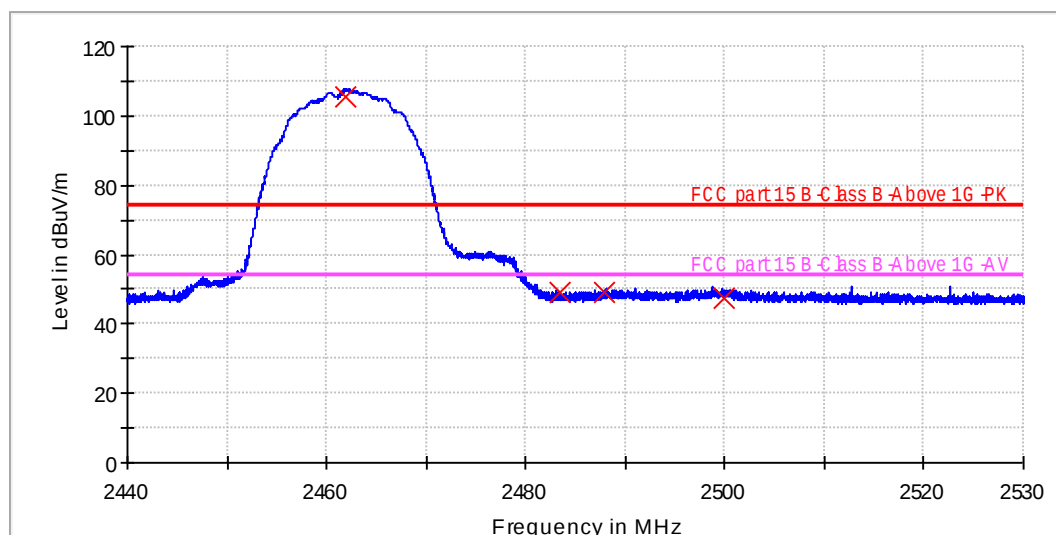

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
2462.000000	105.5	1000.0	150.0	V	203.0	34.8		
2483.500000	49.0	1000.0	150.0	V	128.0	34.8	25.0	74.0
2488.000000	49.4	1000.0	150.0	V	167.0	34.8	24.6	74.0
2500.000000	47.2	1000.0	150.0	V	233.0	34.8	26.8	74.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11g_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamplifier
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

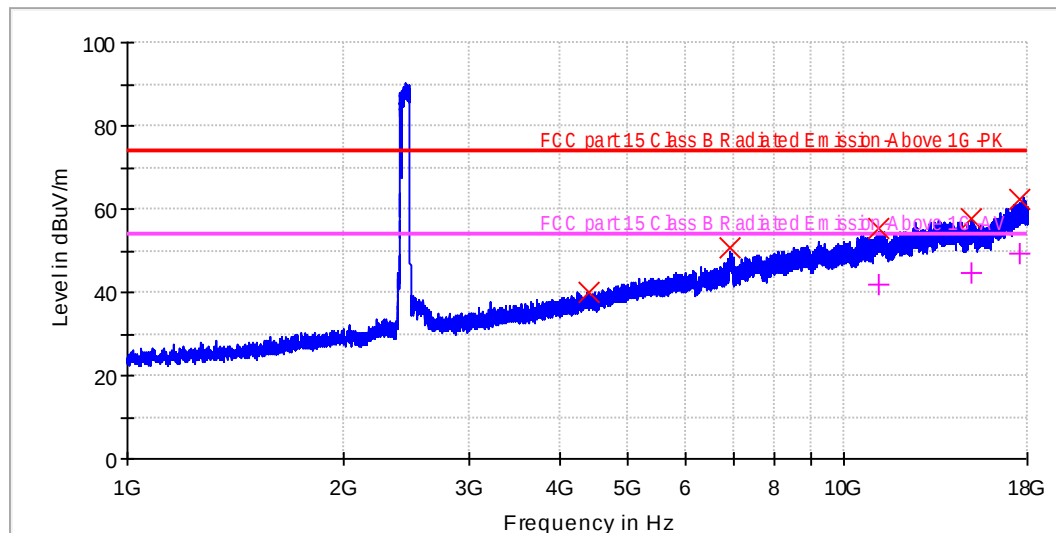

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
4394.000000	39.8	---	1000.0	150.0	H	69.0	-2.3	34.2	74.0	---	---
6914.000000	50.5	---	1000.0	150.0	H	244.0	7.3	23.5	74.0	---	---
11181.000000	55.2	41.9	1000.0	150.0	H	173.0	13.9	18.8	74.0	12.1	54.0
15072.500000	57.7	44.5	1000.0	150.0	H	208.0	16.3	16.3	74.0	9.5	54.0
17573.500000	62.2	49.3	1000.0	150.0	H	27.0	21.9	11.8	74.0	4.7	54.0




Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11g_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

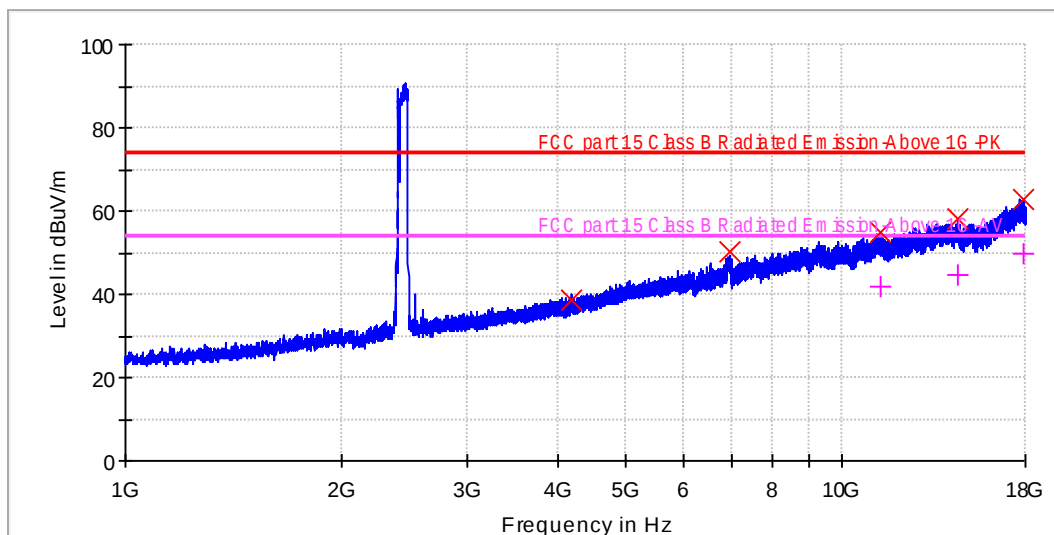

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
4184.000000	38.5	---	1000.0	150.0	V	201.0	-3.1	35.5	74.0	---	---
6956.500000	50.1	---	1000.0	150.0	V	140.0	7.2	23.9	74.0	---	---
11273.500000	54.9	41.7	1000.0	150.0	V	303.0	13.9	19.1	74.0	12.4	54.0
14490.000000	58.2	44.7	1000.0	150.0	V	48.0	16.6	15.8	74.0	9.3	54.0
17834.500000	62.6	49.7	1000.0	150.0	V	241.0	22.1	11.4	74.0	4.3	54.0




Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11g_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2300-2430 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.3 GHz - 2.43 GHz	26 kHz	PK+	1 MHz	1 s	20 dB

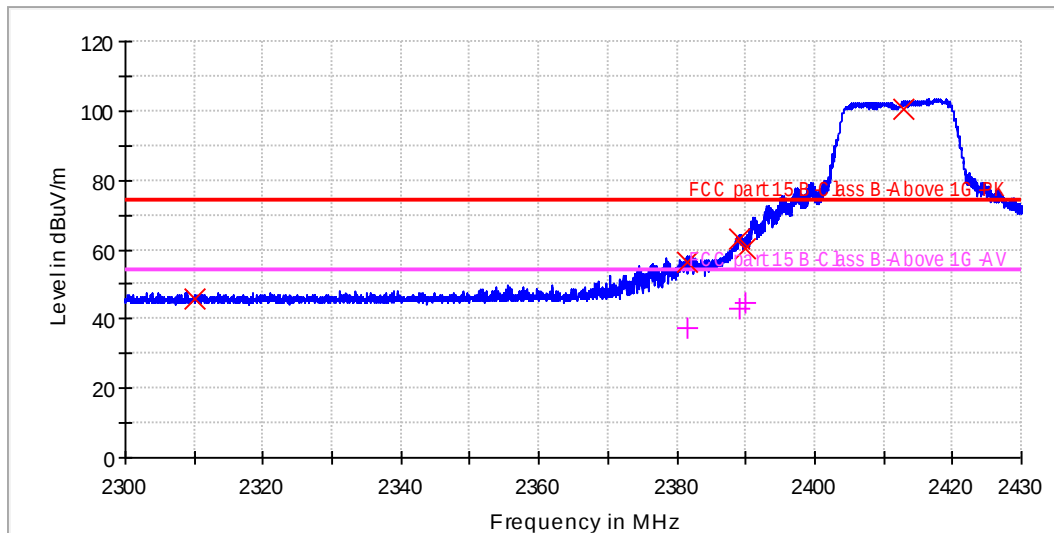

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2310.000000	45.7	---	1000.0	150.0	H	164.0	34.1	28.3	74.0	---	---
2381.500000	56.2	37.4	1000.0	150.0	H	95.0	34.3	17.8	74.0	16.6	54.0
2389.000000	63.3	43.0	1000.0	150.0	H	148.0	34.4	10.8	74.0	11.0	54.0
2390.000000	60.5	44.4	1000.0	150.0	H	221.0	34.4	13.5	74.0	9.6	54.0
2413.000000	100.3	---	1000.0	150.0	H	173.0	34.5			---	---


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11g_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2300-2430 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.3 GHz - 2.43 GHz	26 kHz	PK+	1 MHz	1 s	20 dB

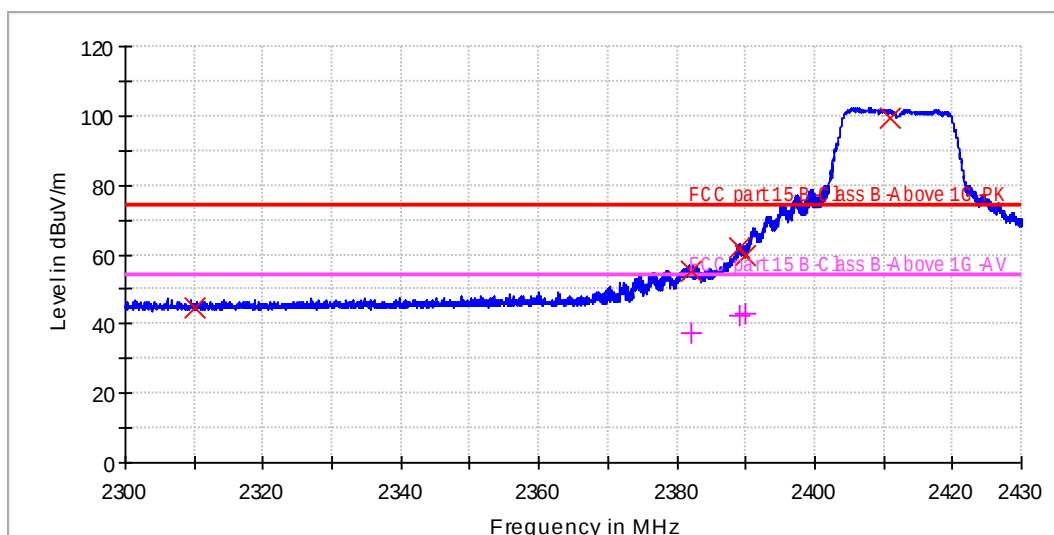

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2310.000000	44.9	---	1000.0	150.0	V	241.0	34.1	29.1	74.0	---	---
2382.000000	55.3	37.1	1000.0	150.0	V	143.0	34.3	18.7	74.0	16.9	54.0
2389.000000	62.1	42.5	1000.0	150.0	V	91.0	34.4	11.9	74.0	11.5	54.0
2390.000000	59.8	43.2	1000.0	150.0	V	256.0	34.4	14.2	74.0	10.8	54.0
2411.000000	99.2	---	1000.0	150.0	V	193.0	34.5	---	---	---	---


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11g_2437MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

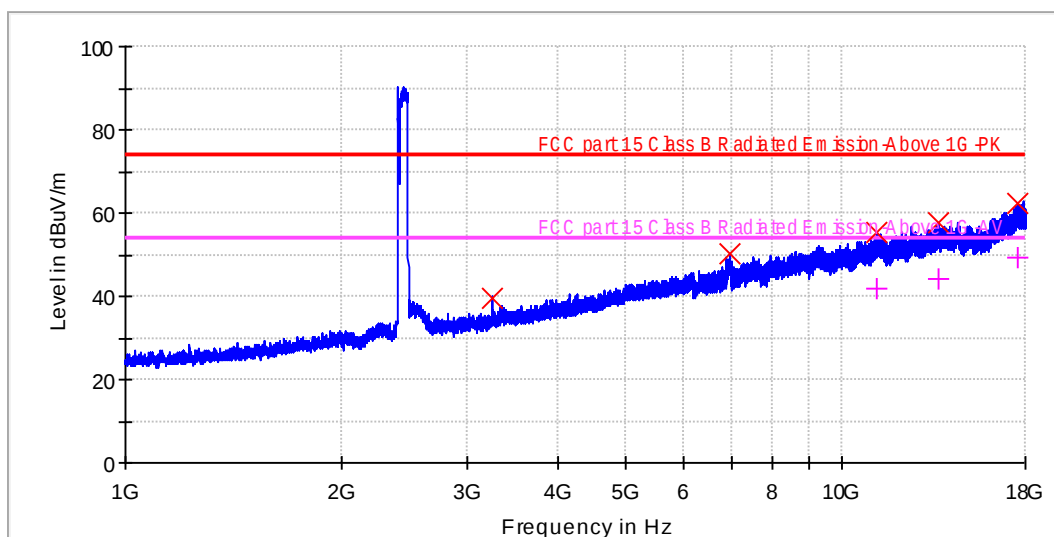

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
3249.500000	39.7	---	1000.0	150.0	H	155.0	-5.8	34.3	74.0	---	---
6965.500000	50.0	---	1000.0	150.0	H	122.0	7.2	24.0	74.0	---	---
11155.500000	55.1	42.0	1000.0	150.0	H	208.0	13.8	18.9	74.0	12.0	54.0
13615.500000	57.8	44.3	1000.0	150.0	H	67.0	17.1	16.2	74.0	9.7	54.0
17581.000000	62.2	49.4	1000.0	150.0	H	106.0	21.9	11.8	74.0	4.6	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11g_2437MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

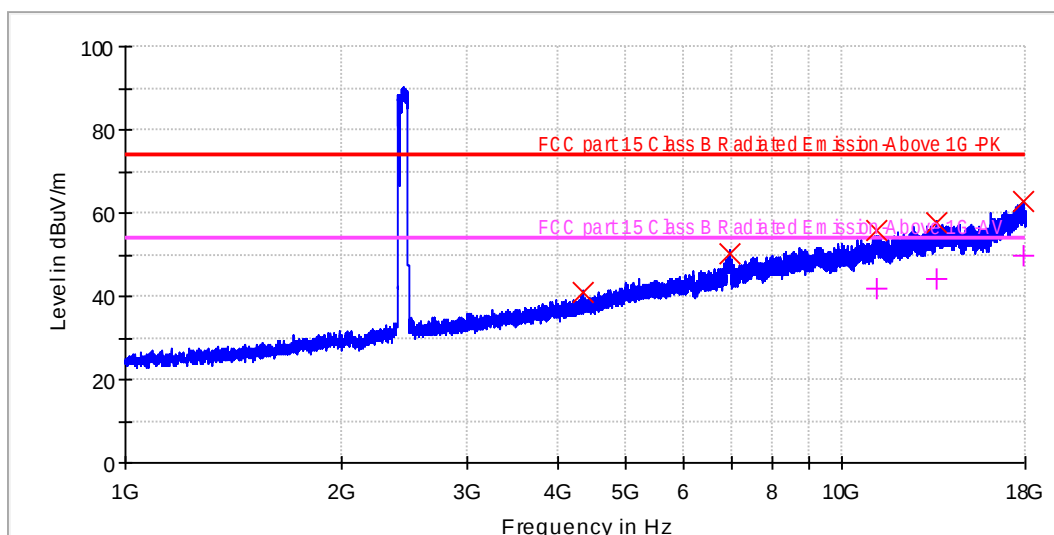

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
4360.000000	41.0	---	1000.0	150.0	V	98.0	-2.4	33.0	74.0	---	---
6957.500000	50.4	---	1000.0	150.0	V	302.0	7.2	23.6	74.0	---	---
11143.500000	55.6	42.0	1000.0	150.0	V	192.0	13.8	18.4	74.0	12.0	54.0
13557.000000	57.8	44.3	1000.0	150.0	V	129.0	17.1	16.2	74.0	9.7	54.0
17848.000000	62.8	49.6	1000.0	150.0	V	184.0	22.1	11.2	74.0	4.4	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11g_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

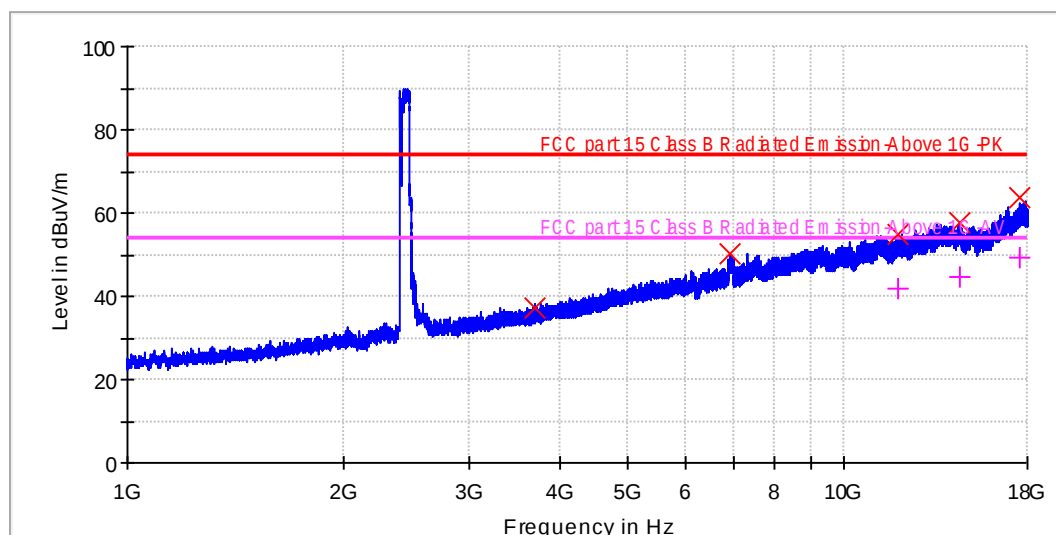

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
3693.500000	37.4	---	1000.0	150.0	H	41.0	-4.6	36.6	74.0	---	---
6937.500000	50.2	---	1000.0	150.0	H	229.0	7.2	23.8	74.0	---	---
11905.500000	55.0	41.7	1000.0	150.0	H	142.0	14.3	19.0	74.0	12.3	54.0
14464.500000	57.6	44.7	1000.0	150.0	H	108.0	16.6	16.4	74.0	9.3	54.0
17606.000000	63.7	49.5	1000.0	150.0	H	126.0	22.0	10.3	74.0	4.5	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11g_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

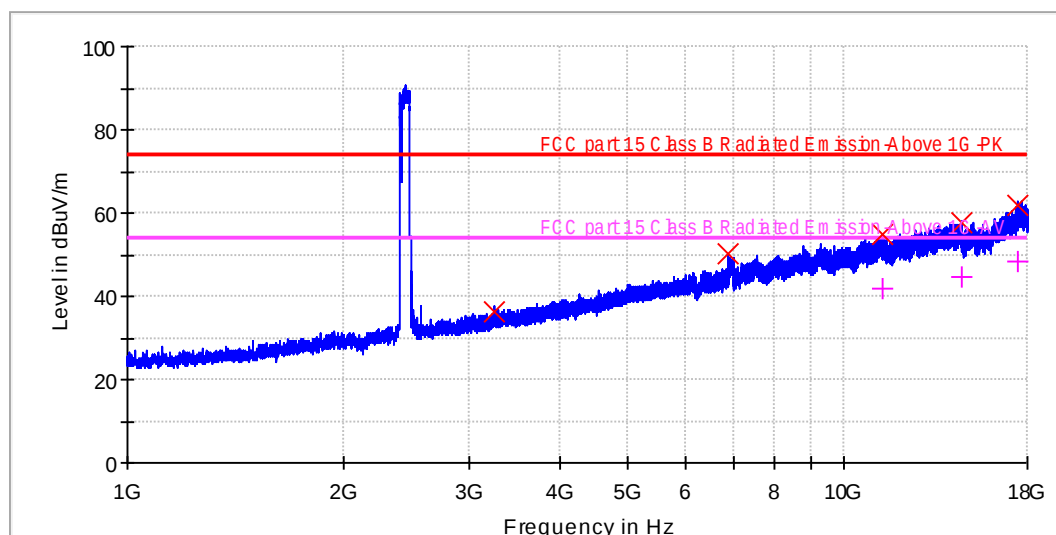

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
3242.000000	36.4	---	1000.0	150.0	V	195.0	-5.9	37.6	74.0	---	---
6900.500000	50.4	---	1000.0	150.0	V	34.0	7.3	23.6	74.0	---	---
11277.500000	55.0	41.8	1000.0	150.0	V	130.0	13.9	19.1	74.0	12.2	54.0
14536.500000	57.8	44.6	1000.0	150.0	V	197.0	16.4	16.2	74.0	9.4	54.0
17461.500000	62.0	48.3	1000.0	150.0	V	237.0	21.7	12.0	74.0	5.7	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11g_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2440-2530 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.44 GHz - 2.53 GHz	18 kHz	PK+	1 MHz	1 s	20 dB

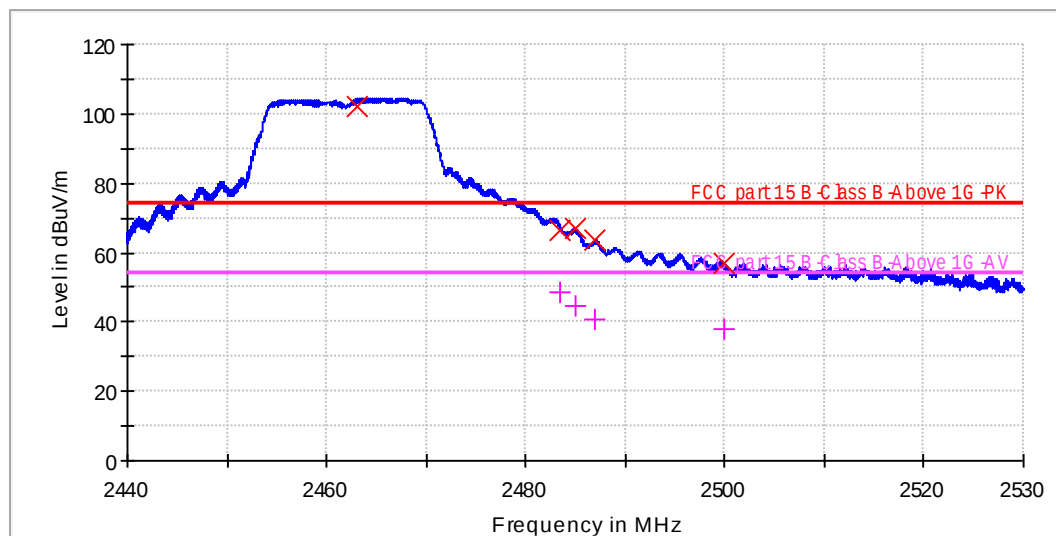

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2463.000000	102.3	---	1000.0	150.0	H	297.0	34.8			---	---
2483.500000	66.7	48.8	1000.0	150.0	H	134.0	34.8	7.3	74.0	5.2	54.0
2485.000000	66.9	44.6	1000.0	150.0	H	158.0	34.8	7.1	74.0	9.4	54.0
2487.000000	63.8	40.7	1000.0	150.0	H	22.0	34.8	10.2	74.0	13.3	54.0
2500.000000	57.1	37.7	1000.0	150.0	H	119.0	34.8	16.9	74.0	16.3	54.0




Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11g_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2440-2530 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.44 GHz - 2.53 GHz	18 kHz	PK+	1 MHz	1 s	20 dB

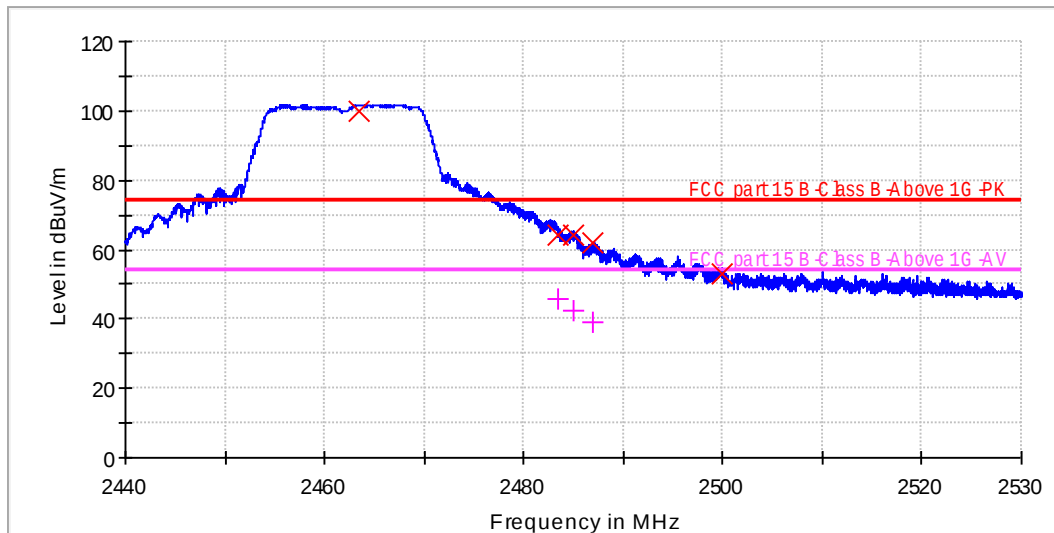

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2463.500000	99.8	---	1000.0	150.0	V	145.0	34.8			---	---
2483.500000	64.2	45.7	1000.0	150.0	V	204.0	34.8	9.9	74.0	8.3	54.0
2485.000000	64.3	42.3	1000.0	150.0	V	178.0	34.8	9.7	74.0	11.7	54.0
2487.000000	61.8	39.0	1000.0	150.0	V	269.0	34.8	12.2	74.0	15.0	54.0
2500.000000	53.3	---	1000.0	150.0	V	88.0	34.8	20.7	74.0	---	---


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

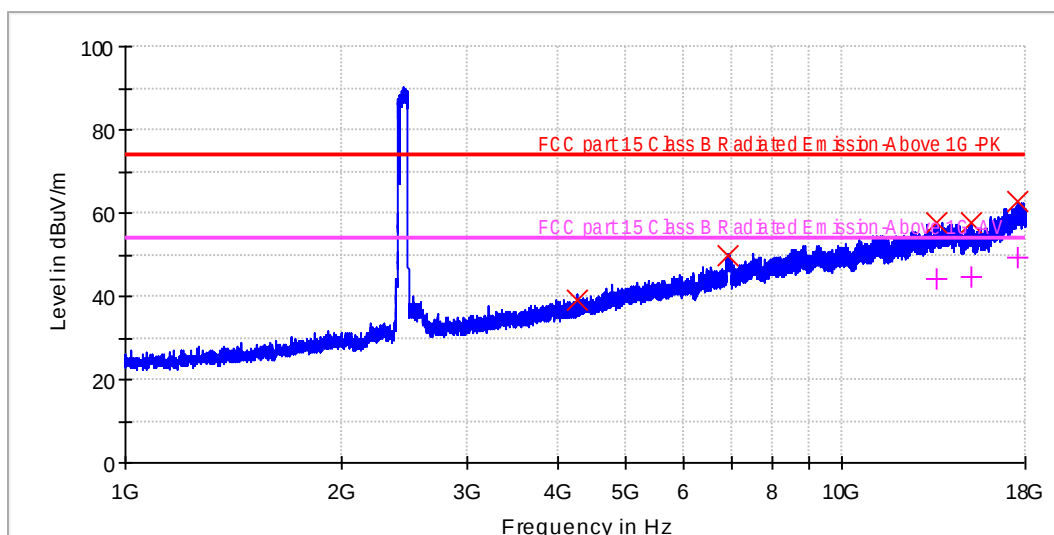

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
4271.500000	39.2	---	1000.0	150.0	H	161.0	-2.7	34.8	74.0	---	---
6946.500000	49.8	---	1000.0	150.0	H	256.0	7.2	24.2	74.0	---	---
13564.000000	57.7	44.3	1000.0	150.0	H	230.0	17.1	16.3	74.0	9.7	54.0
15119.500000	57.8	44.5	1000.0	150.0	H	62.0	16.2	16.2	74.0	9.5	54.0
17578.500000	62.6	49.2	1000.0	150.0	H	131.0	21.9	11.4	74.0	4.8	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

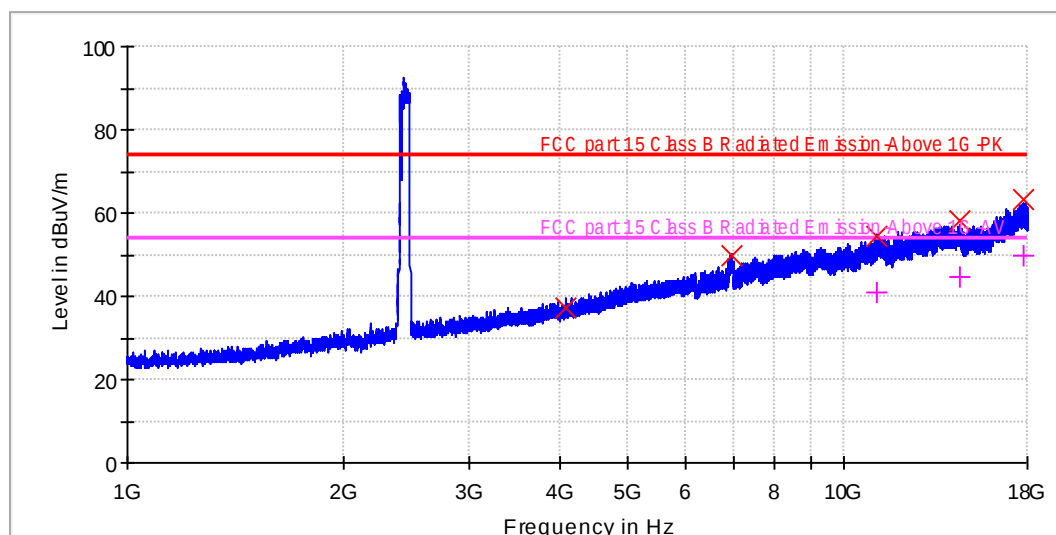

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
4086.500000	37.3	---	1000.0	150.0	V	140.0	-3.3	36.7	74.0	---	---
6983.500000	49.9	---	1000.0	150.0	V	197.0	7.3	24.1	74.0	---	---
11092.000000	54.6	41.0	1000.0	150.0	V	218.0	13.8	19.4	74.0	13.0	54.0
14504.000000	58.0	44.8	1000.0	150.0	V	77.0	16.6	16.0	74.0	9.2	54.0
17827.500000	63.2	49.8	1000.0	150.0	V	234.0	22.1	10.8	74.0	4.2	54.0


Common Information

EUT: Robotic Pool Skimmer
 Model: PNUJ4110
 Client: Quilo
 Operating Conditions: Power on, transmitting at 802.11n_2412MHz
 Operator Name: Xu Zheng
 Input: Powered by Battery, DC 14.4V
 Test Standard: FCC Part 15.209(a)
 Comment: Horizontal
 Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2300-2430 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
 Receiver: [ESR 7]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.3 GHz - 2.43 GHz	26 kHz	PK+	1 MHz	1 s	20 dB

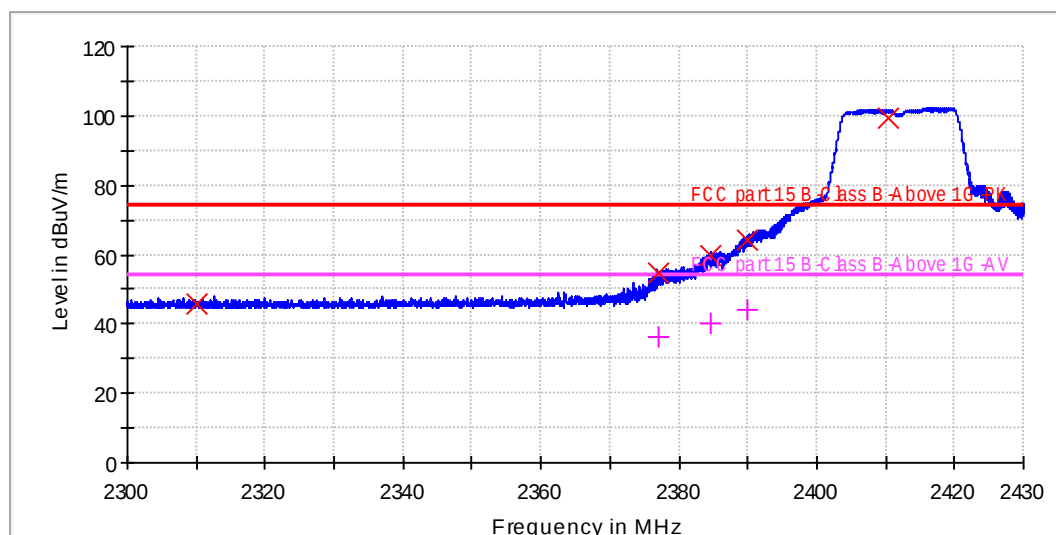

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2310.000000	45.6	---	1000.0	150.0	H	77.0	34.1	28.4	74.0	---	---
2377.000000	54.7	36.1	1000.0	150.0	H	323.0	34.3	19.3	74.0	17.9	54.0
2384.500000	59.8	40.2	1000.0	150.0	H	159.0	34.4	14.2	74.0	13.8	54.0
2390.000000	64.3	44.2	1000.0	150.0	H	164.0	34.4	9.7	74.0	9.8	54.0
2410.500000	99.5	---	1000.0	150.0	H	182.0	34.5			---	---


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2300-2430 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.3 GHz - 2.43 GHz	26 kHz	PK+	1 MHz	1 s	20 dB

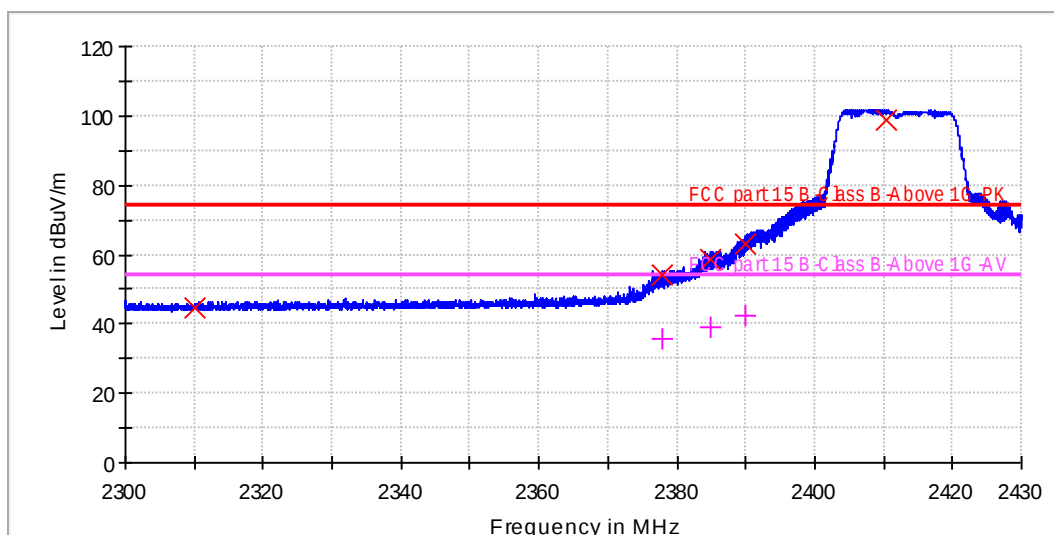

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2310.000000	44.8	---	1000.0	150.0	V	174.0	34.1	29.2	74.0	---	---
2378.000000	54.3	35.6	1000.0	150.0	V	79.0	34.3	19.7	74.0	18.4	54.0
2385.000000	58.7	39.2	1000.0	150.0	V	195.0	34.4	15.3	74.0	14.8	54.0
2390.000000	63.2	42.2	1000.0	150.0	V	169.0	34.4	10.8	74.0	11.8	54.0
2410.500000	99.0	---	1000.0	150.0	V	136.0	34.5			---	---


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n_2437MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

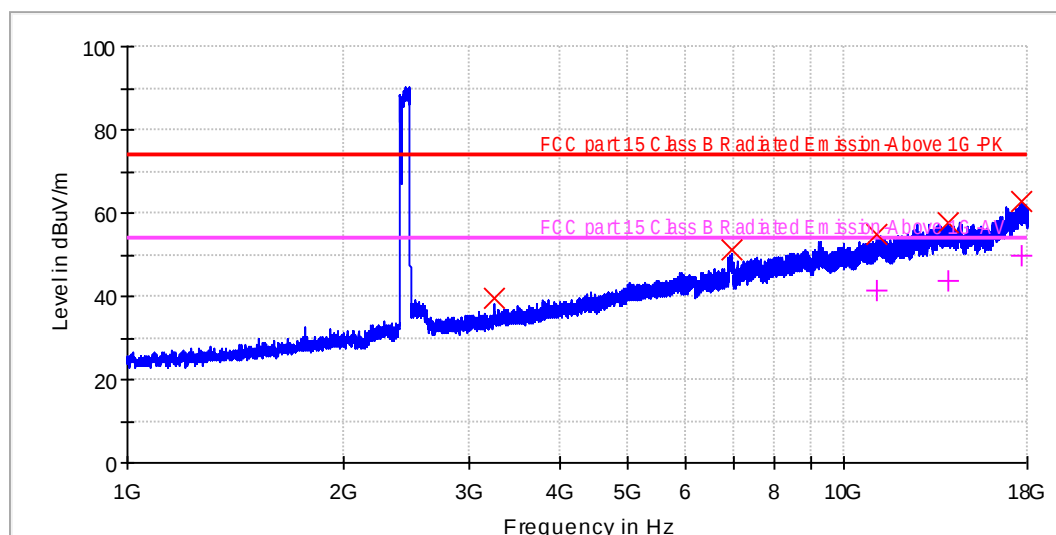

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
3249.500000	39.5	---	1000.0	150.0	H	153.0	-5.8	34.5	74.0	---	---
6953.000000	51.1	---	1000.0	150.0	H	57.0	7.2	22.9	74.0	---	---
11111.500000	54.8	41.5	1000.0	150.0	H	278.0	13.8	19.3	74.0	12.6	54.0
13958.000000	57.6	43.9	1000.0	150.0	H	104.0	17.0	16.4	74.0	10.1	54.0
17620.000000	62.8	49.8	1000.0	150.0	H	141.0	22.0	11.2	74.0	4.2	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n_2437MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamplifier
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

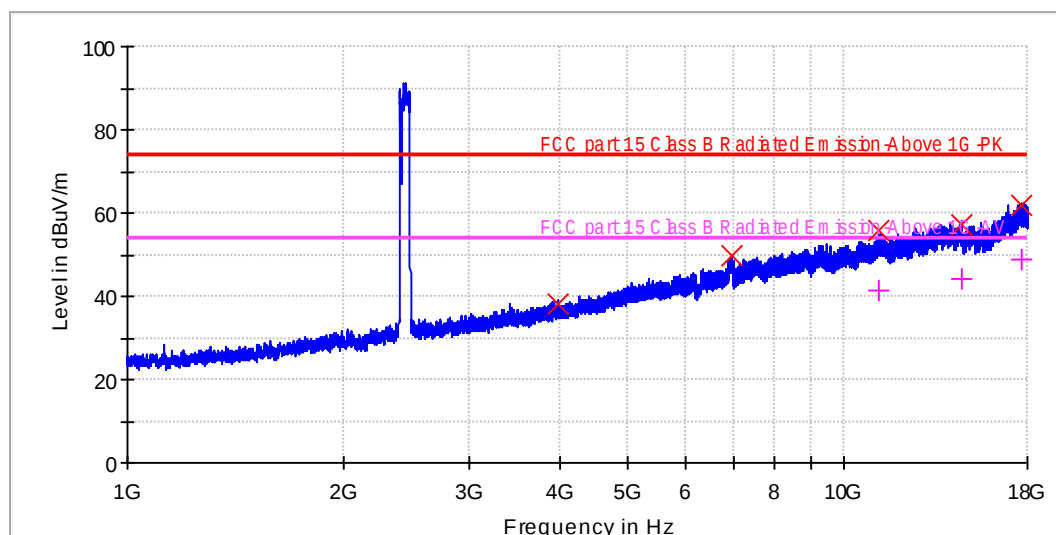

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
3978.500000	38.3	---	1000.0	150.0	V	208.0	-3.3	35.7	74.0	---	---
6981.500000	50.0	---	1000.0	150.0	V	184.0	7.3	24.0	74.0	---	---
11131.500000	55.6	41.6	1000.0	150.0	V	101.0	13.8	18.4	74.0	12.4	54.0
14539.000000	57.4	44.3	1000.0	150.0	V	279.0	16.4	16.6	74.0	9.7	54.0
17714.500000	61.7	48.9	1000.0	150.0	V	20.0	22.0	12.3	74.0	5.2	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

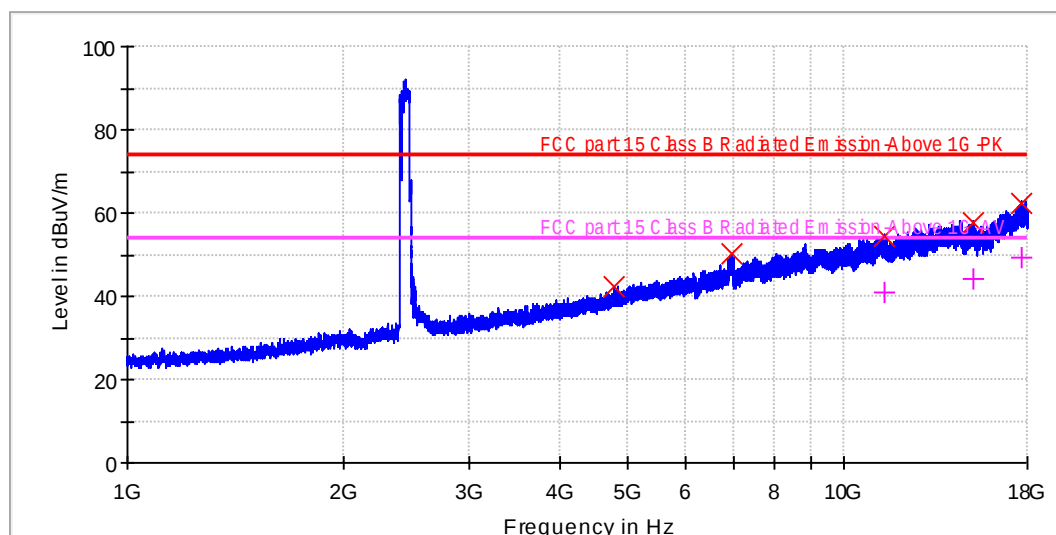

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
4768.500000	42.4	---	1000.0	150.0	H	206.0	-0.8	31.6	74.0	---	---
6989.500000	50.2	---	1000.0	150.0	H	223.0	7.3	23.8	74.0	---	---
11377.000000	54.6	41.2	1000.0	150.0	H	67.0	13.9	19.4	74.0	12.8	54.0
15086.000000	57.6	44.3	1000.0	150.0	H	120.0	16.3	16.5	74.0	9.8	54.0
17652.000000	62.2	49.1	1000.0	150.0	H	108.0	22.0	11.8	74.0	4.9	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

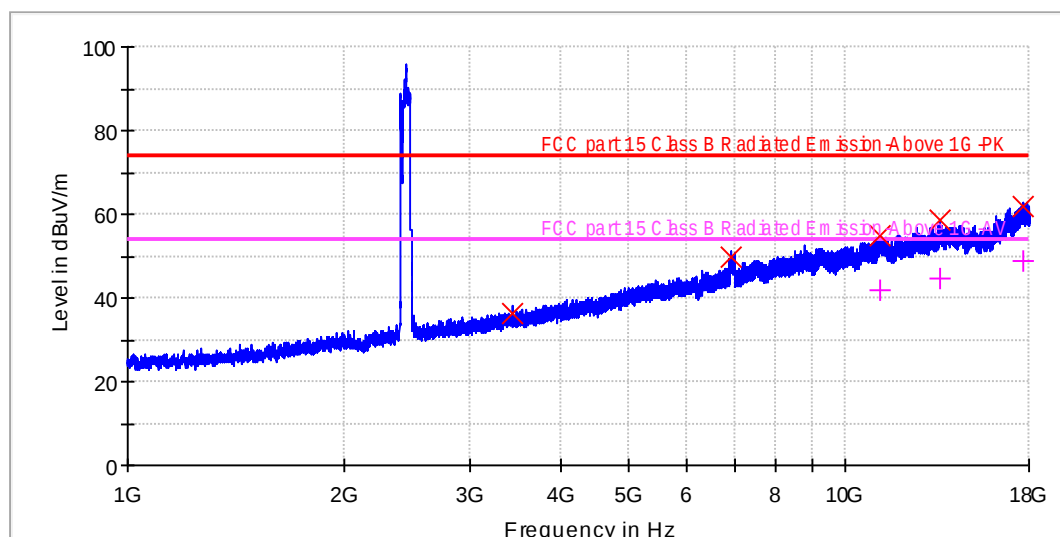

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
3431.500000	36.2	---	1000.0	150.0	V	182.0	-5.4	37.8	74.0	---	---
6932.500000	49.8	---	1000.0	150.0	V	229.0	7.2	24.2	74.0	---	---
11183.500000	55.0	42.0	1000.0	150.0	V	207.0	13.9	19.0	74.0	12.0	54.0
13542.500000	58.6	44.5	1000.0	150.0	V	91.0	17.1	15.4	74.0	9.5	54.0
17672.000000	62.0	48.9	1000.0	150.0	V	121.0	22.0	12.1	74.0	5.1	54.0


Common Information

EUT: Robotic Pool Skimmer
 Model: PNUJ4110
 Client: Quilo
 Operating Conditions: Power on, transmitting at 802.11n_2462MHz
 Operator Name: Xu Zheng
 Input: Powered by Battery, DC 14.4V
 Test Standard: FCC Part 15.209(a)
 Comment: Horizontal
 Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2440-2530 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
 Receiver: [ESR 7]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.44 GHz - 2.53 GHz	18 kHz	PK+	1 MHz	1 s	20 dB

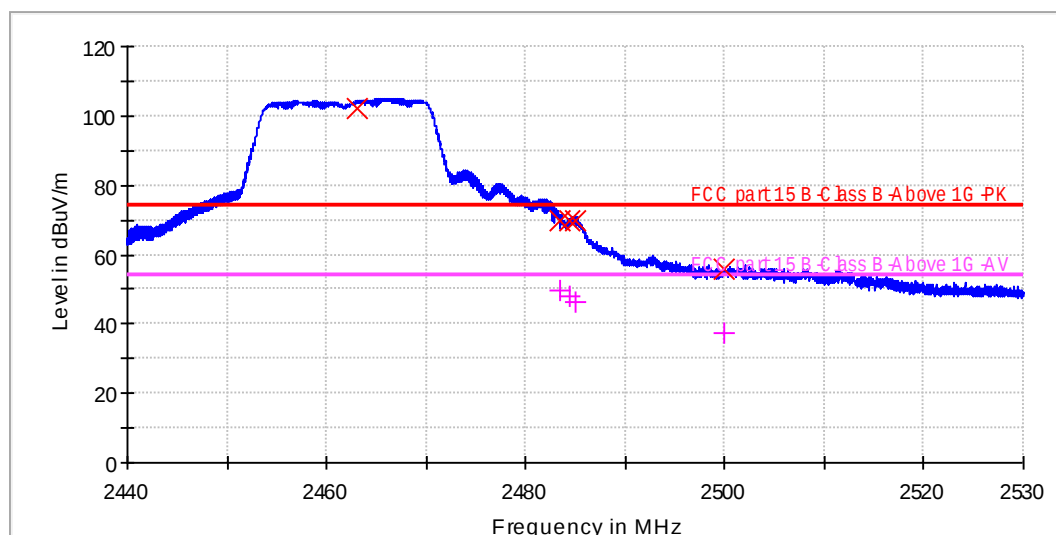

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2463.000000	102.1	---	1000.0	150.0	H	254.0	34.8			---	---
2483.500000	69.9	49.8	1000.0	150.0	H	87.0	34.8	4.1	74.0	4.2	54.0
2484.500000	69.6	47.8	1000.0	150.0	H	163.0	34.8	4.4	74.0	6.2	54.0
2485.000000	69.6	46.6	1000.0	150.0	H	84.0	34.8	4.4	74.0	7.4	54.0
2500.000000	55.7	37.6	1000.0	150.0	H	196.0	34.8	18.3	74.0	16.4	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n_2462MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2440-2530 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.44 GHz - 2.53 GHz	18 kHz	PK+	1 MHz	1 s	20 dB

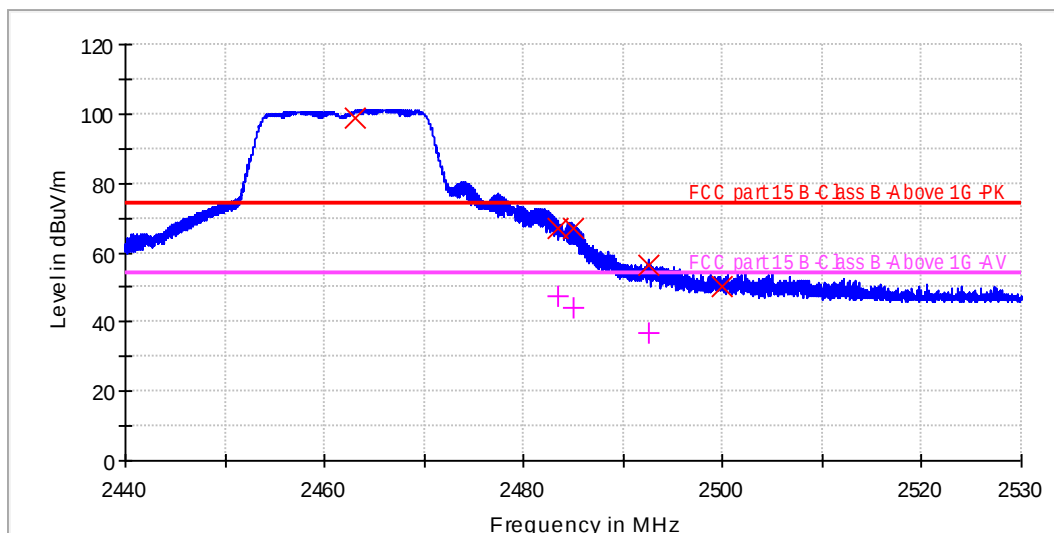

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2463.000000	98.9	---	1000.0	150.0	V	288.0	34.8			---	---
2483.500000	67.1	47.2	1000.0	150.0	V	121.0	34.8	7.0	74.0	6.8	54.0
2485.000000	67.1	43.8	1000.0	150.0	V	155.0	34.8	6.9	74.0	10.2	54.0
2492.500000	56.1	36.6	1000.0	150.0	V	210.0	34.8	17.9	74.0	17.4	54.0
2500.000000	50.4	---	1000.0	150.0	V	113.0	34.8	23.6	74.0	---	---


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n40_2422MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

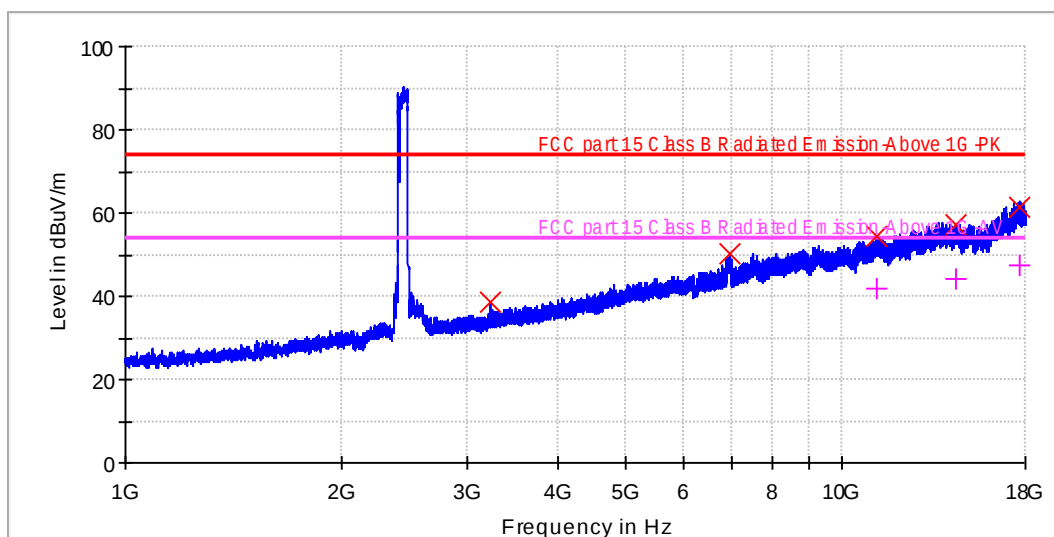

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
3229.500000	38.8	---	1000.0	150.0	H	81.0	-5.9	35.2	74.0	---	---
6972.000000	50.2	---	1000.0	150.0	H	136.0	7.2	23.8	74.0	---	---
11157.000000	54.6	41.7	1000.0	150.0	H	216.0	13.8	19.4	74.0	12.3	54.0
14377.500000	57.4	44.2	1000.0	150.0	H	267.0	16.7	16.6	74.0	9.8	54.0
17619.500000	61.4	47.7	1000.0	150.0	H	169.0	22.0	12.6	74.0	6.3	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n40_2422MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

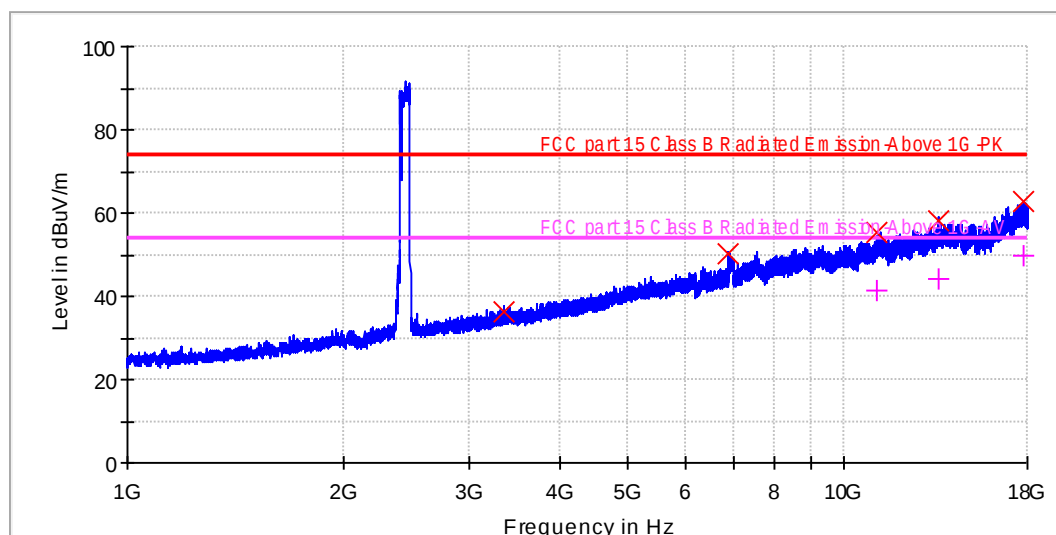

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
3355.000000	36.5	---	1000.0	150.0	V	191.0	-5.4	37.5	74.0	---	---
6899.000000	50.2	---	1000.0	150.0	V	92.0	7.3	23.8	74.0	---	---
11128.000000	55.1	41.4	1000.0	150.0	V	226.0	13.8	18.9	74.0	12.7	54.0
13527.500000	58.0	44.4	1000.0	150.0	V	127.0	17.2	16.0	74.0	9.7	54.0
17833.000000	62.7	49.6	1000.0	150.0	V	215.0	22.1	11.3	74.0	4.4	54.0


Common Information

EUT: Robotic Pool Skimmer
 Model: PNUJ4110
 Client: Quilo
 Operating Conditions: Power on, transmitting at 802.11n40_2422MHz
 Operator Name: Xu Zheng
 Input: Powered by Battery, DC 14.4V
 Test Standard: FCC Part 15.209(a)
 Comment: Horizontal
 Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2300-2430 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
 Receiver: [ESR 7]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.3 GHz - 2.45 GHz	30 kHz	PK+	1 MHz	1 s	20 dB

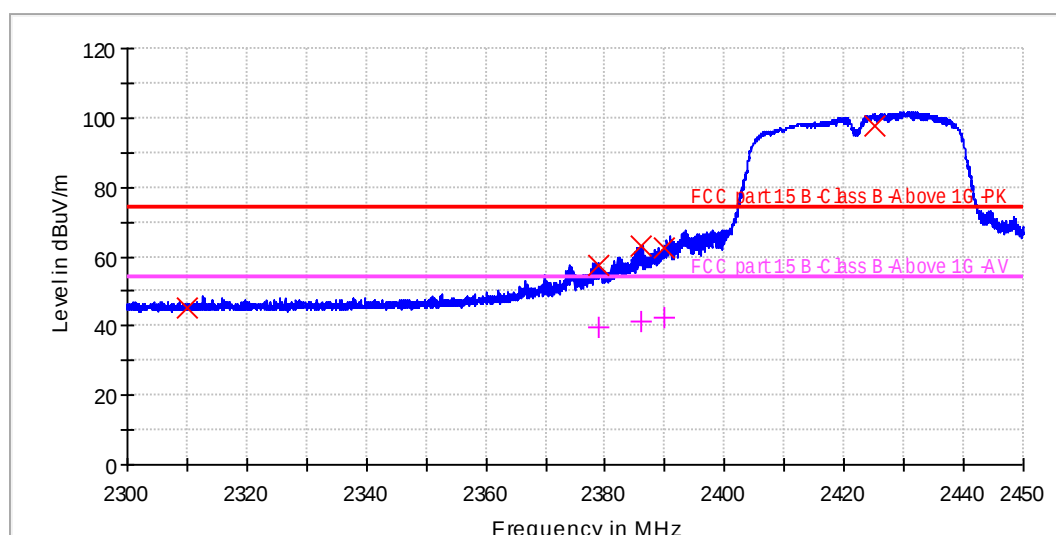

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2310.000000	45.4	---	1000.0	150.0	H	157.0	34.1	28.6	74.0	---	---
2379.000000	57.5	39.5	1000.0	150.0	H	114.0	34.3	16.5	74.0	14.6	54.0
2386.000000	62.9	41.4	1000.0	150.0	H	265.0	34.4	11.1	74.0	12.6	54.0
2390.000000	62.4	42.6	1000.0	150.0	H	248.0	34.4	11.7	74.0	11.4	54.0
2425.000000	97.9	---	1000.0	150.0	H	109.0	34.6	---	---	---	---


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n40_2422MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2300-2430 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.3 GHz - 2.45 GHz	30 kHz	PK+	1 MHz	1 s	20 dB

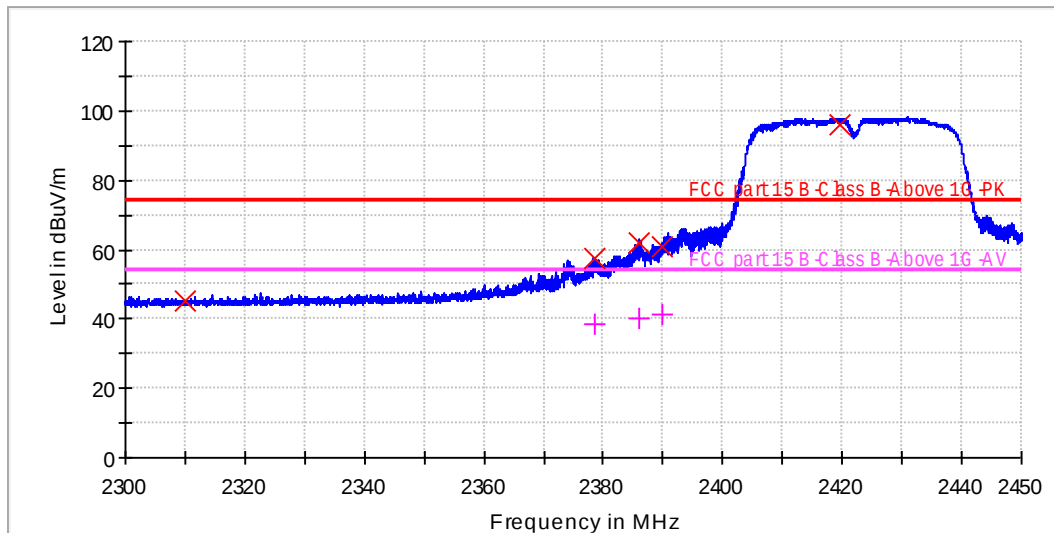

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2310.000000	45.0	---	1000.0	150.0	V	235.0	34.1	29.0	74.0	---	---
2378.500000	57.4	38.4	1000.0	150.0	V	168.0	34.3	16.6	74.0	15.7	54.0
2386.000000	61.9	39.9	1000.0	150.0	V	186.0	34.4	12.1	74.0	14.1	54.0
2390.000000	61.1	41.2	1000.0	150.0	V	197.0	34.4	12.9	74.0	12.8	54.0
2419.500000	95.9	---	1000.0	150.0	V	145.0	34.6	---	---	---	---


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n40_2437MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

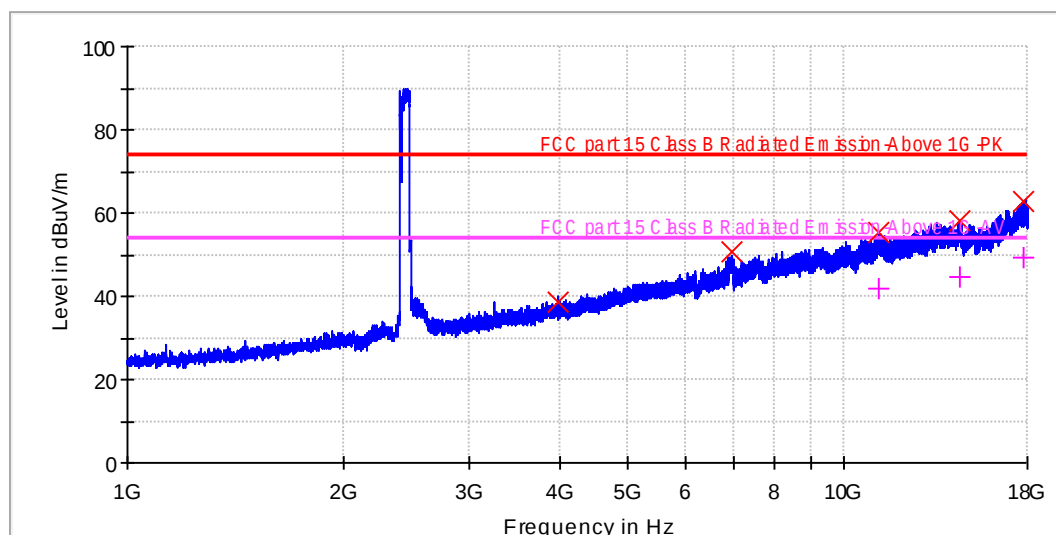

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
3976.500000	38.6	---	1000.0	150.0	H	289.0	-3.4	35.4	74.0	---	---
6957.500000	50.8	---	1000.0	150.0	H	130.0	7.2	23.2	74.0	---	---
11180.000000	55.4	41.7	1000.0	150.0	H	234.0	13.9	18.6	74.0	12.3	54.0
14519.500000	58.1	44.8	1000.0	150.0	H	143.0	16.5	15.9	74.0	9.3	54.0
17771.500000	62.9	49.2	1000.0	150.0	H	49.0	22.1	11.1	74.0	4.8	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n40_2437MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

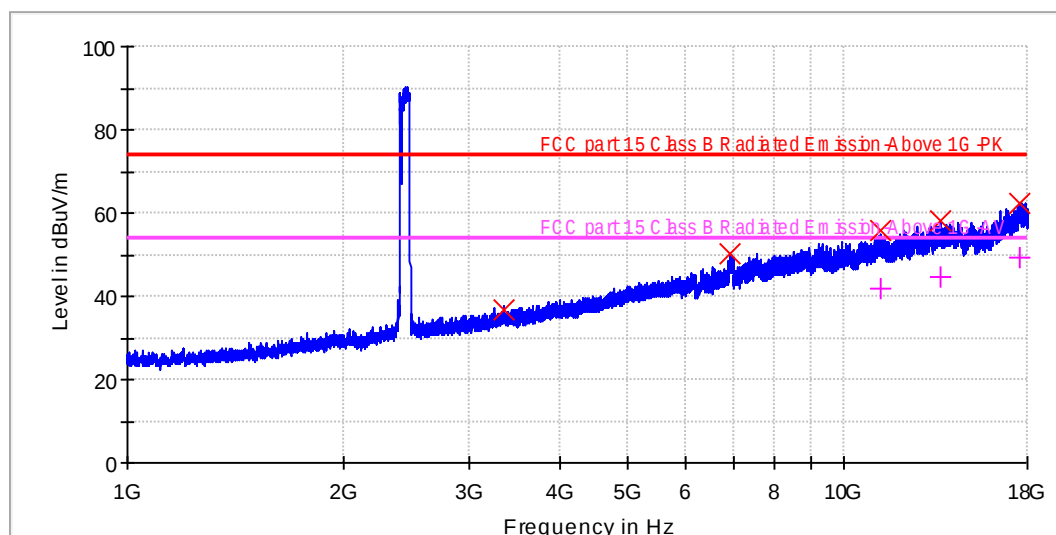

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
3353.500000	36.8	---	1000.0	150.0	V	51.0	-5.4	37.2	74.0	---	---
6927.500000	50.4	---	1000.0	150.0	V	211.0	7.2	23.6	74.0	---	---
11234.000000	55.7	41.9	1000.0	150.0	V	156.0	13.9	18.3	74.0	12.2	54.0
13578.500000	58.0	44.5	1000.0	150.0	V	173.0	17.1	16.0	74.0	9.5	54.0
17517.500000	62.4	49.1	1000.0	150.0	V	231.0	21.8	11.6	74.0	4.9	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n40_2452MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

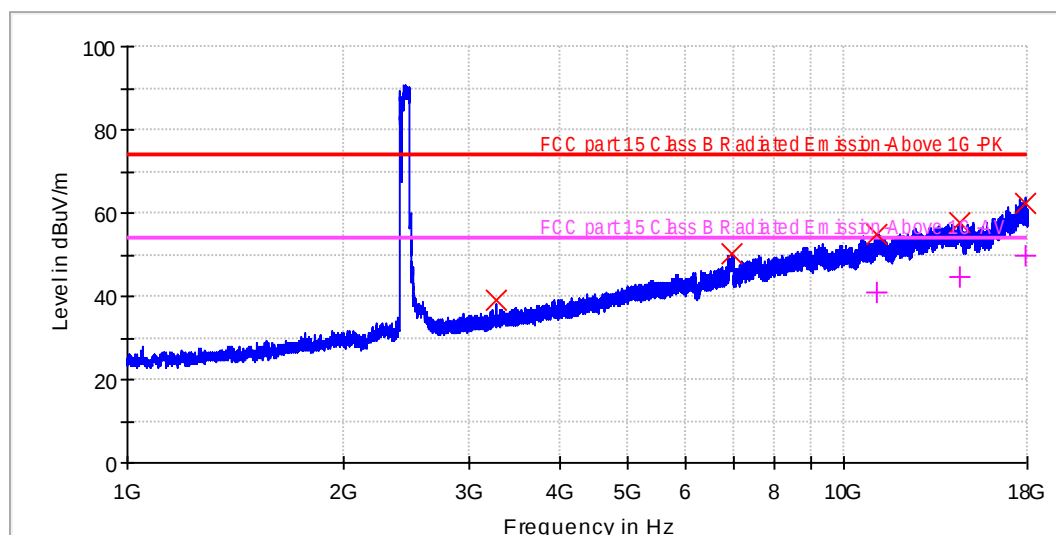

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
3269.500000	38.9	---	1000.0	150.0	H	103.0	-5.6	35.1	74.0	---	---
6956.500000	50.1	---	1000.0	150.0	H	242.0	7.2	23.9	74.0	---	---
11112.000000	54.7	41.2	1000.0	150.0	H	38.0	13.8	19.3	74.0	12.9	54.0
14486.000000	57.6	44.6	1000.0	150.0	H	151.0	16.6	16.4	74.0	9.4	54.0
17856.000000	62.4	49.5	1000.0	150.0	H	143.0	22.1	11.6	74.0	4.5	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n40_2452MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_1-18G Sweep 3m_bonn [EMI radiated]

Hardware Setup: FCC part15C Radiated E Field 1GHz-18GHz_3m_BONN
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
1 GHz - 6.3 GHz	441.667 kHz	PK+	1 MHz	1 s	0 dB
6.3 GHz - 18 GHz	487.5 kHz	PK+	1 MHz	1 s	0 dB

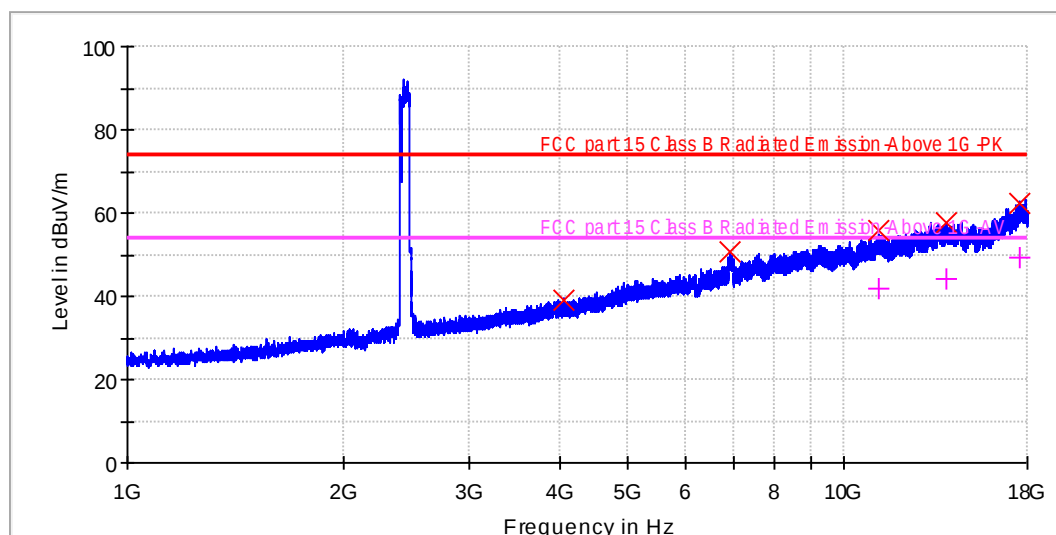

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
4067.000000	38.9	---	1000.0	150.0	V	284.0	-3.4	35.1	74.0	---	---
6922.000000	50.7	---	1000.0	150.0	V	154.0	7.3	23.3	74.0	---	---
11147.000000	56.0	41.7	1000.0	150.0	V	78.0	13.8	18.0	74.0	12.3	54.0
13897.500000	57.8	44.1	1000.0	150.0	V	216.0	17.0	16.2	74.0	9.9	54.0
17574.500000	62.5	49.3	1000.0	150.0	V	188.0	21.9	11.5	74.0	4.7	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n40_2452MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2440-2530 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.43 GHz - 2.53 GHz	20 kHz	PK+	1 MHz	1 s	20 dB

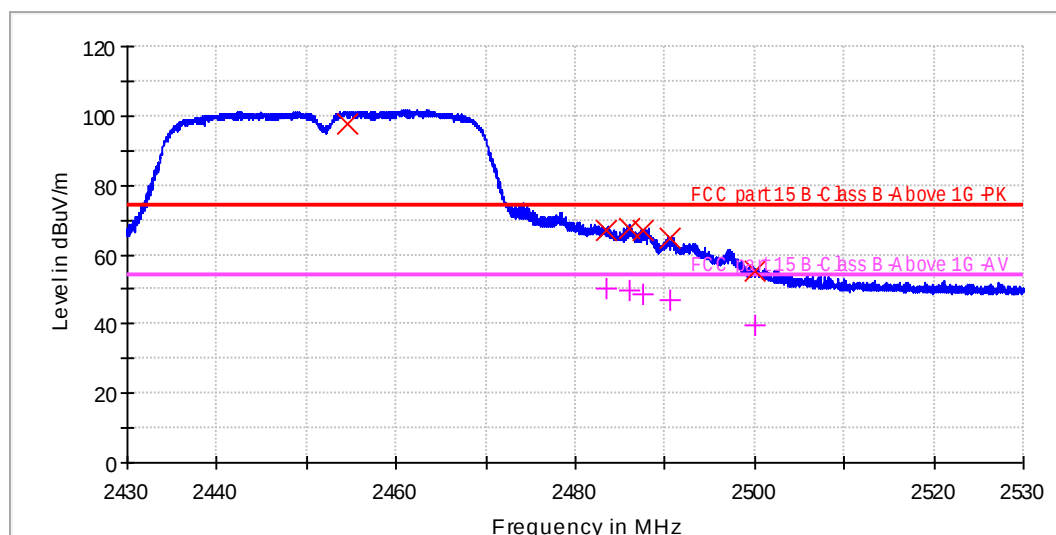

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2454.500000	97.9	---	1000.0	150.0	H	120.0	34.8			---	---
2483.500000	66.9	50.2	1000.0	150.0	H	213.0	34.8	7.1	74.0	3.8	54.0
2486.000000	67.7	49.6	1000.0	150.0	H	85.0	34.8	6.3	74.0	4.4	54.0
2487.500000	66.8	48.5	1000.0	150.0	H	178.0	34.8	7.2	74.0	5.5	54.0
2490.500000	64.8	47.0	1000.0	150.0	H	277.0	34.8	9.2	74.0	7.0	54.0
2500.000000	55.0	39.5	1000.0	150.0	H	147.0	34.8	19.0	74.0	14.5	54.0


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n40_2452MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Vertical
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_Band edge-2440-2530 Sweep 3m_without PA [EMI radiated]

Hardware Setup: 1-18G_3m_without PA
Receiver: [ESR 7]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
2.43 GHz - 2.53 GHz	20 kHz	PK+	1 MHz	1 s	20 dB

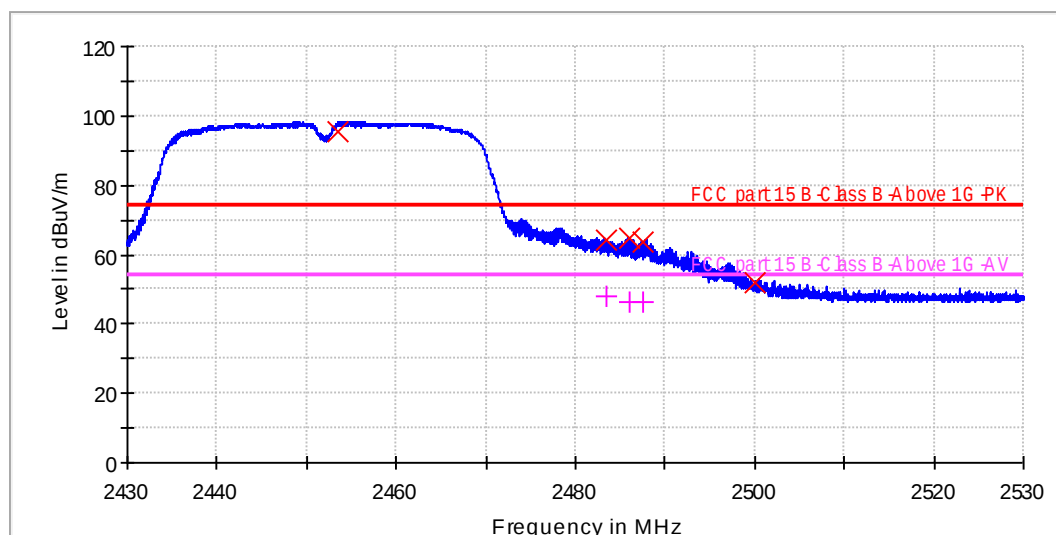

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
2453.500000	95.6	---	1000.0	150.0	V	132.0	34.7			---	---
2483.500000	64.0	48.3	1000.0	150.0	V	289.0	34.8	10.0	74.0	5.8	54.0
2486.000000	64.8	46.4	1000.0	150.0	V	205.0	34.8	9.2	74.0	7.6	54.0
2487.500000	63.8	46.2	1000.0	150.0	V	254.0	34.8	10.2	74.0	7.8	54.0
2500.000000	51.8	---	1000.0	150.0	V	142.0	34.8	22.3	74.0	---	---

worst case listed as below:18GHz-25GHz

18-25G Radiated Emission Test


Common Information

EUT: Robotic Pool Skimmer
Model: PNUJ4110
Client: Quilo
Operating Conditions: Power on, transmitting at 802.11n_2412MHz
Operator Name: Xu Zheng
Input: Powered by Battery, DC 14.4V
Test Standard: FCC Part 15.209(a)
Comment: Horizontal
Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_18-25G_Sweep_3m [EMI radiated]

Hardware Setup: 18-40GHz_3m
Receiver: [FSV 40]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
18 GHz - 25 GHz	500 kHz	PK+	1 MHz	1 s	0 dB

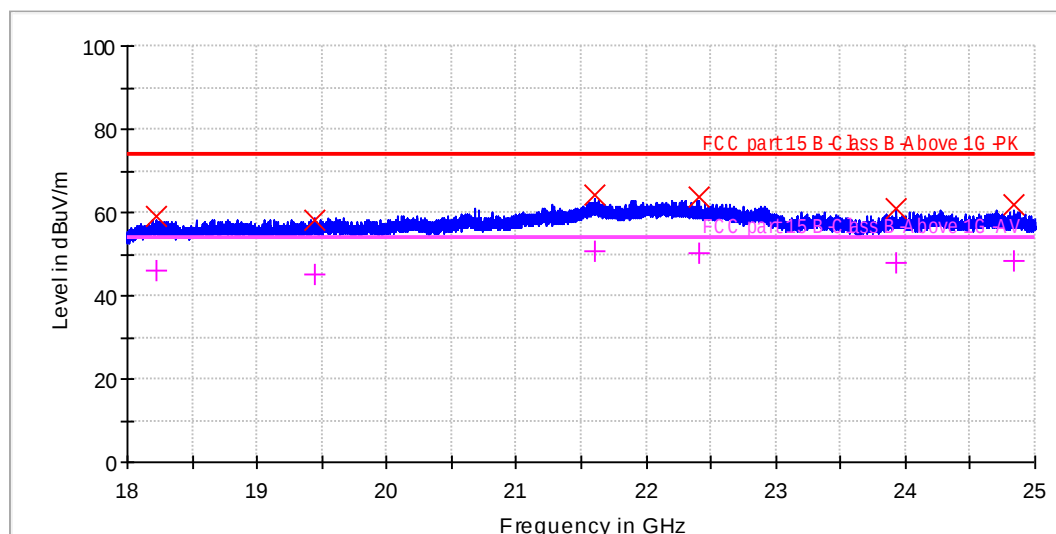

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
18227.000000	59.2	46.0	1000.0	150.0	H	208.0	13.6	14.8	74.0	8.0	54.0
19450.000000	58.1	45.0	1000.0	150.0	H	78.0	14.5	15.9	74.0	9.0	54.0
21599.500000	64.1	50.9	1000.0	150.0	H	149.0	17.6	9.9	74.0	3.1	54.0
22413.500000	63.8	50.0	1000.0	150.0	H	202.0	17.9	10.2	74.0	4.0	54.0
23927.500000	61.2	48.1	1000.0	150.0	H	165.0	15.9	12.8	74.0	5.9	54.0
24842.500000	62.0	48.3	1000.0	150.0	H	228.0	16.1	12.0	74.0	5.7	54.0


Common Information

EUT: Robotic Pool Skimmer
 Model: PNUJ4110
 Client: Quilo
 Operating Conditions: Power on, transmitting at 802.11n_2412MHz
 Operator Name: Xu Zheng
 Input: Powered by Battery, DC 14.4V
 Test Standard: FCC Part 15.209(a)
 Comment: Vertical
 Comment: Temp.:20.7°C,Humi.:49.1%,Atm.:1014.9hPa

Sweep Setup: FCC_RE_18-25G_Sweep_3m [EMI radiated]

Hardware Setup: 18-40GHz_3m
 Receiver: [FSV 40]
 Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
18 GHz - 25 GHz	500 kHz	PK+	1 MHz	1 s	0 dB

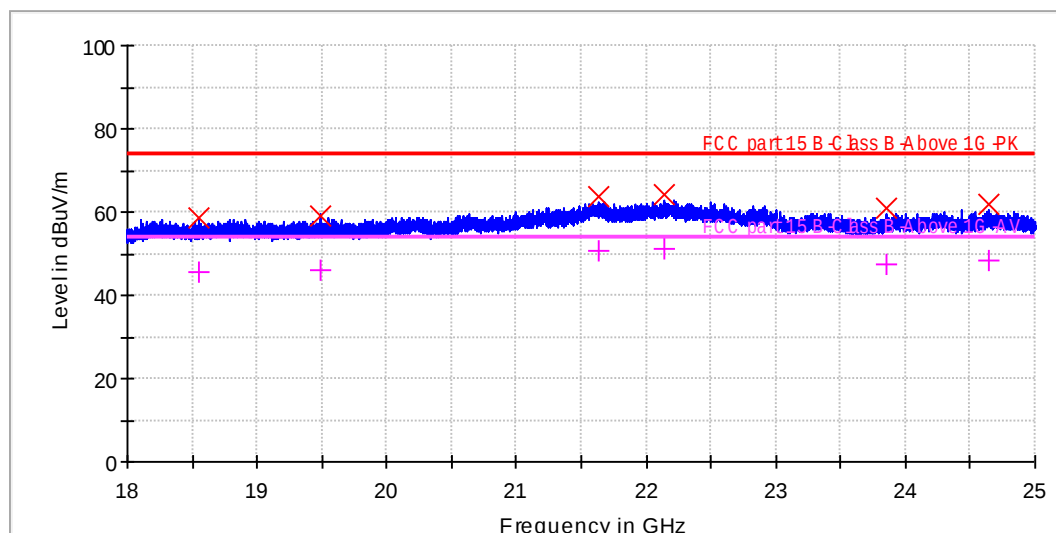

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV/m)	AVG (dBuV/m)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
18553.500000	58.7	45.6	1000.0	150.0	V	134.0	14.1	15.3	74.0	8.4	54.0
19489.000000	59.1	46.2	1000.0	150.0	V	270.0	14.5	14.9	74.0	7.9	54.0
21632.500000	63.6	50.8	1000.0	150.0	V	156.0	17.7	10.4	74.0	3.2	54.0
22133.000000	64.4	51.1	1000.0	150.0	V	68.0	18.1	9.6	74.0	2.9	54.0
23859.500000	60.8	47.6	1000.0	150.0	V	273.0	15.9	13.2	74.0	6.4	54.0
24639.500000	61.7	48.6	1000.0	150.0	V	210.0	16.2	12.3	74.0	5.4	54.0

10 Test Equipment List

List of Test Instruments
Test Site1

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE	CAL. DUE DATE
C	Signal Analyzer	Rohde & Schwarz	FSV40	487/641405	2024-04-08	2025-04-07
	Power Probe	Rohde & Schwarz	NRP-Z81	487/431819	2024-11-23	2025-11-22
	COAXIAL FIXED ATTENUATOR	HUBER+SUHNER	6610SMA-50-2-10dB/6GHz/2W	487/412511	Applicable	Applicable
	RF Test System	Rohde & Schwarz	TS8997	487/391835	2024-11-23	2025-11-22
RE	EMI Test Receiver	Rohde & Schwarz	ESR7	487/632315	2024-04-08	2025-04-07
	EMI Test Receiver	Rohde & Schwarz	ESR7	487/632316	2024-04-08	2025-04-07
	Spectrum analyzer	Rohde & Schwarz	FSV3044	487/642307	2024-04-08	2025-04-07
	Broadband Test Antenna	Schwarzbeck	VULB 9168	487/622345	2024-03-15	2025-03-14
	Horn Antenna	Rohde & Schwarz	3115PB	487/622346	2025-01-08	2026-01-08
	Pre-amplifier	Rohde & Schwarz	SCU-18D	487/402318	2024-04-08	2025-04-07
	Pre-amplifier	Rohde & Schwarz	BLMA0118-1M	487/401411	2024-04-08	2025-04-07
	Loop antenna	Rohde & Schwarz	HFH2-Z2	487/621128	2024-11-23	2025-11-22
	DOUBLE-RIDGED WAVEGUIDE HORN WITH PRE-AMPLIFIER (18 GHZ - 40 GHZ)	ETS-Lindgren	3116C-PA	487/622347	2024-08-19	2025-08-18
	3m Semi-anechoic chamber	TDK	9.2mx6.2mx6.2m	487/772307	2023-02-24	2026-02-23
	3m Fully anechoic chamber	TDK	9.2mx6.2mx6.2m	487/772304	2023-03-30	2026-03-29
CE	EMI Test Receiver	Rohde & Schwarz	ESW8	487/631911	2024-04-08	2025-04-07
	LISN	Rohde & Schwarz	NSLK8127	487/601428	2024-09-02	2025-09-01

Measurement Software Information			
Test Item	Software	Manufacturer	Version
C	MTS 8310	MAXWELL	2.0.0.0
C	Power Viewer	Rohde & Schwarz	V11.3 3.2.2020 Build:7338 Rev: 3230
RE	EMC 32	Rohde & Schwarz	V10.50.40
CE	EMC 32	Rohde & Schwarz	V9.15.03

C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth and 99% Occupied Bandwidth
- Power spectral density*
- Spurious RF conducted emissions
- Band edge

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Items	Extended Uncertainty
Conducted Disturbance at Mains Terminals	150kHz to 30MHz, LISN, 3.07dB
Radiated Disturbance	9kHz to 30MHz, 2.83dB 30MHz to 1GHz, 4.12dB (Horizontal) 4.30dB (Vertical) 1GHz to 18GHz, 5.04dB 18GHz to 40GHz, 5.42dB
RF Conducted Measurement	Power related: 1.32dB Frequency related: 5.6×10^{-6} or 1%

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3.



12 Photographs of Test Set-ups

Refer to the < Test Setup photos >.

13 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

-----End of Test Report-----