

TEST REPORT

Applicant Name : McWong Lighting (Zhanjiang) Co., Ltd.
Address : No.32 Chuangye Road, Longtou Town, Potou District,
Zhanjiang, Guangdong 524054, China
Report Number: 2504R39298E-RF-00B
FCC ID: 2BOE8-MTMWIFI-1

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Wi-Fi Low Voltage Landscape Transformer
Model No.: MTM0300-15-WIFI-1-SS, MTM0150-15-WIFI-1-SS
Trade Mark: ***Brilliantool***
Date Received: 2025-03-25
Date of Test: 2025-04-19 to 2025-05-30
Report Date: 2025-05-30

Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:

Roger Ling

Roger Ling
EMC Engineer

Approved By:

Bob Liao

Bob Liao
EMC Engineer

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
TEST FACILITY	6
MEASUREMENT UNCERTAINTY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION.....	7
EUT EXERCISE SOFTWARE AND POWER LEVEL [#]	7
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS.....	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §15.203-ANTENNA REQUIREMENT	13
APPLICABLE STANDARD.....	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD.....	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
CALCULATION	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	20
APPLICABLE STANDARD.....	20
EUT SETUP.....	20
EMI TEST RECEIVER& SPECTRUM ANALYZER SETUP	22
TEST PROCEDURE	22
CALCULATION	23
TEST DATA	23
FCC §15.247(a) (2)-6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH	99
APPLICABLE STANDARD.....	99
TEST PROCEDURE	99
TEST DATA	99
FCC §15.247(b) (3)-MAXIMUM CONDUCTED OUTPUT POWER.....	100
APPLICABLE STANDARD.....	100
TEST PROCEDURE	100
TEST DATA	100
FCC §15.247(d)-100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	101
APPLICABLE STANDARD.....	101
TEST PROCEDURE	101
TEST DATA	101

FCC §15.247(e)-POWER SPECTRAL DENSITY 102
 APPLICABLE STANDARD..... 102
 TEST PROCEDURE 102
 TEST DATA 103
APPENDIX (RF TEST RESULTS) 104
 6dB EMISSION BANDWIDTH 104
 99% OCCUPIED BANDWIDTH 108
 MAXIMUM CONDUCTED OUTPUT POWER 112
 POWER SPECTRAL DENSITY 114
 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 118
 DUTY CYCLE..... 121
EXHIBIT A - EUT PHOTOGRAPHS 125
EXHIBIT B - TEST SETUP PHOTOGRAPHS 126

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2504R39298E-RF-00B	Original Report	2025-05-30

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Wi-Fi Low Voltage Landscape Transformer
Tested Model	MTM0300-15-WIFI-1-SS
Multiple Model	MTM0150-15-WIFI-1-SS
Model Difference [#]	The differences between the two models: model name, size, power board and only use the maximum power of the lamp load. Please refer to DOS letter for details. The applicant provided "MTM0300-15-WIFI-1-SS" for full testing.
Frequency Range	2.4G Wi-Fi: 2412-2462 MHz, 2422-2452 MHz
Mode	802.11b/g/n20/n40
Maximum Conducted Output Power(Peak)	20.39dBm
Modulation Technique	DSSS, OFDM
Antenna Specification [#]	External Antenna: 1.15dBi (It is provided by the applicant.)
Voltage Range [#]	AC 120V, 60Hz
Sample Serial Number	MTM0300-15-WIFI-1-SS: 30DA-1(CE&RE), 30SS-1 (RF Conducted Test) MTM0150-15-WIFI-1-SS: 30DA-3 (CE&RE) (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA).The Certificate Number is 4297.01.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.064×10^{-7}
RF output power, conducted		0.3 dB
Unwanted Emission, conducted		1.2 dB
AC Power Lines Conducted Emissions		2.7 dB
Emissions, Radiated	9kHz - 30MHz	2.1 dB
	30MHz - 1GHz	4.3 dB
	1GHz - 18GHz	4.9 dB
	18GHz - 26.5GHz	5.2 dB
Temperature		1℃
Humidity		7%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

For 2.4G Wi-Fi, total 11 channels are provided to testing:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

802.11b, 802.11g, 802.11n20 mode was tested with Channel 1, 6 and 11.

802.11n40 mode was tested with Channel 3, 6 and 9.

EUT Exercise Software and Power Level[#]

The system was configured for testing in an engineering mode, which was provided by manufacturer.

Exercise Software:		Wifi Test Tool		
Mode	Data Rate	Power Level		
		Low Channel	Middle Channel	High Channel
802.11 b	1Mbps	25	25	25
802.11 g	6Mbps	65	65	65
802.11 n20	MCS0	70	70	70
802.11 n40	MCS0	60	60	60

Note 1: The information in the above table is provided by the applicant.

Note 2: The worse-case data rates are determined to be as above for each mode based upon investigations by measuring the output power and PSD across all data rates, bandwidths and modulations.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Shanghai Qiujiing Electric Appliance Factory	Load 1	BX-70	ATCSN-26
Shanghai Qiujiing Electric Appliance Factory	Load 2	BX-70	ATCSN-198

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
AC Cable	No	1.8	EUT	AC Mains
Power cord	No	1.0	EUT	Load 1
Power cord	No	1.0	EUT	Load 2
Power cord	No	1.0	EUT	Load 1
Power cord	No	1.0	EUT	Load 2

Block Diagram of Test Setup


For Conducted Emission:

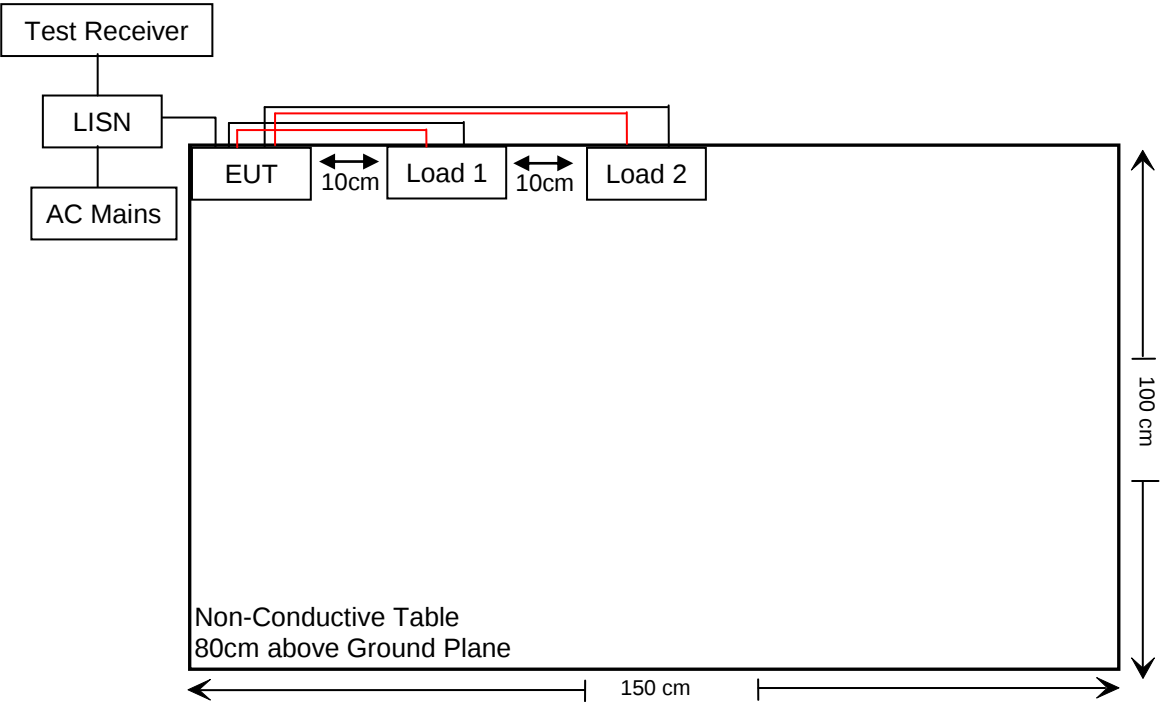

For Radiated Emission Below 1GHz:

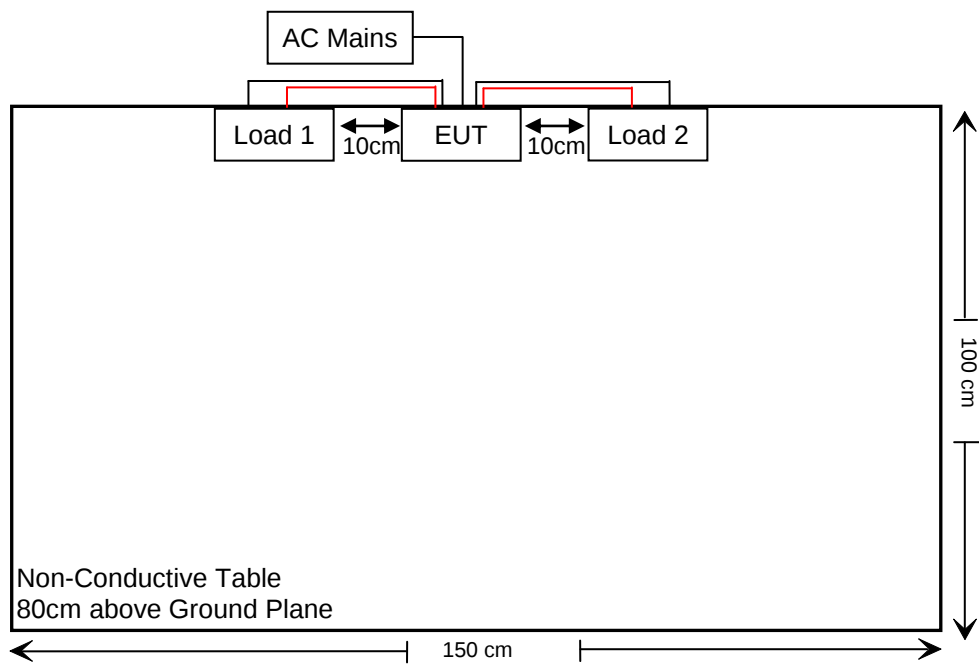

For Radiated Emission Above 1GHz:

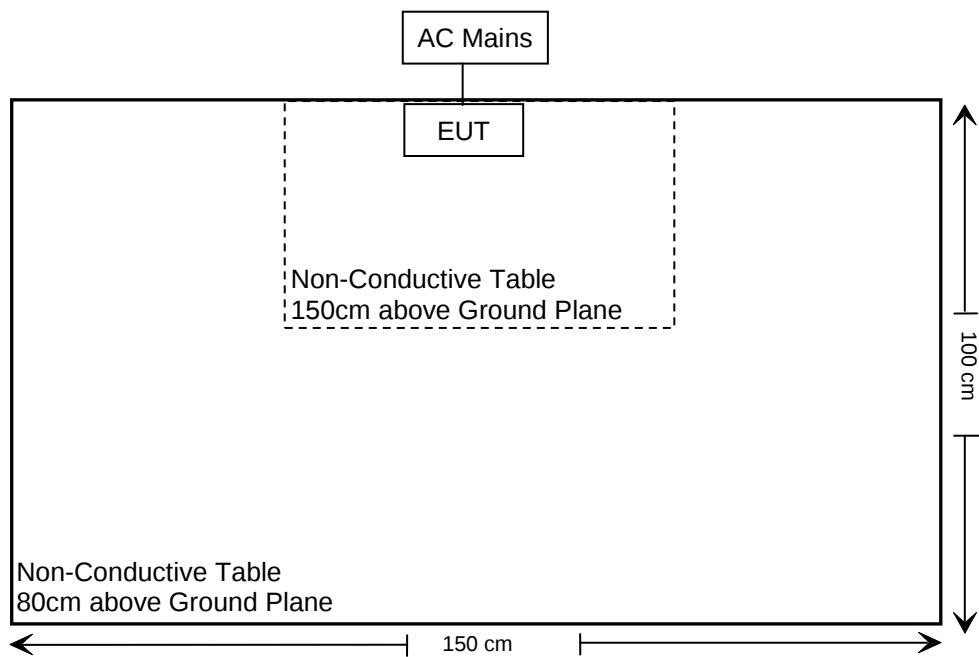

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

- Note 1: For AC line conducted emissions, the maximum output power mode and channel was tested.
- Note 2: For Radiated Spurious Emissions 9kHz~1GHz/18GHz~25GHz, the maximum output power mode and channel was tested.
- Note 3: For Radiated Spurious Emissions, after pre-scan in the X, Y and Z axes of orientation, the worst case as setup photos was recorded.
- Note 4: The cable loss is 0.5 dB, which was added into the all RF test results.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2024/11/08	2025/11/07
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2024/11/08	2025/11/07
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2024/10/08	2025/10/07
Rohde & Schwarz	Pulse Limiter	ESH3-Z2	100312	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.17	N0350	2024/10/08	2025/10/07
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Below 1GHz)					
Rohde & Schwarz	Test Receiver	ESR	102725	2024/11/08	2025/11/07
SONOMA INSTRUMENT	Amplifier	310N	186131	2024/05/24	2025/05/23
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2024/08/08	2027/08/07
Unknown	RF Coaxial Cable	No.12	N040	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.13	N300	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.14	N800	2024/10/08	2025/10/07
BACL	LOOP ANTENNA	1313-1A	3110711	2024/01/16	2027/01/15
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Above 1GHz)					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2024/10/08	2025/10/07
Decentest	Filter Switch Unit	DT7220FSU	DQ77927	2024/10/08	2025/10/07
Decentest	Multiplex Switch Test Control Set	DT7220CSU	DQ77924	2024/10/08	2025/10/07
A.H. Systems, inc.	Preamplifier	PAM-0118	226	2024/05/24	2025/05/23
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Unknown	RF Coaxial Cable	No.10	N050	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.11	N1000	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.19	N500	2024/10/08	2025/10/07
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2023/12/12	2026/12/11
BACL	Amplifier	BACL-1313-A1840	4012521	2024/07/05	2025/07/04
Unknown	RF Coaxial Cable	No.15	N600	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.16	N650	2024/10/08	2025/10/07
Test Software: e3 191218 (V9)					

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101948	2024/10/08	2025/10/07
Anritsu	Microwave Peak Power Sensor	MA24418A	12619	2024/05/24	2025/05/23
WEINSCHEL	10dB Attenuator	5324	AU 3842	2024/10/08	2025/10/07
Test Software: JDAutoTestSystem V1.0.0					

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203-ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one external antenna arrangement, which used a RP-SMA connector to the EUT, fulfill the requirement of this section. Please refer to the EUT photos.

Frequency Range	Antenna gain
2412-2462MHz	1.15dBi


Result: Compliance.

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a).

EUT Setup

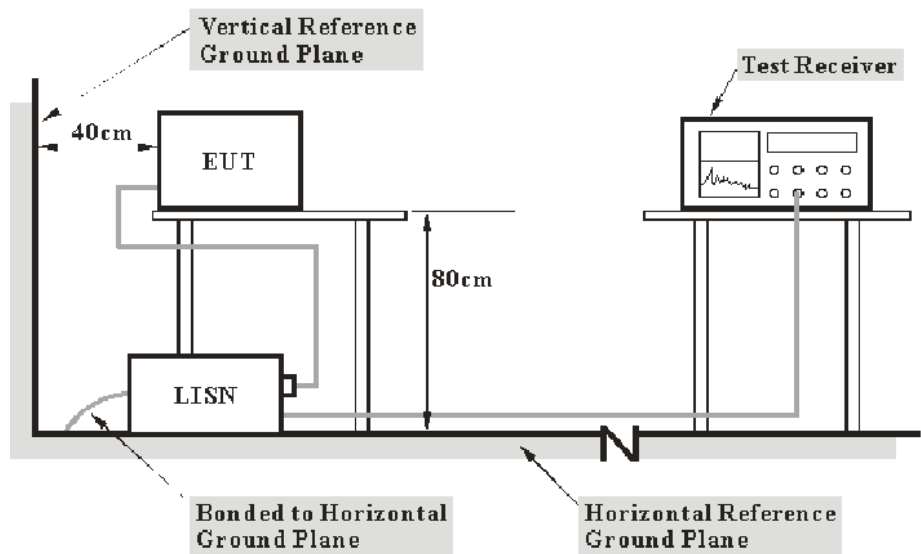

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Calculation

The Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + 10\text{dB Attenuation(Limiter)}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$

Test Data

Environmental Conditions


Temperature:	22.5 °C
Relative Humidity:	55 %
ATM Pressure:	100.2 kPa
Test Engineer:	Jason Fan
Test Date:	2025-05-21
EUT Operation Mode:	2.4G WIFI Transmitting

Test Result: Compliance, please refer to the below data.

Note: The maximum output power mode and channel: 2.4G WIFI 802.11n20 High Channel was tested.

For model MTM0300-15-WIFI-1-SS


AC 120V/60Hz, Line:

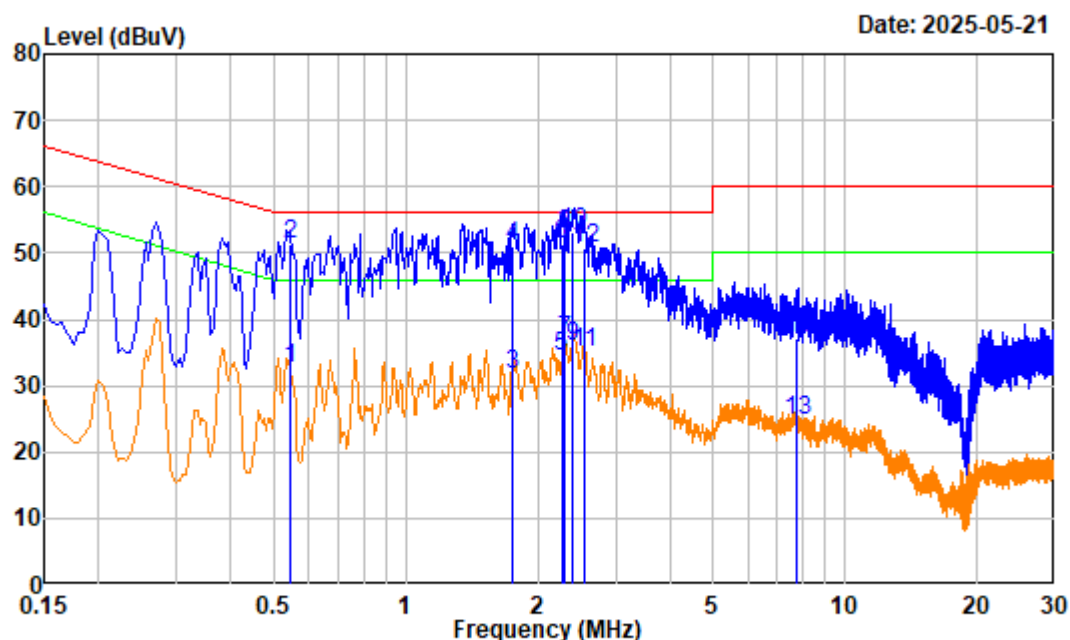

Site : Shielding Room
 Condition: Line
 Job No. : 2504R39298E-RF
 Test Mode: 2.4G WIFI transmitting
 Tester : Jason Fan
 Setting : IF B/W 9kHz PK/AV
 Model : MTM0300-15-WIFI-1-SS

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.543	20.07	12.68	32.75	46.00	-13.25	Average
2	0.543	20.07	31.30	51.37	56.00	-4.63	QP
3	1.755	20.39	11.32	31.71	46.00	-14.29	Average
4	1.755	20.39	30.57	50.96	56.00	-5.04	QP
5	2.260	20.41	14.09	34.50	46.00	-11.50	Average
6	2.260	20.41	31.04	51.45	56.00	-4.55	QP
7	2.295	20.41	16.41	36.82	46.00	-9.18	Average
8	2.295	20.41	32.38	52.79	56.00	-3.21	QP
9	2.395	20.41	15.58	35.99	46.00	-10.01	Average
10	2.395	20.41	32.62	53.03	56.00	-2.97	QP
11	2.546	20.41	14.72	35.13	46.00	-10.87	Average
12	2.546	20.41	30.33	50.74	56.00	-5.26	QP
13	7.721	20.38	4.31	24.69	50.00	-25.31	Average
14	7.721	20.38	16.85	37.23	60.00	-22.77	QP

AC 120V/60Hz, Neutral:

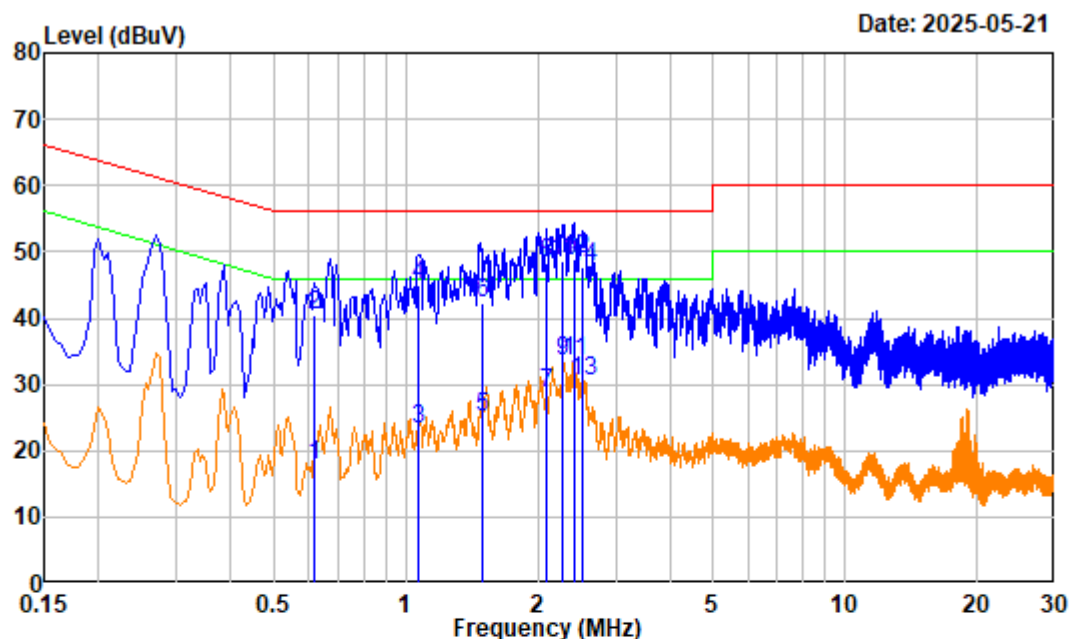


Site : Shielding Room
 Condition: neutral
 Job No. : 2504R39298E-RF
 Test Mode: 2.4G WIFI transmitting
 Tester : Jason Fan
 Setting : IF B/W 9kHz PK/AV
 Model : MTM0300-15-WIFI-1-SS

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.616	20.12	-2.17	17.95	46.00	-28.05	Average
2	0.616	20.12	20.38	40.50	56.00	-15.50	QP
3	1.063	20.39	2.87	23.26	46.00	-22.74	Average
4	1.063	20.39	24.52	44.91	56.00	-11.09	QP
5	1.489	20.30	4.88	25.18	46.00	-20.82	Average
6	1.489	20.30	22.08	42.38	56.00	-13.62	QP
7	2.091	20.21	8.39	28.60	46.00	-17.40	Average
8	2.091	20.21	27.99	48.20	56.00	-7.80	QP
9	2.281	20.21	13.39	33.60	46.00	-12.40	Average
10	2.281	20.21	28.29	48.50	56.00	-7.50	QP
11	2.409	20.21	13.35	33.56	46.00	-12.44	Average
12	2.409	20.21	28.83	49.04	56.00	-6.96	QP
13	2.527	20.21	10.17	30.38	46.00	-15.62	Average
14	2.527	20.21	27.49	47.70	56.00	-8.30	QP

For model MTM0150-15-WIFI-1-SS


AC 120V/60Hz, Line:

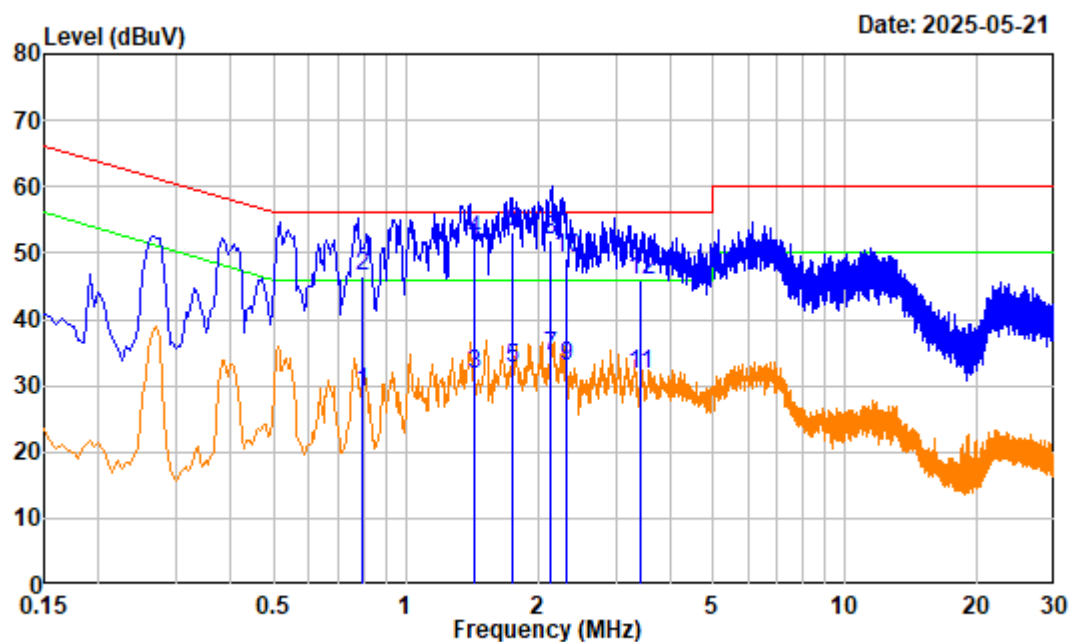

Site : Shielding Room
 Condition: Line
 Job No. : 2504R39298E-RF
 Test Mode: 2.4G WIFI transmitting
 Tester : Jason Fan
 Setting : IF B/W 9kHz PK/AV
 Model : MTM0150-15-WIFI-1-SS

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.798	20.25	8.80	29.05	46.00	-16.95	Average
2	0.798	20.25	26.23	46.48	56.00	-9.52	QP
3	1.425	20.36	11.46	31.82	46.00	-14.18	Average
4	1.425	20.36	31.68	52.04	56.00	-3.96	QP
5	1.748	20.39	12.18	32.57	46.00	-13.43	Average
6	1.748	20.39	32.75	53.14	56.00	-2.86	QP
7	2.129	20.41	13.94	34.35	46.00	-11.65	Average
8	2.129	20.41	31.57	51.98	56.00	-4.02	QP
9	2.312	20.41	12.57	32.98	46.00	-13.02	Average
10	2.312	20.41	28.80	49.21	56.00	-6.79	QP
11	3.423	20.42	11.18	31.60	46.00	-14.40	Average
12	3.423	20.42	25.32	45.74	56.00	-10.26	QP

AC 120V/60Hz, Neutral:

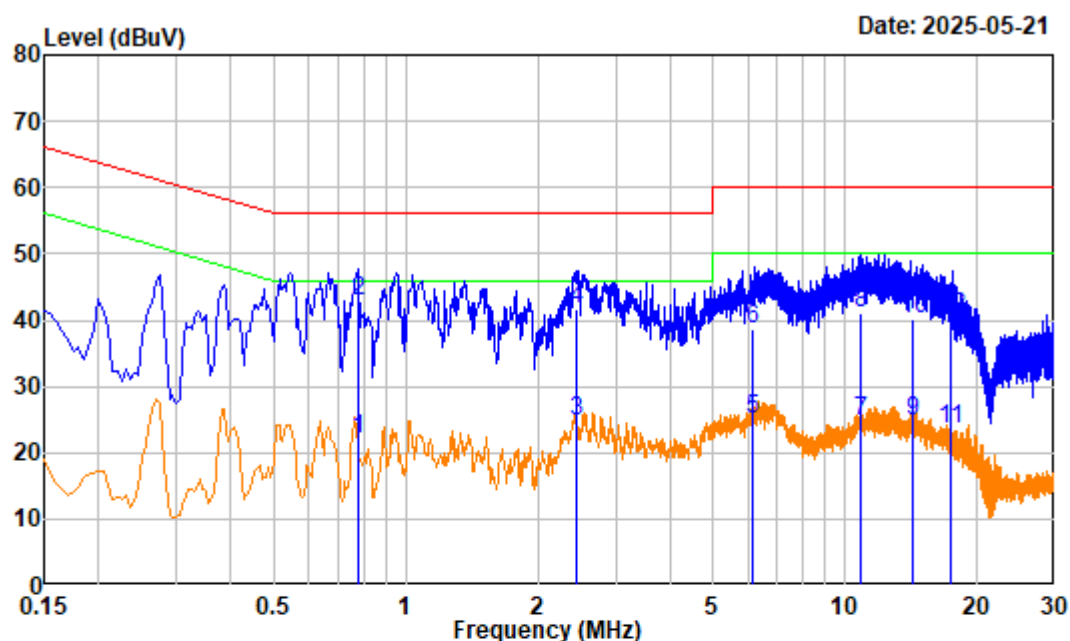

Site : Shielding Room
 Condition: neutral
 Job No. : 2504R39298E-RF
 Test Mode: 2.4G WIFI transmitting
 Tester : Jason Fan
 Setting : IF B/W 9kHz PK/AV
 Model : MTM0150-15-WIFI-1-SS


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.775	20.34	1.62	21.96	46.00	-24.04	Average
2	0.775	20.34	22.65	42.99	56.00	-13.01	QP
3	2.434	20.21	4.59	24.80	46.00	-21.20	Average
4	2.434	20.21	21.38	41.59	56.00	-14.41	QP
5	6.166	20.44	4.56	25.00	50.00	-25.00	Average
6	6.166	20.44	18.16	38.60	60.00	-21.40	QP
7	10.859	20.27	4.40	24.67	50.00	-25.33	Average
8	10.859	20.27	20.84	41.11	60.00	-18.89	QP
9	14.255	20.15	4.48	24.63	50.00	-25.37	Average
10	14.255	20.15	19.98	40.13	60.00	-19.87	QP
11	17.310	20.15	3.40	23.55	50.00	-26.45	Average
12	17.310	20.15	20.31	40.46	60.00	-19.54	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.205; §15.209; §15.247(d)


EUT Setup

9kHz - 30MHz:

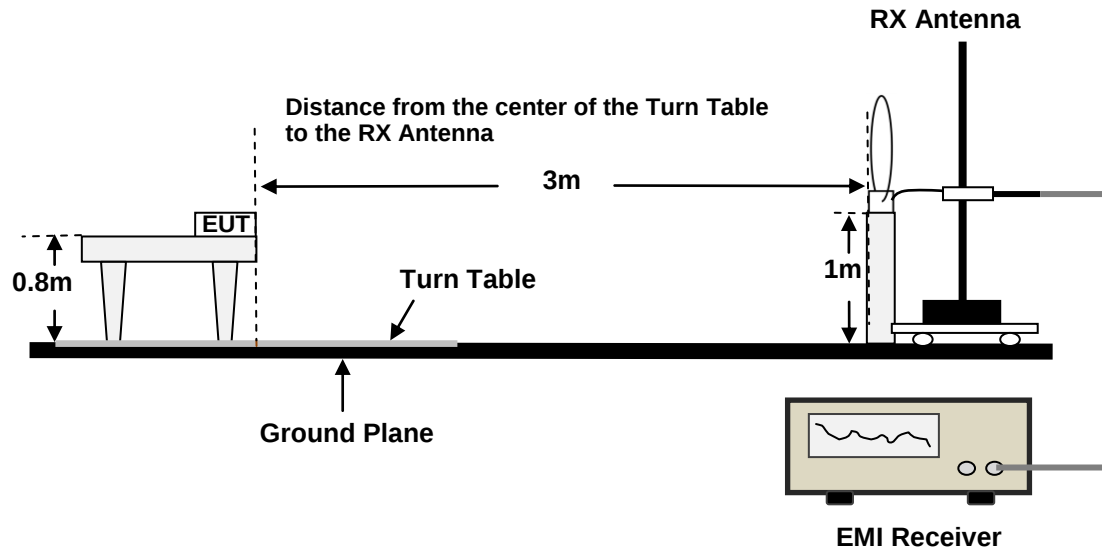

30MHz - 1GHz:

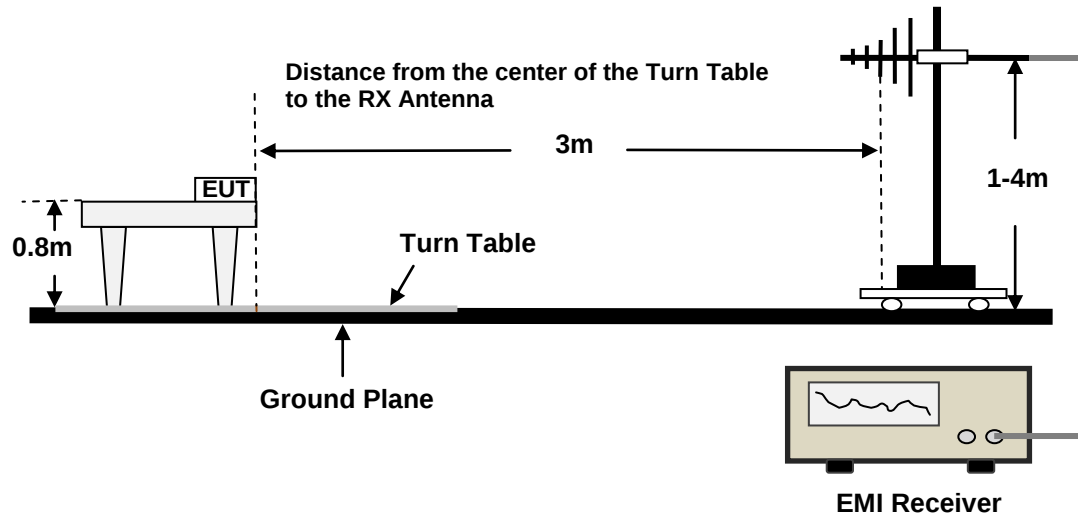

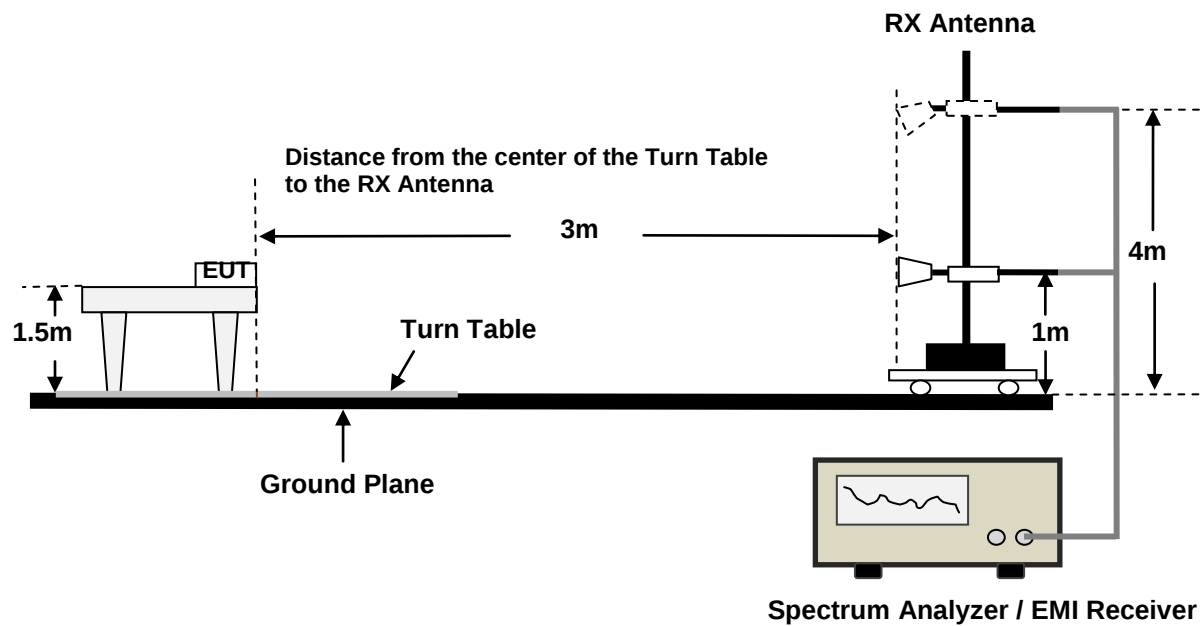Above 1GHz:

Boundary of the EUT, local AE and associated cabling and measurement distance for radiated emissions measurements:

The central point of the arrangement shall be positioned at the centre of the turntable. The measurement distance is the shortest horizontal distance between an imaginary circular periphery just encompassing this arrangement and the calibration point of the antenna. See as below Figure C.1 and C.2.

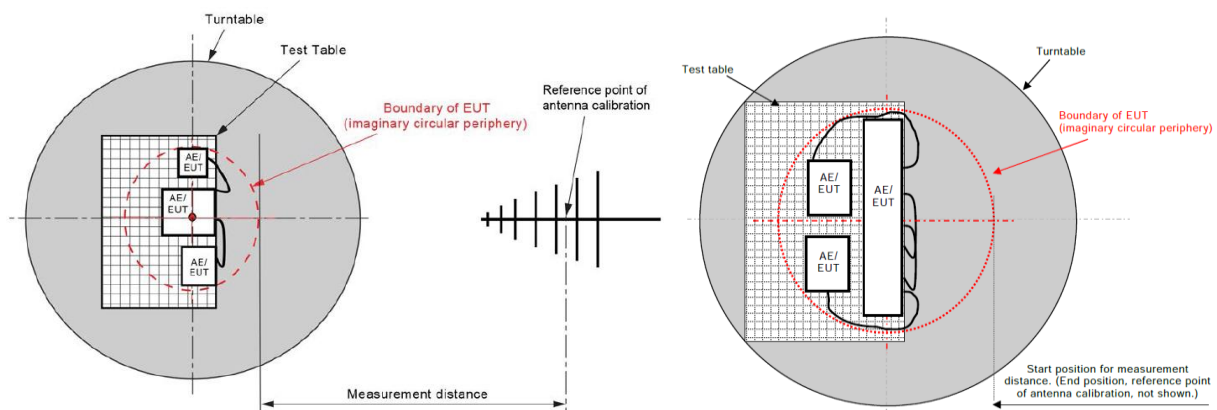


Figure C.1 – Measurement distance Figure C.2 – Boundary of EUT, Local AE and associated cabling

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver& Spectrum Analyzer Setup

The system was investigated from 9kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz -1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9kHz - 150kHz	PK	0.3kHz	1kHz	/	PK
	QP/AV	/	/	200Hz	QP/AV
150kHz - 30MHz	PK	10kHz	30kHz	/	PK
	QP/AV	/	/	9kHz	QP/AV
30MHz - 1000MHz	PK	100kHz	300kHz	/	PK
	QP	/	/	120kHz	QP

1GHz-25GHz:

Pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	Peak	Any	1MHz	3MHz
Ave.	Peak	>98%	1MHz	5kHz
		<98%	1MHz	≥1/T, no less than 5 kHz

Final measurement for emission identified during the pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	Peak	Any	1MHz	3MHz
Ave.	Peak	>98%	1MHz	10Hz
		<98%	1MHz	≥1/T

Note 1: T is minimum transmission duration

Note 2: The 1GHz-4GHz testing use the notch filter and the 4GHz-18GHz testing use high-pass filter.

Note 3: The band edge testing use 10dB attenuator.

Note 4: The filters and attenuators are all integrated within the filter switch unit.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

According to ANSI C63.10-2020,9.2: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance).

$$E_{SpecLimit} = E_{Meas} + 20 \log \left(\frac{D_{Meas}}{D_{SpecLimit}} \right)$$

where

$E_{SpecLimit}$	is the field strength of the emission at the distance specified by the limit, in dBuV/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dBuV/m
D_{Meas}	is the measurement distance, in m
$D_{SpecLimit}$	is the distance specified by the limit, in m

Note 1: If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Note 2: For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

Over Limit/Margin = Level / Corrected Amplitude – Limit
Level / Corrected Amplitude = Read Level + Factor

Test Data

9kHz-1GHz

Environmental Conditions

Temperature:	23.1 °C
Relative Humidity:	54 %
ATM Pressure:	101.3 kPa
Test Engineer:	Matt Liang
Test Date:	2025-04-19
EUT Operation Mode:	2.4G WIFI Transmitting


Test Result: Compliance, please refer to the below data.

Note 1: The Loop Antenna were tested in parallel, perpendicular, and ground-parallel. The worst orientation was parallel and the data was recorded in report.

Note 2: The maximum output power mode and channel: 2.4G WIFI 802.11n20 High Channel was tested.


9kHz~30MHz:

For model MTM0300-15-WIFI-1-SS

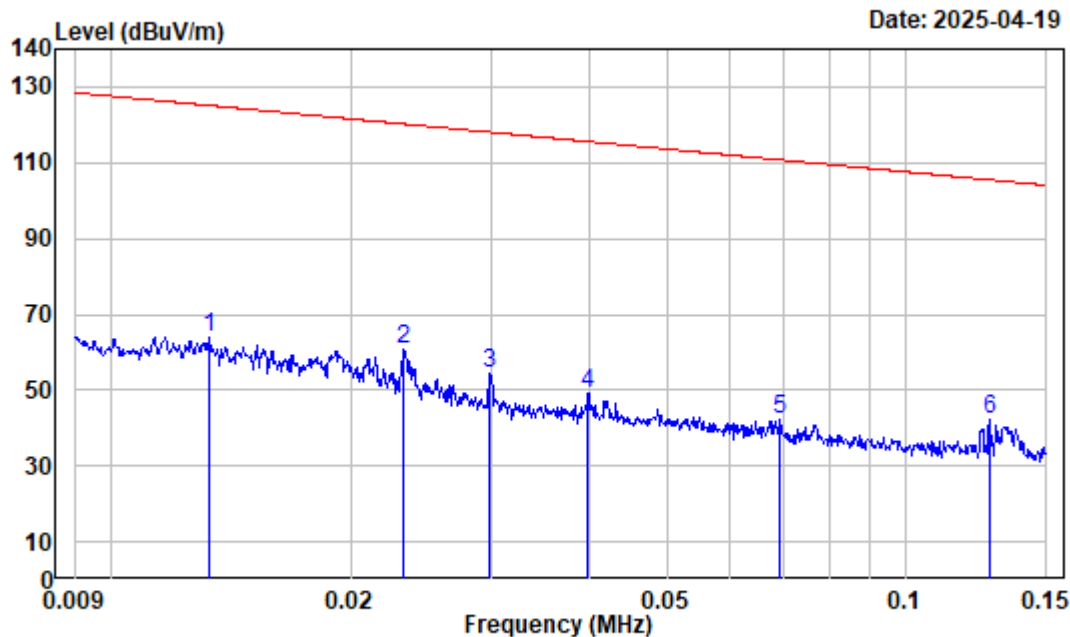

Site : Chamber
Condition : 3m
Project No. : 2504R39298E-RF
Polarization : Parallel Tester: Matt Liang
Test Mode : 2.4G WIFI Transmitting
Modl : MTM0300-15-WIFI-1-SS
Receiver Setting: RBW:300Hz VBW:1kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.013	34.36	29.79	64.15	125.12	-60.97	Peak
2	0.023	29.90	30.85	60.75	120.24	-59.49	Peak
3	0.030	26.98	27.29	54.27	118.09	-63.82	Peak
4	0.040	24.94	24.20	49.14	115.62	-66.48	Peak
5	0.069	20.06	22.22	42.28	110.78	-68.50	Peak
6	0.127	15.21	27.29	42.50	105.52	-63.02	Peak

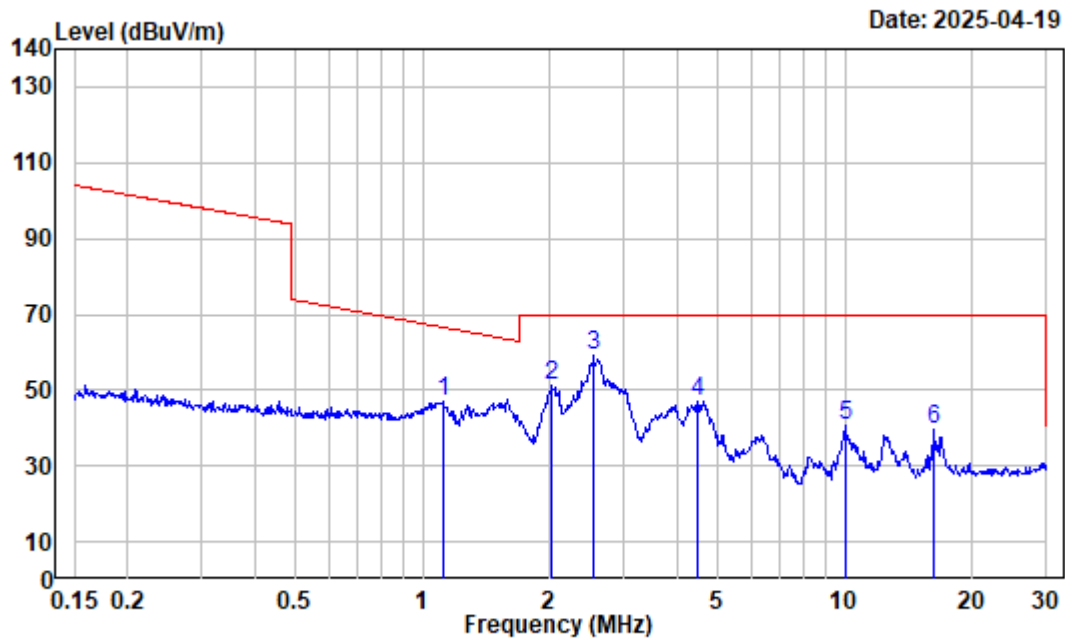

Site : Chamber
Condition : 3m
Project No. : 2504R39298E-RF
Polarization : Parallel Tester: Matt Liang
Test Mode : 2.4G WIFI Transmitting
Modl : MTM0300-15-WIFI-1-SS
Receiver Setting: RBW:10kHz VBW:30kHz


	Freq	Factor	Read Level	Level	Limit	Over	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m		dB	
1	1.117	-2.28	49.04	46.76	66.49	-19.73	Peak	
2	2.023	-5.43	56.49	51.06	69.54	-18.48	Peak	
3	2.540	-5.67	64.63	58.96	69.54	-10.58	Peak	
4	4.501	-6.30	53.39	47.09	69.54	-22.45	Peak	
5	10.019	-5.42	46.07	40.65	69.54	-28.89	Peak	
6	16.226	-3.90	43.49	39.59	69.54	-29.95	Peak	

For model MTM0150-15-WIFI-1-SS

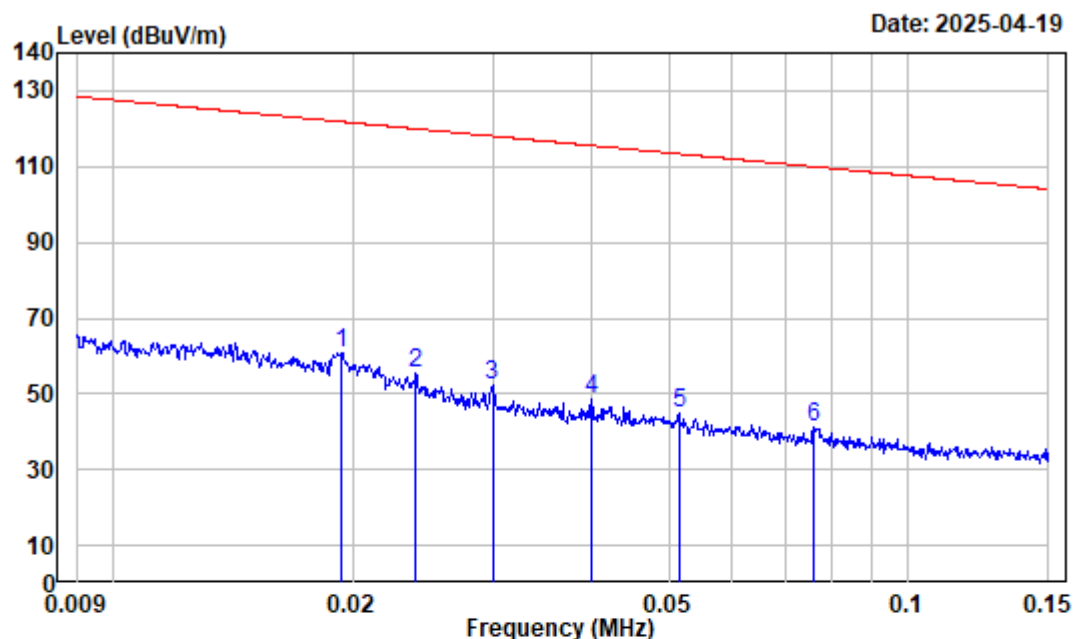

Site : Chamber
 Condition : 3m
 Project No. : 2504R39298E-RF
 Polarization : Parallel Tester: Matt Liang
 Test Mode : 2.4G WIFI Transmitting
 Modl : MTM0150-15-WIFI-1-SS
 Receiver Setting: RBW:300Hz VBW:1kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.019	31.65	29.28	60.93	121.85	-60.92	Peak
2	0.024	29.60	25.64	55.24	119.99	-64.75	Peak
3	0.030	26.94	25.29	52.23	118.06	-65.83	Peak
4	0.040	24.92	23.45	48.37	115.59	-67.22	Peak
5	0.051	22.63	22.30	44.93	113.37	-68.44	Peak
6	0.076	19.13	22.18	41.31	110.00	-68.69	Peak

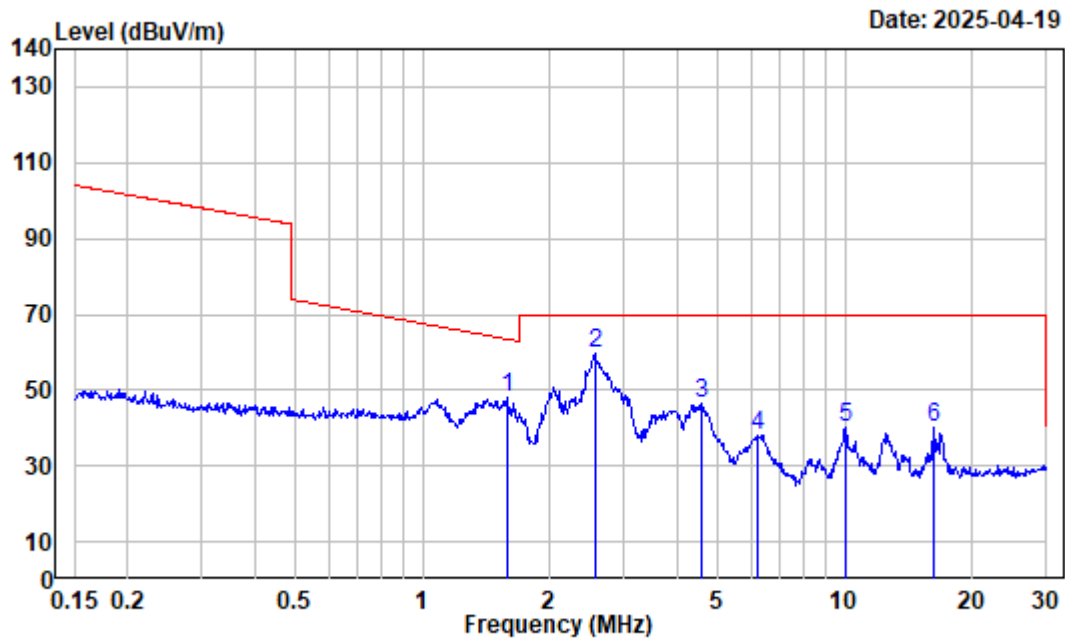


Site : Chamber
Condition : 3m
Project No. : 2504R39298E-RF
Polarization : Parallel Tester: Matt Liang
Test Mode : 2.4G WIFI Transmitting
Modl : MTM0150-15-WIFI-1-SS
Receiver Setting: RBW:10kHz VBW:30kHz

	Freq Factor		Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1.585	-3.95	51.79	47.84	63.39	-15.55	Peak
2	2.567	-5.68	65.13	59.45	69.54	-10.09	Peak
3	4.598	-6.30	52.72	46.42	69.54	-23.12	Peak
4	6.219	-6.20	44.49	38.29	69.54	-31.25	Peak
5	10.019	-5.42	45.56	40.14	69.54	-29.40	Peak
6	16.226	-3.90	43.83	39.93	69.54	-29.61	Peak


30MHz~1GHz:

For MTM0300-15-WIFI-1-SS

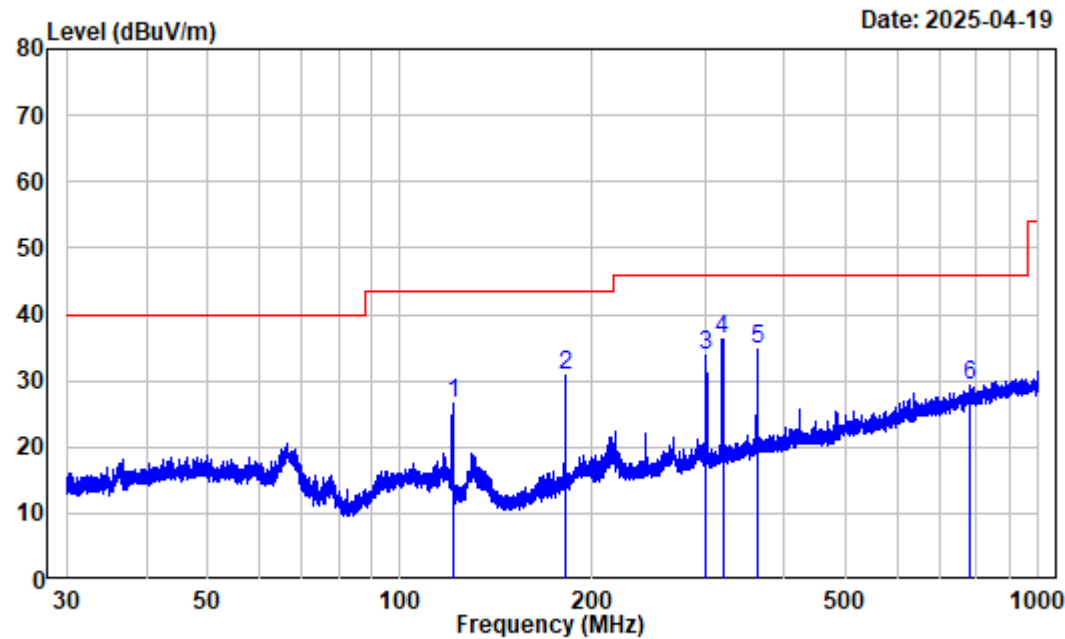

Site : Chamber
Condition : 3m HORIZONTAL
Project No. : 2504R39298E-RF Tester: Matt Liang
Test Mode : 2.4G WIFI Transmitting
Modl : MTM0300-15-WIFI-1-SS
Receiver Setting: RBW:100kHz VBW:300kHz


	Freq Factor		Read	Limit	Over	Remark
	MHz	dB/m	Level	Line	Limit	
			dBuV	dBuV/m	dBuV/m	dB
1	120.964	-14.01	40.67	26.66	43.50	-16.84 Peak
2	181.283	-12.88	43.63	30.75	43.50	-12.75 Peak
3	301.819	-9.64	43.40	33.76	46.00	-12.24 Peak
4	320.077	-9.09	45.21	36.12	46.00	-9.88 Peak
5	362.985	-7.78	42.65	34.87	46.00	-11.13 Peak
6	779.265	-0.44	29.70	29.26	46.00	-16.74 Peak

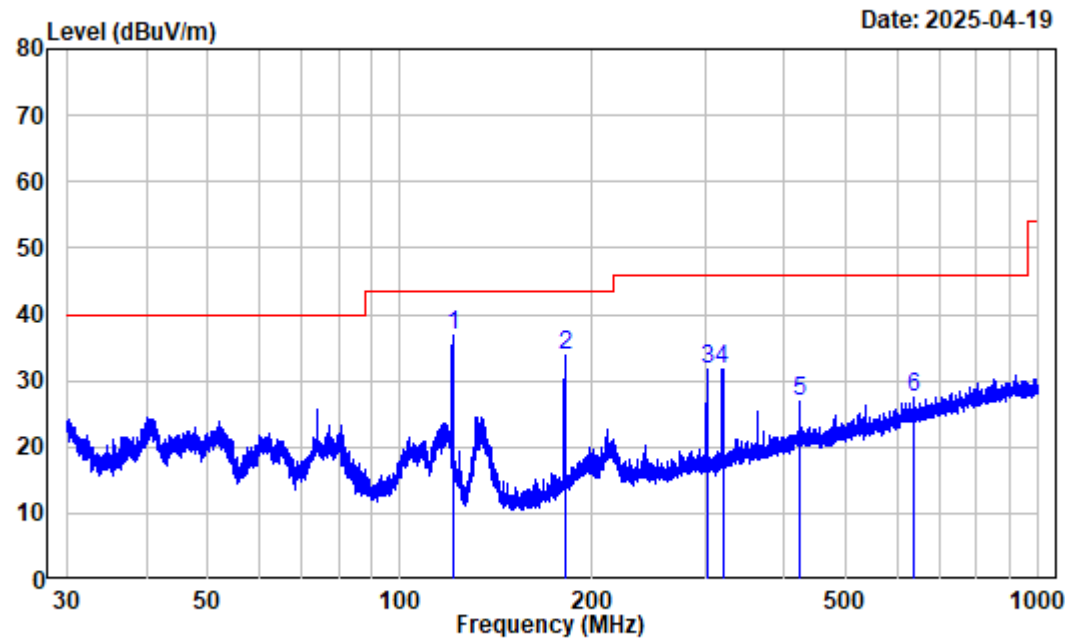

Site : Chamber
Condition : 3m VERTICAL
Project No. : 2504R39298E-RF Tester: Matt Liang
Test Mode : 2.4G WIFI Transmitting
Modl : MTM0300-15-WIFI-1-SS
Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	120.858	-13.99	50.81	36.82	43.50	-6.68	Peak
2	180.966	-12.95	46.80	33.85	43.50	-9.65	Peak
3	302.349	-9.64	41.47	31.83	46.00	-14.17	Peak
4	320.077	-9.09	40.68	31.59	46.00	-14.41	Peak
5	423.540	-5.72	32.48	26.76	46.00	-19.24	Peak
6	640.050	-2.27	29.79	27.52	46.00	-18.48	Peak

For MTM0150-15-WIFI-1-SS

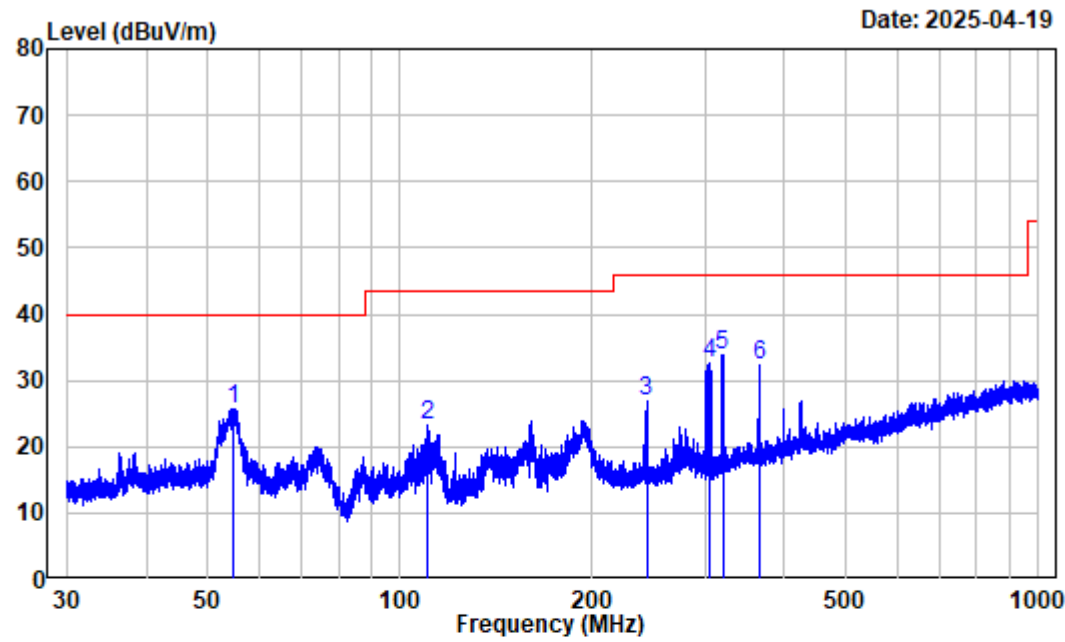

Site : Chamber

Condition : 3m HORIZONTAL


Project No. : 2504R39298E-RF Tester: Matt Liang

Test Mode : 2.4G WIFI Transmitting

Modl : MTM0150-15-WIFI-1-SS

Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	54.763	-11.20	36.99	25.79	40.00	-14.21	Peak
2	110.617	-12.23	35.39	23.16	43.50	-20.34	Peak
3	243.271	-10.62	37.58	26.96	46.00	-19.04	Peak
4	304.343	-9.61	42.19	32.58	46.00	-13.42	Peak
5	320.077	-9.09	42.86	33.77	46.00	-12.23	Peak
6	364.739	-7.76	39.92	32.16	46.00	-13.84	Peak

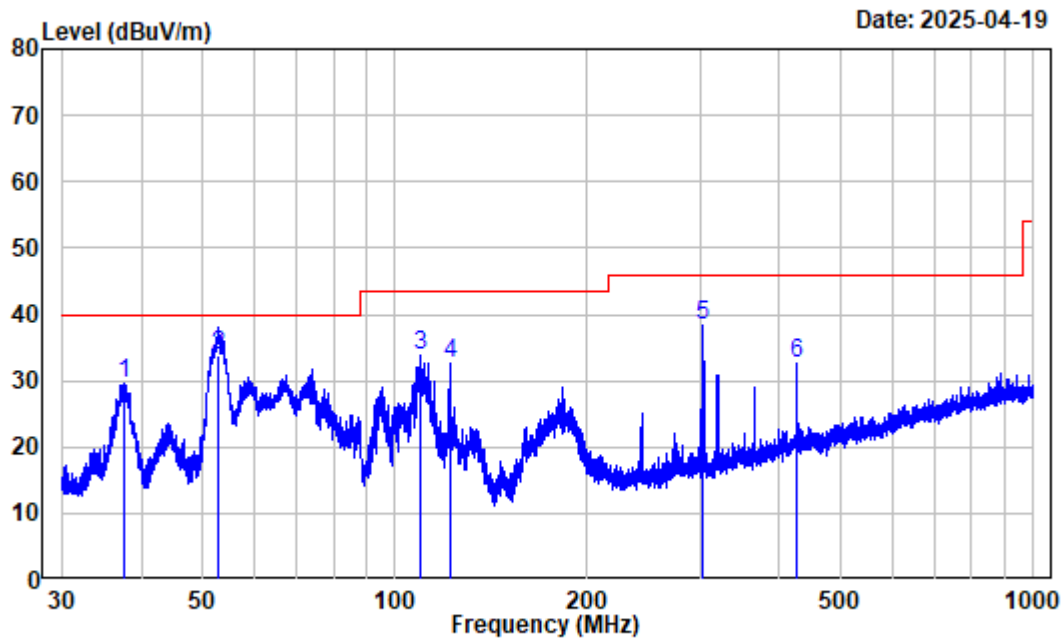

Site : Chamber
Condition : 3m VERTICAL
Project No. : 2504R39298E-RF Tester: Matt Liang
Test Mode : 2.4G WIFI Transmitting
Modl : MTM0150-15-WIFI-1-SS
Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	37.581	-11.68	41.38	29.70	40.00	-10.30	Peak
2	52.783	-10.85	44.80	33.95	40.00	-6.05	QP
3	109.508	-12.02	45.89	33.87	43.50	-9.63	Peak
4	121.655	-14.15	46.85	32.70	43.50	-10.80	Peak
5	304.076	-9.62	47.99	38.37	46.00	-7.63	Peak
6	425.961	-5.65	38.11	32.46	46.00	-13.54	Peak

1GHz-25GHz

Environmental Conditions

Temperature:	23.4 to 24.2 °C
Relative Humidity:	48 to 52 %
ATM Pressure:	100.2 to 101.3 kPa
Test Engineer:	Matt Liang
Test Date:	2025-05-06 to 2025-05-20
EUT Operation Mode:	Transmitting


Test Result: Compliance, please refer to the below data.

Note 1: Choose the model MTM0300-15-WIFI-1-SS for testing.

Note 2: For 1GHz-4GHz, the fundamental with band reject filter.


Note 3: For 18GHz-25GHz, the maximum output power mode and channel: 802.11n20 High Channel was tested.

1GHz~4GHz:
For 802.11b mode

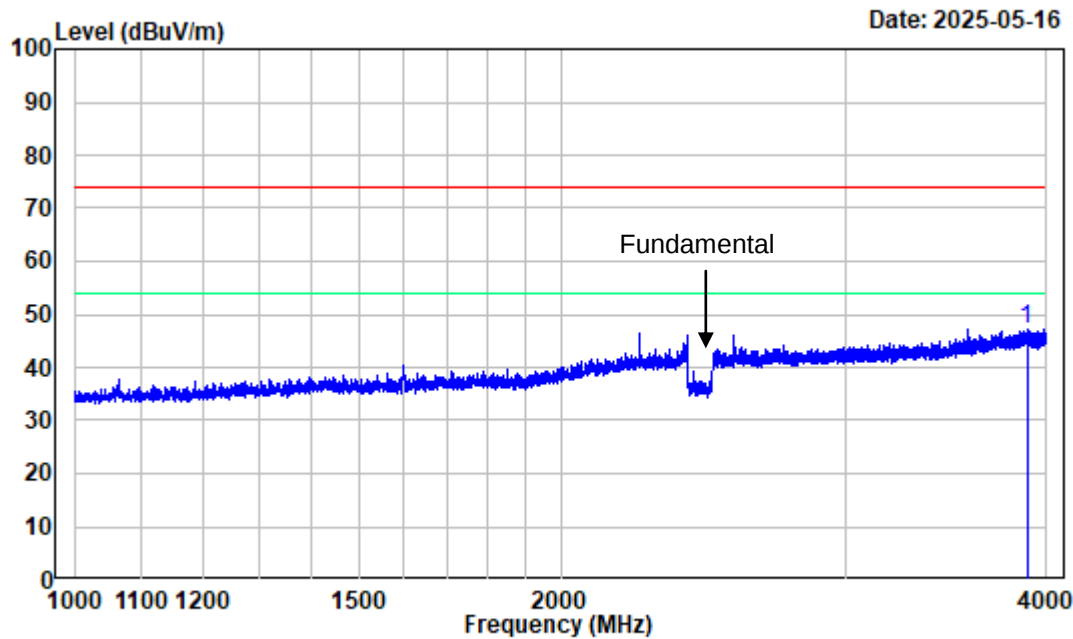


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq		Read		Limit	Over	Remark
Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3890.125	-8.00	55.13	47.13	74.00	-26.87 Peak

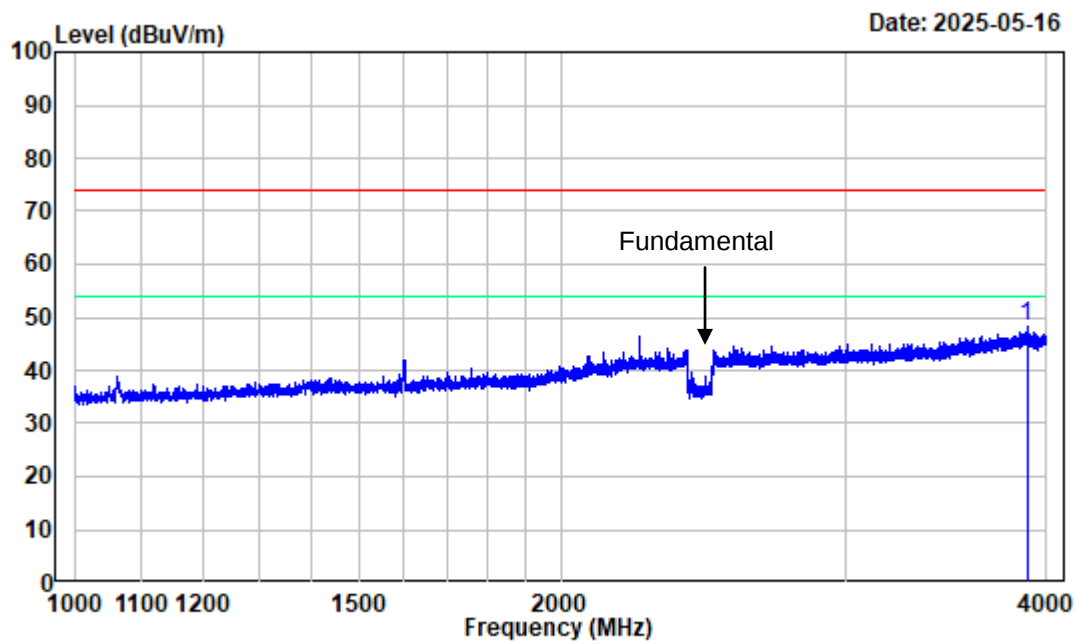


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3890.125	-8.00	56.19	48.19	74.00	-25.81	Peak

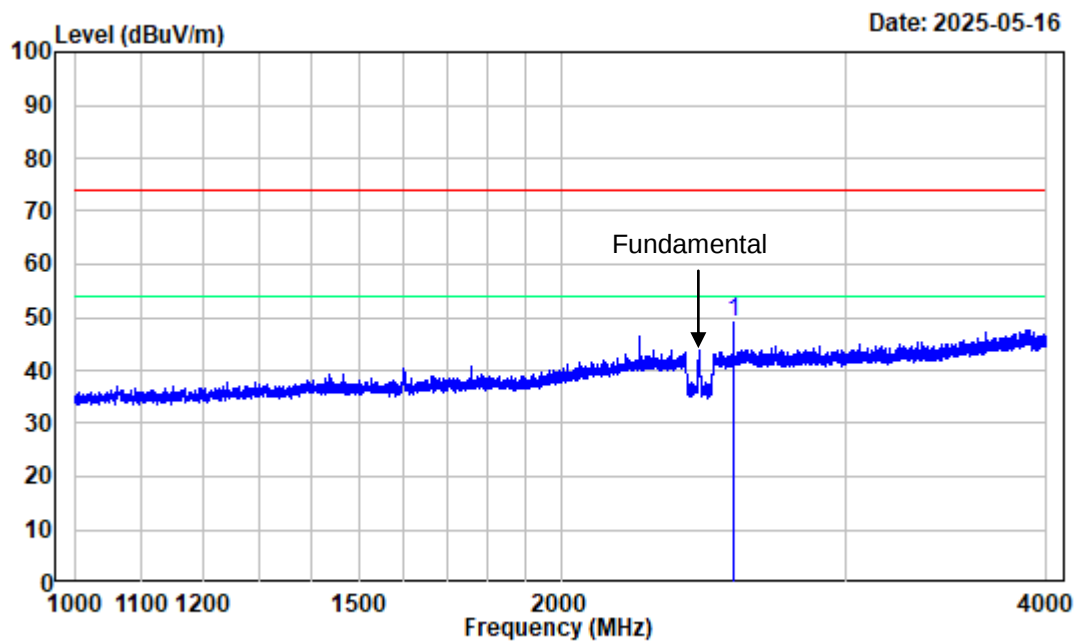


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2560.000	-10.09	59.18	49.09	74.00	-24.91	Peak

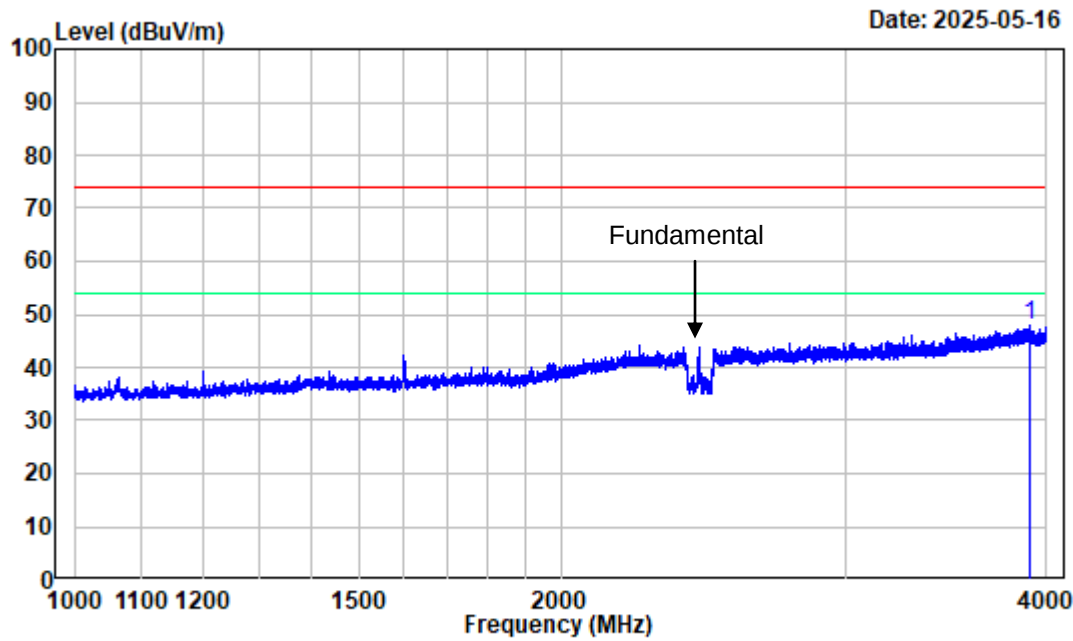


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3909.625	-8.00	55.81	47.81	74.00	-26.19	Peak

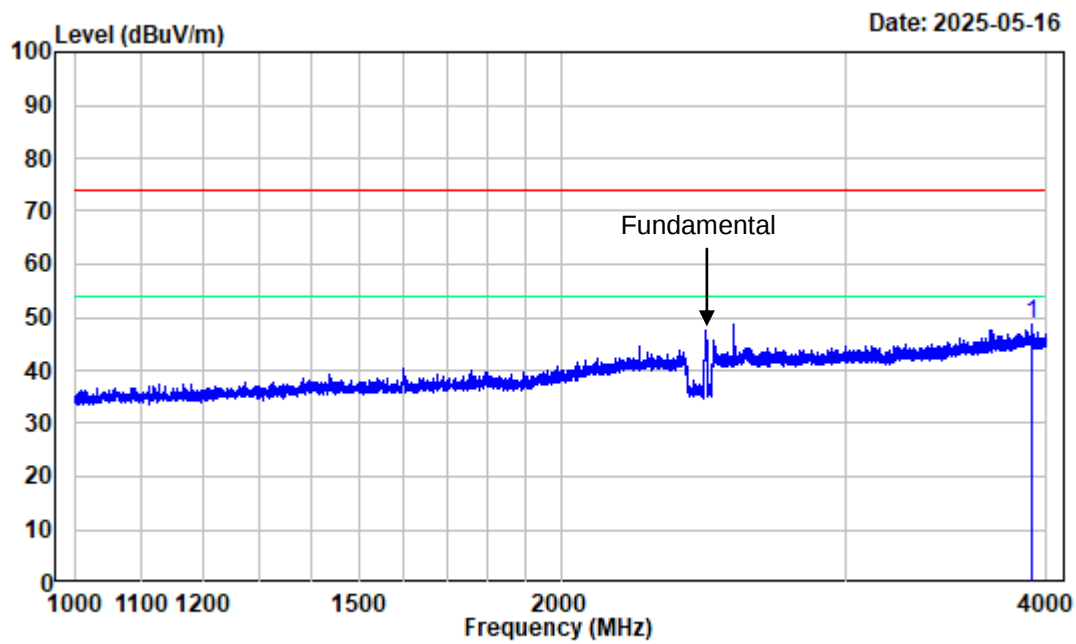

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz


	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3917.875	-8.08	56.59	48.51	74.00	-25.49	Peak

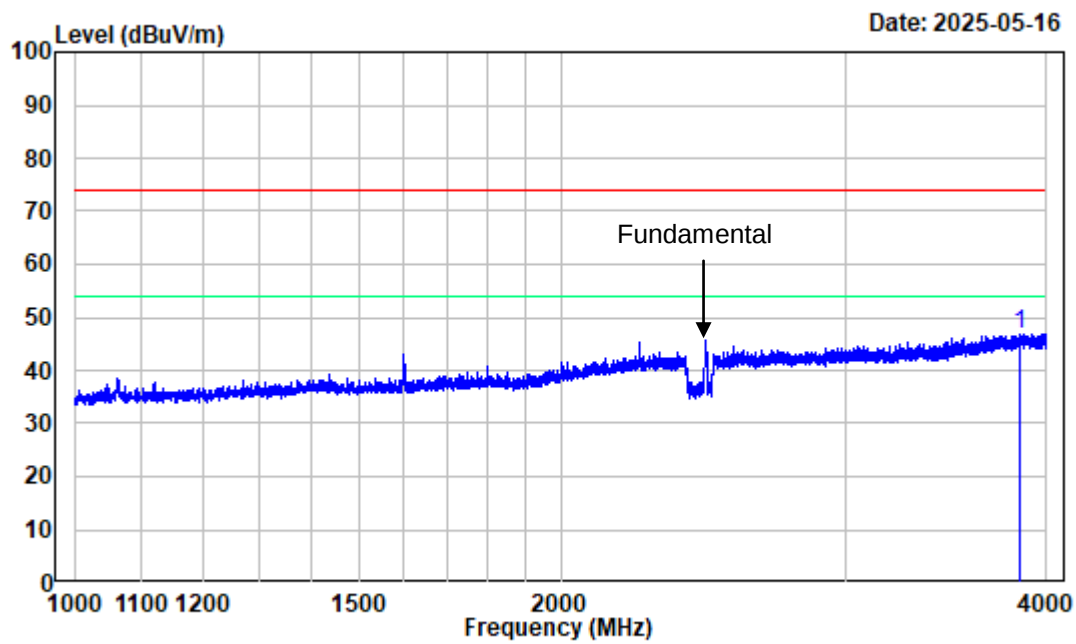

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz


		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3853.000	-8.34	55.22	46.88	74.00	-27.12	Peak

For 802.11g mode

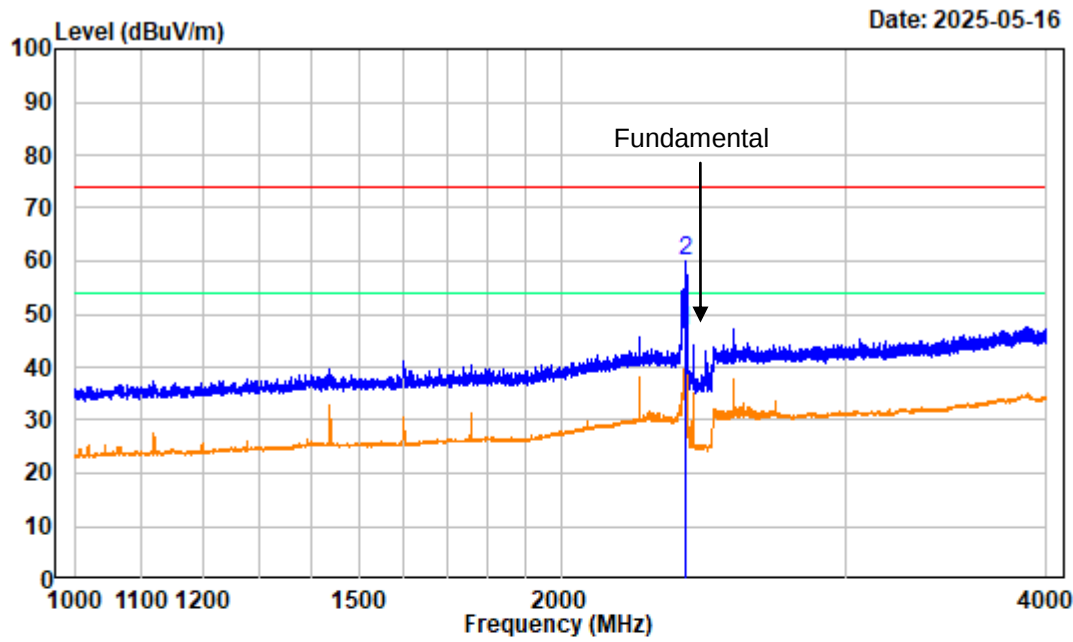


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11g Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2391.625	-10.24	57.22	46.98	54.00	-7.02	Average
2	2391.625	-10.24	70.10	59.86	74.00	-14.14	Peak

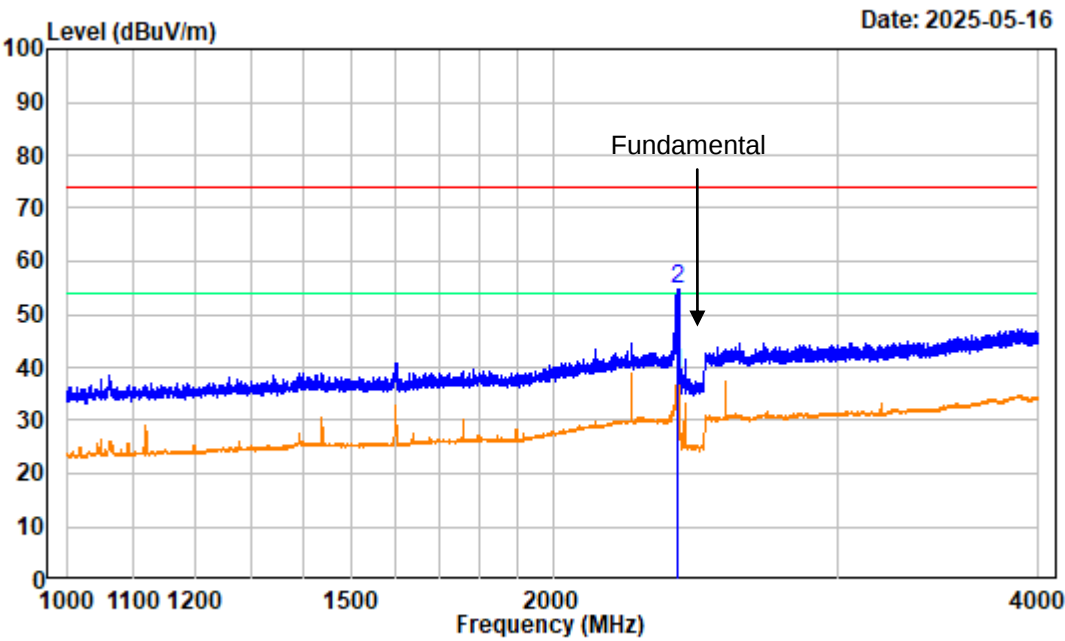

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11g Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.125	-10.24	49.02	38.78	54.00	-15.22	Average
2	2390.125	-10.24	65.11	54.87	74.00	-19.13	Peak

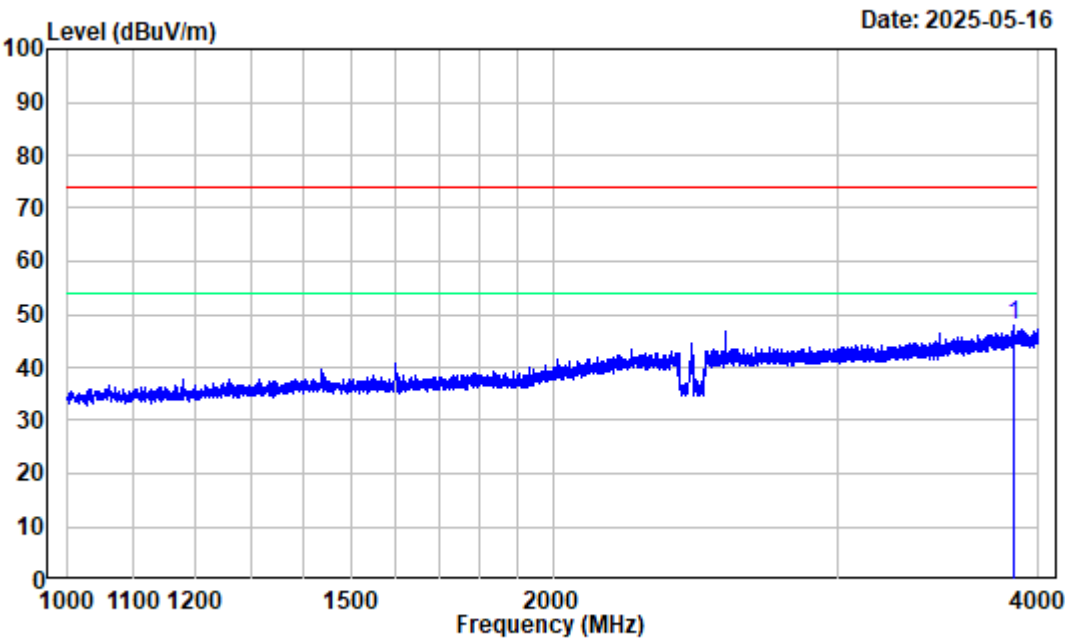

Site : chamber

Condition : 3m HORIZONTAL


Project No.: 2504R39298E-RF

Test Mode : TransmittingTester:Matt Liang

Note : 802.11g Mid Channel 2437MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3864.250	-8.23	56.24	48.01	74.00	-25.99	Peak

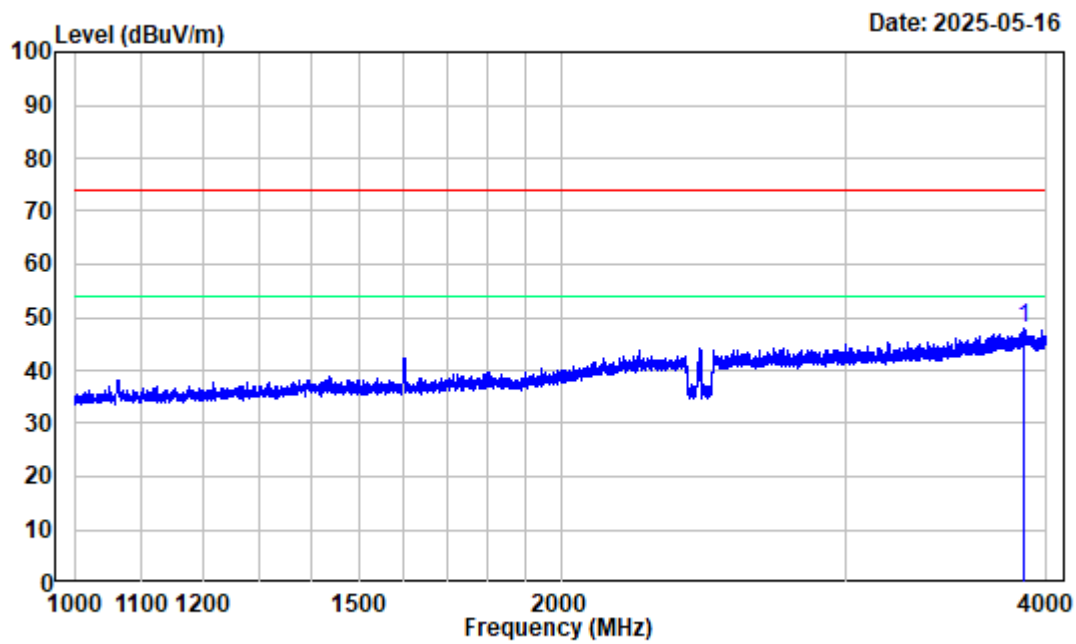


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11g Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3871.000	-8.17	56.01	47.84	74.00	-26.16	Peak

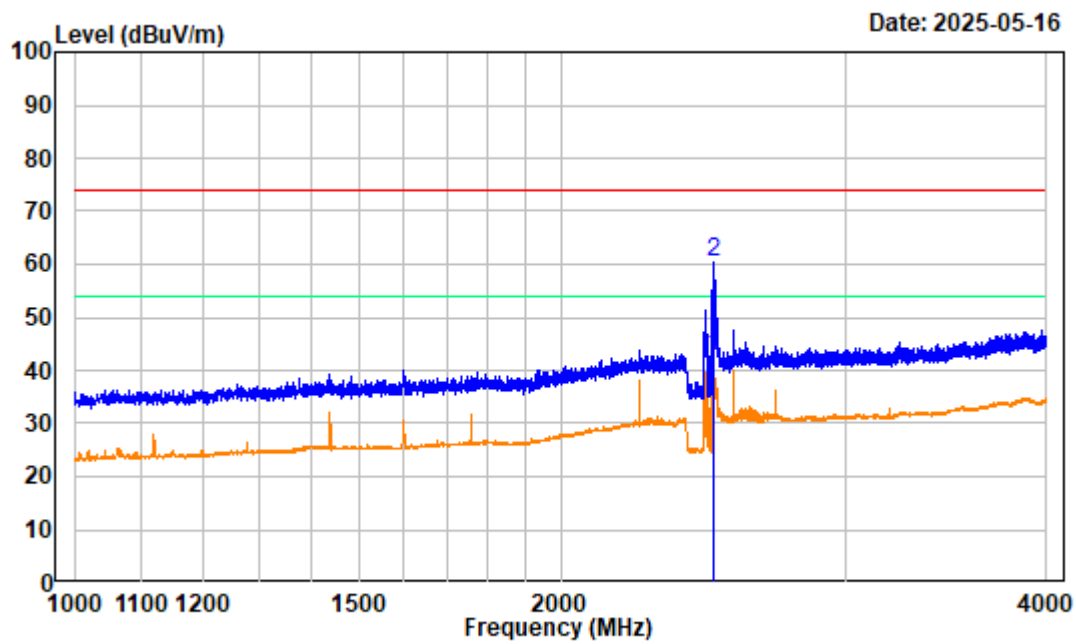

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11g High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2485.375	-10.23	52.99	42.76	54.00	-11.24	Average
2	2485.375	-10.23	70.58	60.35	74.00	-13.65	Peak

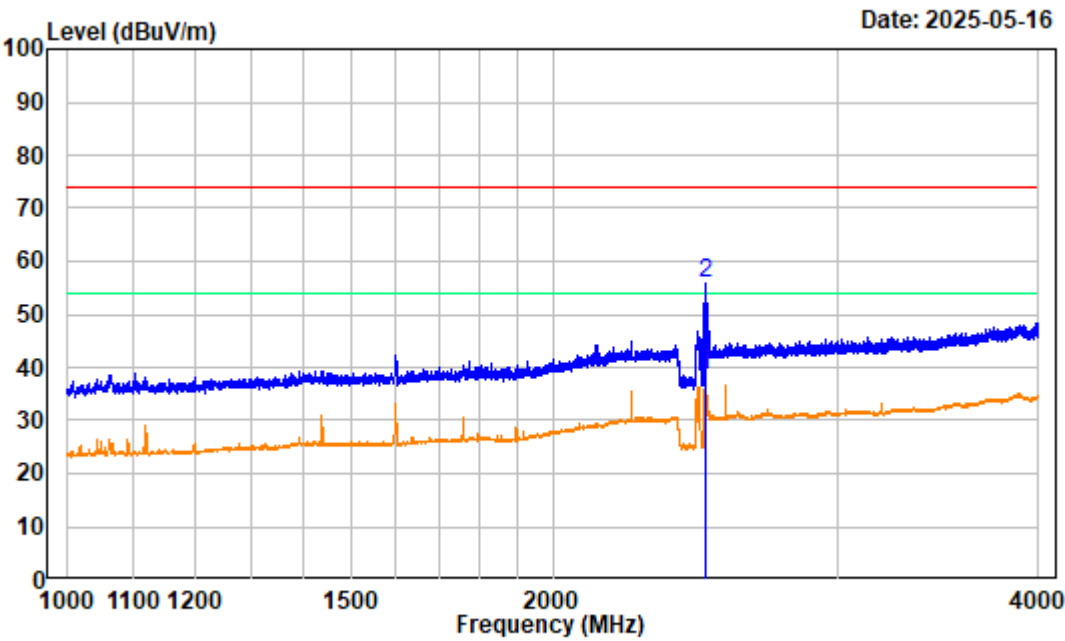

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11g High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2485.375	-10.23	48.64	38.41	54.00	-15.59	Average
2	2485.375	-10.23	65.97	55.74	74.00	-18.26	Peak

For 802.11n20 mode

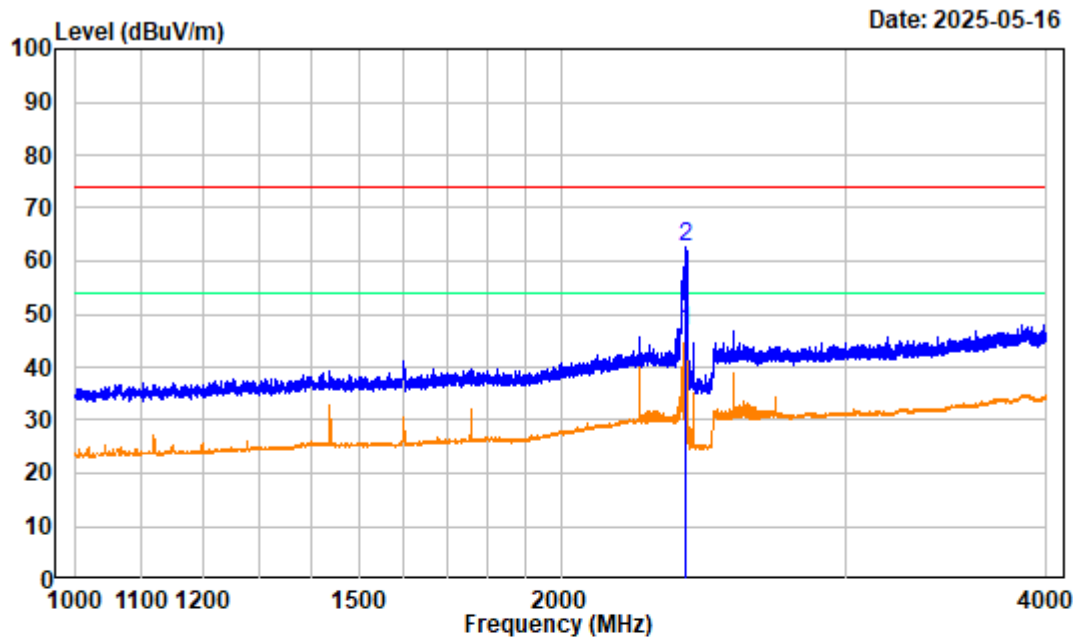


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2392.750	-10.24	57.08	46.84	54.00	-7.16	Average
2	2392.750	-10.24	72.77	62.53	74.00	-11.47	Peak

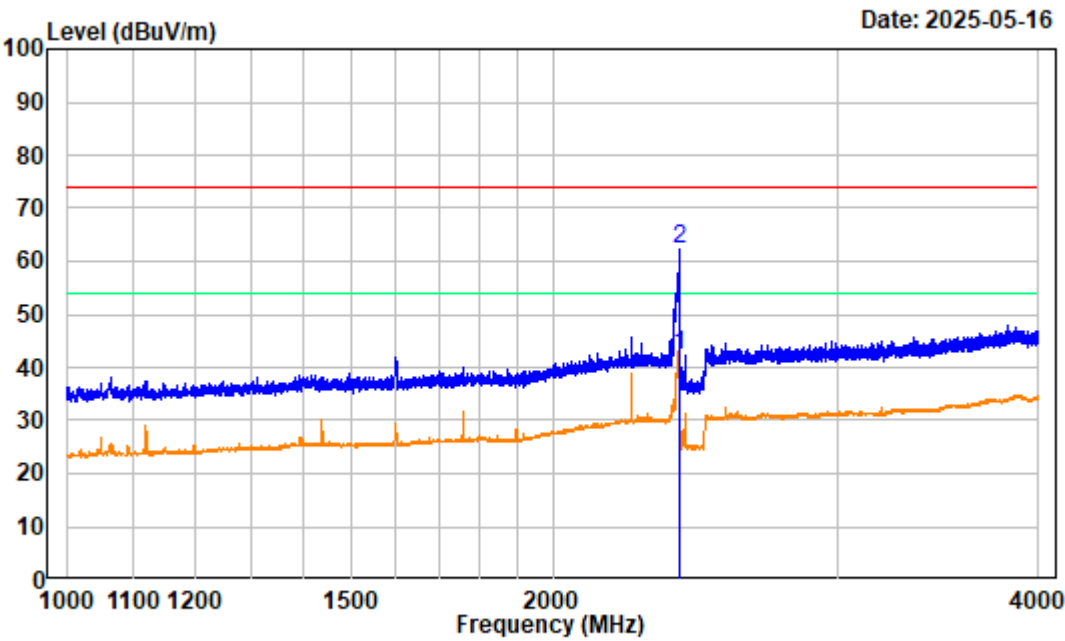


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2398.000	-10.24	52.61	42.37	54.00	-11.63	Average
2	2398.000	-10.24	72.62	62.38	74.00	-11.62	Peak

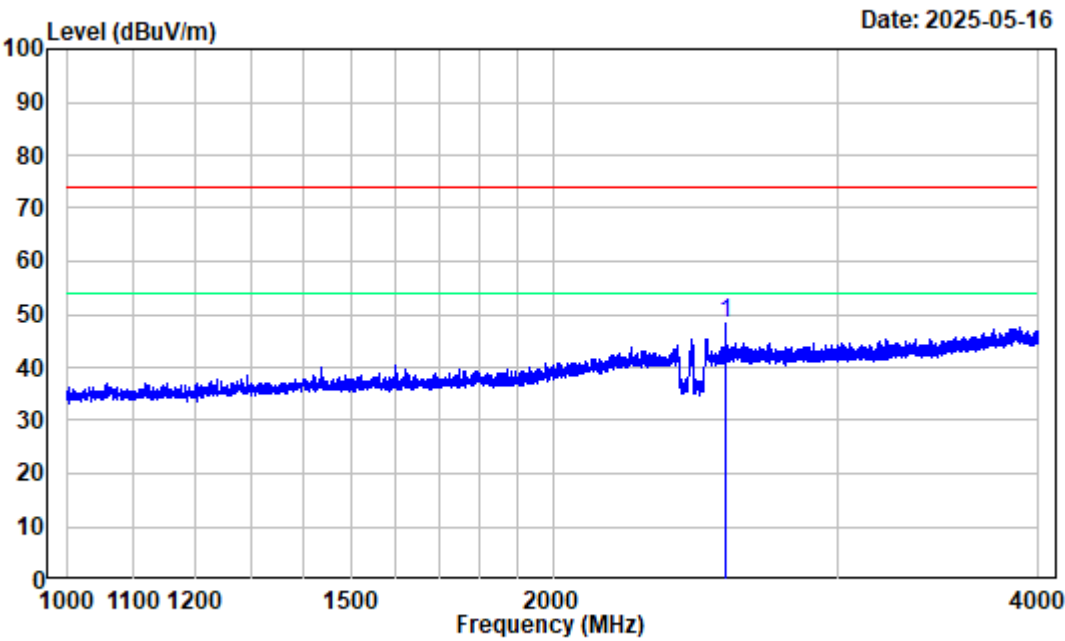


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2559.625	-10.09	58.49	48.40	74.00	-25.60	Peak

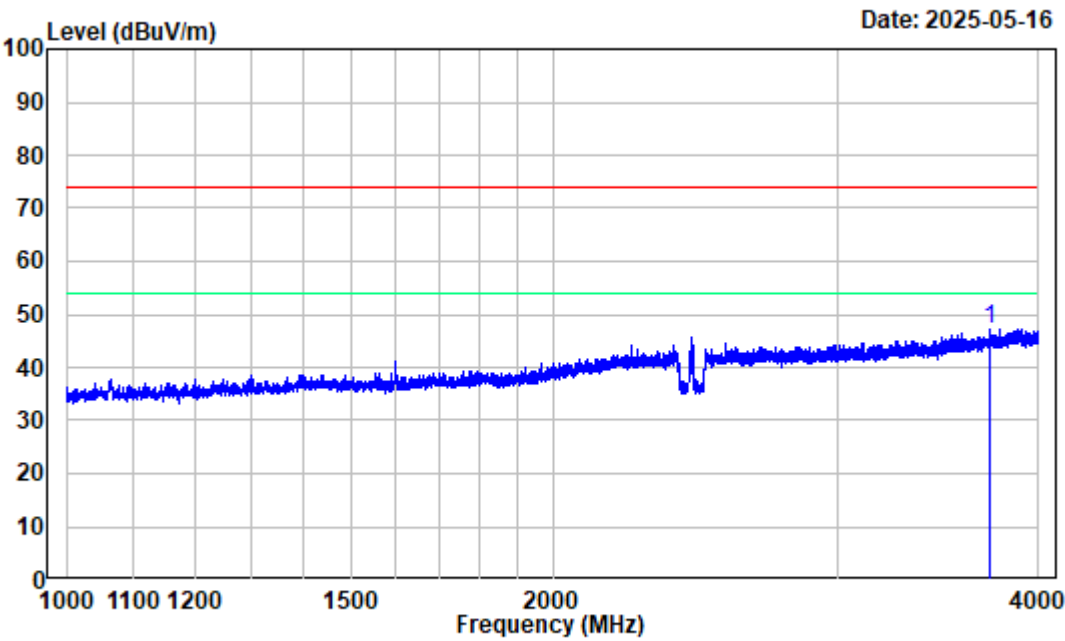


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3731.500	-8.79	55.96	47.17	74.00	-26.83	Peak

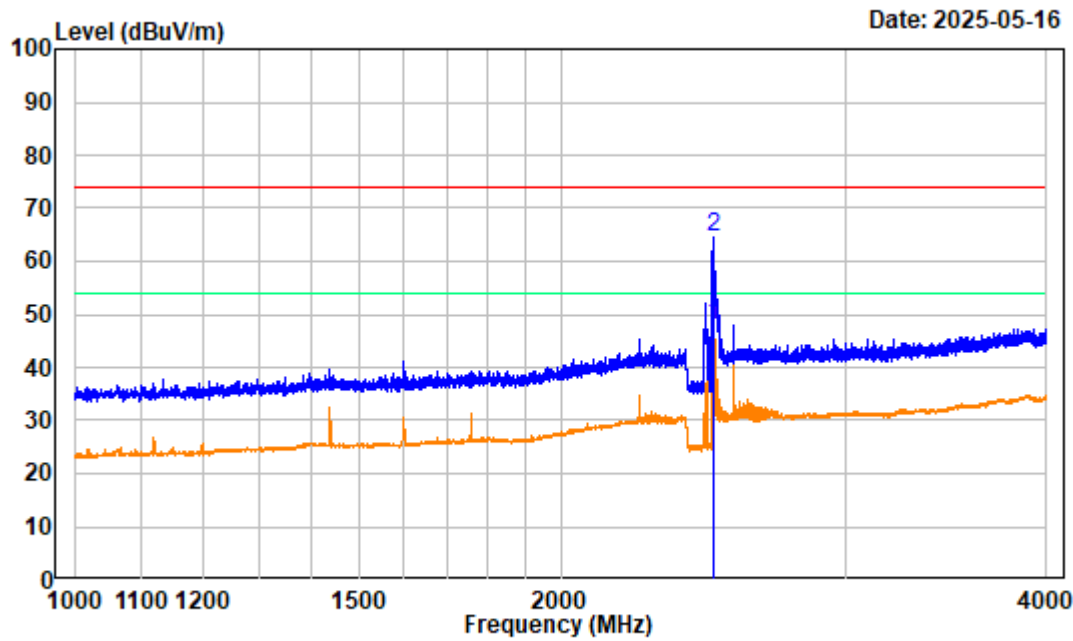

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Freq		Factor	Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	2487.625	-10.23	58.05	47.82	54.00	-6.18 Average
2	2487.625	-10.23	74.89	64.66	74.00	-9.34 Peak

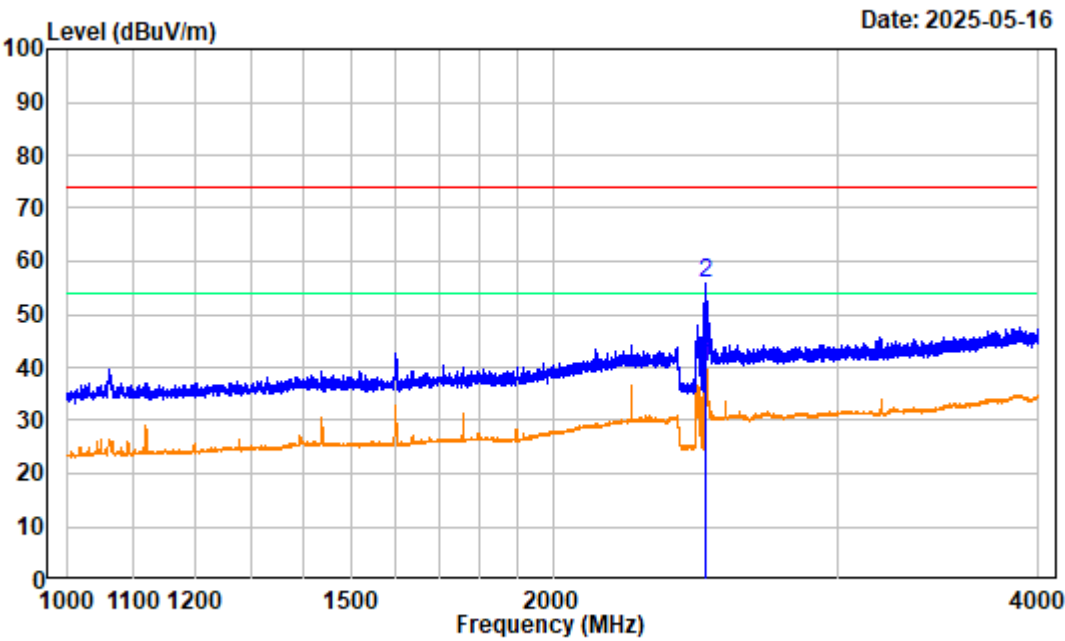

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2488.000	-10.23	50.39	40.16	54.00	-13.84	Average
2	2488.000	-10.23	66.13	55.90	74.00	-18.10	Peak

For 802.11n40 mode

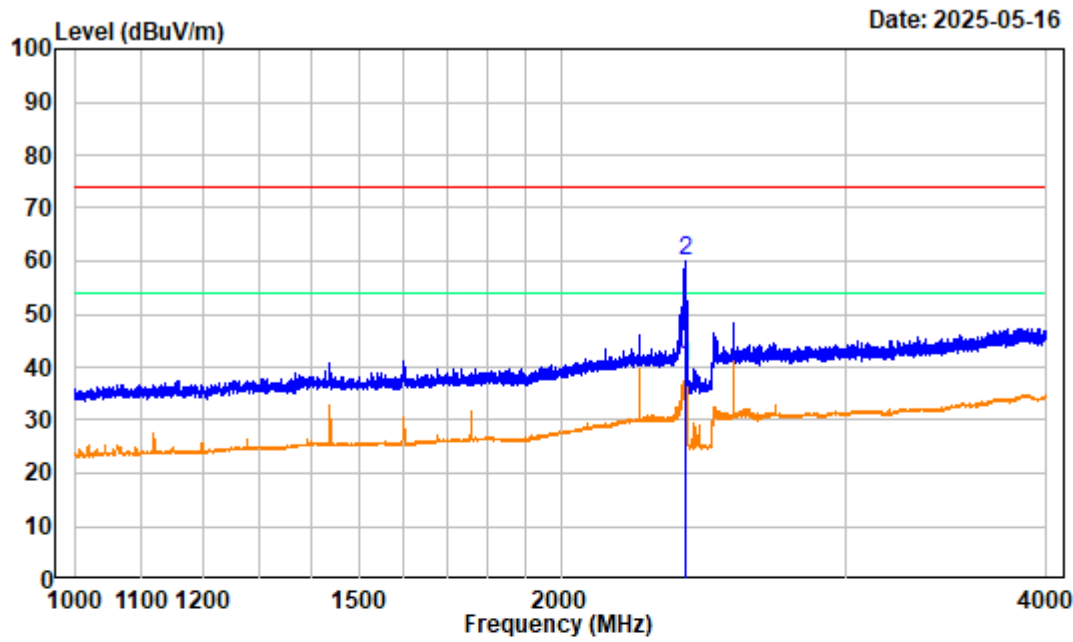


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n40 Low Channel 2422MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2392.375	-10.25	50.28	40.03	54.00	-13.97	Average
2	2392.375	-10.25	70.16	59.91	74.00	-14.09	Peak

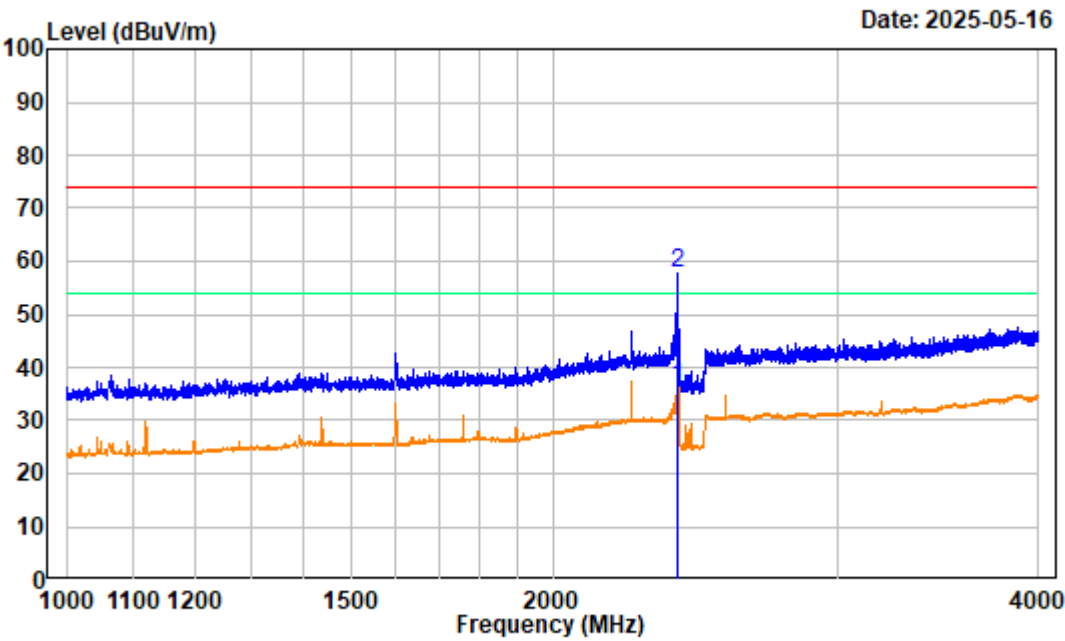


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n40 Low Channel 2422MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.875	-10.24	46.65	36.41	54.00	-17.59	Average
2	2390.875	-10.24	67.91	57.67	74.00	-16.33	Peak

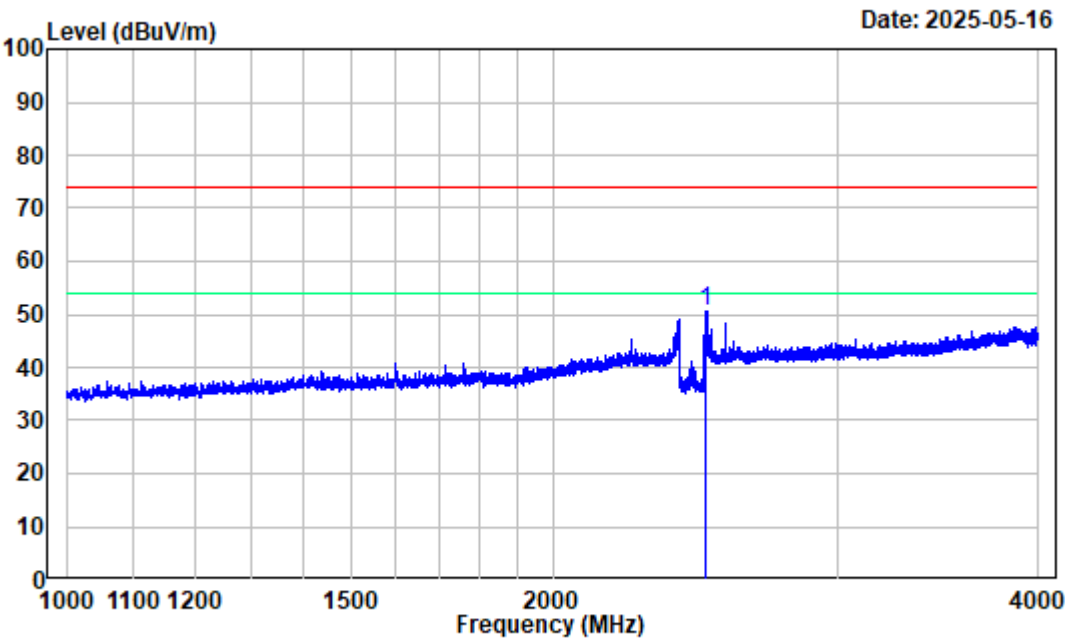


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n40 Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2489.125	-10.23	60.86	50.63	74.00	-23.37	Peak

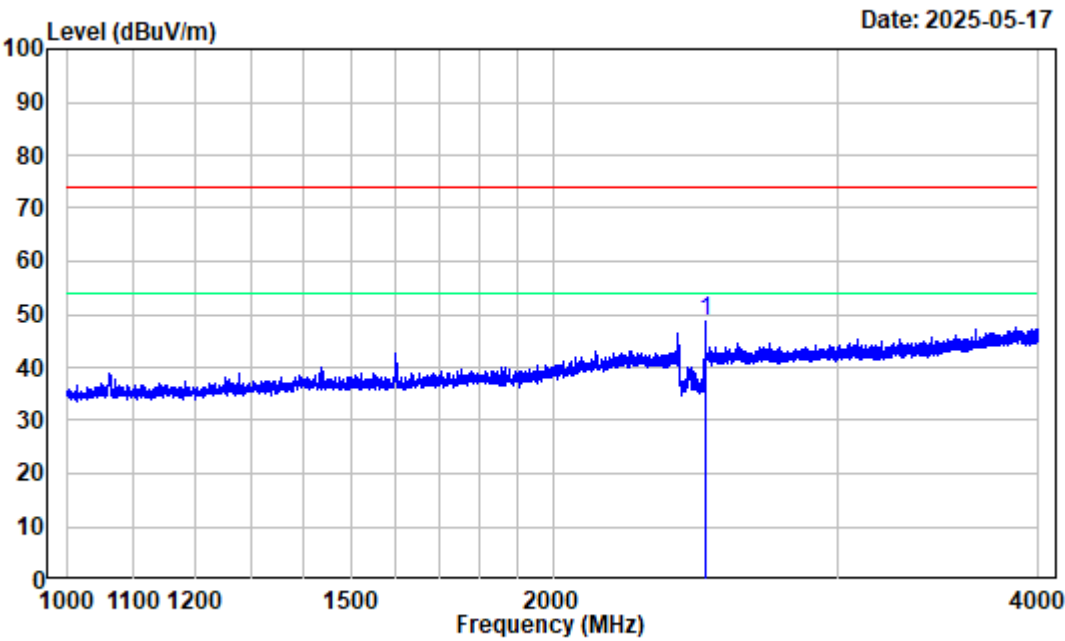


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n40 Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2486.875	-10.24	58.95	48.71	74.00	-25.29	Peak

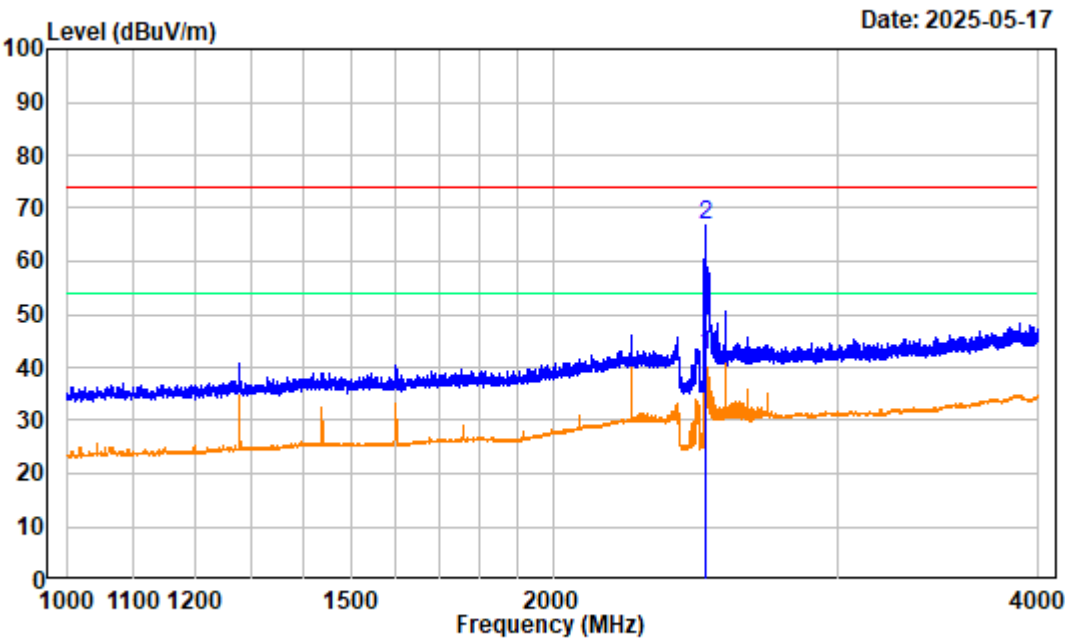

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n40 High Channel 2452MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2486.500	-10.23	52.68	42.45	54.00	-11.55	Average
2	2486.500	-10.23	77.20	66.97	74.00	-7.03	Peak

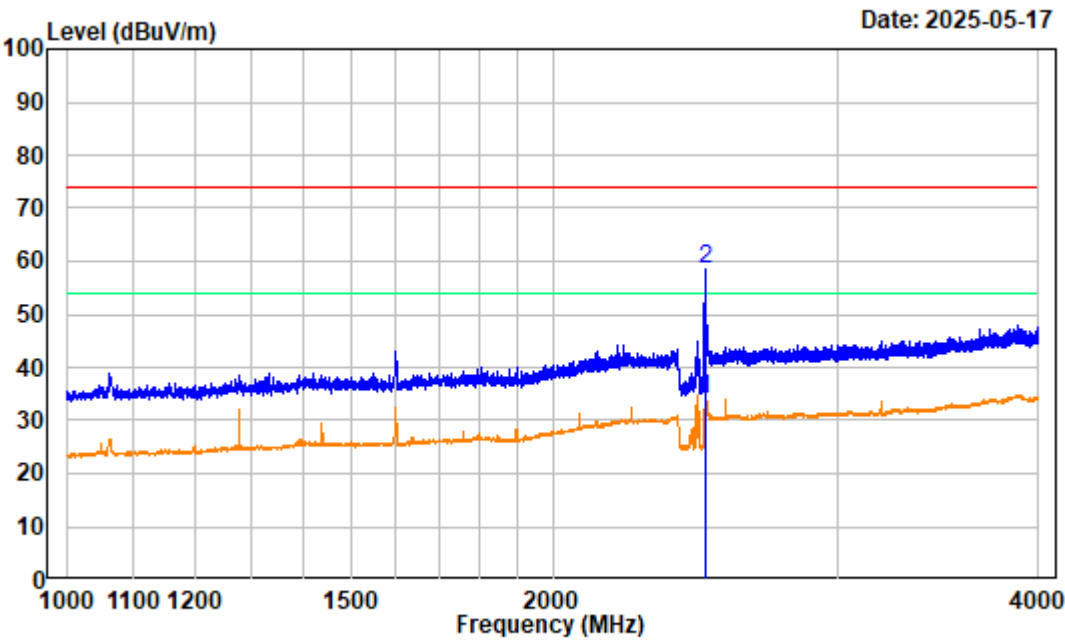


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n40 High Channel 2452MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2488.750	-10.23	44.18	33.95	54.00	-20.05	Average
2	2488.750	-10.23	68.78	58.55	74.00	-15.45	Peak

4GHz~18GHz:

For 802.11b mode

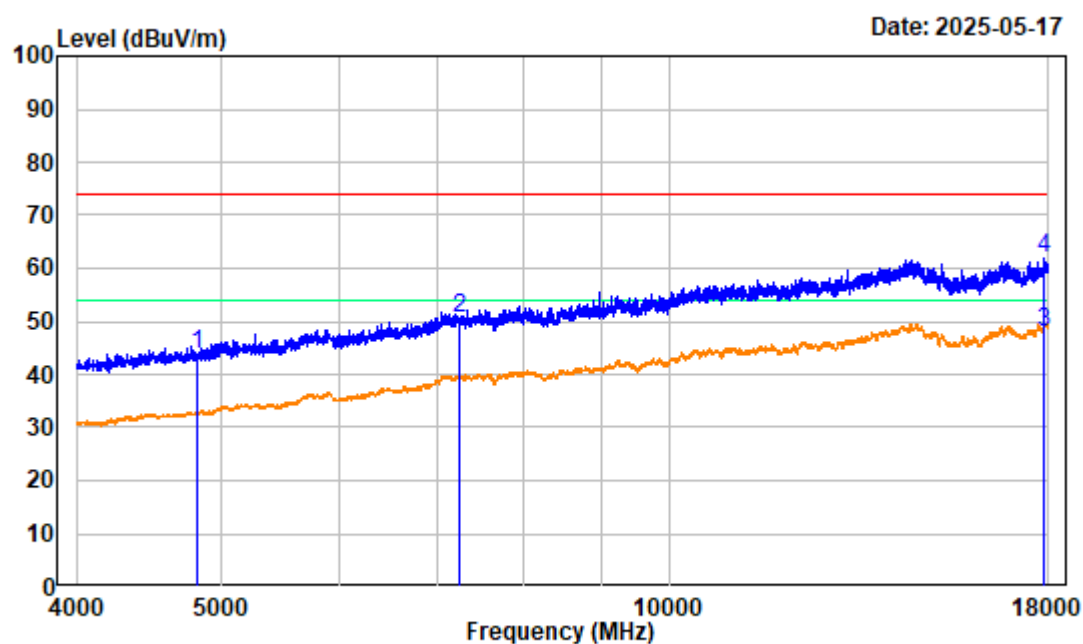

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R39298E-RF


Test Mode : Transmitting

Tester: Matt Liang

Note : 802.11b Low Channel 2412MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.61	50.53	43.92	74.00	-30.08	peak
2	7236.000	-1.31	51.87	50.56	74.00	-23.44	peak
3	17884.500	8.24	39.61	47.85	54.00	-6.15	Average
4	17884.500	8.24	53.60	61.84	74.00	-12.16	Peak

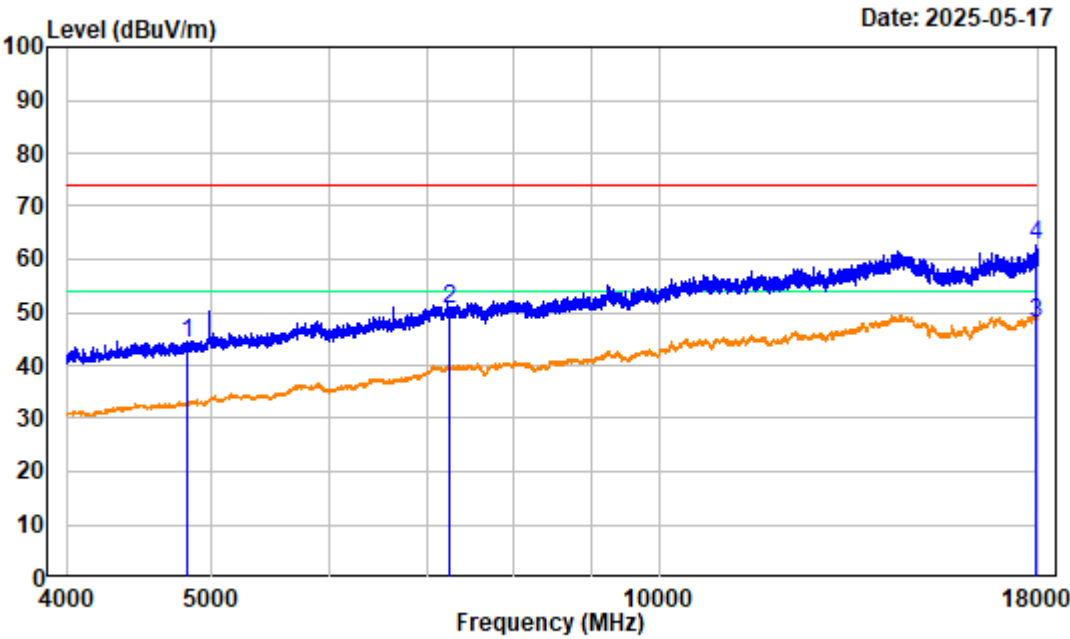


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.61	50.84	44.23	74.00	-29.77	peak
2	7236.000	-1.31	51.79	50.48	74.00	-23.52	peak
3	17951.000	8.19	39.65	47.84	54.00	-6.16	Average
4	17951.000	8.19	54.31	62.50	74.00	-11.50	Peak

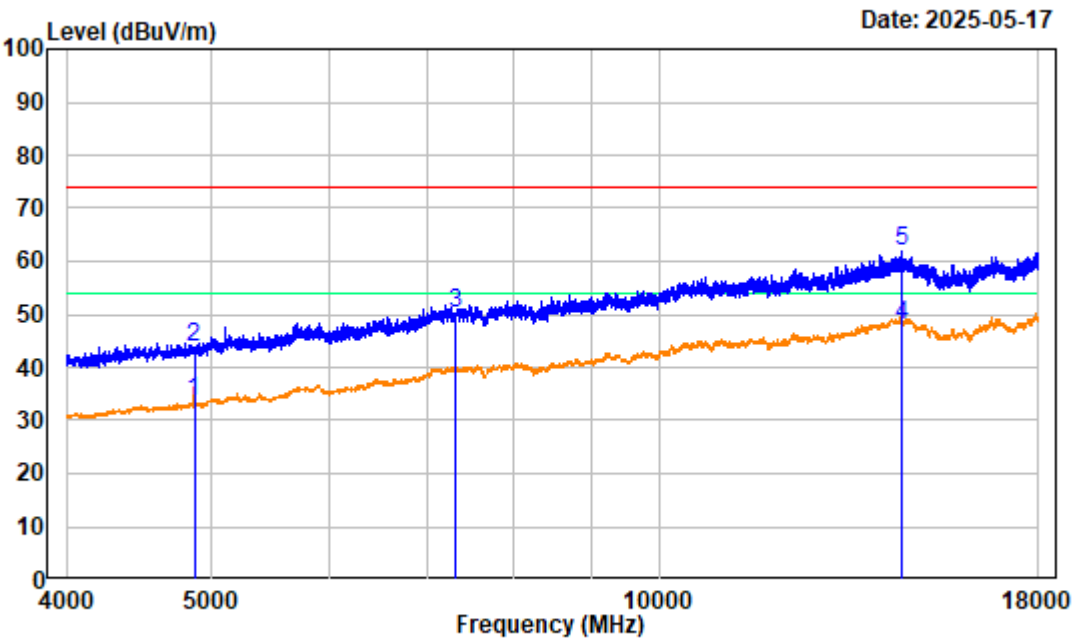


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.63	40.04	33.41	54.00	-20.59	Average
2	4874.000	-6.63	50.30	43.67	74.00	-30.33	peak
3	7311.000	-1.21	51.45	50.24	74.00	-23.76	peak
4	14564.750	8.77	39.05	47.82	54.00	-6.18	Average
5	14564.750	8.77	53.11	61.88	74.00	-12.12	Peak

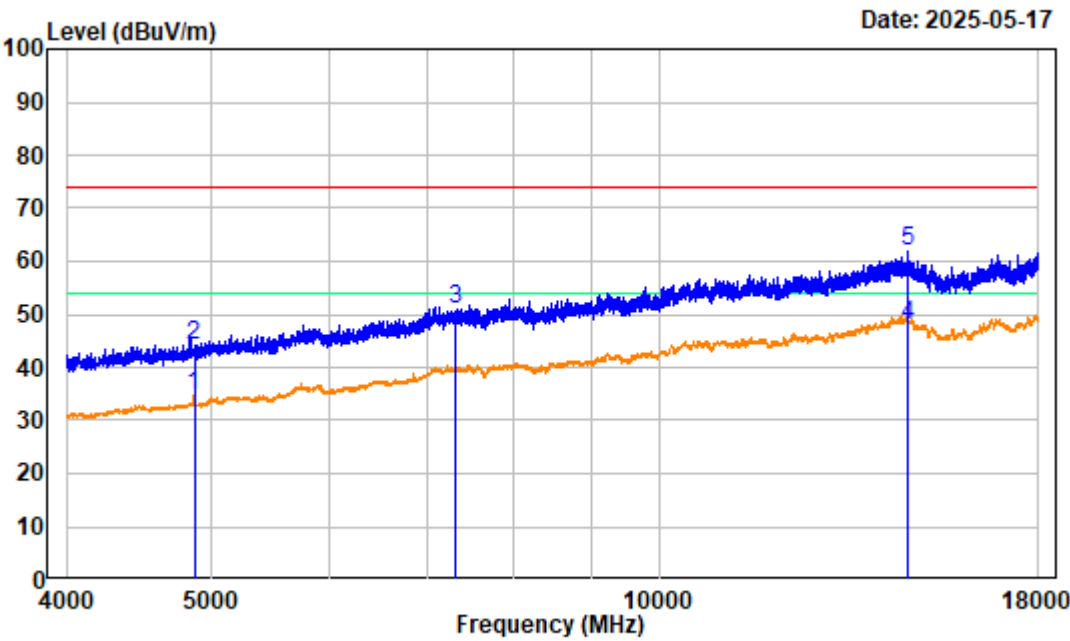

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	4874.000	-6.63	41.18	34.55	54.00	-19.45	Average
2	4874.000	-6.63	50.79	44.16	74.00	-29.84	peak
3	7311.000	-1.21	52.06	50.85	74.00	-23.15	peak
4	14701.250	8.10	39.75	47.85	54.00	-6.15	Average
5	14701.250	8.10	53.72	61.82	74.00	-12.18	Peak

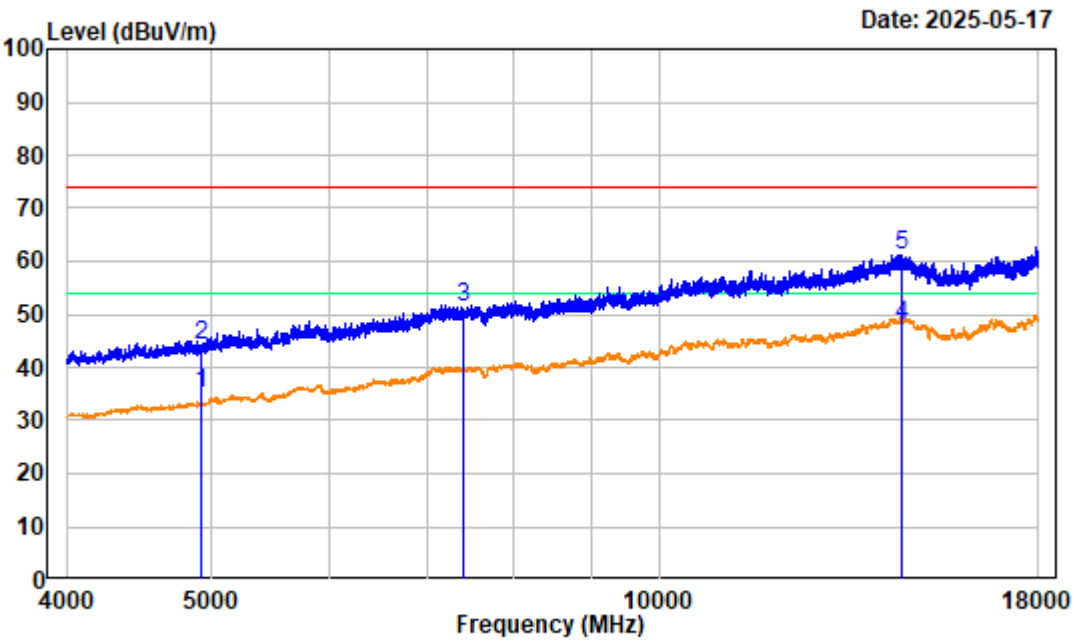

Site : chamber

Condition : 3m HORIZONTAL


Project No.: 2504R39298E-RF

Test Mode : TransmittingTester:Matt Liang

Note : 802.11b High Channel 2462MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	41.62	35.02	54.00	-18.98	Average
2	4924.000	-6.60	50.80	44.20	74.00	-29.80	peak
3	7386.000	-1.38	52.59	51.21	74.00	-22.79	peak
4	14552.500	9.00	38.77	47.77	54.00	-6.23	Average
5	14552.500	9.00	52.31	61.31	74.00	-12.69	Peak

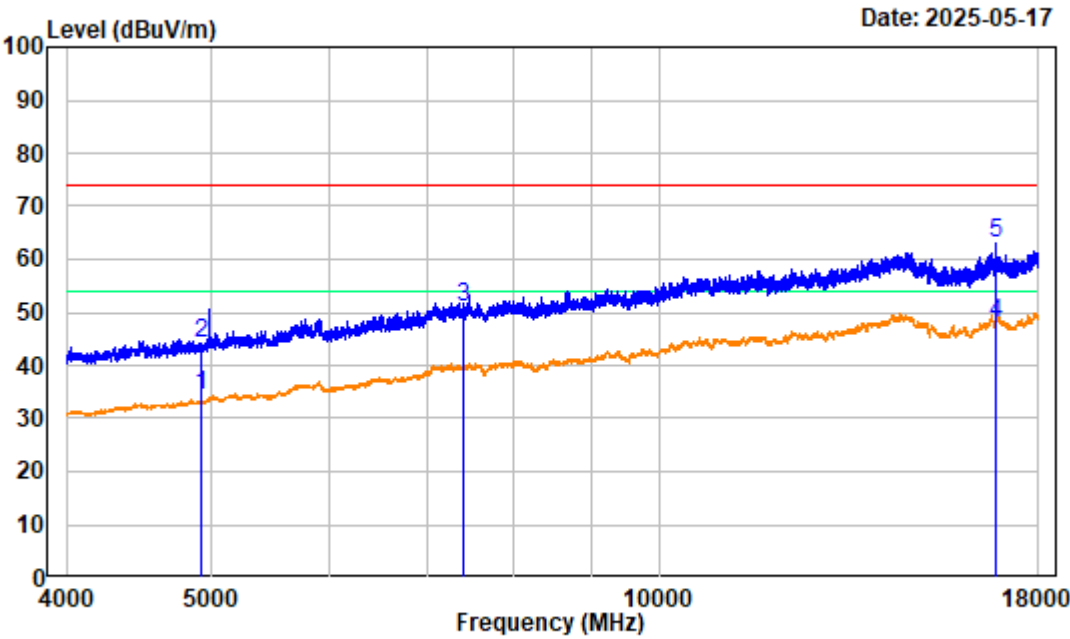

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	40.96	34.36	54.00	-19.64	Average
2	4924.000	-6.60	50.88	44.28	74.00	-29.72	peak
3	7386.000	-1.38	52.25	50.87	74.00	-23.13	peak
4	16855.500	8.04	39.85	47.89	54.00	-6.11	Average
5	16855.500	8.04	55.00	63.04	74.00	-10.96	Peak

For 802.11g mode

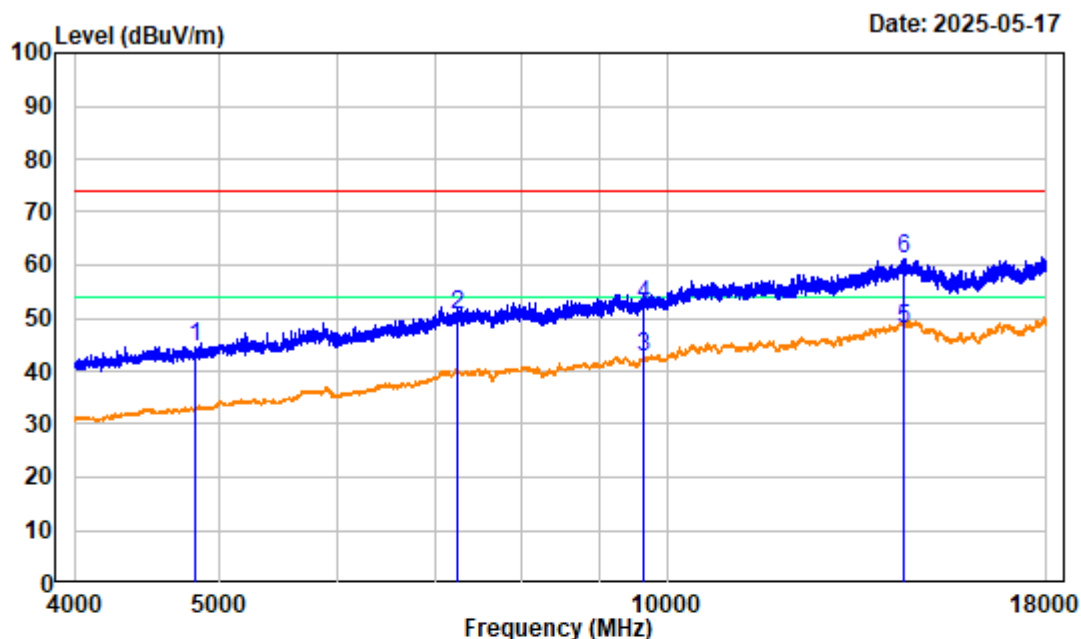

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R39298E-RF


Test Mode : Transmitting

Tester: Matt Liang

Note : 802.11g Low Channel 2412MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.61	51.14	44.53	74.00	-29.47	peak
2	7236.000	-1.31	51.75	50.44	74.00	-23.56	peak
3	9647.250	1.63	41.07	42.70	54.00	-11.30	Average
4	9647.250	1.63	51.00	52.63	74.00	-21.37	Peak
5	14454.500	8.46	39.41	47.87	54.00	-6.13	Average
6	14454.500	8.46	52.62	61.08	74.00	-12.92	Peak

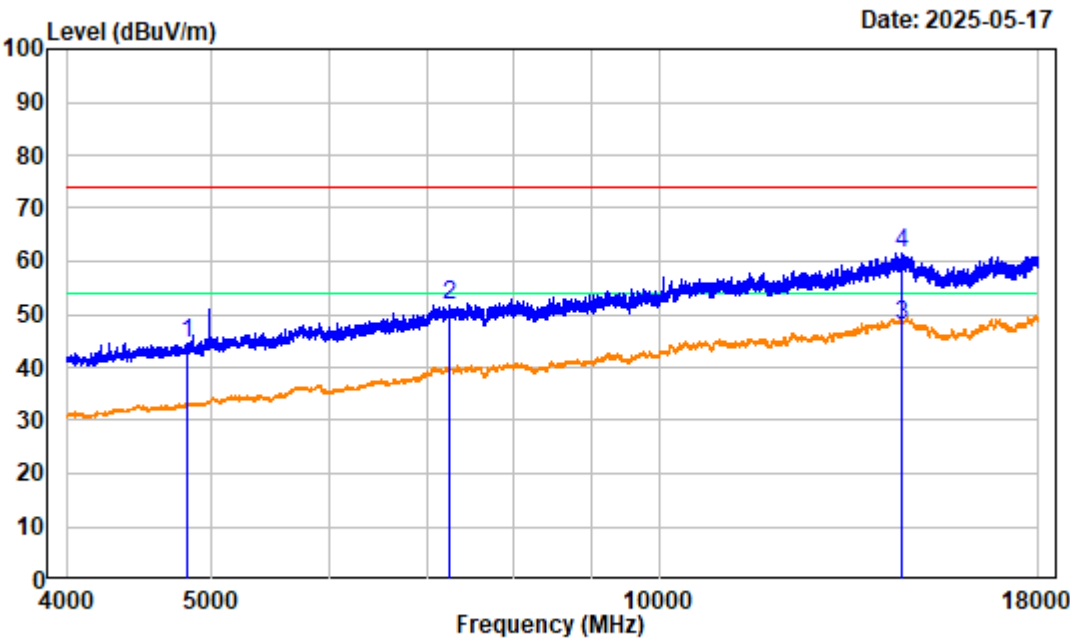


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11g Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.61	51.02	44.41	74.00	-29.59	peak
2	7236.000	-1.31	53.00	51.69	74.00	-22.31	peak
3	14550.750	9.04	38.73	47.77	54.00	-6.23	Average
4	14550.750	9.04	52.42	61.46	74.00	-12.54	Peak

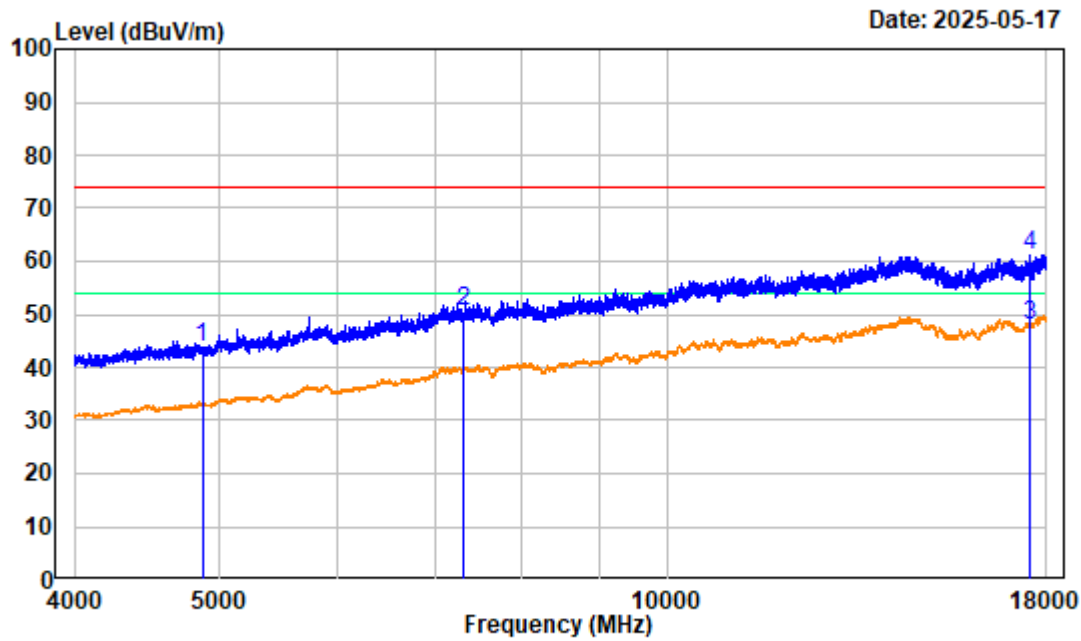


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11g Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.63	50.45	43.82	74.00	-30.18	peak
2	7311.000	-1.21	51.85	50.64	74.00	-23.36	peak
3	17550.250	7.39	40.46	47.85	54.00	-6.15	Average
4	17550.250	7.39	53.81	61.20	74.00	-12.80	Peak

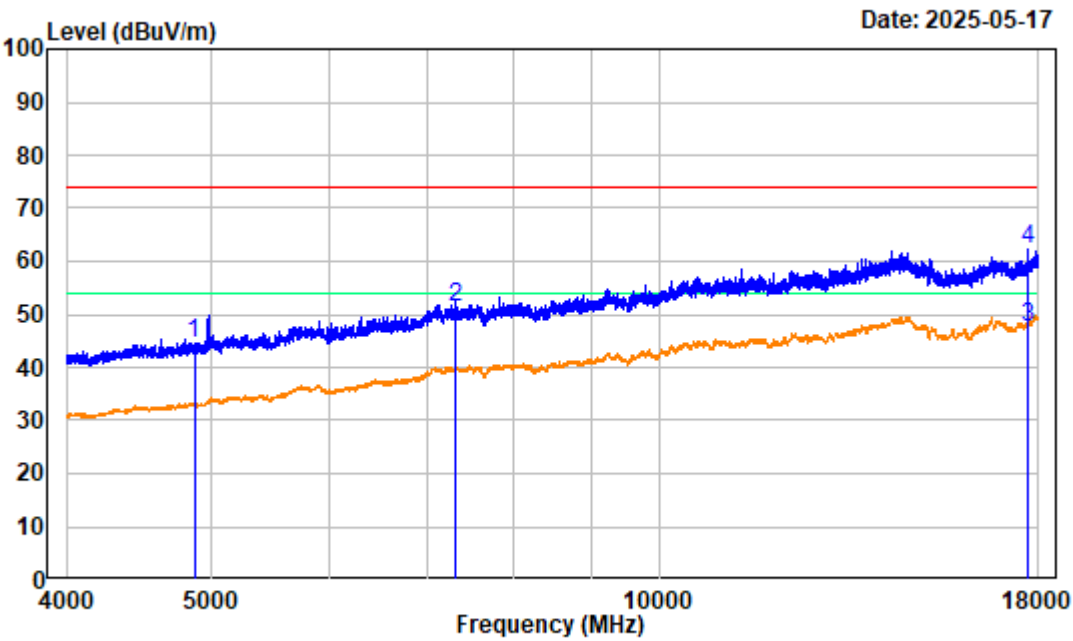

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11g Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.63	50.99	44.36	74.00	-29.64	peak
2	7311.000	-1.21	52.71	51.50	74.00	-22.50	peak
3	17699.000	7.60	40.12	47.72	54.00	-6.28	Average
4	17699.000	7.60	54.58	62.18	74.00	-11.82	Peak

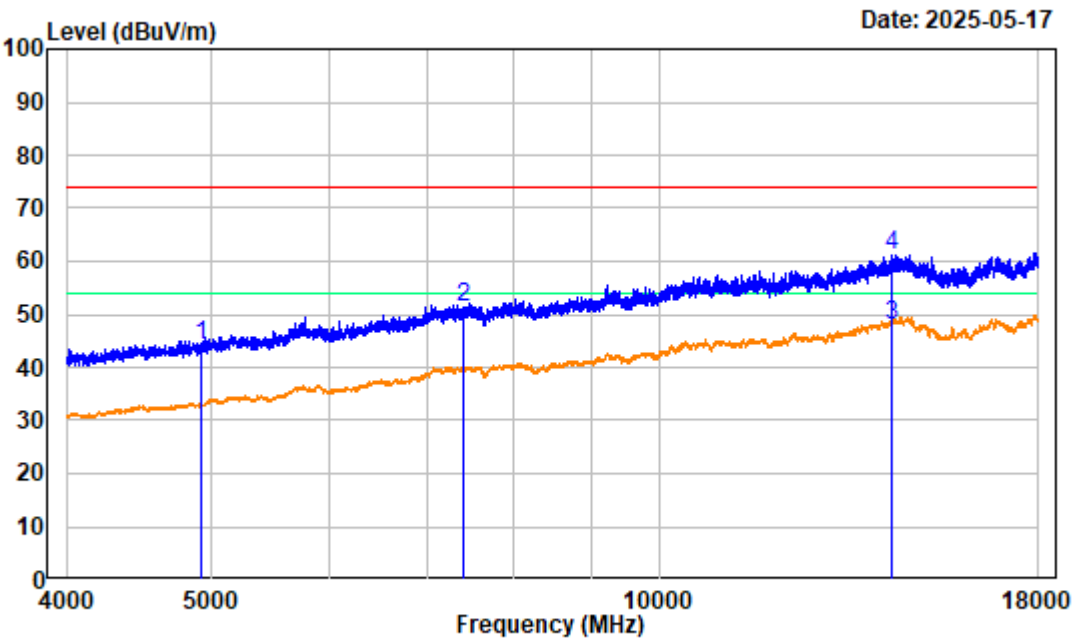

Site : chamber

Condition : 3m HORIZONTAL


Project No.: 2504R39298E-RF

Test Mode : TransmittingTester:Matt Liang

Note : 802.11g High Channel 2462MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	50.92	44.32	74.00	-29.68	peak
2	7386.000	-1.38	52.69	51.31	74.00	-22.69	peak
3	14342.500	8.70	39.08	47.78	54.00	-6.22	Average
4	14342.500	8.70	52.60	61.30	74.00	-12.70	Peak

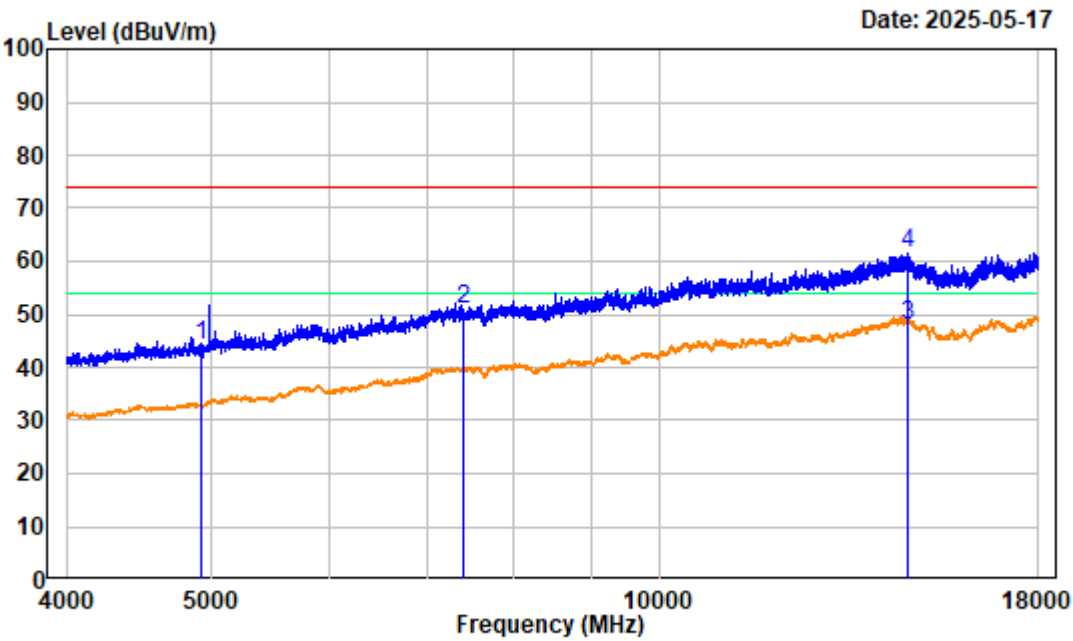

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11g High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	50.67	44.07	74.00	-29.93	peak
2	7386.000	-1.38	52.46	51.08	74.00	-22.92	peak
3	14694.250	8.16	39.70	47.86	54.00	-6.14	Average
4	14694.250	8.16	53.32	61.48	74.00	-12.52	Peak

For 802.11n20 mode

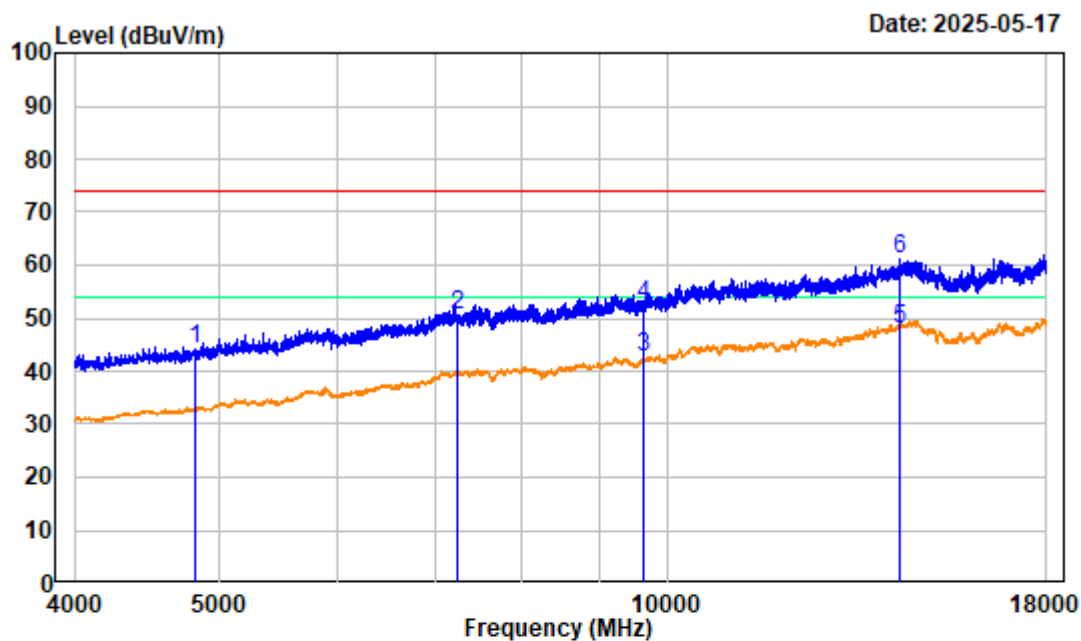

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R39298E-RF


Test Mode : Transmitting

Tester: Matt Liang

Note : 802.11n20 Low Channel 2412MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.61	50.65	44.04	74.00	-29.96	peak
2	7236.000	-1.31	51.91	50.60	74.00	-23.40	peak
3	9647.250	1.63	41.10	42.73	54.00	-11.27	Average
4	9647.250	1.63	50.67	52.30	74.00	-21.70	Peak
5	14351.250	8.79	39.09	47.88	54.00	-6.12	Average
6	14351.250	8.79	52.38	61.17	74.00	-12.83	Peak

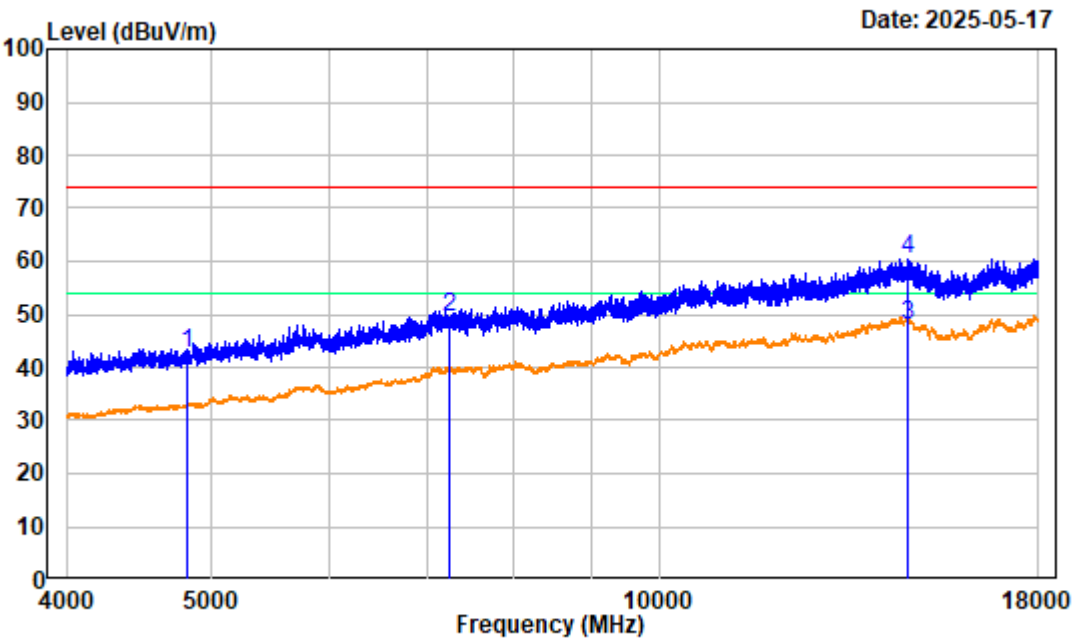


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-6.61	49.38	42.77	74.00	-31.23	peak
2	7236.000	-1.31	50.63	49.32	74.00	-24.68	peak
3	14690.750	8.18	39.66	47.84	54.00	-6.16	Average
4	14690.750	8.18	52.35	60.53	74.00	-13.47	Peak

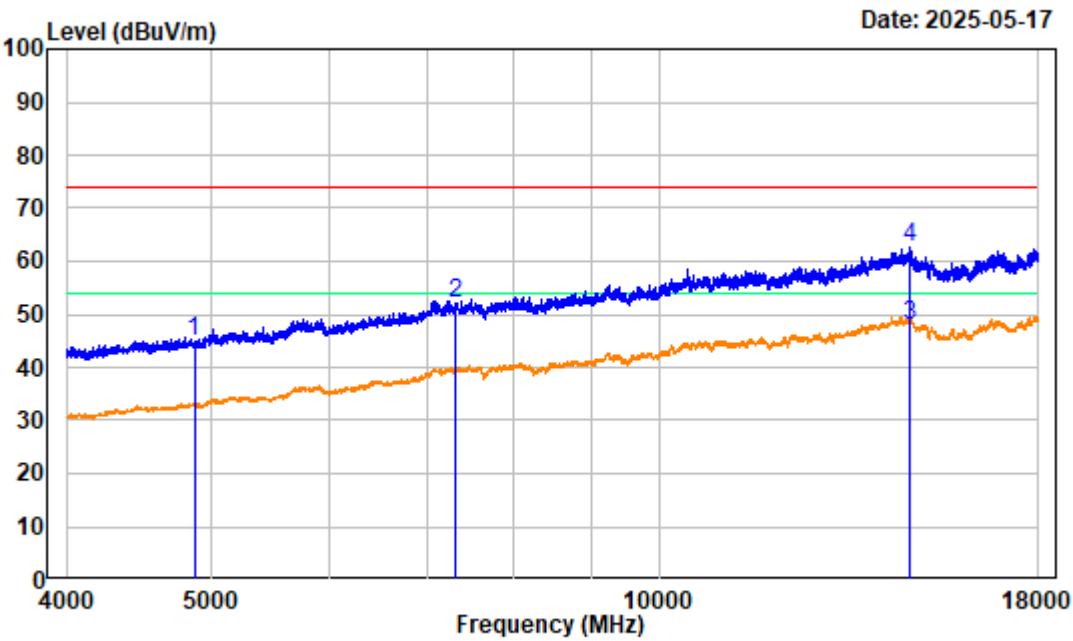


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.63	51.38	44.75	74.00	-29.25	peak
2	7311.000	-1.21	53.18	51.97	74.00	-22.03	peak
3	14771.250	7.90	39.95	47.85	54.00	-6.15	Average
4	14771.250	7.90	54.63	62.53	74.00	-11.47	Peak

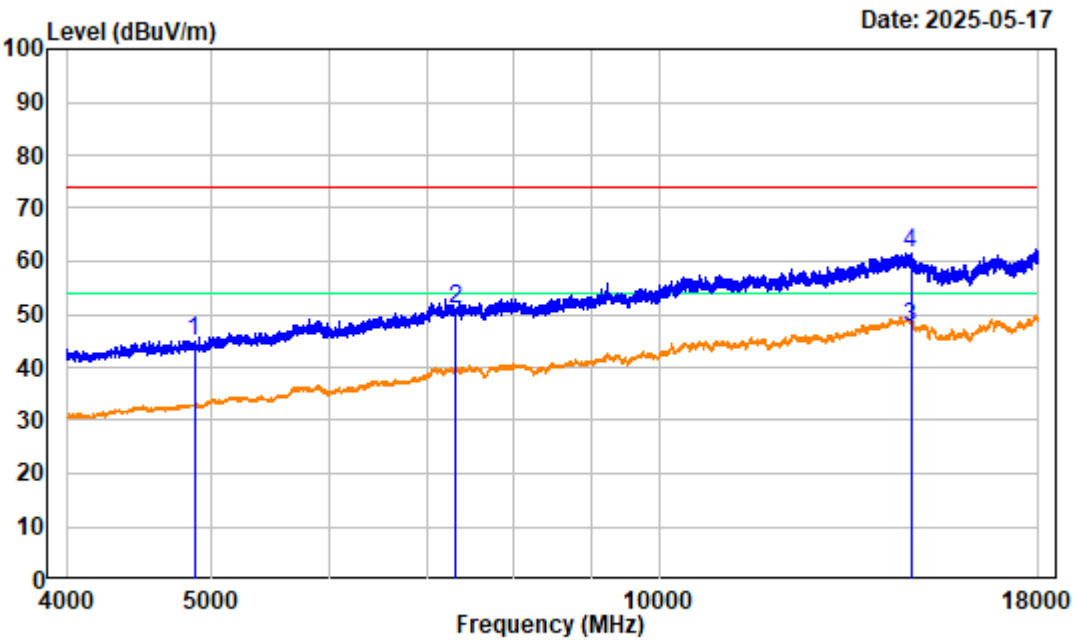


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.63	51.46	44.83	74.00	-29.17	peak
2	7311.000	-1.21	52.03	50.82	74.00	-23.18	peak
3	14774.750	7.89	39.78	47.67	54.00	-6.33	Average
4	14774.750	7.89	53.55	61.44	74.00	-12.56	Peak

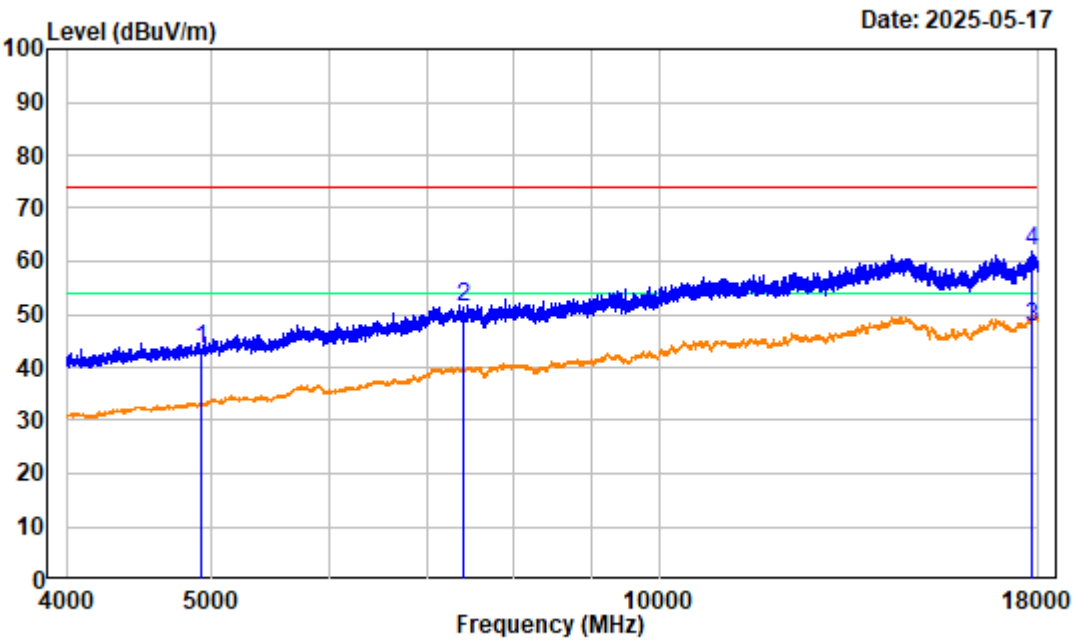

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	50.15	43.55	74.00	-30.45	peak
2	7386.000	-1.38	52.78	51.40	74.00	-22.60	peak
3	17809.250	7.71	39.97	47.68	54.00	-6.32	Average
4	17809.250	7.71	54.04	61.75	74.00	-12.25	Peak

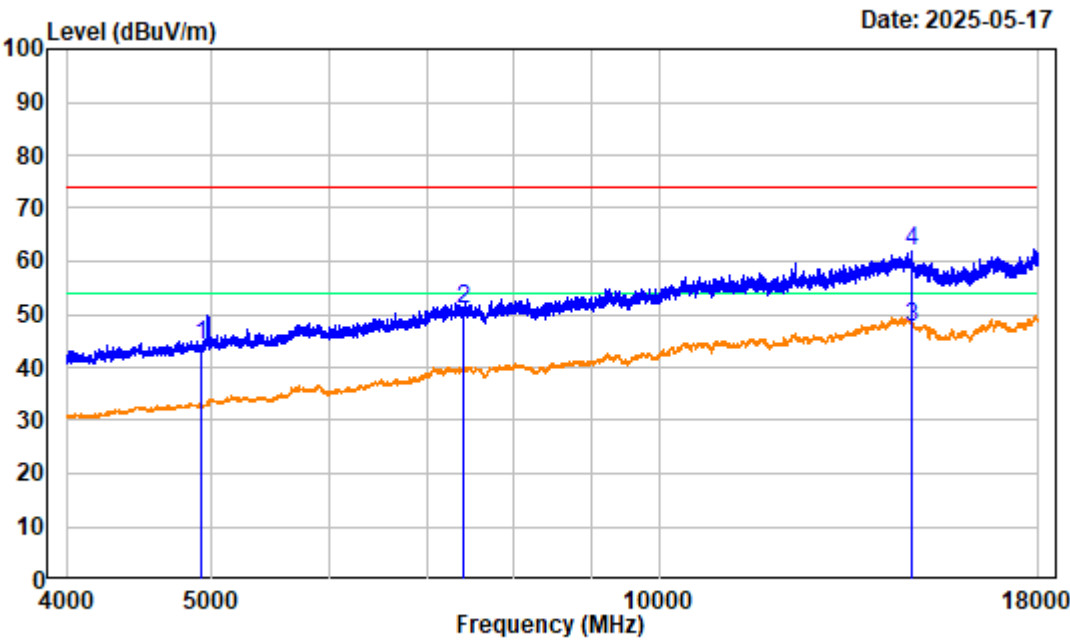

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-6.60	50.80	44.20	74.00	-29.80	peak
2	7386.000	-1.38	52.25	50.87	74.00	-23.13	peak
3	14778.250	7.88	39.83	47.71	54.00	-6.29	Average
4	14778.250	7.88	53.98	61.86	74.00	-12.14	Peak

For 802.11n40 mode

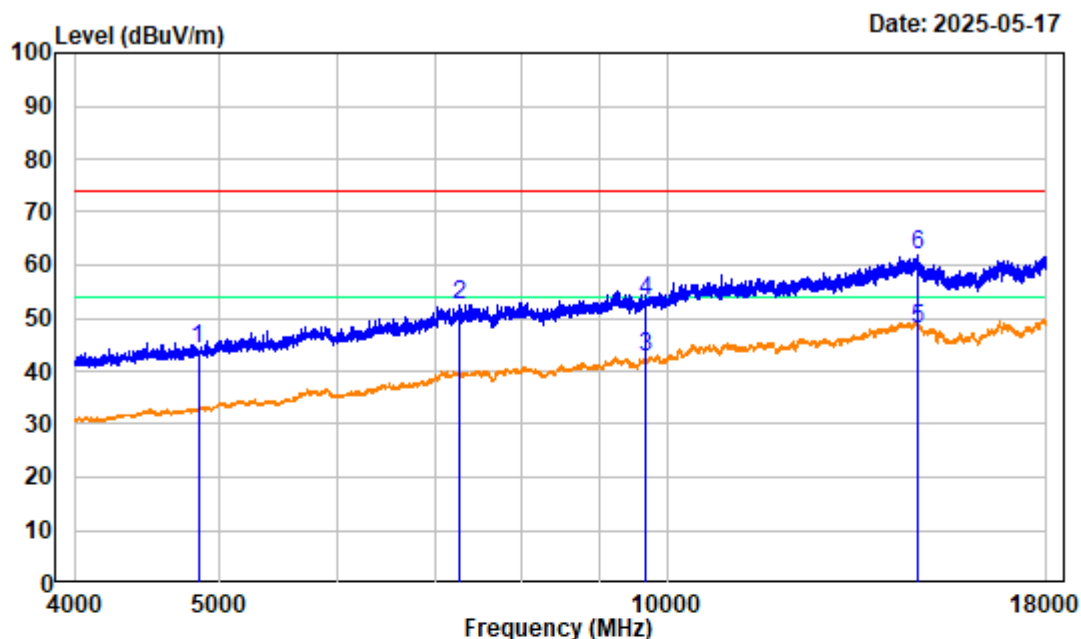

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R39298E-RF


Test Mode : Transmitting

Tester: Matt Liang

Note : 802.11n40 Low Channel 2422MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4844.000	-6.62	50.76	44.14	74.00	-29.86	peak
2	7266.000	-1.26	53.80	52.54	74.00	-21.46	peak
3	9687.500	1.85	40.93	42.78	54.00	-11.22	Average
4	9687.500	1.85	51.49	53.34	74.00	-20.66	Peak
5	14746.750	7.98	39.90	47.88	54.00	-6.12	Average
6	14746.750	7.98	53.77	61.75	74.00	-12.25	Peak

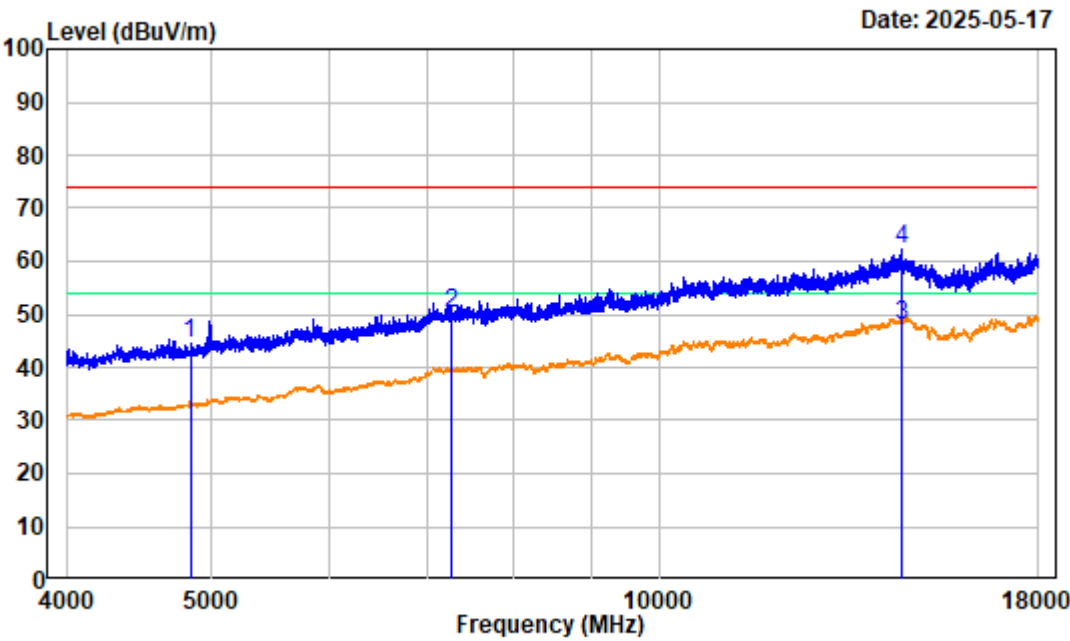


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n40 Low Channel 2422MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4844.000	-6.62	51.33	44.71	74.00	-29.29	peak
2	7266.000	-1.26	51.27	50.01	74.00	-23.99	peak
3	14557.750	8.90	38.84	47.74	54.00	-6.26	Average
4	14557.750	8.90	53.42	62.32	74.00	-11.68	Peak

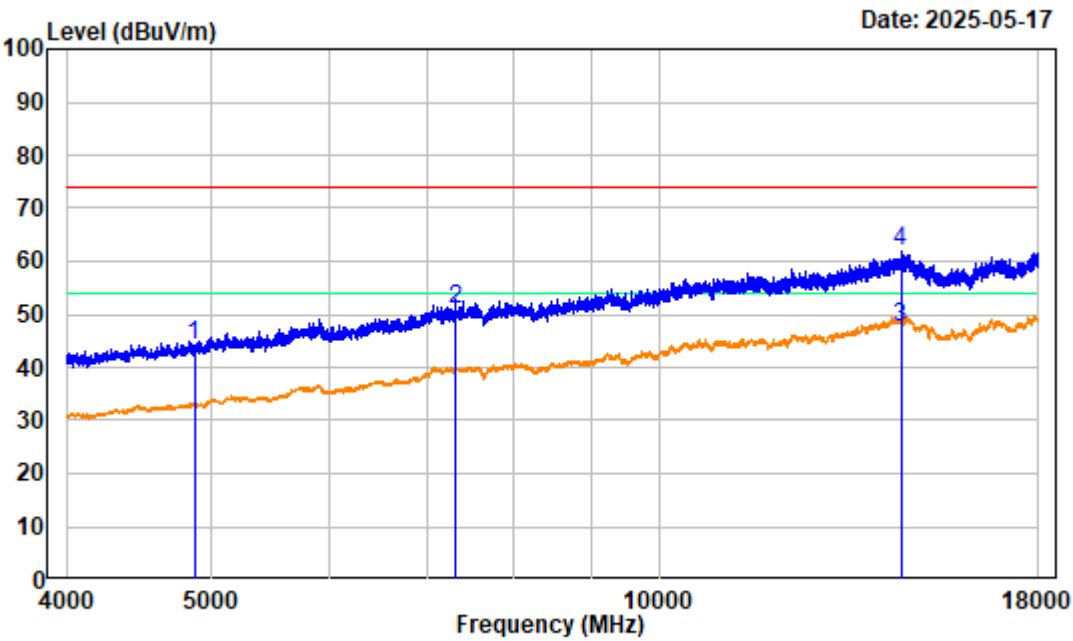


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n40 Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.63	50.90	44.27	74.00	-29.73	peak
2	7311.000	-1.21	52.02	50.81	74.00	-23.19	peak
3	14547.250	9.00	38.65	47.65	54.00	-6.35	Average
4	14547.250	9.00	52.87	61.87	74.00	-12.13	Peak

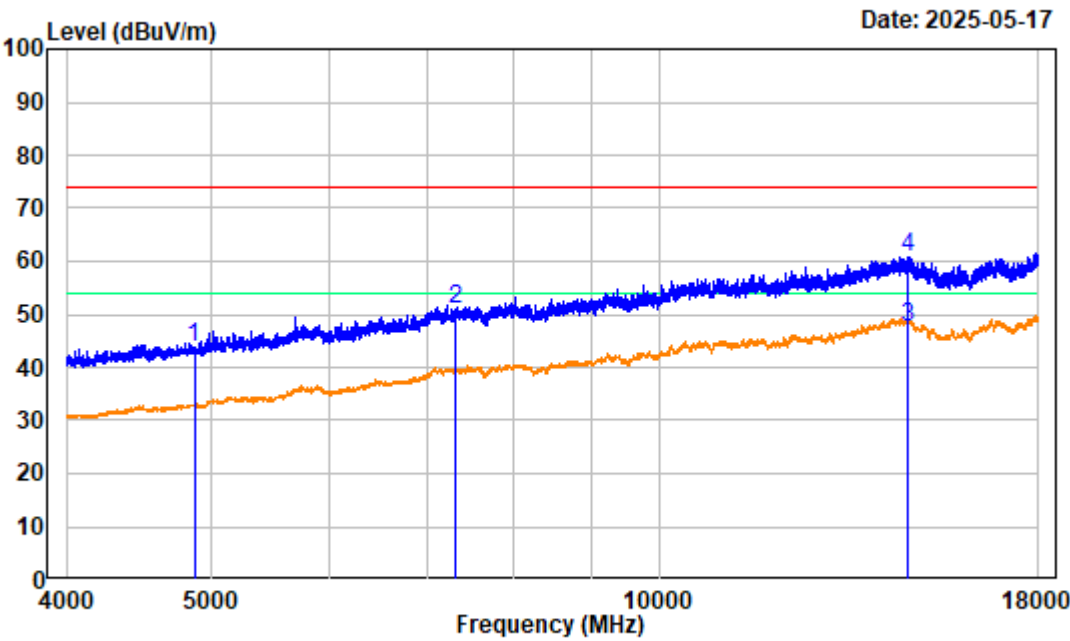

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n40 Mid Channel 2437MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-6.63	50.33	43.70	74.00	-30.30	peak
2	7311.000	-1.21	52.15	50.94	74.00	-23.06	peak
3	14718.750	8.05	39.57	47.62	54.00	-6.38	Average
4	14718.750	8.05	52.79	60.84	74.00	-13.16	Peak

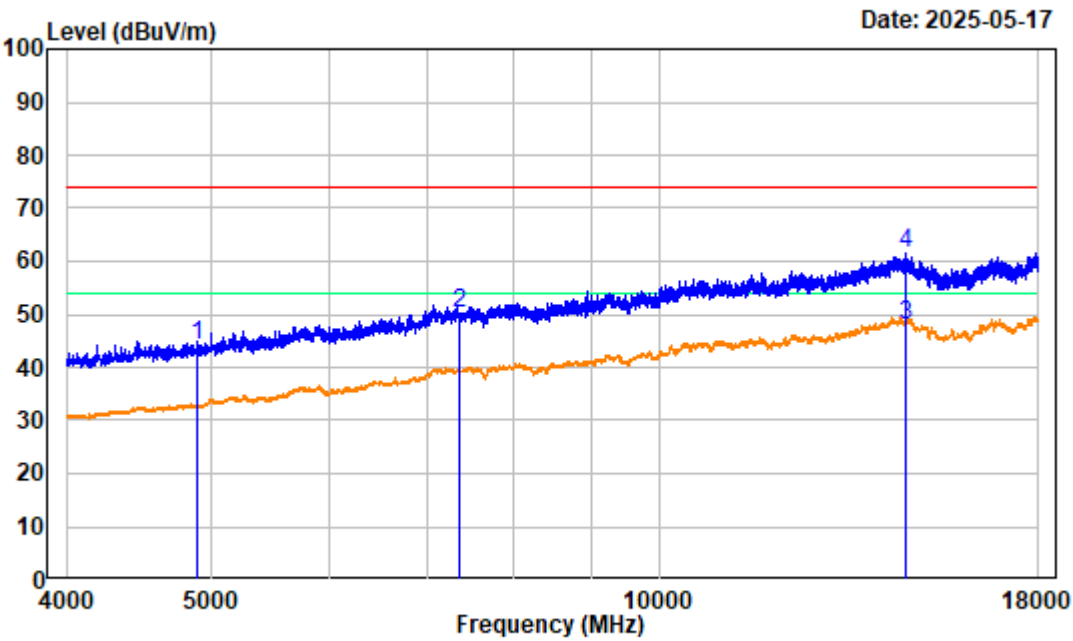

Site : chamber

Condition : 3m HORIZONTAL


Project No.: 2504R39298E-RF

Test Mode : TransmittingTester:Matt Liang

Note : 802.11n40 High Channel 2452MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	-6.63	50.81	44.18	74.00	-29.82	peak
2	7356.000	-1.31	51.67	50.36	74.00	-23.64	peak
3	14647.000	8.54	39.32	47.86	54.00	-6.14	Average
4	14647.000	8.54	52.91	61.45	74.00	-12.55	Peak

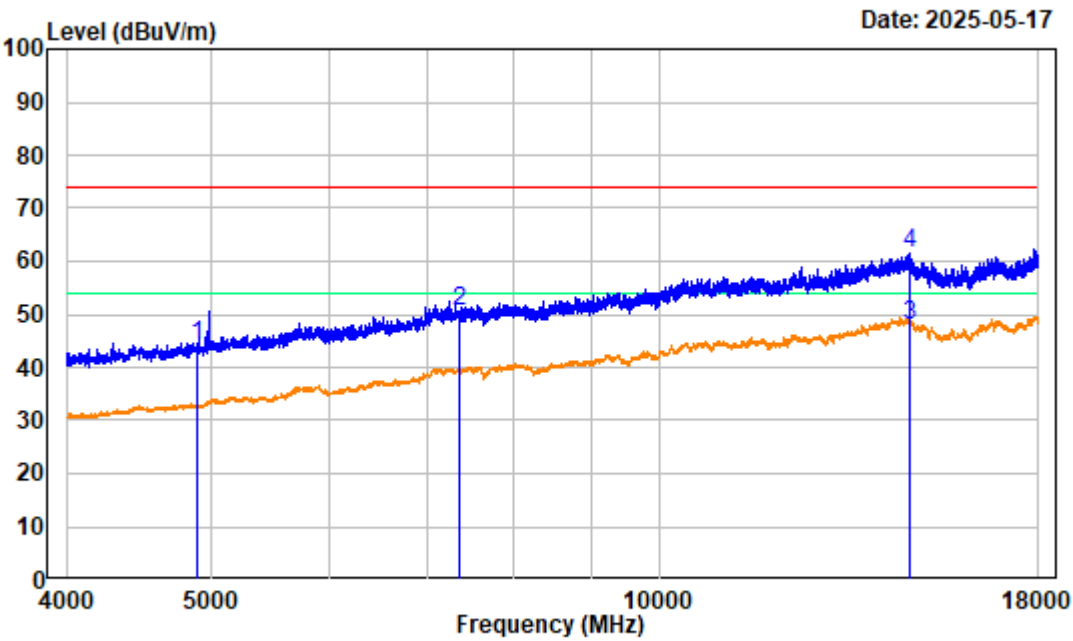

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R39298E-RF

Test Mode : Transmitting

Tester:Matt Liang


Note : 802.11n40 High Channel 2452MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4904.000	-6.63	50.66	44.03	74.00	-29.97	peak
2	7356.000	-1.31	51.93	50.62	74.00	-23.38	peak
3	14746.750	7.98	39.79	47.77	54.00	-6.23	Average
4	14746.750	7.98	53.41	61.39	74.00	-12.61	Peak


18GHz~25GHz:

For 802.11n20 mode

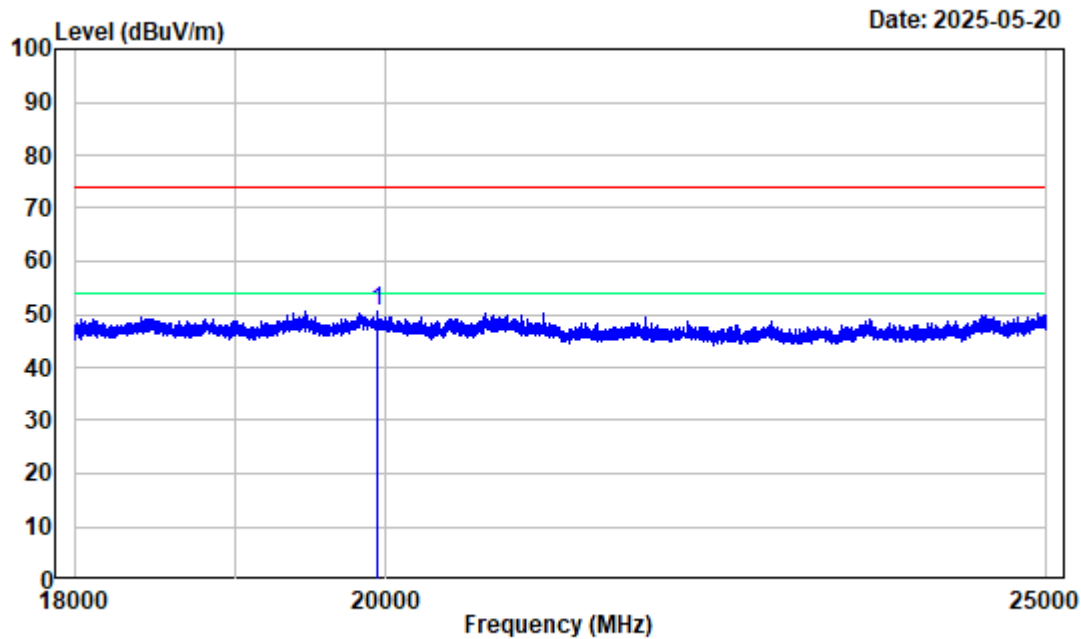

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19942.500	-7.32	57.81	50.49	74.00	-23.51	Peak

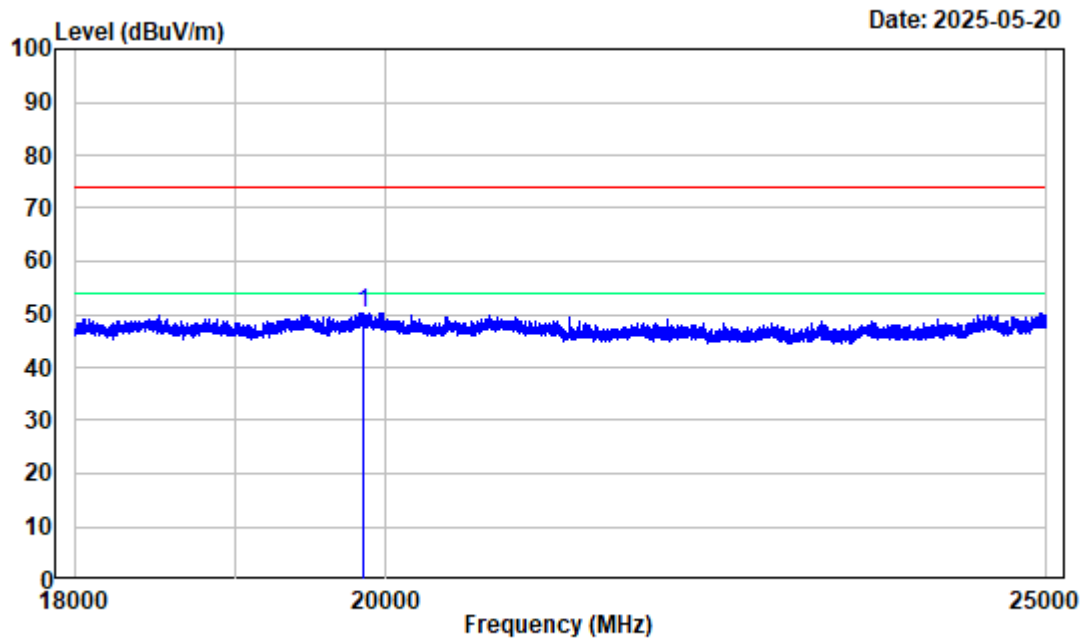


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19845.380	-7.47	57.77	50.30	74.00	-23.70	Peak


Band Edge:

For 802.11b mode

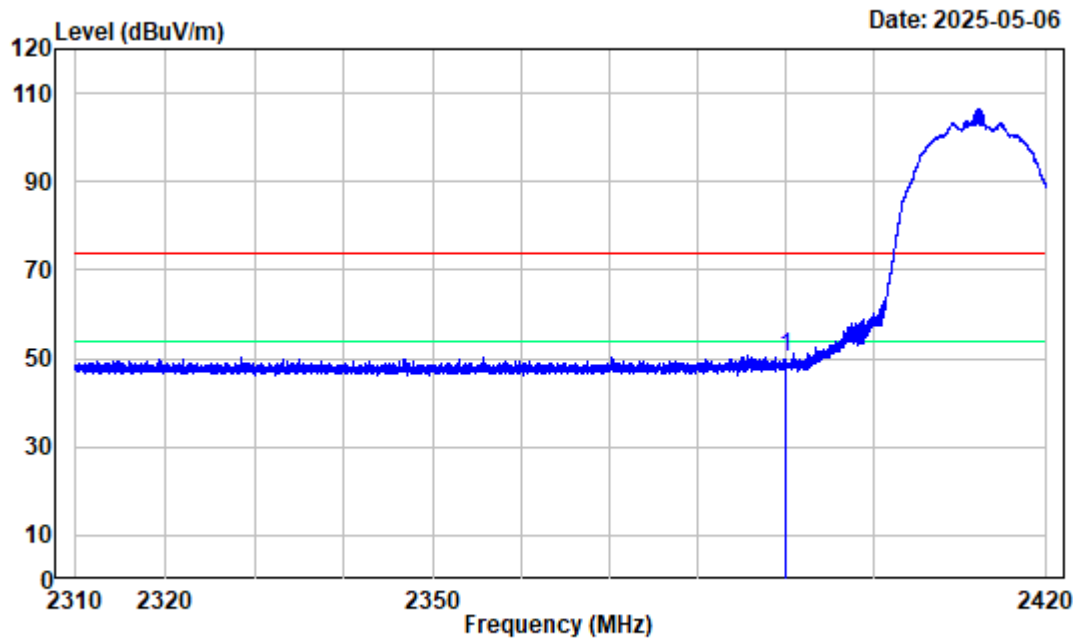


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	-10.24	60.29	50.05	74.00	-23.95	peak

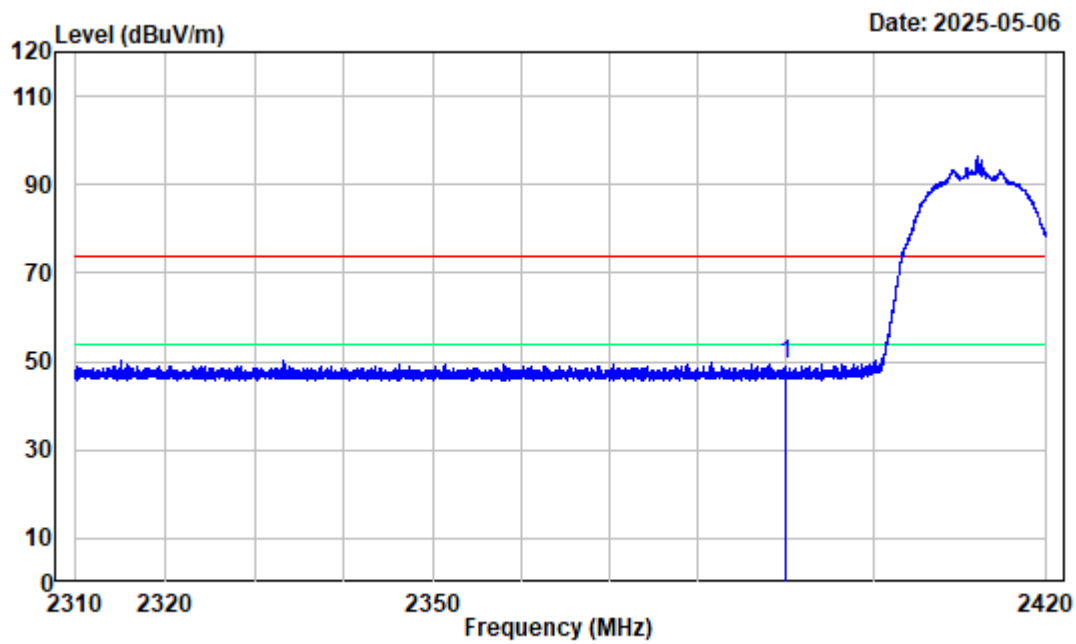


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2390.000	-10.24	59.56	49.32	74.00	-24.68 peak

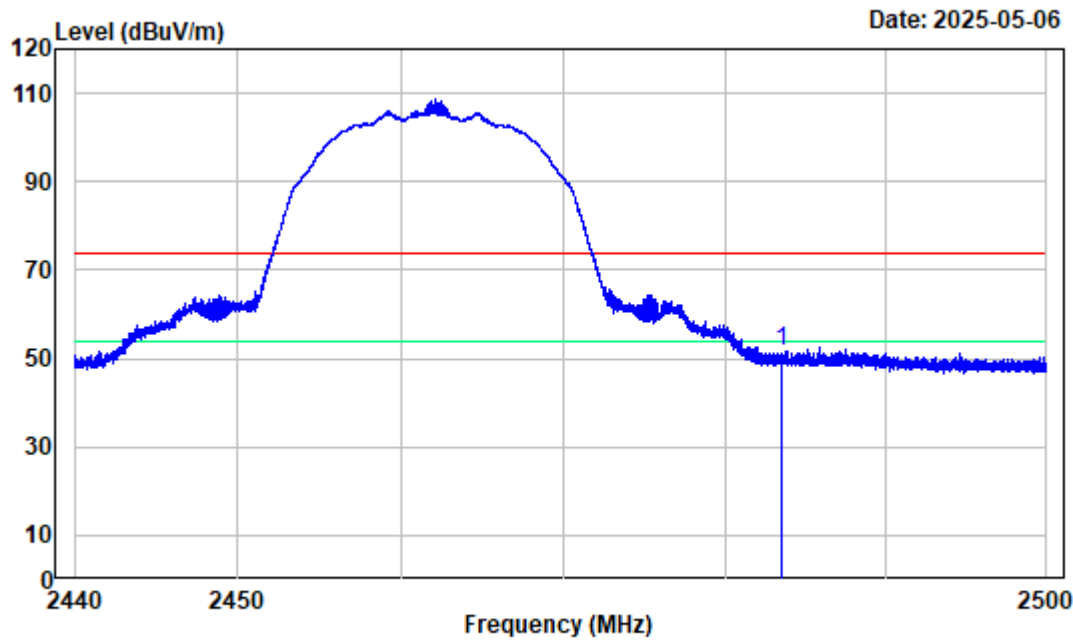

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz


Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.22	61.85	51.63	74.00	-22.37	peak

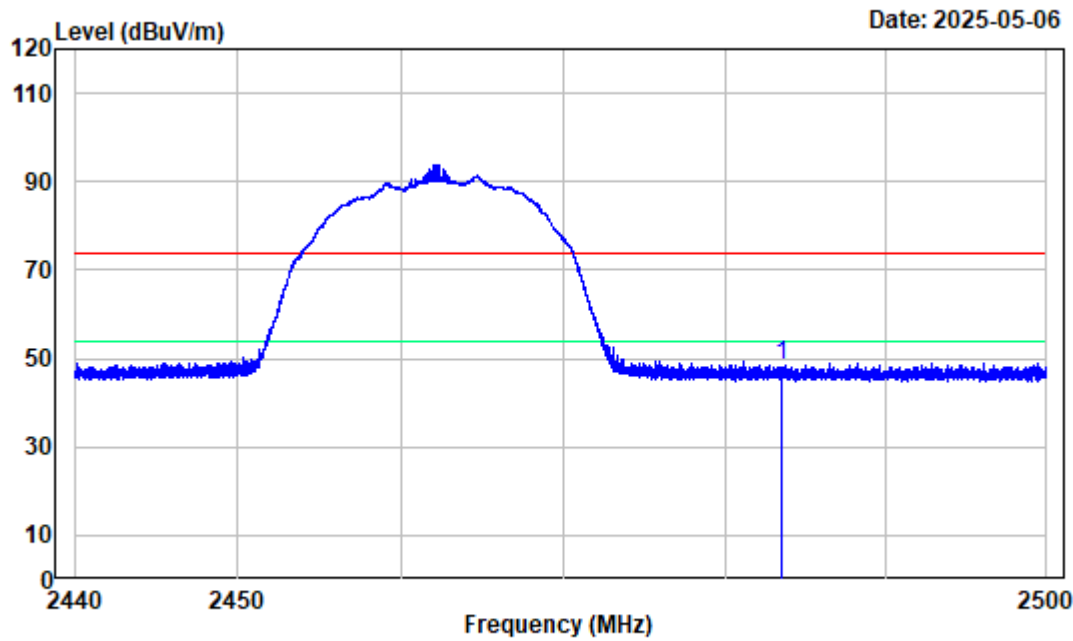

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11b High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	58.59	48.37	74.00	-25.63	peak

For 802.11g mode

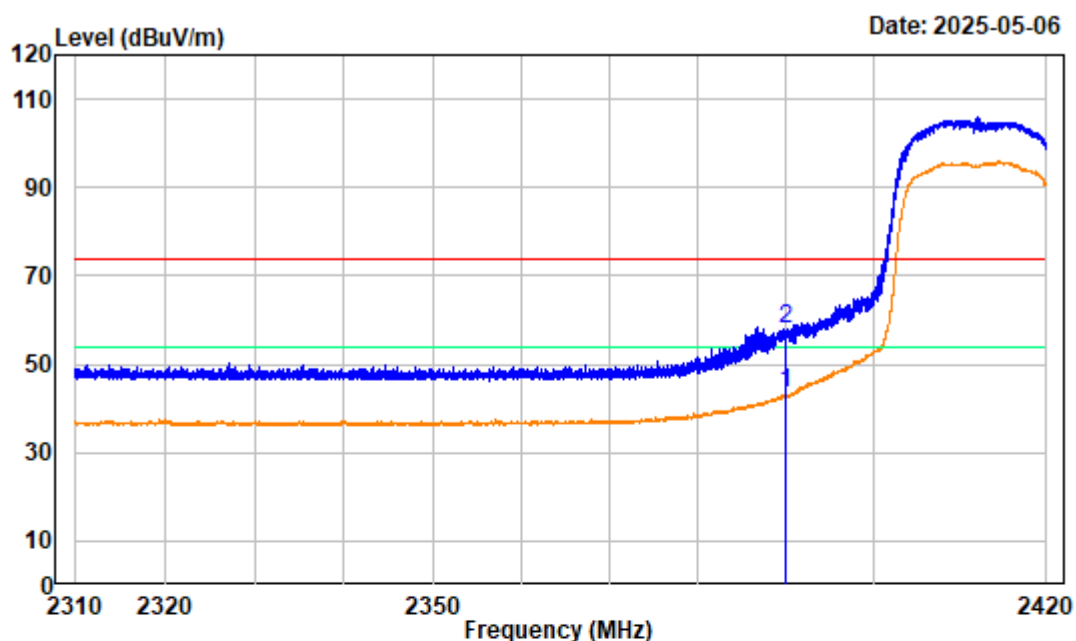

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R39298E-RF


Test Mode : Transmitting

Tester: Matt Liang

Note : 802.11g Low Channel 2412MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	53.59	43.35	54.00	-10.65	average
2	2390.000	-10.24	68.03	57.79	74.00	-16.21	peak

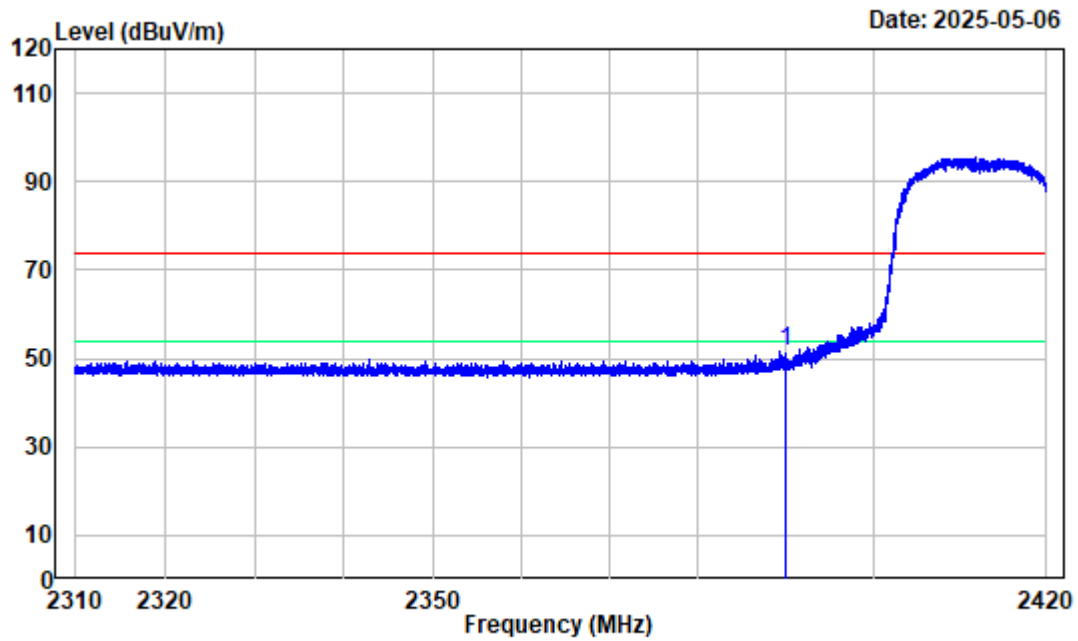


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11g Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2390.000	-10.24	61.71	51.47	74.00	-22.53	peak

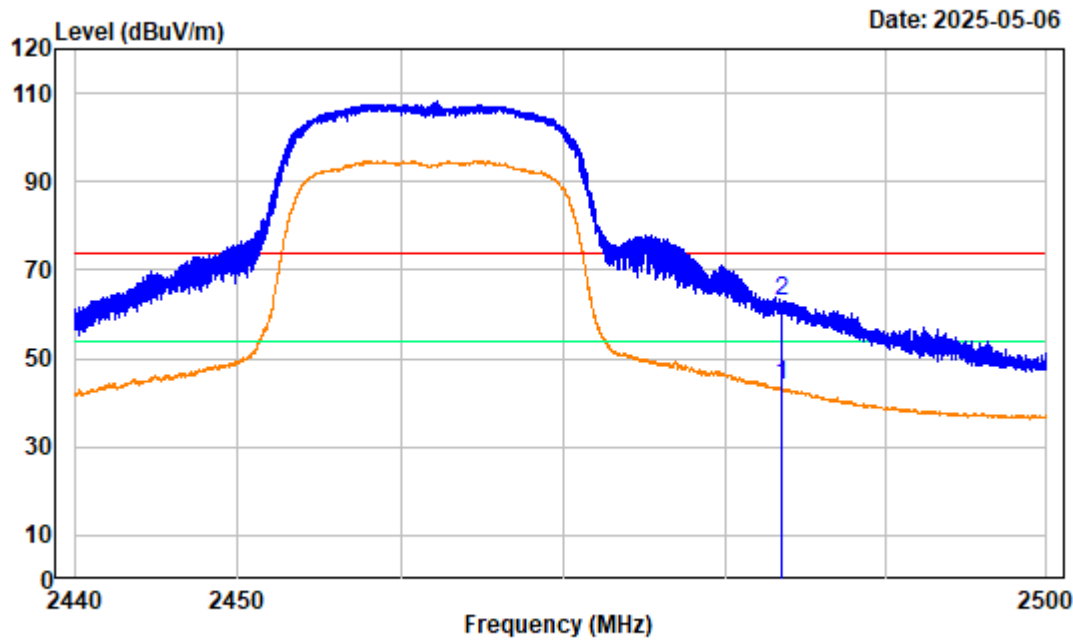

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11g High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	54.22	44.00	54.00	-10.00	average
2	2483.500	-10.22	73.35	63.13	74.00	-10.87	peak

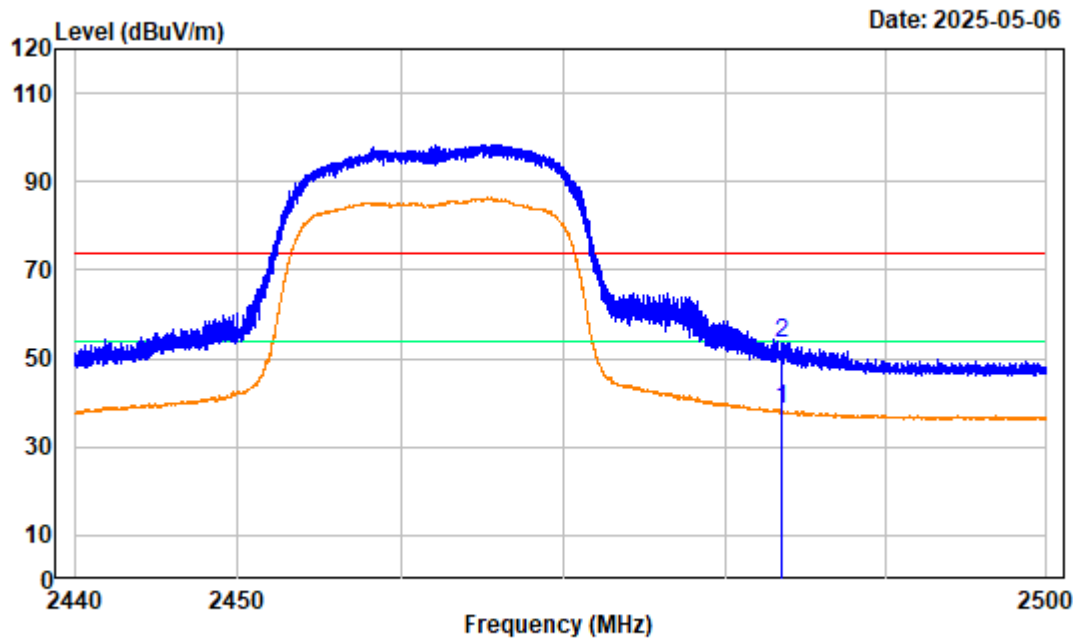

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11g High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	48.82	38.60	54.00	-15.40	average
2	2483.500	-10.22	63.71	53.49	74.00	-20.51	peak

For 802.11n20 mode

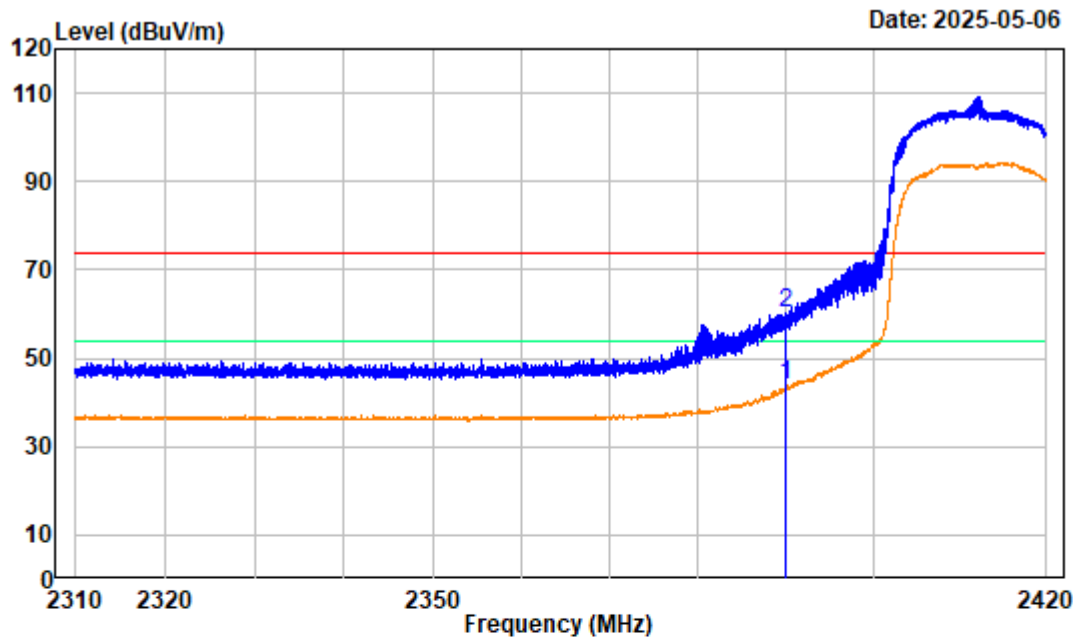


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	53.98	43.74	54.00	-10.26	average
2	2390.000	-10.24	70.54	60.30	74.00	-13.70	peak

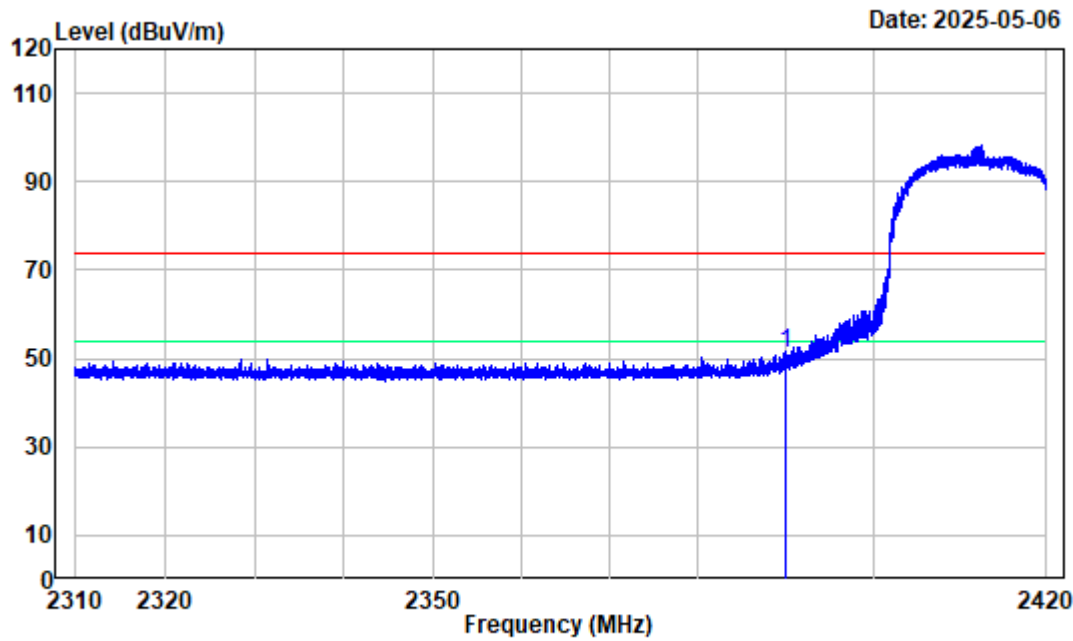


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 Low Channel 2412MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	61.50	51.26	74.00	-22.74	peak

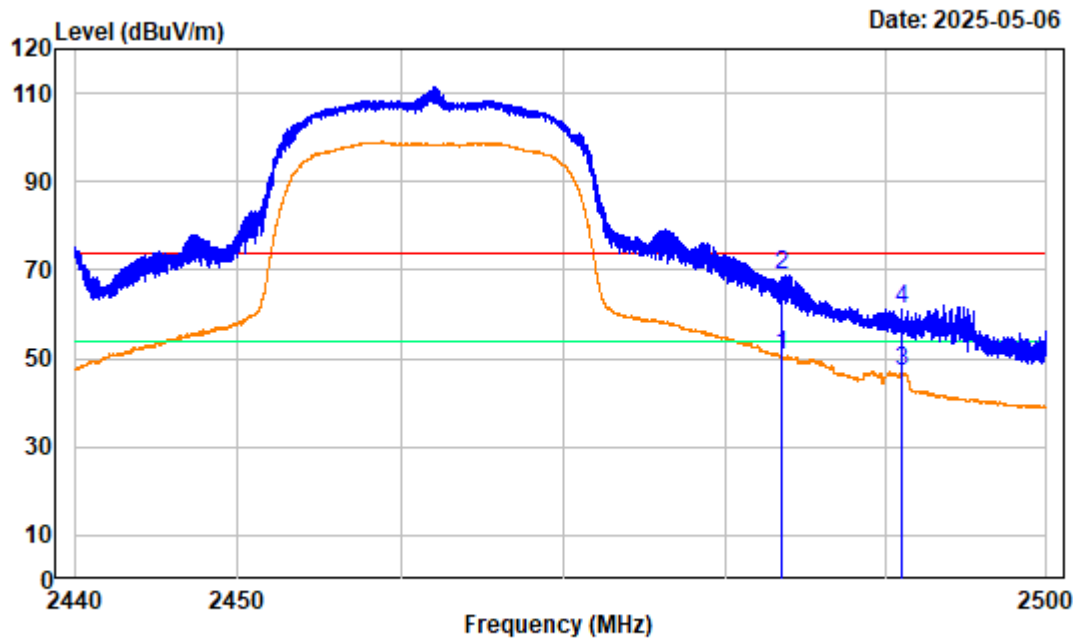

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	61.04	50.82	54.00	-3.18	average
2	2483.500	-10.22	79.02	68.80	74.00	-5.20	peak
3	2491.000	-10.24	57.18	46.94	54.00	-7.06	Average
4	2491.000	-10.24	71.55	61.31	74.00	-12.69	Peak

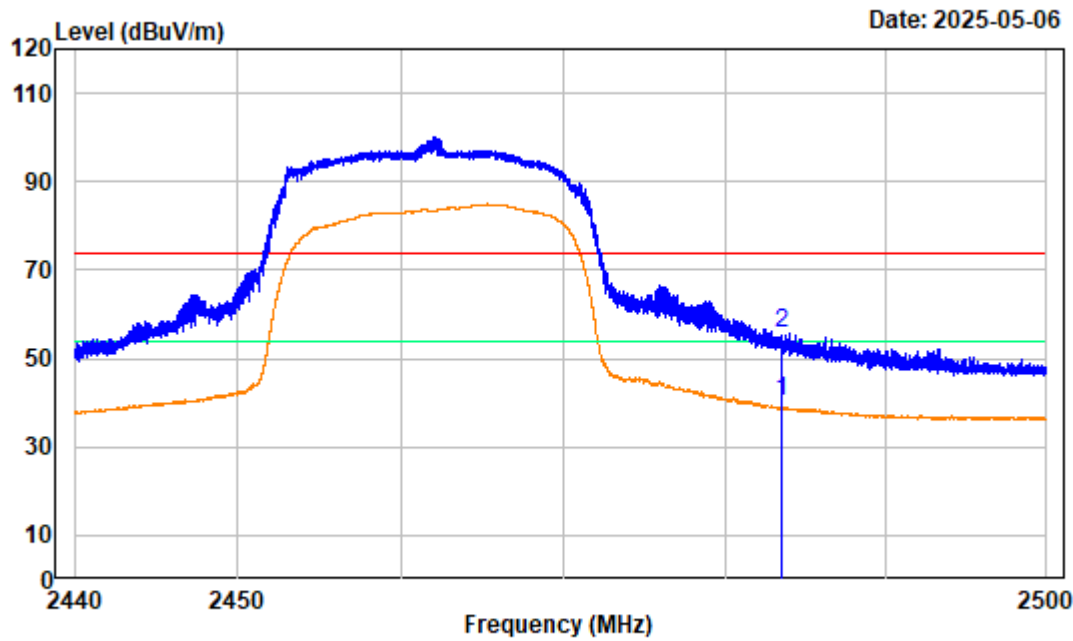

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n20 High Channel 2462MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	50.38	40.16	54.00	-13.84	average
2	2483.500	-10.22	65.99	55.77	74.00	-18.23	peak

For 802.11n40 mode

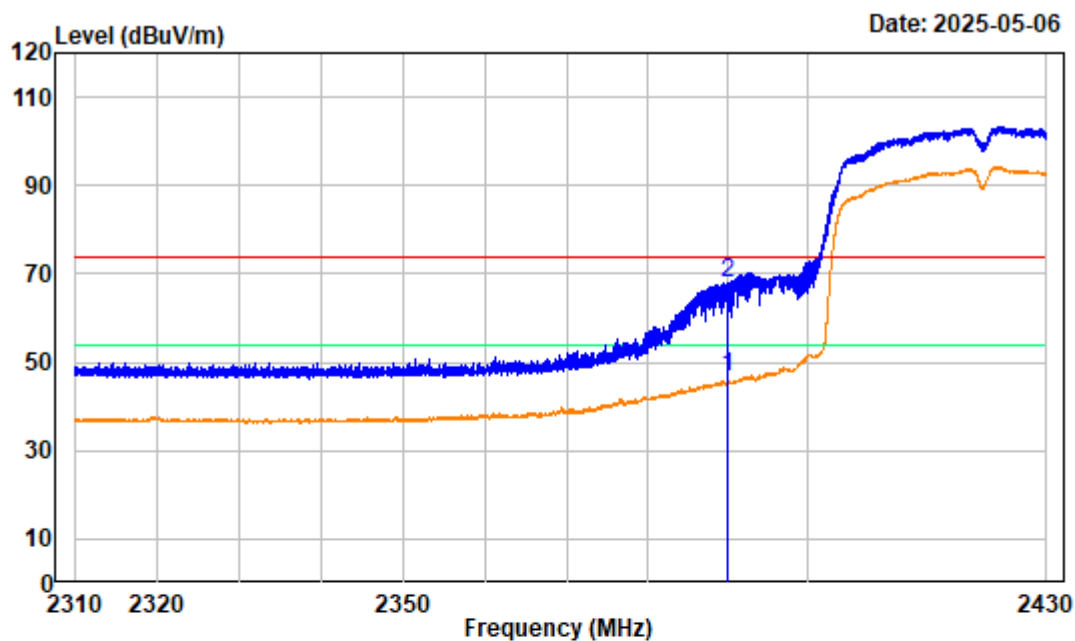

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R39298E-RF


Test Mode : Transmitting

Tester: Matt Liang

Note : 802.11n40 Low Channel 2422MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	56.67	46.43	54.00	-7.57	average
2	2390.000	-10.24	78.22	67.98	74.00	-6.02	peak

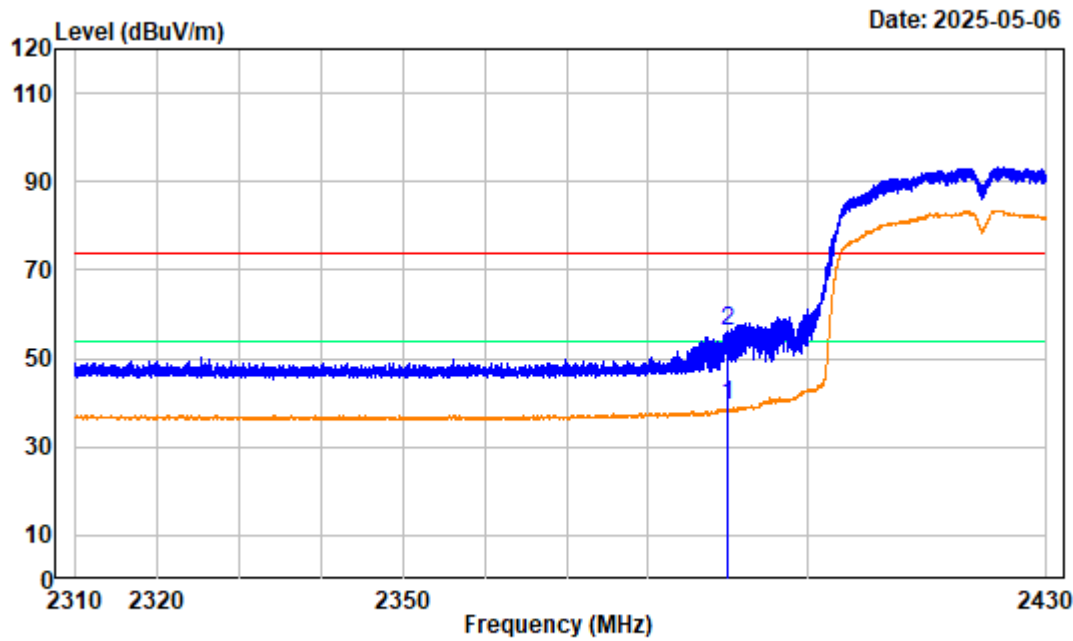


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n40 Low Channel 2422MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.24	49.78	39.54	54.00	-14.46	average
2	2390.000	-10.24	66.45	56.21	74.00	-17.79	peak

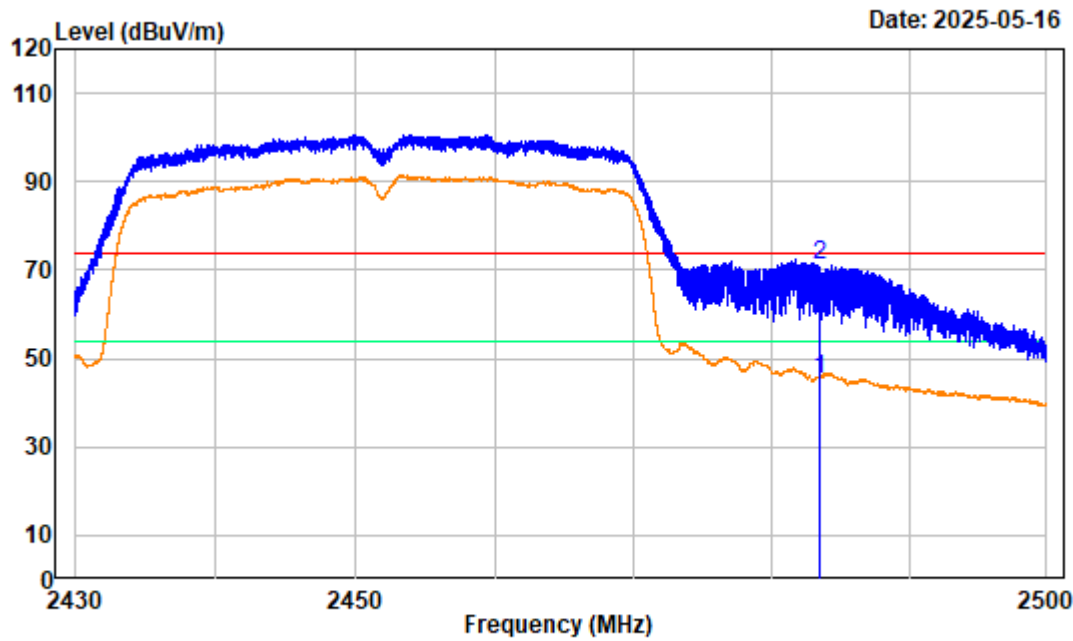

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n40 High Channel 2452MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	55.34	45.12	54.00	-8.88	Average
2	2483.500	-10.22	81.26	71.04	74.00	-2.96	peak

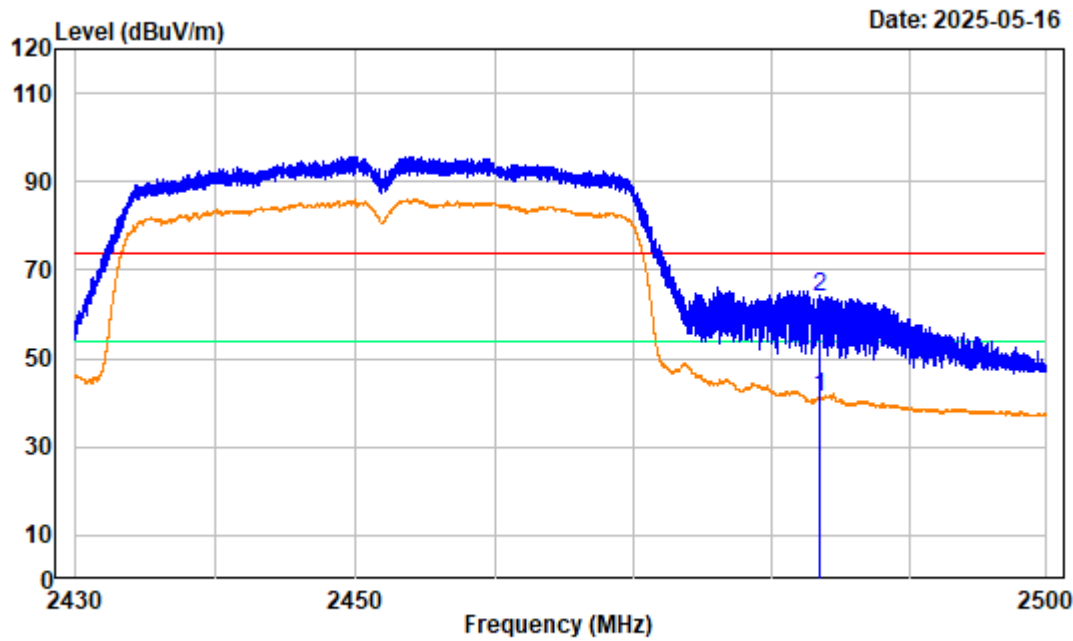

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R39298E-RF
Test Mode : Transmitting Tester:Matt Liang
Note : 802.11n40 High Channel 2452MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.22	51.24	41.02	54.00	-12.98	Average
2	2483.500	-10.22	74.18	63.96	74.00	-10.04	peak

FCC §15.247(a) (2)-6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

Applicable Standard


Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2020, section 11.8 and section 6.9

The steps for the first option are as follows:

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.



Test Data

Please refer to the Appendix.

FCC §15.247(b) (3)-MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


Test Procedure

According to ANSI C63.10-2020, section 11.9.1.2

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast responding diode detector.

According to ANSI C63.10-2020, section 11.9.2.3

- Measurement using a power meter (PM)(Method AVGPM)
 - a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent, if all of the conditions listed below are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - b) If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal as described in 11.6.
 - c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
 - d) Correct the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.



Test Data

Please refer to the Appendix.

FCC §15.247(d)-100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure


According to ANSI C63.10-2020, section 11.11

- a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- b) Set the RBW = 100 kHz.
c) Set the VBW $\geq [3 \times \text{RBW}]$.
d) Detector = peak.
e) Sweep time = No faster than coupled (auto) time.
f) Trace mode = max-hold.
g) Allow trace to fully stabilize.
h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.



Test Data

Please refer to the Appendix.

FCC §15.247(e)-POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2020, section 11.10.2

- Method PKPSD (peak PSD)

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span > 1.5 times the DTS bandwidth.
- Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

According to ANSI C63.10-2020, section 11.10.3

- Method AVGPSSD-1: (for duty cycle $\geq 98\%$)

The following procedure may be used when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has a power averaging (rms) detector, then it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously ($D \geq 98\%$), or else sweep triggering/signal gating must be implemented to help ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):


- Set instrument center frequency to DTS channel center frequency.
- Set span to > 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Detector = power averaging (rms) or sample detector (when rms not available).
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- Sweep time = auto couple.
- Employ trace averaging (rms) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

According to ANSI C63.10-2020, section 11.10.5

- Method AVGPSD-2: (for duty cycle < 98% and constant duty cycle)

The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e., $D < 98\%$), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than $\pm 2\%$):

- Measure the duty cycle (D) of the transmitter output signal as described in 11.6.
- Set instrument center frequency to DTS channel center frequency.
- Set span to > 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Detector = power averaging (rms) or sample detector (when rms not available).
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- Sweep time = auto couple.
- Do not use sweep triggering; allow sweep to "free run."
- Employ trace averaging (rms) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
- If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).



Test Data

Please refer to the Appendix.

APPENDIX (RF TEST RESULTS)

6dB Emission Bandwidth

Test Information:

Sample No.:	30SS-1	Test Date:	2025/05/06~2025/05/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cayde Hou	Test Result:	Pass


Environmental Conditions:

Temperature: (°C)	25.1~25.4	Relative Humidity: (%)	49~64	ATM Pressure: (kPa)	100.2
----------------------	-----------	------------------------------	-------	------------------------	-------

Test Data:


Mode	Test Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
802.11b	2412	12.252	≥0.5	Pass
	2437	12.252	≥0.5	Pass
	2462	12.172	≥0.5	Pass
802.11g	2412	15.215	≥0.5	Pass
	2437	15.255	≥0.5	Pass
	2462	15.255	≥0.5	Pass
802.11n20	2412	7.688	≥0.5	Pass
	2437	7.688	≥0.5	Pass
	2462	7.648	≥0.5	Pass
802.11n40	2422	28.509	≥0.5	Pass
	2437	28.428	≥0.5	Pass
	2452	27.948	≥0.5	Pass

802.11b_2412MHz

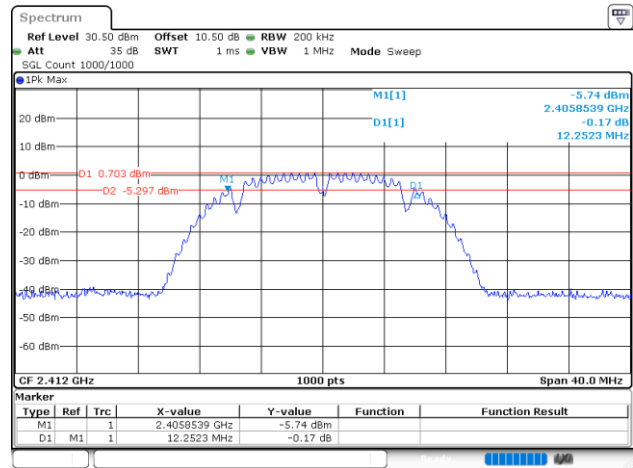


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:21:03

802.11b_2437MHz

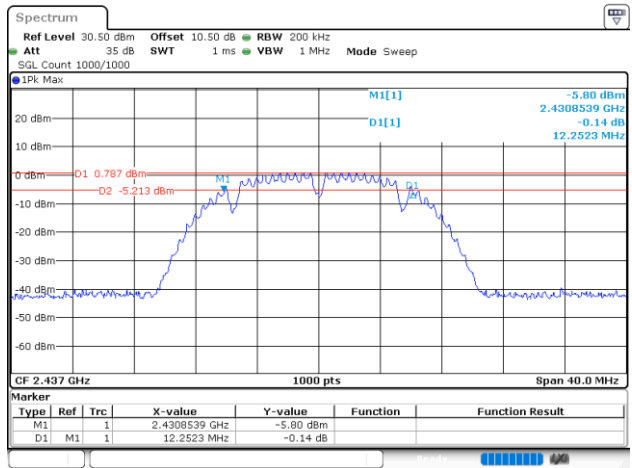


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:23:01

802.11b_2462MHz

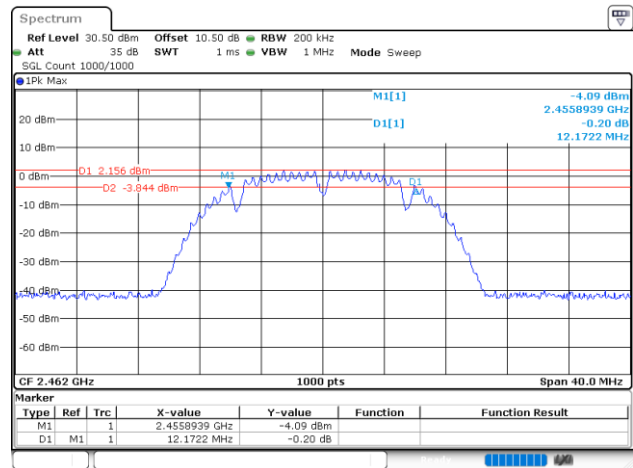


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:30:34

802.11g_2412MHz

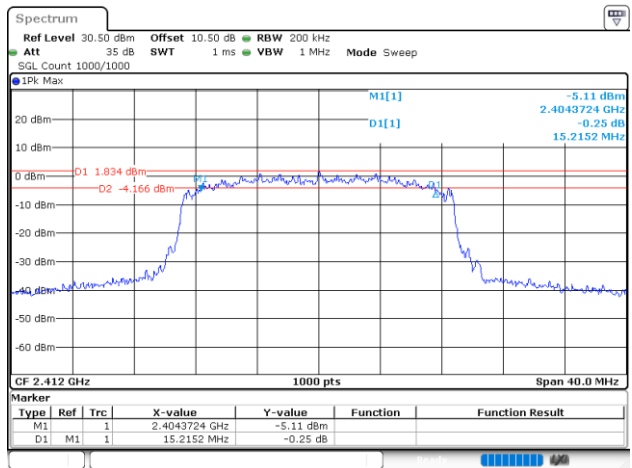


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:32:37

802.11g_2437MHz

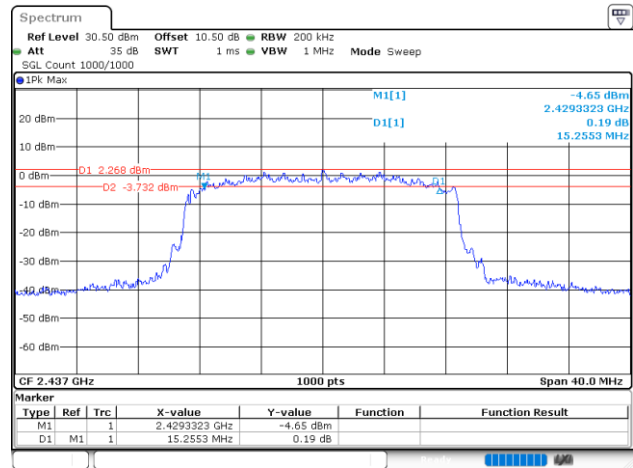


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:34:40

802.11g_2462MHz

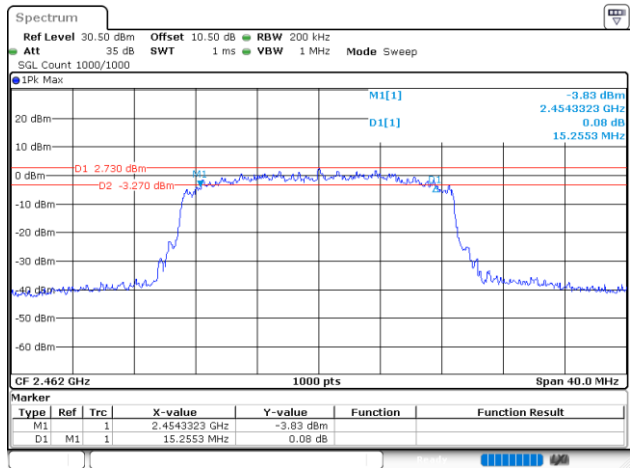


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:36:26

802.11n20_2412MHz

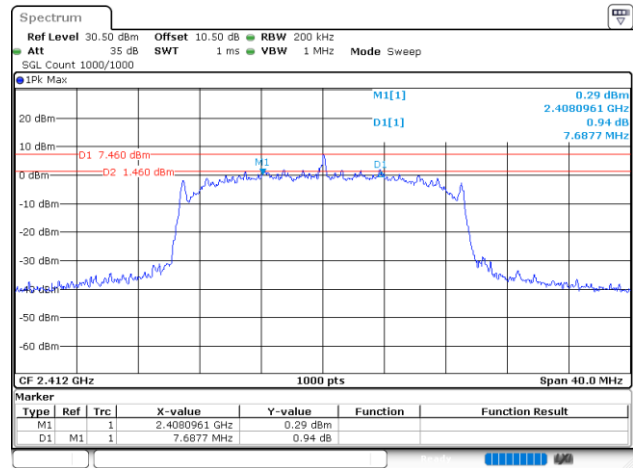


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:38:21

802.11n20_2437MHz

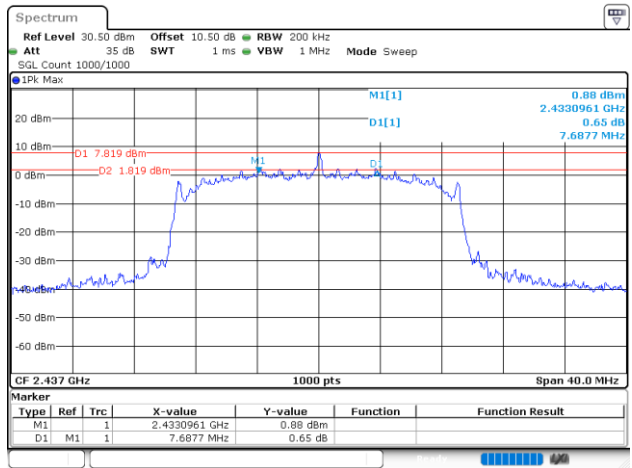


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:39:51

802.11n20_2462MHz

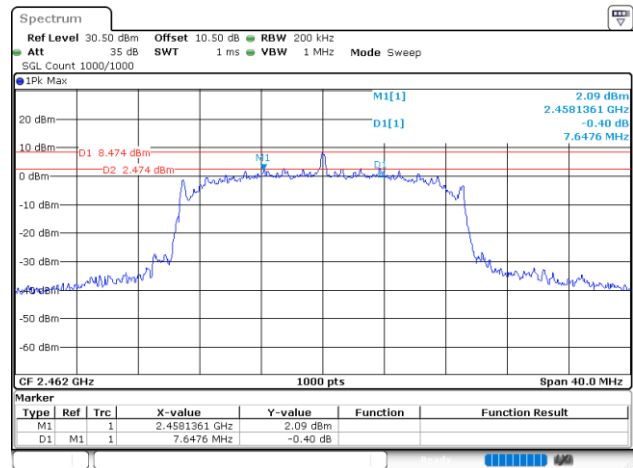


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:41:41

802.11n40_2422MHz

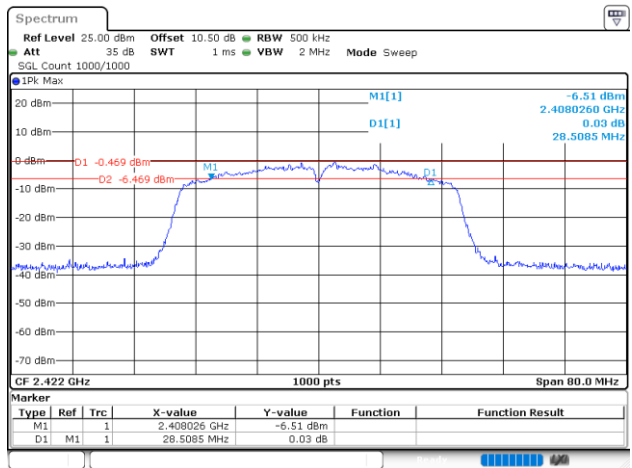


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 19.MAY.2025 15:17:28

802.11n40_2437MHz

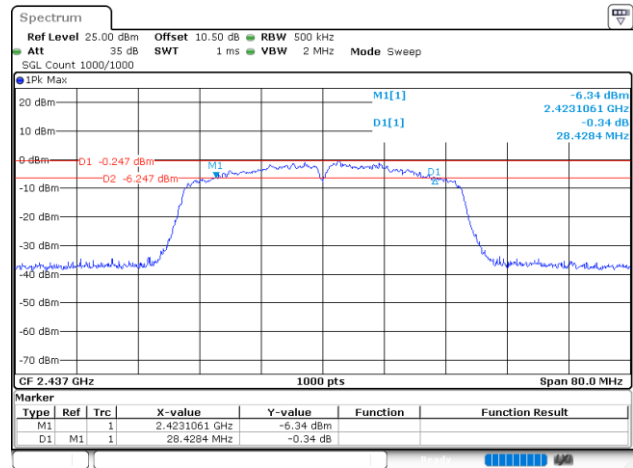

ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 19.MAY.2025 15:20:13

802.11n40_2452MHz

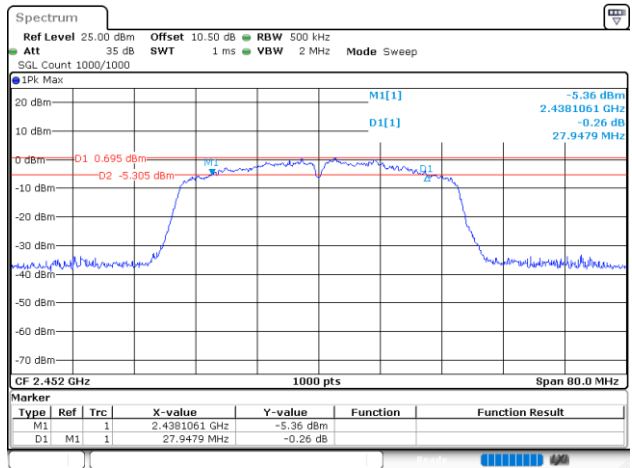

ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 19.MAY.2025 15:38:04

99% Occupied Bandwidth

Test Information:

Sample No.:	30SS-1	Test Date:	2025/05/06~2025/05/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cayde Hou	Test Result:	/


Environmental Conditions:

Temperature: (°C)	25.1~25.4	Relative Humidity: (%)	49~64	ATM Pressure: (kPa)	100.2
----------------------	-----------	------------------------------	-------	------------------------	-------


Test Data:

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11b	2412	14.960
	2437	14.960
	2462	14.960
802.11g	2412	17
	2437	17.040
	2462	17.120
802.11n20	2412	18.080
	2437	18.040
	2462	18.080
802.11n40	2422	35.440
	2437	35.440
	2452	35.440


802.11b_2412MHz

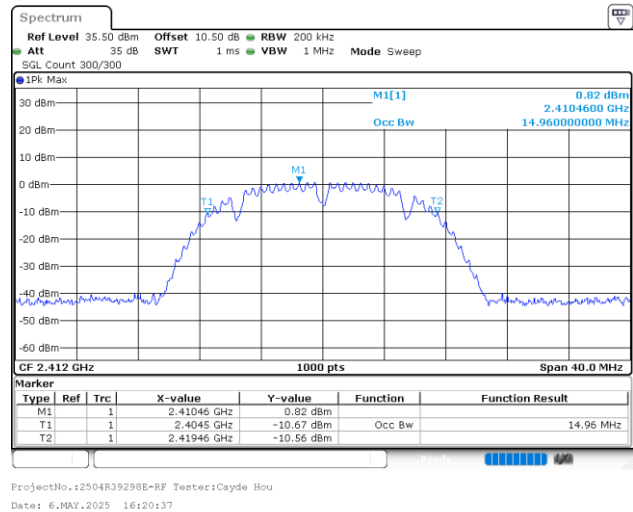


802.11b_2437MHz

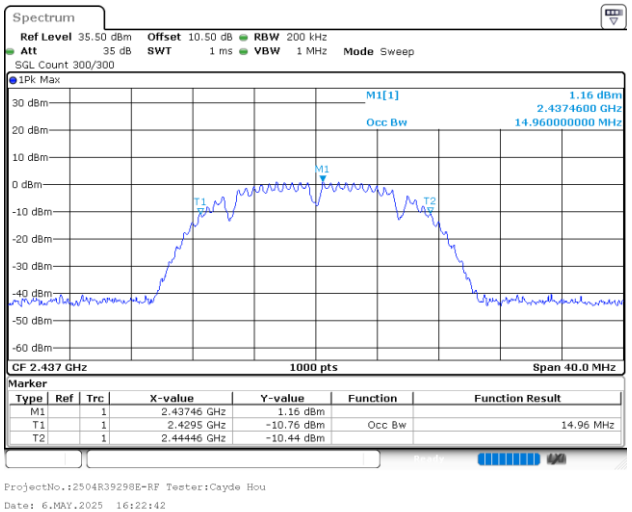


802.11b_2462MHz

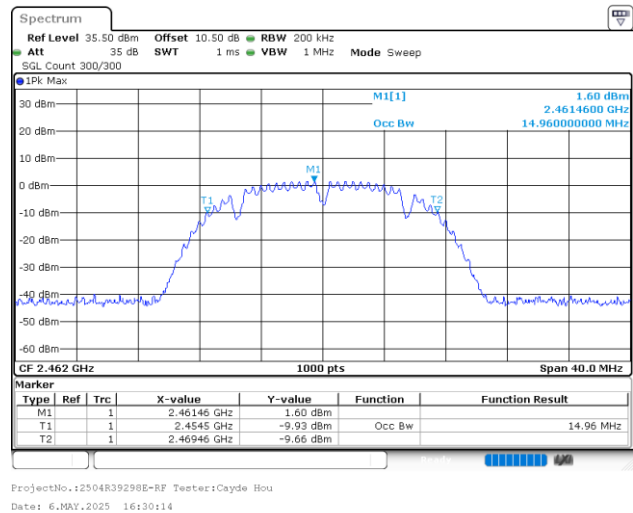


802.11g_2412MHz

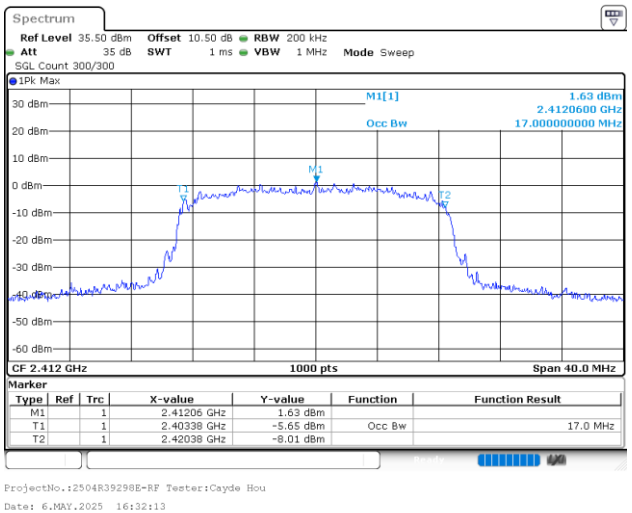


802.11g_2437MHz

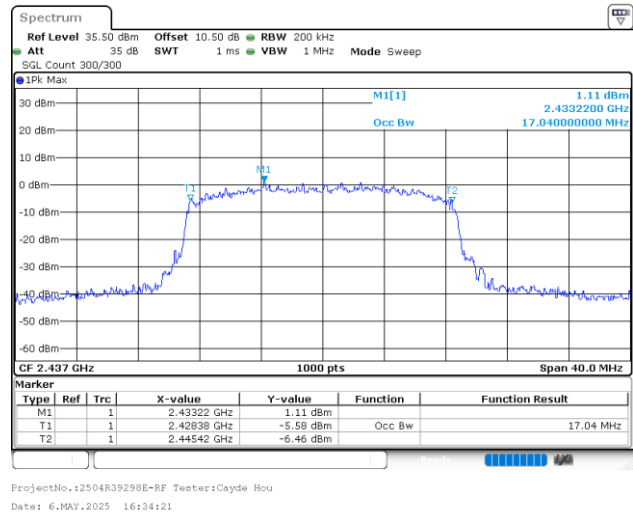


802.11g_2462MHz

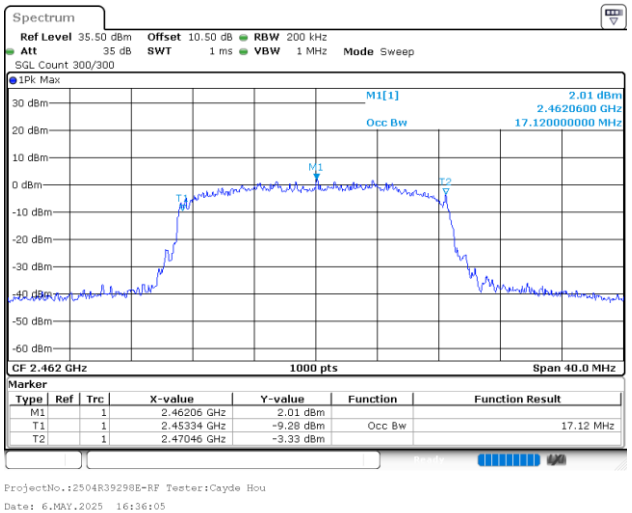


802.11n20_2412MHz

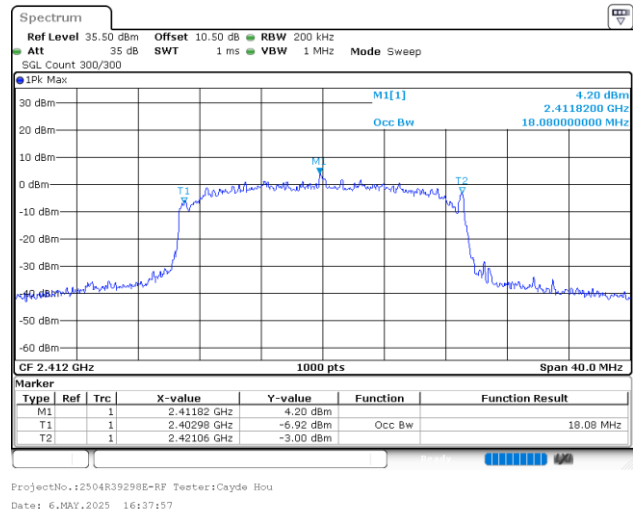


802.11n20_2437MHz

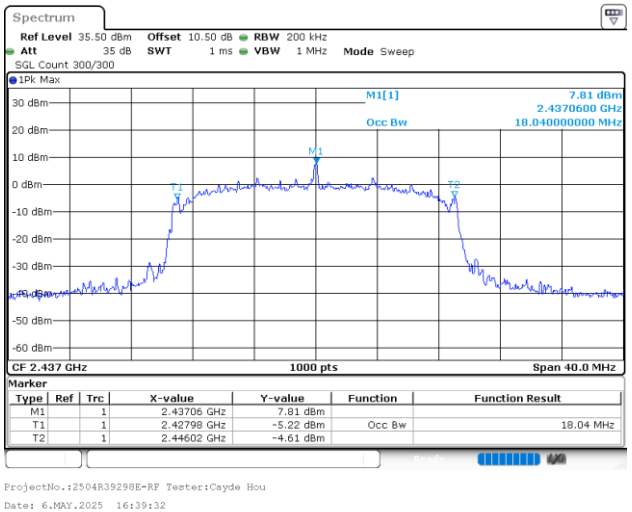


802.11n20_2462MHz

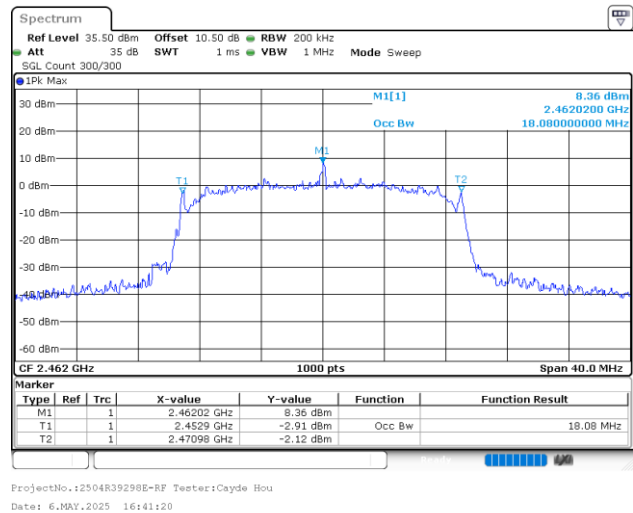


802.11n40_2422MHz

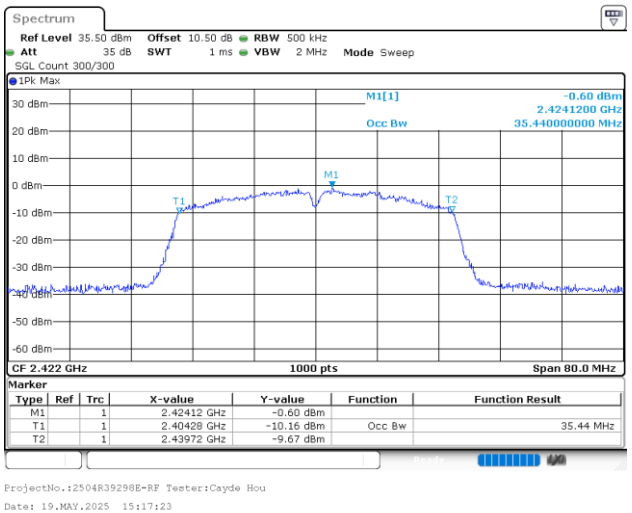

802.11n40_2437MHz

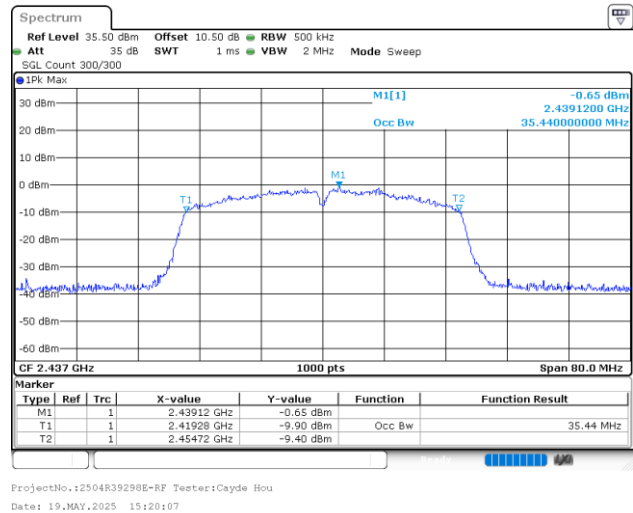

802.11n40_2452MHz

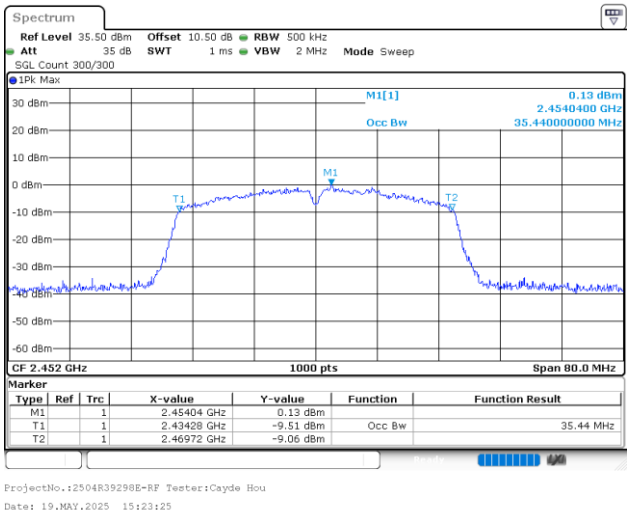

Maximum Conducted Output Power

Test Information:

Sample No.:	30SS-1	Test Date:	2025/05/06~2025/05/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cayde Hou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1~25.4	Relative Humidity: (%)	49~64	ATM Pressure: (kPa)	100.2
----------------------	-----------	------------------------------	-------	------------------------	-------

Test Data:

Mode	Test Frequency (MHz)	Peak Output Power(dBm)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11b	2412	14.41	10.43	30	Pass
	2437	14.57	10.71	30	Pass
	2462	15.02	11.14	30	Pass
802.11g	2412	19.53	10.58	30	Pass
	2437	19.63	10.85	30	Pass
	2462	19.75	11.22	30	Pass
802.11n20	2412	20.17	11.53	30	Pass
	2437	20.29	11.83	30	Pass
	2462	20.39	12.18	30	Pass
802.11n40	2422	20.24	8.37	30	Pass
	2437	20.17	8.47	30	Pass
	2452	20.31	8.80	30	Pass

Power Spectral Density

Test Information:

Sample No.:	30SS-1	Test Date:	2025/05/30
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cayde Hou	Test Result:	Pass


Environmental Conditions:

Temperature: (°C)	24.4	Relative Humidity: (%)	48	ATM Pressure: (kPa)	100.2
----------------------	------	------------------------------	----	------------------------	-------

Test Data:


Mode	Test Frequency (MHz)	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	2412	-14.20	8	Pass
	2437	-14.05	8	Pass
	2462	-13.43	8	Pass
802.11g	2412	-14.59	8	Pass
	2437	-14.27	8	Pass
	2462	-13.79	8	Pass
802.11n20	2412	-12.99	8	Pass
	2437	-12.61	8	Pass
	2462	-12.14	8	Pass
802.11n40	2422	-19.88	8	Pass
	2437	-19.61	8	Pass
	2452	-19.19	8	Pass

802.11b_2412MHz

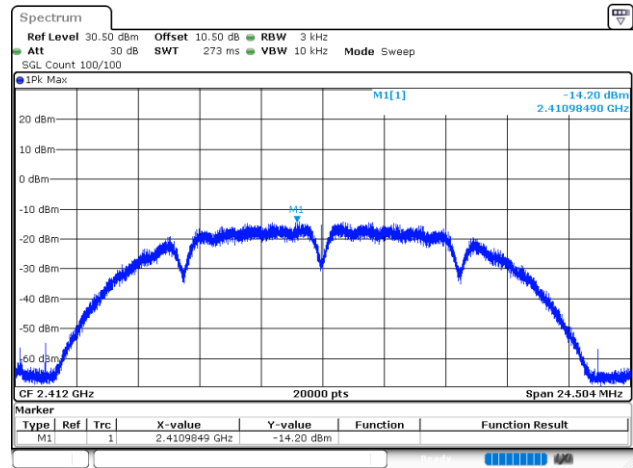


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 30.MAY.2025 09:50:33

802.11b_2437MHz

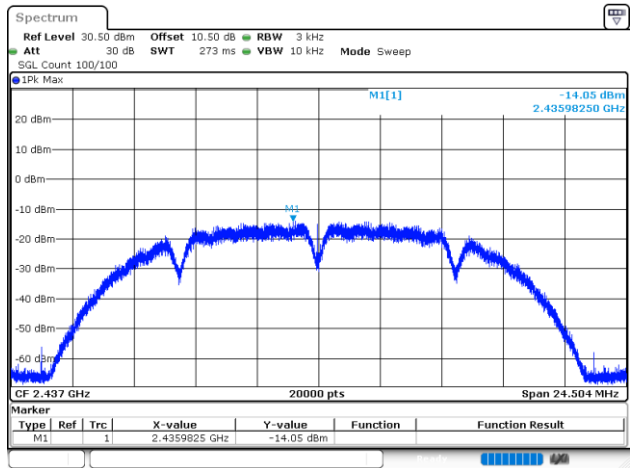


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 30.MAY.2025 09:51:53

802.11b_2462MHz

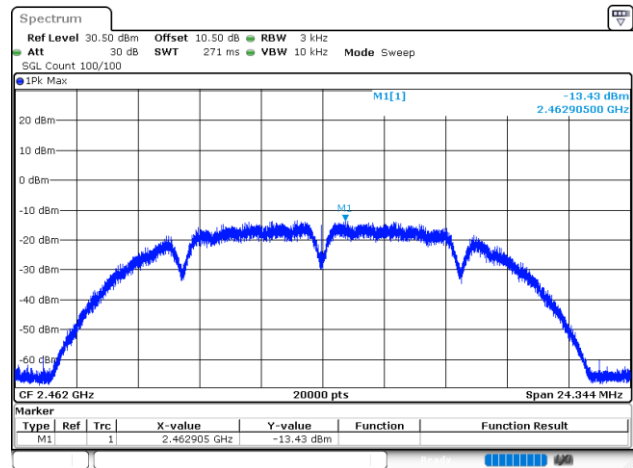


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 30.MAY.2025 09:52:58

802.11g_2412MHz

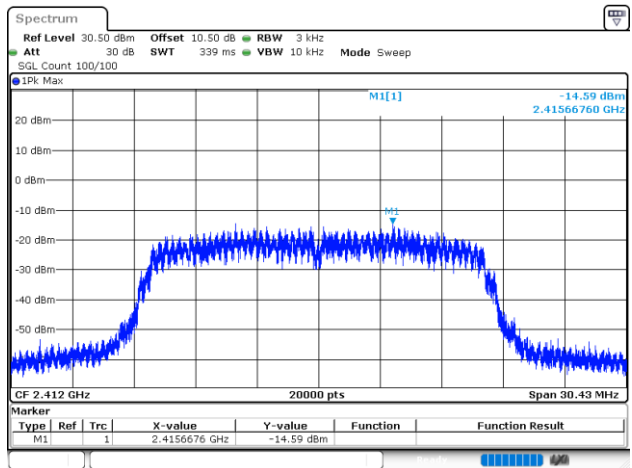


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 30.MAY.2025 09:54:51

802.11g_2437MHz

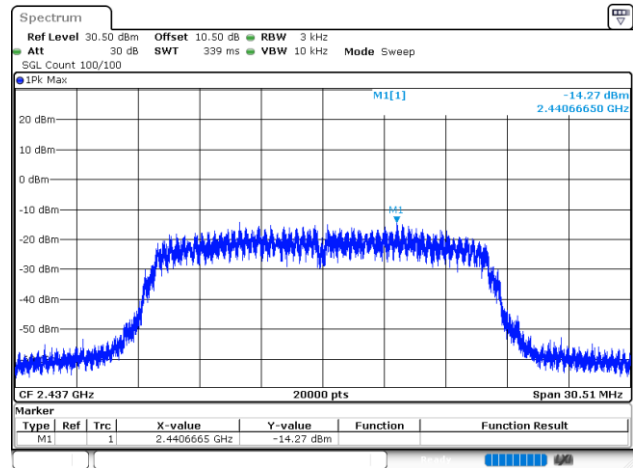


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 30.MAY.2025 09:55:50

802.11g_2462MHz

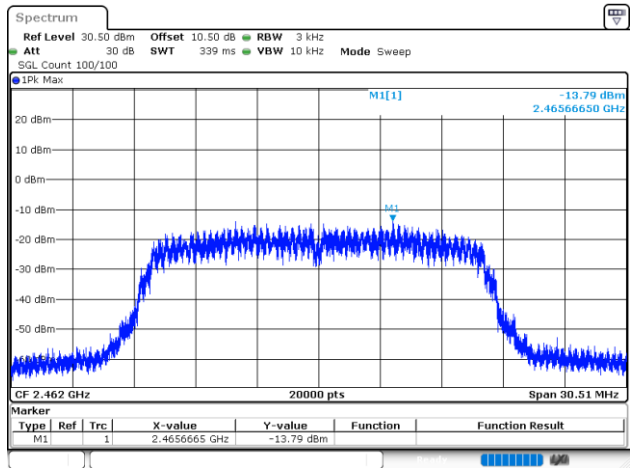


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 30.MAY.2025 09:56:45

802.11n20_2412MHz

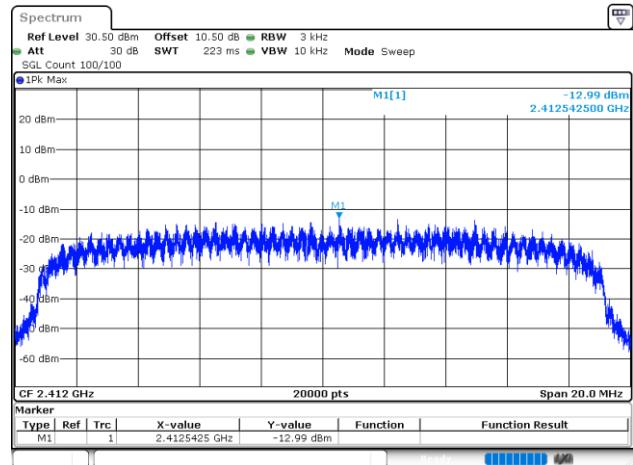


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 30.MAY.2025 09:44:12

802.11n20_2437MHz

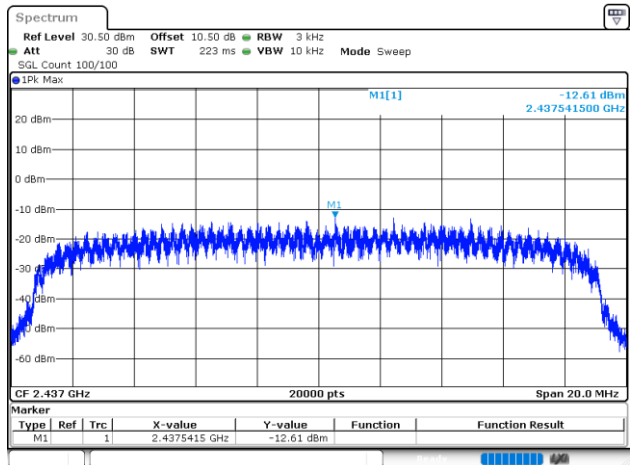


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 30.MAY.2025 09:46:15

802.11n20_2462MHz

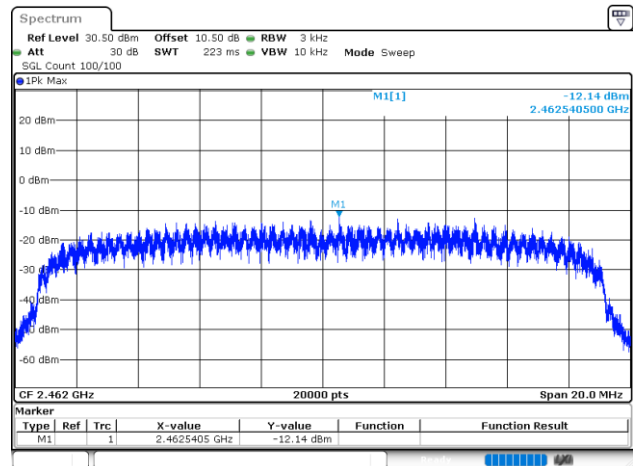


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 30.MAY.2025 09:47:48

802.11n40_2422MHz

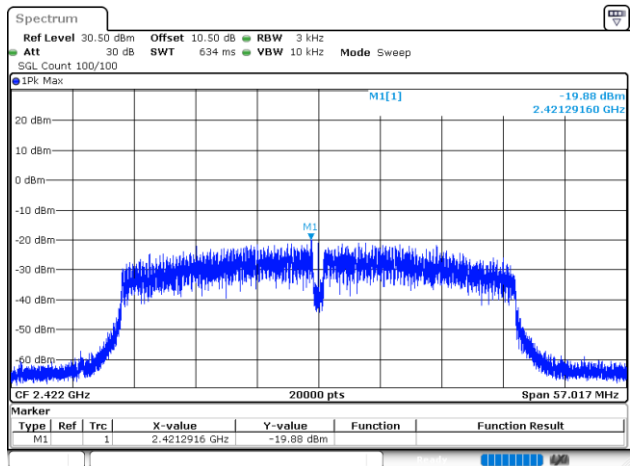


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 30.MAY.2025 09:59:05

802.11n40_2437MHz

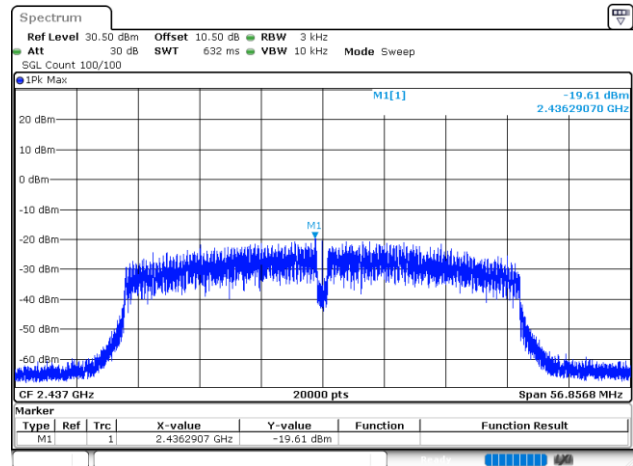

ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 30.MAY.2025 10:00:34

802.11n40_2452MHz

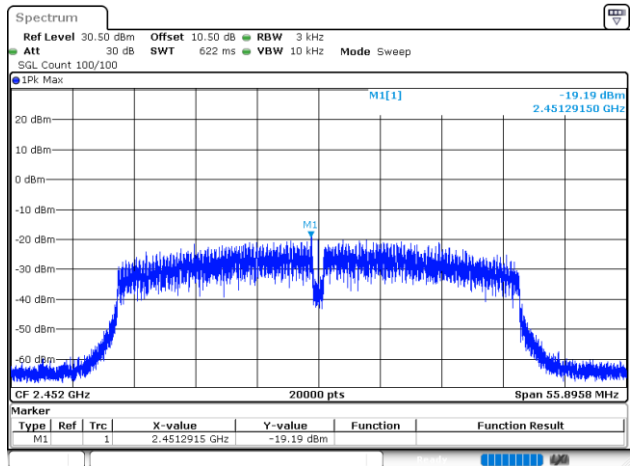

ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 30.MAY.2025 10:02:28

100 kHz Bandwidth of Frequency Band Edge

Test Information:


Sample No.:	30SS-1	Test Date:	2025/05/06~2025/05/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cayde Hou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1~25.4	Relative Humidity: (%)	49~64	ATM Pressure: (kPa)	100.2
----------------------	-----------	------------------------------	-------	------------------------	-------


Test Data:

802.11b_2412MHz

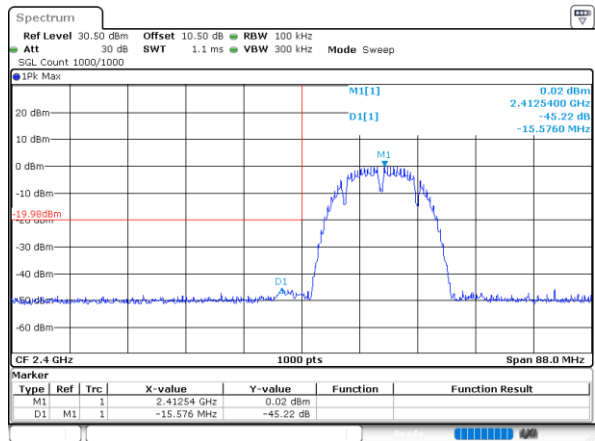


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:21:24

802.11b_2462MHz

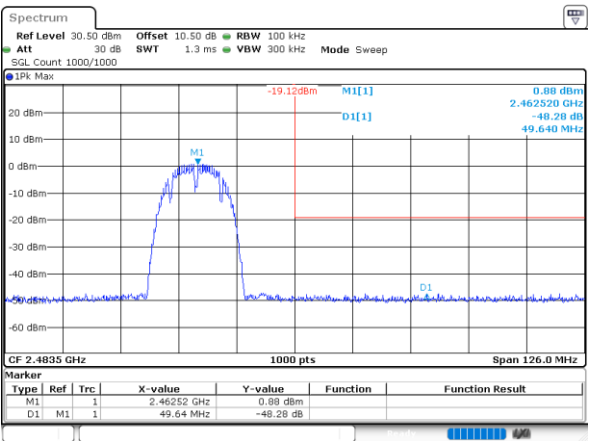


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:30:42

802.11g_2412MHz

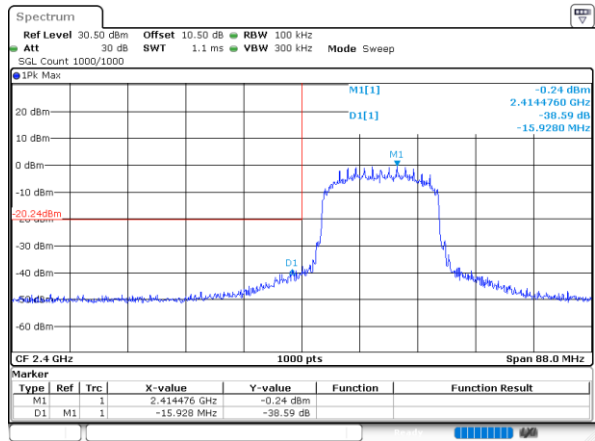


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:32:46

802.11g_2462MHz

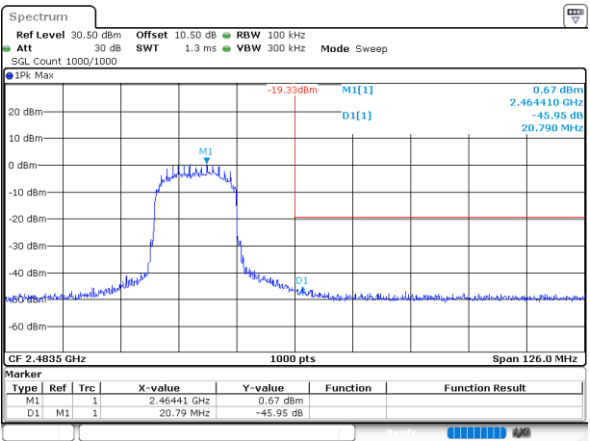


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:36:34

802.11n20_2412MHz

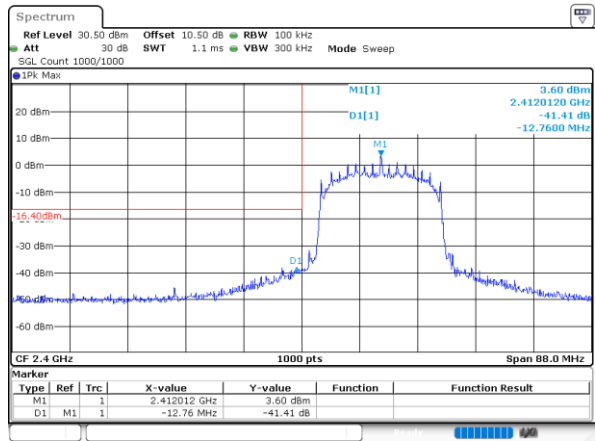


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:38:29

802.11n20_2462MHz

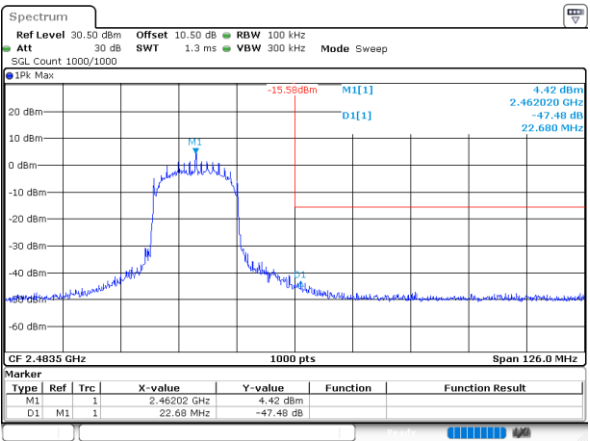


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:41:50

802.11n40_2422MHz

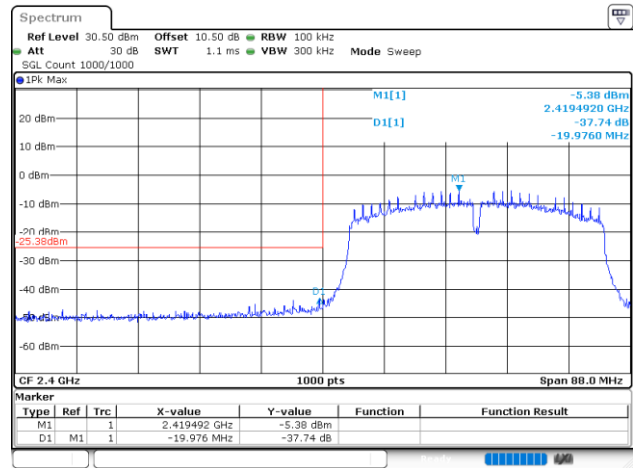

ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 19.MAY.2025 15:17:42

802.11n40_2452MHz

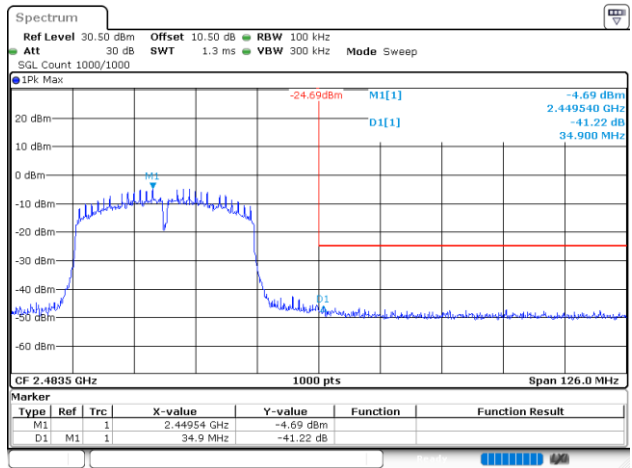

ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 19.MAY.2025 15:23:49

Duty Cycle

Test Information:

Sample No.:	30SS-1	Test Date:	2025/05/06~2025/05/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Cayde Hou	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	25.1~25.4	Relative Humidity: (%)	49~64	ATM Pressure: (kPa)	100.2
----------------------	-----------	------------------------------	-------	------------------------	-------

Test Data:

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
802.11b	2412	8.366	8.463	98.85	/	/	0.010
	2437	8.366	8.459	98.90	/	/	0.010
	2462	8.366	8.463	98.85	/	/	0.010
802.11g	2412	1.379	1.398	98.64	/	/	0.010
	2437	1.379	1.398	98.64	/	/	0.010
	2462	1.379	1.398	98.64	/	/	0.010
802.11n20	2412	1.293	1.313	98.48	/	/	0.010
	2437	1.293	1.311	98.63	/	/	0.010
	2462	1.297	1.315	98.63	/	/	0.010
802.11n40	2422	0.648	0.658	98.48	/	/	0.010
	2437	0.658	0.668	98.50	/	/	0.010
	2452	0.648	0.658	98.48	/	/	0.010


Duty Cycle = Ton/(Ton+Toff)*100%

802.11b_2412MHz

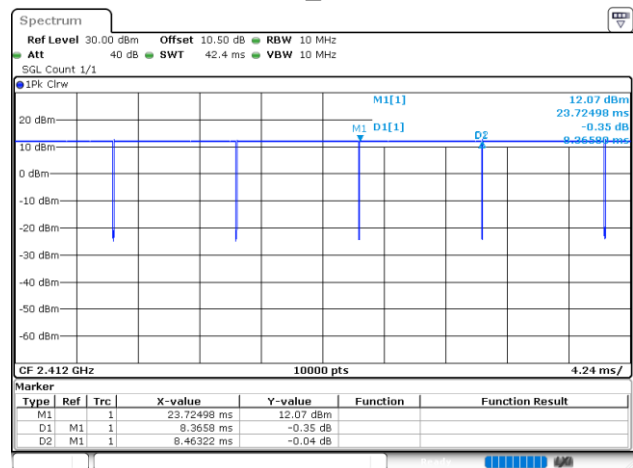


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:20:25

802.11b_2437MHz

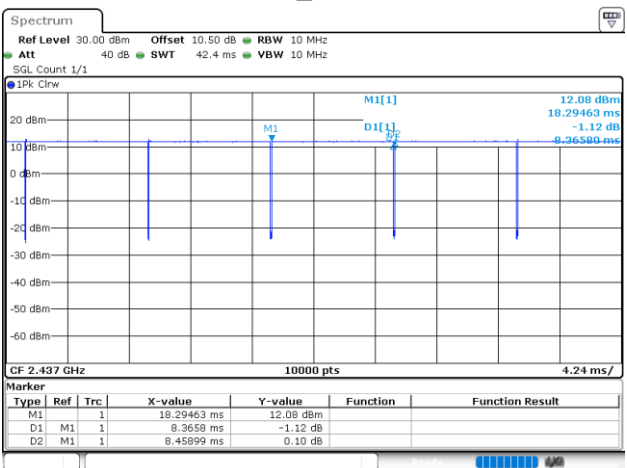


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:22:34

802.11b_2462MHz

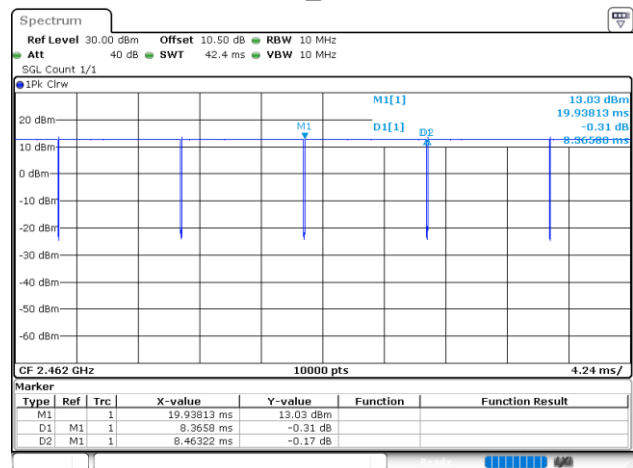


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:30:05

802.11g_2412MHz

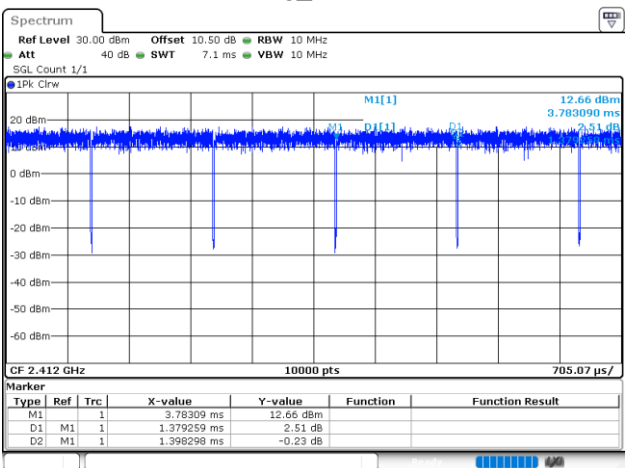


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:32:04

802.11g_2437MHz

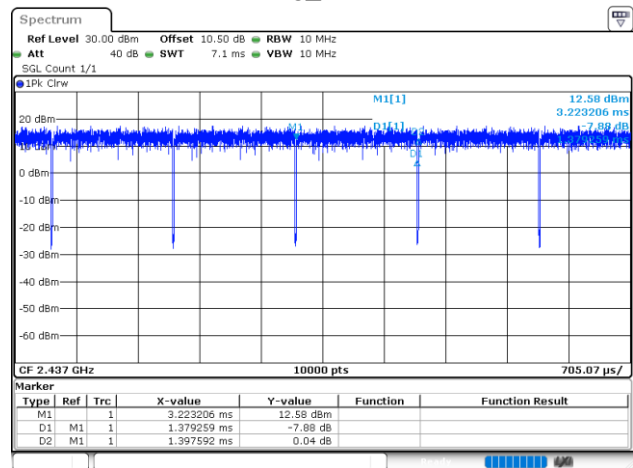


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:34:13

802.11g_2462MHz

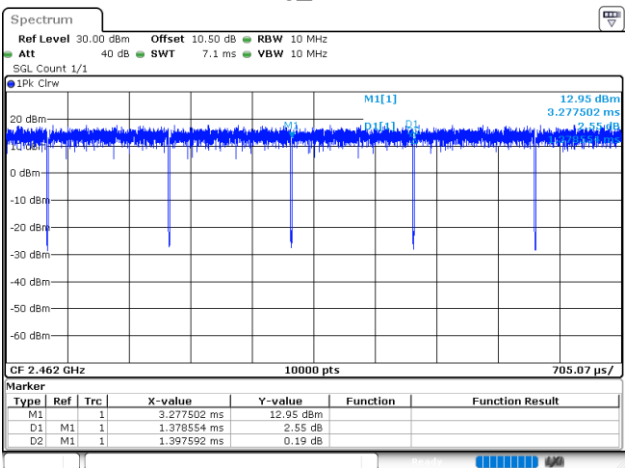


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:35:56

802.11n20_2412MHz

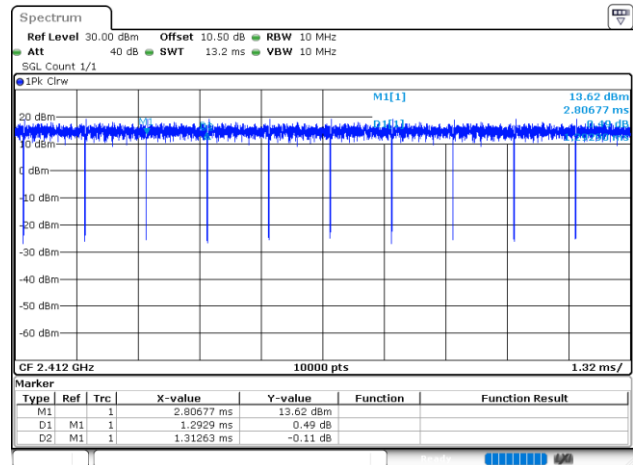


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:37:48

802.11n20_2437MHz

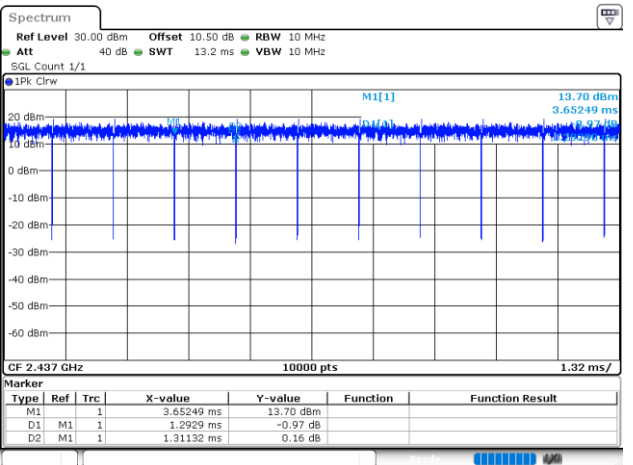


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:39:24

802.11n20_2462MHz

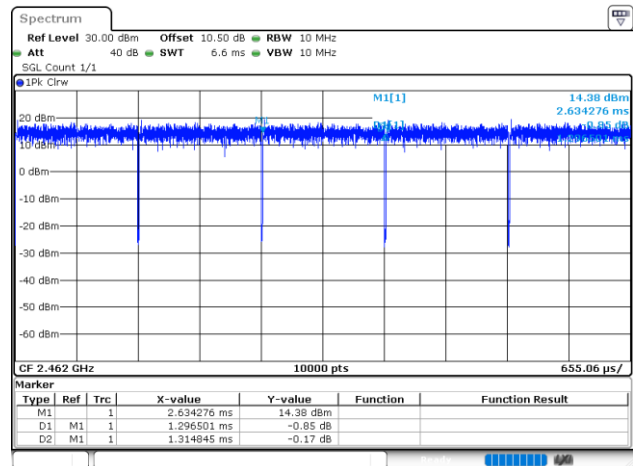


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 6.MAY.2025 16:41:11

802.11n40_2422MHz

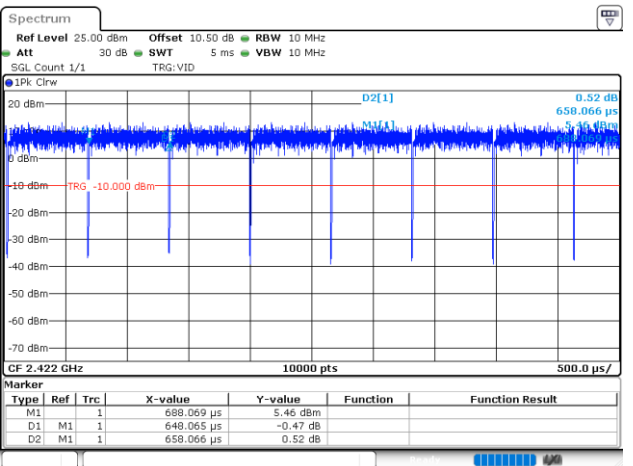


ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 19.MAY.2025 15:17:19

802.11n40_2437MHz

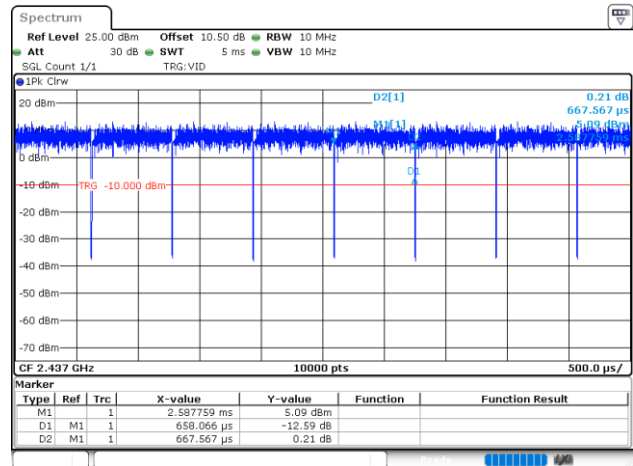

ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 19.MAY.2025 15:20:03

802.11n40_2452MHz

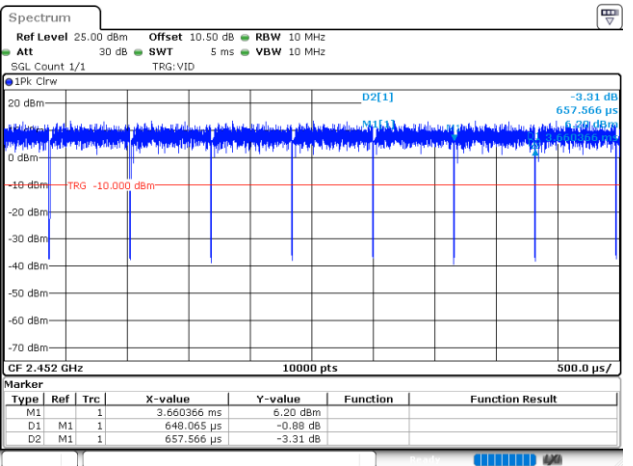

ProjectNo.:2504R39298E-RF Tester:Cayde Hou
Date: 19.MAY.2025 15:22:43

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the Attachment: 2504R39298E-RF EUT EXTERNAL PHOTOGRAPHS and 2504R39298E-RF EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the Attachment: 2504R39298E-RF-00B TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******