






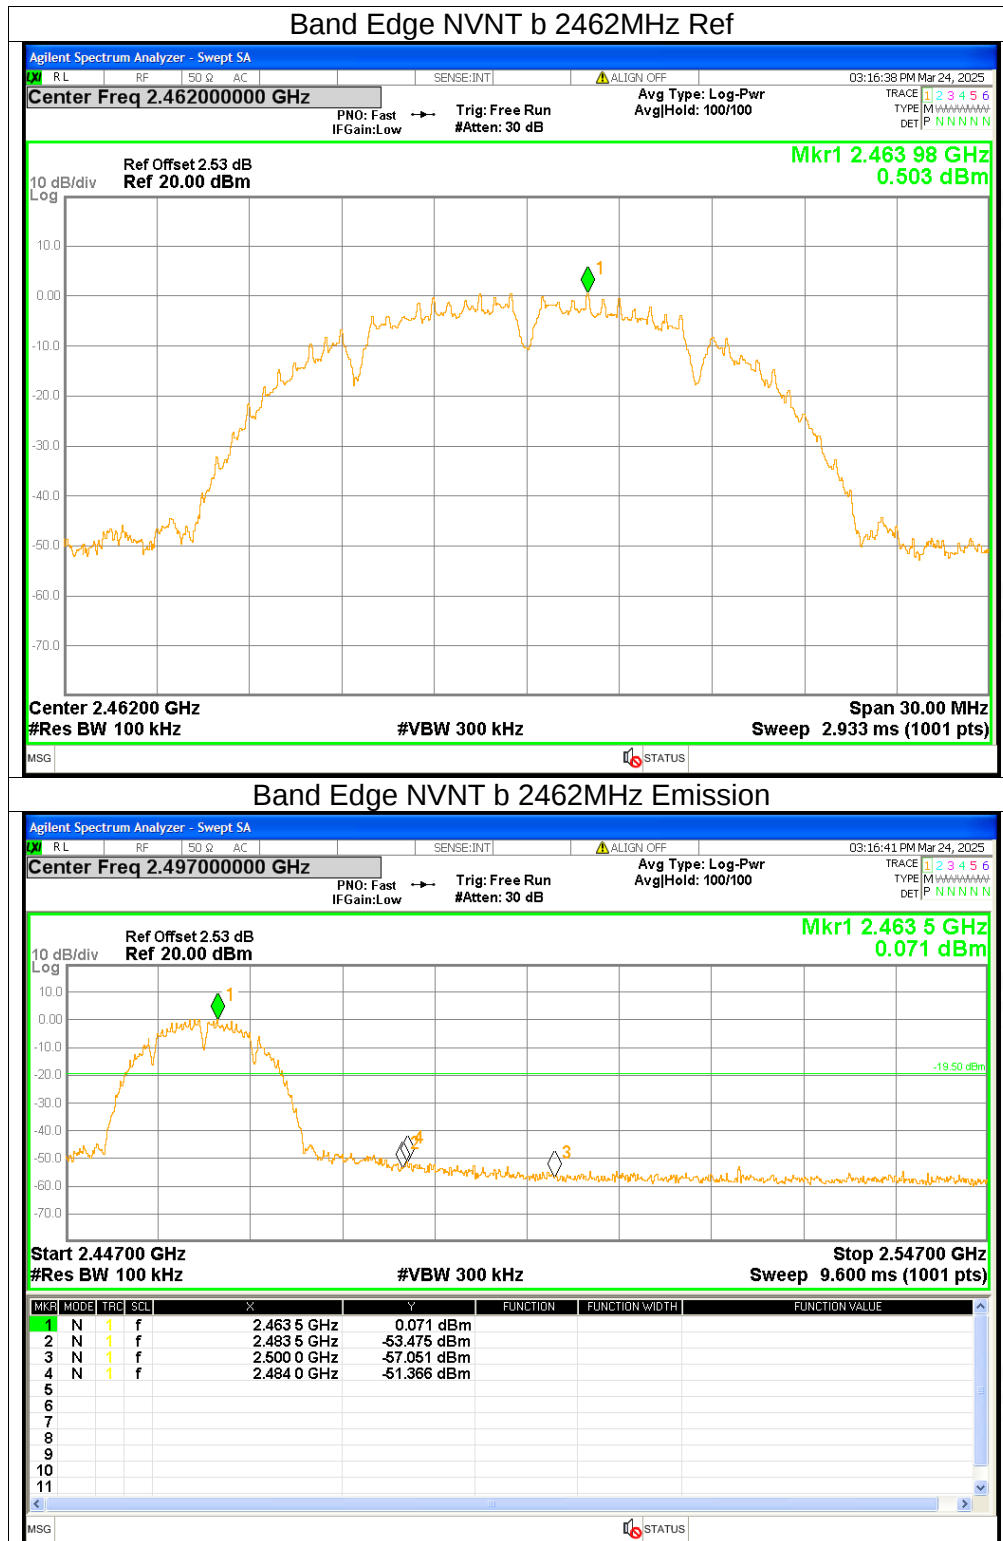

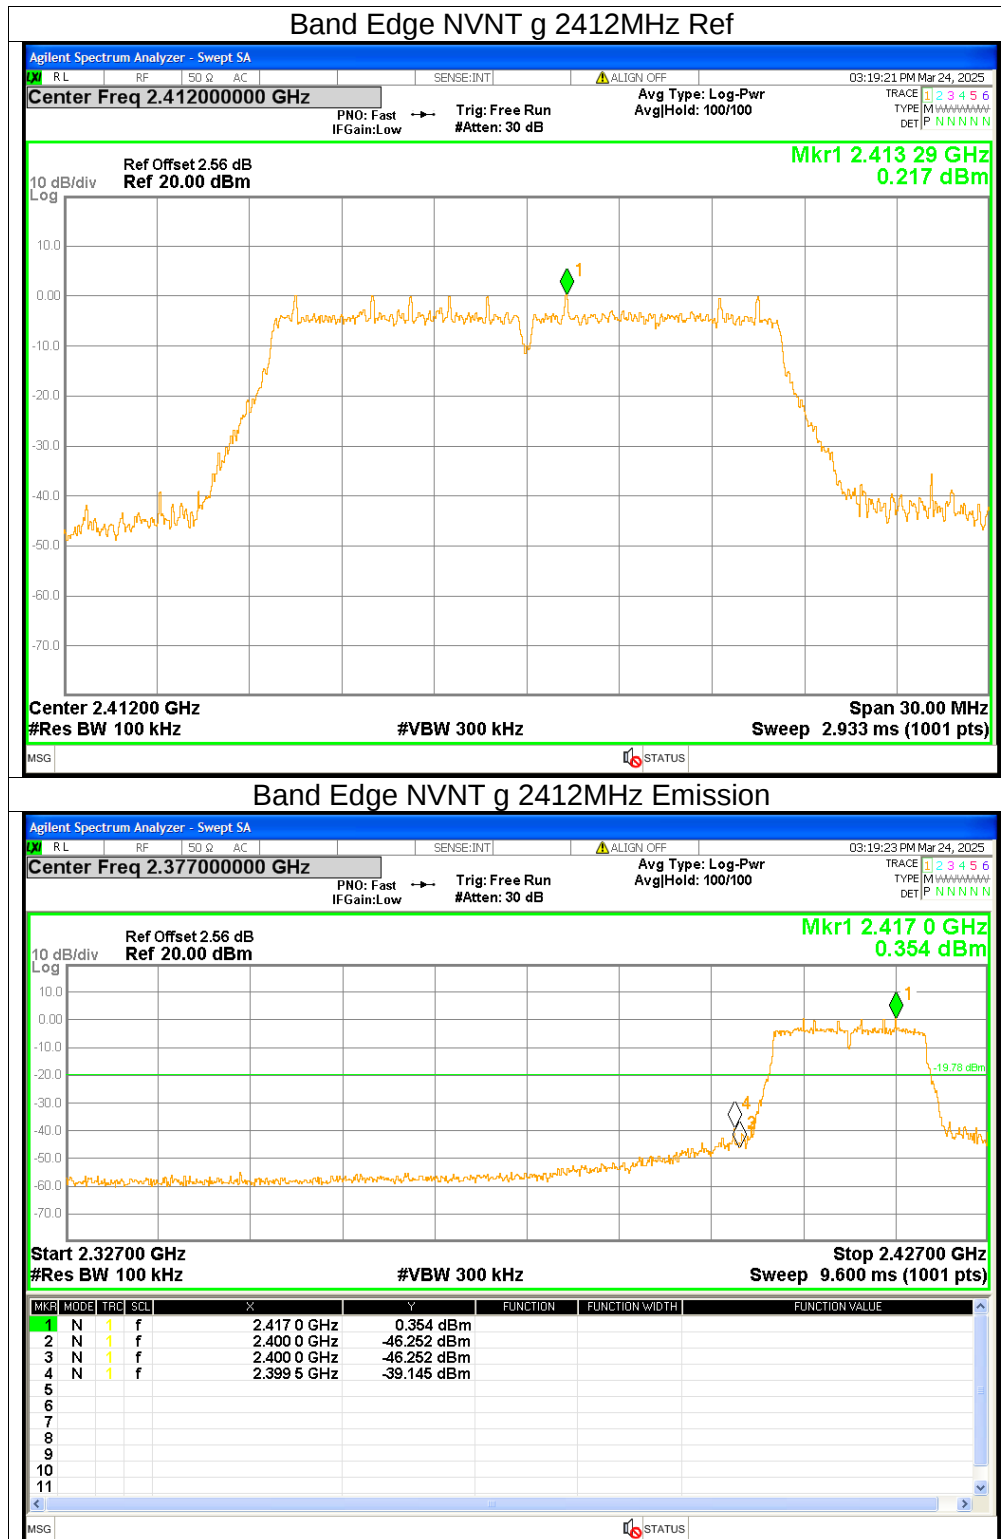

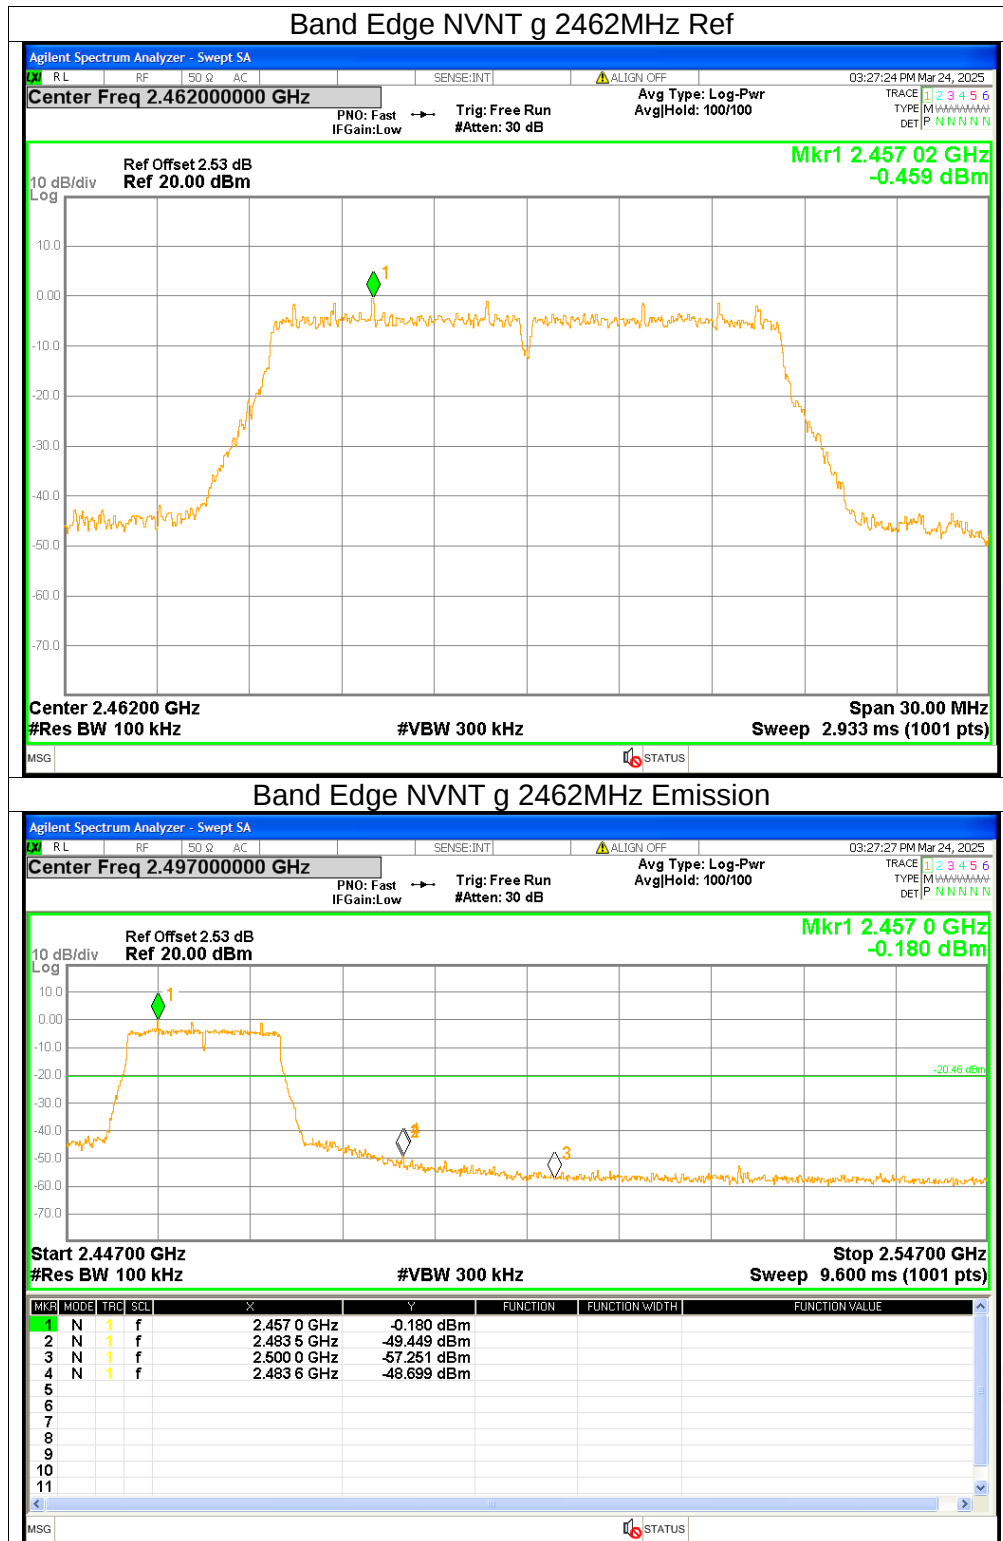

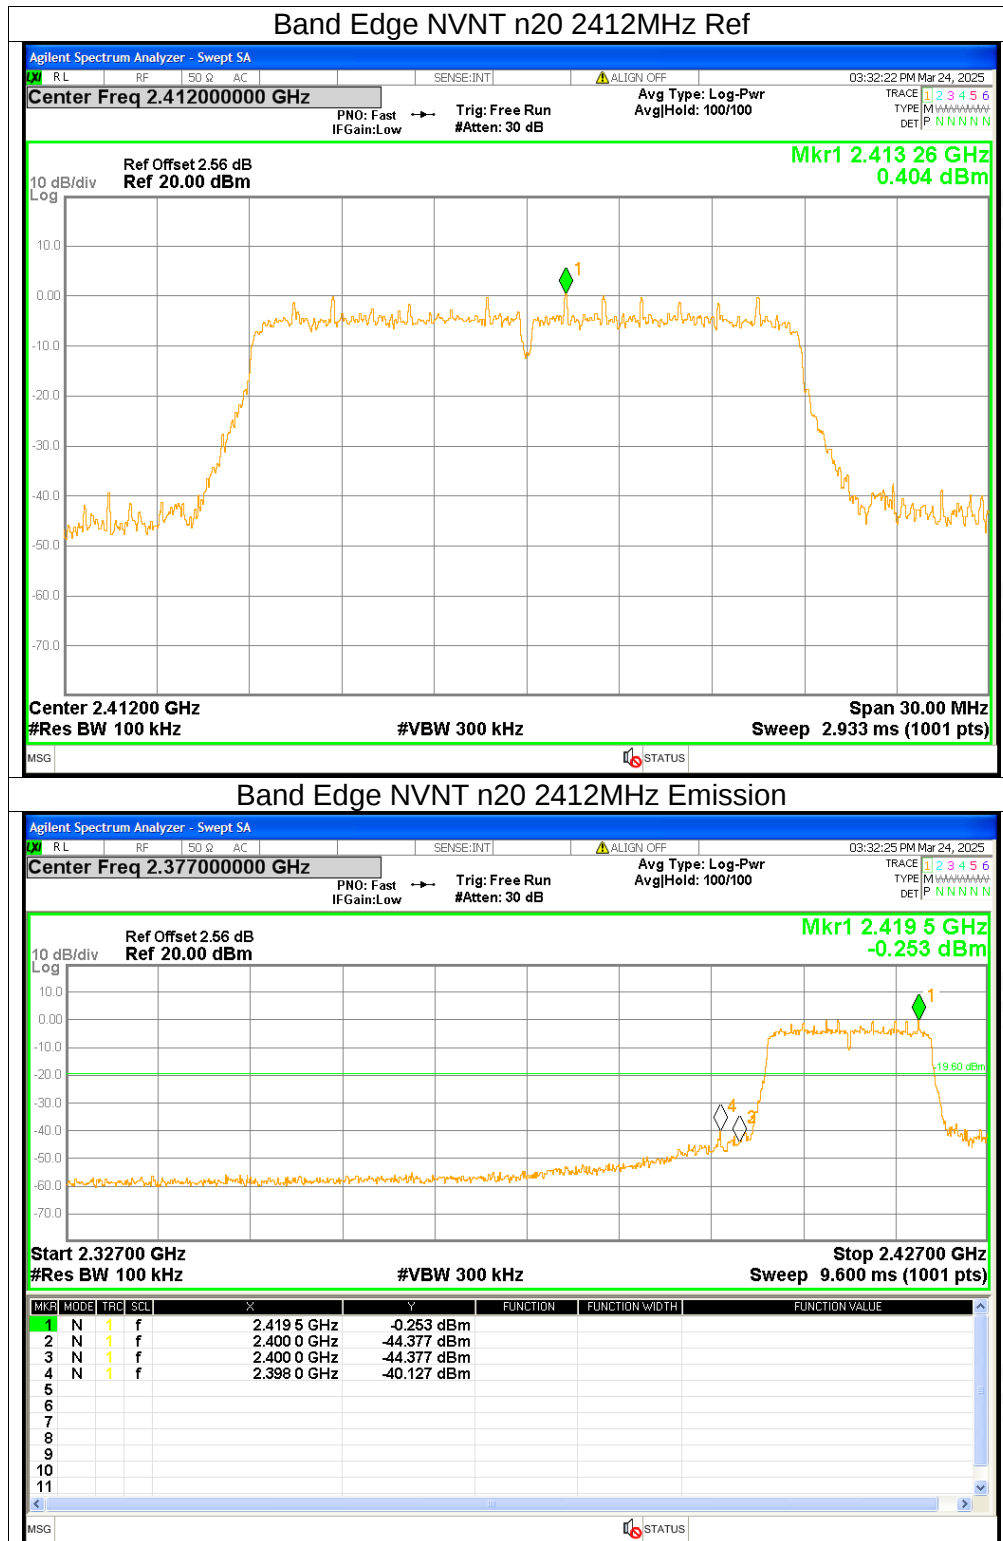


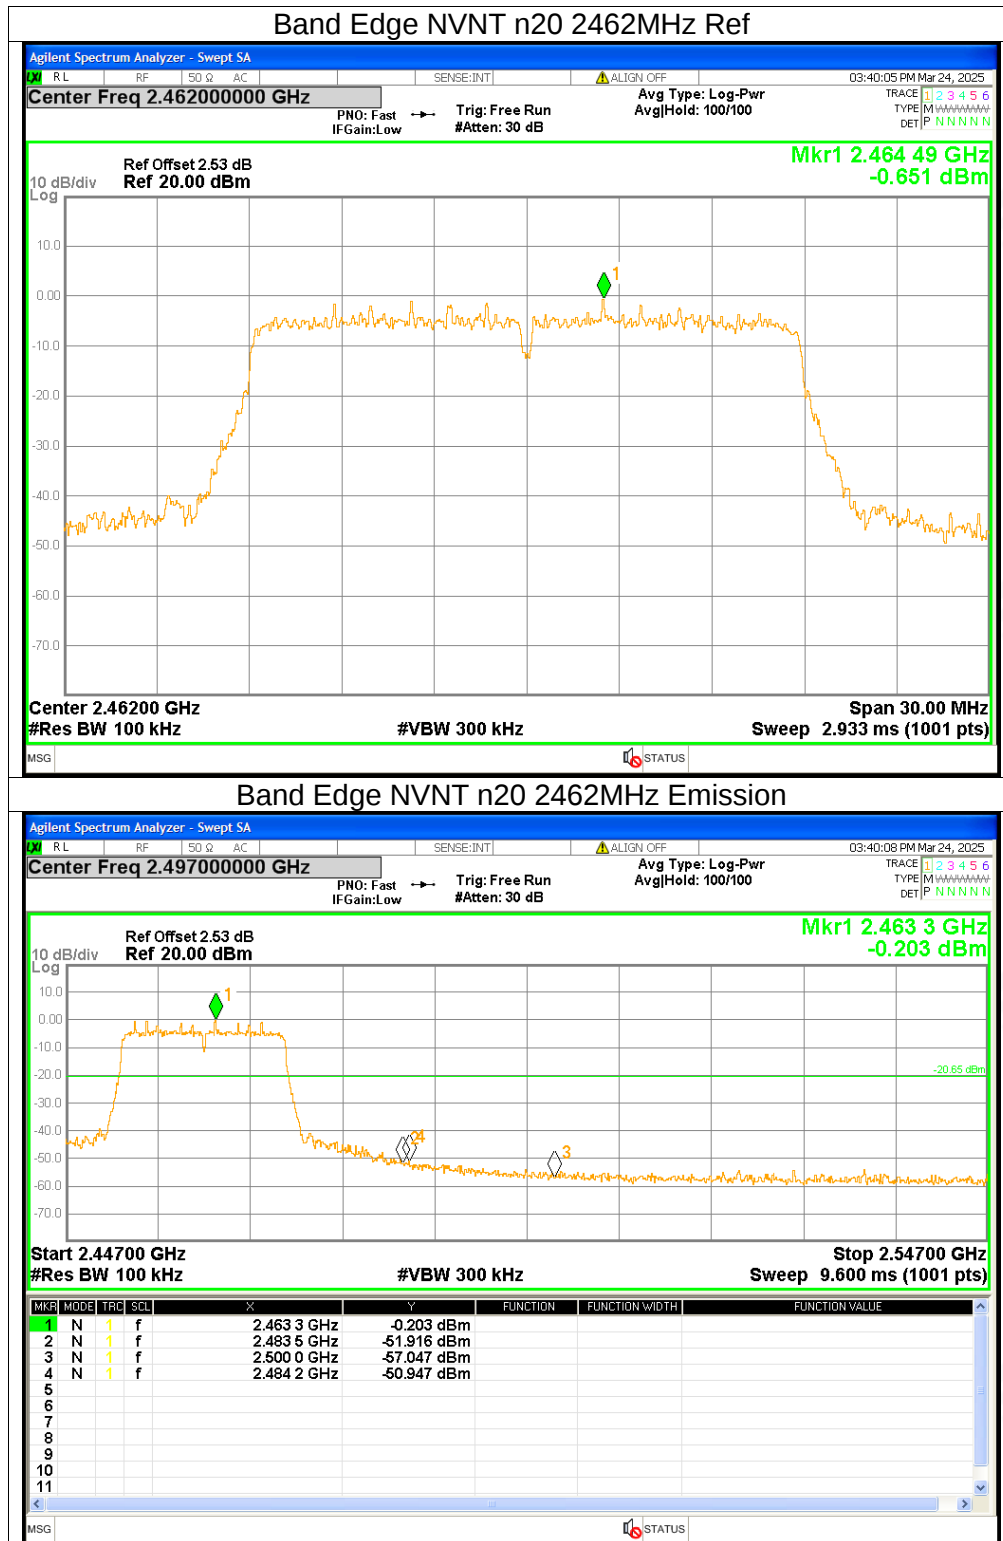




7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-47.5	<=-20	Pass
NVNT	b	2437	-47.2	<=-20	Pass
NVNT	b	2462	-47.47	<=-20	Pass
NVNT	g	2412	-46.57	<=-20	Pass
NVNT	g	2437	-45.2	<=-20	Pass
NVNT	g	2462	-45.65	<=-20	Pass
NVNT	n20	2412	-46.73	<=-20	Pass
NVNT	n20	2437	-46.01	<=-20	Pass
NVNT	n20	2462	-46.12	<=-20	Pass

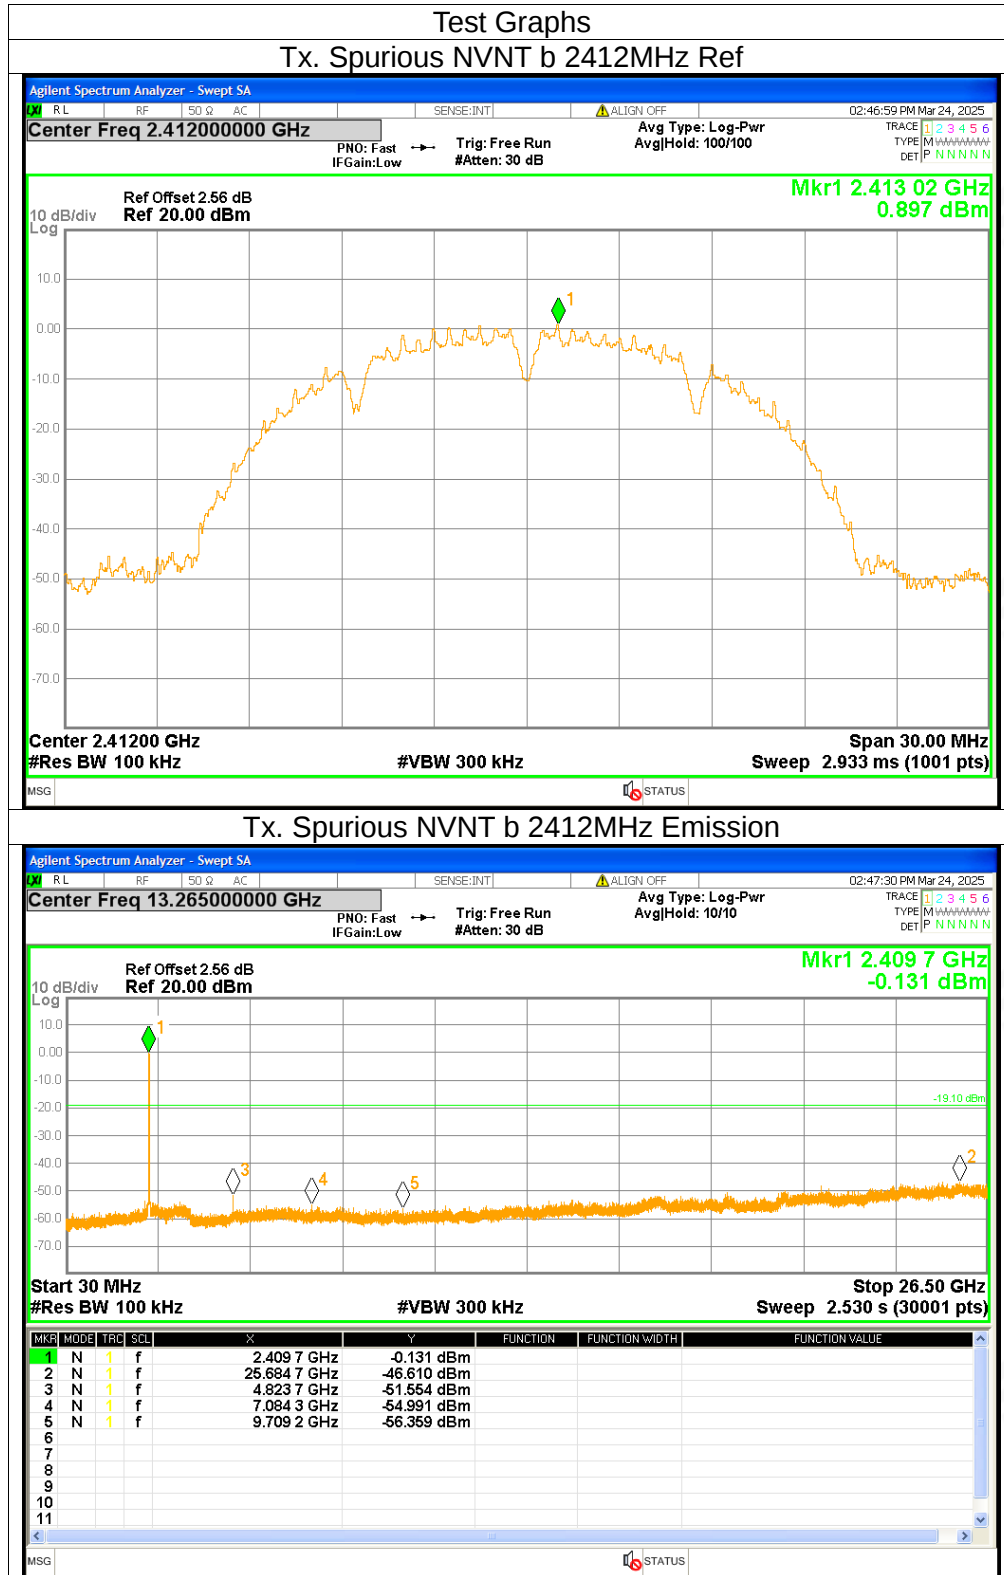

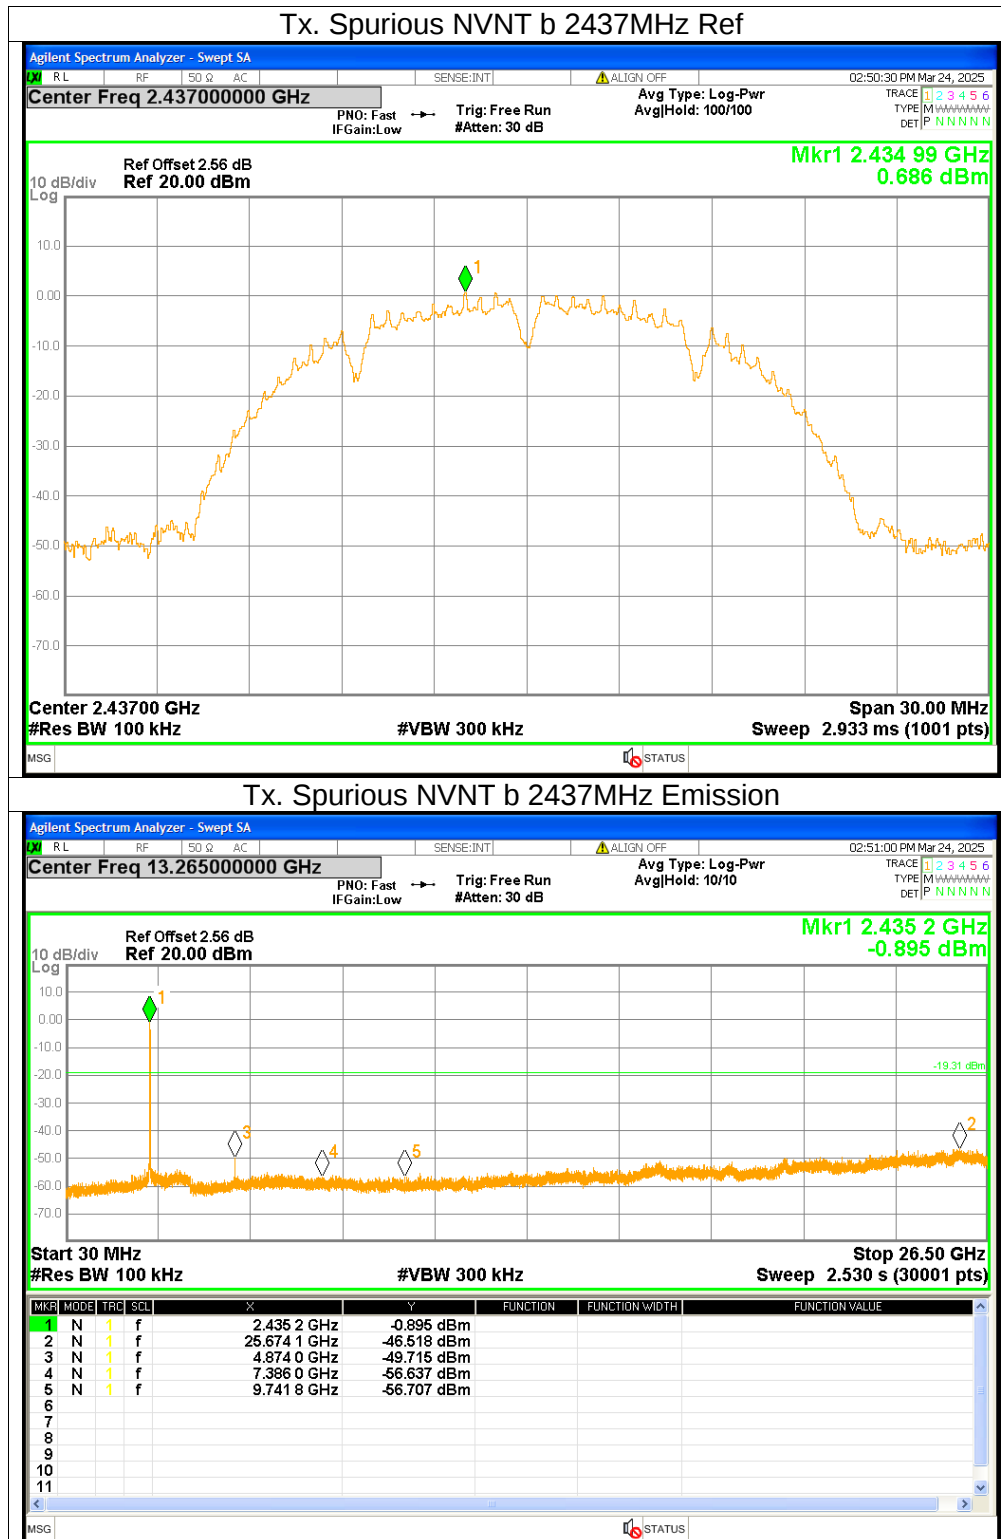






Tx. Spurious NVNT b 2462MHz Ref

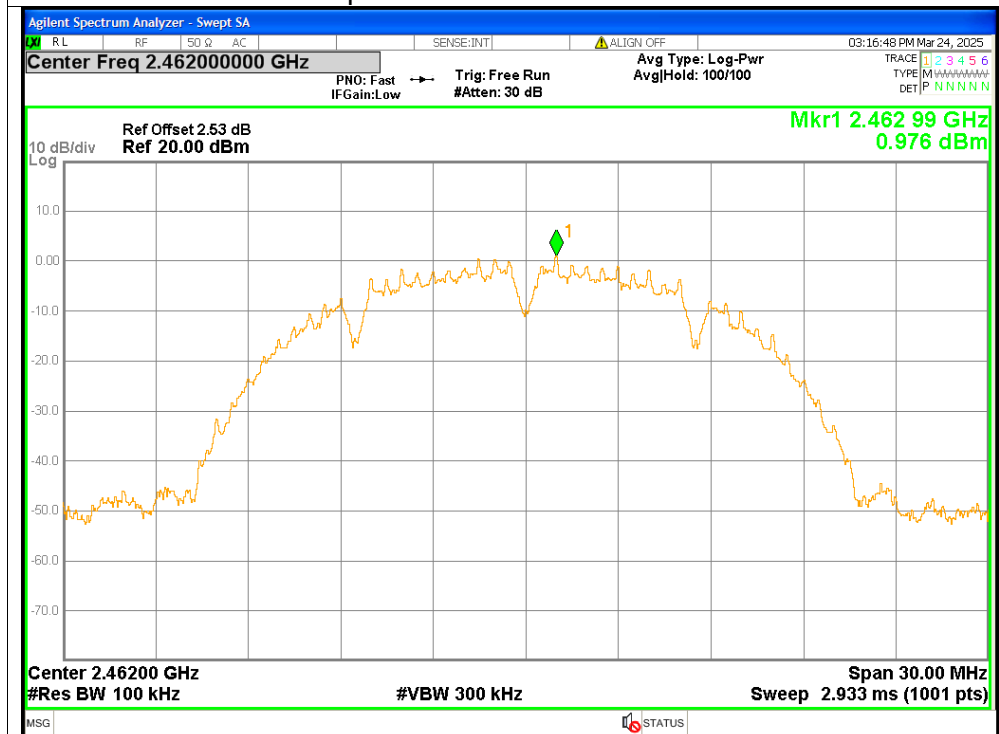


Tx. Spurious NVNT b 2462MHz Emission

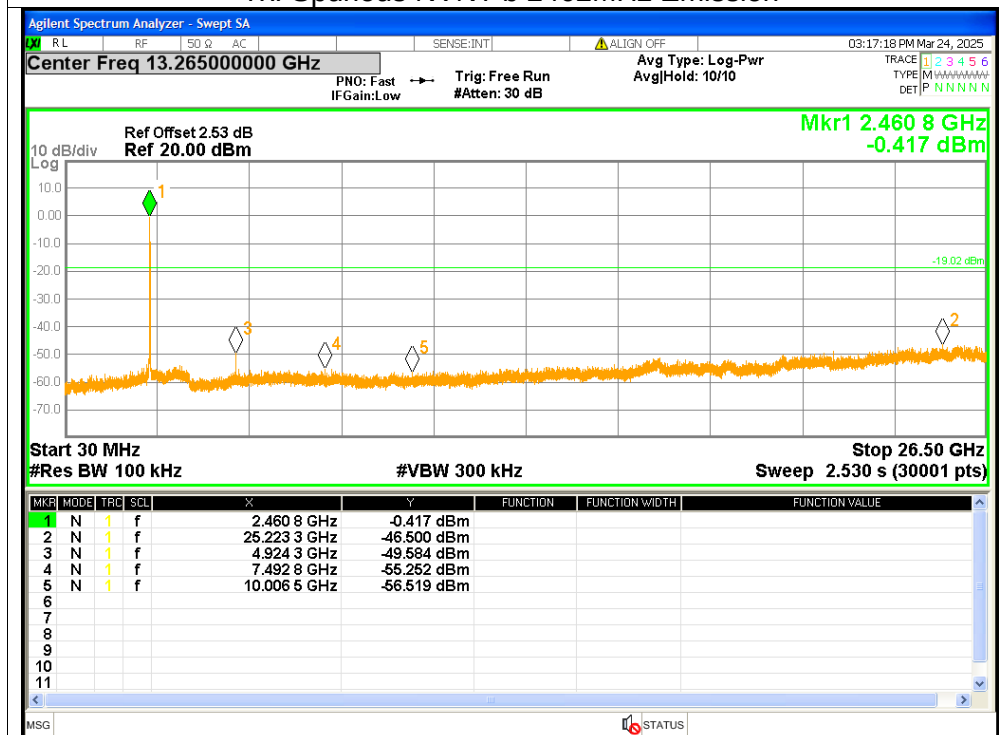

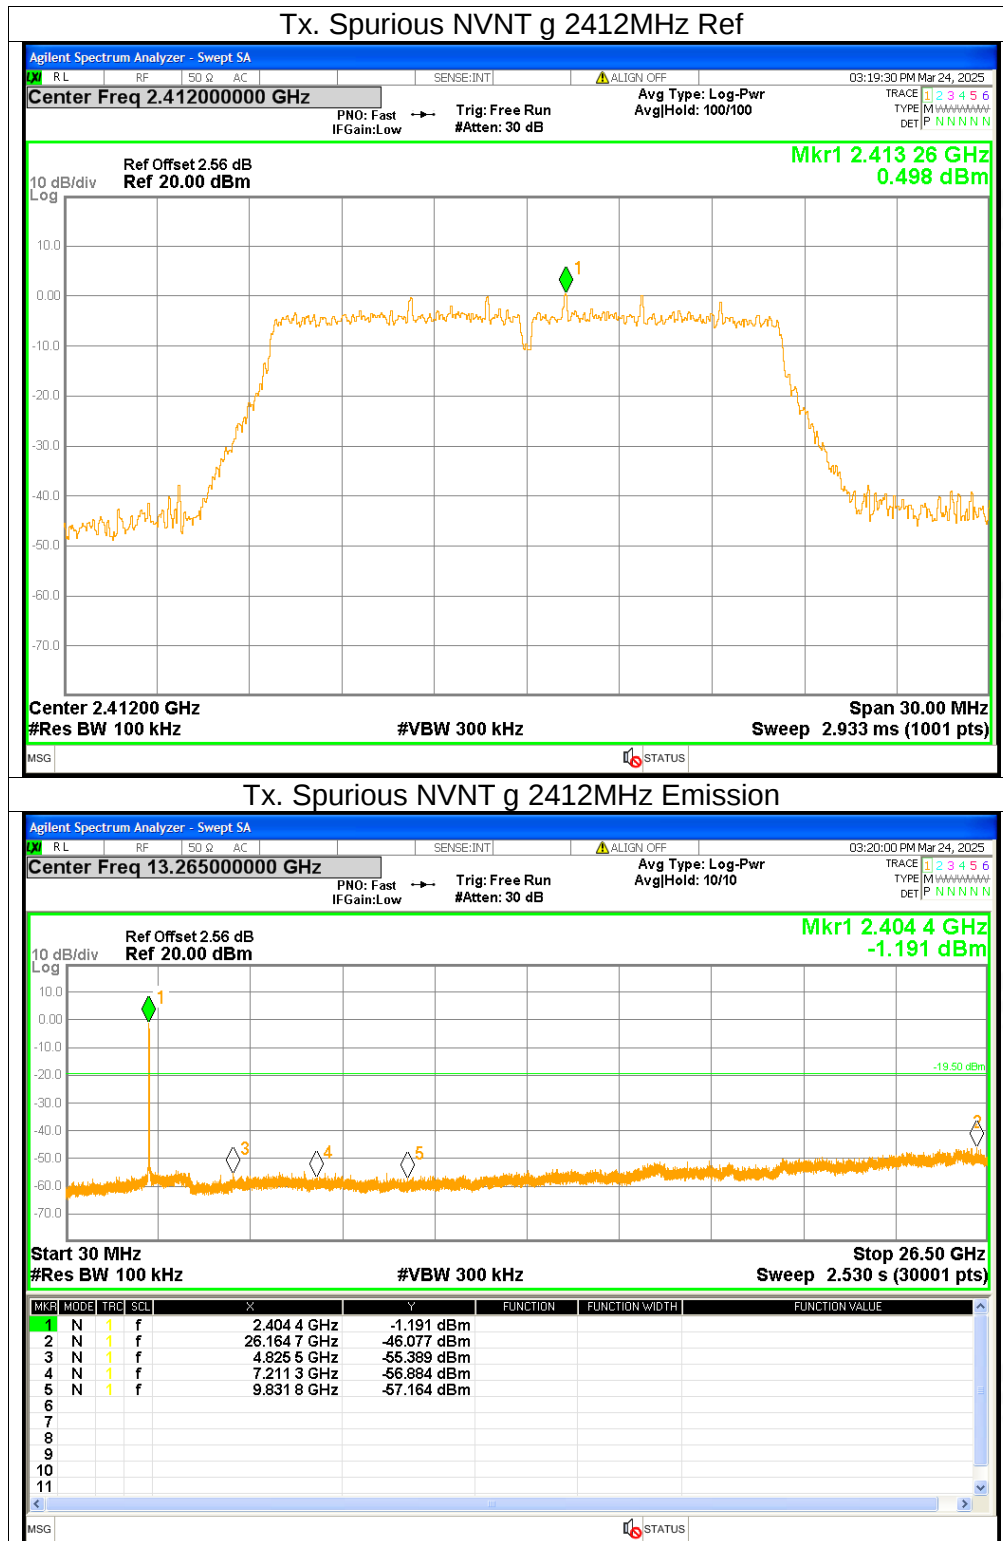


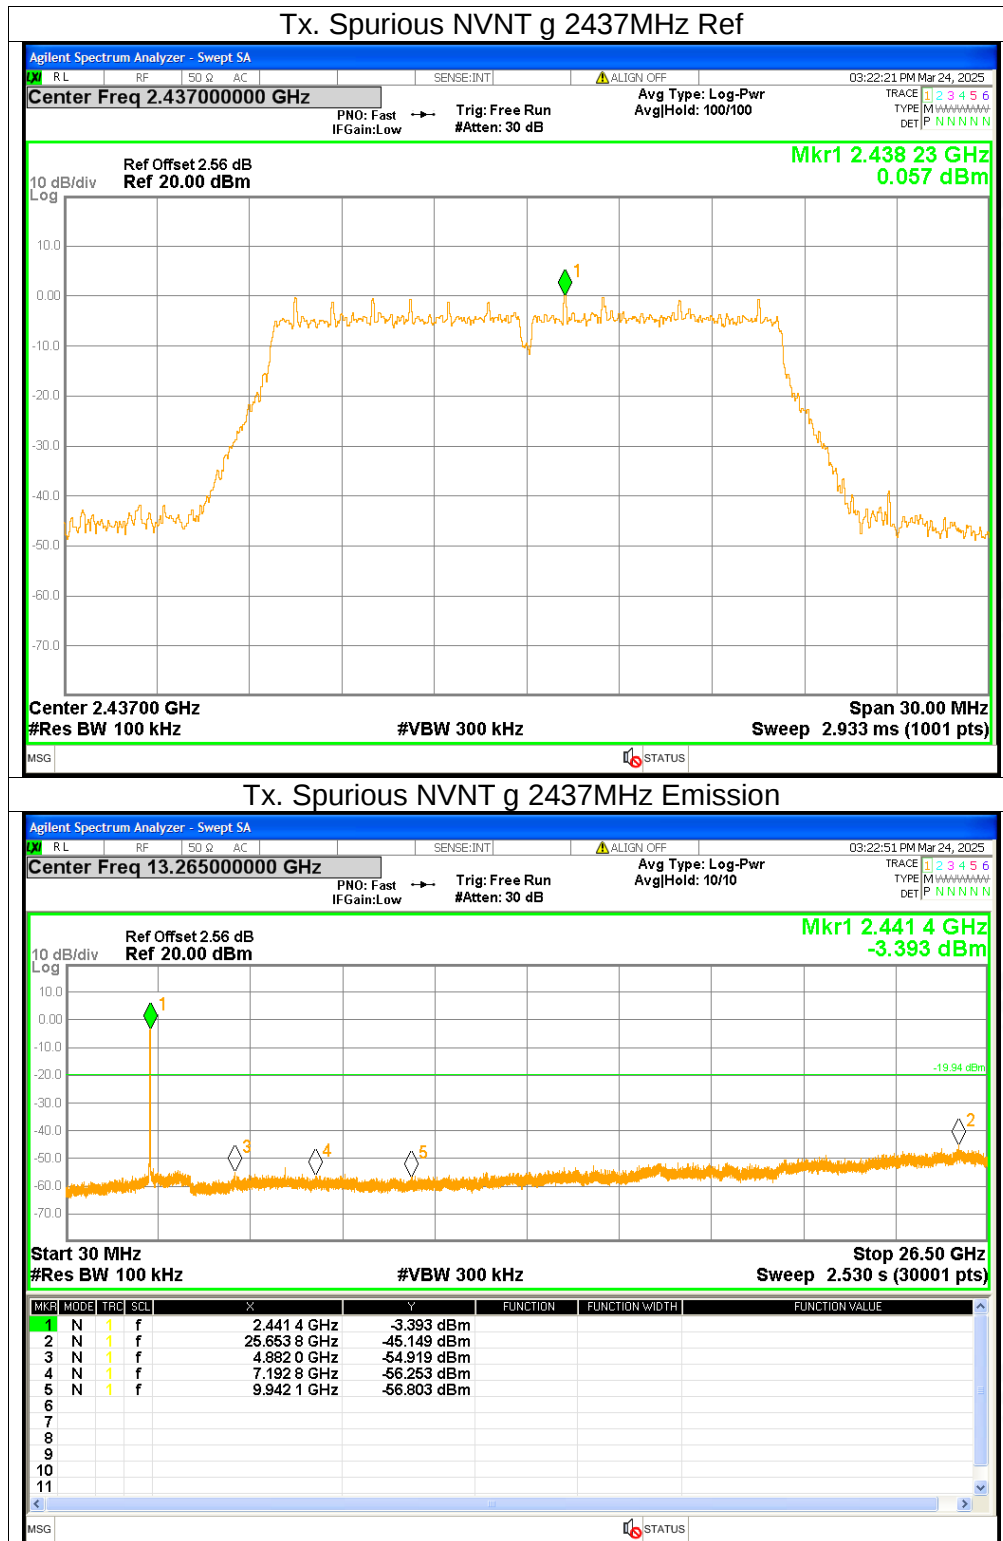

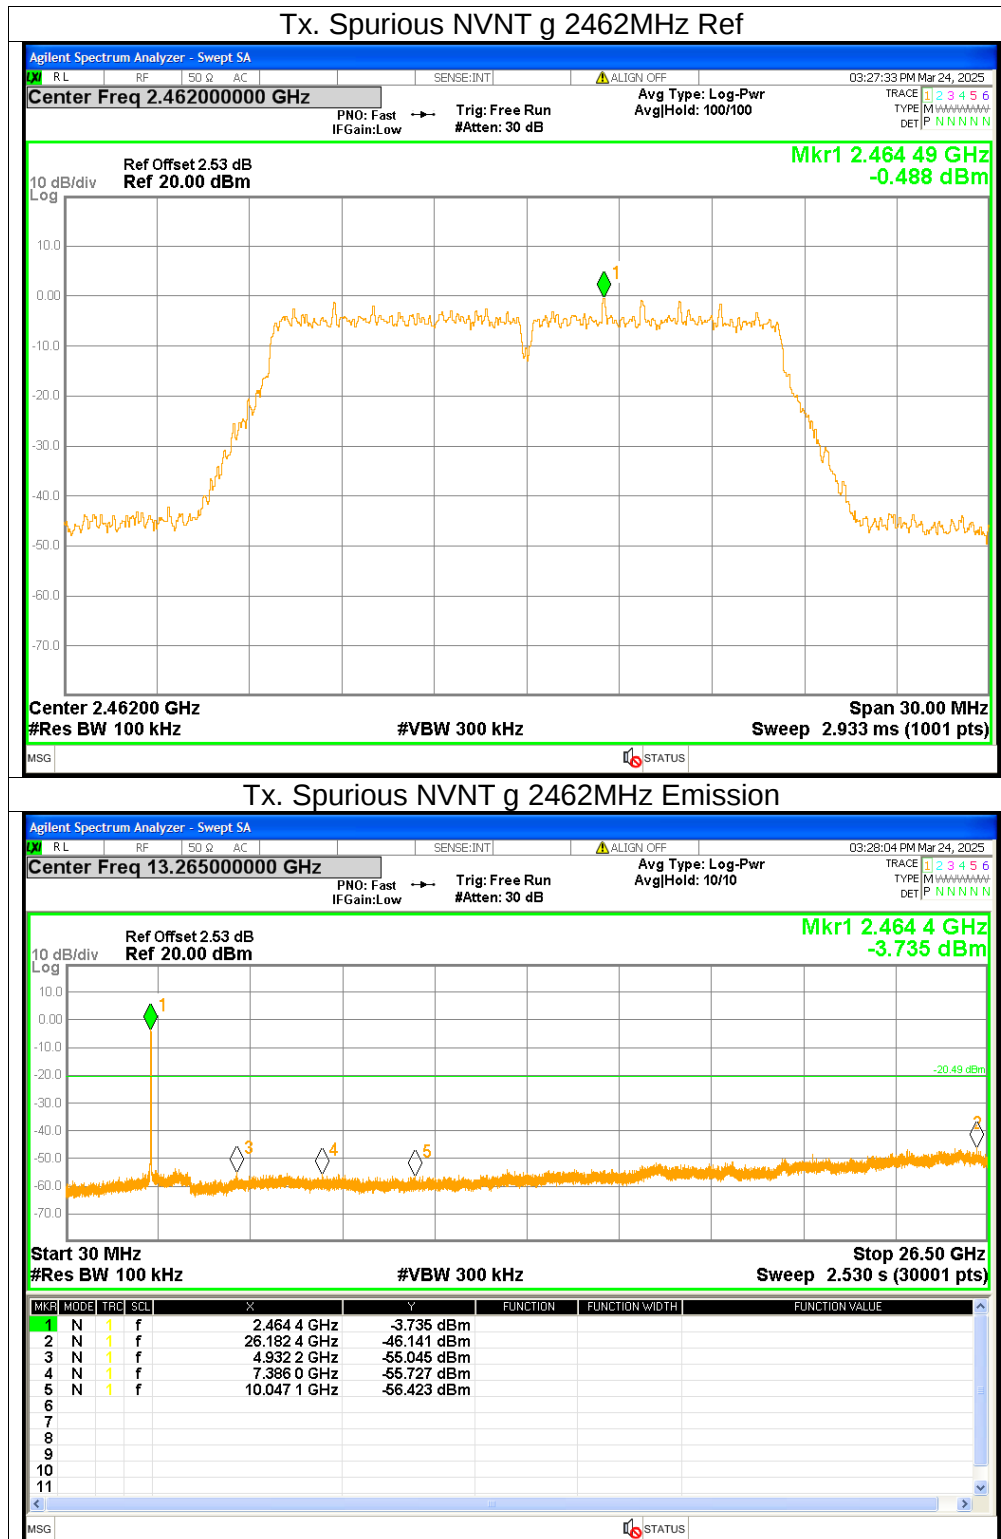




Tx. Spurious NVNT n20 2412MHz Ref

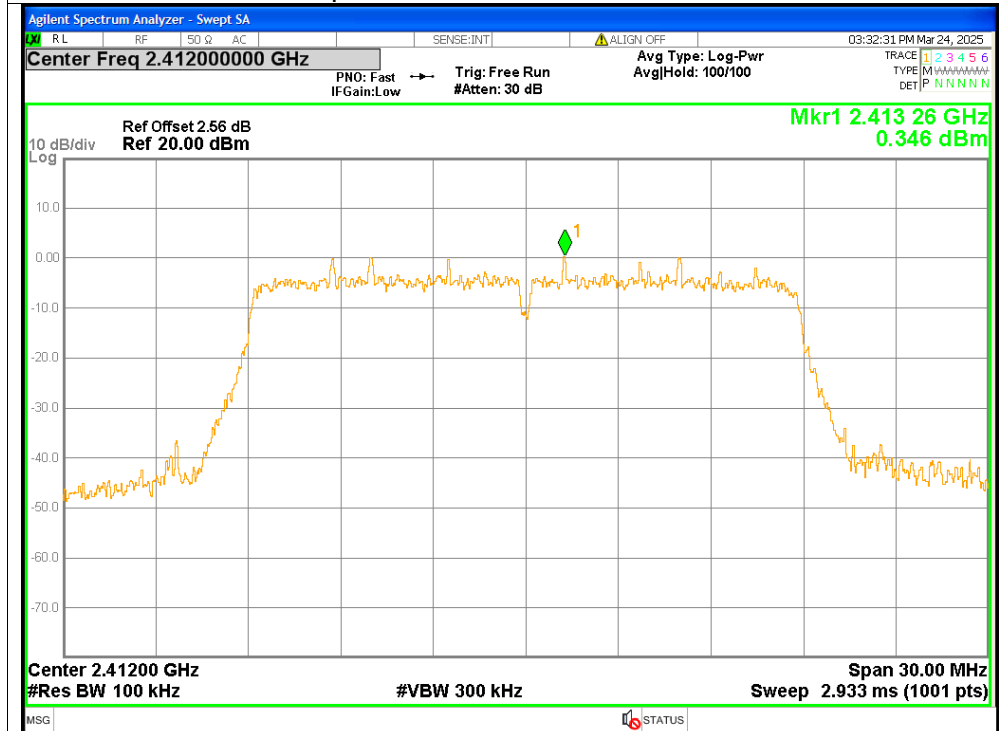


Tx. Spurious NVNT n20 2412MHz Emission

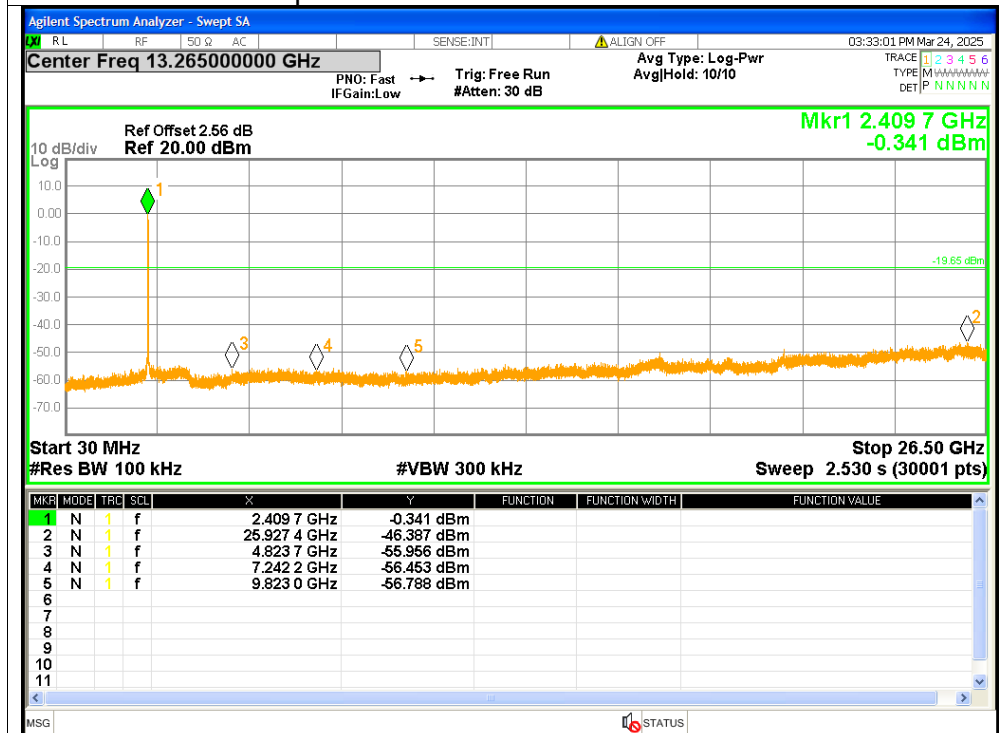




Tx. Spurious NVNT n20 2437MHz Ref

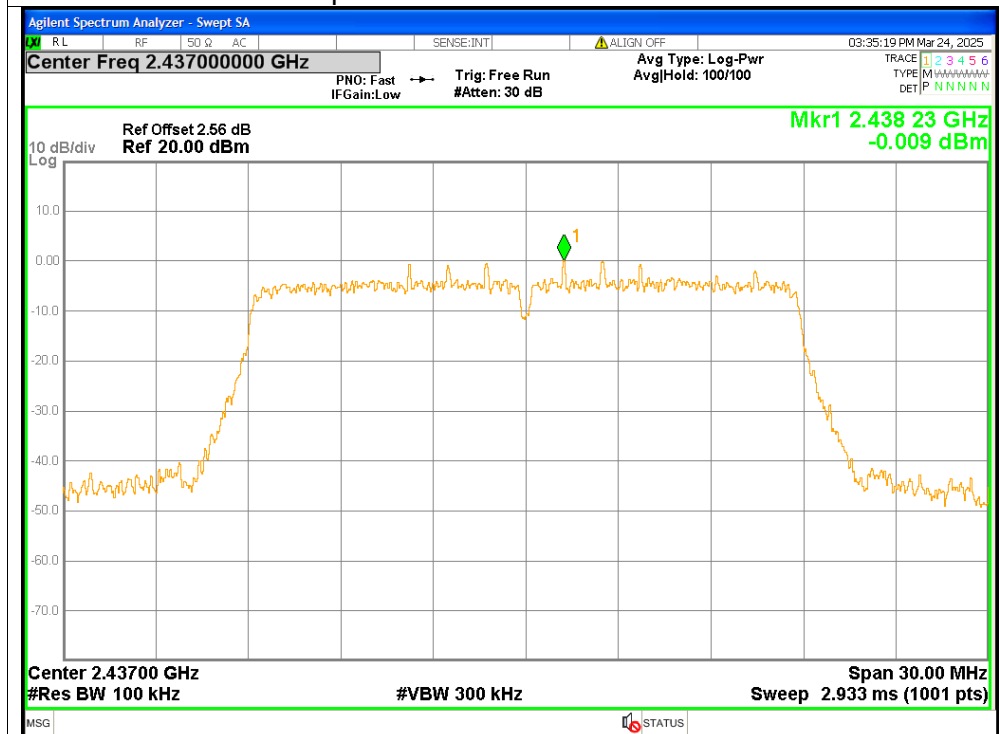


Tx. Spurious NVNT n20 2437MHz Emission

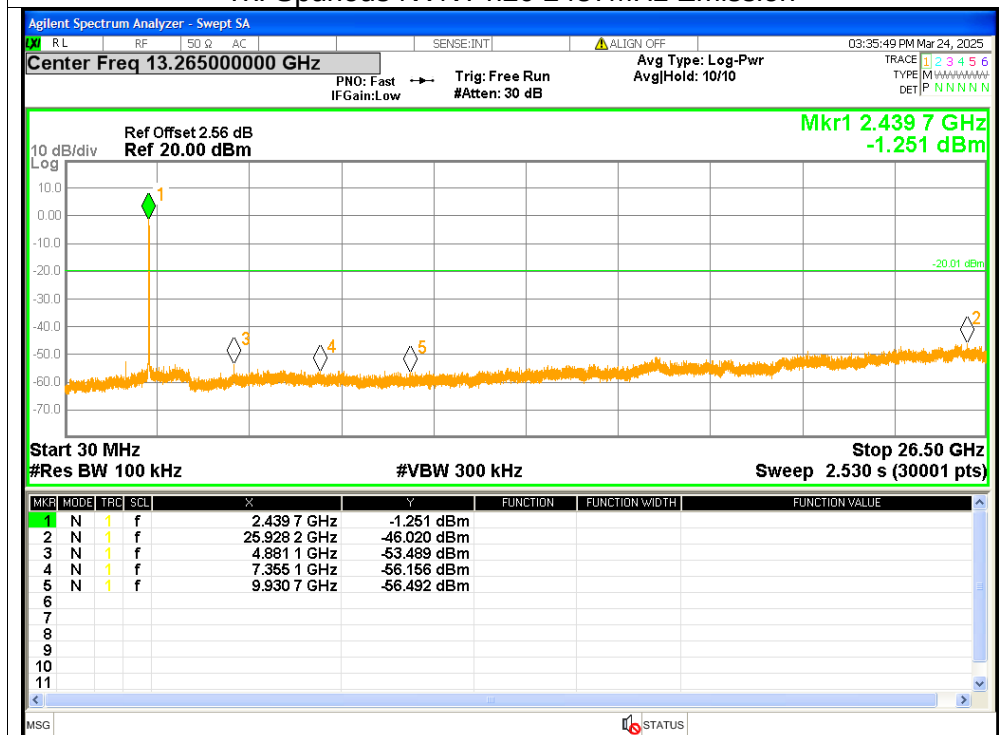





Tx. Spurious NVNT n20 2462MHz Ref

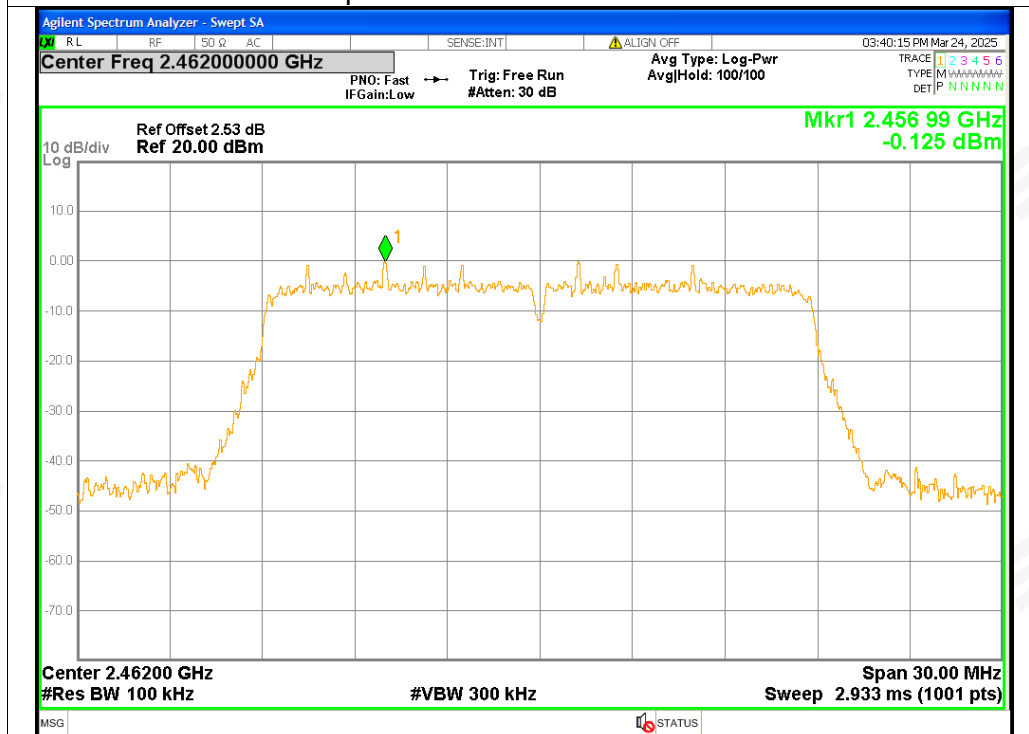

Tx. Spurious NVNT n20 2462MHz Emission

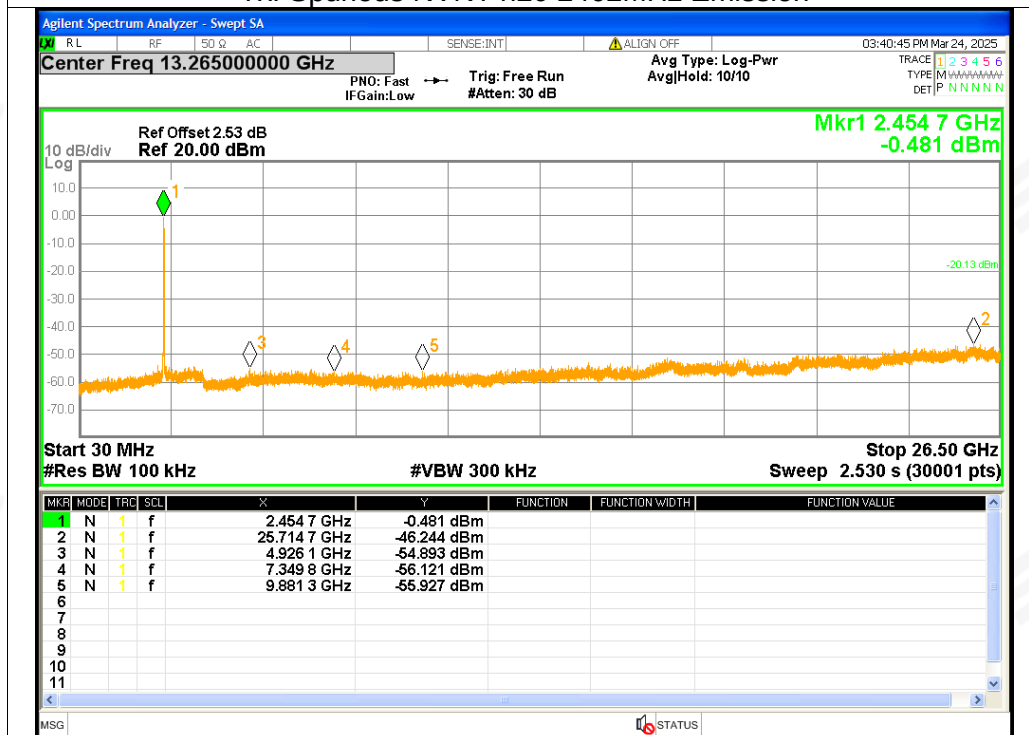

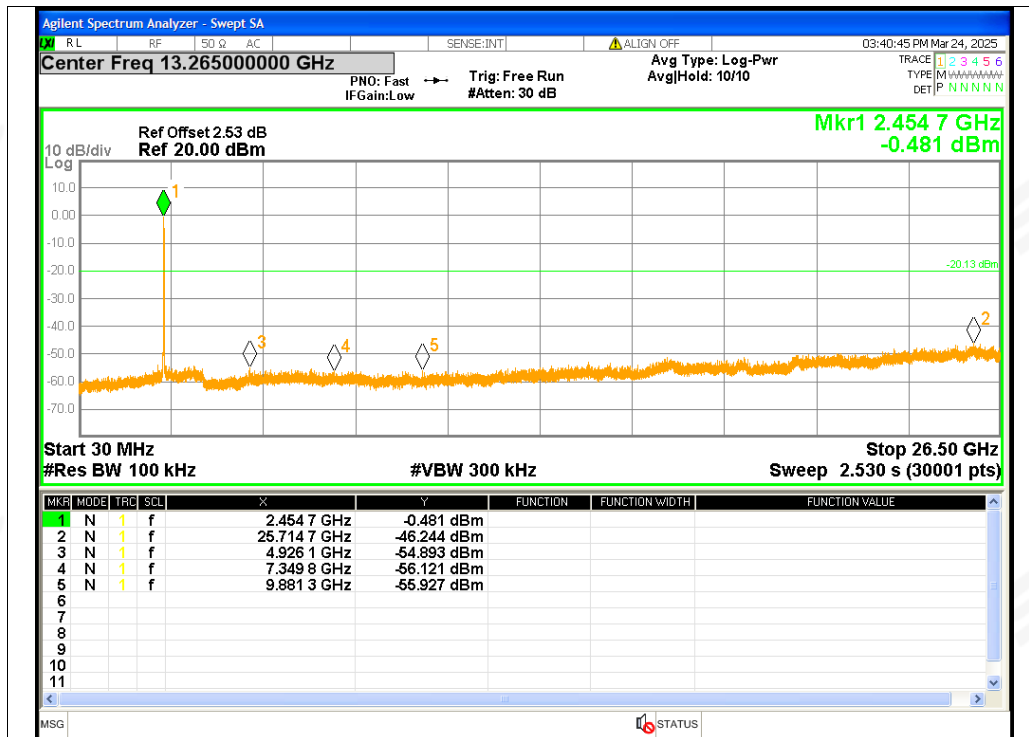



APPENDIX 2-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****