



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

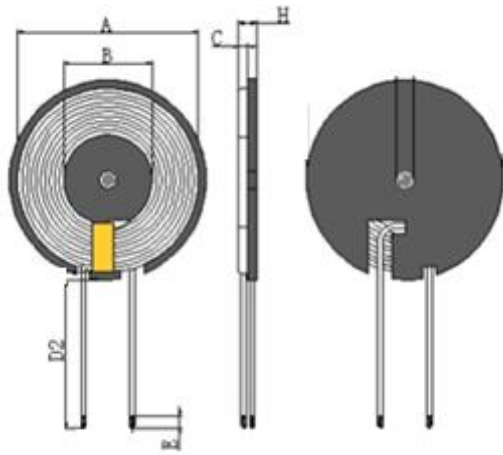

2. SCHEMATICS:



1. Coil stick magnetic sheet, magnetic piece size 45mm, thickness of 0.8 ± 0.05 mm open L slot.
2. Paper 1-2Ts on the outlet position of the coil;
3. Stick glue on the back of the magnetic piece

A	B	C	D2	E	H	NOTE	I
45±1.0	20±1.0	0.8±0.5	10±3	3±1.5	2.0MAX	20mm inside the hole of the magnetic sheet	

3.WINDING:

ST EP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	Thermoanalysis $\varnothing 0.08 \times 24$ 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L	Q值	HI-POT
TEST	COIL	S-F	Separate coil		
CON	100KHz, 0.25V	AT 25°C	100KHz, 0.25V		
SPEC	6.5uH±10%	60mΩ Max	3.8uH±15%		

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	Silk-covered wire	0.08*24*2P	NANJINGJINNINGCO,LTD	
2	No lead tin strip	No lead tin strip	QIAODO	
3	Magnetic sheet	$\varnothing 45 \times 0.8$ L Slot / inner hole 20mm	TAIYI CO.,LTD	
4	Glue	Yellow gum 9999	LIANCHENG CO.,LTD	
5	Gummed paper	8mmWide and high temperature rubber paper	CUDAK CO.,LTD	
6	Gum	$\varnothing 43.5 \times 0.1$	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G45开槽+背胶 10mm
DRAWN BY	CHECKED BY		APPROVED BY