

FCC TEST REPORT

FCC ID:2BOGA-SK23

Report No..... : ZHT-250708128W01-1

Product..... : Mini Camera

Trademark..... : /

Model(s)..... : SK23, HC2, HC23, SK5, SK50, DK6, DK68, CS36, CS52, SY7, SY75, JK34, KT45, QT56, PT67, DG78, NB87, AZ62, XB47, DF43, Y40, Y60, Y19, Y77, EA88, EA13, EA17, AP06, AP39, AP33

Model Difference..... : SK23 and Y40 are test models, while the other models are derivative models. These models are the same in terms of circuit, SK23 and Y40 only differ in camera and appearance shape, while other models and SK23 and Y40 only have different model names. Therefore, the test data of SK23 and Y40 can represent the remaining models.

Applicant..... : Shenzhen Shifang Digital Technology Co., Ltd

Address..... : Room 2619, 26th Floor, Building A, United Plaza, No. 5022, Binhe Avenue, Fushan Community, Futian Street, Futian District, Shenzhen, China

Manufacturer..... : Shenzhen Shifang Digital Technology Co., Ltd

Address..... : Room 2619, 26th Floor, Building A, United Plaza, No. 5022, Binhe Avenue, Fushan Community, Futian Street, Futian District, Shenzhen, China

Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt..... : July 8, 2025

Date of Test(s)..... : July 8, 2025 to Sept. 18, 2025

Date of Issue..... : Sept. 18, 2025

Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Test procedure..... : KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2013

In the configuration tested, the EUT complied with the standards specified above.

Prepared by

Reviewed by:

Approved by:

Leon Li

Baret Wu

Levi Lee

Leon Li/ Engineer

Baret Wu/ Director

Levi Lee/ Manager

Note: This device described above has been tested by ZHT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.

Table of Contents

	Page
1. VERSION	4
2. SUMMARY OF TEST RESULTS	5
3. GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
4. TEST FACILITY AND TEST INSTRUMENT USED	9
4.1 TEST FACILITY	9
4.2 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
4.3 TESTING SOFTWARE	11
4.4 MEASUREMENT UNCERTAINTY	11
5. EMC EMISSION TEST	12
5.1 CONDUCTED EMISSION MEASUREMENT	12
5.2 RADIATED EMISSION MEASUREMENT	18
6. RADIATED BAND EMISSIONMEASUREMENT	27
6.1 TEST REQUIREMENT:	27
6.2 TEST PROCEDURE	27
6.3 DEVIATION FROM TEST STANDARD	27
6.4 TEST SETUP	28
6.5 EUT OPERATING CONDITIONS	28
6.6 TEST RESULT	29
7. POWER SPECTRAL DENSITY TEST	32
7.1 APPLIED PROCEDURES / LIMIT	32
7.2 TEST PROCEDURE	32
7.3 DEVIATION FROM STANDARD	32
7.4 TEST SETUP	32
7.5 EUT OPERATION CONDITIONS	33
7.6 TEST RESULT	33

8. CHANNEL BANDWIDTH	34
8.1 APPLIED PROCEDURES / LIMIT	34
8.2 TEST PROCEDURE	34
8.3 DEVIATION FROM STANDARD	34
8.4 TEST SETUP	34
8.5 EUT OPERATION CONDITIONS	34
8.6 TEST RESULT	35
9. PEAK OUTPUT POWER TEST	36
9.1 APPLIED PROCEDURES/LIMIT	36
9.2 TEST PROCEDURE	36
9.3 DEVIATION FROM STANDARD	36
9.4 TEST SETUP	36
9.5 EUT OPERATION CONDITIONS	36
9.6 TEST RESULT	36
10. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	37
10.1 APPLICABLE STANDARD	37
10.2 TEST PROCEDURE	37
10.3 DEVIATION FROM STANDARD	37
10.4 TEST SETUP	37
10.5 EUT OPERATION CONDITIONS	37
10.6 TEST RESULTS	37
11. ANTENNA REQUIREMENT	38
12. APPENDIX A	39
12.1 DUTY CYCLE	39
12.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER	49
12.3 -6DB BANDWIDTH	50
12.4 OCCUPIED CHANNEL BANDWIDTH	60
12.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL	70
12.6 BAND EDGE	80
12.7 CONDUCTED RF SPURIOUS EMISSION	93
13. TEST SETUP PHOTO	112
14. EUT CONSTRUCTIONAL DETAILS	112

1. VERSION

Report No.	Version	Description	Approved
ZHT-250708128W01-1	Rev.01	Initial issue of report	Sept. 18, 2025

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (b)(4)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

- (1) " N/A" denotes test is not applicable in this Test Report
- (2) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.
- (3) The circuit design, PCB layout, RF module/circuit, antenna type, and antenna position of SK23 and Y40 are the same. Only the camera is different, therefore SK23 is used for all tests.
HUY40 tested Conducted Emission and Radiated Emission projects

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Mini Camera
Test Model No.:	SK23, Y40
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n/802.11ax(HT20):11, /802.11n/ax(HT40):7
Operation Frequency:	802.11b/802.11g /802.11n/802.11ax(HT20): 2412-2462MHz/802.11n/ax(HT40): 2422-2452MHz
Channel separation:	5MHz
Modulation technology:	IEEE 802.11b: DQPSK/DBPSK/DSSS/CCK IEEE 802.11g: QPSK/BPSK/16QAM/64QAM/OFDM IEEE 802.11n: QPSK/BPSK/16QAM/64QAM/OFDM
Antenna Type:	FPC Antenna
Antenna gain:	1.7dBi
Ratings:	Input:DC 5 V or DC 3.7 V powered by Battery
Sample Number:	250708128YP001
Remark:The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Guangdong Zhonghan Testing Technology Co., Ltd. does not assume any responsibility.	

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g/802.11n/ax(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

Test channel	Frequency (MHz)
	802.11n/ax(HT40)
Lowest channel	2422MHz
Middle channel	2437MHz
Highest channel	2452MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: EUT use new battery during the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n/ax(HT20)	802.11n/ax(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13.5Mbps

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



RF Conducted Emission



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E1	AC Adapter	Huizhou Jinhu Industrial Developm ent Co., Ltd.	VCBAJACH	/	AE
E-2	Laptop	Lenovo (Beijing) Co., Ltd	ThinkPad E480	/	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



4. TEST FACILITY AND TEST INSTRUMENT USED

4.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.
Add.: Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number:255941
Designation Number: CN0325
IC Registered No.: 29832
CAB identifier: CN0143

4.2 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
2	Loop Antenna	TESEQ	HLA6121	58357	Oct. 11, 2024	Oct. 10, 2025
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	May 6, 2025	May 5, 2026
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	May 7, 2025	May 6, 2026
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	May 15, 2025	May 14, 2026
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	May 15, 2025	May 14, 2026
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	Oct. 21, 2024	Oct. 20, 2025
8	Amplifier	AEROFLEX	100KHz-40GHz	097	Oct. 21, 2024	Oct. 20, 2025
9	Spectrum Analyzer	R&S	FSV40	101413	Oct. 21, 2024	Oct. 20, 2025
10	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
11	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	May 7, 2025	May 6, 2026
12	Single Generator	Agilent	N5182A	MY48180575	May 7, 2025	May 6, 2026
13	Power meter	MWRFTest	MW100-RFCB	/	May 7, 2025	May 6, 2026
14	Power Amplifier Shielding Room	EMToni	2m3m3m	/	Nov. 25, 2021	Nov. 24, 2026
15	CABLE	EMToni	DA800-NM-NM-11000MM	/	May 6, 2025	May 5, 2026

Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
LISN	R&S	ENV216	102794	May 6, 2025	May 5, 2026
ISN CAT 6	Schwarzbeck	NTFM 8158	00318	May 7, 2025	May 6, 2026
ISN CAT 5	Schwarzbeck	CAT5 8158	00343	May 7, 2025	May 6, 2026
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	00101	May 8, 2025	May 7, 2026
Current Transformer Clamp	Schwarzbeck	SW 9605	SW9605 #209	May 8, 2025	May 7, 2026
CABLE	EMToni	G223-NM-BNCM -2000MM	/	May 7, 2025	May 6, 2026

Conducted Test Instrument

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	R&S	FSV40	101413	Oct. 21, 2024	Oct. 20, 2025
2	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
3	Power Sensor	MWRFTest	MW100-RFCB	/	May 7, 2025	May 6, 2026

4.3 TESTING SOFTWARE

Project	Software name	Edition
RF Conducted	MTS 8310	2.0.0.0
Conducted Emission	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission	EZ-EMC	FA-03A2 RE+

4.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	0.92dB
2	RF conducted power	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All radiated emissions (9k-30MHz)	$\pm 1.6\text{dB}$
5	All radiated emissions (<1G)	$\pm 5.1\text{dB}$
6	All radiated emissions (>1G)	$\pm 4.65\text{dB}$
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$
9	Occupied Bandwidth	$\pm 4.96\%$
10	Power Spectral Density	$\pm 0.71\text{dB}$

Decision Rule

- ☒ Uncertainty is not included
☐ Uncertainty is included

5. EMC EMISSION TEST

5.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

5.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


5.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.1.3 DEVIATION FROM TEST STANDARD

No deviation

5.1.4 TEST SETUP

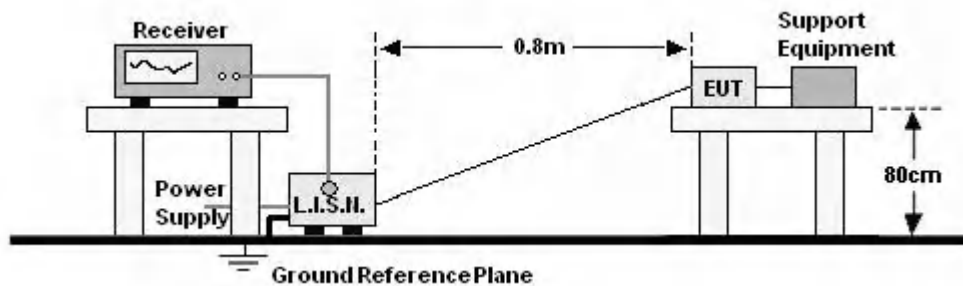

5.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



5.1.6 Test result

Model: SK23

Temperature:	24.4℃	Relative Humidity :	51.3%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/ 60Hz		

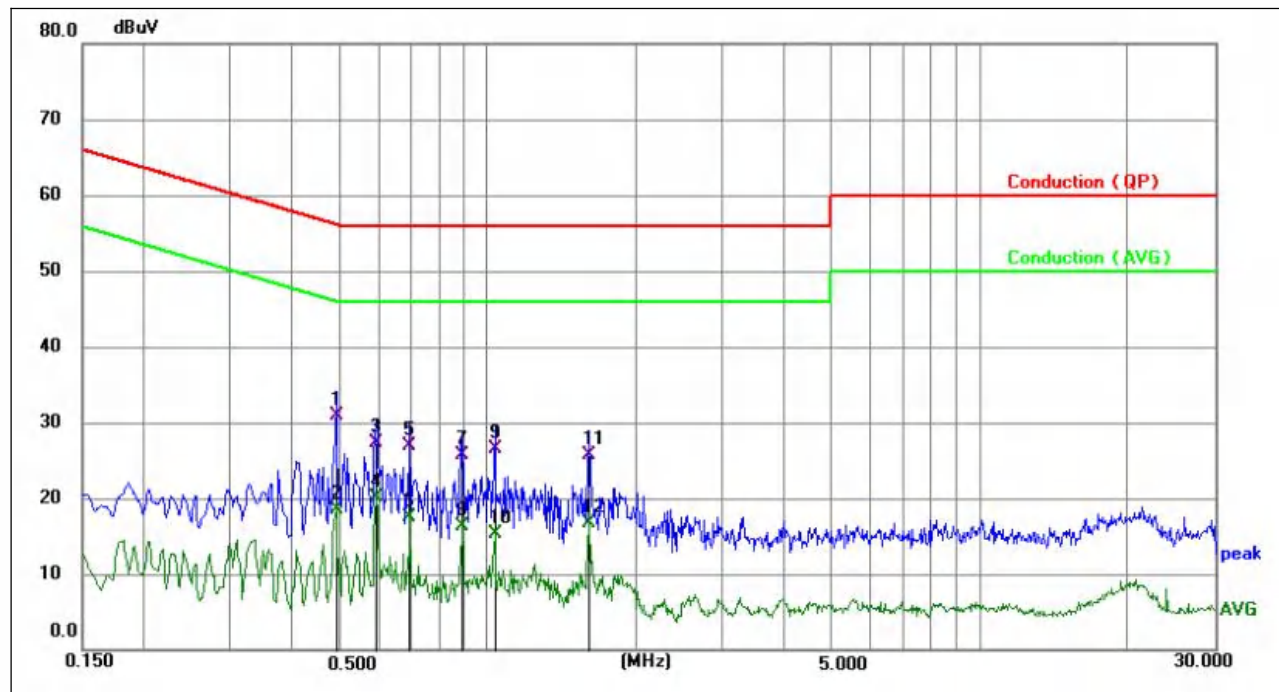


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.4920	20.98	10.02	31.00	56.13	-25.13	QP	P	
2	0.4920	8.56	10.02	18.58	46.13	-27.55	AVG	P	
3	0.5910	17.27	10.03	27.30	56.00	-28.70	QP	P	
4	0.5910	10.02	10.03	20.05	46.00	-25.95	AVG	P	
5	0.6945	16.78	10.04	26.82	56.00	-29.18	QP	P	
6	0.6945	7.38	10.04	17.42	46.00	-28.58	AVG	P	
7	0.8880	15.59	10.05	25.64	56.00	-30.36	QP	P	
8	0.8880	6.32	10.05	16.37	46.00	-29.63	AVG	P	
9	1.0363	16.47	10.06	26.53	56.00	-29.47	QP	P	
10	1.0363	5.23	10.06	15.29	46.00	-30.71	AVG	P	
11	1.6080	15.55	10.06	25.61	56.00	-30.39	QP	P	
12	1.6080	6.70	10.06	16.76	46.00	-29.24	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11n40 mode (High Channel:2452MHz).

Temperature:	24.4℃	Relative Humidity :	51.3%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/ 60Hz		

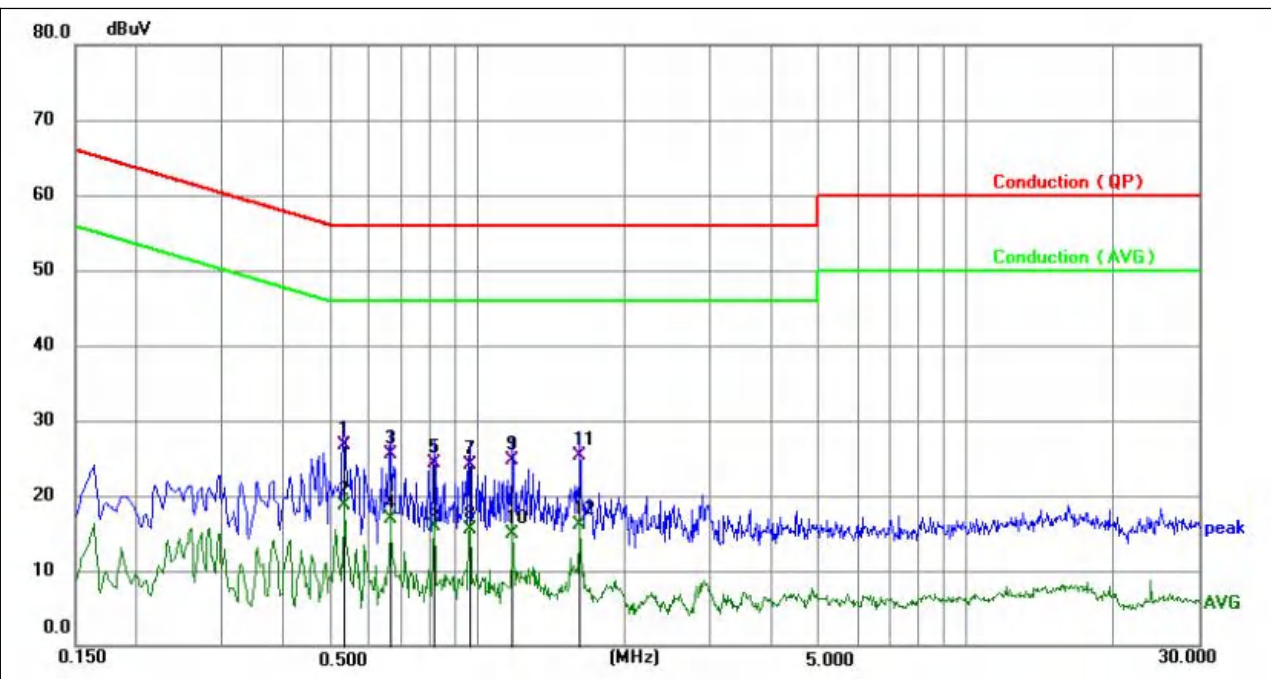


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5322	16.61	10.02	26.63	56.00	-29.37	QP	P	
2 *	0.5322	8.74	10.02	18.76	46.00	-27.24	AVG	P	
3	0.6613	15.39	10.03	25.42	56.00	-30.58	QP	P	
4	0.6613	6.88	10.03	16.91	46.00	-29.09	AVG	P	
5	0.8131	14.28	10.04	24.32	56.00	-31.68	QP	P	
6	0.8131	5.77	10.04	15.81	46.00	-30.19	AVG	P	
7	0.9633	14.09	10.06	24.15	56.00	-31.85	QP	P	
8	0.9633	5.52	10.06	15.58	46.00	-30.42	AVG	P	
9	1.1781	14.60	10.06	24.66	56.00	-31.34	QP	P	
10	1.1781	4.81	10.06	14.87	46.00	-31.13	AVG	P	
11	1.6190	15.30	10.06	25.36	56.00	-30.64	QP	P	
12	1.6190	6.08	10.06	16.14	46.00	-29.86	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11n40 mode (High Channel:2452MHz).



Temperature:	24.4℃	Relative Humidity :	51.3%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/ 60Hz		

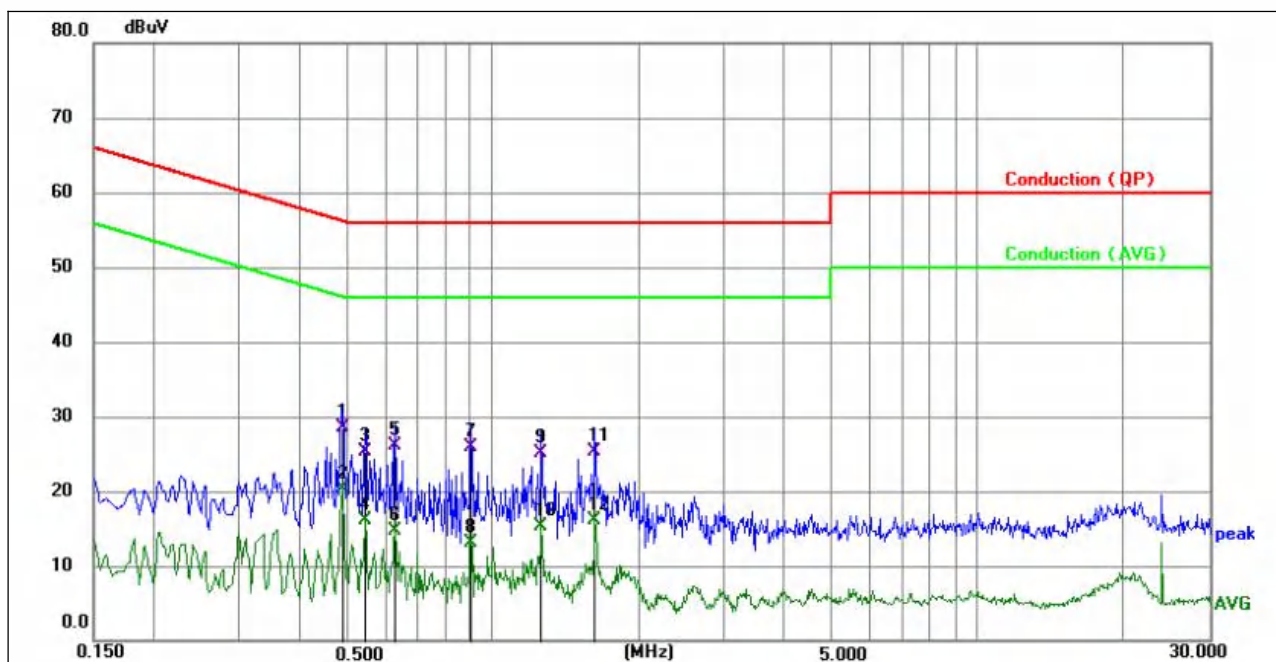


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4875	18.54	10.01	28.55	56.21	-27.66	QP	P	
2 *	0.4875	10.25	10.01	20.26	46.21	-25.95	AVG	P	
3	0.5435	15.37	10.02	25.39	56.00	-30.61	QP	P	
4	0.5435	6.01	10.02	16.03	46.00	-29.97	AVG	P	
5	0.6270	16.09	10.03	26.12	56.00	-29.88	QP	P	
6	0.6270	4.61	10.03	14.64	46.00	-31.36	AVG	P	
7	0.9015	15.93	10.05	25.98	56.00	-30.02	QP	P	
8	0.9015	2.98	10.05	13.03	46.00	-32.97	AVG	P	
9	1.2570	14.98	10.06	25.04	56.00	-30.96	QP	P	
10	1.2570	5.22	10.06	15.28	46.00	-30.72	AVG	P	
11	1.6215	15.24	10.06	25.30	56.00	-30.70	QP	P	
12	1.6215	6.03	10.06	16.09	46.00	-29.91	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor
- 4.The test data shows only the worst case 802.11n40 mode (High Channel:2452MHz).

Temperature:	24.4℃	Relative Humidity :	51.3%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/ 60Hz		

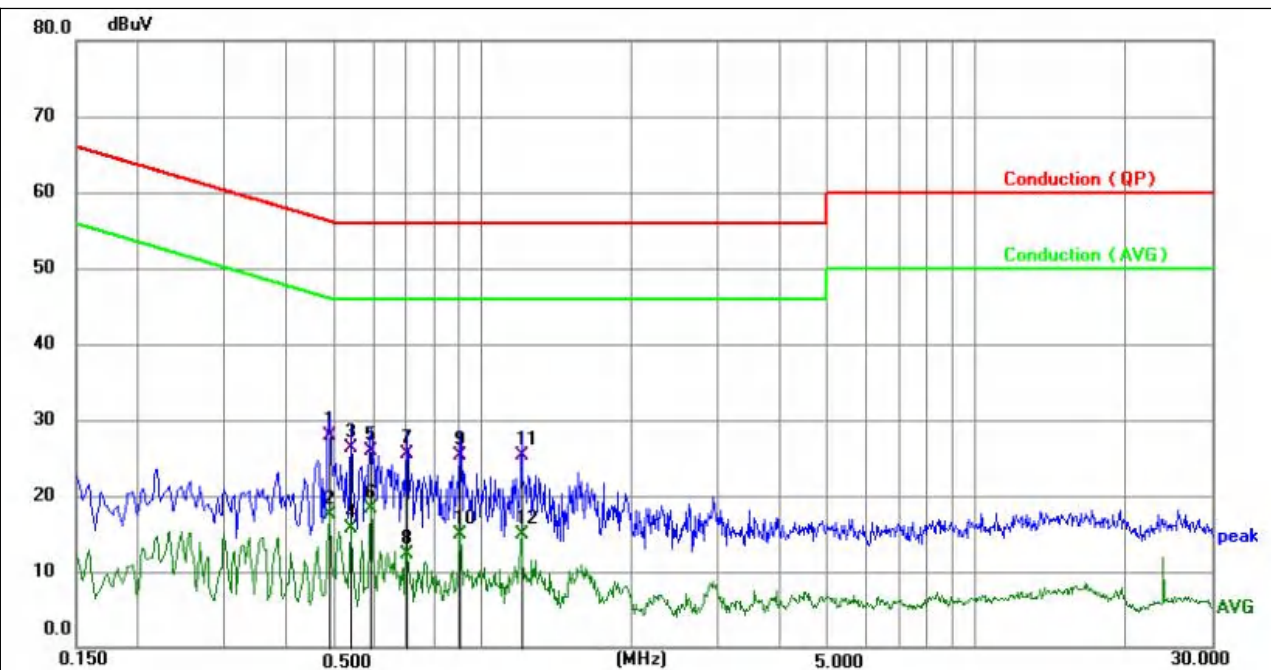

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4874	17.99	10.01	28.00	56.21	-28.21	QP	P	
2	0.4874	7.40	10.01	17.41	46.21	-28.80	AVG	P	
3	0.5414	16.25	10.02	26.27	56.00	-29.73	QP	P	
4	0.5414	5.67	10.02	15.69	46.00	-30.31	AVG	P	
5	0.5910	15.95	10.03	25.98	56.00	-30.02	QP	P	
6 *	0.5910	8.35	10.03	18.38	46.00	-27.62	AVG	P	
7	0.7035	15.41	10.04	25.45	56.00	-30.55	QP	P	
8	0.7035	2.20	10.04	12.24	46.00	-33.76	AVG	P	
9	0.9014	15.32	10.05	25.37	56.00	-30.63	QP	P	
10	0.9014	4.95	10.05	15.00	46.00	-31.00	AVG	P	
11	1.2030	15.33	10.06	25.39	56.00	-30.61	QP	P	
12	1.2030	4.77	10.06	14.83	46.00	-31.17	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11n40 mode (High Channel:2452MHz).



Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.

- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.2.3 DEVIATION FROM TEST STANDARD


No deviation

5.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

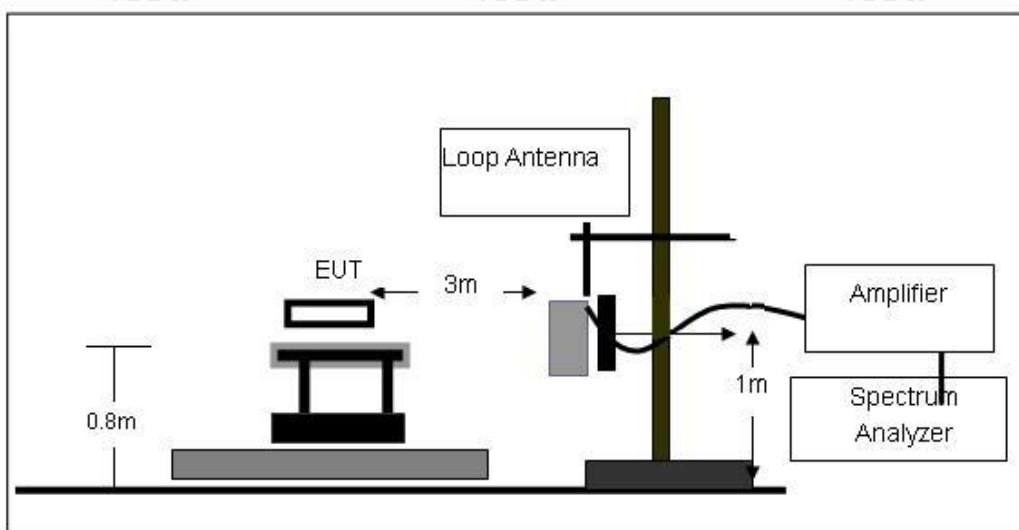

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

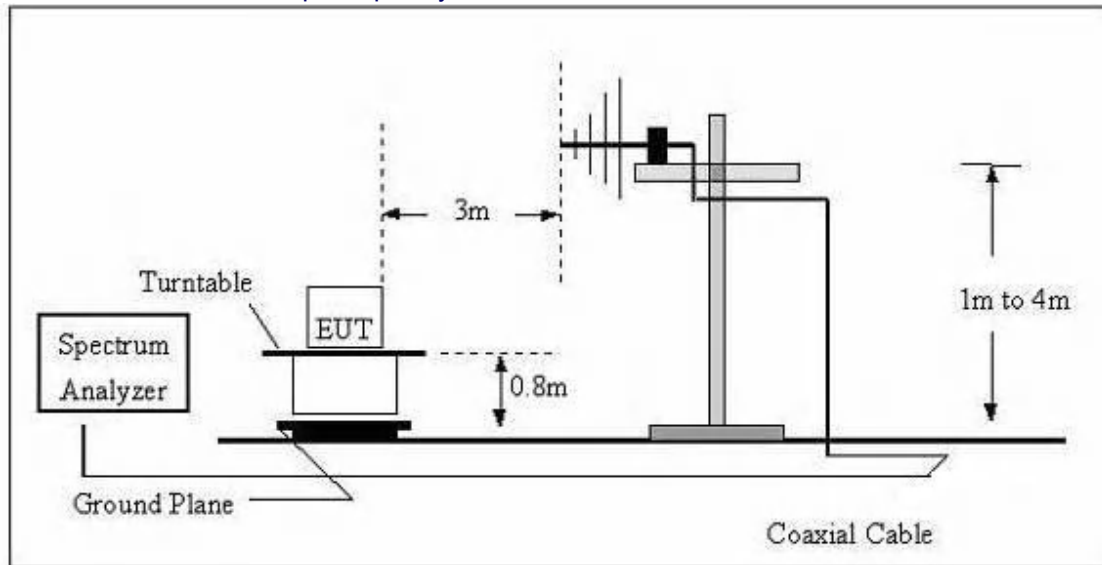

(C) Radiated Emission Test-Up Frequency Above 1GHz

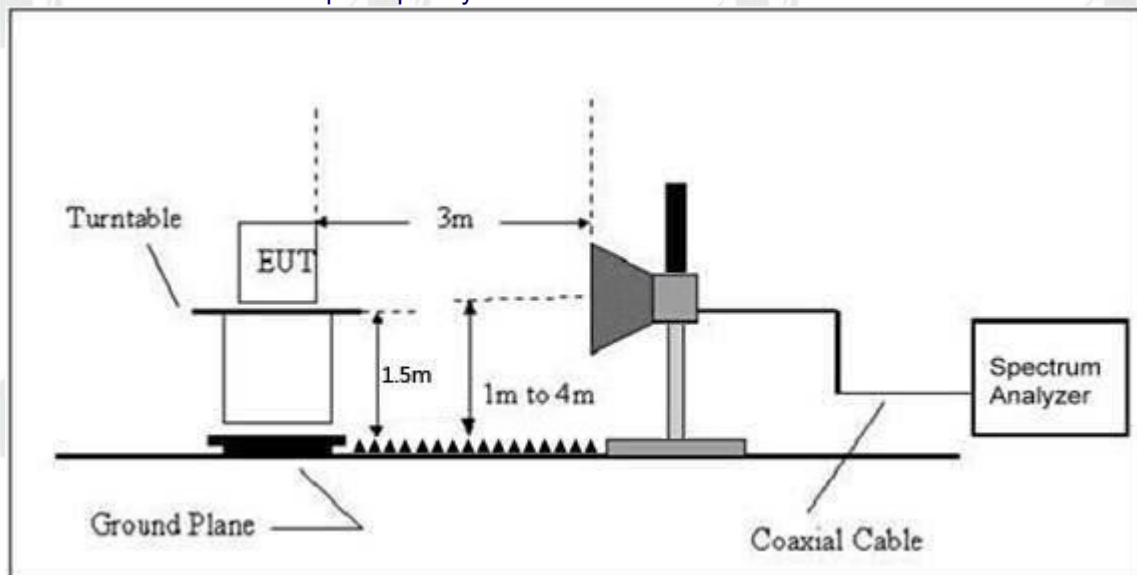

5.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz


Model: SK23

Temperature :	24.4℃	Relative Humidity :	51.3%
Pressure :	1010kPa	Polarization :	Horizontal
Test Voltage :	DC 3.7 V		

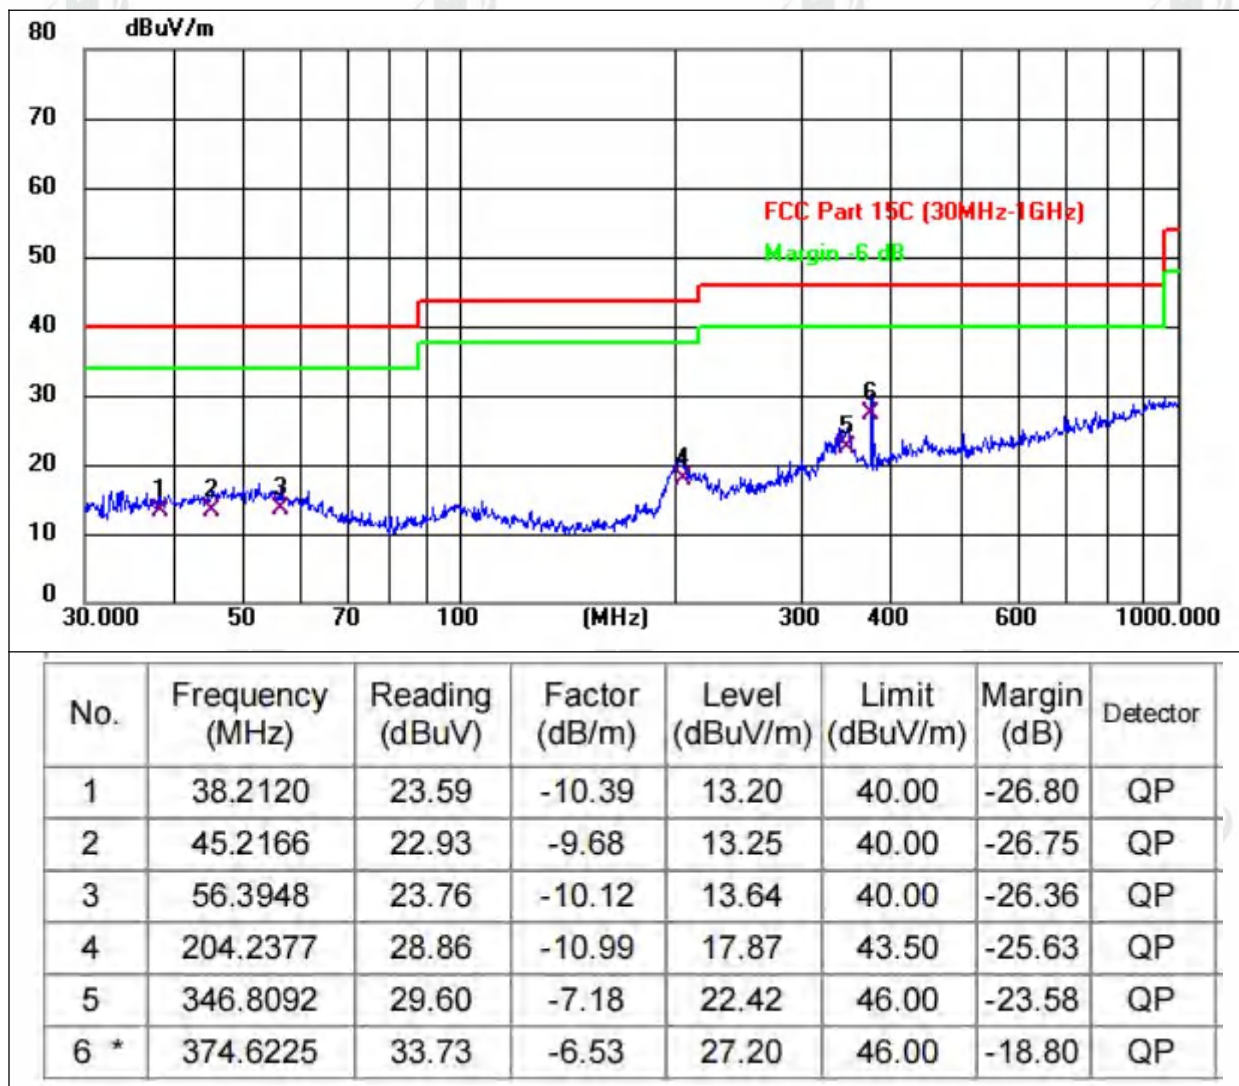




Temperature :	24.4℃	Relative Humidity :	51.3%
Pressure :	1010kPa	Polarization :	Vertical
Test Voltage :	DC 3.7 V		

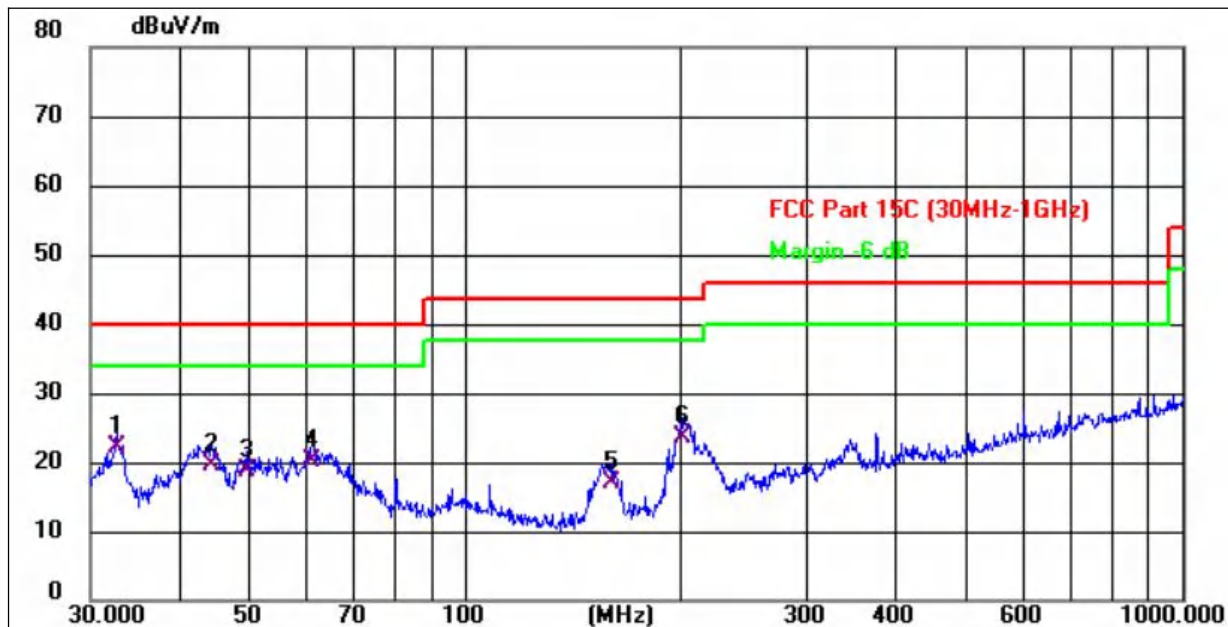

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	32.6340	33.43	-11.16	22.27	40.00	-17.73	QP
2	44.2752	29.23	-9.76	19.47	40.00	-20.53	QP
3	49.7066	27.93	-9.28	18.65	40.00	-21.35	QP
4	61.1315	31.01	-10.91	20.10	40.00	-19.90	QP
5	159.7844	30.51	-13.61	16.90	43.50	-26.60	QP
6	200.6880	34.56	-11.13	23.43	43.50	-20.07	QP


Model: Y40

Temperature :	24.4℃	Relative Humidity :	51.3%
Pressure :	1010kPa	Polarization :	Horizontal
Test Voltage :	DC 3.7 V		

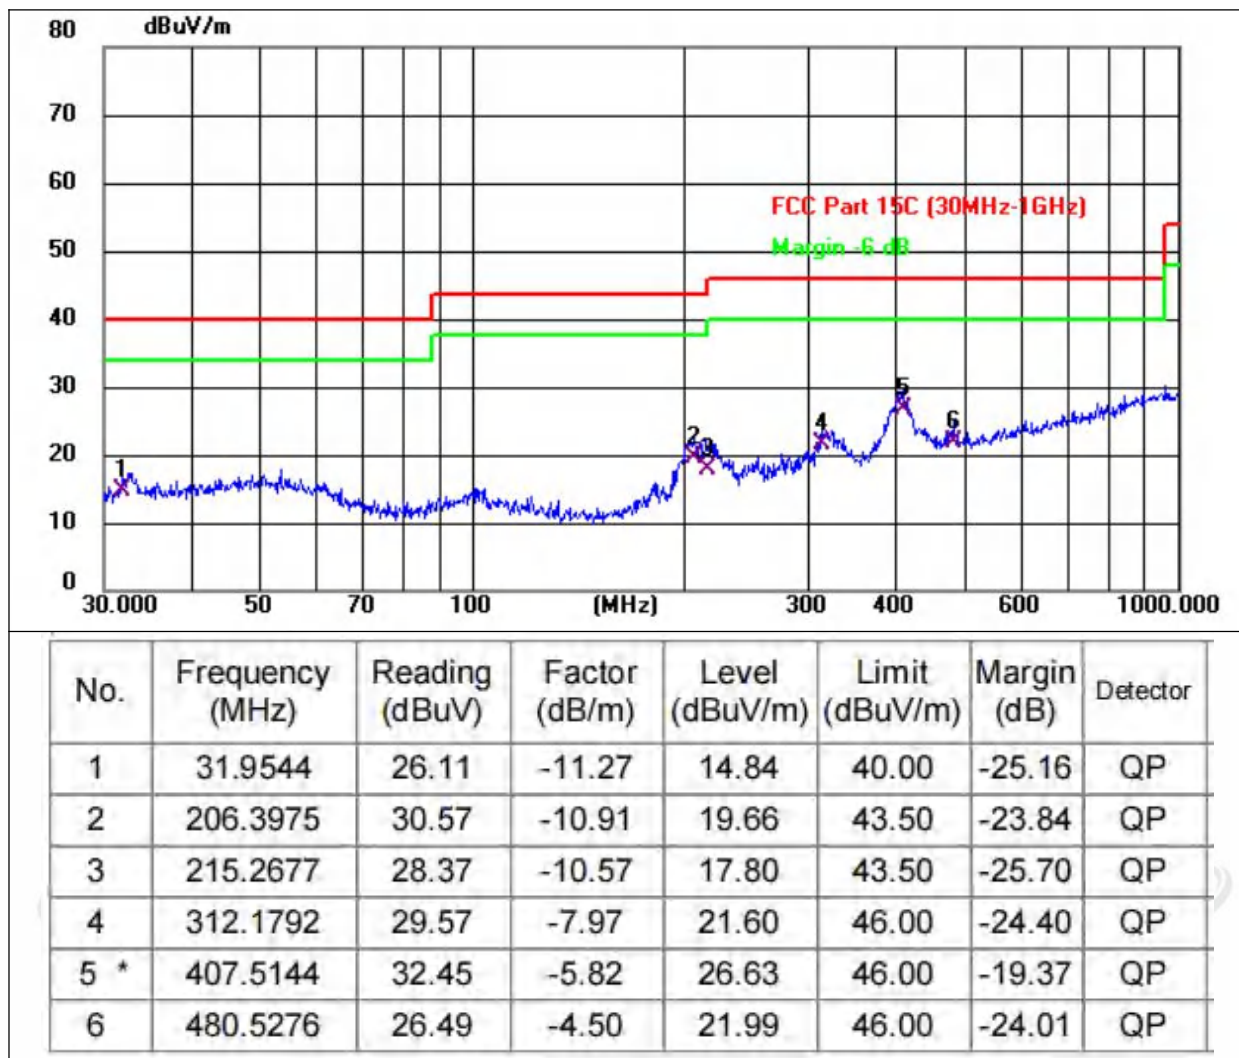



Temperature :	24.4℃	Relative Humidity :	51.3%
Pressure :	1010kPa	Polarization :	Vertical
Test Voltage :	DC 3.7 V		

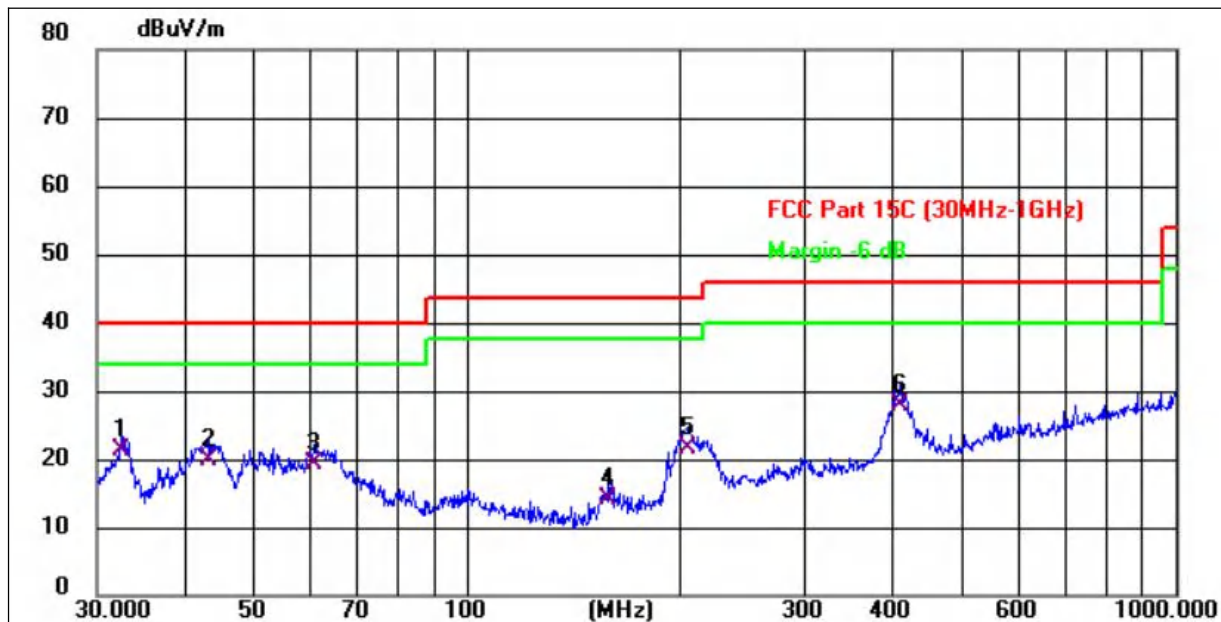

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.4060	32.61	-11.20	21.41	40.00	-18.59	QP
2	43.0504	29.85	-9.87	19.98	40.00	-20.02	QP
3	60.9175	30.11	-10.85	19.26	40.00	-20.74	QP
4	158.1123	27.84	-13.70	14.14	43.50	-29.36	QP
5	204.2377	32.61	-10.99	21.62	43.50	-21.88	QP
6 *	408.9460	33.79	-5.79	28.00	46.00	-18.00	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n40 mode (High Channel:2452MHz).

1GHz~25GHz

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
802.11b									
Low Channel:2412MHz									
V	4824.00	56.78	30.55	5.77	24.66	56.66	74	-17.34	PK
V	4824.00	43.29	30.55	5.77	24.66	43.17	54	-10.83	AV
H	4824.00	55.16	30.33	6.32	24.55	55.7	74	-18.3	PK
H	4824.00	43.24	30.33	6.32	24.55	43.78	54	-10.22	AV
Middle Channel:2437MHz									
V	4874.00	58.18	30.55	5.77	24.66	58.06	74	-15.94	PK
V	4874.00	41.55	30.55	5.77	24.66	41.43	54	-12.57	AV
H	4874.00	57.67	30.33	6.32	24.55	58.21	74	-15.79	PK
H	4874.00	43.55	30.33	6.32	24.55	44.09	54	-9.91	AV
High Channel:2462MHz									
V	4924.00	56.3	30.55	5.77	24.66	56.18	74	-17.82	PK
V	4924.00	41.03	30.55	5.77	24.66	40.91	54	-13.09	AV
H	4924.00	58.2	30.33	6.32	24.55	58.74	74	-15.26	PK
H	4924.00	44.14	30.33	6.32	24.55	44.68	54	-9.32	AV
802.11g									
Low Channel:2412MHz									
V	4824.00	59.25	30.55	5.77	24.66	59.13	74	-14.87	PK
V	4824.00	41.79	30.55	5.77	24.66	41.67	54	-12.33	AV
H	4824.00	57.68	30.33	6.32	24.55	58.22	74	-15.78	PK
H	4824.00	41.46	30.33	6.32	24.55	42	54	-12	AV
Middle Channel:2437MHz									
V	4874.00	55.09	30.55	5.77	24.66	54.97	74	-19.03	PK
V	4874.00	41.15	30.55	5.77	24.66	41.03	54	-12.97	AV
H	4874.00	58.66	30.33	6.32	24.55	59.2	74	-14.8	PK
H	4874.00	43.68	30.33	6.32	24.55	44.22	54	-9.78	AV
High Channel:2462MHz									
V	4924.00	58.23	30.55	5.77	24.66	58.11	74	-15.89	PK
V	4924.00	44.99	30.55	5.77	24.66	44.87	54	-9.13	AV
H	4924.00	56.79	30.33	6.32	24.55	57.33	74	-16.67	PK
H	4924.00	43.08	30.33	6.32	24.55	43.62	54	-10.38	AV
802.11n 20									
Low Channel:2412MHz									
V	4824.00	59.66	30.55	5.77	24.66	59.54	74	-14.46	PK
V	4824.00	42.65	30.55	5.77	24.66	42.53	54	-11.47	AV
H	4824.00	58.49	30.33	6.32	24.55	59.03	74	-14.97	PK
H	4824.00	44.42	30.33	6.32	24.55	44.96	54	-9.04	AV
Middle Channel:2437MHz									
V	4874.00	56.94	30.55	5.77	24.66	56.82	74	-17.18	PK
V	4874.00	42.23	30.55	5.77	24.66	42.11	54	-11.89	AV
H	4874.00	57.03	30.33	6.32	24.55	57.57	74	-16.43	PK
H	4874.00	43.37	30.33	6.32	24.55	43.91	54	-10.09	AV
High Channel:2462MHz									
V	4924.00	56.57	30.55	5.77	24.66	56.45	74	-17.55	PK
V	4924.00	41.23	30.55	5.77	24.66	41.11	54	-12.89	AV
H	4924.00	59.57	30.33	6.32	24.55	60.11	74	-13.89	PK
H	4924.00	41.58	30.33	6.32	24.55	42.12	54	-11.88	AV
802.11ax 20									
Low Channel:2412MHz									
V	4824.00	55.32	30.55	5.77	24.66	55.2	74	-18.8	PK



V	4824.00	42.47	30.55	5.77	24.66	42.35	54	-11.65	AV
H	4824.00	56.25	30.33	6.32	24.55	56.79	74	-17.21	PK
H	4824.00	43.64	30.33	6.32	24.55	44.18	54	-9.82	AV
Middle Channel:2437MHz									
V	4874.00	59.18	30.55	5.77	24.66	59.06	74	-14.94	PK
V	4874.00	41.33	30.55	5.77	24.66	41.21	54	-12.79	AV
H	4874.00	56.41	30.33	6.32	24.55	56.95	74	-17.05	PK
H	4874.00	43.22	30.33	6.32	24.55	43.76	54	-10.24	AV
High Channel:2462MHz									
V	4924.00	56.33	30.55	5.77	24.66	56.21	74	-17.79	PK
V	4924.00	41.91	30.55	5.77	24.66	41.79	54	-12.21	AV
H	4924.00	58.59	30.33	6.32	24.55	59.13	74	-14.87	PK
H	4924.00	43.83	30.33	6.32	24.55	44.37	54	-9.63	AV
802.11n 40									
Low Channel:2422MHz									
V	4844.00	57.48	30.55	5.77	24.66	57.36	74	-16.64	PK
V	4924.00	41.37	30.55	5.77	24.66	41.25	54	-12.75	AV
H	4924.00	56.24	30.33	6.32	24.55	56.78	74	-17.22	PK
H	4924.00	41.55	30.33	6.32	24.55	42.09	54	-11.91	AV
Middle Channel:2437MHz									
V	4874.00	56.8	30.55	5.77	24.66	56.68	74	-17.32	PK
V	4874.00	41.02	30.55	5.77	24.66	40.9	54	-13.1	AV
H	4874.00	59.95	30.33	6.32	24.55	60.49	74	-13.51	PK
H	4874.00	44.42	30.33	6.32	24.55	44.96	54	-9.04	AV
High Channel:2452MHz									
V	4904.00	59.97	30.55	5.77	24.66	59.85	74	-14.15	PK
V	4904.00	43.47	30.55	5.77	24.66	43.35	54	-10.65	AV
H	4904.00	59.21	30.33	6.32	24.55	59.75	74	-14.25	PK
H	4904.00	41.32	30.33	6.32	24.55	41.86	54	-12.14	AV
802.11ax 40									
Low Channel:2422MHz									
V	4844.00	57.3	30.55	5.77	24.66	57.18	74	-16.82	PK
V	4924.00	42.87	30.55	5.77	24.66	42.75	54	-11.25	AV
H	4924.00	56.72	30.33	6.32	24.55	57.26	74	-16.74	PK
H	4924.00	42.97	30.33	6.32	24.55	43.51	54	-10.49	AV
Middle Channel:2437MHz									
V	4874.00	57.17	30.55	5.77	24.66	57.05	74	-16.95	PK
V	4874.00	43.87	30.55	5.77	24.66	43.75	54	-10.25	AV
H	4874.00	59.68	30.33	6.32	24.55	60.22	74	-13.78	PK
H	4874.00	43.47	30.33	6.32	24.55	44.01	54	-9.99	AV
High Channel:2452MHz									
V	4904.00	58.56	30.55	5.77	24.66	58.44	74	-15.56	PK
V	4904.00	41.36	30.55	5.77	24.66	41.24	54	-12.76	AV
H	4904.00	57.69	30.33	6.32	24.55	58.23	74	-15.77	PK
H	4904.00	42.32	30.33	6.32	24.55	42.86	54	-11.14	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

6. RADIATED BAND EMISSION MEASUREMENT

6.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

6.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

6.3 DEVIATION FROM TEST STANDARD

No deviation



Radiated Emission Test-Up Frequency Above 1GHz

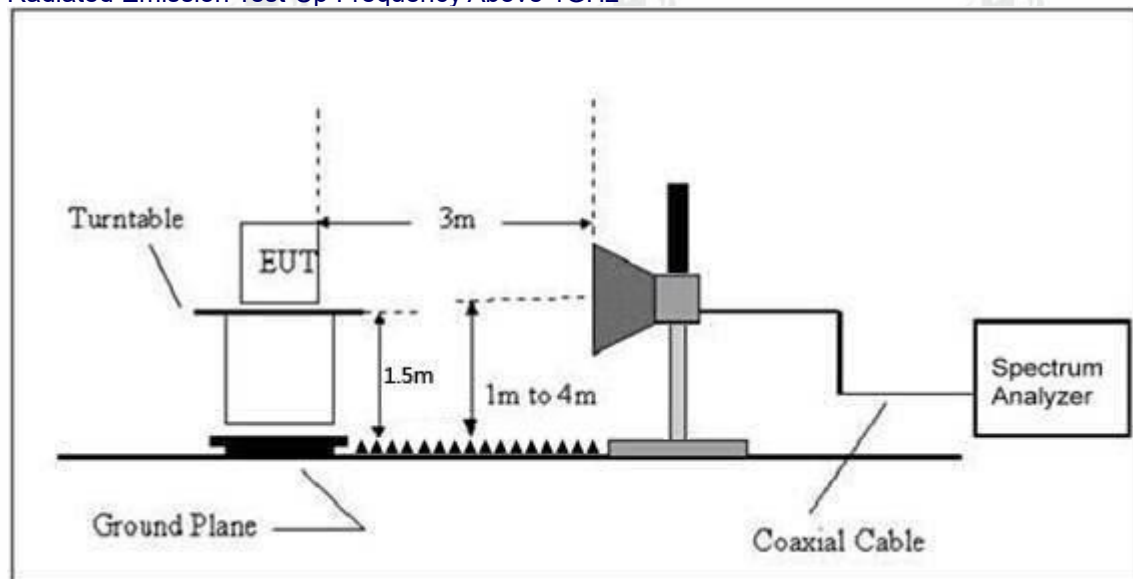

6.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margi n (dB)	Detect or Type	Result
802.11b	LowChannel 2412MHz										
	H	2390.00	61.78	30.22	4.85	23.98	60.39	74.00	-13.61	PK	PASS
	H	2390.00	48.53	30.22	4.85	23.98	47.14	54.00	-6.86	AV	PASS
	H	2400.00	59.62	30.22	4.85	23.98	58.23	74.00	-15.77	PK	PASS
	H	2400.00	48.27	30.22	4.85	23.98	46.88	54.00	-7.12	AV	PASS
	V	2390.00	62.10	30.22	4.85	23.98	60.71	74.00	-13.29	PK	PASS
	V	2390.00	46.89	30.22	4.85	23.98	45.50	54.00	-8.50	AV	PASS
	V	2400.00	60.37	30.22	4.85	23.98	58.98	74.00	-15.02	PK	PASS
	V	2400.00	47.44	30.22	4.85	23.98	46.05	54.00	-7.95	AV	PASS
	High Channel 2462MHz										
	H	2483.50	61.45	30.22	4.85	23.98	60.06	74.00	-13.94	PK	PASS
	H	2483.50	47.64	30.22	4.85	23.98	46.25	54.00	-7.75	AV	PASS
	H	2500.00	59.84	30.22	4.85	23.98	58.45	74.00	-15.55	PK	PASS
	H	2500.00	46.31	30.22	4.85	23.98	44.92	54.00	-9.08	AV	PASS
	V	2483.50	59.83	30.22	4.85	23.98	58.44	74.00	-15.56	PK	PASS
	V	2483.50	48.73	30.22	4.85	23.98	47.34	54.00	-6.66	AV	PASS
	V	2500.00	61.03	30.22	4.85	23.98	59.64	74.00	-14.36	PK	PASS
	V	2500.00	47.43	30.22	4.85	23.98	46.04	54.00	-7.96	AV	PASS
802.11g	Low Channel 2412MHz										
	H	2390.00	59.65	30.22	4.85	23.98	58.26	74.00	-15.74	PK	PASS
	H	2390.00	46.76	30.22	4.85	23.98	45.37	54.00	-8.63	AV	PASS
	H	2400.00	60.45	30.22	4.85	23.98	59.06	74.00	-14.94	PK	PASS
	H	2400.00	46.20	30.22	4.85	23.98	44.81	54.00	-9.19	AV	PASS
	V	2390.00	60.27	30.22	4.85	23.98	58.88	74.00	-15.12	PK	PASS
	V	2390.00	46.62	30.22	4.85	23.98	45.23	54.00	-8.77	AV	PASS
	V	2400.00	59.86	30.22	4.85	23.98	58.47	74.00	-15.53	PK	PASS
	V	2400.00	47.35	30.22	4.85	23.98	45.96	54.00	-8.04	AV	PASS
	High Channel 2462MHz										
	H	2483.50	60.14	30.22	4.85	23.98	58.75	74.00	-15.25	PK	PASS
	H	2483.50	46.13	30.22	4.85	23.98	44.74	54.00	-9.26	AV	PASS
	H	2500.00	59.76	30.22	4.85	23.98	58.37	74.00	-15.63	PK	PASS
	H	2500.00	46.49	30.22	4.85	23.98	45.10	54.00	-8.90	AV	PASS
	V	2483.50	59.97	30.22	4.85	23.98	58.58	74.00	-15.42	PK	PASS
	V	2483.50	47.35	30.22	4.85	23.98	45.96	54.00	-8.04	AV	PASS
	V	2500.00	62.44	30.22	4.85	23.98	61.05	74.00	-12.95	PK	PASS
	V	2500.00	47.30	30.22	4.85	23.98	45.91	54.00	-8.09	AV	PASS
802.11n20	Low Channel 2412MHz										
	H	2390.00	62.07	30.22	4.85	23.98	60.68	74.00	-13.32	PK	PASS
	H	2390.00	47.83	30.22	4.85	23.98	46.44	54.00	-7.56	AV	PASS
	H	2400.00	59.02	30.22	4.85	23.98	57.63	74.00	-16.37	PK	PASS
	H	2400.00	46.21	30.22	4.85	23.98	44.82	54.00	-9.18	AV	PASS
	V	2390.00	60.73	30.22	4.85	23.98	59.34	74.00	-14.66	PK	PASS
	V	2390.00	47.92	30.22	4.85	23.98	46.53	54.00	-7.47	AV	PASS
	V	2400.00	60.47	30.22	4.85	23.98	59.08	74.00	-14.92	PK	PASS
	V	2400.00	48.55	30.22	4.85	23.98	47.16	54.00	-6.84	AV	PASS
	High Channel 2462MHz										
	H	2483.50	61.24	30.22	4.85	23.98	59.85	74.00	-14.15	PK	PASS
	H	2483.50	46.86	30.22	4.85	23.98	45.47	54.00	-8.53	AV	PASS
	H	2500.00	61.98	30.22	4.85	23.98	60.59	74.00	-13.41	PK	PASS
	H	2500.00	46.18	30.22	4.85	23.98	44.79	54.00	-9.21	AV	PASS
	V	2483.50	61.57	30.22	4.85	23.98	60.18	74.00	-13.82	PK	PASS



	V	2483.50	48.03	30.22	4.85	23.98	46.64	54.00	-7.36	AV	PASS
	V	2500.00	60.60	30.22	4.85	23.98	59.21	74.00	-14.79	PK	PASS
	V	2500.00	48.15	30.22	4.85	23.98	46.76	54.00	-7.24	AV	PASS
802.11ax2 0	Low Channel 2412MHz										
	H	2390.00	60.67	30.22	4.85	23.98	59.28	74.00	-14.72	PK	PASS
	H	2390.00	47.47	30.22	4.85	23.98	46.08	54.00	-7.92	AV	PASS
	H	2400.00	61.42	30.22	4.85	23.98	60.03	74.00	-13.97	PK	PASS
	H	2400.00	47.59	30.22	4.85	23.98	46.20	54.00	-7.80	AV	PASS
	V	2390.00	62.83	30.22	4.85	23.98	61.44	74.00	-12.56	PK	PASS
	V	2390.00	47.79	30.22	4.85	23.98	46.40	54.00	-7.60	AV	PASS
	V	2400.00	59.54	30.22	4.85	23.98	58.15	74.00	-15.85	PK	PASS
	V	2400.00	46.29	30.22	4.85	23.98	44.90	54.00	-9.10	AV	PASS
	High Channel 2462MHz										
	H	2483.50	62.06	30.22	4.85	23.98	60.67	74.00	-13.33	PK	PASS
	H	2483.50	48.35	30.22	4.85	23.98	46.96	54.00	-7.04	AV	PASS
	H	2500.00	60.37	30.22	4.85	23.98	58.98	74.00	-15.02	PK	PASS
	H	2500.00	47.18	30.22	4.85	23.98	45.79	54.00	-8.21	AV	PASS
	V	2483.50	60.43	30.22	4.85	23.98	59.04	74.00	-14.96	PK	PASS
	V	2483.50	46.41	30.22	4.85	23.98	45.02	54.00	-8.98	AV	PASS
	V	2500.00	61.74	30.22	4.85	23.98	60.35	74.00	-13.65	PK	PASS
	V	2500.00	47.72	30.22	4.85	23.98	46.33	54.00	-7.67	AV	PASS
802.11n 40	Low Channel 2422MHz										
	H	2390.00	60.58	30.22	4.85	23.98	59.19	74.00	-14.81	PK	PASS
	H	2390.00	48.52	30.22	4.85	23.98	47.13	54.00	-6.87	AV	PASS
	H	2400.00	60.23	30.22	4.85	23.98	58.84	74.00	-15.16	PK	PASS
	H	2400.00	48.16	30.22	4.85	23.98	46.77	54.00	-7.23	AV	PASS
	V	2390.00	62.96	30.22	4.85	23.98	61.57	74.00	-12.43	PK	PASS
	V	2390.00	48.15	30.22	4.85	23.98	46.76	54.00	-7.24	AV	PASS
	V	2400.00	62.59	30.22	4.85	23.98	61.20	74.00	-12.80	PK	PASS
	V	2400.00	46.79	30.22	4.85	23.98	45.40	54.00	-8.60	AV	PASS
	High Channel 2452MHz										
	H	2483.50	60.85	30.22	4.85	23.98	59.46	74.00	-14.54	PK	PASS
	H	2483.50	46.95	30.22	4.85	23.98	45.56	54.00	-8.44	AV	PASS
	H	2500.00	62.18	30.22	4.85	23.98	60.79	74.00	-13.21	PK	PASS
	H	2500.00	47.00	30.22	4.85	23.98	45.61	54.00	-8.39	AV	PASS
	V	2483.50	59.49	30.22	4.85	23.98	58.10	74.00	-15.90	PK	PASS
	V	2483.50	46.34	30.22	4.85	23.98	44.95	54.00	-9.05	AV	PASS
	V	2500.00	60.50	30.22	4.85	23.98	59.11	74.00	-14.89	PK	PASS
	V	2500.00	46.46	30.22	4.85	23.98	45.07	54.00	-8.93	AV	PASS
802.11ax 40	Low Channel 2422MHz										
	H	2390.00	60.29	30.22	4.85	23.98	58.90	74.00	-15.10	PK	PASS
	H	2390.00	48.14	30.22	4.85	23.98	46.75	54.00	-7.25	AV	PASS
	H	2400.00	60.25	30.22	4.85	23.98	58.86	74.00	-15.14	PK	PASS
	H	2400.00	46.43	30.22	4.85	23.98	45.04	54.00	-8.96	AV	PASS
	V	2390.00	60.99	30.22	4.85	23.98	59.60	74.00	-14.40	PK	PASS
	V	2390.00	47.75	30.22	4.85	23.98	46.36	54.00	-7.64	AV	PASS
	V	2400.00	59.39	30.22	4.85	23.98	58.00	74.00	-16.00	PK	PASS
	V	2400.00	47.30	30.22	4.85	23.98	45.91	54.00	-8.09	AV	PASS
	High Channel 2452MHz										
	H	2483.50	59.62	30.22	4.85	23.98	58.23	74.00	-15.77	PK	PASS
	H	2483.50	46.31	30.22	4.85	23.98	44.92	54.00	-9.08	AV	PASS
	H	2500.00	62.85	30.22	4.85	23.98	61.46	74.00	-12.54	PK	PASS
	H	2500.00	46.48	30.22	4.85	23.98	45.09	54.00	-8.91	AV	PASS
	V	2483.50	62.70	30.22	4.85	23.98	61.31	74.00	-12.69	PK	PASS
	V	2483.50	47.43	30.22	4.85	23.98	46.04	54.00	-7.96	AV	PASS
	V	2500.00	61.40	30.22	4.85	23.98	60.01	74.00	-13.99	PK	PASS
	V	2500.00	48.69	30.22	4.85	23.98	47.30	54.00	-6.70	AV	PASS



Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

7. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


7.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

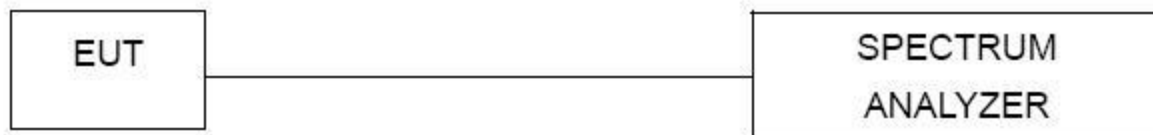

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULT

Temperature :	25.9℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 3.7 V

Please refer to APPENDIX A

8. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

8.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

Temperature :	25.8℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 3.7 V
Test Mode :	TX Mode		

Please refer to APPENDIX A

9. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULT

Temperature :	25.3℃	Relative Humidity :	55%
Pressure :	101kPa	Test Voltage :	DC 3.7 V

Please refer to APPENDIX A

10. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

10.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

10.2 TEST PROCEDURE


Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP

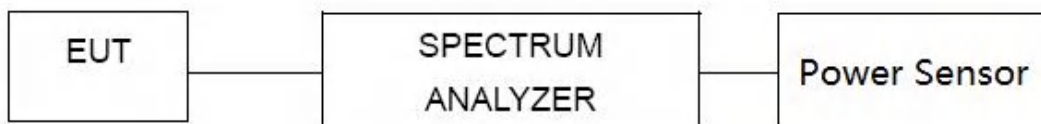

10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

10.6 TEST RESULTS

Please refer to APPENDIX A

11. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is FPC Antenna, the best case gain of the antenna is 1.7dBi, reference to the appendix II for details	



12. APPENDIX A

12.1 DUTY CYCLE


Mode	Frequency (MHz)	Ton ms	Total ms	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
b	2412	12.42	12.52	99.2	0	0.08
b	2437	12.42	12.58	98.73	0	0.08
b	2462	12.42	12.53	99.12	0	0.08
g	2412	1.93	2.06	93.69	0.28	0.52
g	2437	2.07	2.24	92.41	0.34	0.48
g	2462	2.07	2.12	97.64	0.1	0.48
n20	2412	1.92	2.07	92.75	0.33	0.52
n20	2437	1.92	1.97	97.46	0.11	0.52
n20	2462	1.92	2.01	95.52	0.2	0.52
n40	2422	1.93	2.06	93.69	0.28	0.52
n40	2437	1.92	1.97	97.46	0.11	0.52
n40	2452	1.92	2.09	91.87	0.37	0.52
ax20	2412	0.94	1.07	87.85	0.56	1.06
ax20	2437	0.95	1.03	92.23	0.35	1.05
ax20	2462	0.95	1.03	92.23	0.35	1.05
ax40	2422	0.94	0.98	95.92	0.18	1.06
ax40	2437	0.95	1.05	90.48	0.43	1.05
ax40	2452	0.95	1.04	91.35	0.39	1.05

Note:


1. Duty Cycle = T_{on} / T_{total} 2. Correction Factor = $10 \log (1 / \text{Duty Cycle})$.

Test Graphs


Duty Cycle NVNT b 2412MHz Ant1

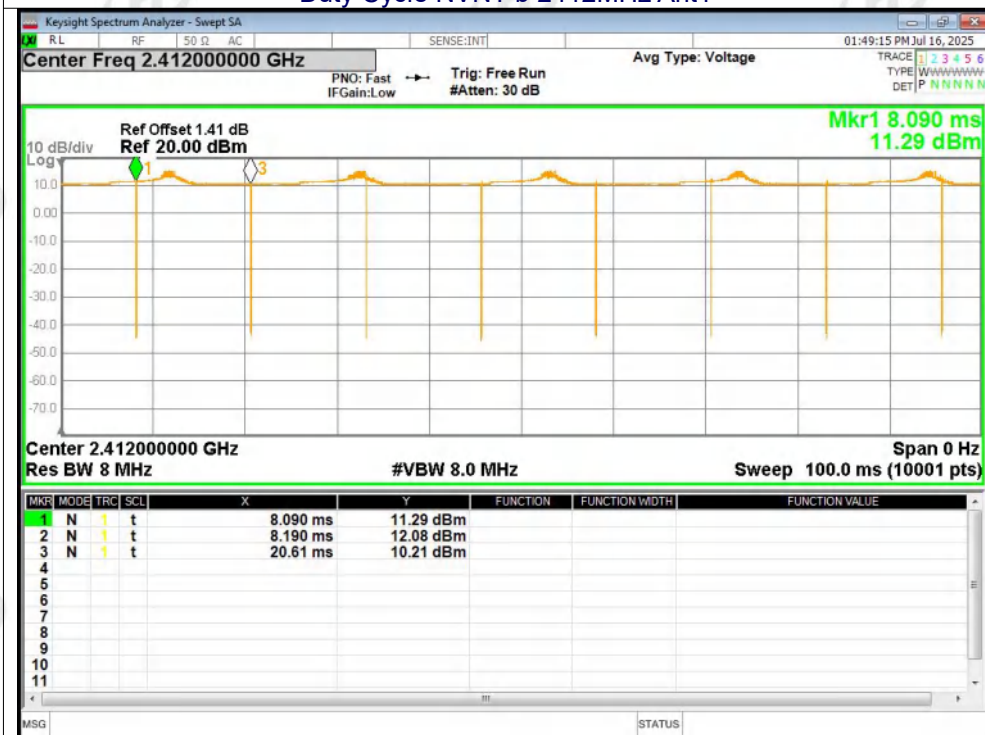


Duty Cycle NVNT b 2437MHz Ant1


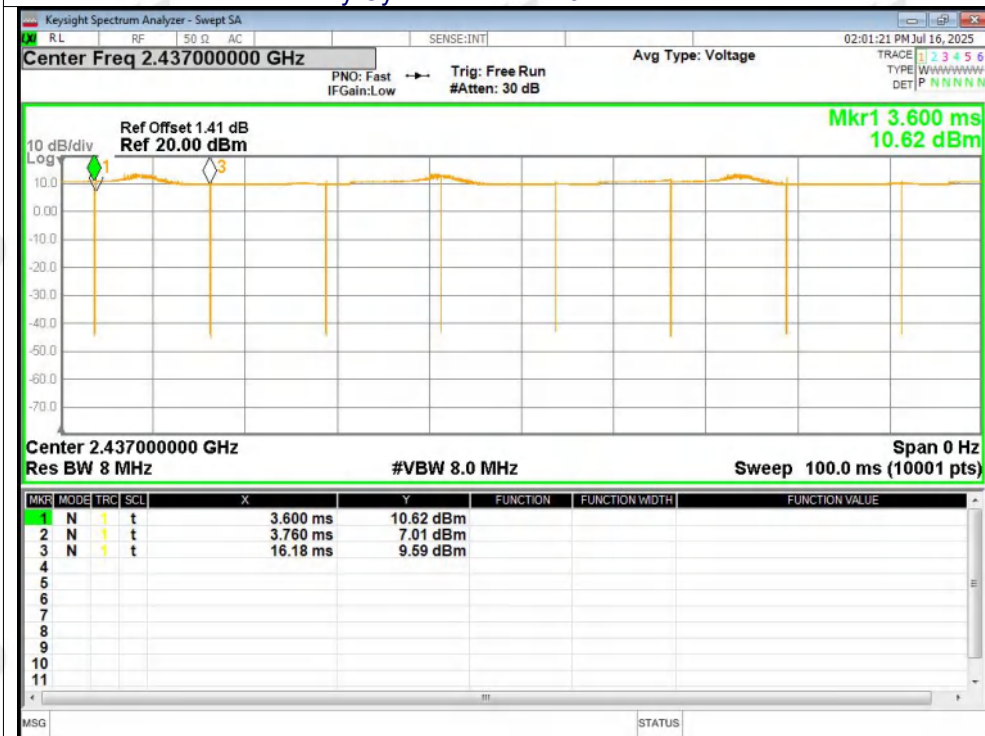


Duty Cycle NVNT b 2462MHz Ant1

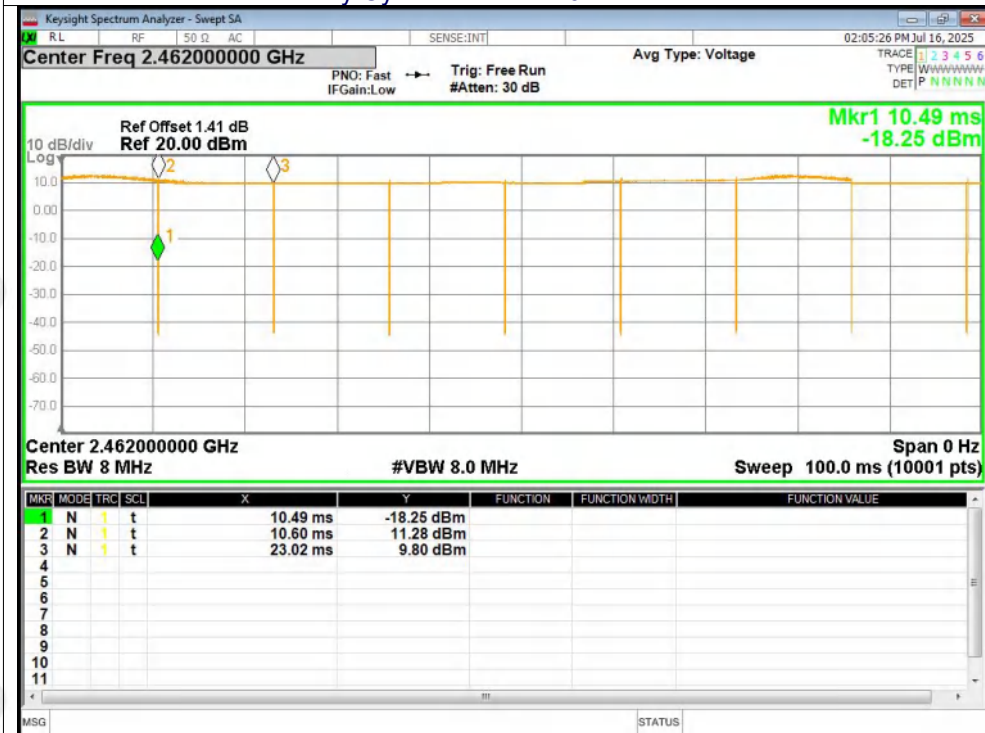


Duty Cycle NVNT g 2412MHz Ant1

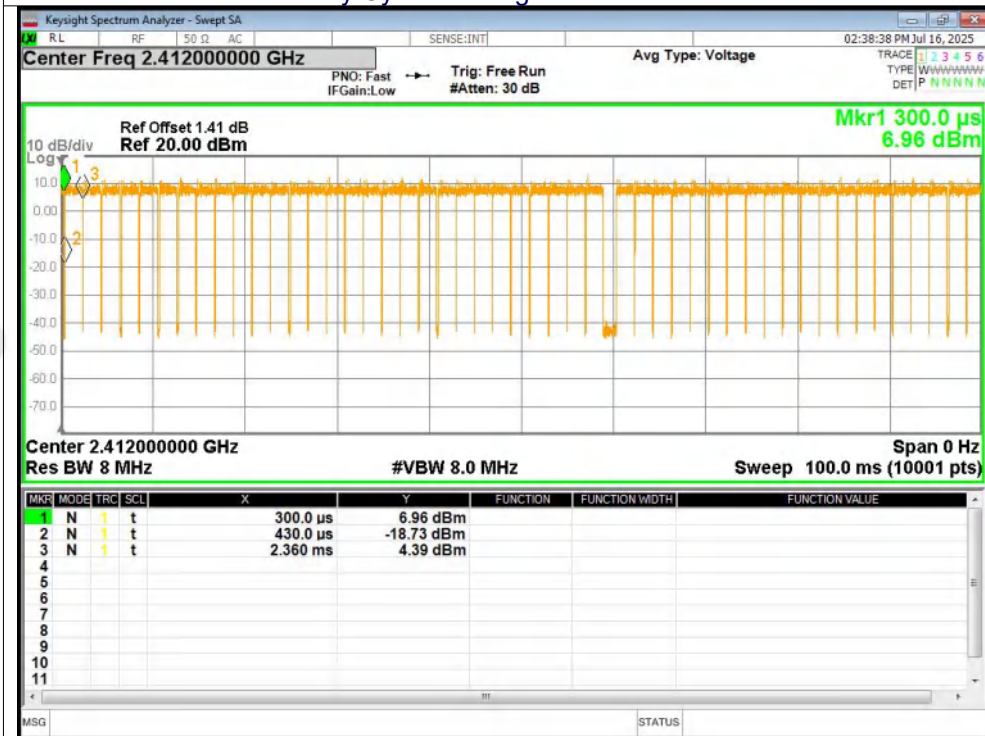


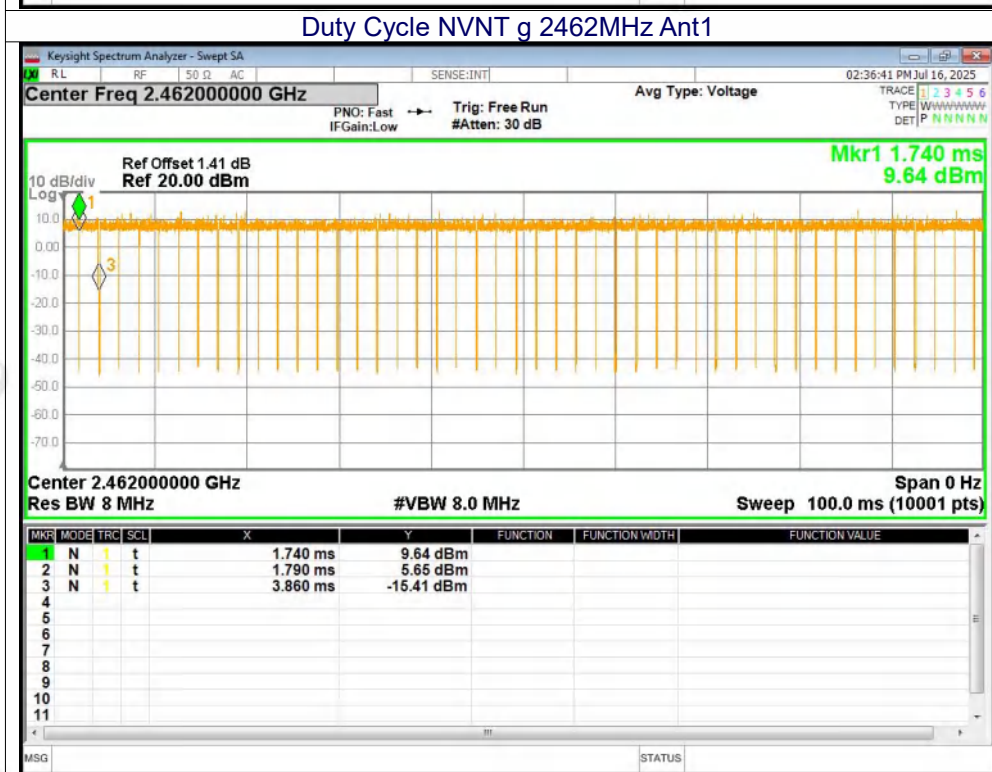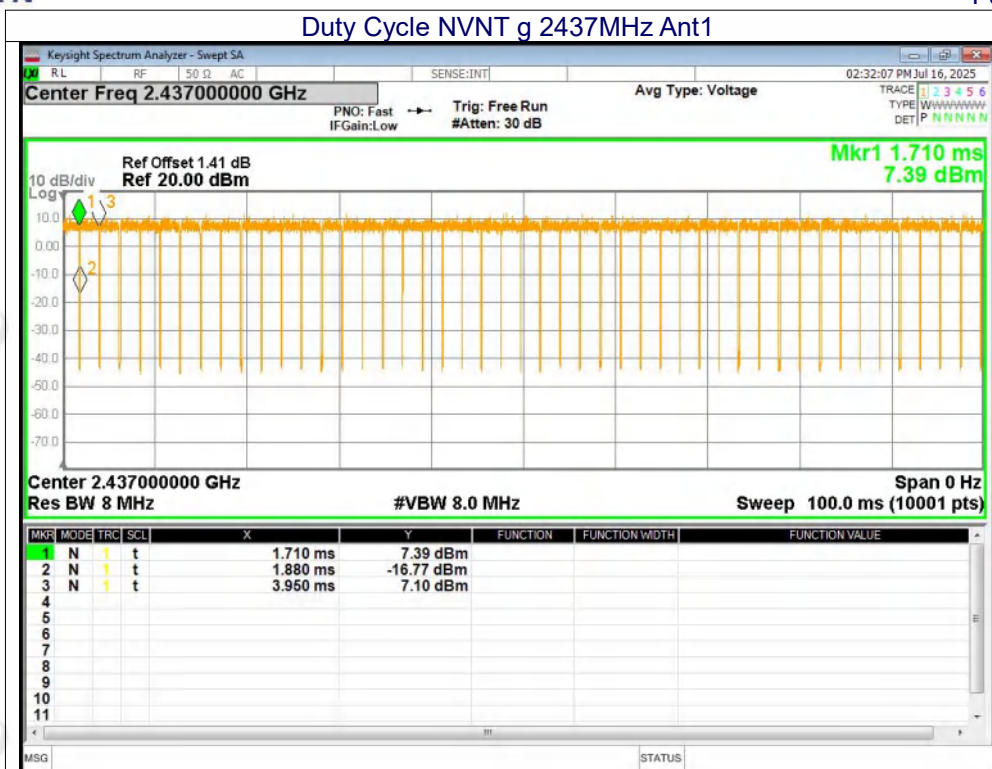


Duty Cycle NVNT n20 2412MHz Ant1

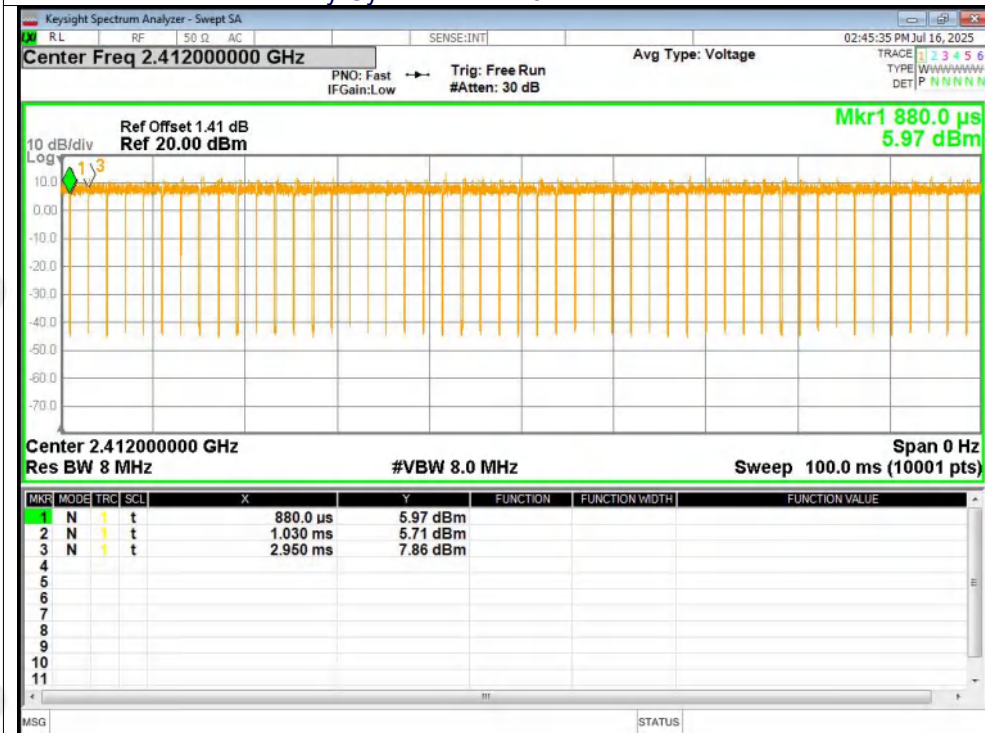


Duty Cycle NVNT n20 2437MHz Ant1

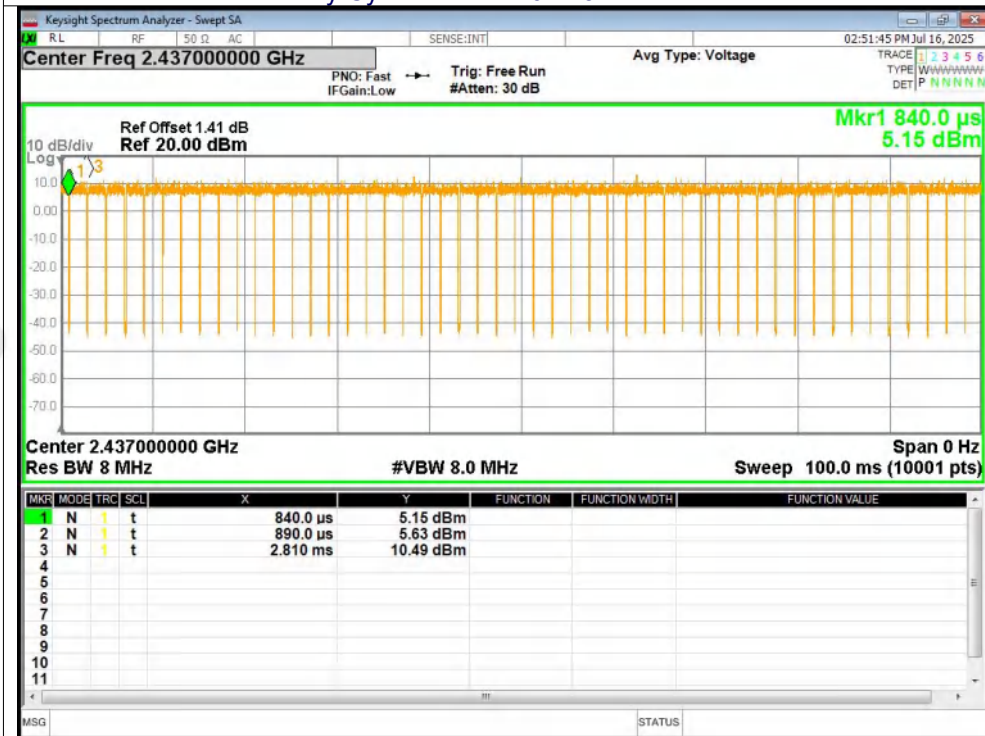


Duty Cycle NVNT n20 2462MHz Ant1

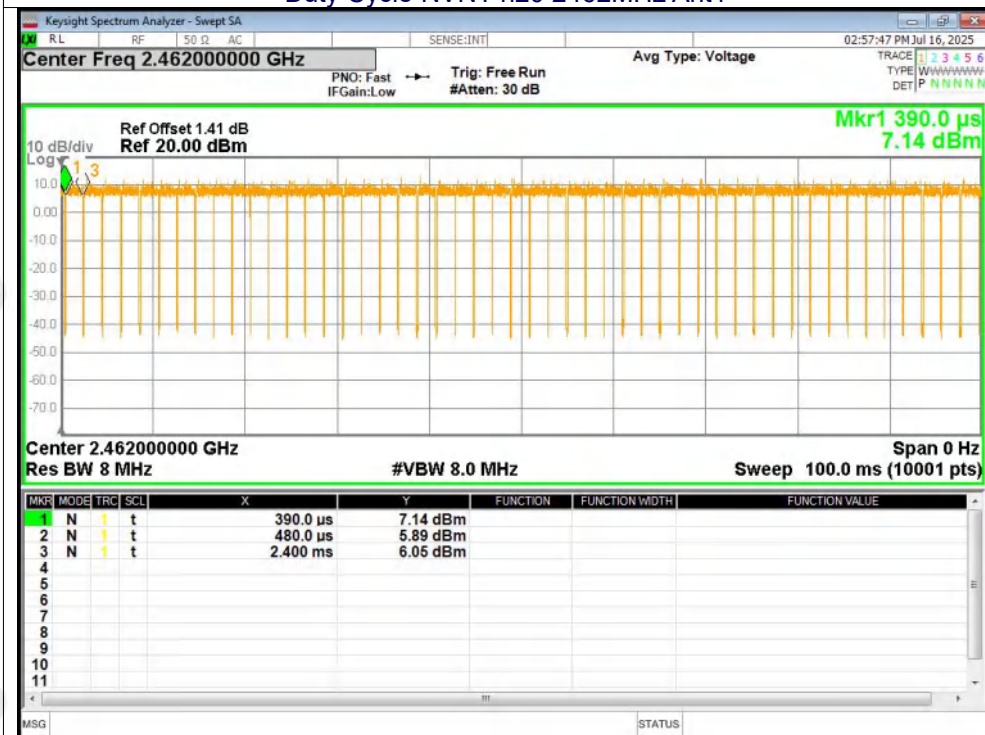


Duty Cycle NVNT n40 2422MHz Ant1

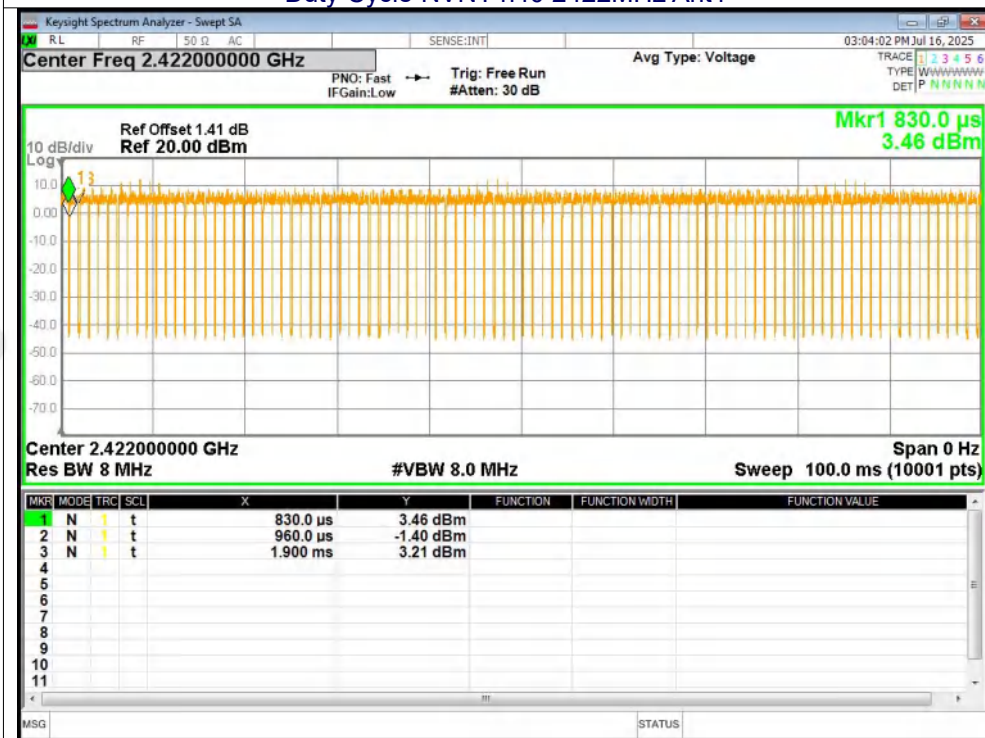


Duty Cycle NVNT n40 2437MHz Ant1

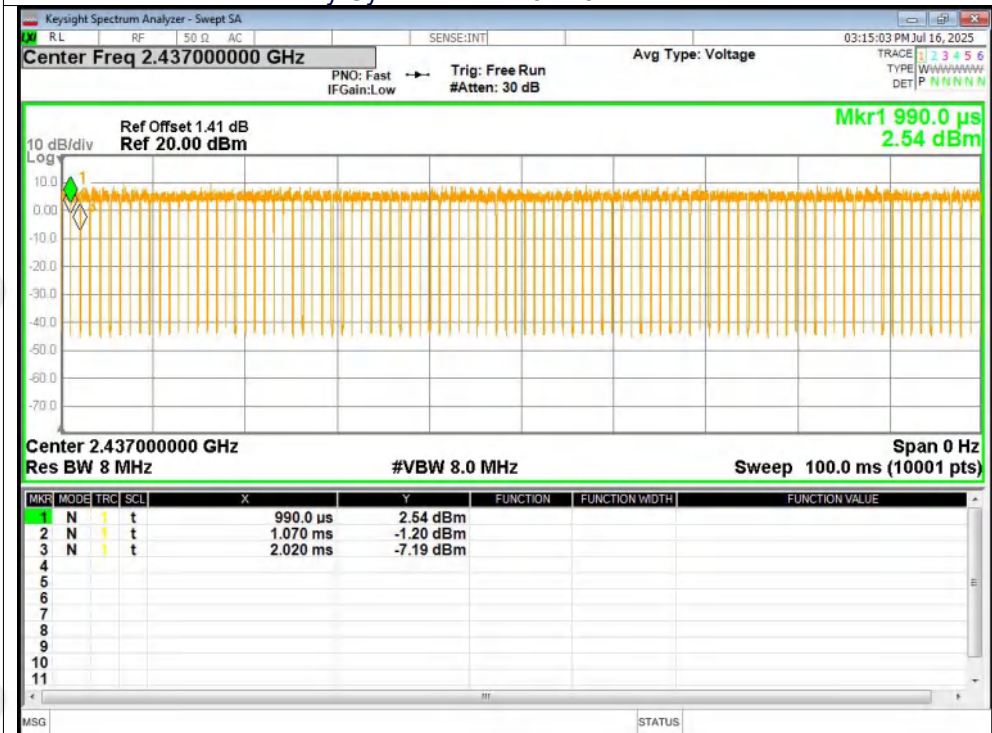


Duty Cycle NVNT n40 2452MHz Ant1

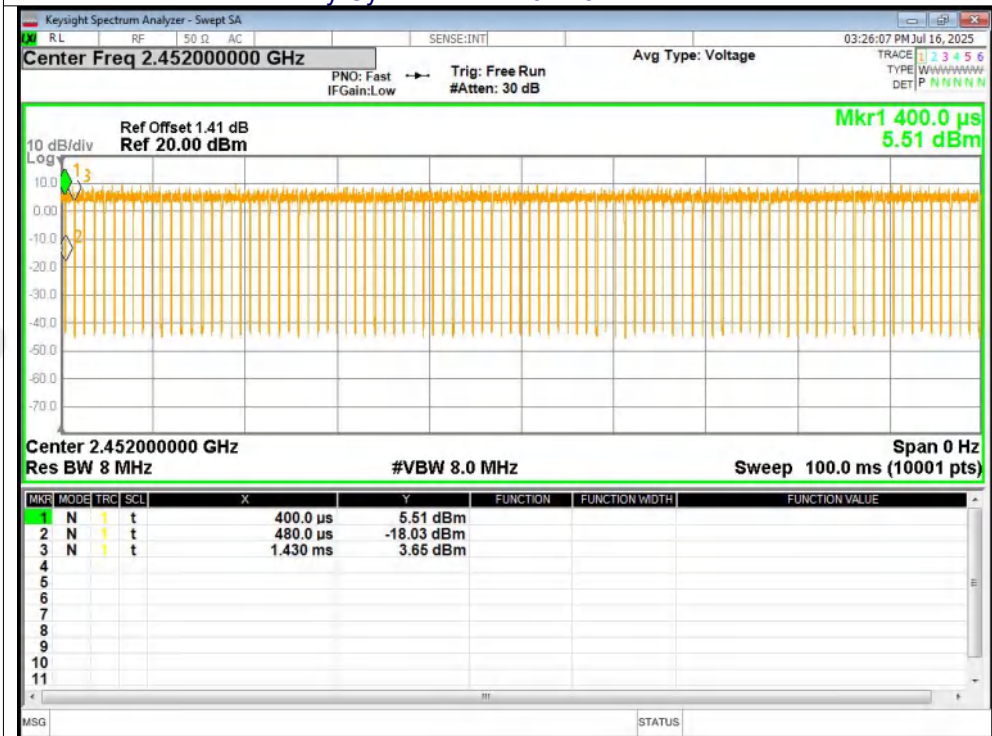


Duty Cycle NVNT ax20 2412MHz Ant1

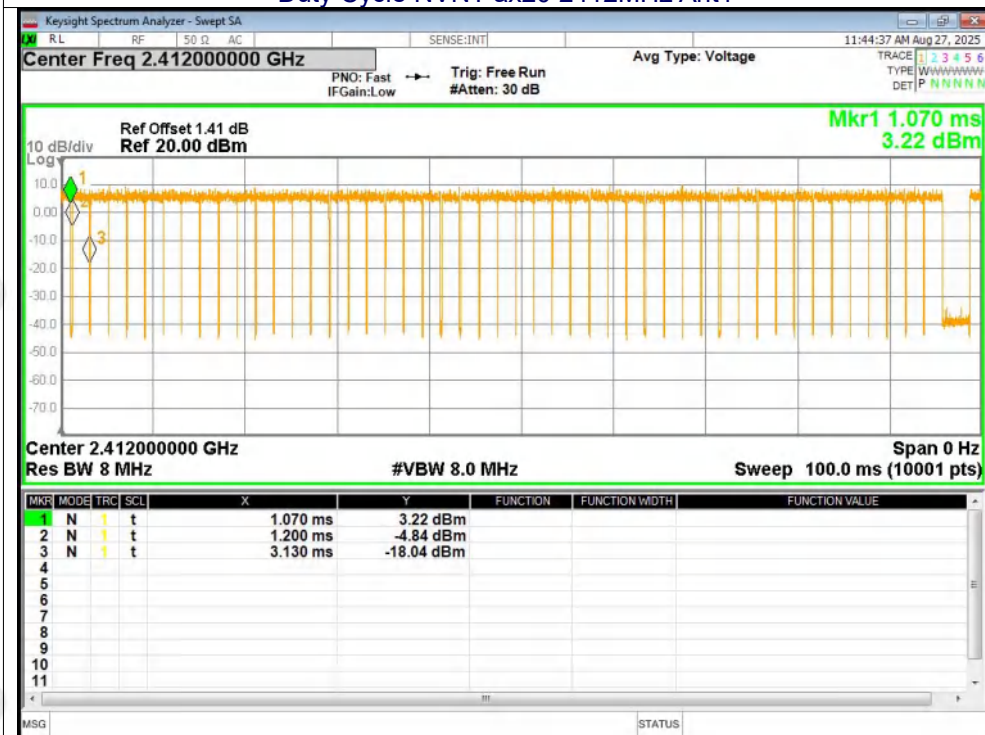


Duty Cycle NVNT ax20 2437MHz Ant1

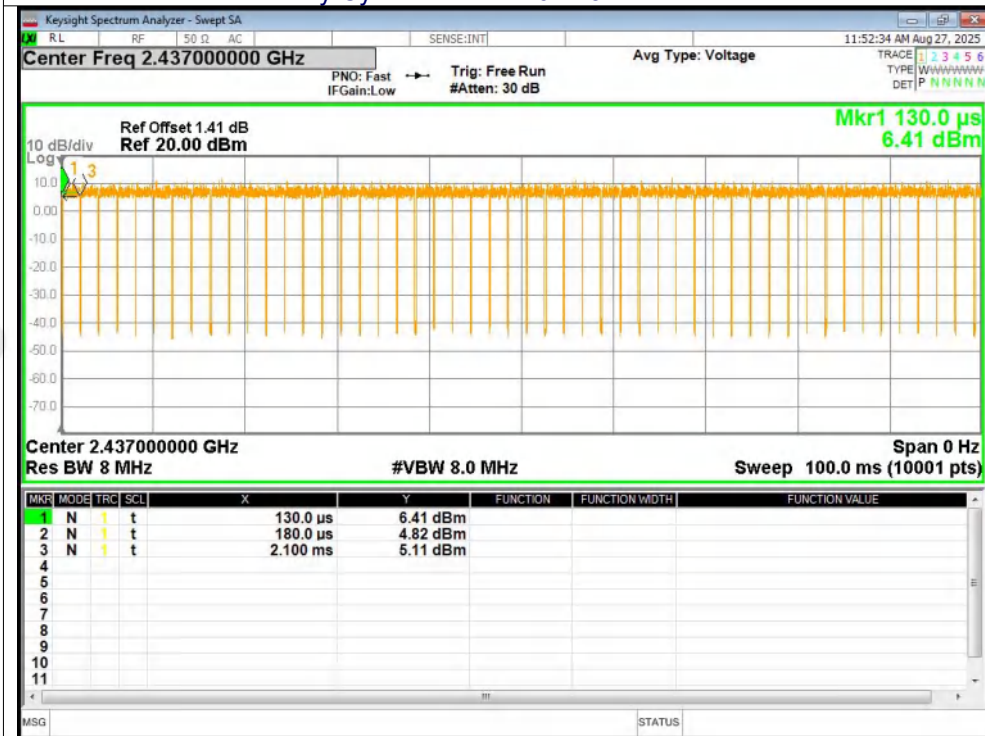


Duty Cycle NVNT ax20 2462MHz Ant1

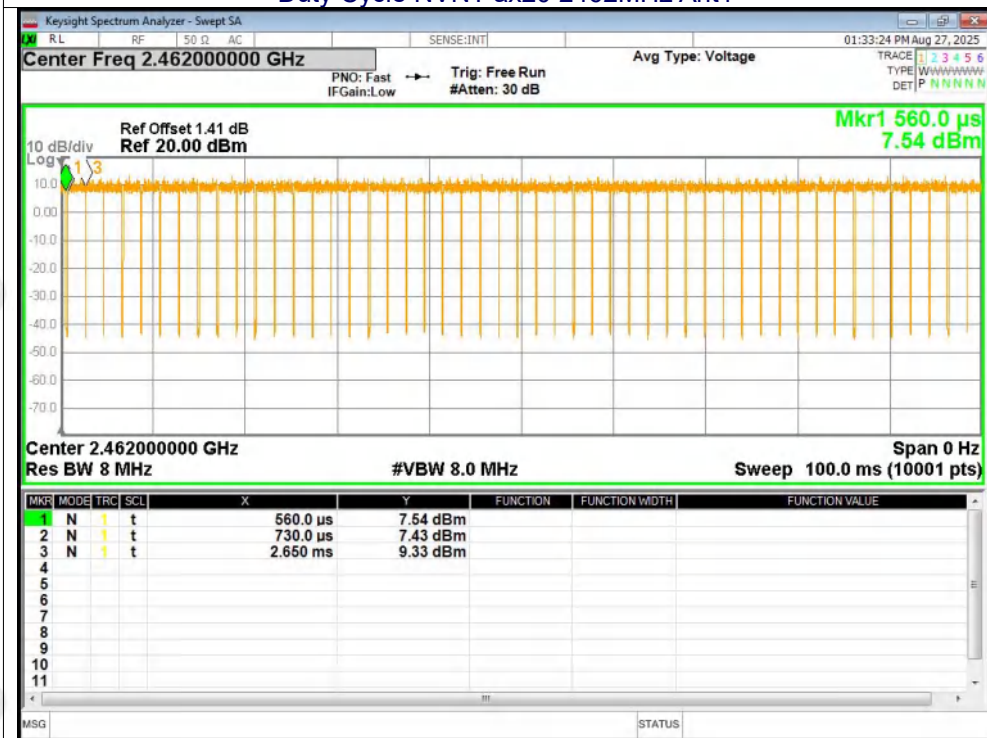


Duty Cycle NVNT ax40 2422MHz Ant1

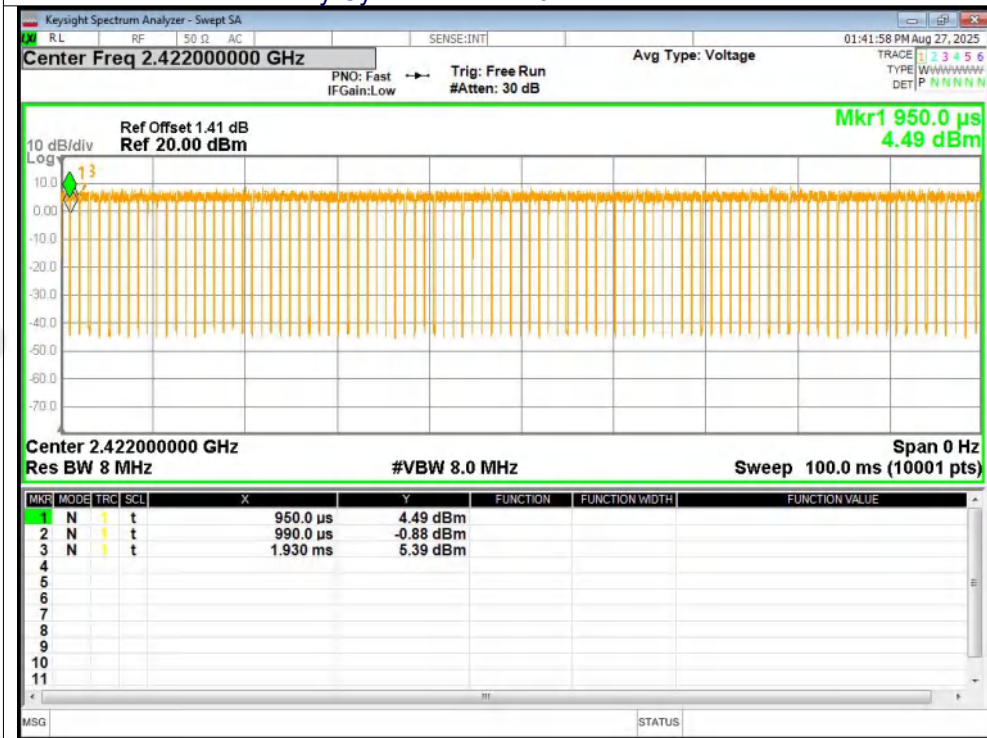

Duty Cycle NVNT ax40 2437MHz Ant1

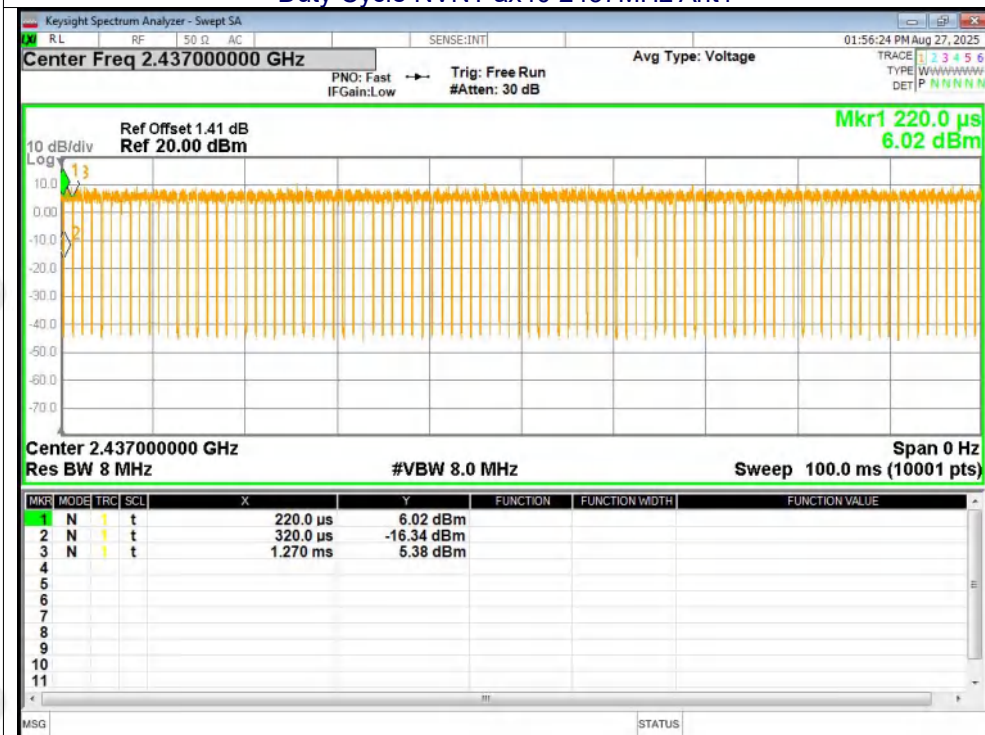

Duty Cycle NVNT ax40 2452MHz Ant1

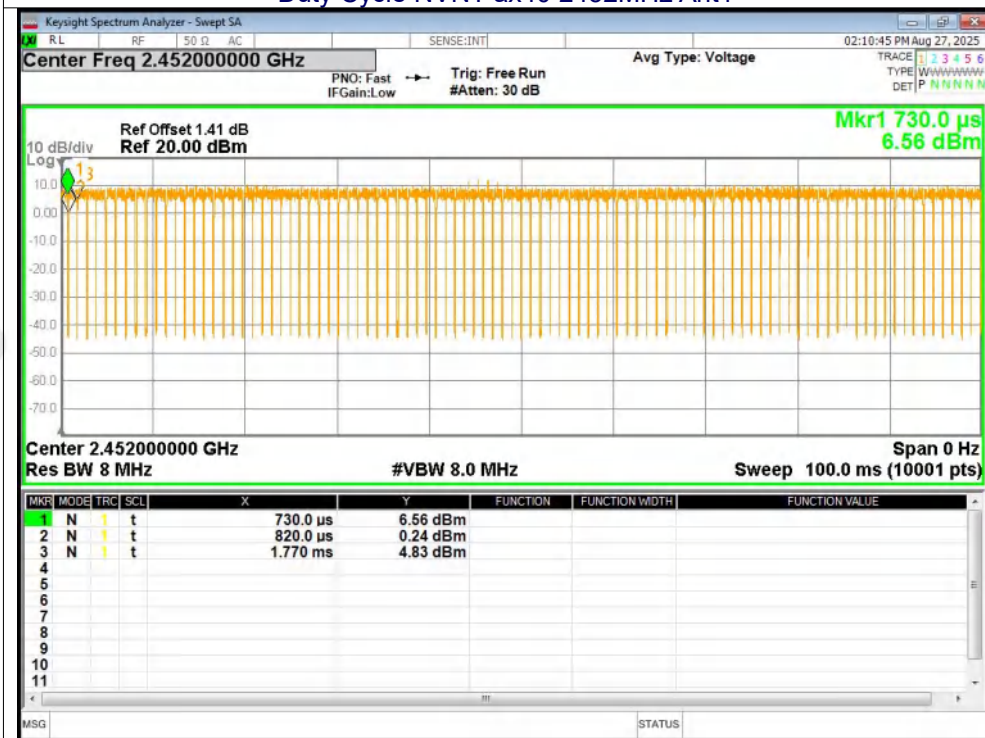

12.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER


Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
b	2412	Ant1	8.94	30	Pass
b	2437	Ant1	8.31	30	Pass
b	2462	Ant1	8.32	30	Pass
g	2412	Ant1	8.78	30	Pass
g	2437	Ant1	8.29	30	Pass
g	2462	Ant1	8.72	30	Pass
n20	2412	Ant1	8.75	30	Pass
n20	2437	Ant1	9.03	30	Pass
n20	2462	Ant1	8.99	30	Pass
n40	2422	Ant1	8.95	30	Pass
n40	2437	Ant1	9.05	30	Pass
n40	2452	Ant1	9.14	30	Pass
ax20	2412	Ant1	7.26	30	Pass
ax20	2437	Ant1	8.14	30	Pass
ax20	2462	Ant1	8.11	30	Pass
ax40	2422	Ant1	8.23	30	Pass
ax40	2437	Ant1	8.93	30	Pass
ax40	2452	Ant1	8.43	30	Pass




Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	Ant1	10.031	0.5	Pass
b	2437	Ant1	10.062	0.5	Pass
b	2462	Ant1	10.077	0.5	Pass
g	2412	Ant1	16.317	0.5	Pass
g	2437	Ant1	16.34	0.5	Pass
g	2462	Ant1	16.315	0.5	Pass
n20	2412	Ant1	17.157	0.5	Pass
n20	2437	Ant1	17.054	0.5	Pass
n20	2462	Ant1	17.3	0.5	Pass
n40	2422	Ant1	35.482	0.5	Pass
n40	2437	Ant1	35.622	0.5	Pass
n40	2452	Ant1	35.5	0.5	Pass
ax20	2412	Ant1	16.653	0.5	Pass
ax20	2437	Ant1	17.155	0.5	Pass
ax20	2462	Ant1	17.25	0.5	Pass
ax40	2422	Ant1	35.376	0.5	Pass
ax40	2437	Ant1	35.324	0.5	Pass
ax40	2452	Ant1	35.086	0.5	Pass

Test Graphs


-6dB Bandwidth NVNT b 2412MHz Ant1

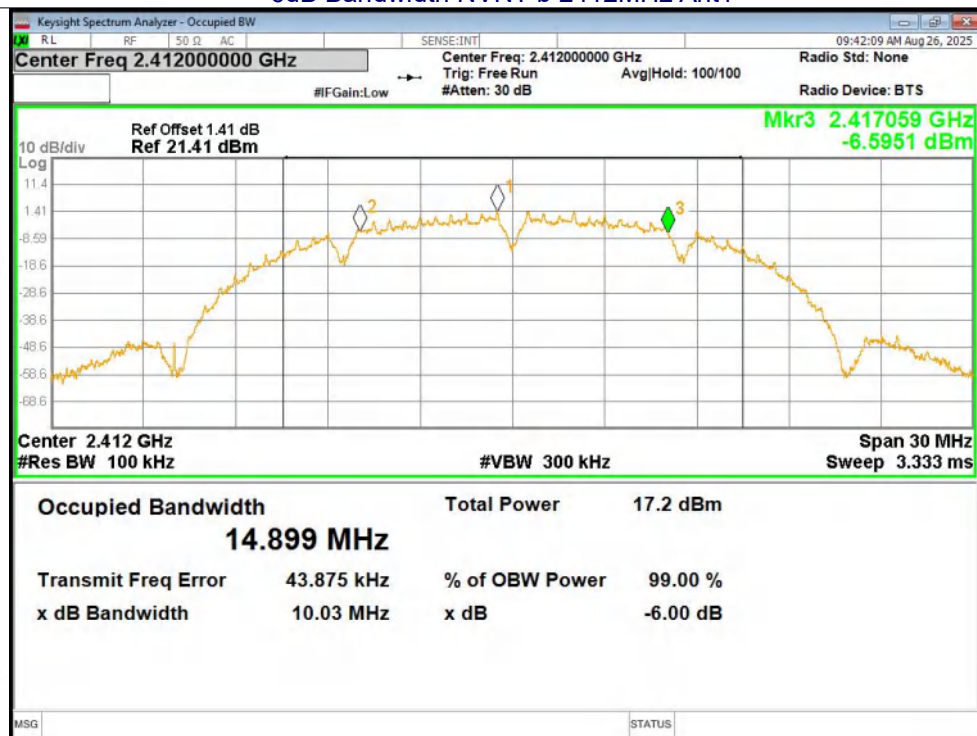


-6dB Bandwidth NVNT b 2437MHz Ant1

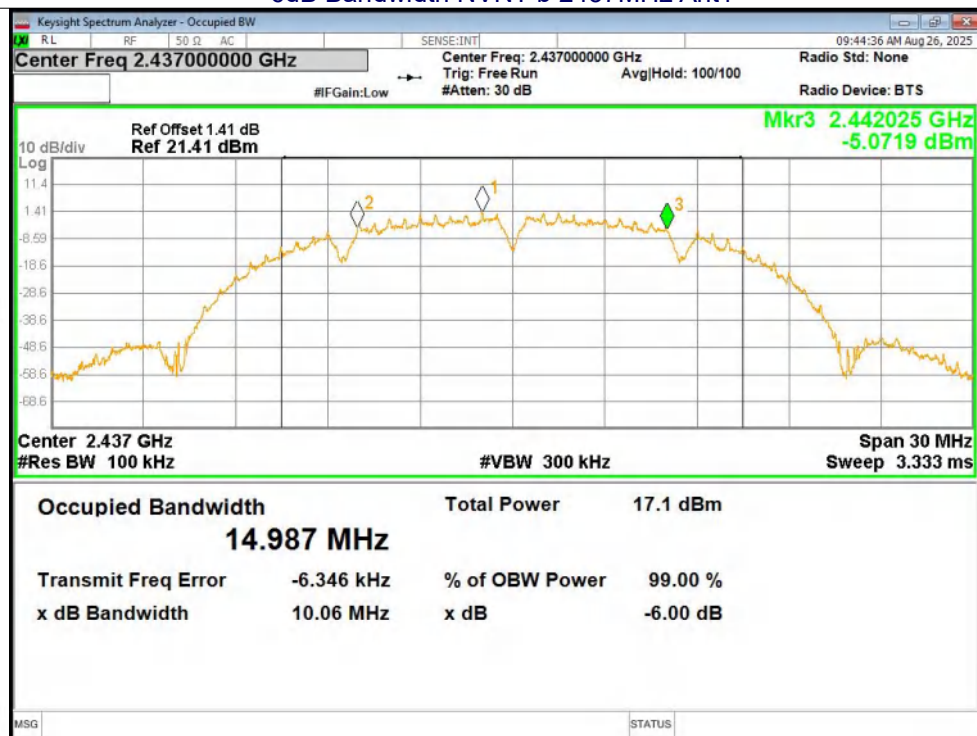


-6dB Bandwidth NVNT b 2462MHz Ant1

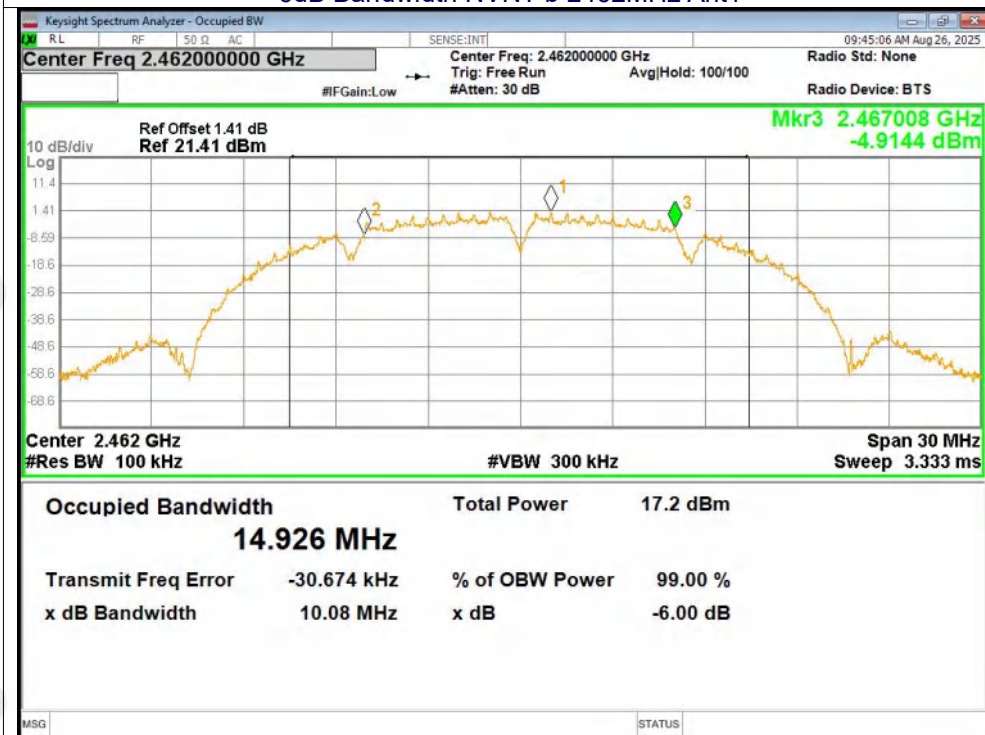


-6dB Bandwidth NVNT g 2412MHz Ant1

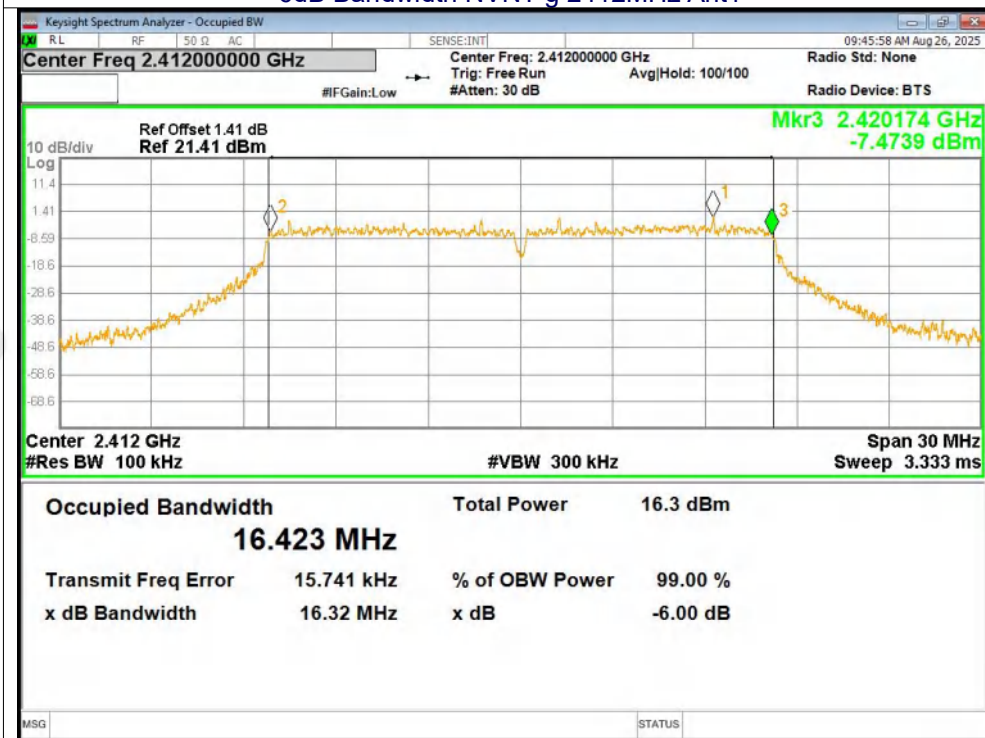


-6dB Bandwidth NVNT g 2437MHz Ant1

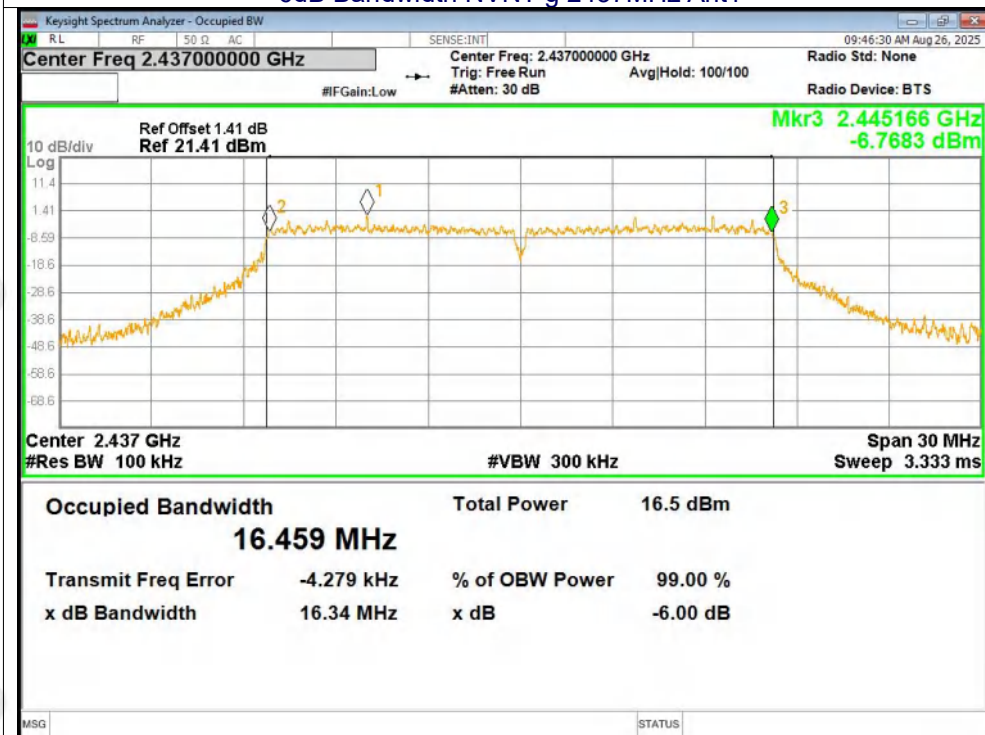


-6dB Bandwidth NVNT g 2462MHz Ant1

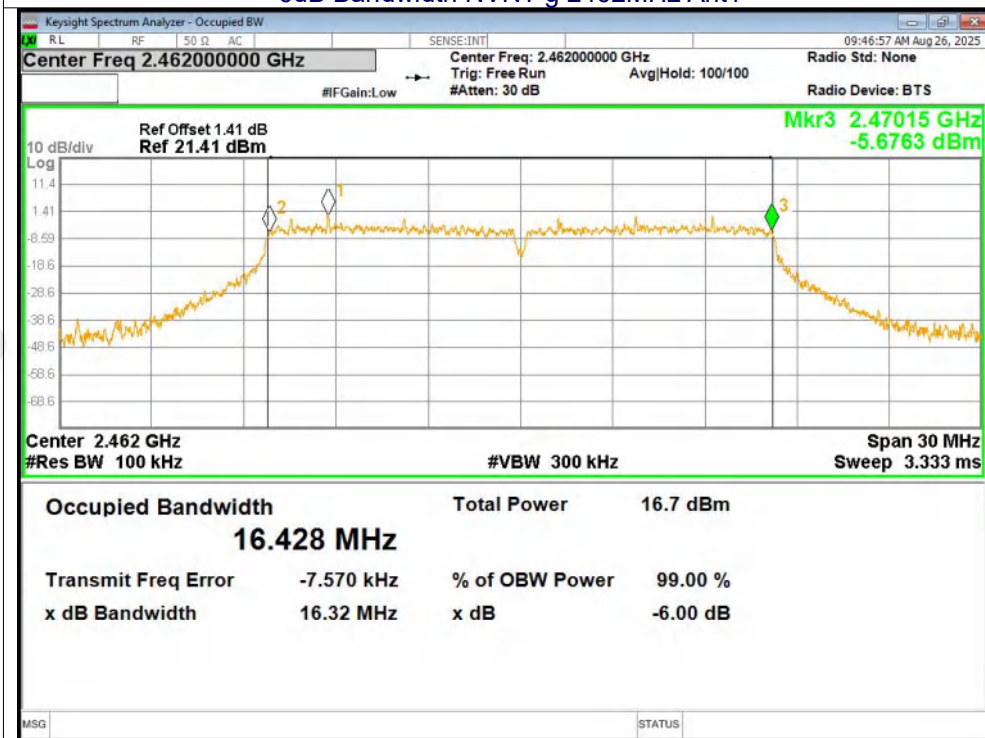


-6dB Bandwidth NVNT n20 2412MHz Ant1

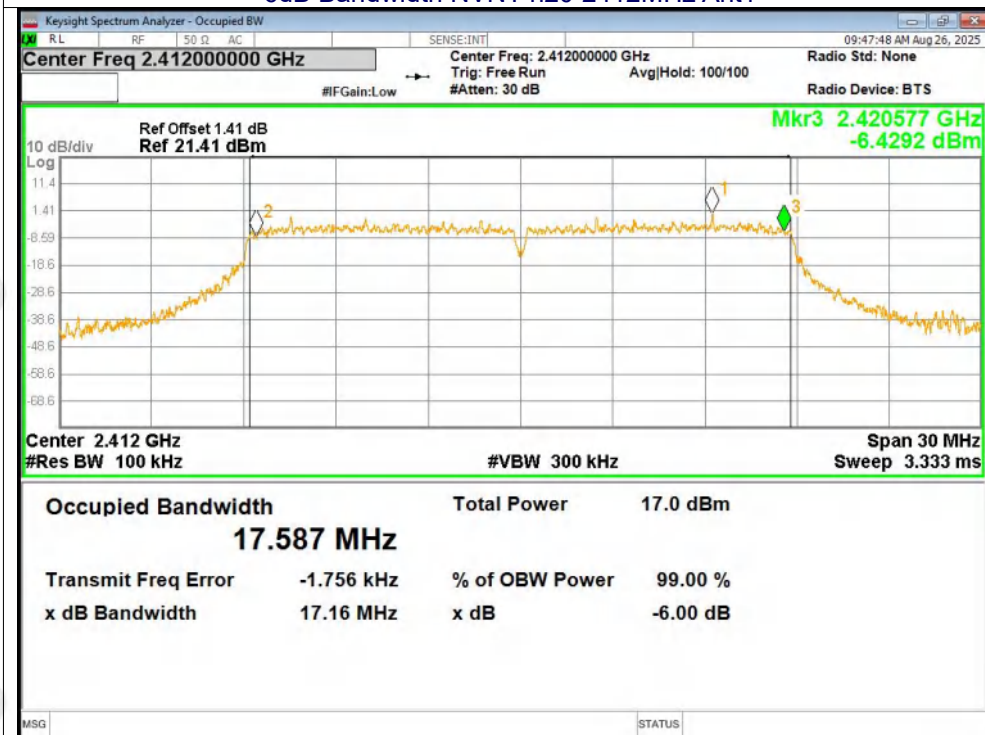


-6dB Bandwidth NVNT n20 2437MHz Ant1

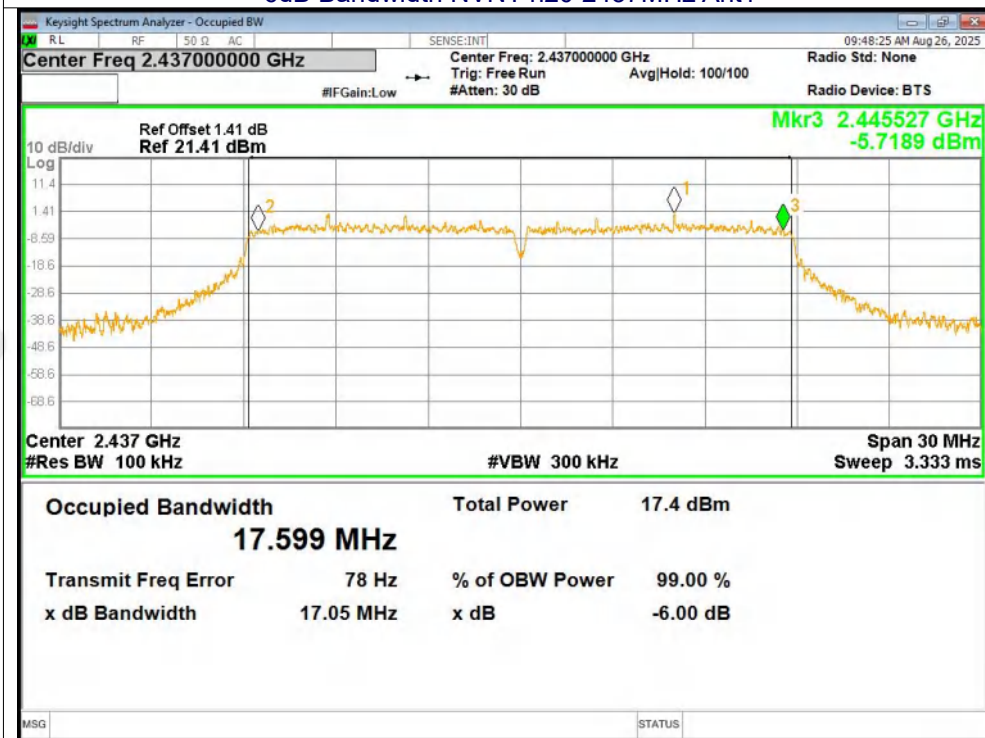


-6dB Bandwidth NVNT n20 2462MHz Ant1

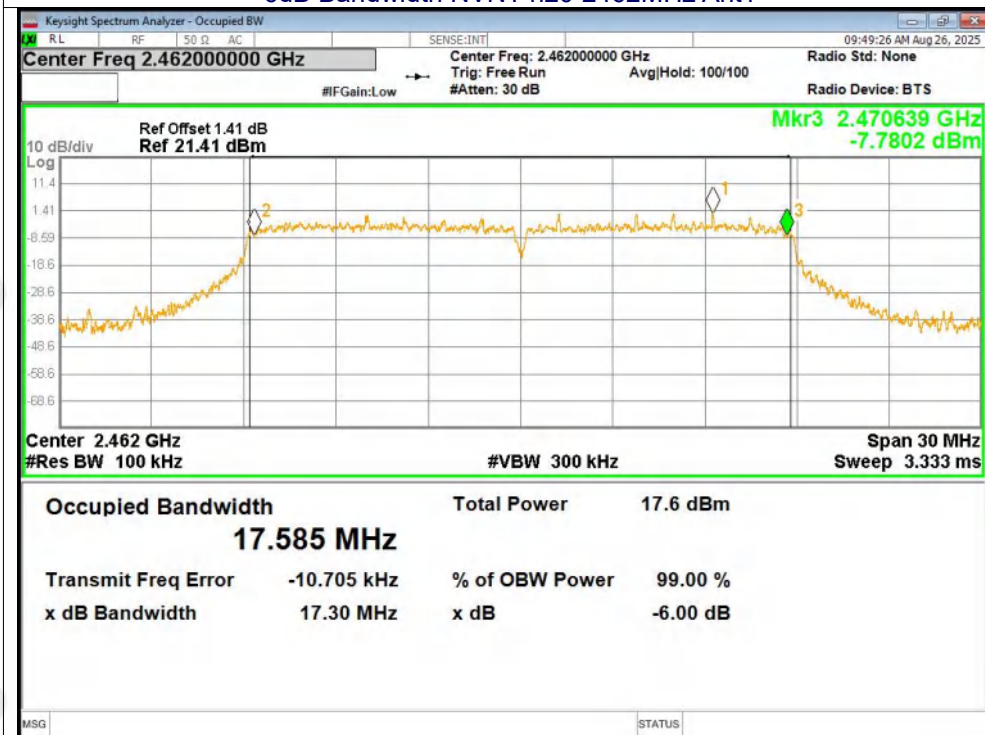


-6dB Bandwidth NVNT n40 2422MHz Ant1

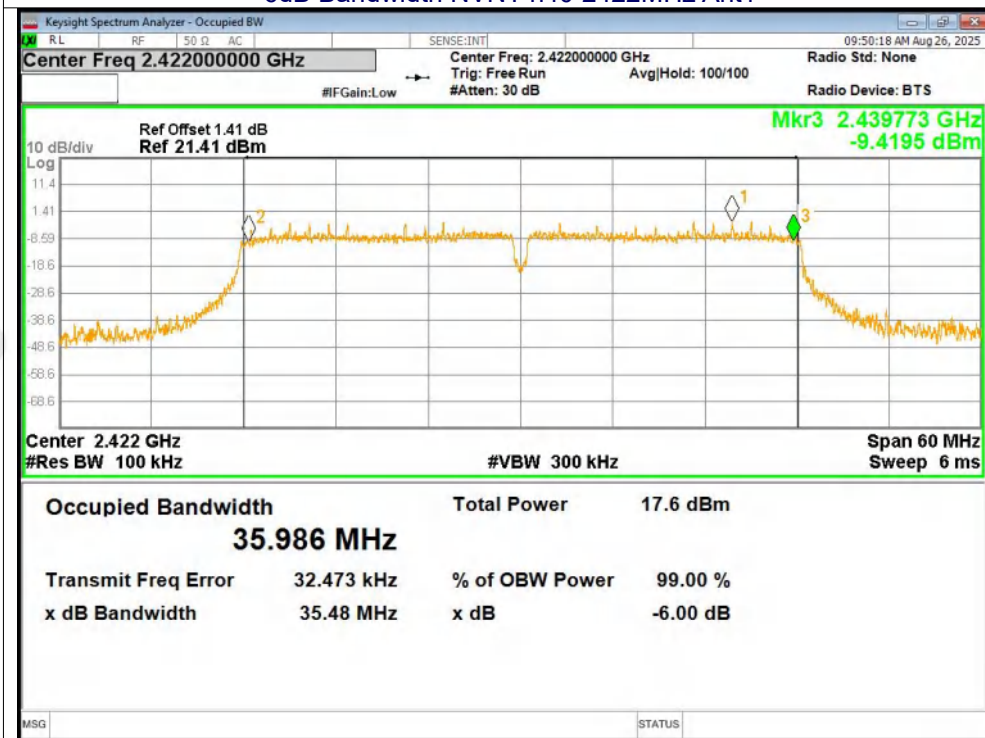


-6dB Bandwidth NVNT n40 2437MHz Ant1

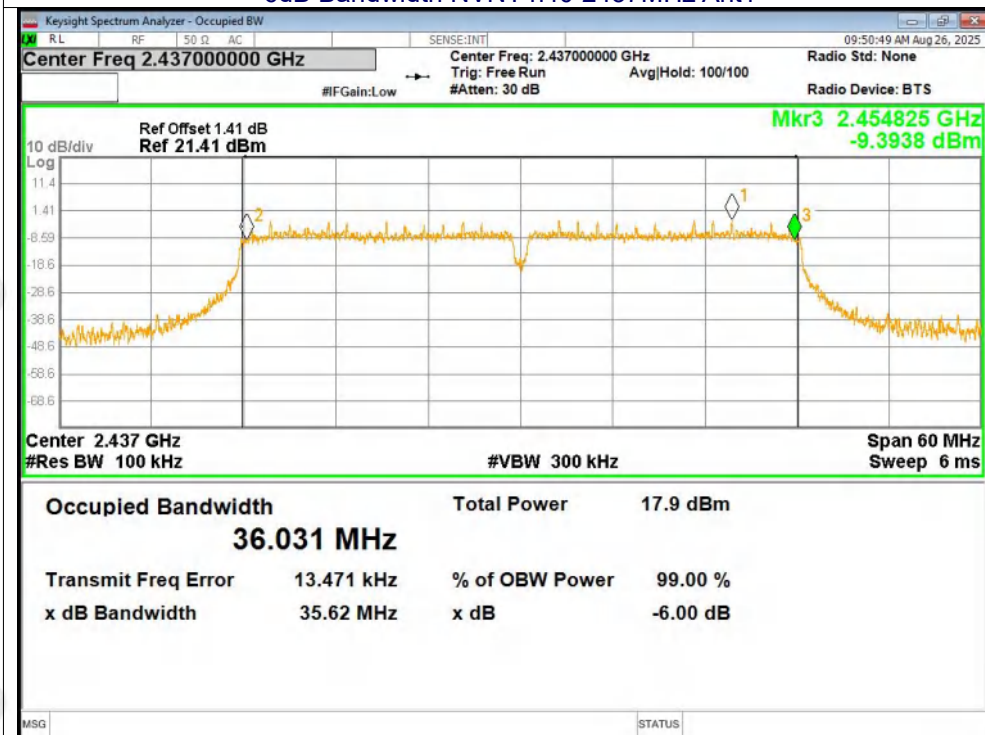


-6dB Bandwidth NVNT n40 2452MHz Ant1

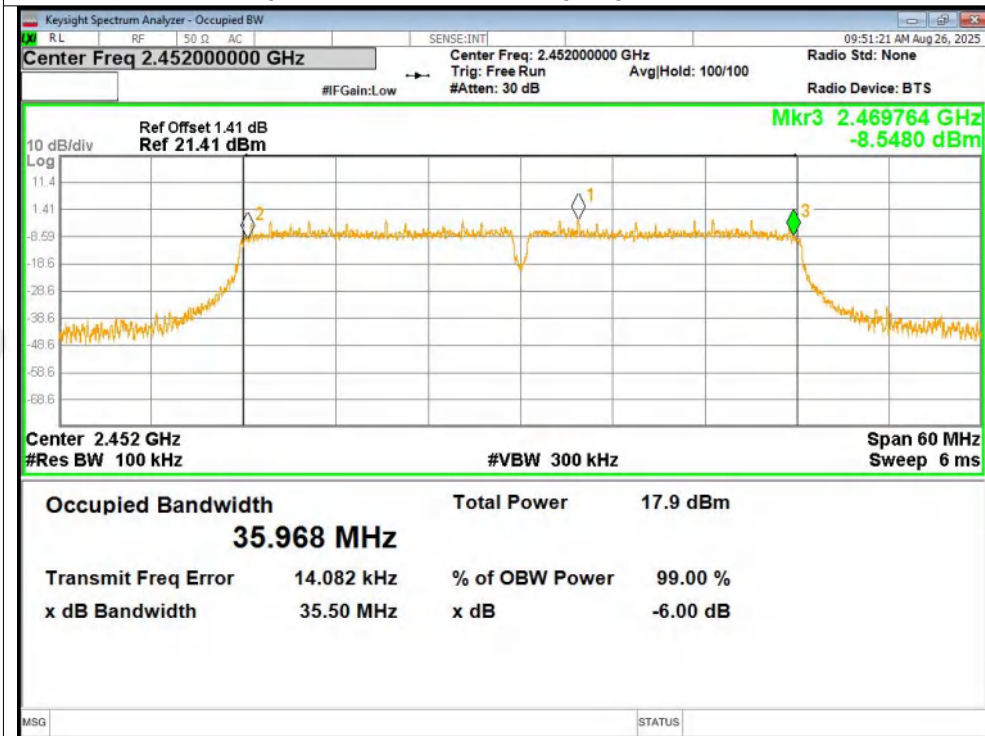


-6dB Bandwidth NVNT ax20 2412MHz Ant1

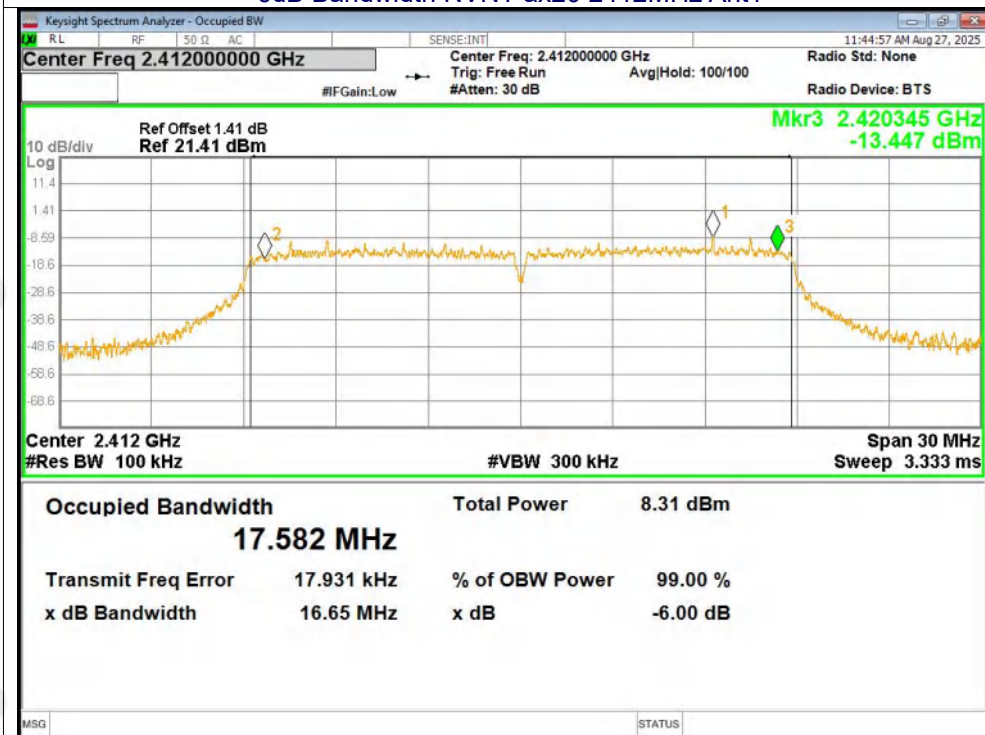


-6dB Bandwidth NVNT ax20 2437MHz Ant1

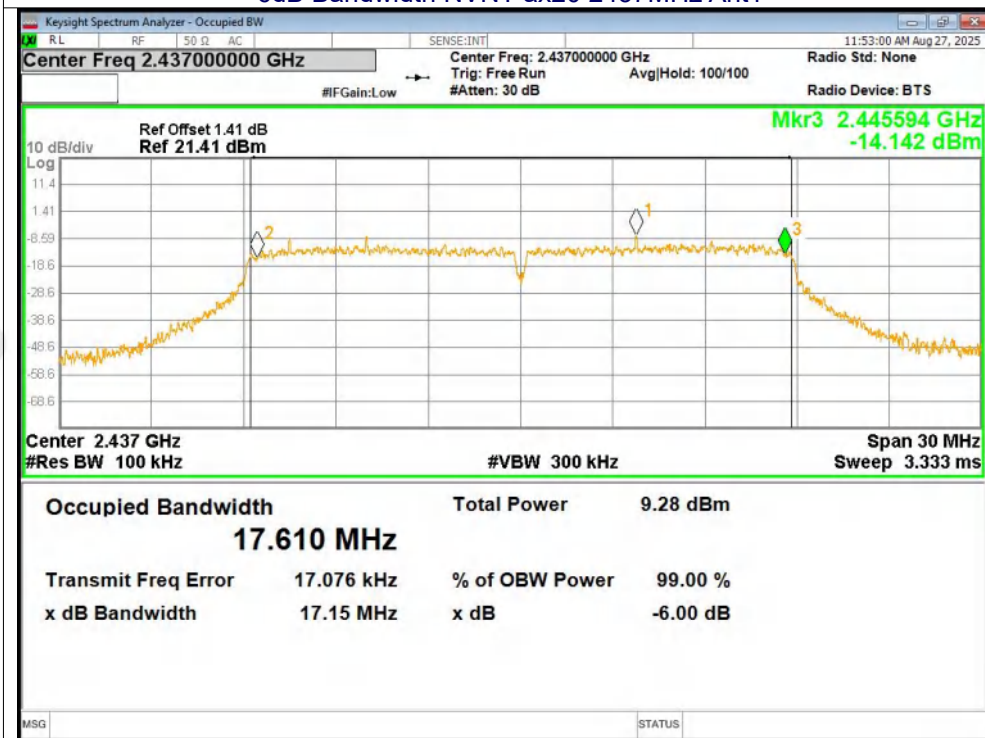


-6dB Bandwidth NVNT ax20 2462MHz Ant1

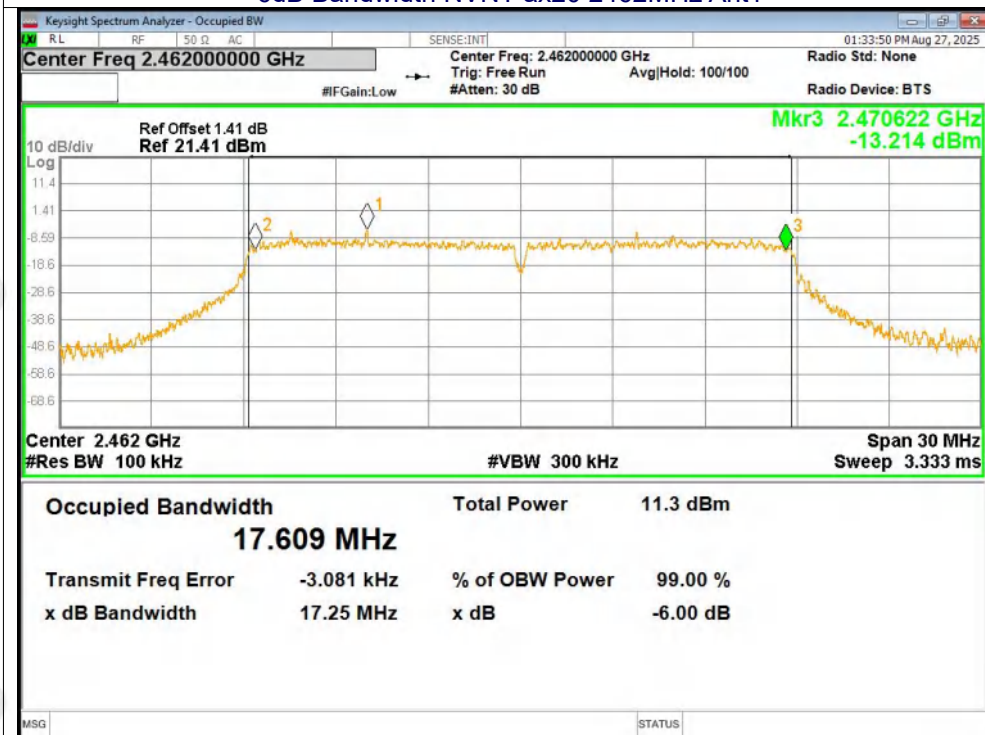


-6dB Bandwidth NVNT ax40 2422MHz Ant1

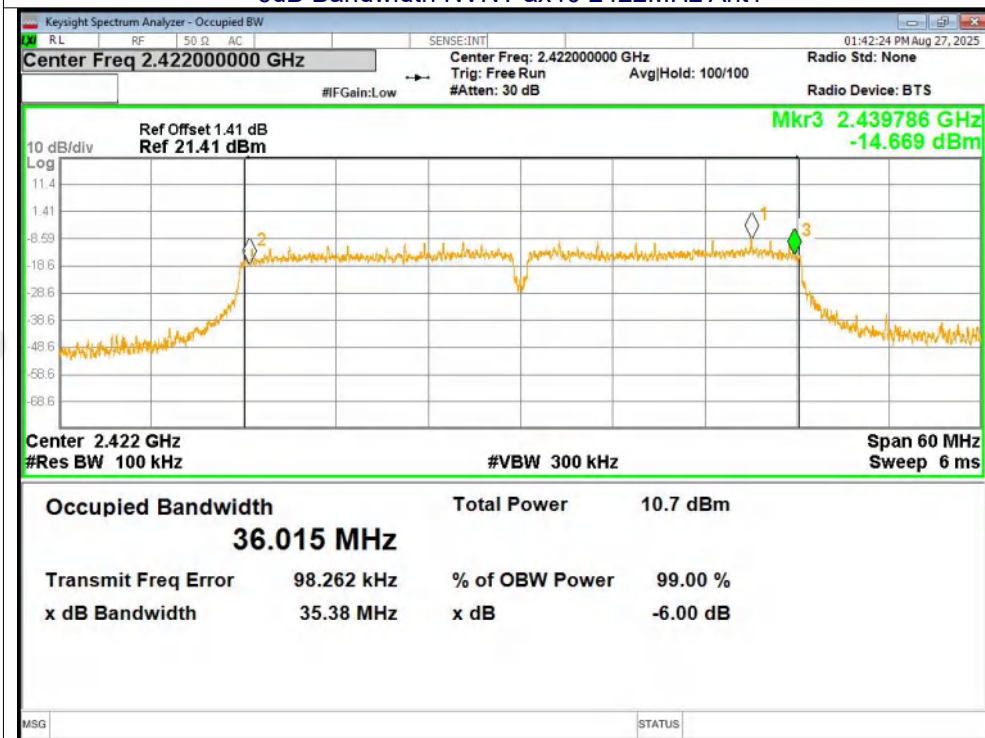

-6dB Bandwidth NVNT ax40 2437MHz Ant1

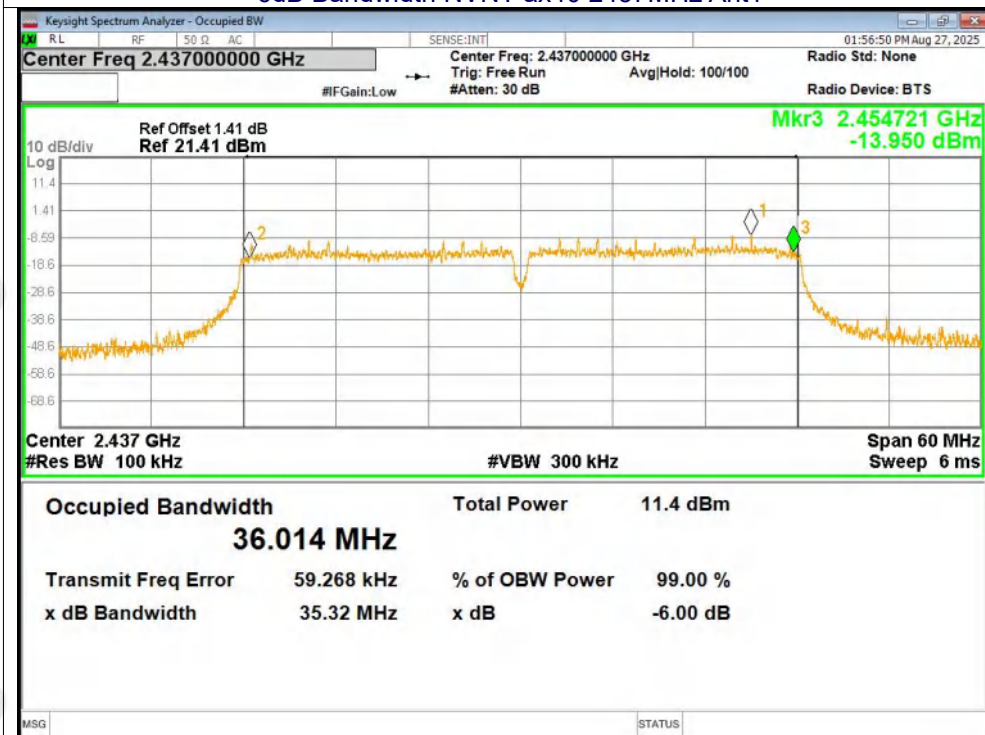

-6dB Bandwidth NVNT ax40 2452MHz Ant1

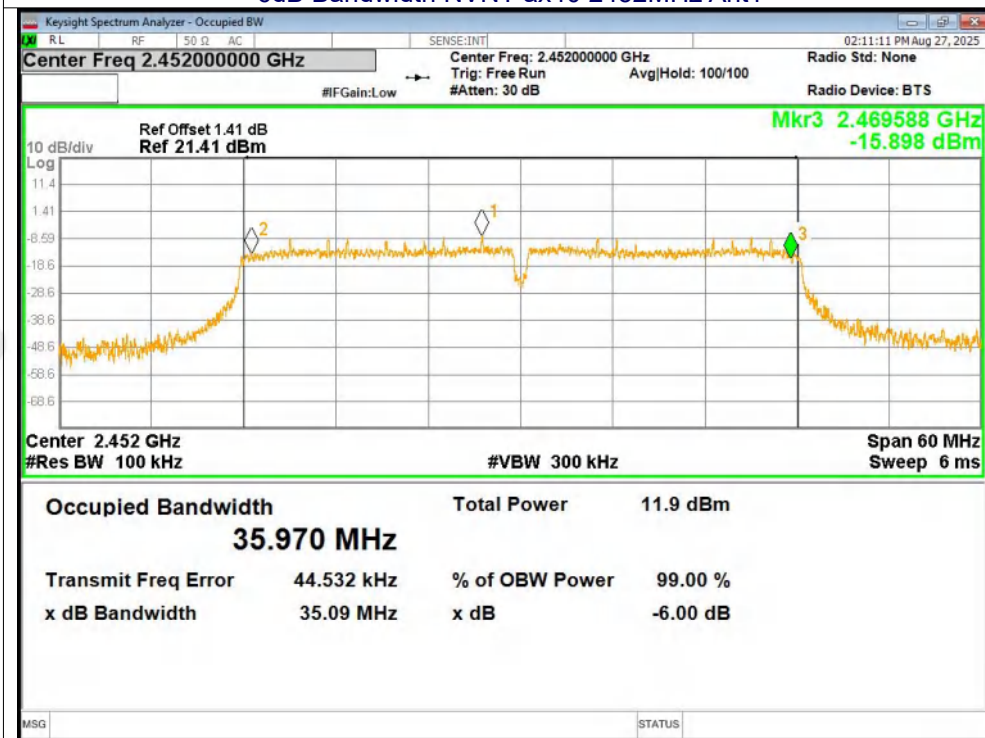





12.4 OCCUPIED CHANNEL BANDWIDTH

Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
b	2412	Ant1	14.958
b	2437	Ant1	14.984
b	2462	Ant1	14.965
g	2412	Ant1	16.482
g	2437	Ant1	16.55
g	2462	Ant1	16.554
n20	2412	Ant1	17.641
n20	2437	Ant1	17.665
n20	2462	Ant1	17.621
n40	2422	Ant1	36.084
n40	2437	Ant1	36.164
n40	2452	Ant1	36.135
ax20	2412	Ant1	17.651
ax20	2437	Ant1	17.624
ax20	2462	Ant1	17.679
ax40	2422	Ant1	36.187
ax40	2437	Ant1	36.167
ax40	2452	Ant1	36.08


Test Graphs OBW NVNT b 2412MHz Ant1

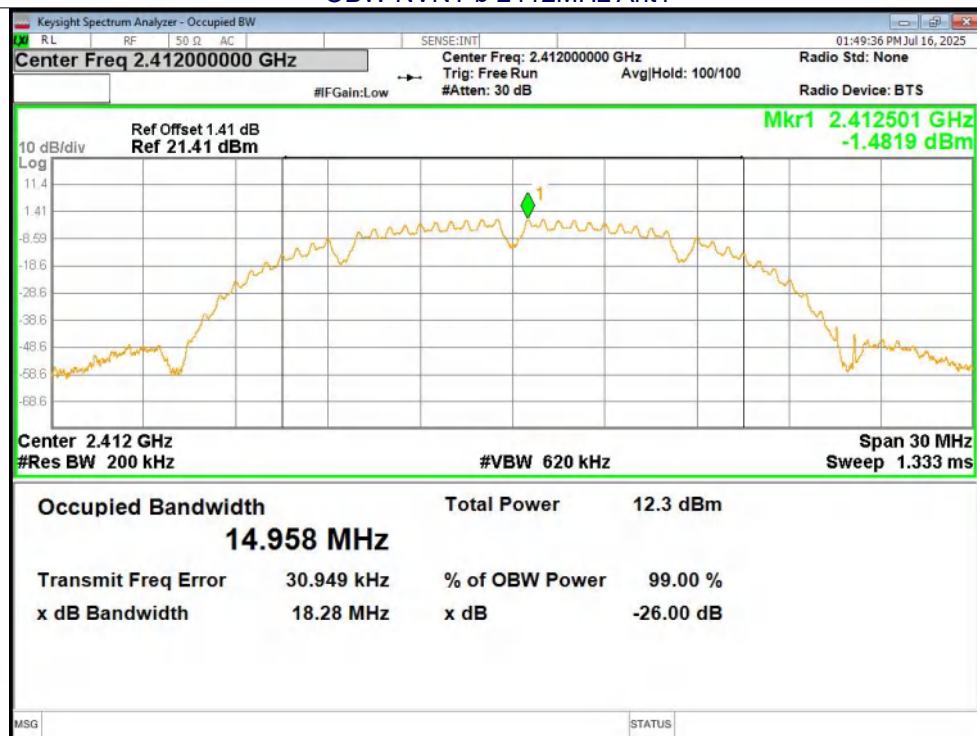


OBW NVNT b 2437MHz Ant1

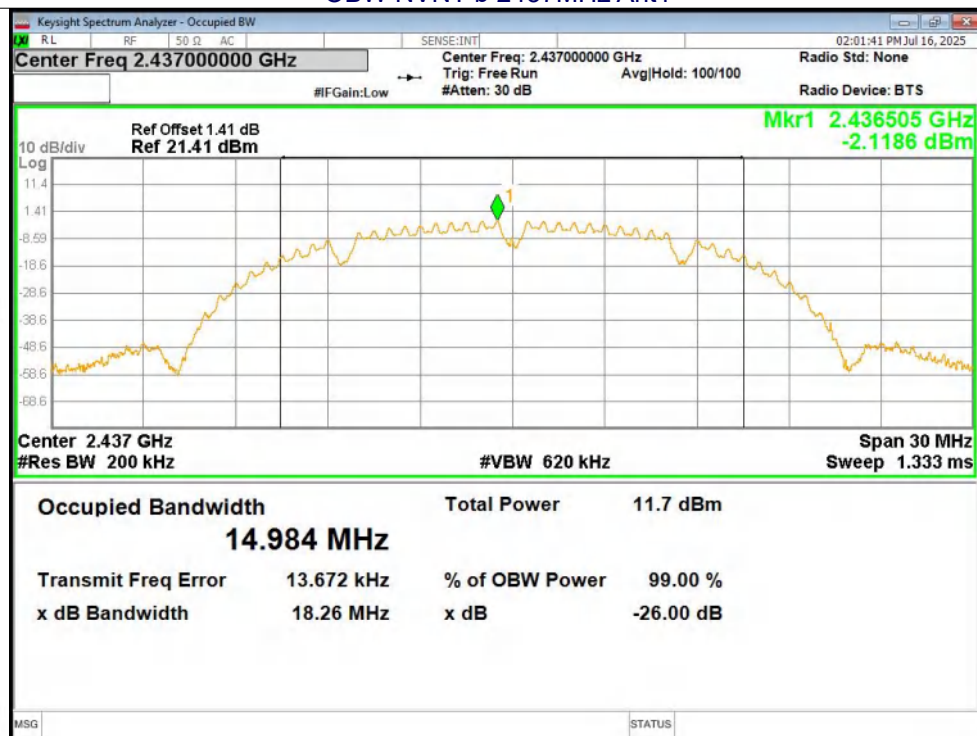


OBW NVNT b 2462MHz Ant1

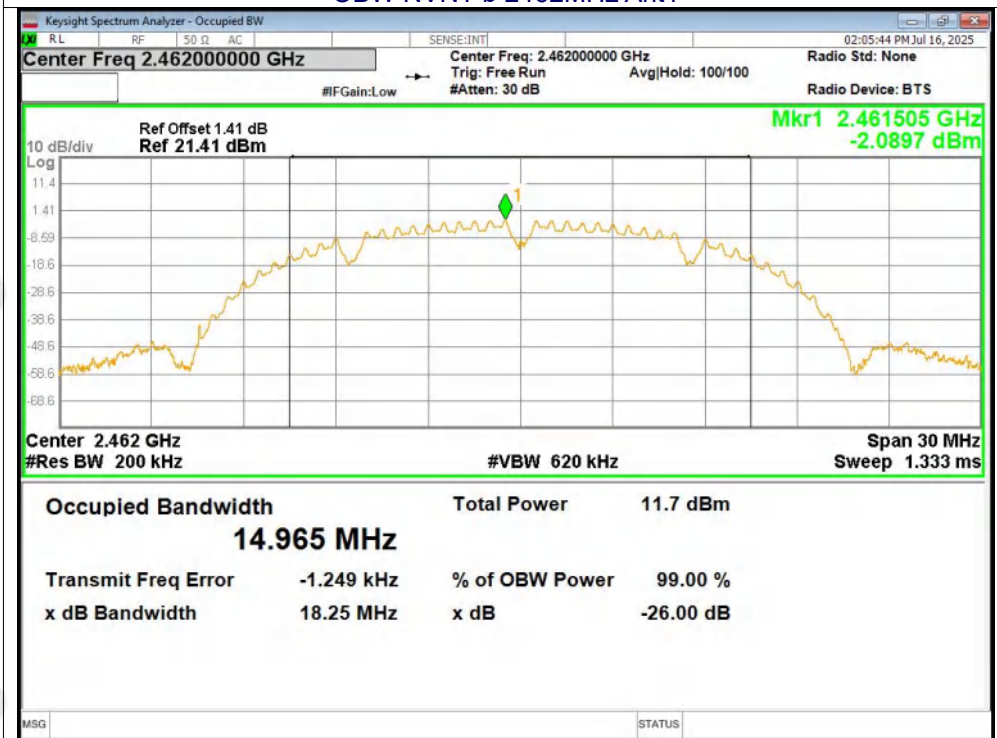


OBW NVNT g 2412MHz Ant1

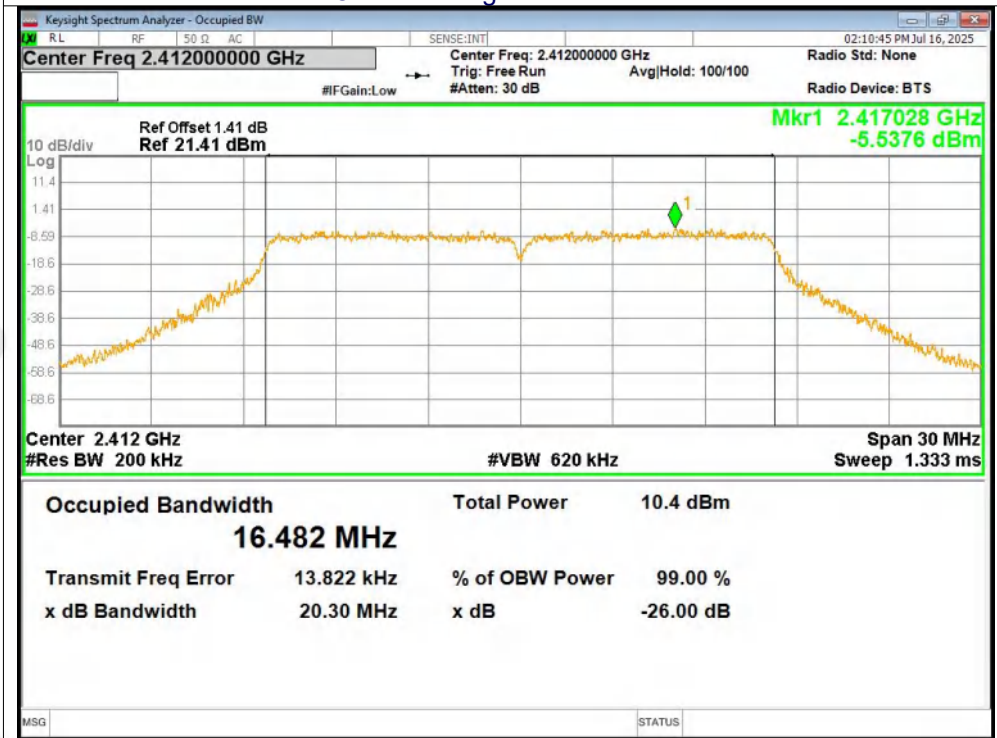


OBW NVNT g 2437MHz Ant1

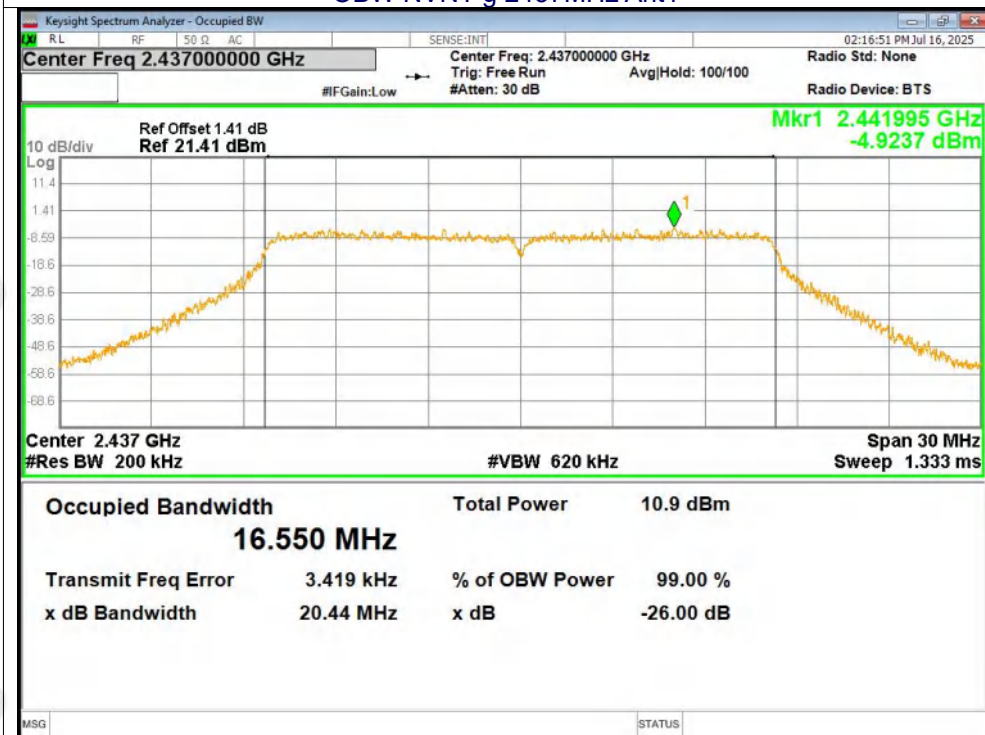


OBW NVNT g 2462MHz Ant1

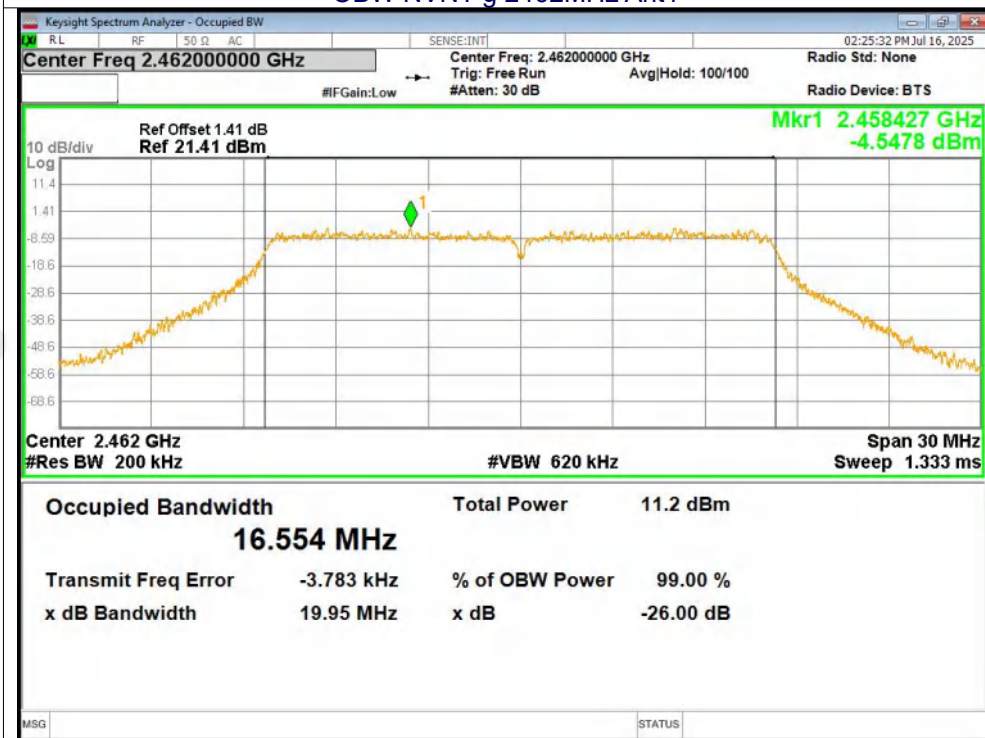


OBW NVNT n20 2412MHz Ant1

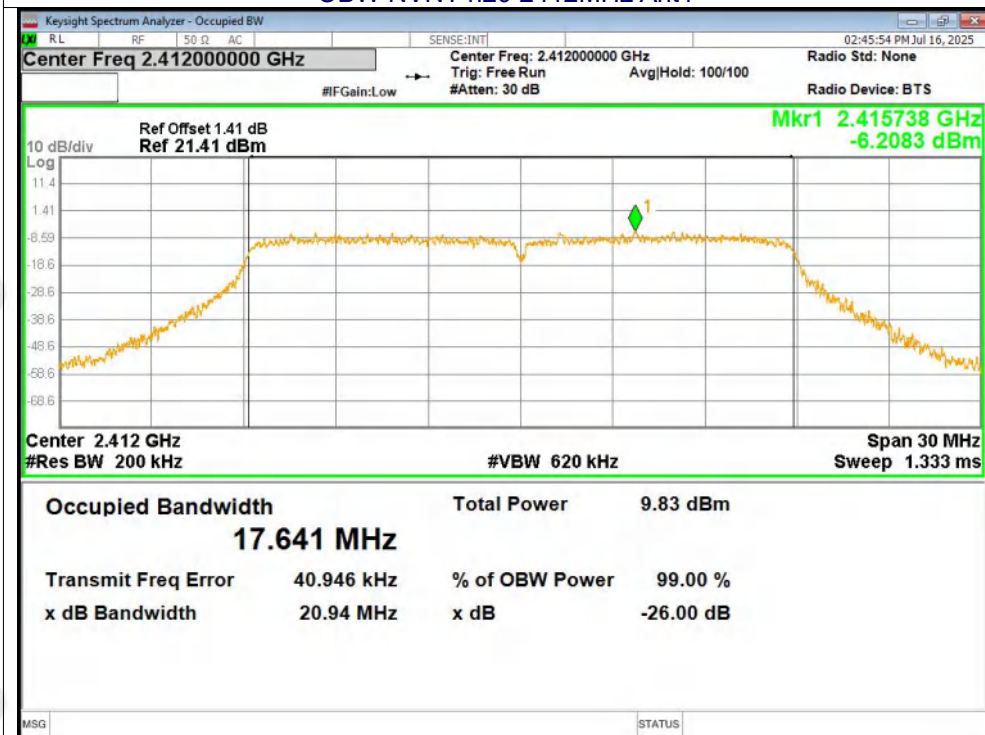


OBW NVNT n20 2437MHz Ant1

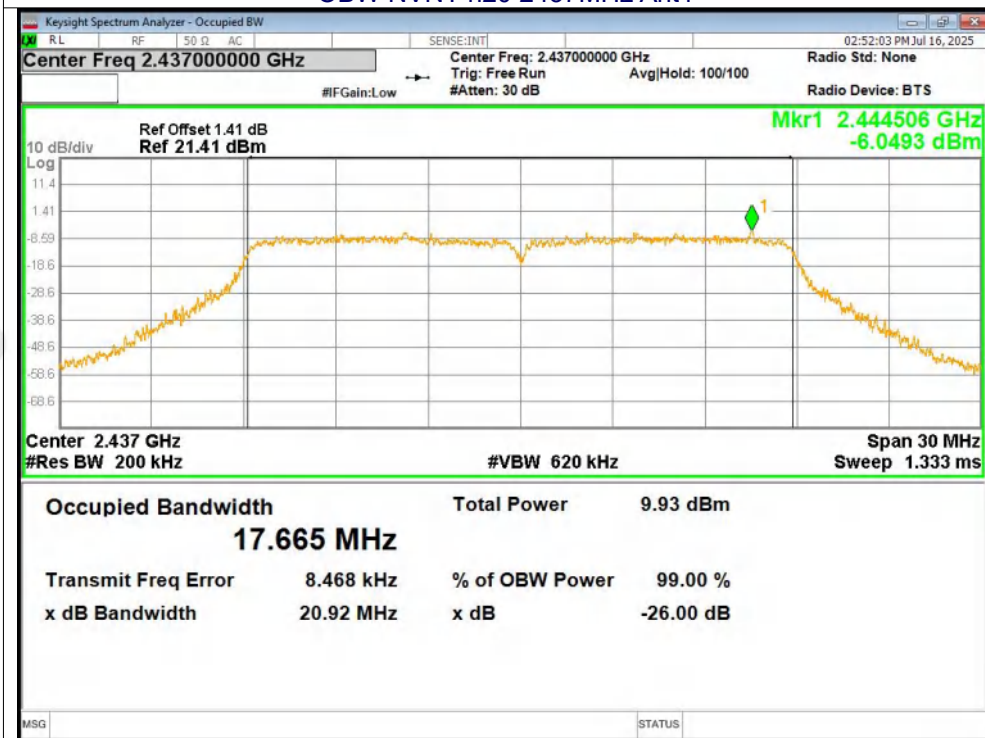


OBW NVNT n20 2462MHz Ant1

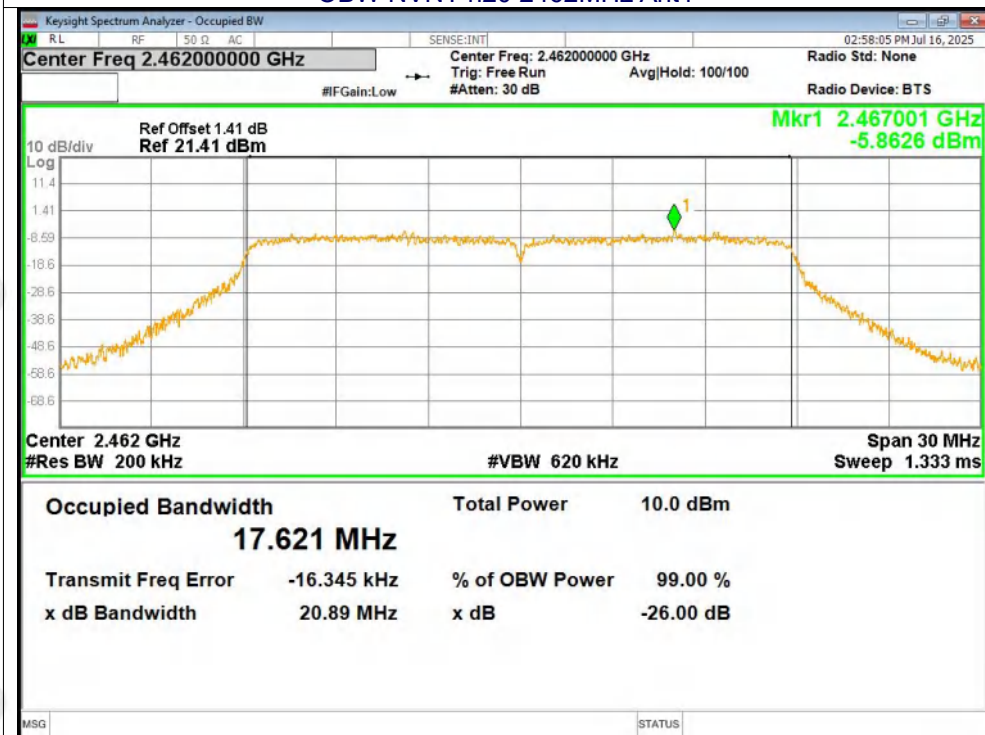


OBW NVNT n40 2422MHz Ant1

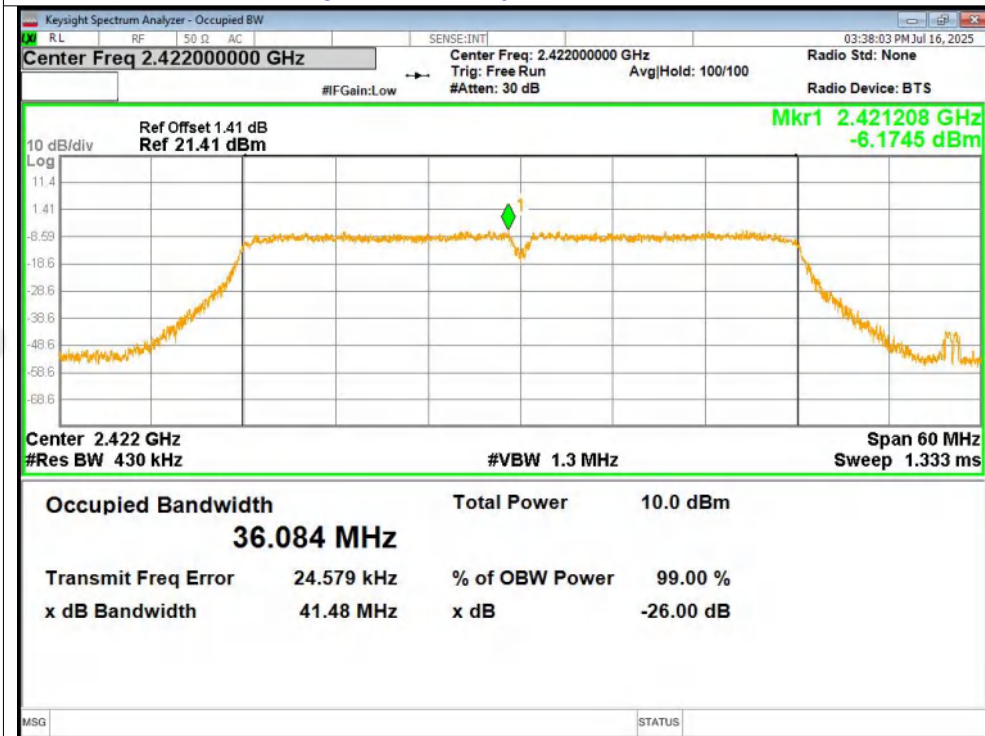


OBW NVNT n40 2437MHz Ant1

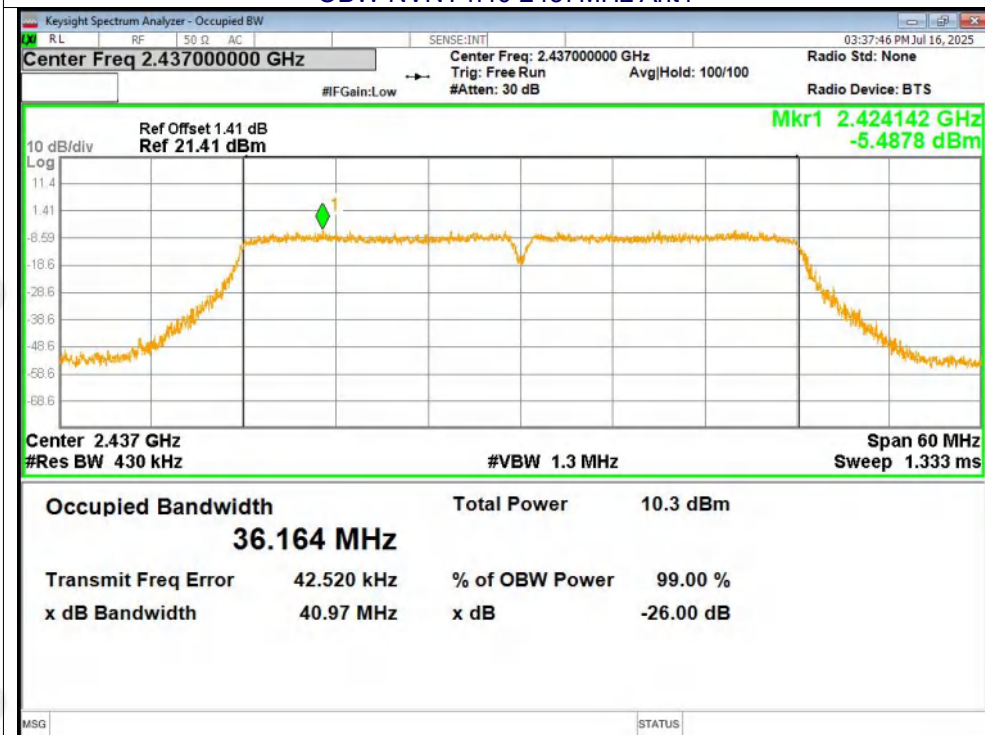


OBW NVNT n40 2452MHz Ant1

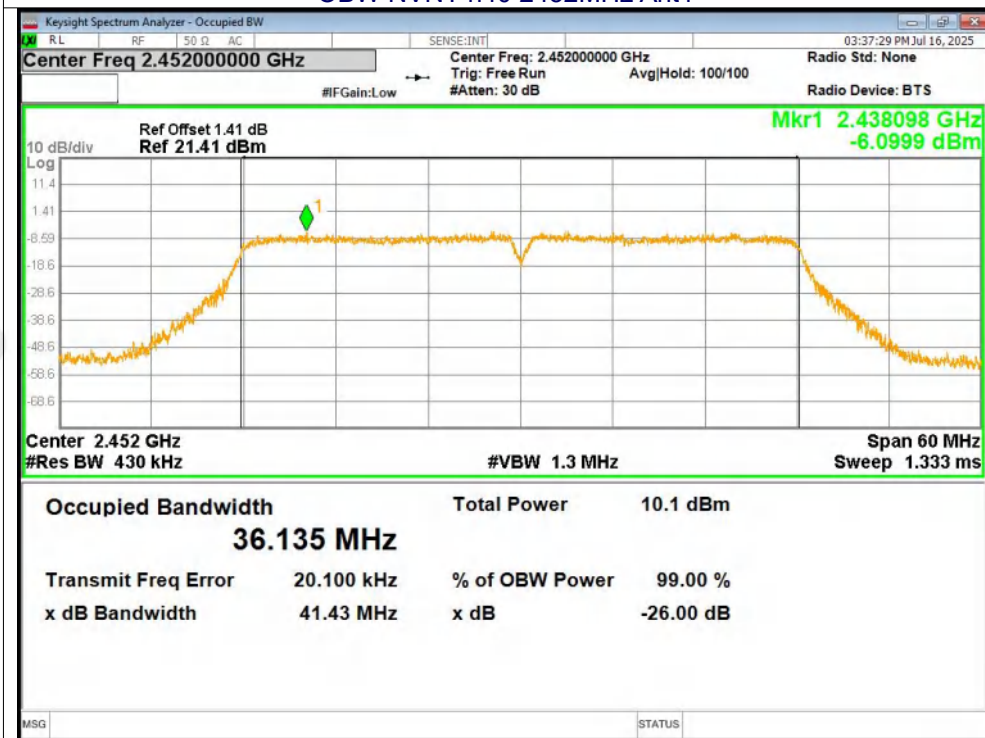


OBW NVNT ax20 2412MHz Ant1

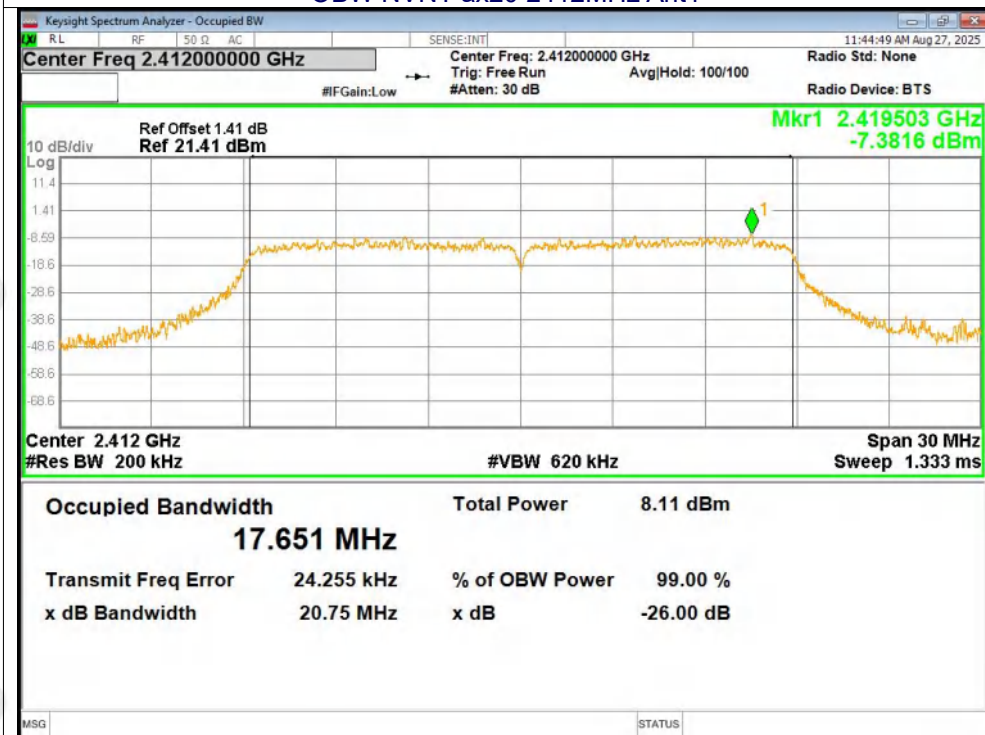


OBW NVNT ax20 2437MHz Ant1

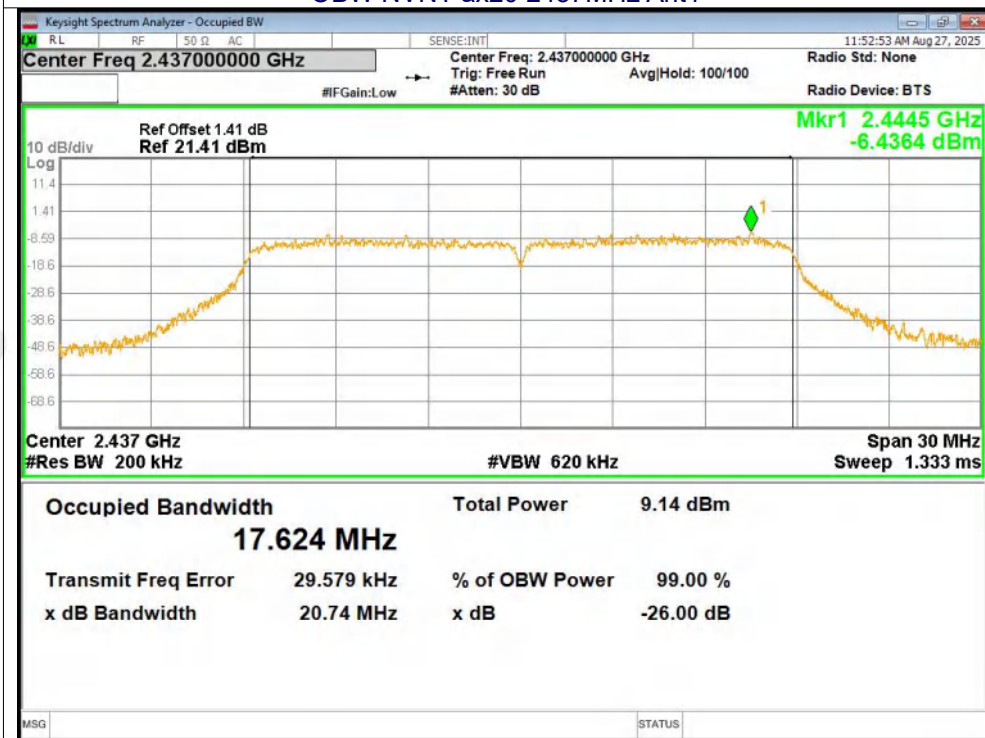


OBW NVNT ax20 2462MHz Ant1

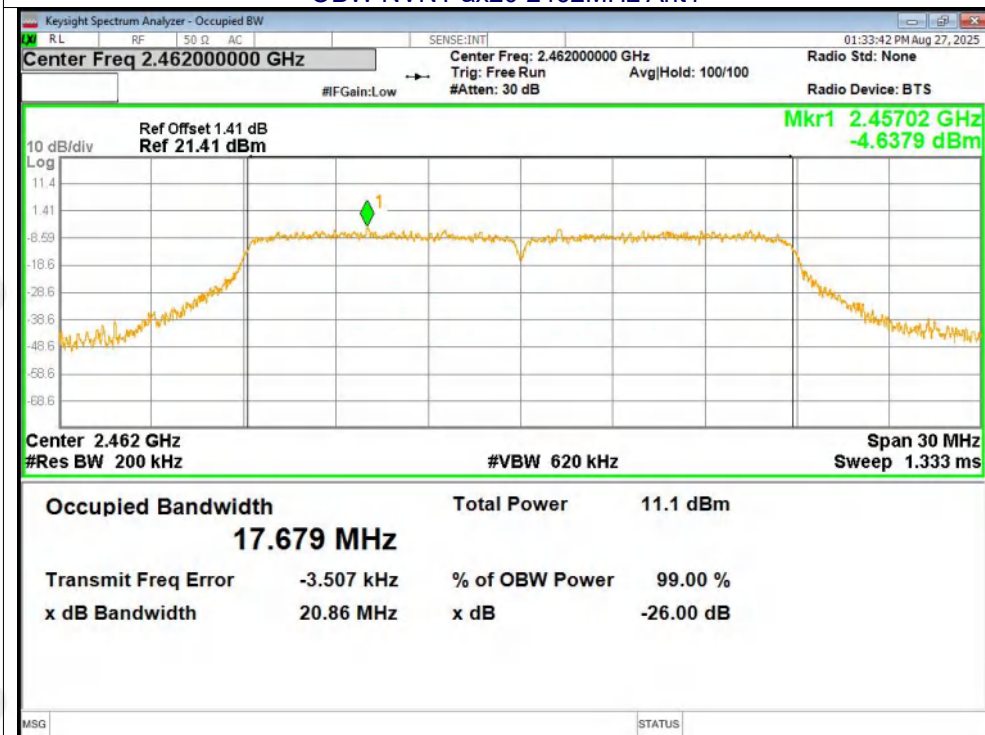


OBW NVNT ax40 2422MHz Ant1

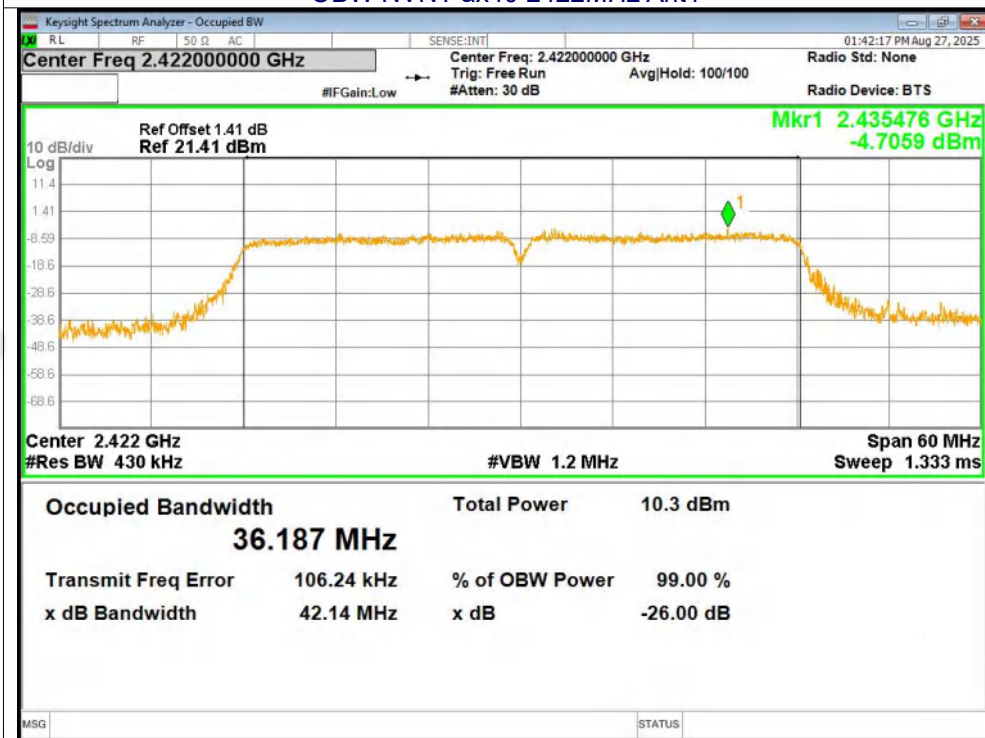

OBW NVNT ax40 2437MHz Ant1

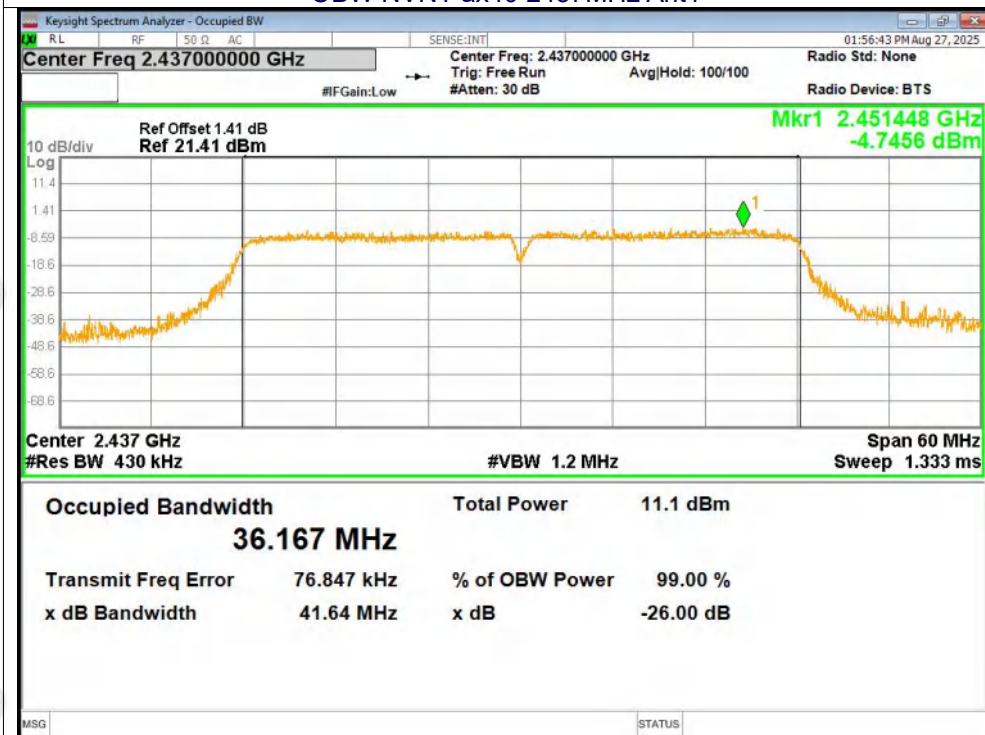

OBW NVNT ax40 2452MHz Ant1

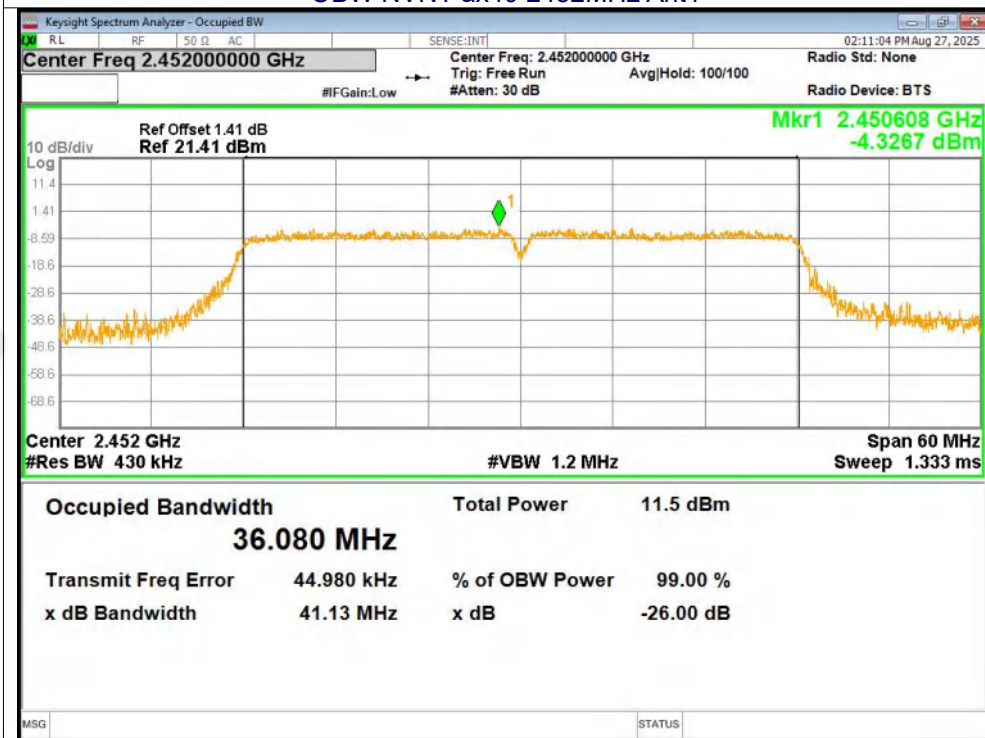



Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	Ant1	-14.54	8	Pass
b	2437	Ant1	-15.58	8	Pass
b	2462	Ant1	-15.13	8	Pass
g	2412	Ant1	-18.63	8	Pass
g	2437	Ant1	-18.77	8	Pass
g	2462	Ant1	-19.35	8	Pass
n20	2412	Ant1	-20.28	8	Pass
n20	2437	Ant1	-19.00	8	Pass
n20	2462	Ant1	-20.36	8	Pass
n40	2422	Ant1	-23.84	8	Pass
n40	2437	Ant1	-23.38	8	Pass
n40	2452	Ant1	-23.37	8	Pass
ax20	2412	Ant1	-13.00	0	Pass
ax20	2437	Ant1	-13.52	0	Pass
ax20	2462	Ant1	-12.63	0	Pass
ax40	2422	Ant1	-15.93	0	Pass
ax40	2437	Ant1	-14.34	0	Pass
ax40	2452	Ant1	-16.50	0	Pass


Test Graphs
PSD NVNT b 2412MHz Ant1




PSD NVNT b 2437MHz Ant1




PSD NVNT b 2462MHz Ant1

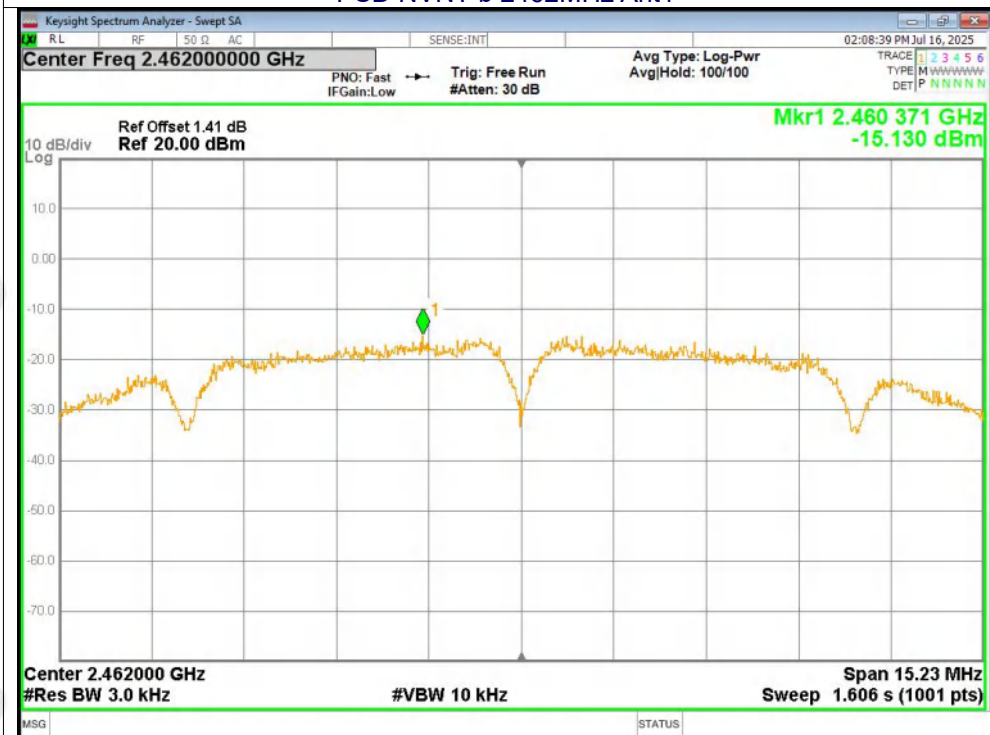


PSD NVNT g 2412MHz Ant1

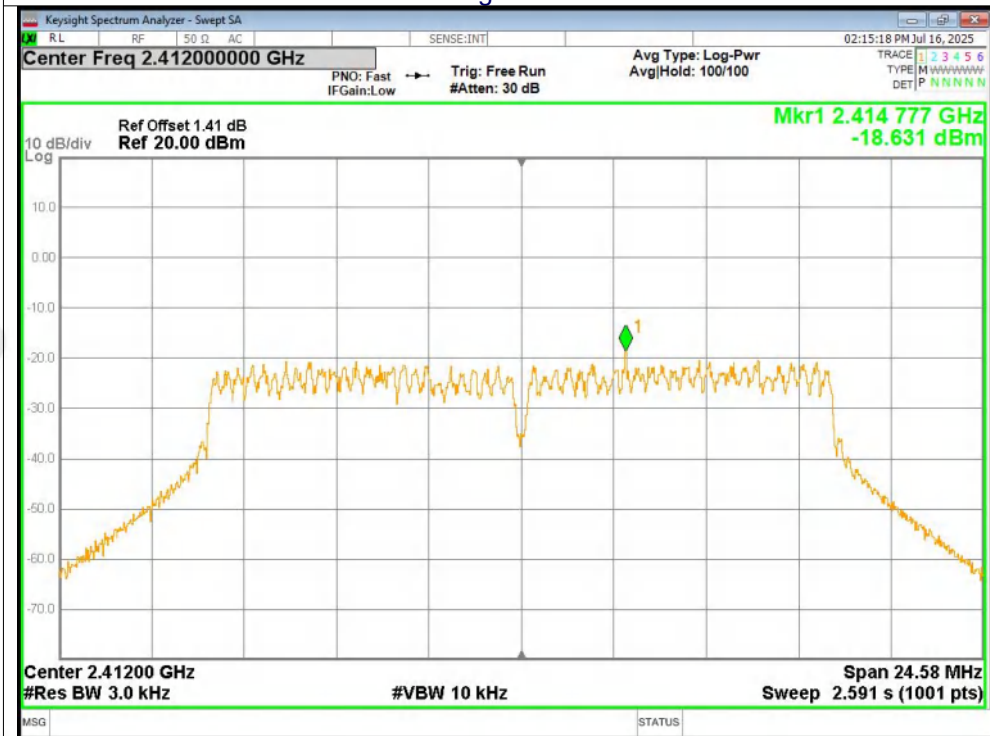


PSD NVNT g 2437MHz Ant1

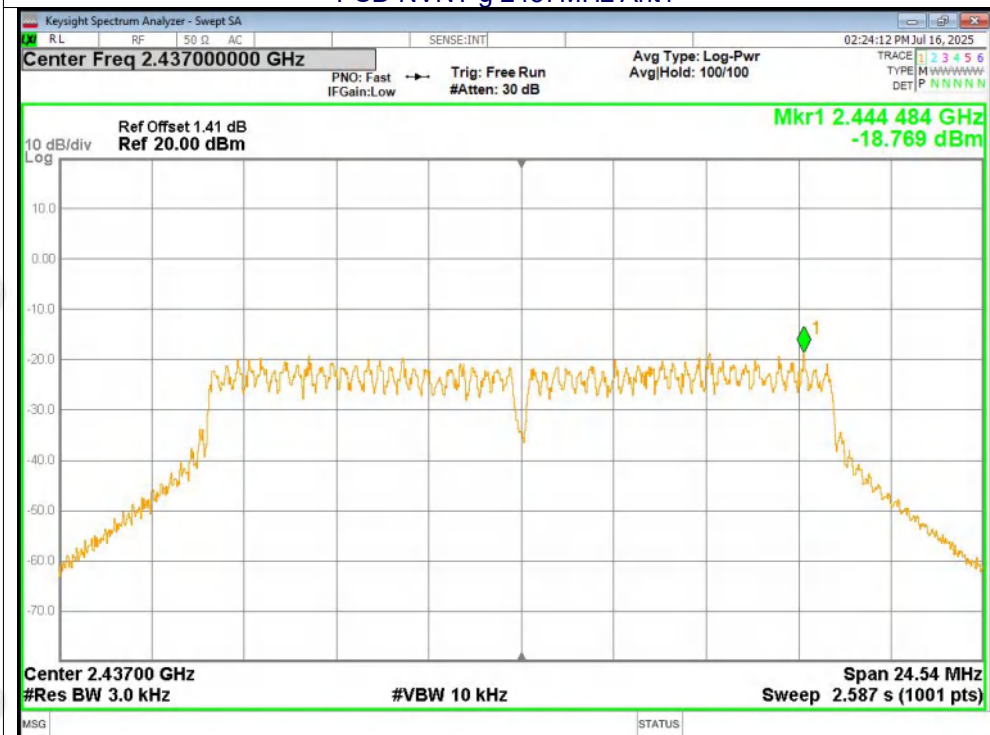


PSD NVNT g 2462MHz Ant1


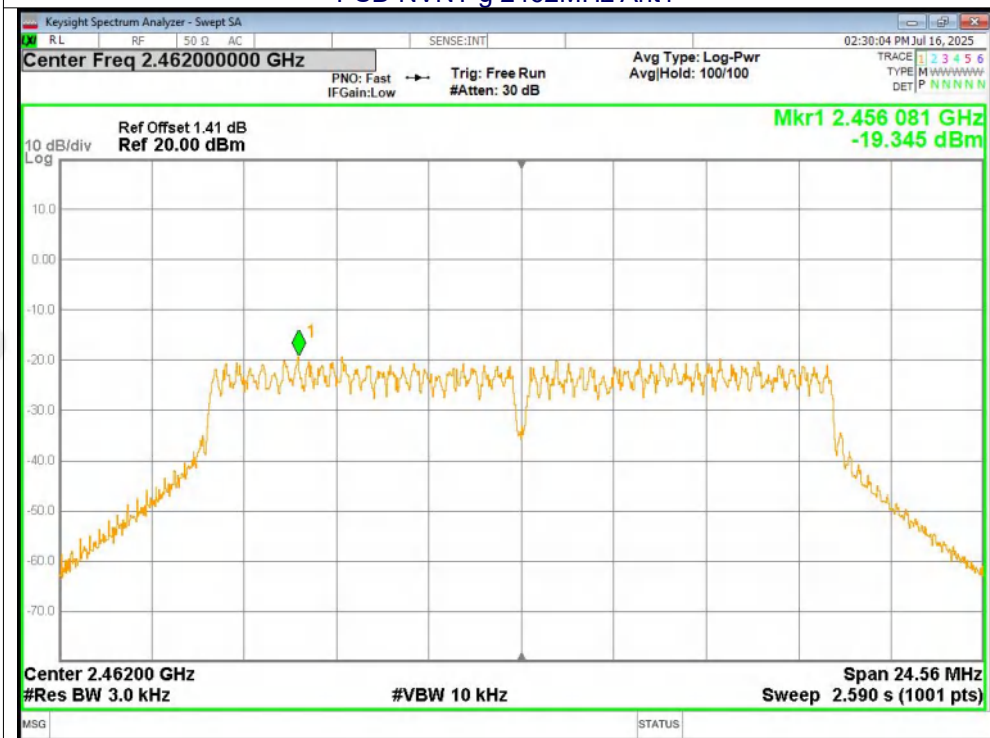


PSD NVNT n20 2412MHz Ant1

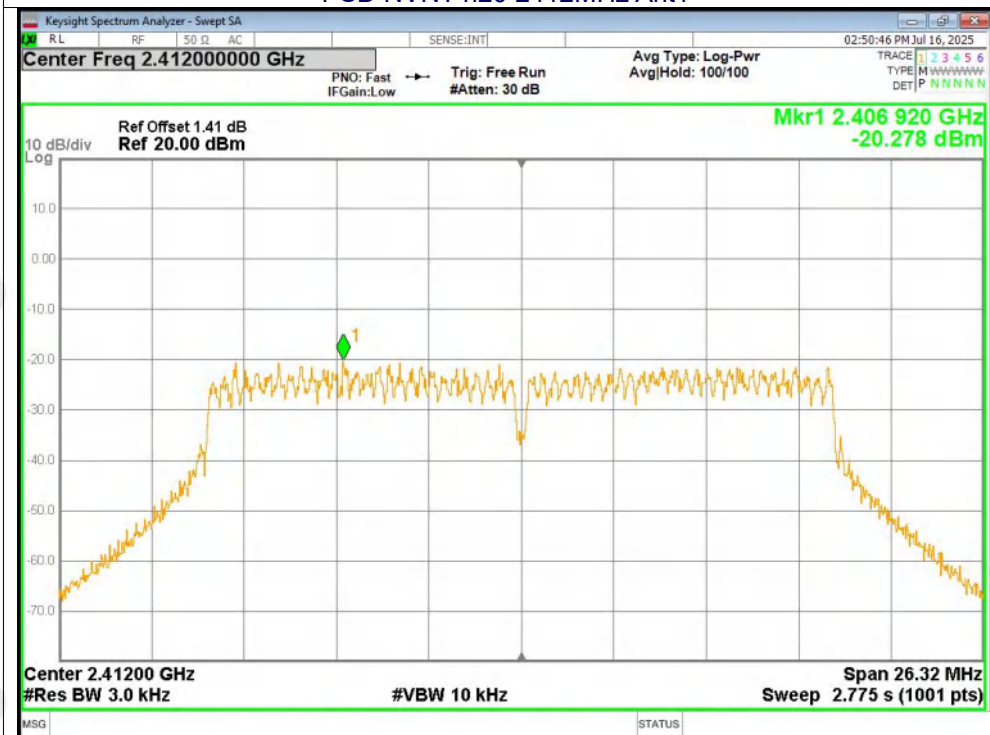

PSD NVNT n20 2437MHz Ant1

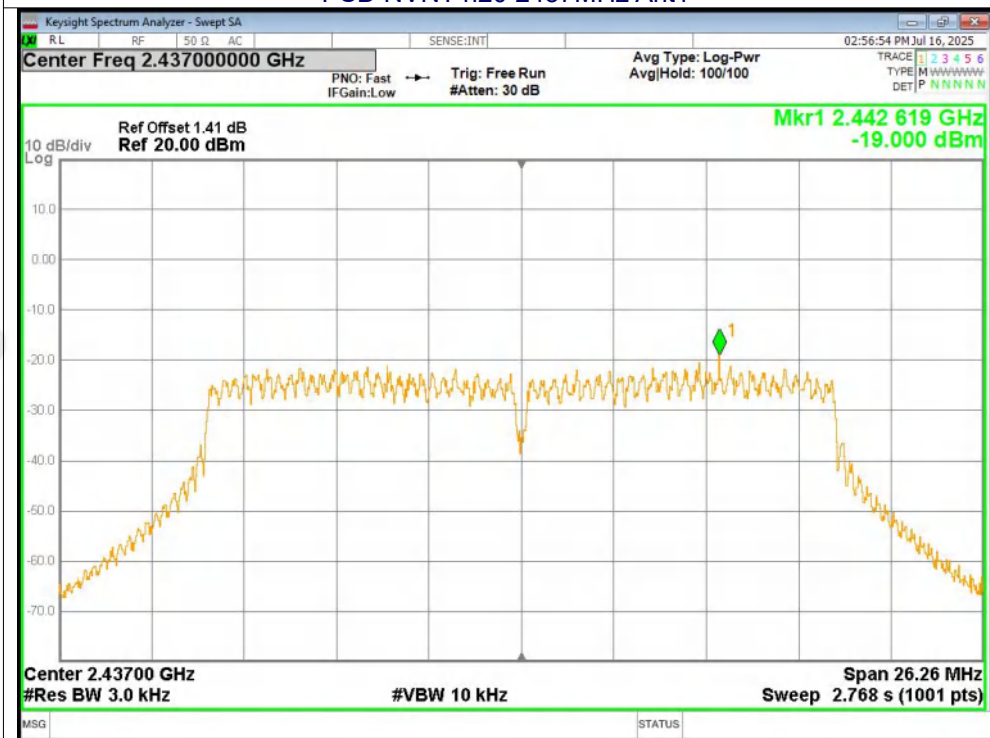


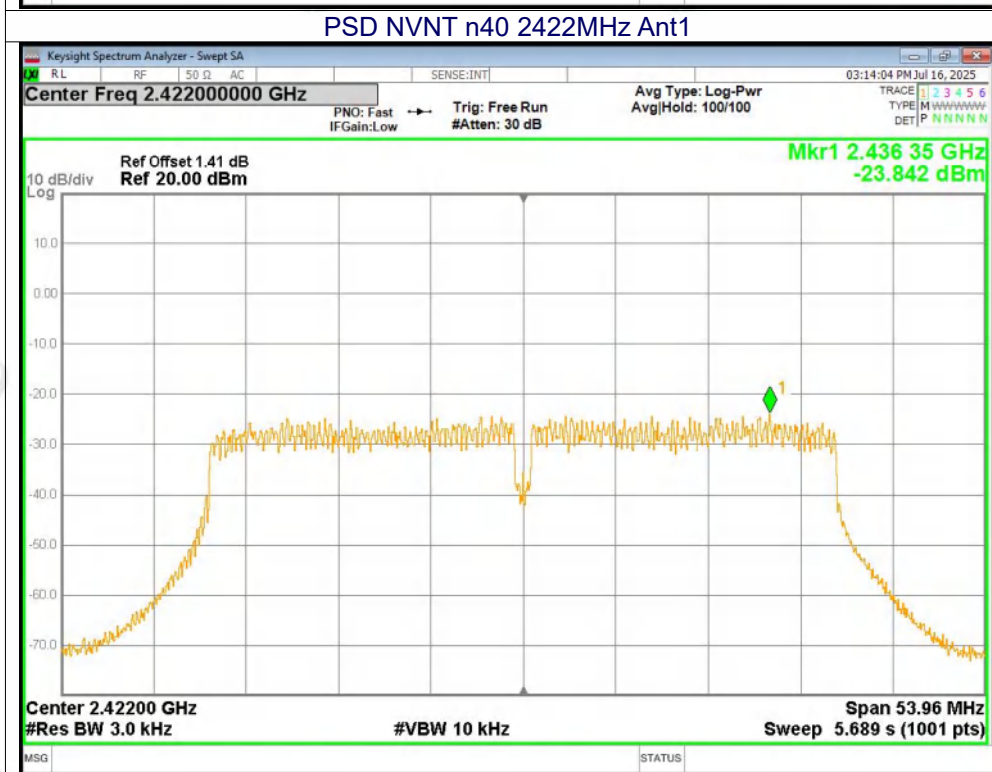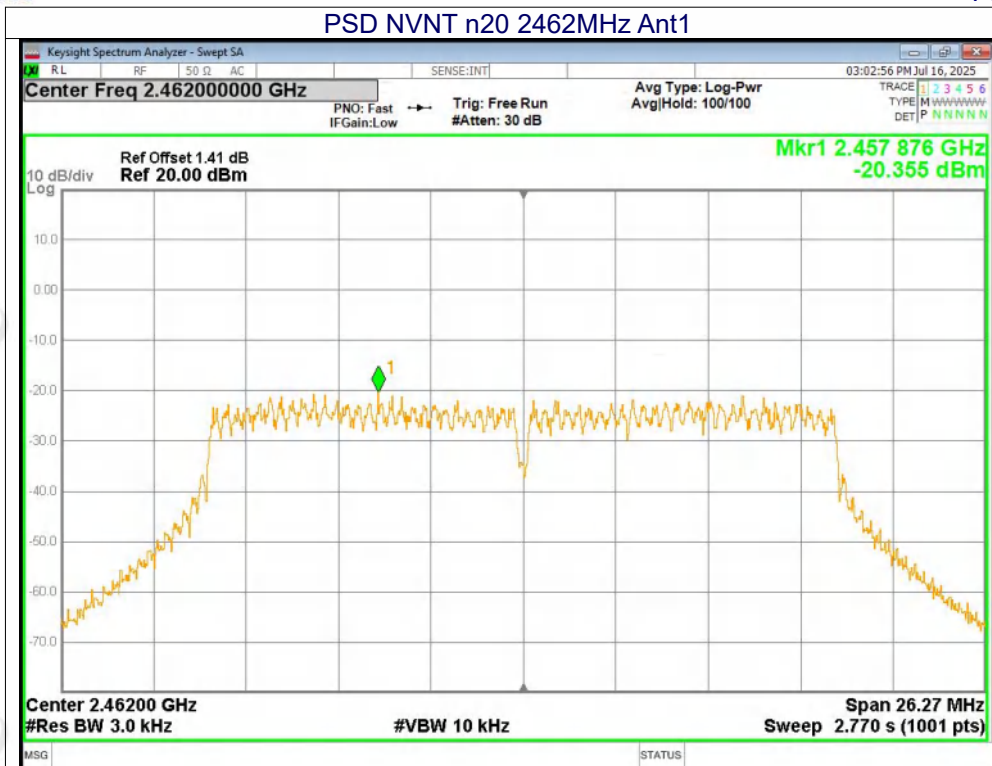


PSD NVNT n40 2437MHz Ant1




PSD NVNT n40 2452MHz Ant1

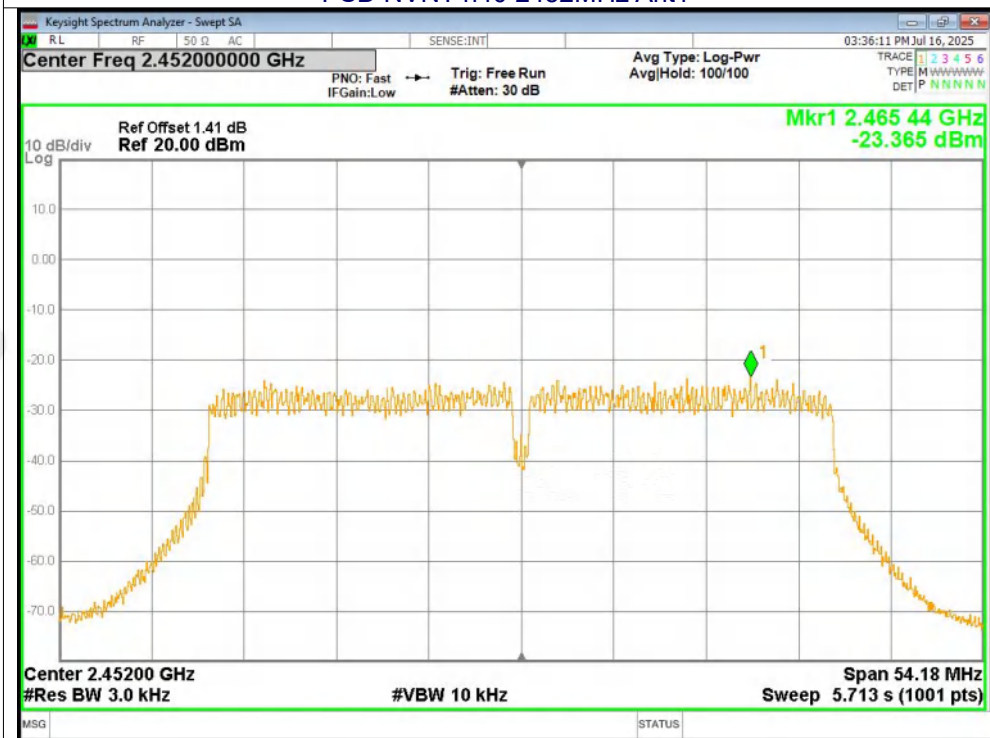

PSD NVNT ax20 2412MHz Ant1

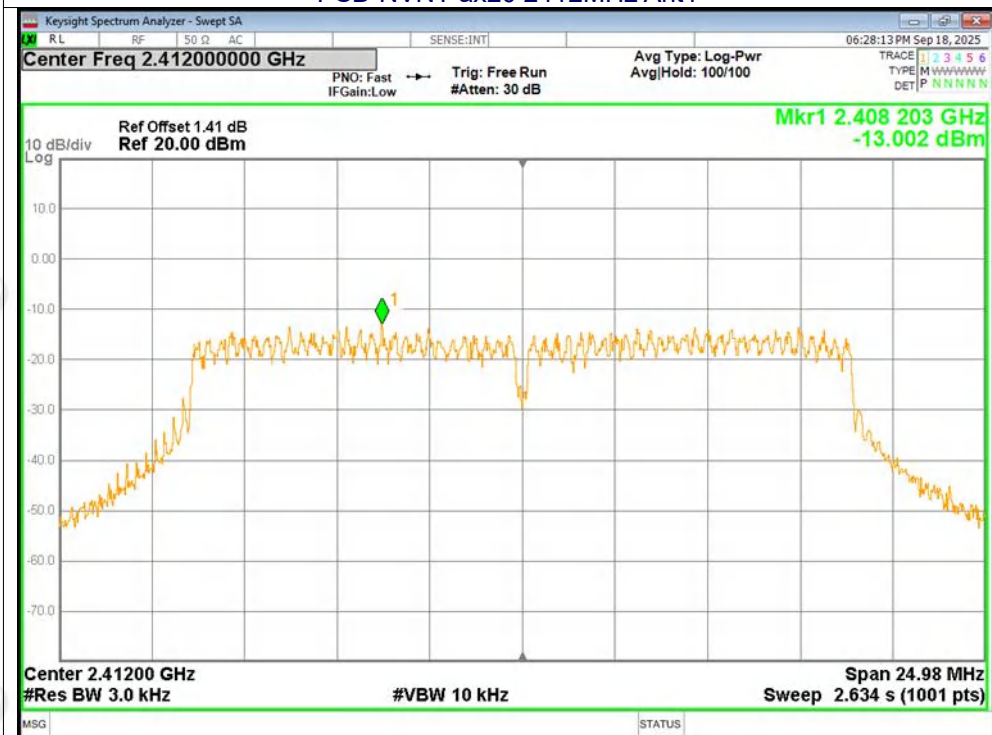

PSD NVNT ax20 2437MHz Ant1

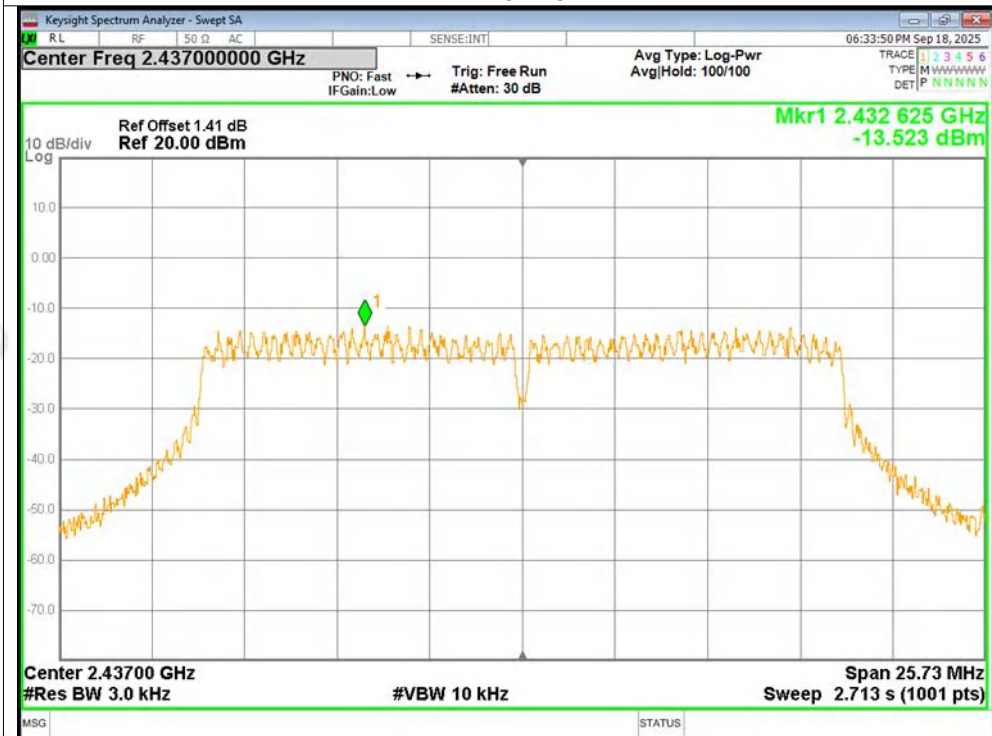


PSD NVNT ax20 2462MHz Ant1




PSD NVNT ax40 2422MHz Ant1



PSD NVNT ax40 2437MHz Ant1

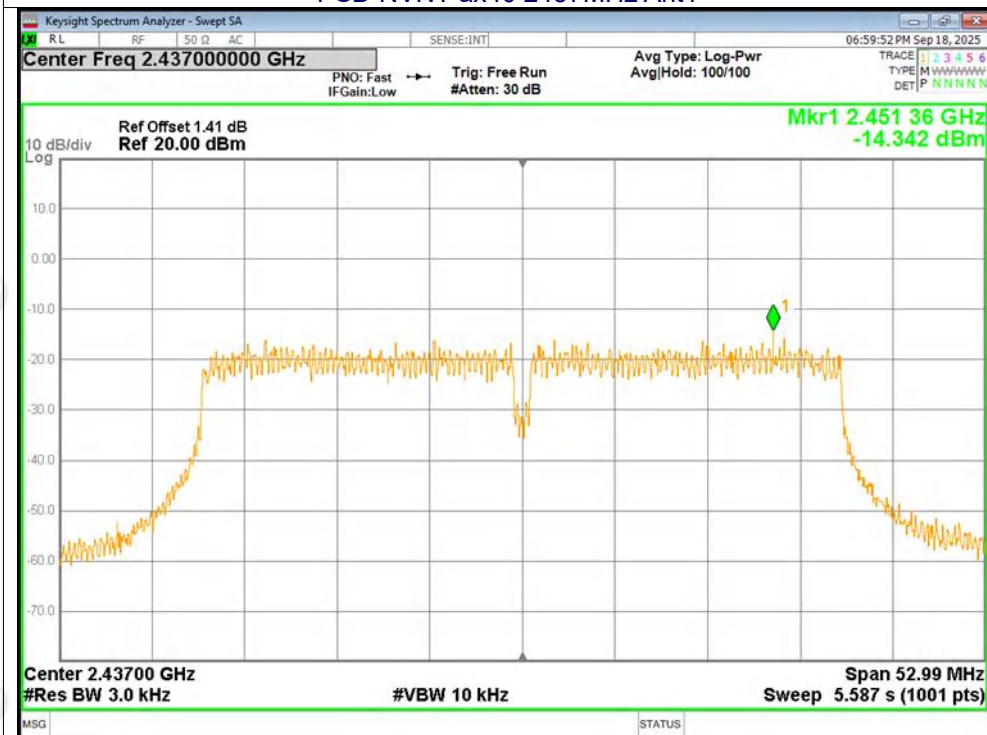

PSD NVNT ax40 2452MHz Ant1

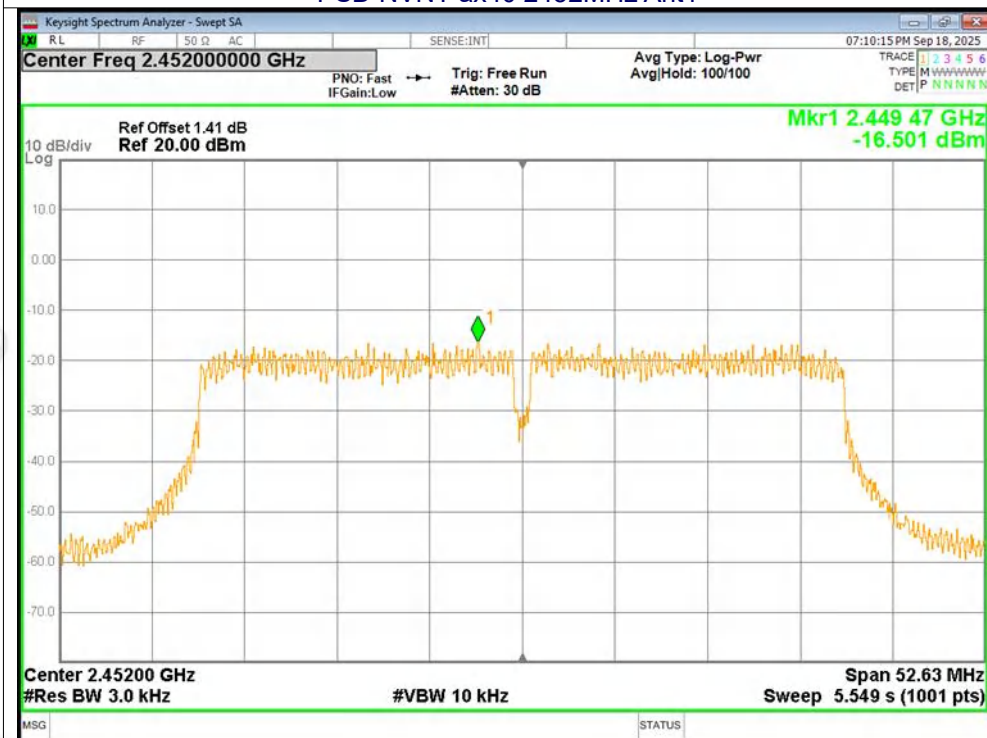




Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-46.59	-20	Pass
b	2462	Ant1	-54.71	-20	Pass
g	2412	Ant1	-30.67	-20	Pass
g	2462	Ant1	-50.99	-20	Pass
n20	2412	Ant1	-39.37	-20	Pass
n20	2462	Ant1	-51.03	-20	Pass
n40	2422	Ant1	-37.04	-20	Pass
n40	2452	Ant1	-47.01	-20	Pass
ax20	2412	Ant1	-34.37	-20	Pass
ax20	2462	Ant1	-45.83	-20	Pass
ax40	2422	Ant1	-33.63	-20	Pass
ax40	2452	Ant1	-33.9	-20	Pass

Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref

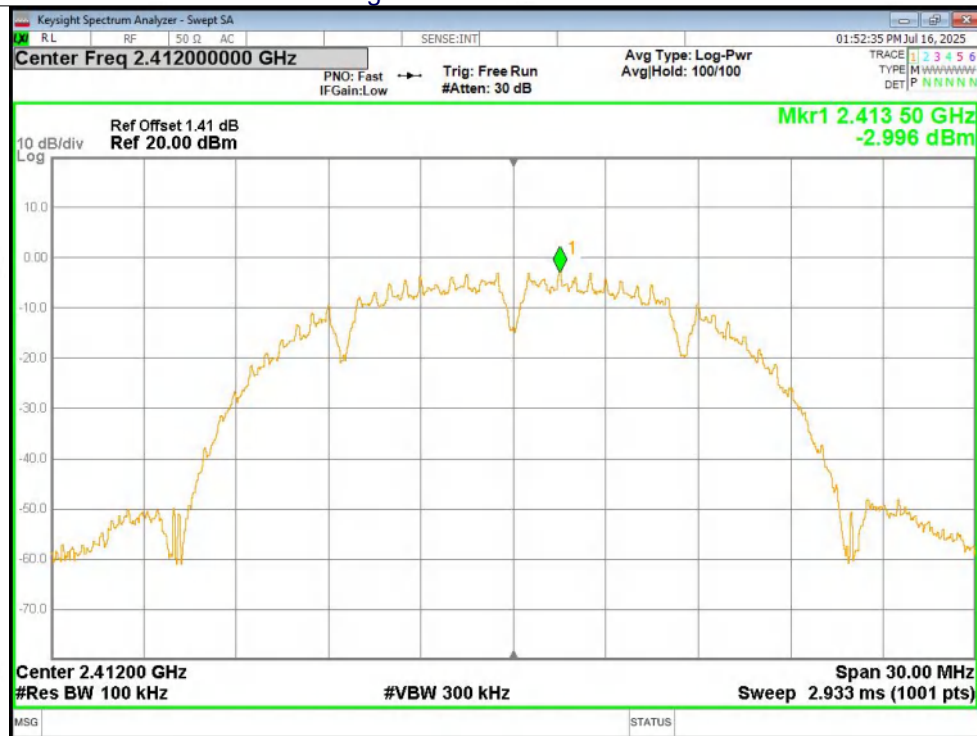

Band Edge NVNT b 2412MHz Ant1 Emission

