


6.10.4 Test data

Below 1GHz

[Test mode: TX]; [Polarity: Horizontal]

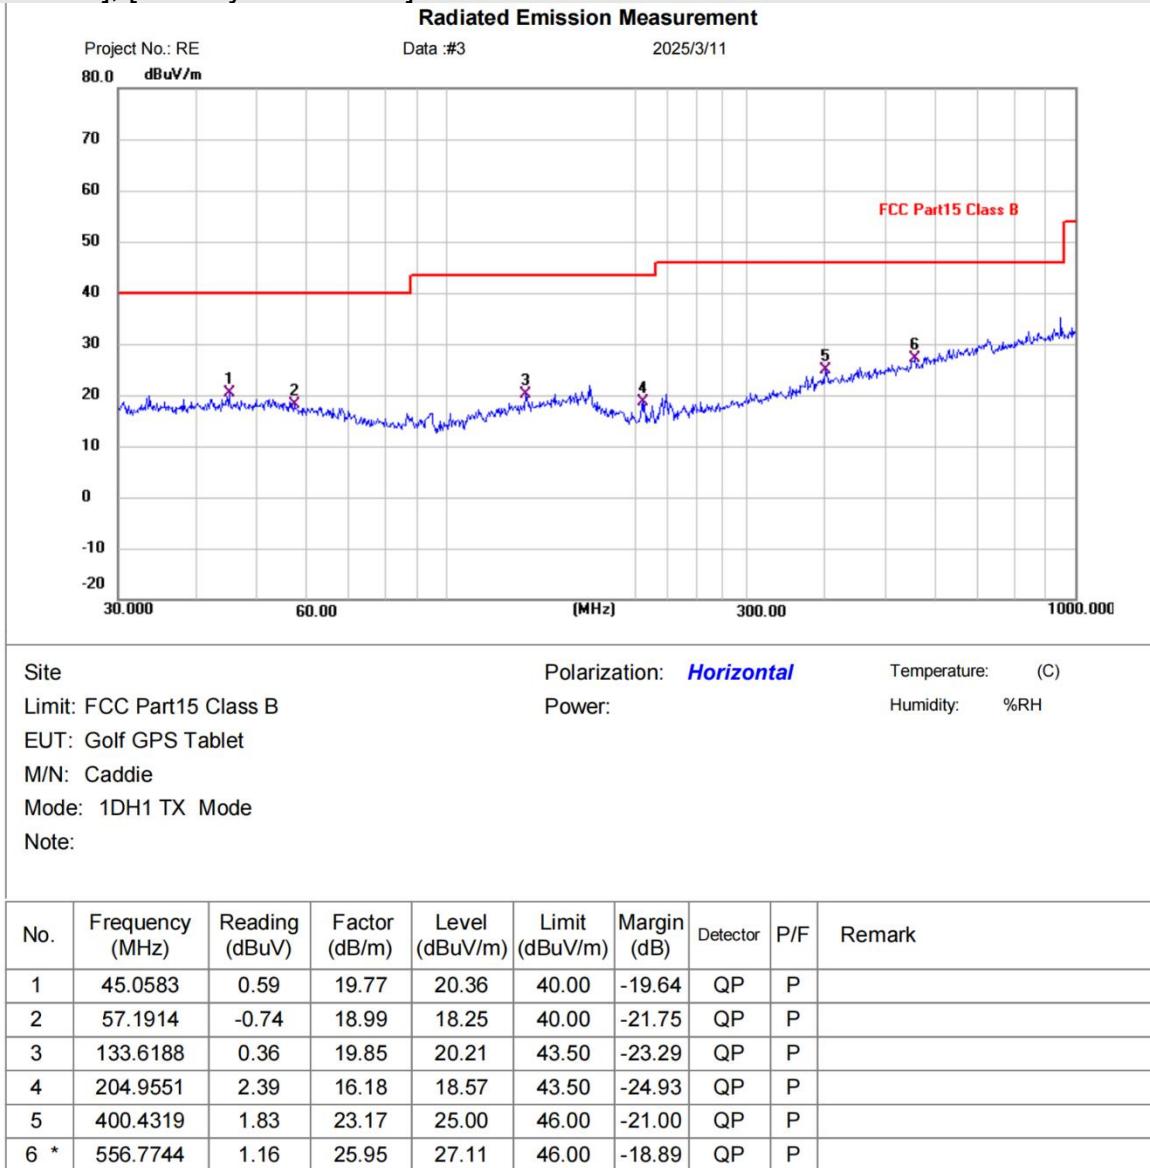


Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

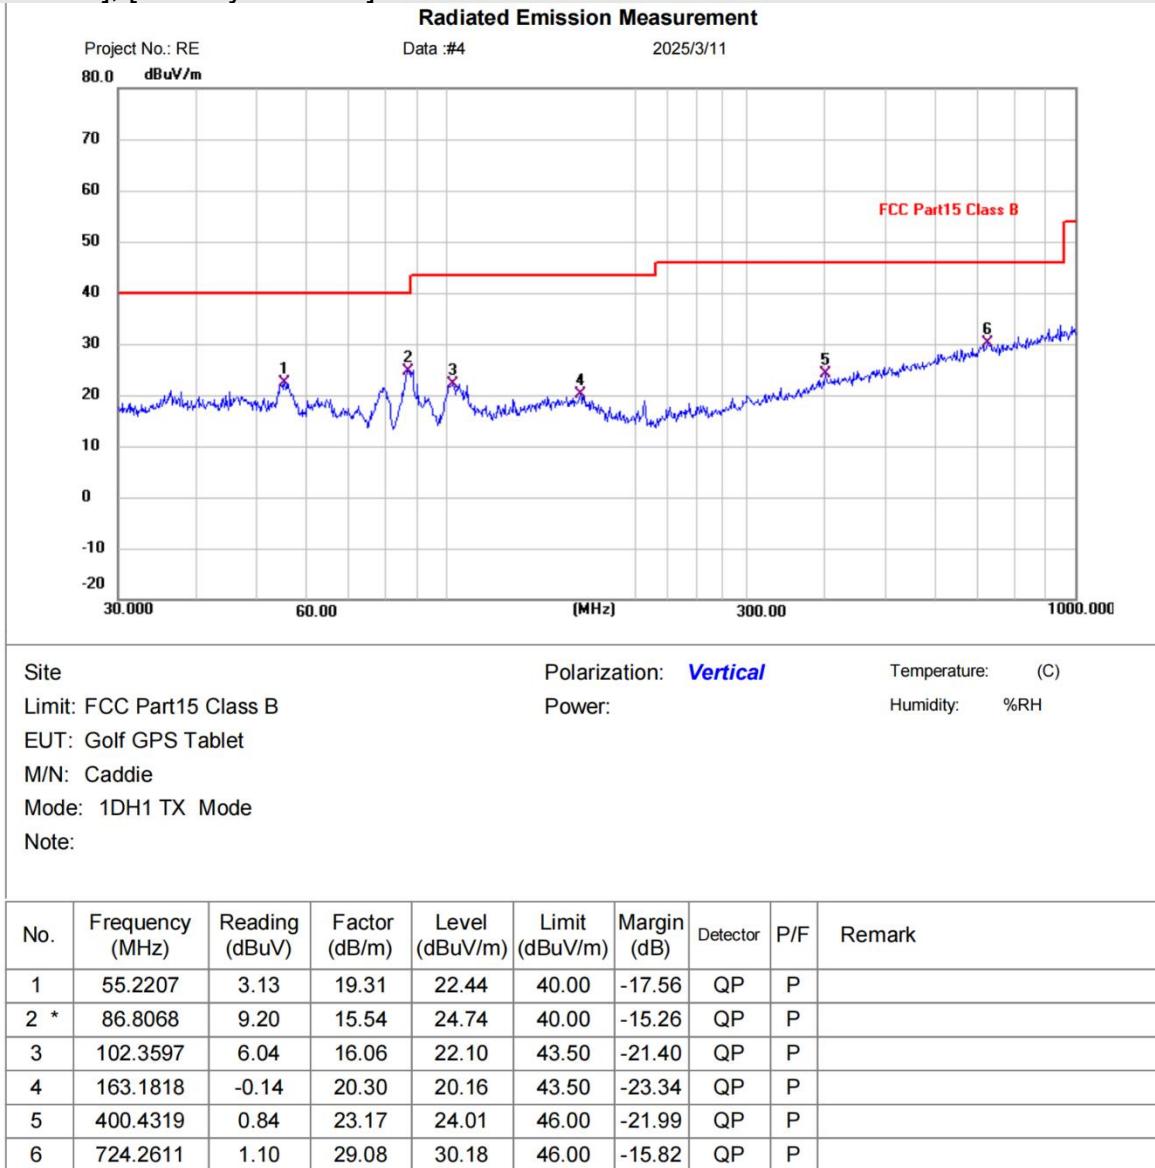[Test mode: TX]; [Polarity: Vertical]

* Maximum data Order limit Order margin
Test Result: Pass
BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481


Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

Above 1GHz:

Remark: During the test, pre-scan the GFSK, pi/4DQPSK, 8DPSK mode, and found the GFSK mode which it is worse case.

[Test mode: TX low channel]; [Polarity: Horizontal]

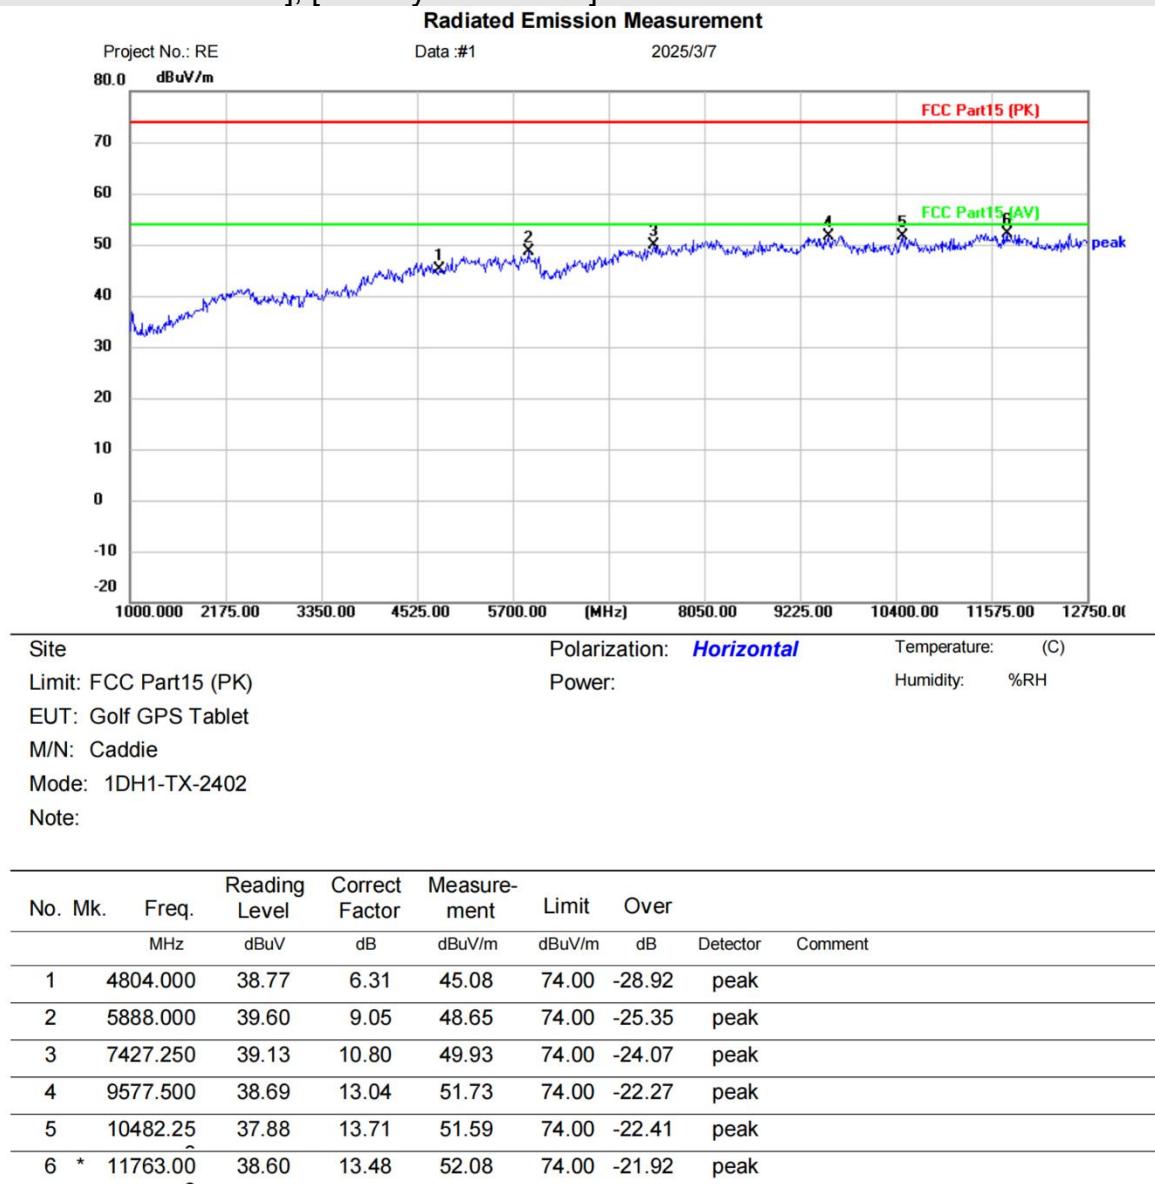

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

[Test mode: TX low channel]; [Polarity: Vertical]

Radiated Emission Measurement


 Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Golf GPS Tablet

M/N: Caddie

Mode: 1DH1-TX-2402

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4804.000	39.24	6.31	45.55	74.00	-28.45		peak	
2	5876.250	40.22	8.99	49.21	74.00	-24.79		peak	
3	6957.250	39.14	9.74	48.88	74.00	-25.12		peak	
4	8484.750	39.56	11.43	50.99	74.00	-23.01		peak	
5	10200.25	37.90	13.22	51.12	74.00	-22.88		peak	
6	*	11833.50	38.88	13.50	52.38	74.00	-21.62	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

 Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

[Test mode: TX middle channel]; [Polarity: Horizontal]

Radiated Emission Measurement


 Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Golf GPS Tablet

M/N: Caddie

Mode: 1DH1-TX-2441

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4882.000	38.95	6.43	45.38	74.00	-28.62		peak	
2	5794.000	39.48	8.91	48.39	74.00	-25.61		peak	
3	6734.000	38.79	8.97	47.76	74.00	-26.24		peak	
4	7615.250	39.31	10.59	49.90	74.00	-24.10		peak	
5	8684.500	38.23	11.79	50.02	74.00	-23.98		peak	
6	*	10129.75	36.86	13.26	50.12	74.00	-23.88	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

 Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

[Test mode: TX middle channel]; [Polarity: Vertical]

Radiated Emission Measurement


 Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Golf GPS Tablet

M/N: Caddie

Mode: 1DH1-TX-2441

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4882.000	39.01	6.43	45.44	74.00	-28.56		peak	
2	5899.750	39.13	9.10	48.23	74.00	-25.77		peak	
3	7450.750	38.72	11.21	49.93	74.00	-24.07		peak	
4	8907.750	39.11	12.57	51.68	74.00	-22.32		peak	
5	9718.500	38.60	13.63	52.23	74.00	-21.77		peak	
6	*	11340.00	39.15	13.61	52.76	74.00	-21.24	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.


Tel: +86-755-23059481

 Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

[Test mode: TX High channel]; [Polarity: Horizontal]

Radiated Emission Measurement

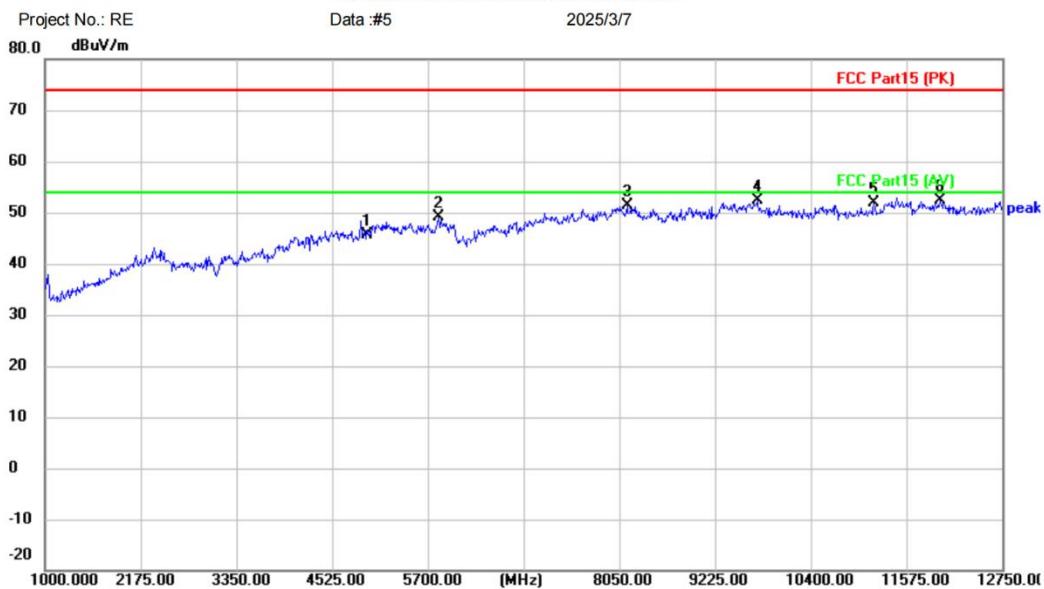
 Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Golf GPS Tablet

M/N: Caddie

Mode: 1DH1-TX-2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	38.32	7.41	45.73	74.00	-28.27	peak	
2		5829.250	40.29	8.93	49.22	74.00	-24.78	peak	
3		8144.000	39.81	11.54	51.35	74.00	-22.65	peak	
4	*	9742.000	38.66	13.77	52.43	74.00	-21.57	peak	
5		11175.50	38.52	13.26	51.78	74.00	-22.22	peak	
6		11986.25	38.22	14.18	52.40	74.00	-21.60	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.


Tel: +86-755-23059481

 Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

[Test mode: TX High channel]; [Polarity: Vertical]

Radiated Emission Measurement

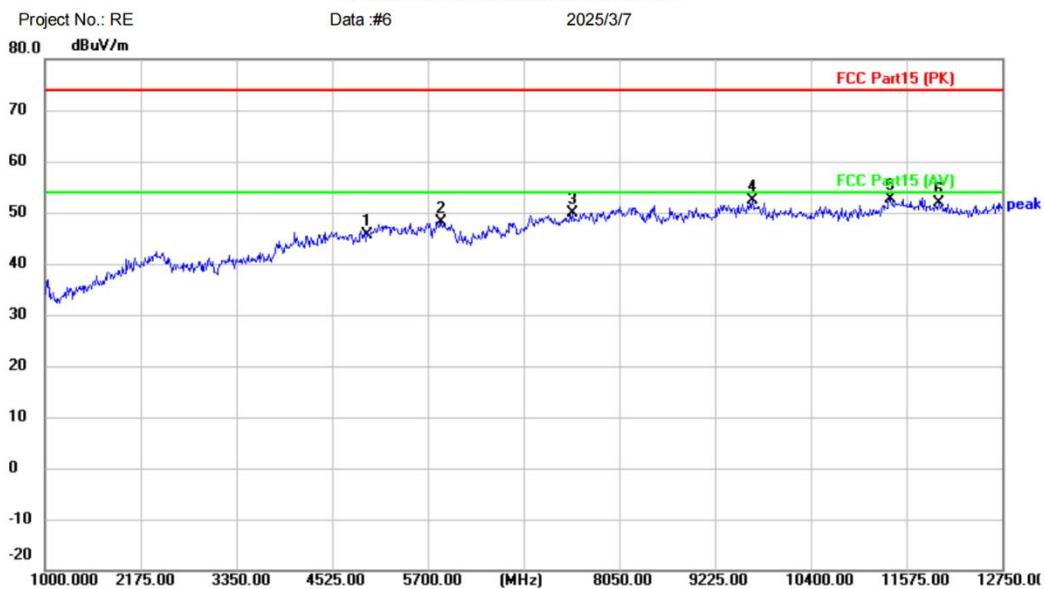
 Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Golf GPS Tablet

M/N: Caddie

Mode: 1DH1-TX-2480

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4960.000	38.16	7.41	45.57	74.00	-28.43		peak	
2	5864.500	39.28	8.93	48.21	74.00	-25.79		peak	
3	7474.250	38.83	10.94	49.77	74.00	-24.23		peak	
4	9683.250	38.83	13.52	52.35	74.00	-21.65		peak	
5	*	11375.25	38.65	13.99	52.64	74.00	-21.36		peak
6		11974.50	37.91	14.09	52.00	74.00	-22.00		peak

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

 Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

6.11 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart C 15.247(d) 47 CFR Part 15, Subpart C 15.205
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.11.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.11.2 Test setup


Below 1GHz:

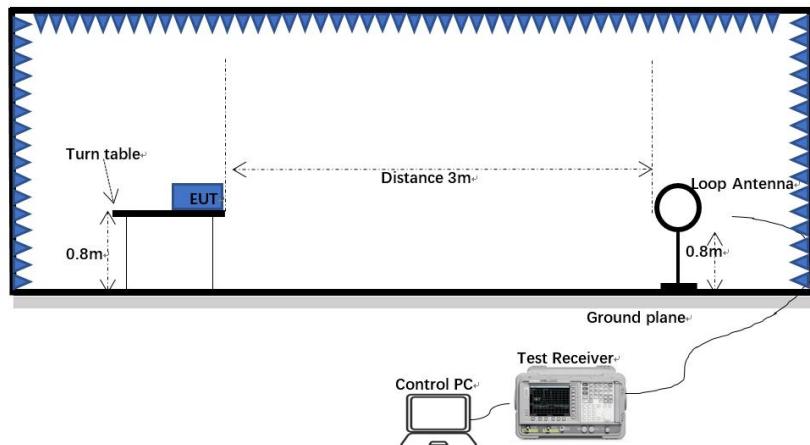

30MHz-1GHz:

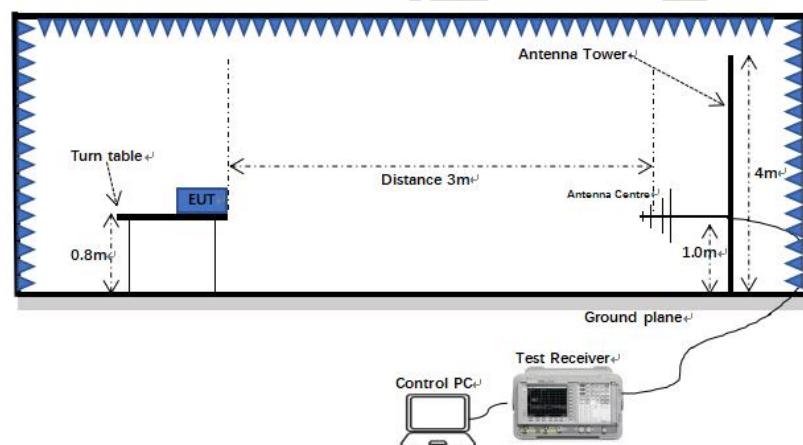

Above 1GHz:

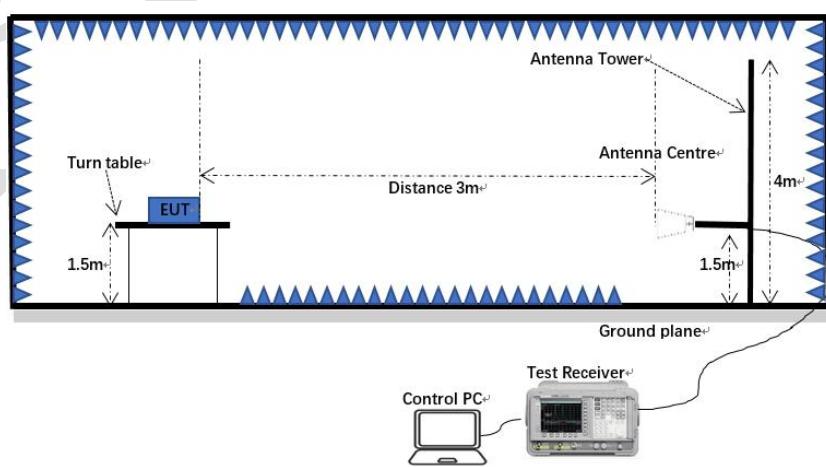

6.11.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)


Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



6.11.4 Test data

Remark: During the test, pre-scan the GFSK, pi/4DQPSK, 8DPSK mode, and found the GFSK mode which it is worse case.

[Test mode: TX low channel]; [Polarity: Horizontal]

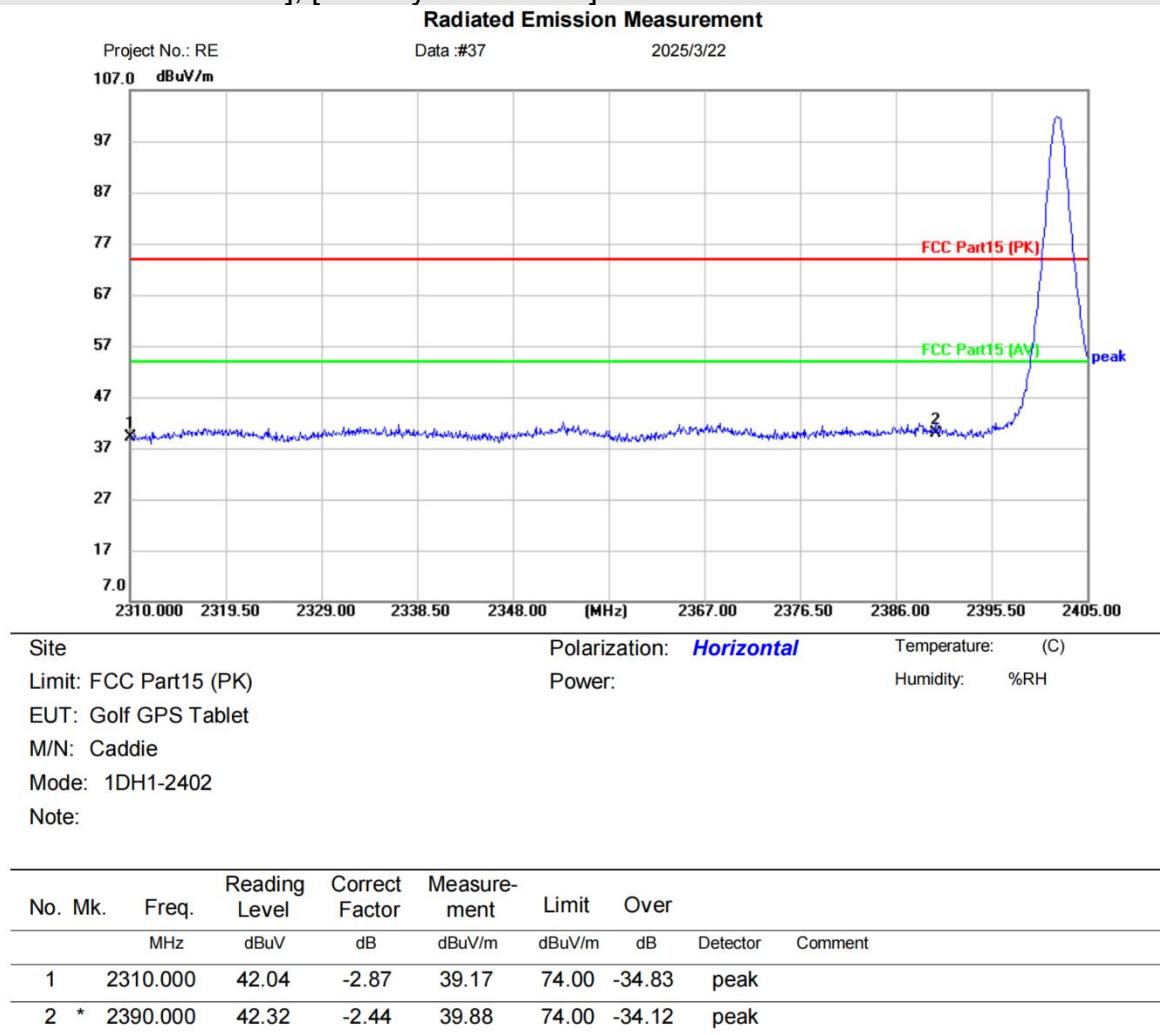

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Receiver: ESR 1

Spectrum Analyzer:

FSP40

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3


[Test mode:TX low channel]; [Polarity: Vertical]

Radiated Emission Measurement

 Project No.: RE
 107.0 dB_{uV/m}

Data #:38

2025/3/22

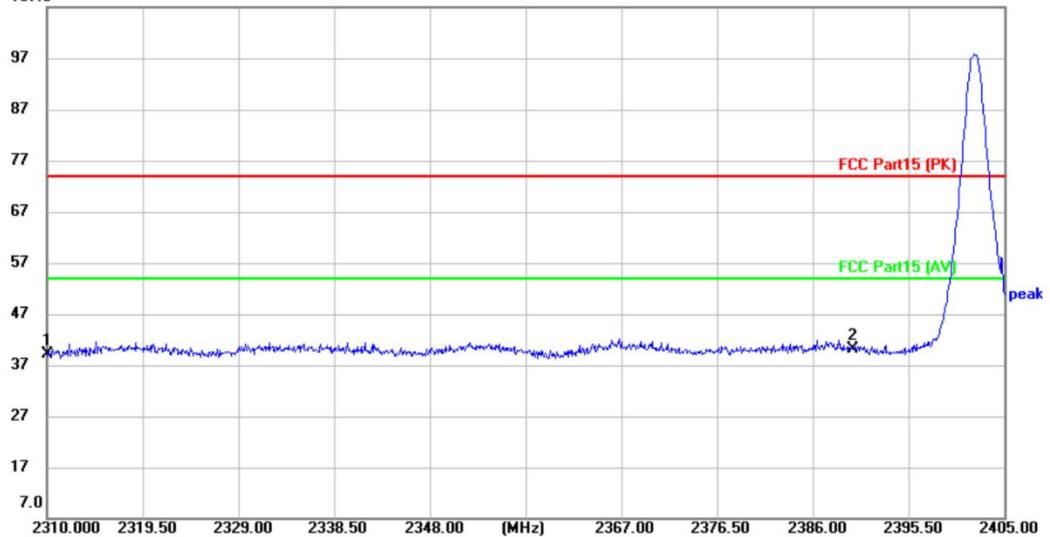

Site

 Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Golf GPS Tablet

M/N: Caddie

Mode: 1DH1-2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dB _{uV}	dB	dB _{uV/m}	dB	Detector	Comment
1		2310.000	42.03	-2.87	39.16	74.00	-34.84	peak
2	*	2390.000	42.65	-2.44	40.21	74.00	-33.79	peak

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

 Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

[Test mode: TX High channel]; [Polarity: Horizontal]


Radiated Emission Measurement

Project No.: RE

Data #:39

2025/3/22

107.0 dBuV/m

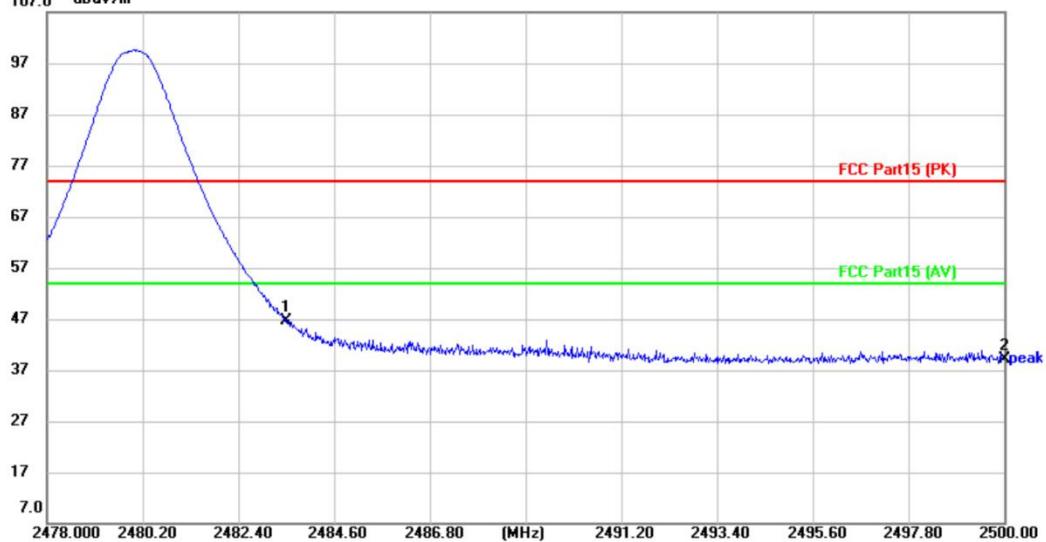

Site

 Polarization: **Horizontal**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Golf GPS Tablet

M/N: Caddie

Mode: 1DH1-2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	2483.500	49.51	-2.91	46.60	74.00	-27.40	peak
2		2500.000	42.13	-3.00	39.13	74.00	-34.87	peak

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

 Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

[Test mode:TX High channel]; [Polarity: Vertical]


Radiated Emission Measurement

Project No.: RE

Data #:40

2025/3/22

107.0 dBuV/m

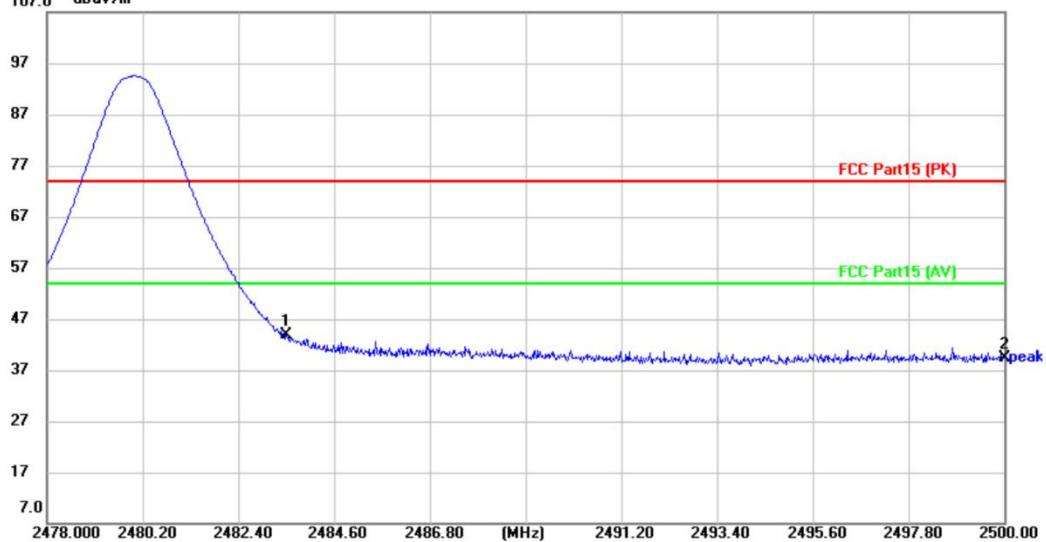

Site

 Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: Golf GPS Tablet

M/N: Caddie

Mode: 1DH1-2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	2483.500	46.77	-2.91	43.86	74.00	-30.14	peak
2		2500.000	42.29	-3.00	39.29	74.00	-34.71	peak

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

 Email: marketing@cblueasia.com www.cblueasia.com


Version:v1.3

7 Appendix A


7.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	0.115	21	Pass
NVNT	1-DH1	2441	Ant1	-1.019	21	Pass
NVNT	1-DH1	2480	Ant1	-0.304	21	Pass
NVNT	2-DH1	2402	Ant1	-1.424	21	Pass
NVNT	2-DH1	2441	Ant1	-2.108	21	Pass
NVNT	2-DH1	2480	Ant1	-1.35	21	Pass
NVNT	3-DH1	2402	Ant1	-0.651	21	Pass
NVNT	3-DH1	2441	Ant1	-1.801	21	Pass
NVNT	3-DH1	2480	Ant1	-1.084	21	Pass

Power NVNT 1-DH1 2402MHz Ant1

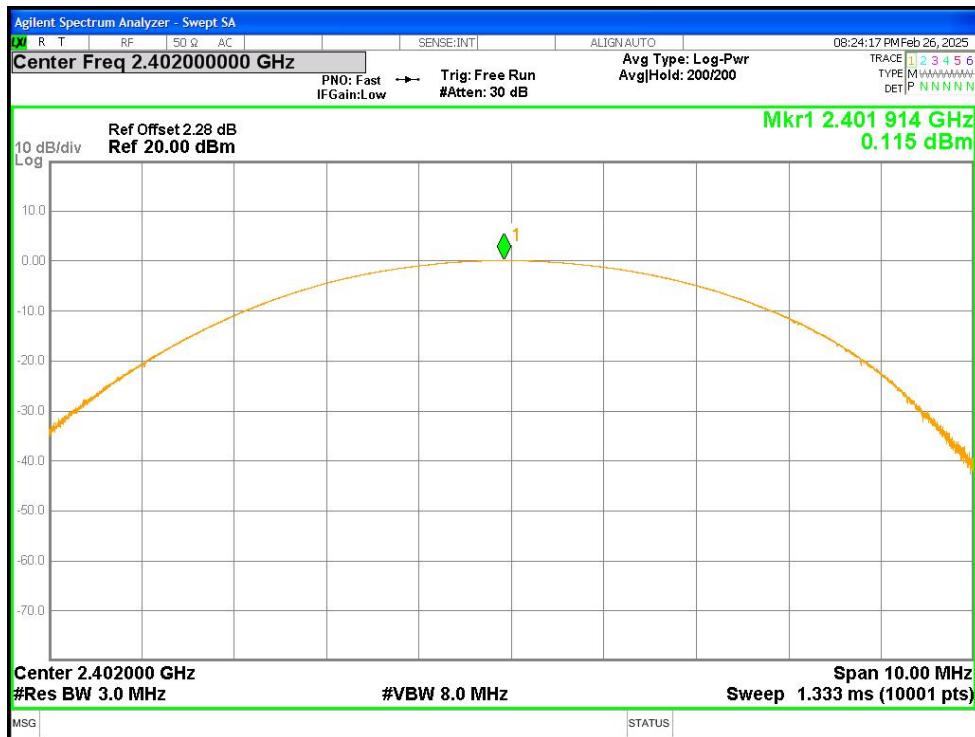


Power NVNT 1-DH1 2441MHz Ant1

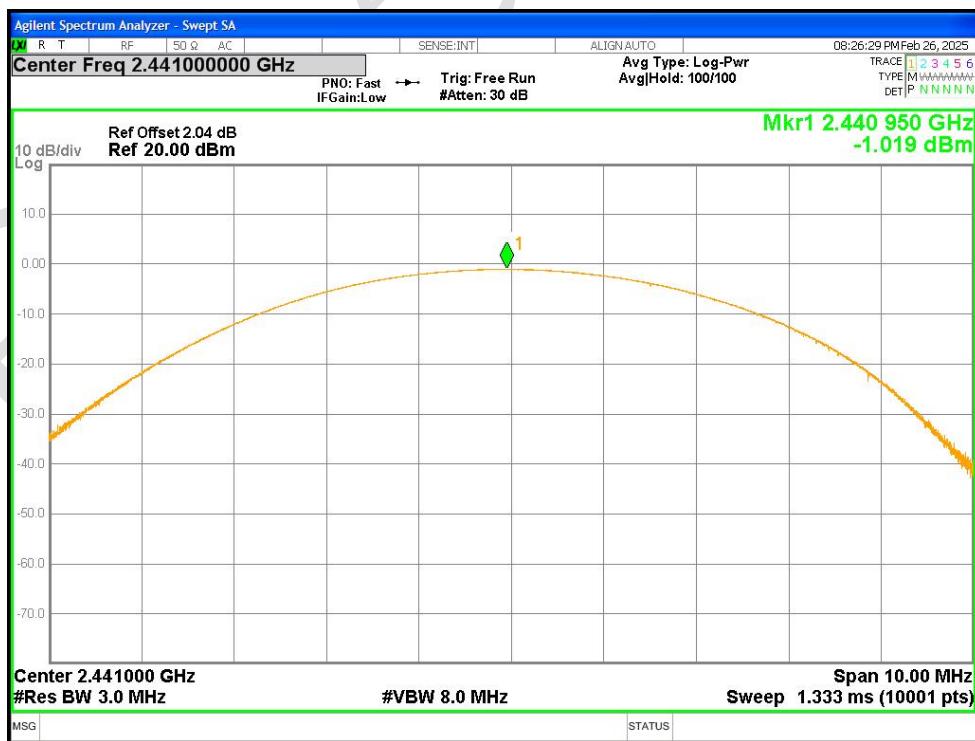


Power NVNT 1-DH1 2480MHz Ant1




Power NVNT 2-DH1 2402MHz Ant1

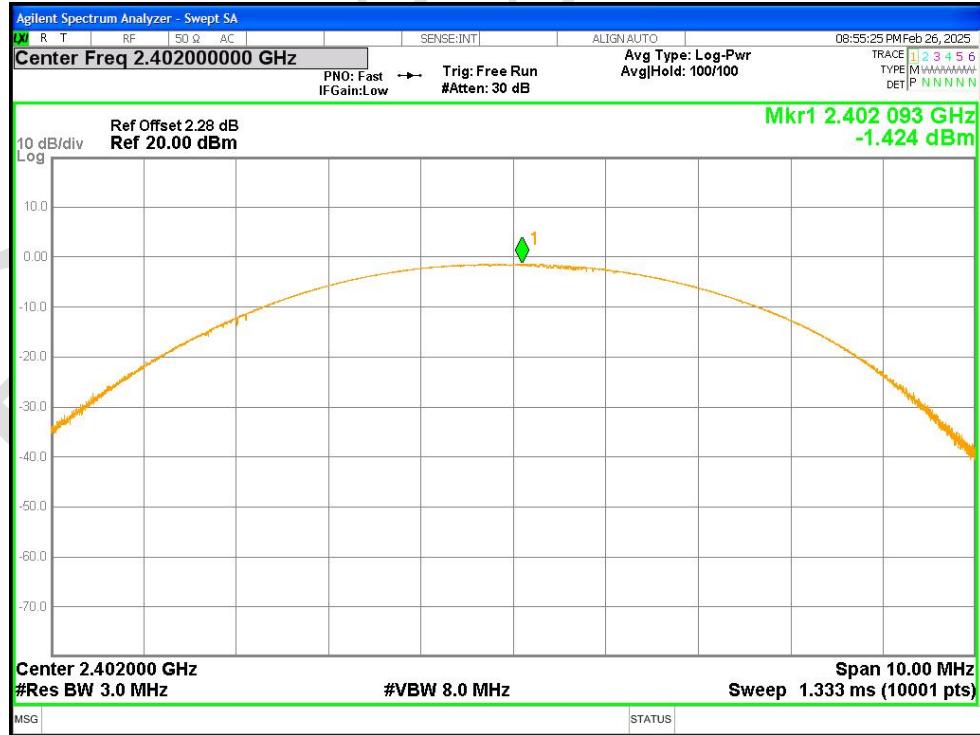


Power NVNT 2-DH1 2441MHz Ant1

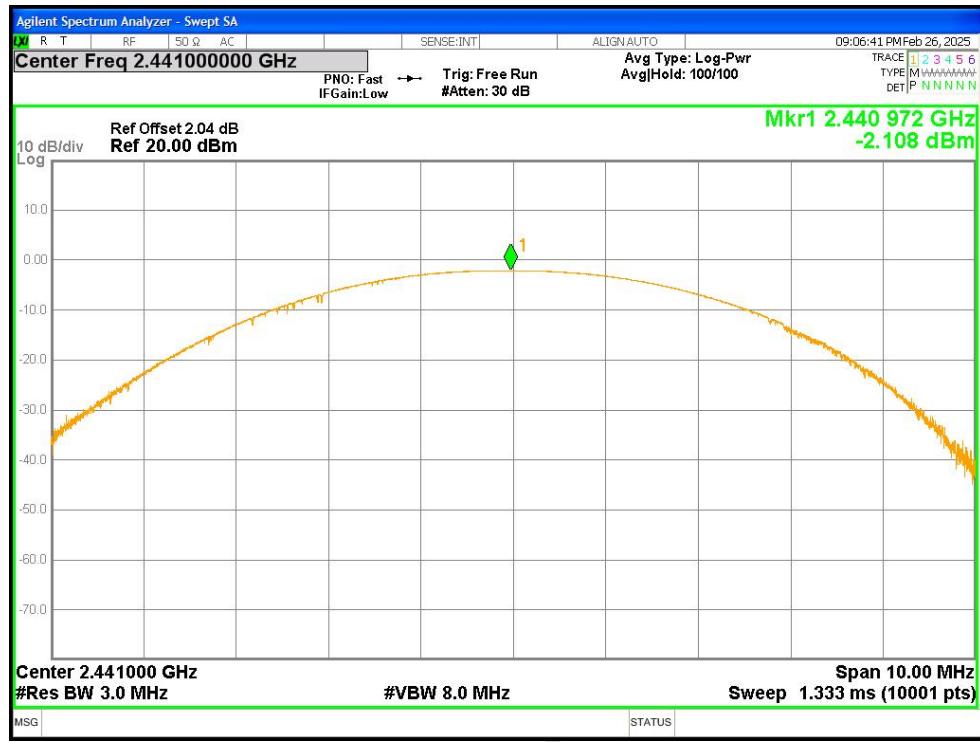


Power NVNT 2-DH1 2480MHz Ant1

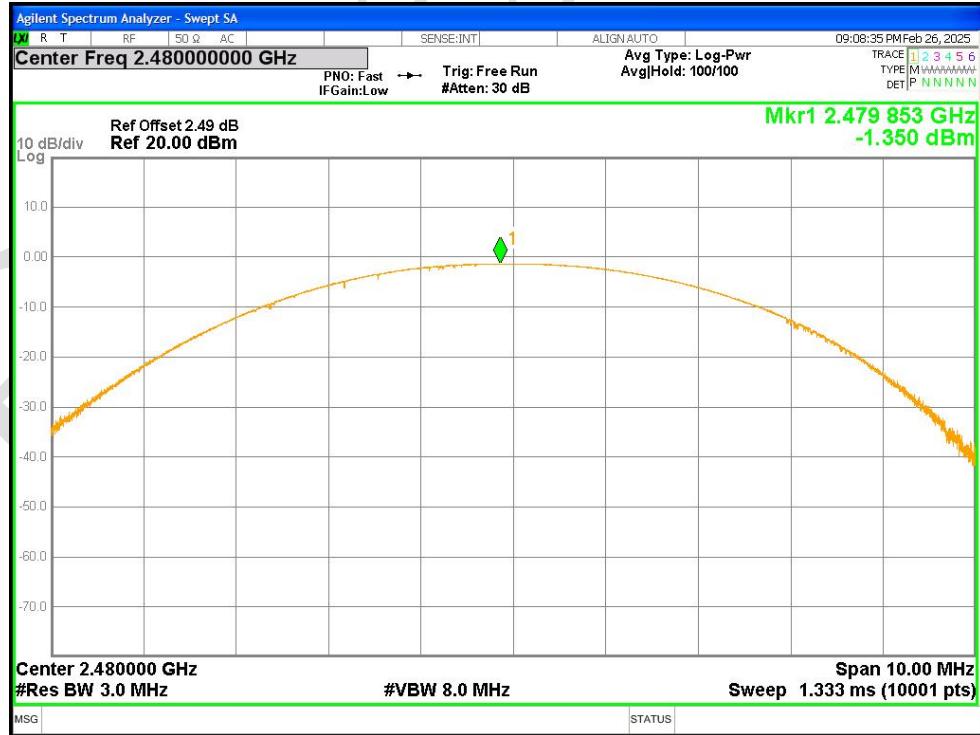


Power NVNT 3-DH1 2402MHz Ant1

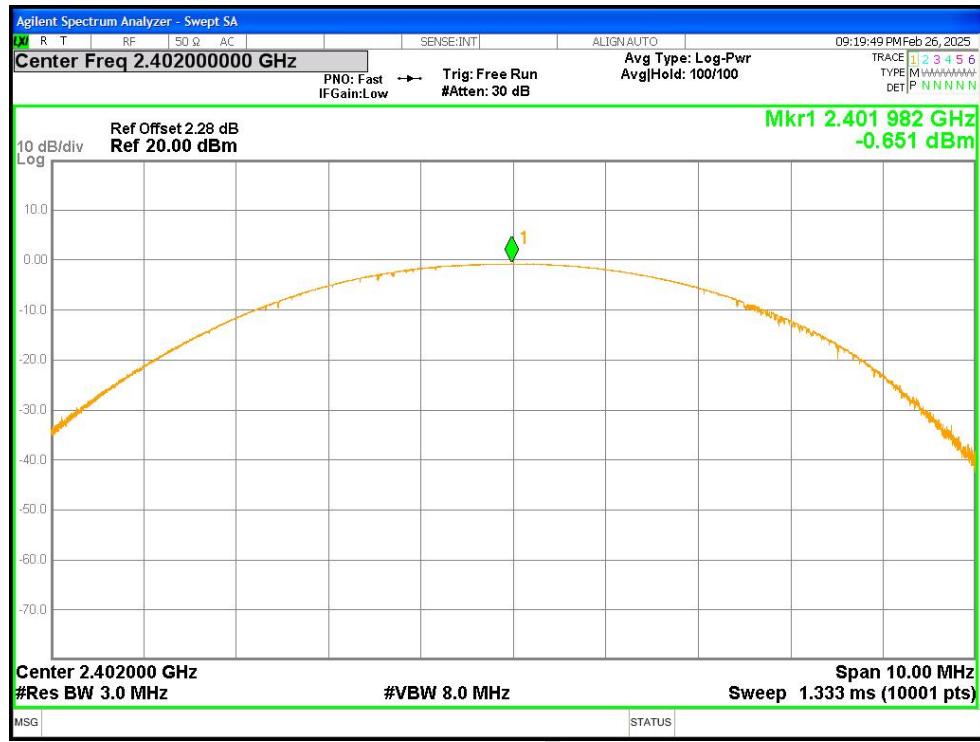

Power NVNT 3-DH1 2441MHz Ant1

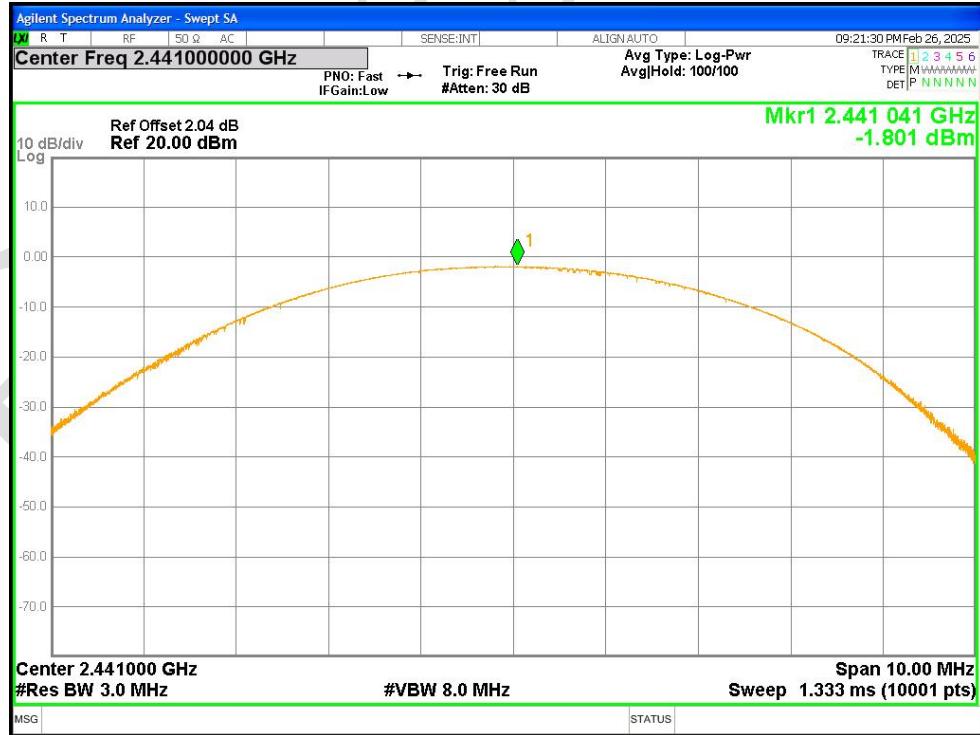


Power NVNT 3-DH1 2480MHz Ant1

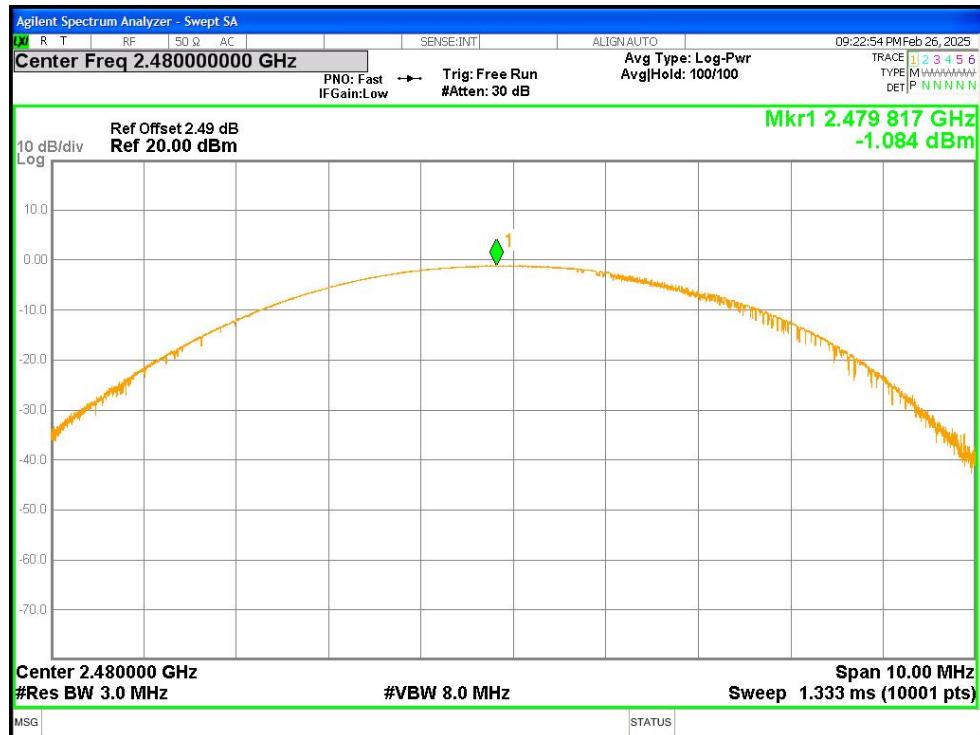


7.2-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.783	N/A	Pass
NVNT	1-DH1	2441	Ant1	0.778	N/A	Pass
NVNT	1-DH1	2480	Ant1	0.783	N/A	Pass
NVNT	2-DH1	2402	Ant1	1.213	N/A	Pass
NVNT	2-DH1	2441	Ant1	1.213	N/A	Pass
NVNT	2-DH1	2480	Ant1	1.208	N/A	Pass
NVNT	3-DH1	2402	Ant1	1.219	N/A	Pass
NVNT	3-DH1	2441	Ant1	1.219	N/A	Pass
NVNT	3-DH1	2480	Ant1	1.217	N/A	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

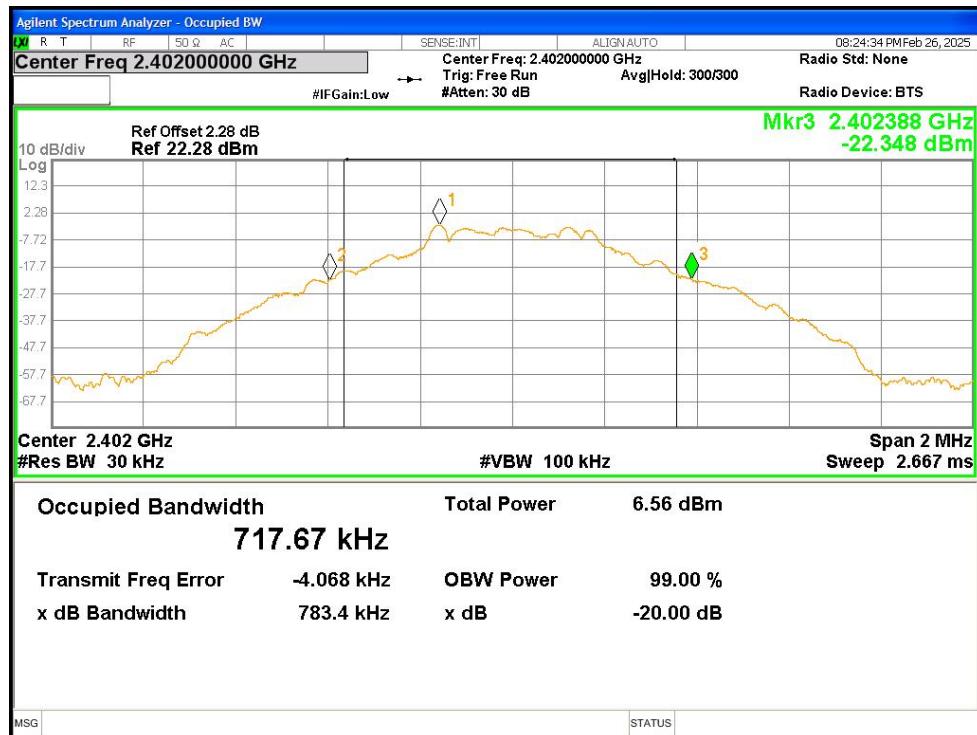


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

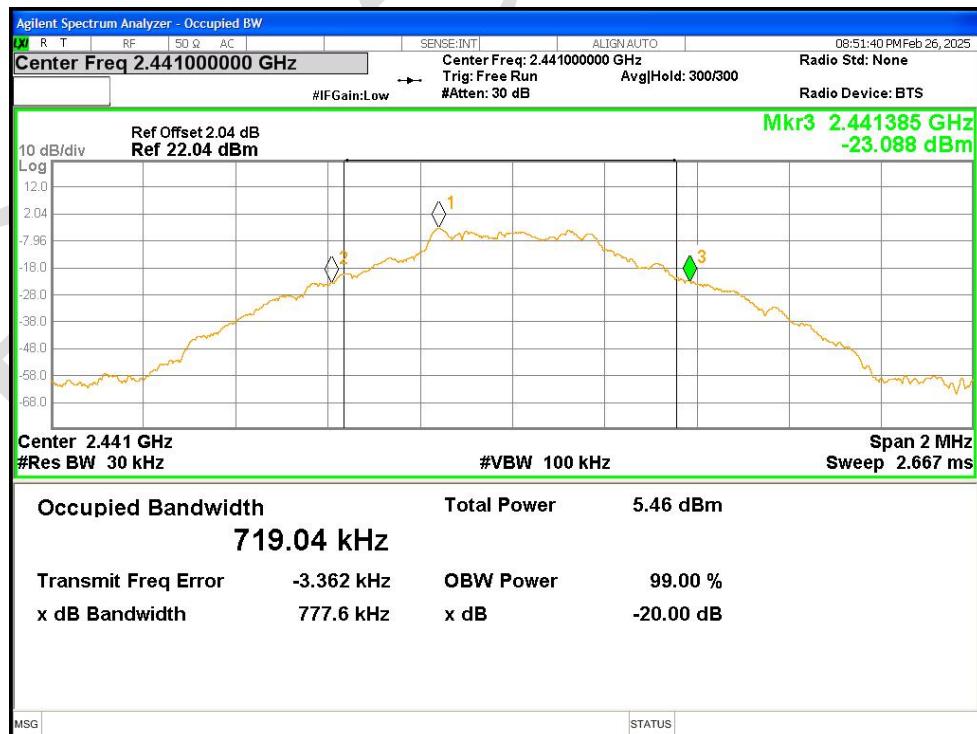


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

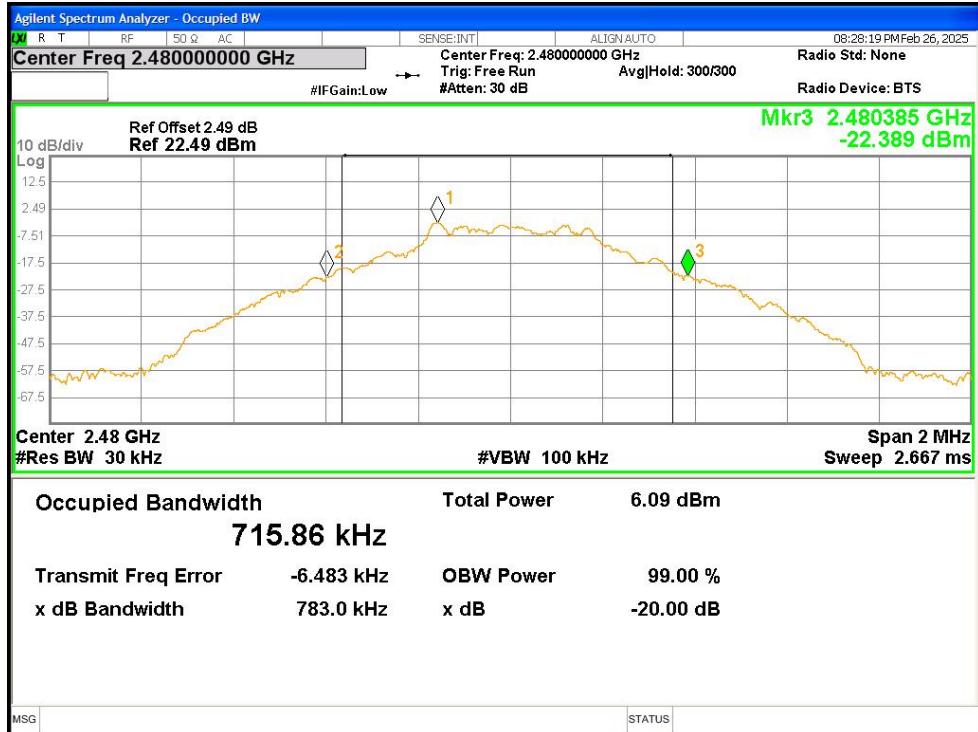


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

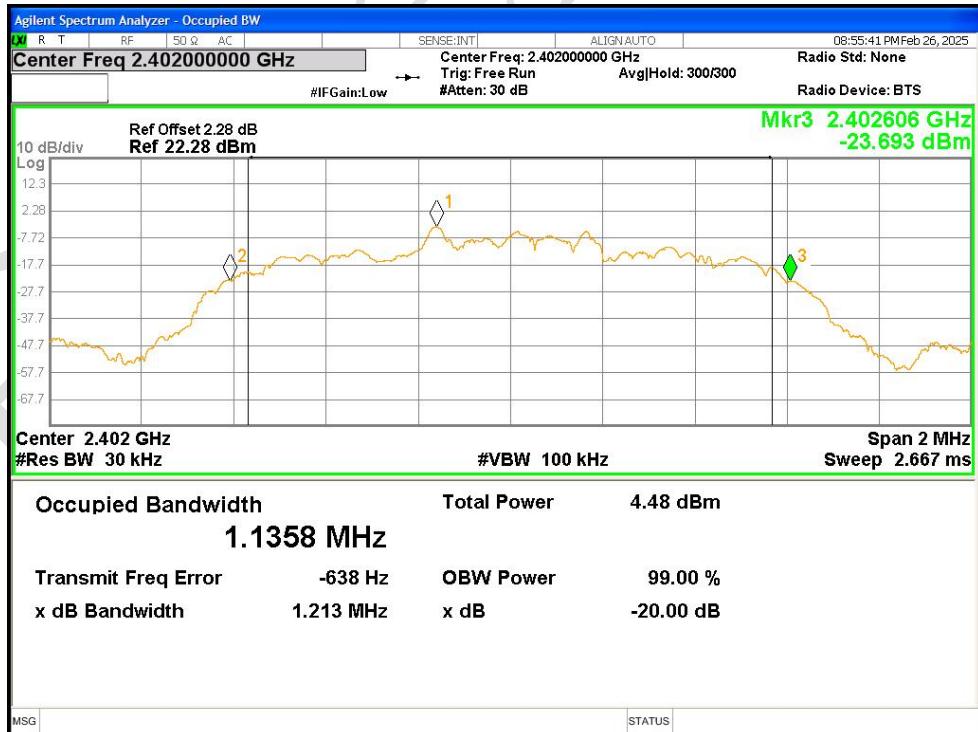


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

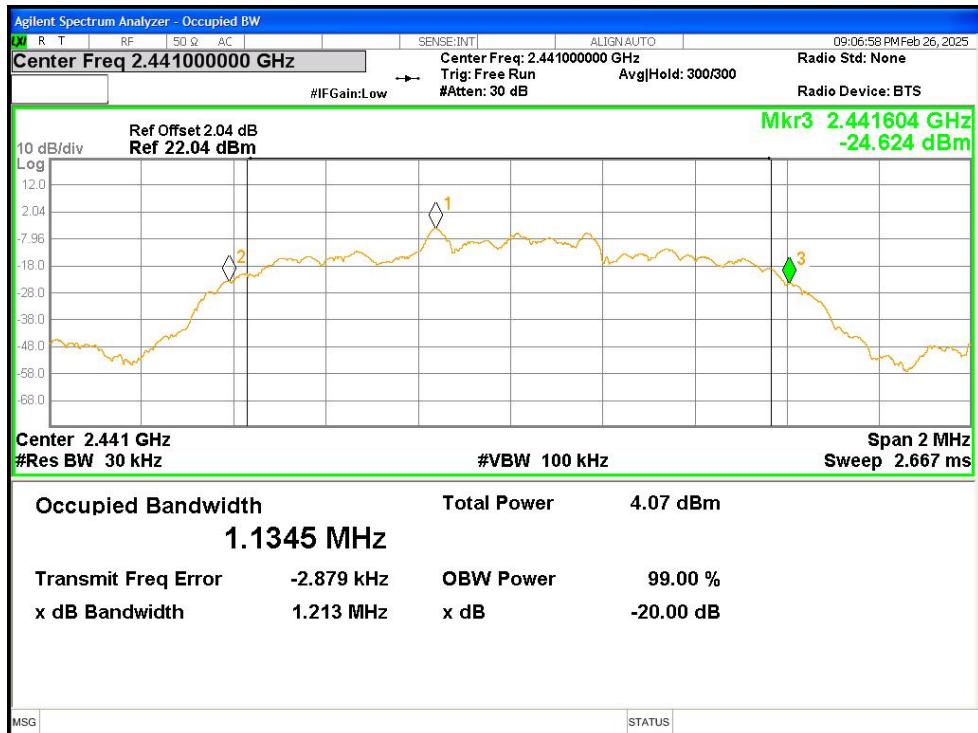


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

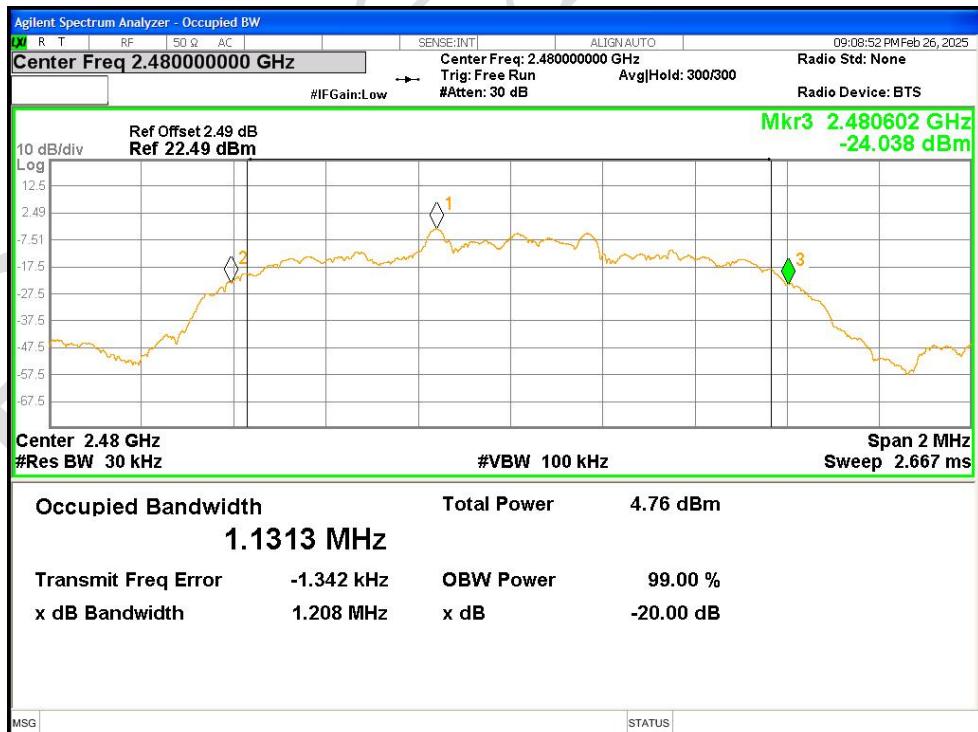


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

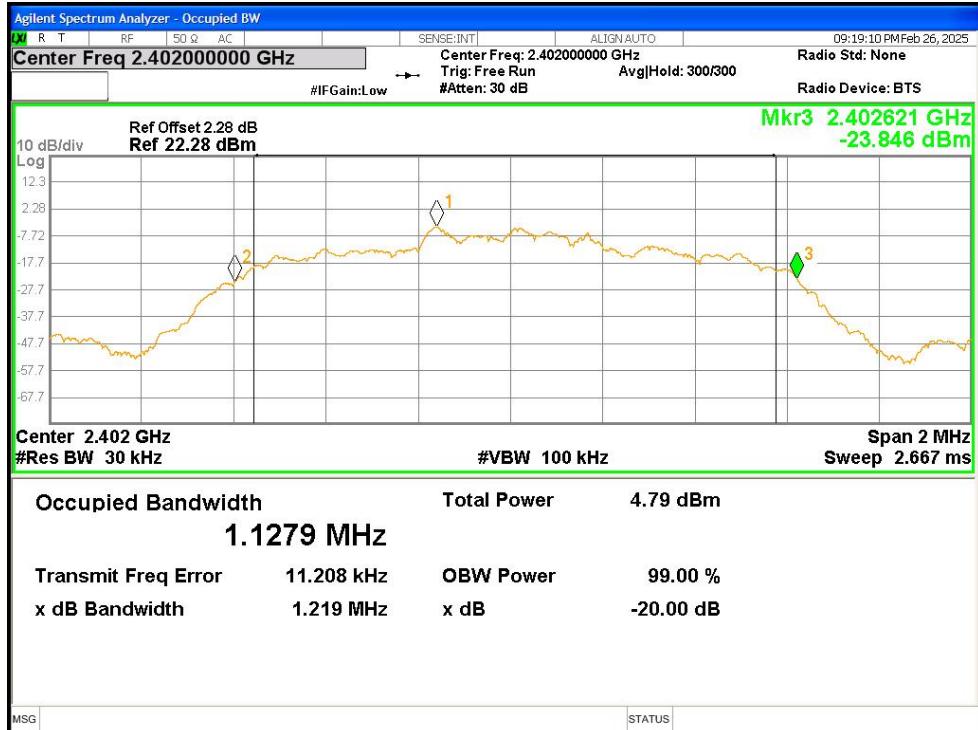

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

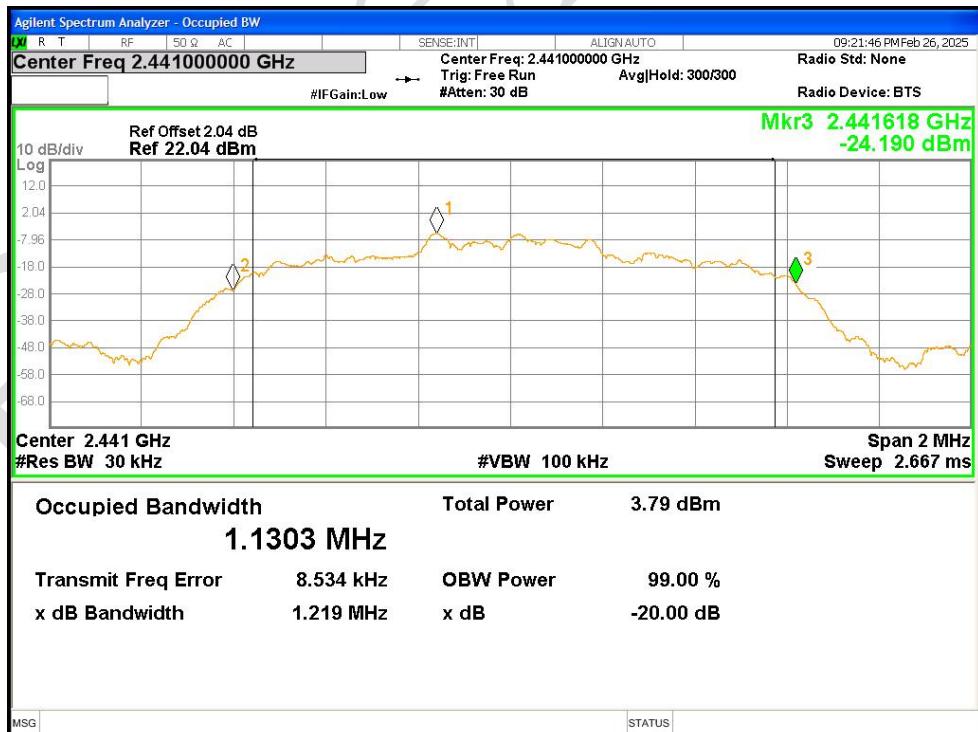


-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

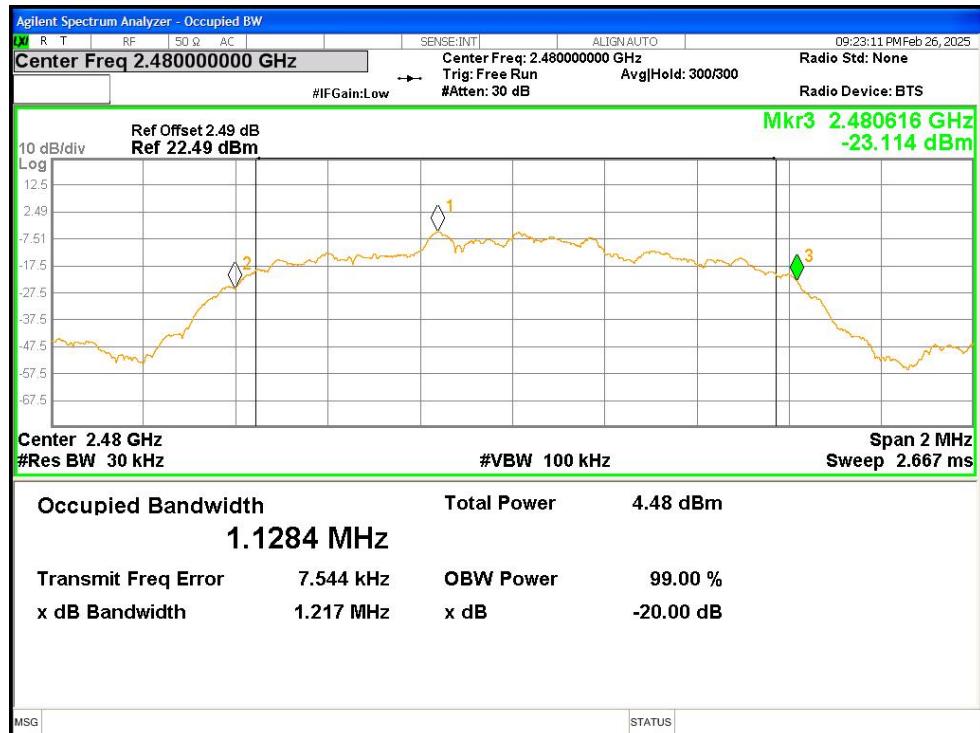


7.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.71993
NVNT	1-DH1	2441	Ant1	0.71883
NVNT	1-DH1	2480	Ant1	0.71956
NVNT	2-DH1	2402	Ant1	1.1319
NVNT	2-DH1	2441	Ant1	1.1349
NVNT	2-DH1	2480	Ant1	1.1348
NVNT	3-DH1	2402	Ant1	1.1292
NVNT	3-DH1	2441	Ant1	1.1311
NVNT	3-DH1	2480	Ant1	1.1281


OBW NVNT 1-DH1 2402MHz Ant1

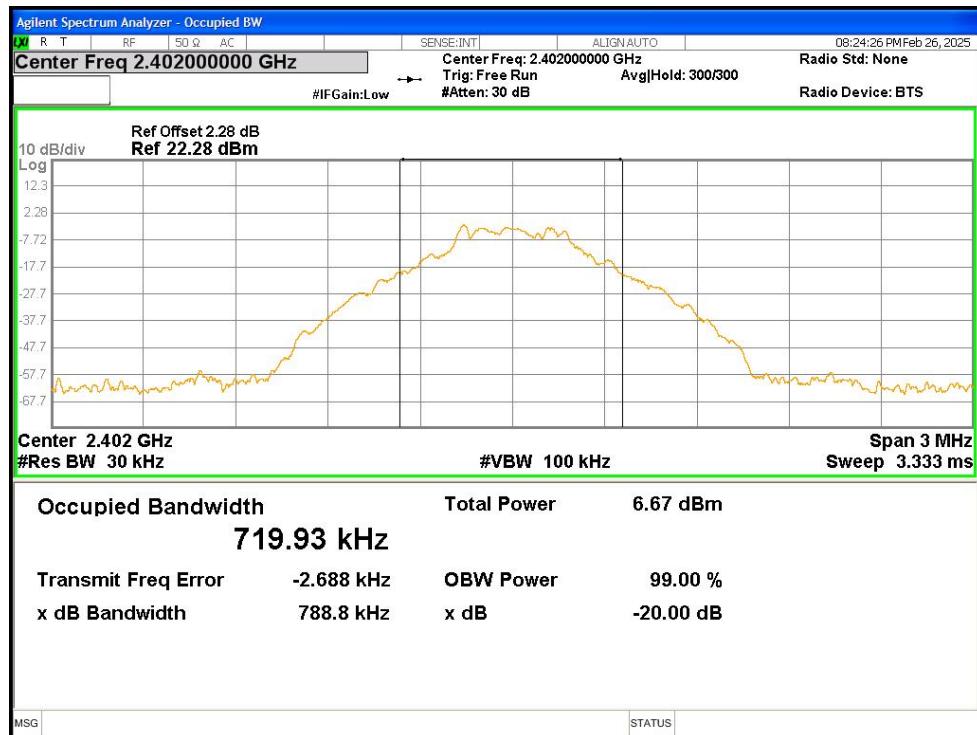

OBW NVNT 1-DH1 2441MHz Ant1

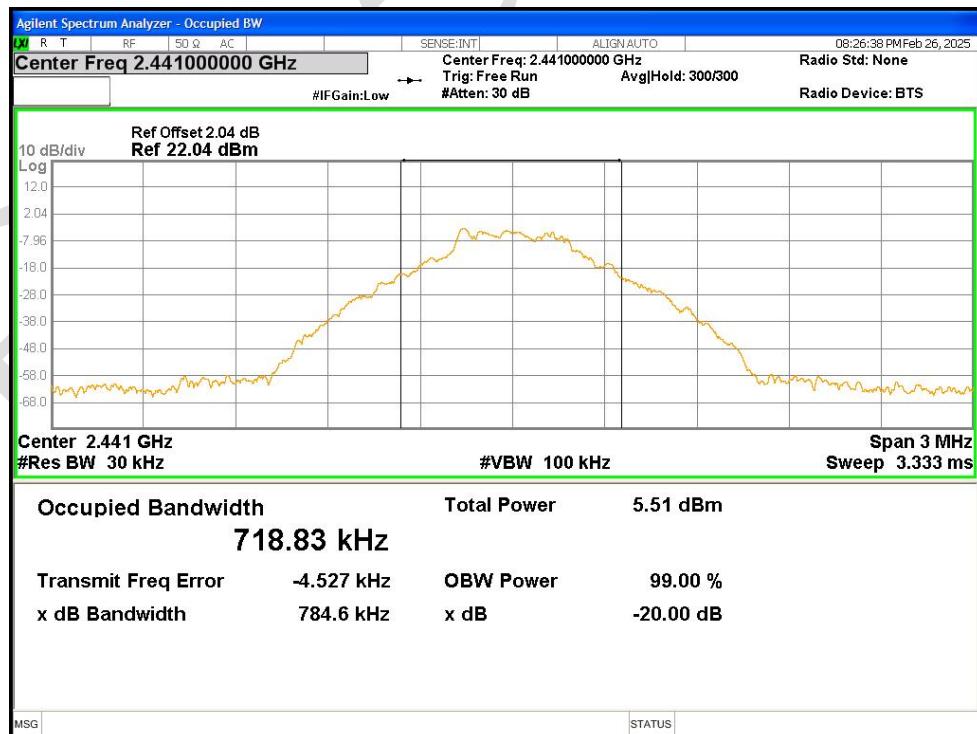

OBW NVNT 1-DH1 2480MHz Ant1

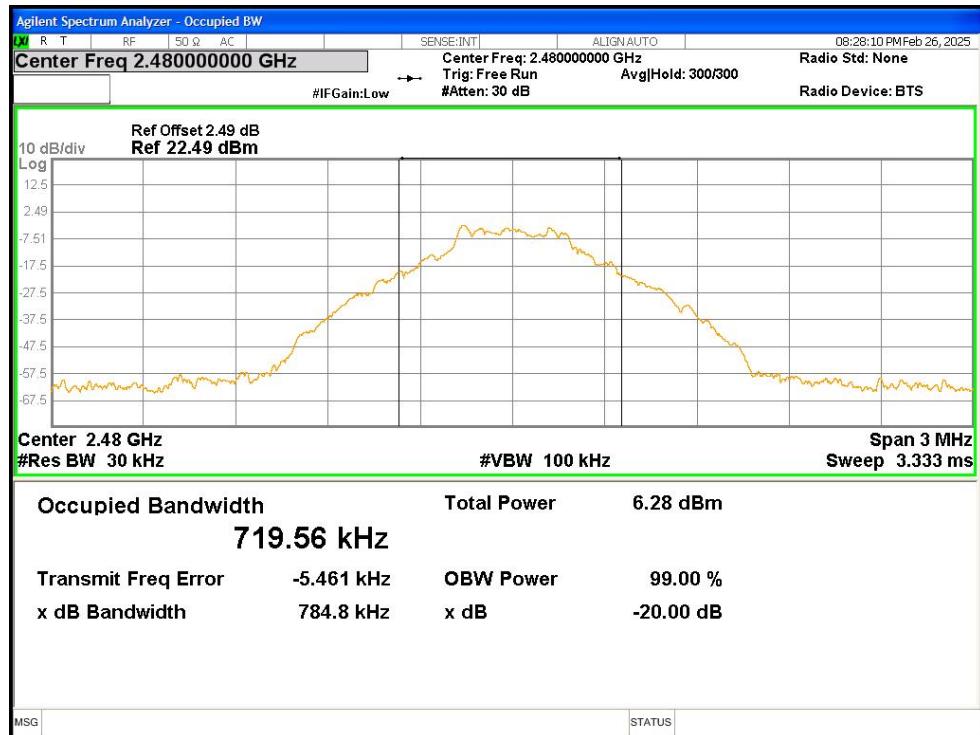

OBW NVNT 2-DH1 2402MHz Ant1

