



ShenZhen Eastong Electronic technology Co., LTD

Room 501, Building 6, Phase II, Dongjiu Innovation Science and
Technology Park, No. 73, Xiali South Road, Xiali Lang
Community, Nanwan Sub-district, Longgang District,
Shenzhen City

APPROVAL SHEET
FOR
S3-A523
(2.4G band internal antenna)

Issued by		Checked by	
Confirmed by		Date	2025-03-13
Customer Confirm			

Project:S3-A523		Author: XU xiaorong	File Name: S3-A523-APP-RA
Date: 2025-03-12			
Rev:	Language:	Check:	
A	ENG		
<div>CONFIDENTIAL</div> <div>ShenZhen Eastong Electronic technology Co., LTD</div> <div>411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen</div>			

Revision History

Date	Revision	Description of Changes
2025-03-12	R:A	Antenna performance approved by customer

1 SUMMARY

2 GENERAL DESCRIPTION

2.1 Definitions

3 MECHANICAL DESCRIPTION

4 ELECTRICAL PERFORMANCE

4.1 Set-up

- 4.1.1 VSWR and return loss
- 4.1.2 Efficiency, Gain and TRP/TIS
- 4.1.3 Matching Circuit Description

4.2 Measurement Data

- 4.2.1 VSWR
- 4.2.2 Active result

5 MECHANICAL DRAWING

6 CONCLUSION

Project:S3-A523		Author: XU xiaorong	File Name: S3-A523-APP-RA
Date: 2025-03-12			
Rev:	Language:	Check:	
A	ENG		
<div>CONFIDENTIAL</div> <div>ShenZhen Eastong Electronic technology Co., LTD</div> <div>411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen</div>			

1 Summary

This report summarizes the electrical results of the proposed antenna to support the S88-A523 program. We test the antenna with the latest version handset .

2 General Description

2.1 Definitions

VSWR: Voltage Standing Wave Rate

3 Mechanical Description

4 Electrical Performance

4.1 Set-up

4.1.1 VSWR and return loss

VSWR measurements (S_{11}) were performed using an Agilent E5070B Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

4.1.2 Efficiency, Gain and TRP/TIS

The gain of the antenna was measured in Dong Xin's 3D anechoic chamber in Shenzhen. The chamber is capable of doing tests from 380MHz to 6GHz. Coaxial chokes on the feed cable were used to mitigate surface currents. The measurement results are calibrated using dipole standards. For TRP and TIS the chamber uses a Agilent 8960 to establish the connection with the mobile device. During TRP tests the 8960 reads the power received through the chamber probes whilst during TIS tests the 8960 transmits through the probe. All data is afterwards corrected by a calibration table.


4.1.3 Matching Circuit Description

No matching.

Project:S3-A523		Author: XU xiaorong	File Name: S3-A523-APP-RA
Date: 2025-03-12			
Rev:	Language:	Check:	
A	ENG		
<div>CONFIDENTIAL</div> <div>ShenZhen Eastong Electronic technology Co., LTD</div> <div>411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen</div>			


4.2 Measurement Data

Freq. (MHz)	TRP (dBm)	Gain (dBi)	Directivity (dBi)	Efficiency (%)
2400.0	2400.00	-2.90	3.39	23.5%
2410.0	2410.00	-4.71	1.42	24.4%
2420.0	2420.00	-3.41	1.66	31.2%
2430.0	2430.00	-2.81	2.62	28.6%
2440.0	2440.00	-1.60	3.36	31.9%
2450.0	2450.00	-2.57	1.43	39.8%
2460.0	2460.00	-1.55	3.13	34.0%
2470.0	2470.00	1.57	5.79	37.8%
2480.0	2480.00	-1.39	3.65	31.4%
2490.0	2490.00	-0.89	3.64	35.3%
2500.0	2500.00	-2.36	2.46	32.9%

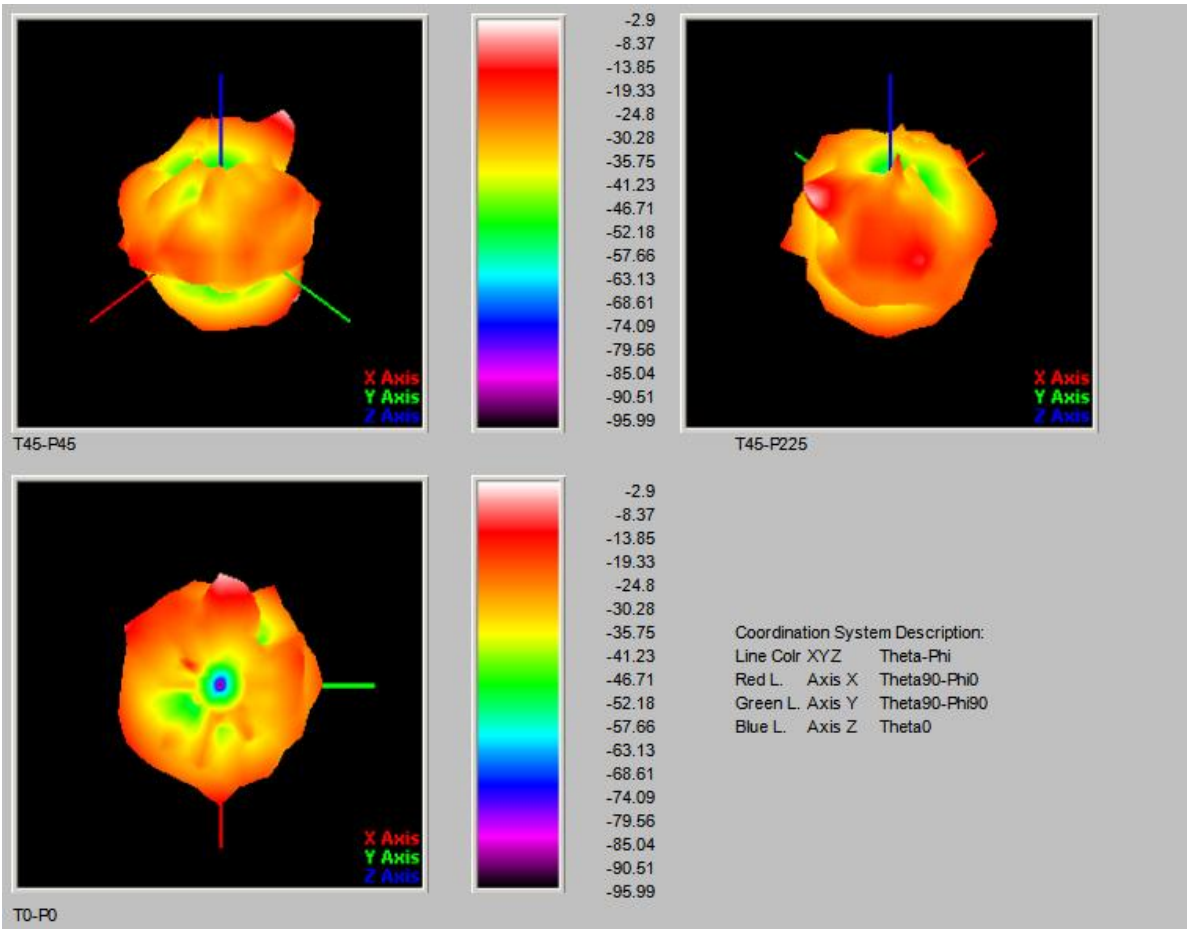


Project:S3-A523		Author: XU xiaorong	File Name: S3-A523-APP-RA
Date: 2025-03-12			
Rev:	Language:	Check:	
A	ENG		
CONFIDENTIAL ShenZhen Eastong Electronic technology Co., LTD 411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen			

Freq. (MHz)	Gain (dBi)	Directivity (dBi)	Efficiency (%)
5050.0	0.97	5.43	35.8%
5100.0	0.04	4.64	34.6%
5150.0	0.47	5.08	34.6%
5200.0	1.25	5.62	36.6%
5250.0	0.34	4.94	34.7%
5300.0	0.10	4.06	40.2%
5350.0	-0.29	3.91	38.0%
5400.0	-1.62	2.48	38.9%
5450.0	-0.11	3.05	48.3%
5500.0	1.49	4.56	49.4%
5550.0	3.05	6.05	50.1%
5600.0	2.41	5.19	52.7%
5650.0	0.92	4.42	44.7%
5700.0	0.82	3.78	41.3%
5750.0	-0.97	3.10	39.2%
5800.0	-0.09	4.35	36.0%
5850.0	-0.63	4.00	34.4%

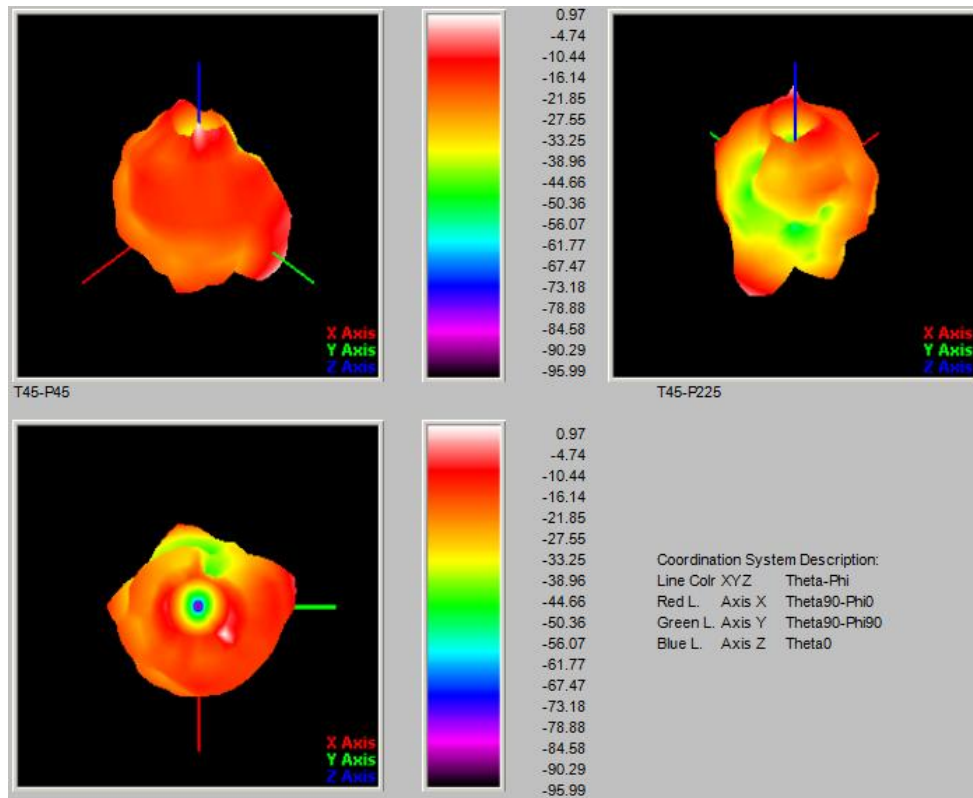

Project:S3-A523		Author: XU xiaorong	File Name: S3-A523-APP-RA
Date: 2025-03-12			
Rev:	Language:	Check:	
A	ENG		
<div>CONFIDENTIAL</div> <div>ShenZhen Eastong Electronic technology Co., LTD</div> <div>411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen</div>			

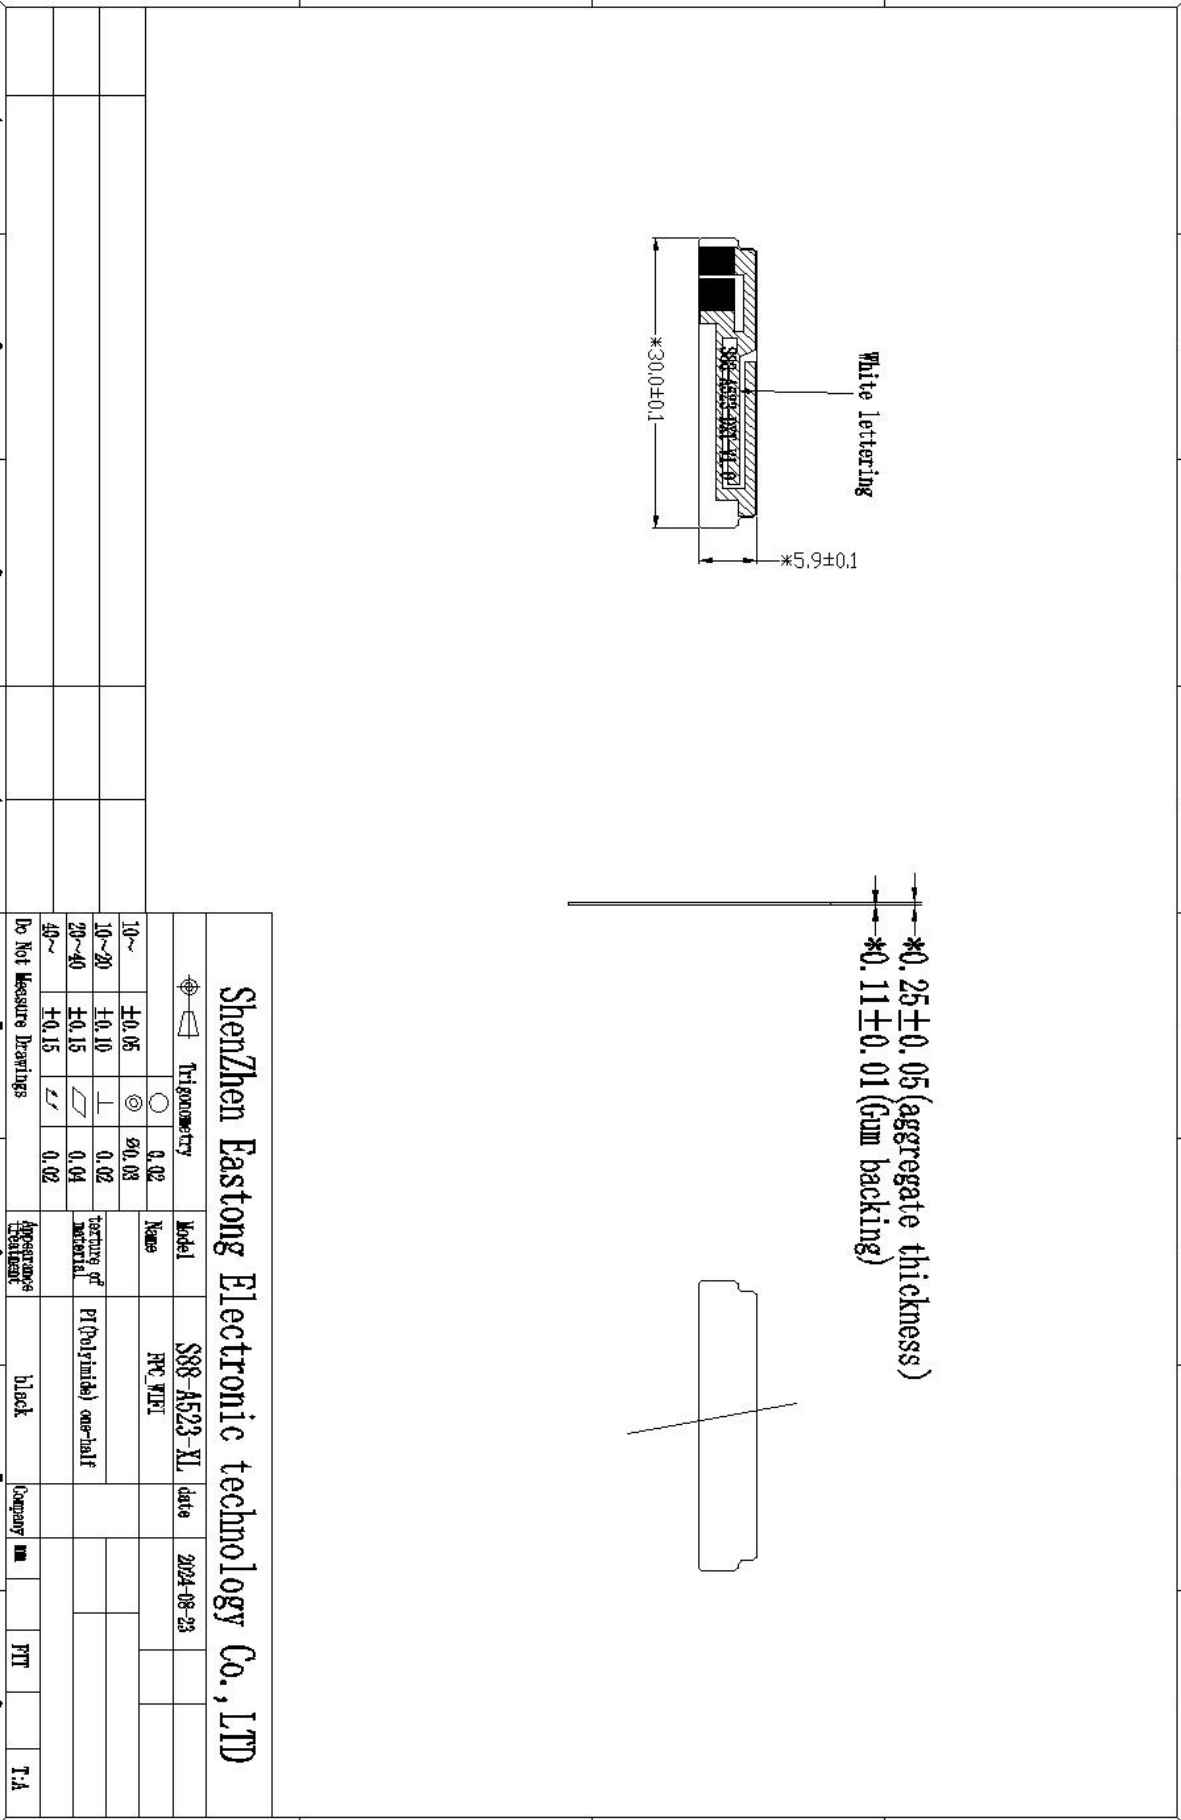

Project:S3-A523		Author: XU xiaorong	File Name: S3-A523-APP-RA
Date: 2025-03-12			
Rev:	Language:	Check:	
A	ENG		
<div>CONFIDENTIAL</div> <div>ShenZhen Eastong Electronic technology Co., LTD</div> <div>411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen</div>			